Product Name:	Card Reader
Model No.:	CMS505
Applicant:	Top Vending Machine Electronics Co.,Ltd. No.11, Anzhong St., Luzhu Dist., Taoyuan City 33868, Taiwan (R.O.C.)
Date of Receipt:	Oct. 06, 2020
Finished date of Test:	Oct. 20, 2020
Applicable Standards:	47 CFR Part 15, Subpart C, 15.231(a) ANSI C63.10: 2013

We, **Spectrum Research & Testing Laboratory Inc.**, hereby certify that one sample of the above was tested in our laboratory with positive results according to the above-mentioned standards. The records in the report are an accurate account of the results. Details of the results are given in the subsequent pages of this report.

Tested By : Richard Lin , Date: 11/13/2020

(Richard Lin)

Approved By : , Date: 11/13/2020

(Johnson Ho, Director)

Revisions History

Report No.	Issue Date	Revisions
FCCA20071703-01	Nov. 13, 2020	Initial issue

Table of Contents

1. DOCUMENT POLICY AND TEST STATEMENT 4
1.1 DOCUMENT POLICY 4
1.2 TEST STATEMENT 4
1.3 EUT MODIFICATION 4
2. DESCRIPTION OF EUT AND TEST MODE 5
2.1 GENERAL DESCRIPTION OF EUT 5
2.2 DESCRIPTION OF EUT INTERNAL DEVICE 5
2.3 DESCRIPTION OF TEST MODE 5
2.4 EUT OPERATING CONDITION 5
2.5 DESCRIPTION OF SUPPORT UNIT 6
2.6 CHANNEL AND FREQUENCY TABLE 6
3. DESCRIPTION OF APPLIED STANDARDS 7
3.1 SUMMARY OF TEST RESULTS 7
4. TECHNICAL CHARACTERISTICS TEST 8
4.1 CONDUCTED EMISSION TEST 8
4.1.1 LIMIT 8
4.1.2 TEST EQUIPMENT 8
4.1.3 TEST SETUP 9
4.1.4 TEST PROCEDURE 9
4.1.5 TEST RESULT 9
4.2 RADIATED EMISSION TEST 10
4.2.1 LIMIT 10
4.2.2 TESR PROCEDURE 10
4.2.3 TEST EQUIPMENT 11
4.2.4 TEST SET-UP 12
4.2.5 TEST RESULT 13
4.3 20DB BANDWIDTH 22
4.3.1 LIMIT 22
4.3.2 TEST EQUIPMENT 22
4.3.3 TEST SET-UP 22
4.3.4 TEST PROCEDURE 22
4.3.5 EUT OPERATING CONDITION 22
4.3.6 TEST RESULT 23
4.4 RELEASE OR OPERATING TIME 25
4.4.1 LIMIT 25
4.4.2 TEST EQUIPMENT 25
4.4.3 TEST SET-UP 25
4.4.4 EUT OPERATING CONDITION 25
4.4.5 TEST RESULT 26
5. ANTENNA APPLICATION 30
5.1 ANTENNA REQUIREMENT 30
5.2 RESULT 30
6. TERMS OF ABBREVIATION 31

1. DOCUMENT POLICY AND TEST STATEMENT

1.1 DOCUMENT POLICY

- The report shall not be reproduced except in full, without the written approval of SRT Lab, Inc.
- FCC Registered Test Site Number：TW1016

1.2 TEST STATEMENT

- The test results in the report apply only to the unit tested by SRT Lab.
- There was no deviation from the requirements of test standards during the test.
- DC power source, DC 12V from battery, was used during the test.

1.3 EUT MODIFICATION

- No modification in SRT Lab.

2. DESCRIPTION OF EUT AND TEST MODE

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Card Reader
MODEL NO.	CMS505
POWER SUPPLY	DC power source, DC 12V from battery
CABLE	NA
OPERATING FREQUENCY	410 MHz ~ 441 MHz
NUMBER OF CHANNEL	32 CH
RATED RF OUTPUT POWER	79.88 dBuV/m at 3m
MODULATION TYPE	FSK
MODE OF OPERATION	Half duplex
ANTENNA TYPE	Printed Antenna
ANTENNA GAIN	3.0 dBi

NOTE:
For more detailed information, please refer to the EUT's specification or user's manual provided by manufacturer.

2.2 DESCRIPTION OF EUT INTERNAL DEVICE

DEVICE	BRAND / MAKER	MODEL #	FCC ID / DOC	REMARK
N/A				

2.3 DESCRIPTION OF TEST MODE

There are test modes for each test configuration as below:

Mode		Channel	Frequency (MHz)
01	TX1	CH00	410
02	TX2	CH16	426
03	TX3	CH31	441

NOTE:
1. Below 1 GHz were pre-tested in chamber and chosen the worst case for conducted and radiated emission test.
2. Above 1 GHz were tested individually.
3. The axis X,Y and Z we evaluate in chamber, the X axis is worst case.

2.4 EUT OPERATING CONDITION

1. For use customer provided continuous transmission EUT.
2. Turn on the power of all equipment and EUT.
3. Set the EUT under continuous transmission condition.

2.5 DESCRIPTION OF SUPPORT UNIT

The EUT was configured by the requirement of ANSI C63.10:2013. All interface ports were connected to the appropriate support units via specific cables. The support units and cables are listed below.

NO	DEVICE	BRAND	MODEL #	FCC ID/DOC	NOTE
1	Charge Battery	HITACHI	55D23R-MF	DoC	12V

NOTE: For the actual test configuration, please refer to the photos of testing.

2.6 CHANNEL AND FREQUENCY TABLE

Channel	Frequency	Channel	Frequency
CH00	410 MHz	CH16	426 MHz
CH01	411 MHz	CH17	427 MHz
CH02	412 MHz	CH18	428 MHz
CH03	413 MHz	CH19	429 MHz
CH04	414 MHz	CH20	430 MHz
CH05	415 MHz	CH21	431 MHz
CH06	416 MHz	CH22	432 MHz
CH07	417 MHz	CH23	433 MHz
CH08	418 MHz	CH24	434 MHz
CH09	419 MHz	CH25	435 MHz
CH10	420 MHz	CH26	436 MHz
CH11	421 MHz	CH27	437 MHz
CH12	422 MHz	CH28	438 MHz
CH13	423 MHz	CH29	439 MHz
CH14	424 MHz	CH30	440 MHz
CH15	425 MHz	CH31	441 MHz

3. DESCRIPTION OF APPLIED STANDARDS

The EUT is a wireless product. According to the specifications provided by the applicant, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C, 15.231(a)

ANSI C63.10: 2013

All tests have been performed and recorded as the above standards.

3.1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

STANDARD SECTION	TEST TYPE AND LIMIT RESULTS	RESULT
15.207	Conducted Emission	N/A
15.231(a)(3) 15.231(b)	Radiated Emission	PASS
15.231(c)	20dB Bandwidth Limit: 0.25% × Center Frequency	PASS
15.231(a)	RELEASE OR OPERATING TIME Limit: max. 5 seconds	PASS
15.203	Antenna requirement	PASS

4. TECHNICAL CHARACTERISTICS TEST

4.1 CONDUCTED EMISSION TEST

4.1.1 LIMIT

Frequency (MHz)	Class A (dBμV)		Class B (dBμV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTE:
1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST EQUIPMENT

The following test equipment was used for the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 kHz ~ 2.75 GHz	ROHDE & SCHWARZ	ESCS30 / 100376	JAN. 06, 2021 ETC
EMI TEST RECEIVER	9 kHz ~ 30 MHz	ROHDE & SCHWARZ	ESHS30 / 826003/008	JAN. 13, 2021 ETC
LISN	50 μH, 50 ohm	SOLAR	9252-50-R-24-BNC/9 51315	JAN. 20, 2021 ETC
LISN	50 μH, 50 ohm	SCHWARZBECK	NSLK 8127/ 8127-808	DEC. 10, 2020 ETC
50Ω BNC TYPE TERMINATOR	50 ohm	N/A	11593A/ L1TEQU005	NOV. 06, 2020 ETC
50Ω BNC TYPE TERMINATOR	50 ohm	N/A	B00-CD-357/ L1TEQU009	MAY. 25, 2021 ETC
COAXIAL CABLE	5 m	HUBER+SUHNER	RG214/U / L1TCAB013(#5m)	MAY. 25, 2021 ETC
FILTER	2 LINE, 30 A	FIL.COIL	FC-943 / 771	NCR
GROUND PLANE	2 m (H) x 3 m (W)	SRT	N/A	NCR
GROUND PLANE	2.5 m (H) x 3 m (W)	SRT	N/A	NCR
PULSE LIMITER	9 kHz ~ 30 MHz Insertion Loss= 10dB±0.3dB	ROHDE & SCHWARZ	ESH3Z2/ L1TTES009	DEC. 19, 2020 ETC
THERMO-HYGRO	15 – 40 °C, 0- 100% RH	TES	TES-1161/ 180704762	MAR. 06, 2021 ETC

NOTE:
The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.1.3 TEST SETUP

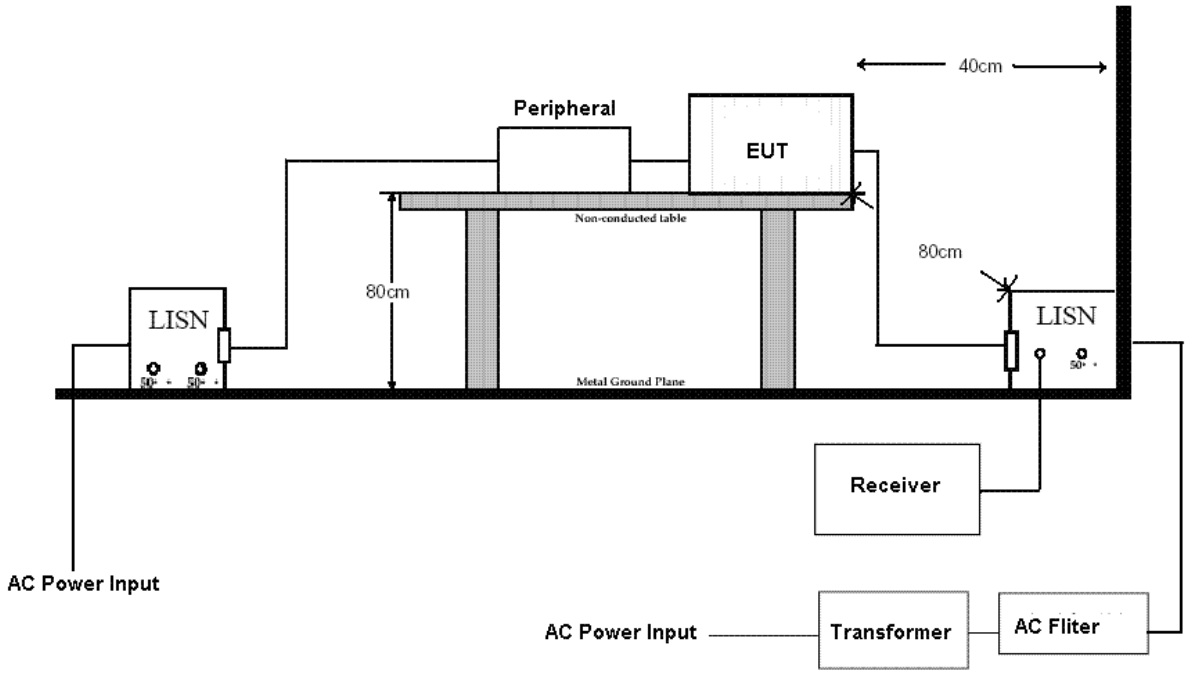

NOTE :
1. The EUT was put on a wooden table with 0.8m heights above ground plane, and 0.4m away from reference ground plane (> 2mx2m).
2. For the actual test configuration, please refer to the photos of testing.

4.1.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.10:2013 and CISPR22:2003. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 ohm/50μH as specified. All readings were quasi-peak and average values with 10 kHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. Both lines of the power mains of EUT were measured and the cables connected to EUT and support units were moved to find the maximum emission levels for each frequency. First, find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

4.1.5 TEST RESULT

N/A

4.2 RADIATED EMISSION TEST

4.2.1 LIMIT

FCC Part15, Subpart C Section 15.231(b), In addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	[1]1,250 to 3,750	[1]125 to 375
174-260	3,750	375
260-470	[1]3,750 to 12,500	[1]375 to 1,250
Above 470	12,500	1,250

[1]Linear interpolations.

4.2.2 TESR PROCEDURE

The EUT was tested according to the requirement of ANSI C63.10:2013 and CISPR 22:2003. When the frequency spectrum measured started from 30 MHz to 1 GHz, then use antenna is a BICONICAL ANTENNA & LOG PERIODIC ANTENNA. The measurements were made at an open area test site with 3 meter measurement distance under 1 GHz and with 3m distance above 1GHz. The frequency spectrum measured started from 30 MHz to 1 GHz, all readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, the measurements were made at an open area test site with 3 meter measurement distance and all readings were peak or average values with 1 MHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency. First, find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

4.2.3 TEST EQUIPMENT

Below 1 GHz The following test equipment was used during the radiated emission test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER	FINAL TEST BE USED
EMI TEST RECEIVER	9 kHz ~ 2.75 GHz	ROHDE & SCHWARZ	ESCS30 / 100376	JAN. 06, 2021 ETC	■
LOOP ANTENNA	9 kHz ~ 30 MHz	ROHDE & SCHWARZ	HFH2-Z2/ 860605/002	MAY 21, 2021 ETC	□
BICONICAL ANTENNA	30 MHz ~ 200 MHz	EMCO	3108/ 2334	NOV. 14, 2020 ETC	■
LOG PERIODIC ANTENNA	200 MHz ~ 1 GHz	EMCO	3146/ 9002-2686	MAR. 01, 2021 ETC	■
OPEN AREA TEST SITE	3 – 10 M MEASUREMENT	SRT	A02 / SRT002	MAR. 06, 2021 SRT	■
COAXIAL CABLE	30 M	TIMES	LMR-400 / #30M(L1TCAB014)	JUN. 08, 2021 ETC	■
COAXIAL CABLE	9k - 1GHz	TIMES	LMR-400(#2m) / L1TCAB012	JAN. 05, 2021 ETC	■
FILTER	2 LINE, 30 A	FIL.COIL	FC-943/869	NCR	■
PRE-AMPLIFIER	0.1 MHz ~ 1.3 GHz	HP	8447D / 2944A06746	DEC. 08, 2020 ETC	■
THERMO-HYGRO	15 – 40°C, 0- 100% RH	TOP	20-A / 6644	DEC. 08, 2020 ETC	■

Above 1 GHz The following test equipment was used during the radiated emission test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER	FINAL TEST BE USED
SPECTRUM ANALYZER	9 kHz ~ 40GHz	ROHDE & SCHWARZ	FSP40 / 100093	JAN.06, 2021 ETC	■
PRE-AMPLIFIER	1 GHz ~ 26.5 GHz	AGILENT	8449B/ 3008A01995	JAN.05, 2021 ETC	■
HORN ANTENNA	1 GHz ~ 18 GHz	EMCO	3115/9602-4681	NOV.13, 2020 ETC	■
HORN ANTENNA	18 ~ 40 GHZ	ETS-LINDGREN	3116/00032255	JAN. 14, 2021 ETC	■
ANECHOIC CHAMBER	3 M MEASUREMENT	SRT	A01/SRT001	DEC. 13, 2020 SRT	■
RF CABLE	UP TO 18 GHz 1.5 m	JYEBAO	A30A30-L 142 / EQF-0035(001)	NOV. 24, 2020 ETC	■
RF CABLE	UP TO 26.5 GHz 3.5 m	EMCI	EMC104-SM-SM-3500 / 150601	NOV. 18, 2020 ETC	■
K-TYPE CABLE	UP TO 40 GHz 3 m	HUBER+SUHNER	SF102-46/2*11SK252 /MY2611/2	MAR. 15, 2021 ETC	■
K-TYPE CABLE	UP TO 40 GHz, 1 m	HUBER+SUHNER	SF102/2*11SK252 /MY3331/2	DEC. 16, 2020 ETC	■
FILTER	2 LINE, 30 A	FIL.COIL	FC-943/869	NCR	■
THERMO-HYGRO	15 – 40 ℃, 0- 100% RH	TOP	20-A / 6644	DEC. 08, 2020 ETC	■

4.2.4 TEST SET-UP

30 MHz ~ 1 GHz

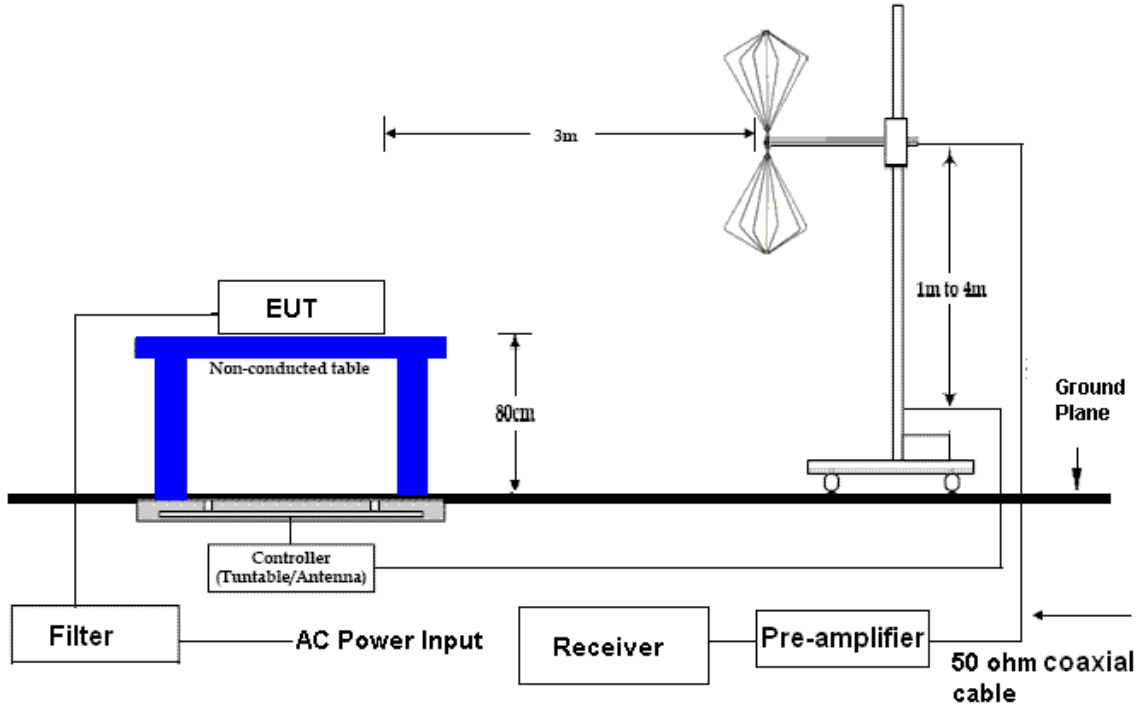

Above 1 GHz

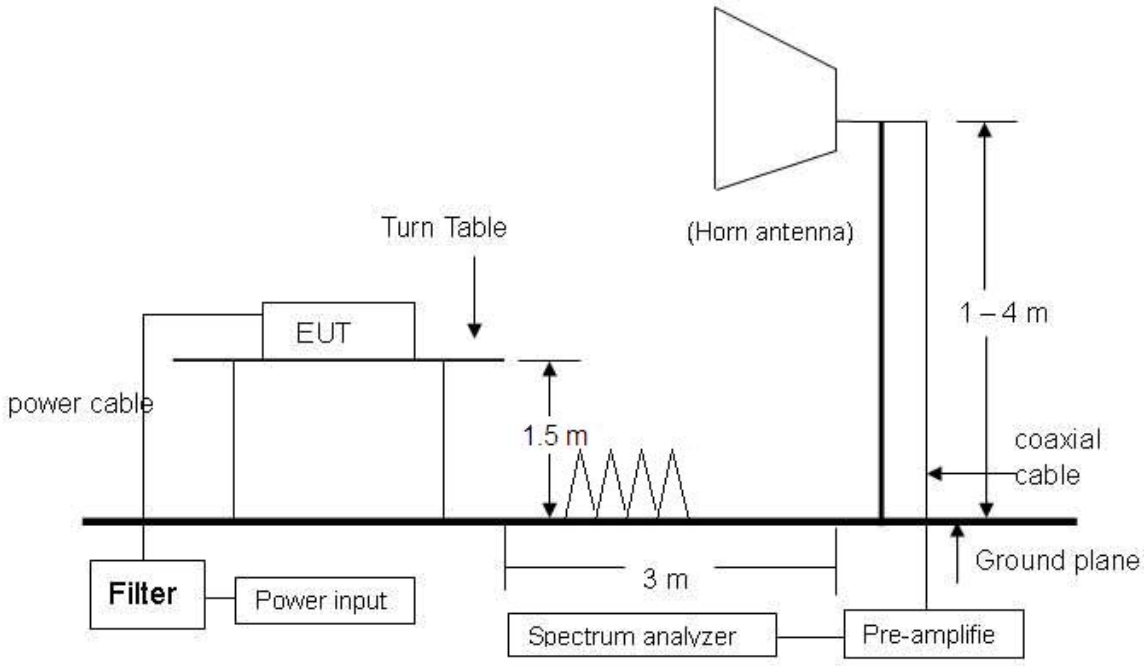

NOTE: The EUT system was put on a wooden table with 1.5m heights above a ground plane. For the actual test configuration, please refer to the photos of testing.

4.2.5 TEST RESULT

Temperature:	21 °C	Humidity:	69 %RH
Frequency Range:	30 M – 1 GHz	Tested Mode:	TX1 (Fundamental and Harmonics)
Detector Type:	Quasi-peak	IF Bandwidth:	120 kHz
Tested By:	Richard	Tested Date:	Oct. 06, 2020

Antenna Polarization：Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(º)	EL(m)
410.00(F)	4.96	16.60	28.09	85.69	79.17	100.00	-20.83	73	2.34
820.00	7.74	22.60	28.11	24.74	26.97	61.90	-34.93	155	1.35

Antenna Polarization：Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(º)	EL(m)
410.00(F)	4.96	16.60	28.09	79.36	72.84	100.00	-27.16	69	2.21
820.00	7.74	22.60	28.11	34.16	36.39	61.90	-25.51	128	3.29

NOTE :
1. Measurement uncertainty is 4.20 dB.
2. "*": Measurement does not apply for this frequency.
3. Emissiom Level = Reading Value + Ant. Factor + Cable Loss – Pre-Amplifier.
4. The field strength of other emission frequencies were very low against the limit.
5. (F):The field stregth of fundamental frequency.

Temperature:	21 °C	Humidity:	69 %RH
Frequency Range:	30 M – 1 GHz	Tested Mode:	TX1
Detector Type:	Quasi-peak	IF Bandwidth:	120 kHz
Tested By:	Richard	Tested Date:	Oct. 06, 2020

Antenna Polarization：Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
126.91	2.53	12.00	28.00	48.44	34.97	41.90	-6.93	256	3.54
215.03	3.24	11.70	27.55	48.76	36.15	51.50	-15.35	34	3.29
242.84	3.51	12.24	27.49	50.38	38.64	51.50	-12.86	299	3.11
269.55	3.76	13.20	27.42	49.85	39.39	52.13	-12.74	149	3.04
320.26	4.22	15.00	27.48	44.98	36.72	55.16	-18.44	67	2.76
622.19	6.44	19.90	28.54	40.35	38.15	61.90	-23.75	202	1.84

Antenna Polarization：Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
31.46	1.73	14.40	28.30	45.90	33.74	40.00	-6.27	57	1.06
126.35	2.53	12.00	28.00	48.42	34.95	41.90	-6.95	122	1.34
269.98	3.76	13.20	27.42	46.76	36.30	52.16	-15.86	348	1.77
610.14	6.36	19.60	28.56	38.80	36.20	61.90	-25.71	200	2.35
622.37	6.44	19.90	28.54	42.68	40.48	61.90	-21.42	137	2.69
649.05	6.63	20.28	28.50	36.63	35.04	61.90	-26.86	263	2.97

NOTE :
1. Measurement uncertainty is 4.20 dB.
2. "*": Measurement does not apply for this frequency.
3. Emissiom Level = Reading Value + Ant. Factor + Cable Loss – Pre-Amplifier.
4. The field strength of other emission frequencies were very low against the limit.

Temperature:	21 °C	Humidity:	69 %RH
Frequency Range:	30 M – 1 GHz	Tested Mode:	TX2 (Fundamental and Harmonics)
Detector Type:	Quasi-peak	IF Bandwidth:	120 kHz
Tested By:	Richard	Tested Date:	Oct. 06, 2020

Antenna Polarization：Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
426.00(F)	5.08	16.82	28.16	85.89	79.63	100.56	-20.93	58	2.38
852.00	7.98	23.00	27.97	24.03	27.04	61.90	-34.86	157	1.29

Antenna Polarization：Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
426.00(F)	5.08	16.82	28.16	86.14	79.88	100.56	-20.68	74	2.19
852.00	7.98	23.00	27.97	30.72	33.73	61.90	-28.17	149	3.35

NOTE :
1. Measurement uncertainty is 4.20 dB.
2. "*": Measurement does not apply for this frequency.
3. Emissiom Level = Reading Value + Ant. Factor + Cable Loss – Pre-Amplifier.
4. The field strength of other emission frequencies were very low against the limit.
5. (F):The field stregth of fundamental frequency.

Temperature:	21 °C	Humidity:	69 %RH
Frequency Range:	30 M – 1 GHz	Tested Mode:	TX2
Detector Type:	Quasi-peak	IF Bandwidth:	120 kHz
Tested By:	Richard	Tested Date:	Oct. 06, 2020

Antenna Polarization：Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
126.70	2.53	12.00	28.00	48.55	35.08	41.90	-6.82	318	3.55
215.93	3.24	11.70	27.55	48.68	36.07	51.50	-15.43	55	3.41
242.02	3.51	12.24	27.49	49.95	38.21	51.50	-13.29	247	3.29
269.45	3.76	13.20	27.42	50.15	39.69	52.13	-12.44	109	3.11
320.81	4.22	15.00	27.48	44.69	36.43	55.19	-18.76	293	2.88
622.22	6.44	19.90	28.54	39.74	37.54	61.90	-24.36	145	2.03

Antenna Polarization：Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
31.80	1.73	14.40	28.30	46.00	33.84	40.00	-6.17	334	1.13
126.37	2.53	12.00	28.00	47.83	34.36	41.90	-7.54	20	1.35
269.14	3.76	13.20	27.42	46.71	36.25	52.11	-15.86	182	1.75
610.25	6.36	19.60	28.56	39.30	36.70	61.90	-25.21	335	2.47
622.98	6.44	19.90	28.54	42.24	40.04	61.90	-21.86	64	2.66
649.57	6.63	20.28	28.50	36.04	34.45	61.90	-27.45	211	2.79

NOTE :
1. Measurement uncertainty is 4.20 dB.
2. "*": Measurement does not apply for this frequency.
3. Emissiom Level = Reading Value + Ant. Factor + Cable Loss – Pre-Amplifier.
4. The field strength of other emission frequencies were very low against the limit.

Temperature:	21 °C	Humidity:	69 %RH
Frequency Range:	30 M – 1 GHz	Tested Mode:	TX3 (Fundamental and Harmonics)
Detector Type:	Quasi-peak	IF Bandwidth:	120 kHz
Tested By:	Richard	Tested Date:	Oct. 06, 2020

Antenna Polarization：Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
441.00(F)	5.19	16.96	28.24	85.33	79.25	101.06	-21.81	66	2.44
882.00	8.26	23.24	27.85	23.00	26.66	61.90	-35.24	148	1.31

Antenna Polarization：Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
441.00(F)	5.19	16.96	28.24	84.45	78.37	101.06	-22.69	61	2.08
882.00	8.26	23.24	27.85	24.96	28.62	61.90	-33.28	153	3.16

NOTE :
1. Measurement uncertainty is 4.20 dB.
2. "*": Measurement does not apply for this frequency.
3. Emissiom Level = Reading Value + Ant. Factor + Cable Loss – Pre-Amplifier.
4. The field strength of other emission frequencies were very low against the limit.
5. (F):The field stregth of fundamental frequency.

Temperature:	21 °C	Humidity:	69 %RH
Frequency Range:	30 M – 1 GHz	Tested Mode:	TX3
Detector Type:	Quasi-peak	IF Bandwidth:	120 kHz
Tested By:	Richard	Tested Date:	Oct. 06, 2020

Antenna Polarization：Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
126.41	2.53	12.00	28.00	48.06	34.59	41.90	-7.31	256	3.51
242.09	3.51	12.24	27.49	51.11	39.37	51.50	-12.13	138	3.38
269.25	3.76	13.20	27.42	51.78	41.32	52.11	-10.79	49	3.24
320.13	4.22	15.00	27.48	44.82	36.56	55.15	-18.59	270	3.06
336.82	4.37	15.20	27.59	42.53	34.51	56.05	-21.54	115	2.71
622.67	6.44	19.90	28.54	39.60	37.40	61.90	-24.50	318	1.89

Antenna Polarization：Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
32.23	1.75	14.00	28.30	44.87	32.32	40.00	-7.68	31	1.24
126.01	2.53	12.00	28.00	47.44	33.97	41.90	-7.93	177	1.35
269.87	3.76	13.20	27.42	48.17	37.71	52.15	-14.44	289	1.78
610.09	6.36	19.60	28.56	38.71	36.11	61.90	-25.80	100	2.36
622.95	6.44	19.90	28.54	42.18	39.98	61.90	-21.92	339	2.89
649.48	6.63	20.28	28.50	35.92	34.33	61.90	-27.57	45	2.95

NOTE :
1. Measurement uncertainty is 4.20 dB.
2. "*": Measurement does not apply for this frequency.
3. Emissiom Level = Reading Value + Ant. Factor + Cable Loss – Pre-Amplifier.
4. The field strength of other emission frequencies were very low against the limit.

Temperature:	22 °C	Humidity:	73 %RH
Frequency Range:	1 GHz – 25 GHz	Tested Mode:	TX1
Detector Type:	PK. and AV.	IF Bandwidth:	1 MHz
Tested By:	Richard Lin	Tested Date:	Oct. 06, 2020

Antenna Polarization：Horizontal

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
3308.07	-30.70	31.10	42.96	32.44	43.36	32.84	74	54	-30.64	-21.16	149	2.36
3834.98	-30.13	32.34	42.67	32.17	44.88	34.38	74	54	-29.12	-19.62	321	2.23
4041.65	-29.94	32.25	43.12	32.68	45.43	34.99	74	54	-28.57	-19.01	182	2.12
4587.37	-29.32	32.37	43.35	32.80	46.41	35.86	74	54	-27.59	-18.14	256	1.98
4892.82	-28.89	33.08	42.30	31.85	46.49	36.04	74	54	-27.51	-17.96	214	1.73
5594.23	-28.69	33.80	41.51	31.02	46.62	36.13	74	54	-27.38	-17.87	128	1.41

Antenna Polarization：Vertical

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
3389.80	-30.59	31.02	42.51	32.01	42.94	32.44	74	54	-31.06	-21.56	340	1.49
3886.34	-30.08	32.40	41.75	31.29	44.07	33.61	74	54	-29.93	-20.39	110	1.83
4621.92	-29.27	32.44	41.95	31.42	45.12	34.59	74	54	-28.88	-19.41	60	2.03
4998.16	-28.74	33.49	39.10	28.66	43.85	33.41	74	54	-30.15	-20.59	79	2.26
5142.43	-28.73	33.50	42.01	31.53	46.78	36.30	74	54	-27.22	-17.70	158	2.39
5550.21	-28.69	33.80	41.50	31.09	46.61	36.20	74	54	-27.39	-17.80	214	2.44

NOTE:

1. Measurement uncertainty is 4.04 dB.
2. Emissiom Level = Reading Value + Ant. Factor + Correct Factor (incl.:Cable Loss and Pre-Amplifier Gain)
3. The field strength of other emission frequencies were very low against the limit.
4. (F):The field stregth of fundamental frequency.

Temperature:	22 °C	Humidity:	73 %RH
Frequency Range:	1 GHz – 25 GHz	Tested Mode:	TX2
Detector Type:	PK. and AV.	IF Bandwidth:	1 MHz
Tested By:	Richard Lin	Tested Date:	Oct. 06, 2020

Antenna Polarization：Horizontal

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
3212.67	-30.84	30.90	42.98	32.43	43.04	32.49	74	54	-30.96	-21.51	145	2.36
3754.98	-30.20	32.02	42.85	32.37	44.66	34.18	74	54	-29.34	-19.82	236	2.21
4038.15	-29.94	32.23	43.40	32.96	45.69	35.25	74	54	-28.31	-18.75	192	2.07
4551.03	-29.37	32.30	42.79	32.21	45.72	35.14	74	54	-28.28	-18.86	41	1.93
4999.70	-28.74	33.50	39.13	28.69	43.88	33.44	74	54	-30.12	-20.56	188	1.74
5662.29	-28.68	33.72	41.68	31.14	46.73	36.19	74	54	-27.27	-17.81	293	1.52

Antenna Polarization：Vertical

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
3799.08	-30.16	32.20	42.25	31.79	44.29	33.83	74	54	-29.71	-20.17	70	1.67
4142.42	-29.83	32.20	43.06	32.58	45.43	34.95	74	54	-28.57	-19.05	86	1.98
4423.19	-29.52	32.20	42.43	31.99	45.11	34.67	74	54	-28.89	-19.33	257	2.04
4598.65	-29.30	32.40	42.41	31.91	45.50	35.00	74	54	-28.50	-19.00	13	2.13
4996.59	-28.75	33.48	39.81	29.34	44.55	34.08	74	54	-29.45	-19.92	76	2.25
5517.34	-28.70	33.87	41.08	30.55	46.25	35.72	74	54	-27.75	-18.28	309	2.39

NOTE:

1. Measurement uncertainty is 4.04 dB.
2. Emissiom Level = Reading Value + Ant. Factor + Correct Factor (incl.:Cable Loss and Pre-Amplifier Gain)
3. The field strength of other emission frequencies were very low against the limit.
4. (F):The field stregth of fundamental frequency.

Temperature:	22 °C	Humidity:	73 %RH
Frequency Range:	1 GHz – 25 GHz	Tested Mode:	TX3
Detector Type:	PK. and AV.	IF Bandwidth:	1 MHz
Tested By:	Richard Lin	Tested Date:	Oct. 06, 2020

Antenna Polarization：Horizontal

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
3038.04	-31.09	30.45	43.12	32.65	42.49	32.02	74	54	-31.51	-21.98	188	2.43
3621.51	-30.32	31.38	43.00	32.57	44.06	33.63	74	54	-29.94	-20.37	241	2.25
4172.27	-29.79	32.16	42.49	31.96	44.85	34.32	74	54	-29.15	-19.68	35	2.17
4587.83	-29.32	32.37	42.41	31.94	45.47	35.00	74	54	-28.53	-19.00	76	2.04
4997.15	-28.74	33.49	41.08	30.52	45.82	35.26	74	54	-28.18	-18.74	207	1.68
5386.92	-28.71	33.83	40.90	30.41	46.02	35.53	74	54	-27.98	-18.47	132	1.52

Antenna Polarization：Vertical

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
3271.61	-30.76	30.98	42.85	32.39	43.08	32.62	74	54	-30.92	-21.38	59	1.44
3742.84	-30.21	31.97	41.98	31.48	43.74	33.24	74	54	-30.26	-20.76	199	1.79
4153.98	-29.81	32.19	42.29	31.77	44.67	34.15	74	54	-29.33	-19.85	42	1.96
4638.13	-29.25	32.48	41.86	31.35	45.09	34.58	74	54	-28.91	-19.42	300	2.07
4996.35	-28.75	33.48	38.49	28.02	43.23	32.76	74	54	-30.77	-21.24	118	2.23
5551.82	-28.69	33.80	41.14	30.63	46.25	35.74	74	54	-27.75	-18.26	216	2.38

NOTE:

1. Measurement uncertainty is 4.04 dB.
2. Emissiom Level = Reading Value + Ant. Factor + Correct Factor (incl.:Cable Loss and Pre-Amplifier Gain)
3. The field strength of other emission frequencies were very low against the limit.
4. (F):The field stregth of fundamental frequency.

4.3 20dB Bandwidth

4.3.1 LIMIT

FCC Part15, Subpart C Section 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

FREQUENCY (MHz)	BANDWIDTH LIMIT(kHz)
Above 70-900	0.25% × Center Frequency(MHz)
Above 900	0.5% × Center Frequency(MHz)

NOTE: Bandwidth is determined at the points 20dB down from the modulated carrier.

4.3.2 TEST EQUIPMENT

The following test equipment was used during the test：

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER (INCLUDE SPECTRUM ANALYZER)	9 KHz ~ 6 GHz	ROHDE & SCHWARZ	ESL /100176	JUL. 30, 2021 ETC

NOTE： The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST SET-UP



The EUT was connected to a spectrum through a 50Ω RF cable.

4.3.4 TEST PROCEDURE

Please refer to FCC Part15C 15.231.

4.3.5 EUT OPERATING CONDITION

The EUT was operated in continunely transmitting mode.

4.3.6 TEST RESULT

Temperature:	25 °C	Humidity:	64 %RH
Spectrum Detector:	PK	Tested by:	Richard Lin
Test Result:	PASS	Tested Date:	Oct. 20, 2020

Channel Number	Channel Frequency (MHz)	20dB Down Bandwidth (kHz)	Maximum Limit (kHz)	Pass/Fail
CH00	410	714.6	1025	Pass
CH16	426	718.6	1065	Pass
CH31	441	706.6	1102.5	Pass

註：410MHz x 0.25% = 1.025 MHz, 426MHz x 0.25% = 1.065 MHz,
441MHz x 0.25% = 1.1025 MHz

CH00：

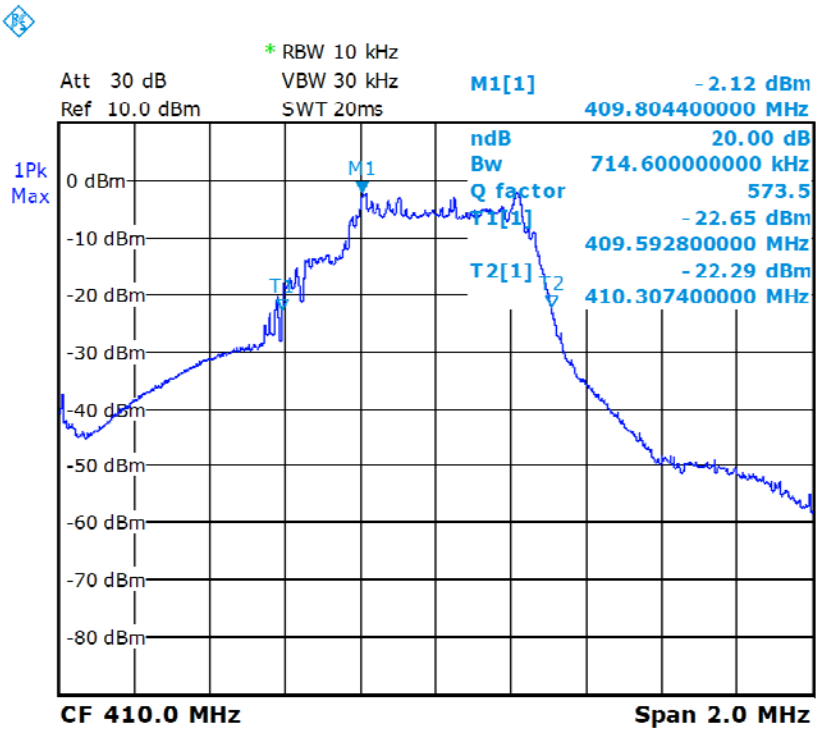

CH16：

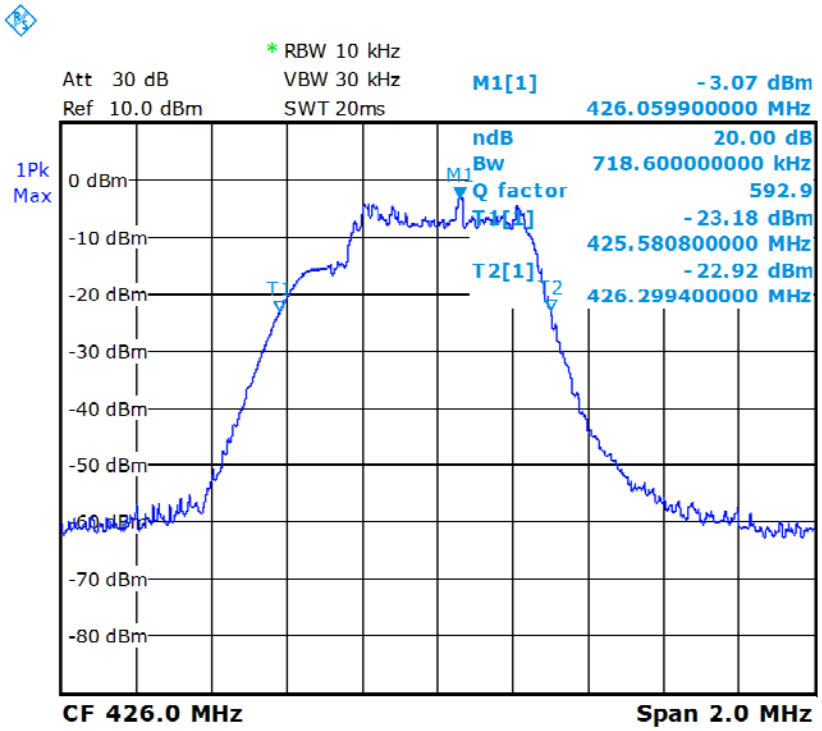
* RBW 10 kHz
Att 30 dB
VBW 30 kHz
Ref 10.0 dBm
SWT 20ms
M1[1]
-3.07 dBm
426.059900000 MHz
ndB
20.00 dB
Bw
718.600000000 kHz
Q factor
592.9
T1[1]
-23.18 dBm
425.580800000 MHz
T2[1]
-22.92 dBm
426.299400000 MHz
1Pk
Max
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
-80 dBm
CF 426.0 MHz
Span 2.0 MHz

CH31：

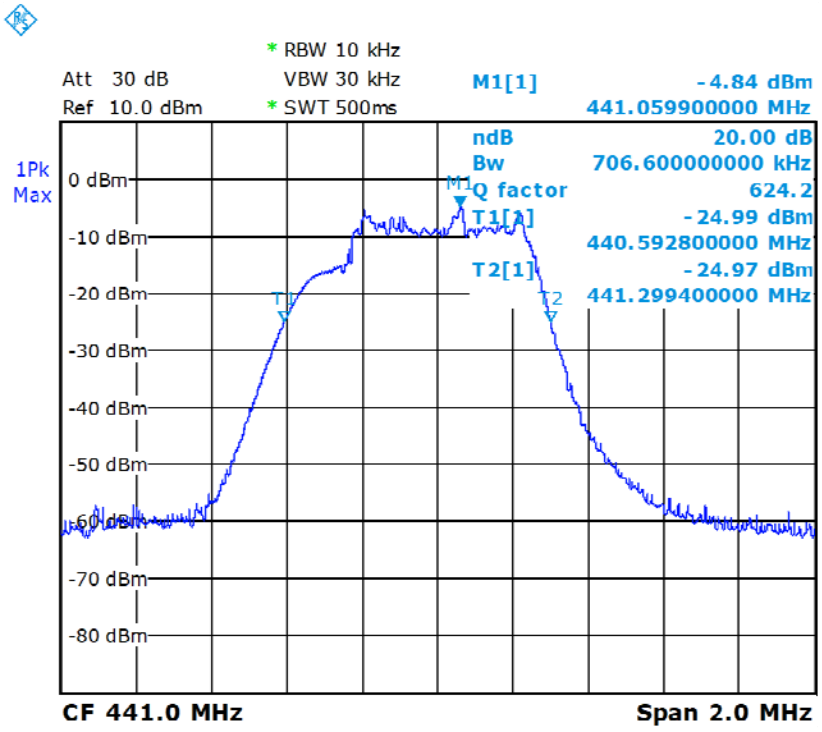
* RBW 10 kHz
Att 30 dB
VBW 30 kHz
Ref 10.0 dBm
* SWT 500ms
M1[1]
-4.84 dBm
441.059900000 MHz
ndB
20.00 dB
Bw
706.600000000 kHz
Q factor
624.2
T1[1]
-24.99 dBm
440.592800000 MHz
T2[1]
-24.97 dBm
441.299400000 MHz
1Pk
Max
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
-80 dBm
CF 441.0 MHz
Span 2.0 MHz

4.4 RELEASE OR OPERATING TIME

4.4.1 LIMIT

FCC Part15, Subpart C Section 15.231(a)(1), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

4.4.2 TEST EQUIPMENT

The following test equipment was used during the test：

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER (INCLUDE SPECTRUM ANALYZER)	9 KHz ~ 6 GHz	ROHDE & SCHWARZ	ESL /100176	JUL. 30, 2021 ETC

NOTE： The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST SET-UP



The EUT was connected to a spectrum through a 50Ω RF cable.

4.4.4 EUT OPERATING CONDITION

The EUT was operated in Normal Link mode.

Activation EUT’s release time and measurement.

4.4.5 TEST RESULT

Temperature:	25 °C	Humidity:	64 %RH
Spectrum Detector:	PK	Tested by:	Richard Lin
Test Result:	PASS	Tested Date:	Oct. 20, 2020

Total release time(ms)	Limit of release time<(s)	Pass/Fail
0.14	5	Pass

CH00：

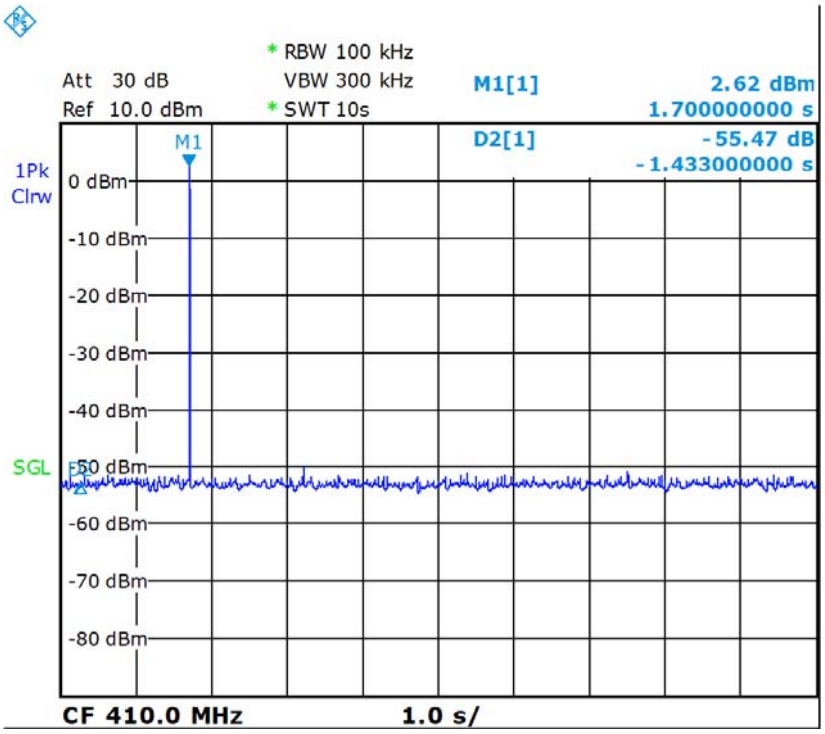
* RBW 100 kHz
Att 30 dB
VBW 300 kHz
M1[1]
2.62 dBm
Ref 10.0 dBm
* SWT 10s
1.700000000 s
D2[1]
-55.47 dB
-1.433000000 s
1Pk
Clrw
M1
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
SGL
-50 dBm
-60 dBm
-70 dBm
-80 dBm
CF 410.0 MHz
1.0 s/

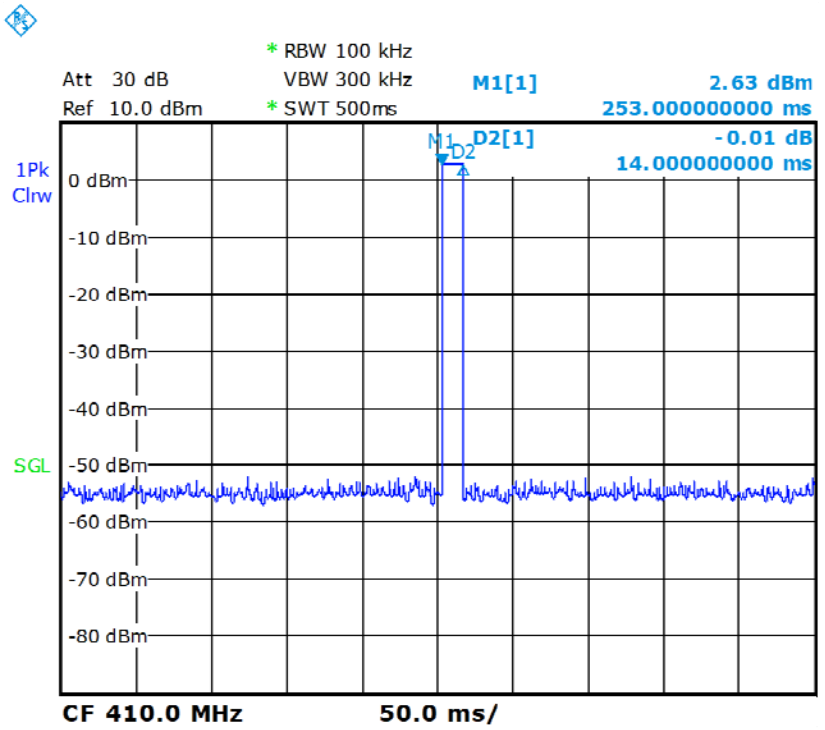
* RBW 100 kHz
Att 30 dB
VBW 300 kHz
M1[1]
2.63 dBm
Ref 10.0 dBm
* SWT 500ms
253.000000000 ms
D2[1]
-0.01 dB
14.000000000 ms
1Pk
Clrw
M1
D2
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
SGL
-50 dBm
-60 dBm
-70 dBm
-80 dBm
CF 410.0 MHz
50.0 ms/

CH16：

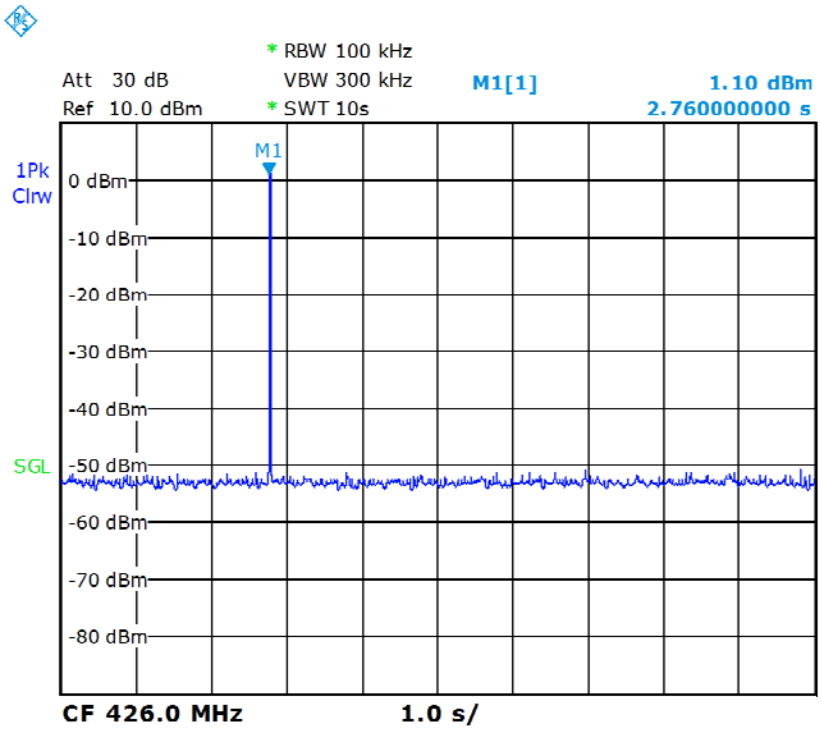
* RBW 100 kHz
Att 30 dB
VBW 300 kHz
M1[1]
1.10 dBm
Ref 10.0 dBm
* SWT 10s
2.760000000 s
1Pk
Clrw
M1
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
SGL
-50 dBm
-60 dBm
-70 dBm
-80 dBm
CF 426.0 MHz
1.0 s/

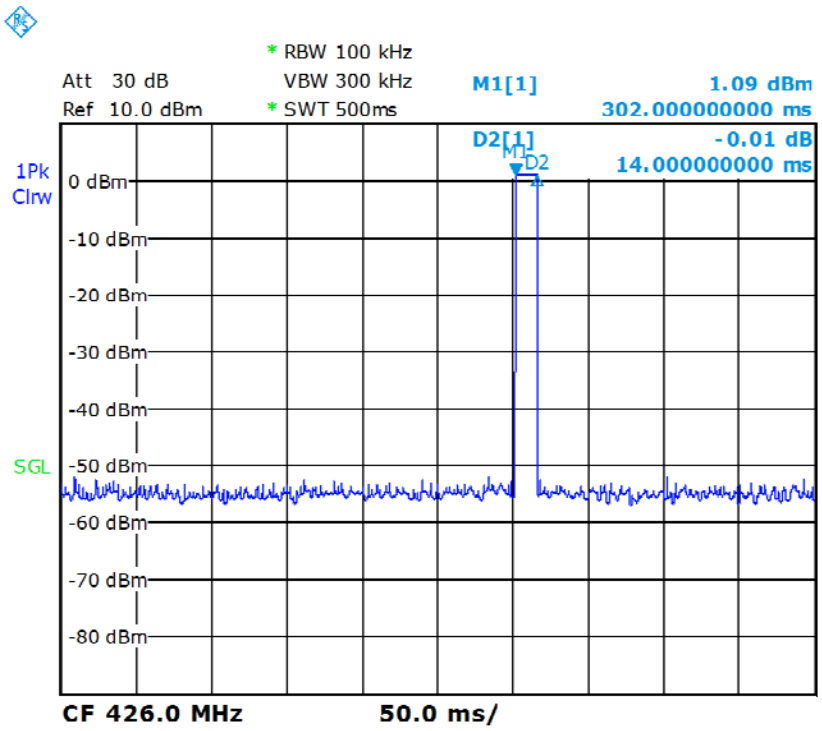
* RBW 100 kHz
Att 30 dB
VBW 300 kHz
M1[1]
1.09 dBm
Ref 10.0 dBm
* SWT 500ms
302.000000000 ms
D2[1]
-0.01 dB
14.000000000 ms
M1
D2
1Pk
Clrw
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
SGL
-50 dBm
-60 dBm
-70 dBm
-80 dBm
CF 426.0 MHz
50.0 ms/

CH31：

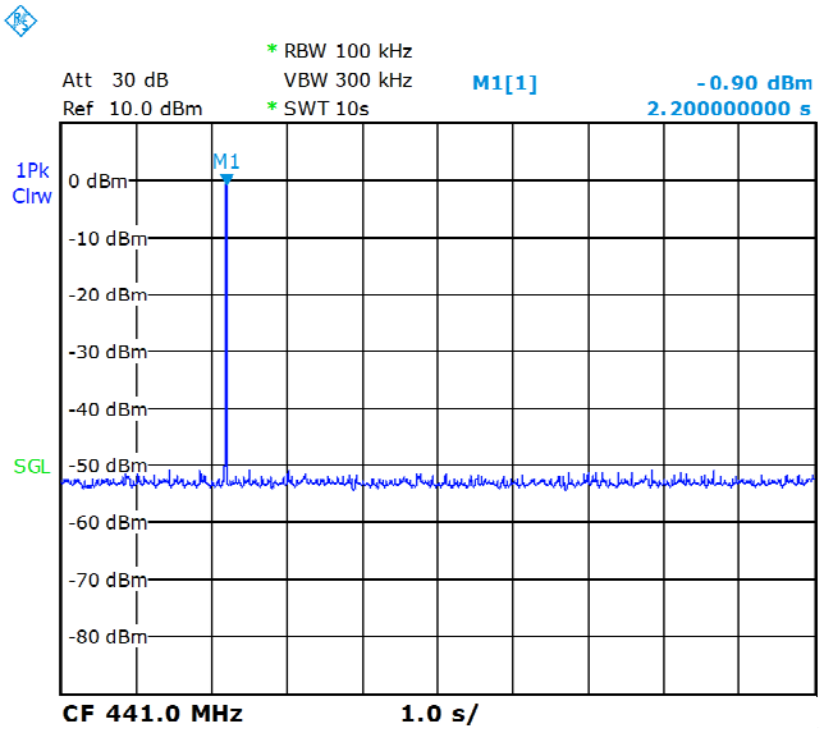
* RBW 100 kHz
Att 30 dB
VBW 300 kHz
M1[1]
-0.90 dBm
Ref 10.0 dBm
* SWT 10s
2.200000000 s
1Pk
Clrw
M1
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
SGL
-50 dBm
-60 dBm
-70 dBm
-80 dBm
CF 441.0 MHz
1.0 s/

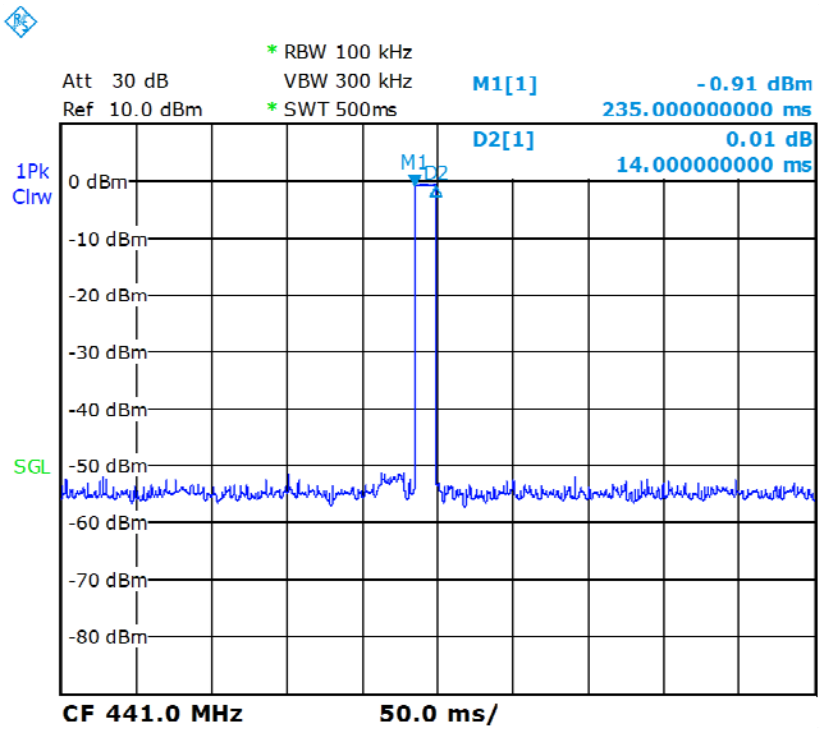
* RBW 100 kHz
Att 30 dB
VBW 300 kHz
M1[1]
-0.91 dBm
Ref 10.0 dBm
* SWT 500ms
235.000000000 ms
D2[1]
0.01 dB
14.000000000 ms
1Pk
Clrw
M1
D2
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
SGL
-50 dBm
-60 dBm
-70 dBm
-80 dBm
CF 441.0 MHz
50.0 ms/

5. Antenna application

5.1 Antenna requirement

The EUT’s antenna is met the requirement of FCC Part 15C section 15.203.

5.2 Result

The EUT’s antenna used a Printed Antenna. Gain of 3.0 dBi that meet the requirement.

6. TERMS OF ABBREVIATION

AV.	Average detection
AZ(°)	Turn table azimuth
Correct.	Correction
EL(m)	Antenna height (meter)
EUT	Equipment Under Test
Horiz.	Horizontal direction
LISN	Line Impedance Stabilization Network
NSA	Normalized Site Attenuation
Q.P.	Quasi-peak detection
SRT Lab	Spectrum Research & Testing Laboratory, Inc.
Vert.	Vertical direction