Annex B

Internal Photo

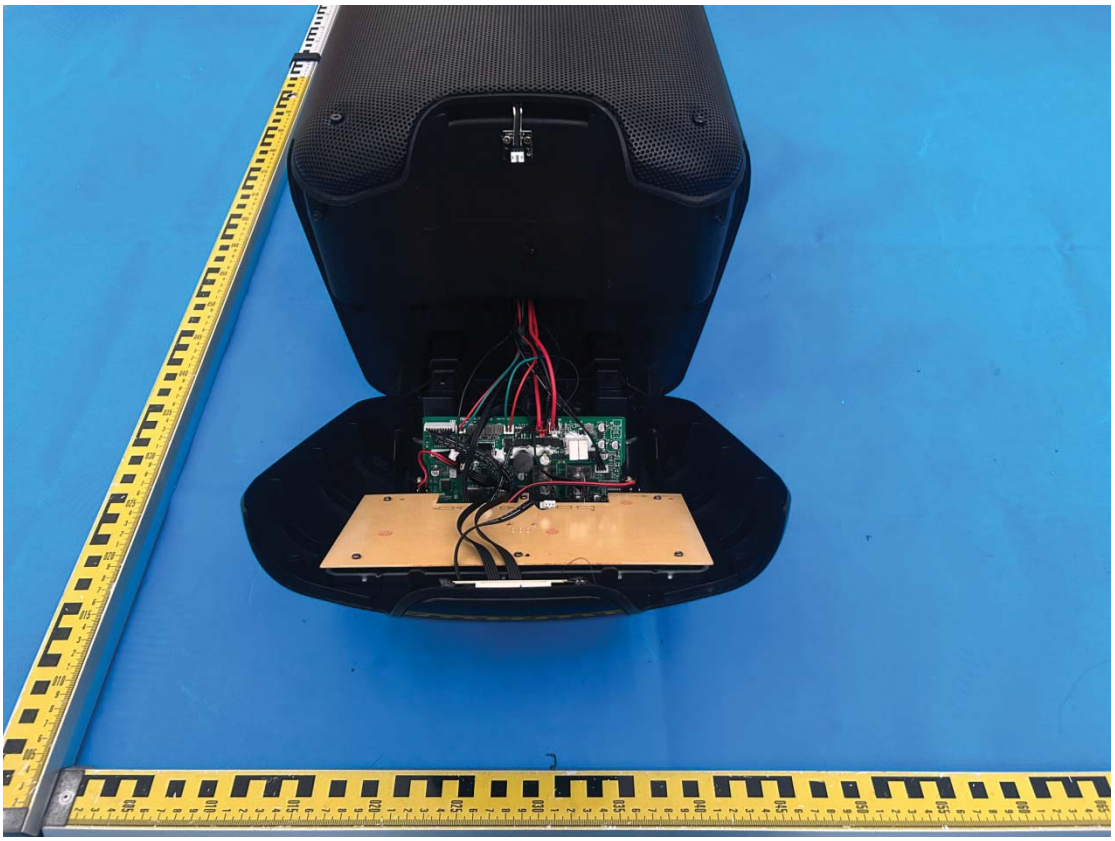

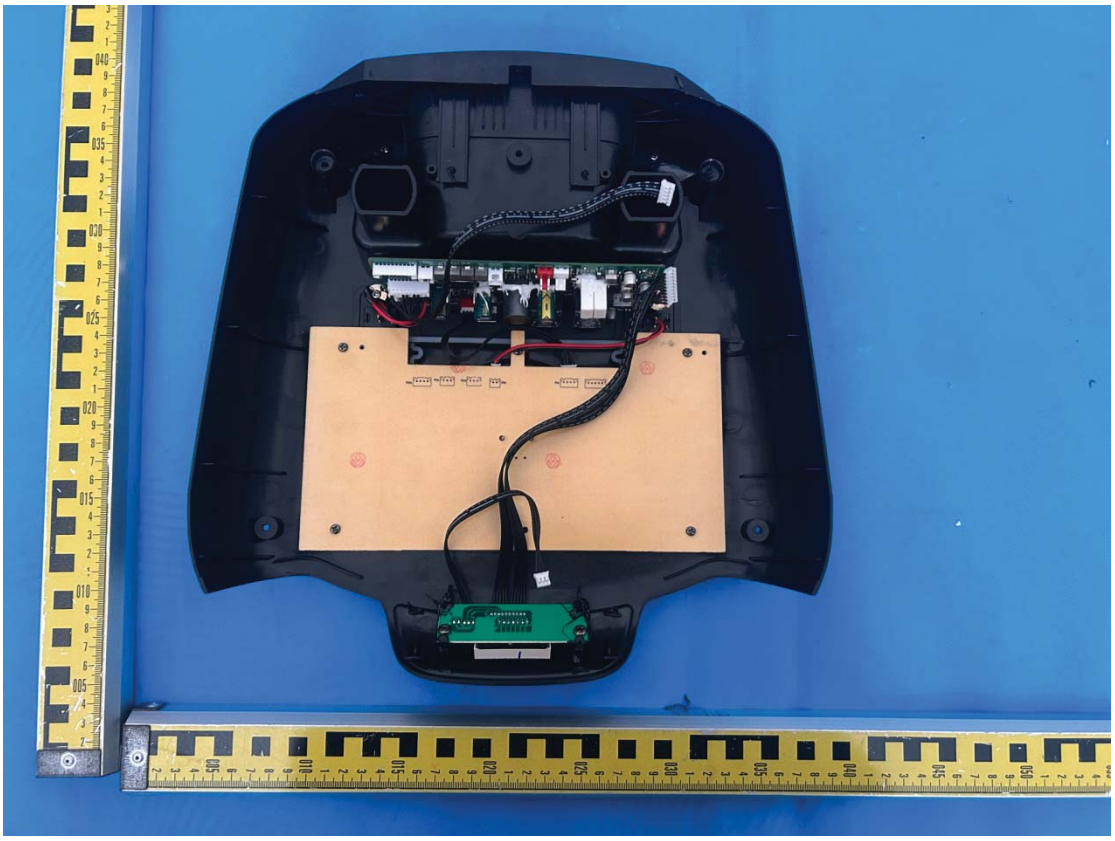

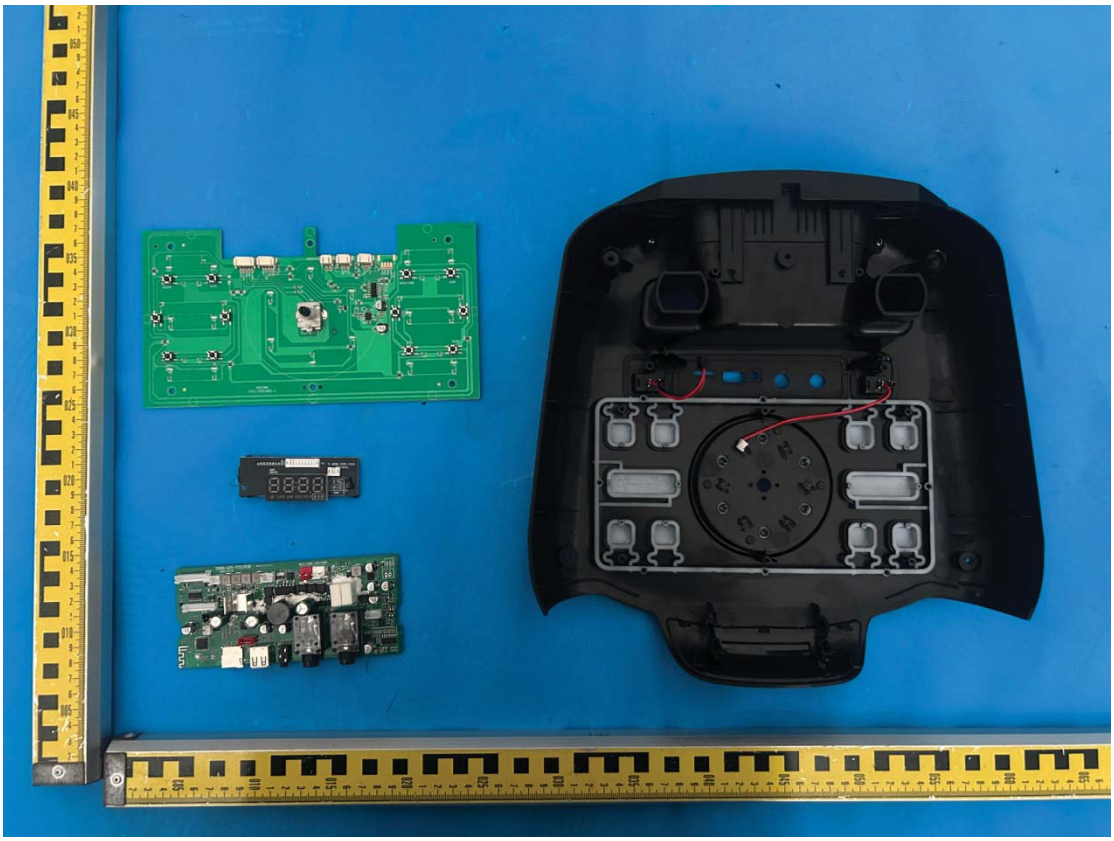

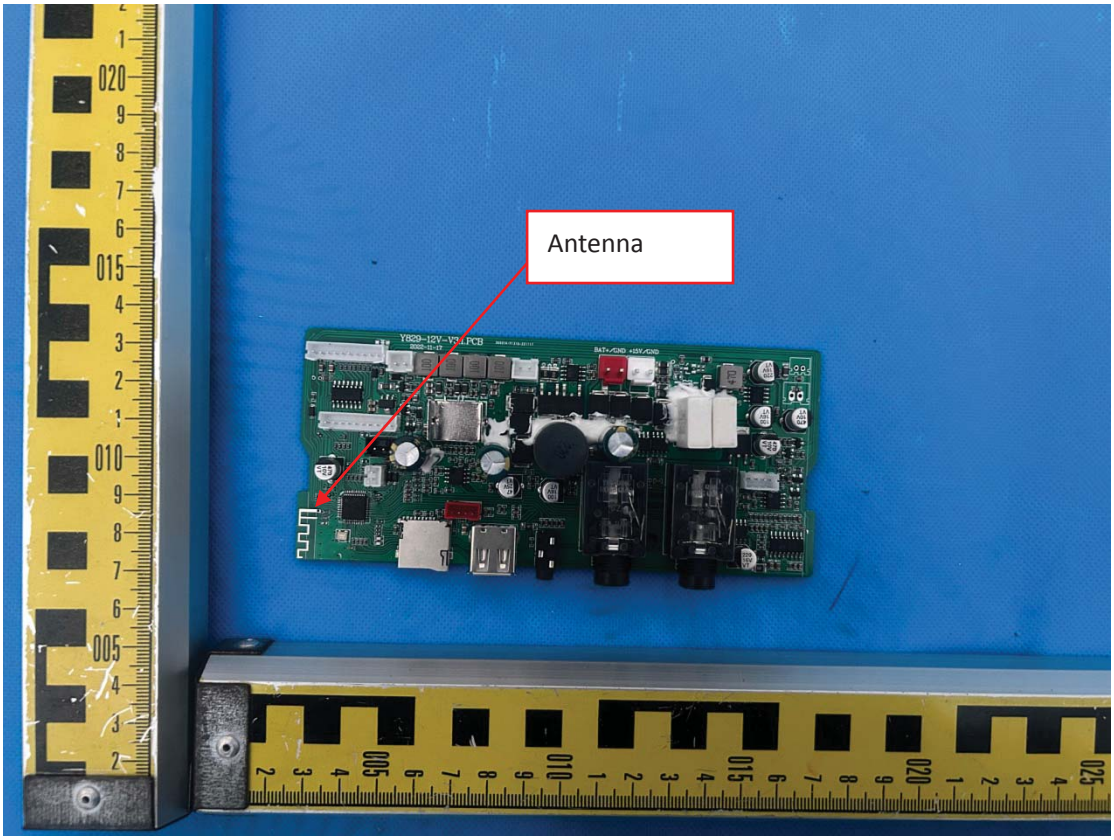
Antenna

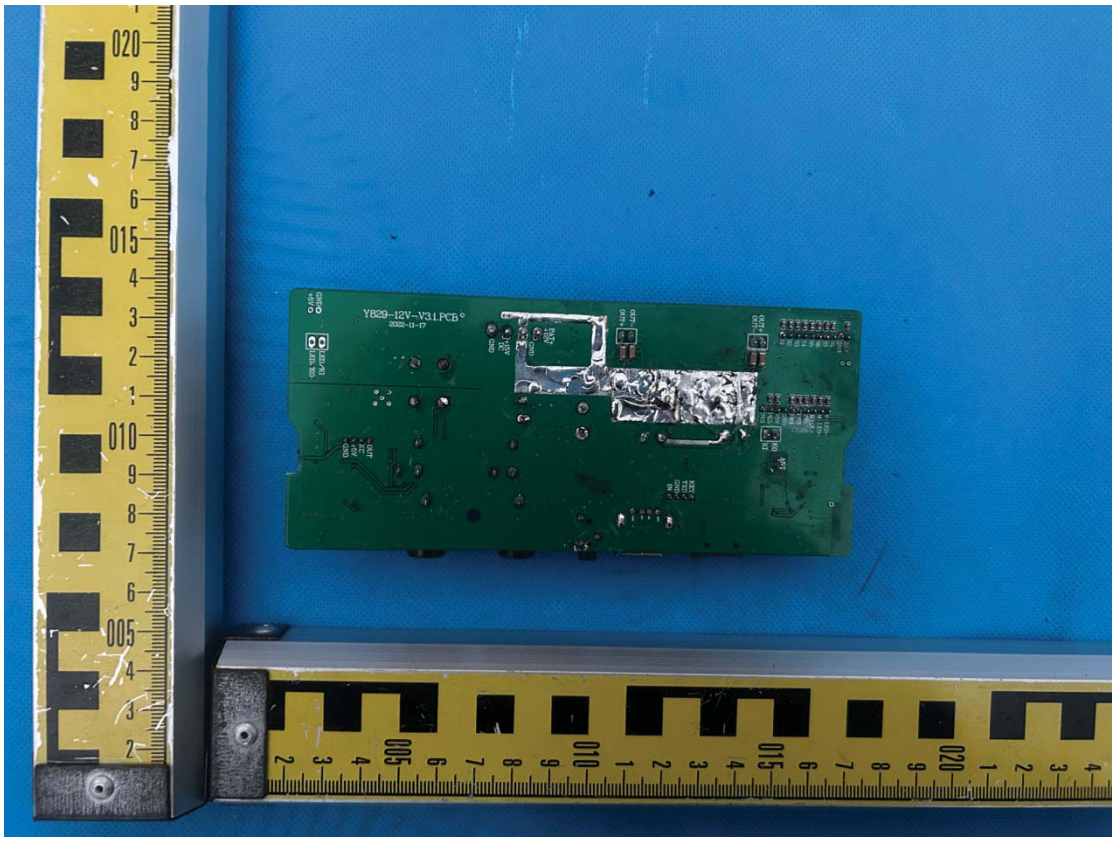
Y829-12V-V3.1.PCB
2022-11-17

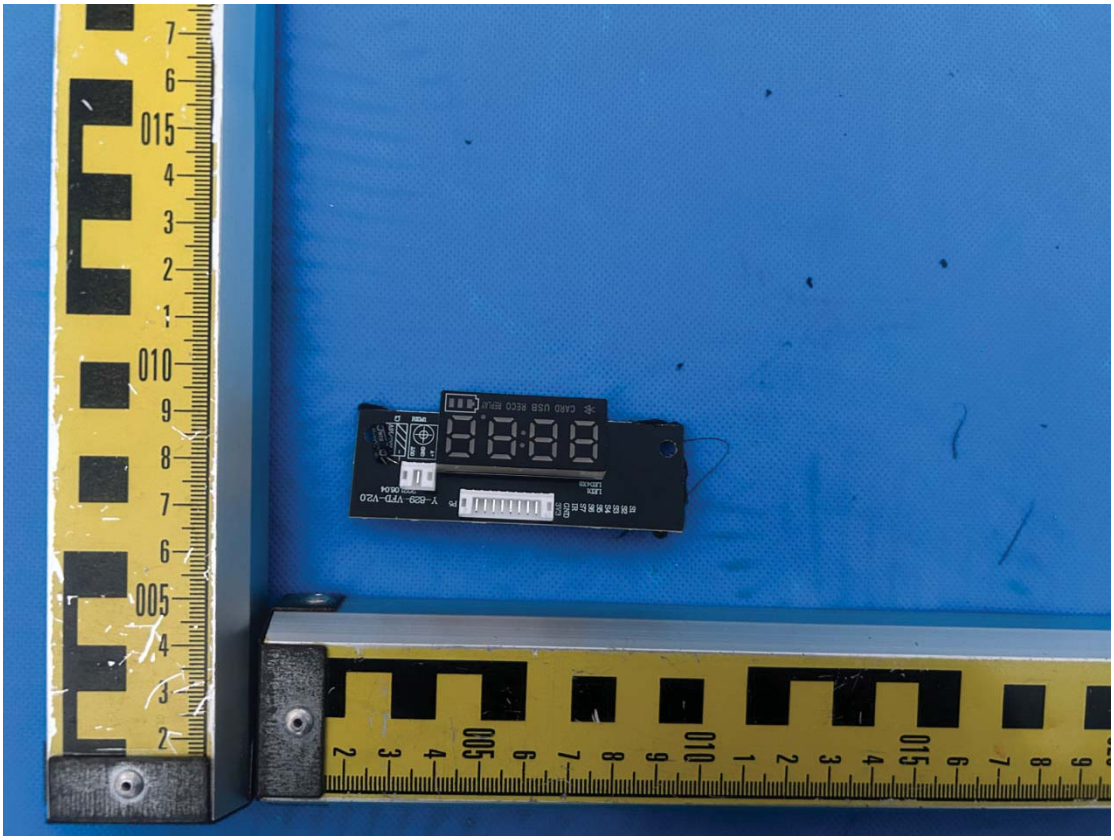
Y-629-YFD-V20

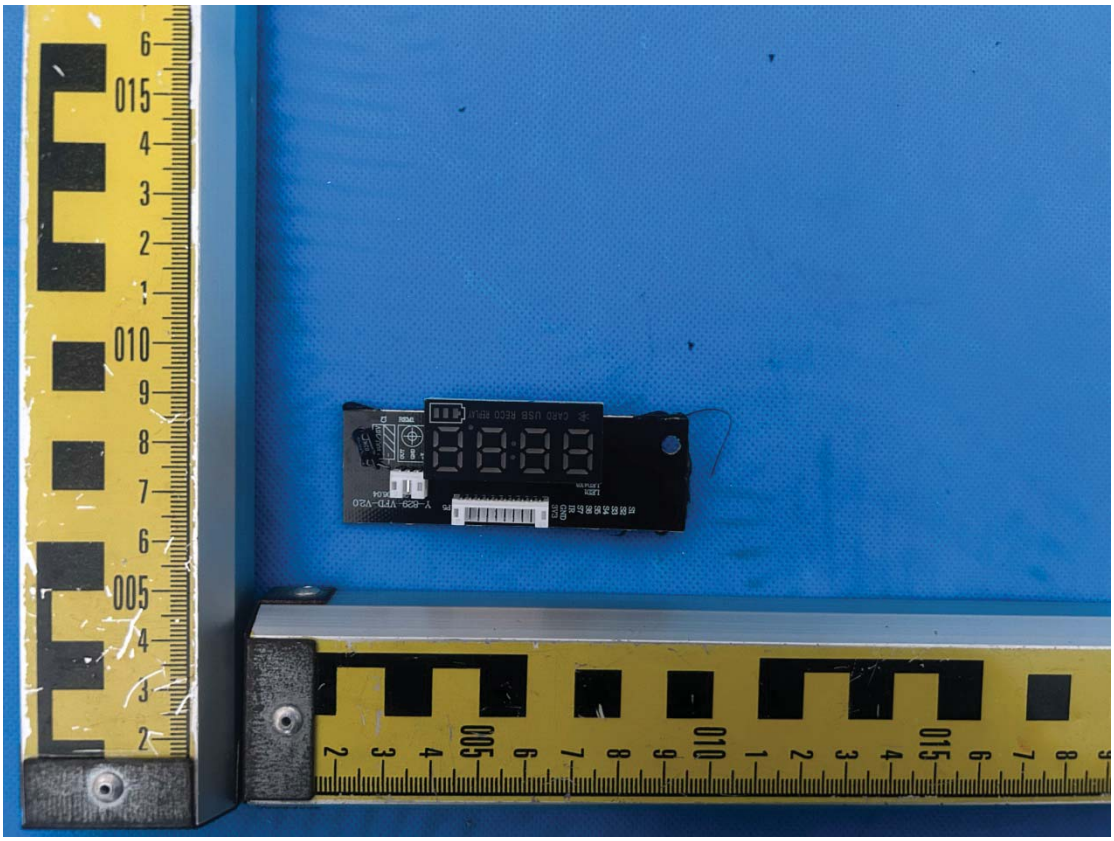

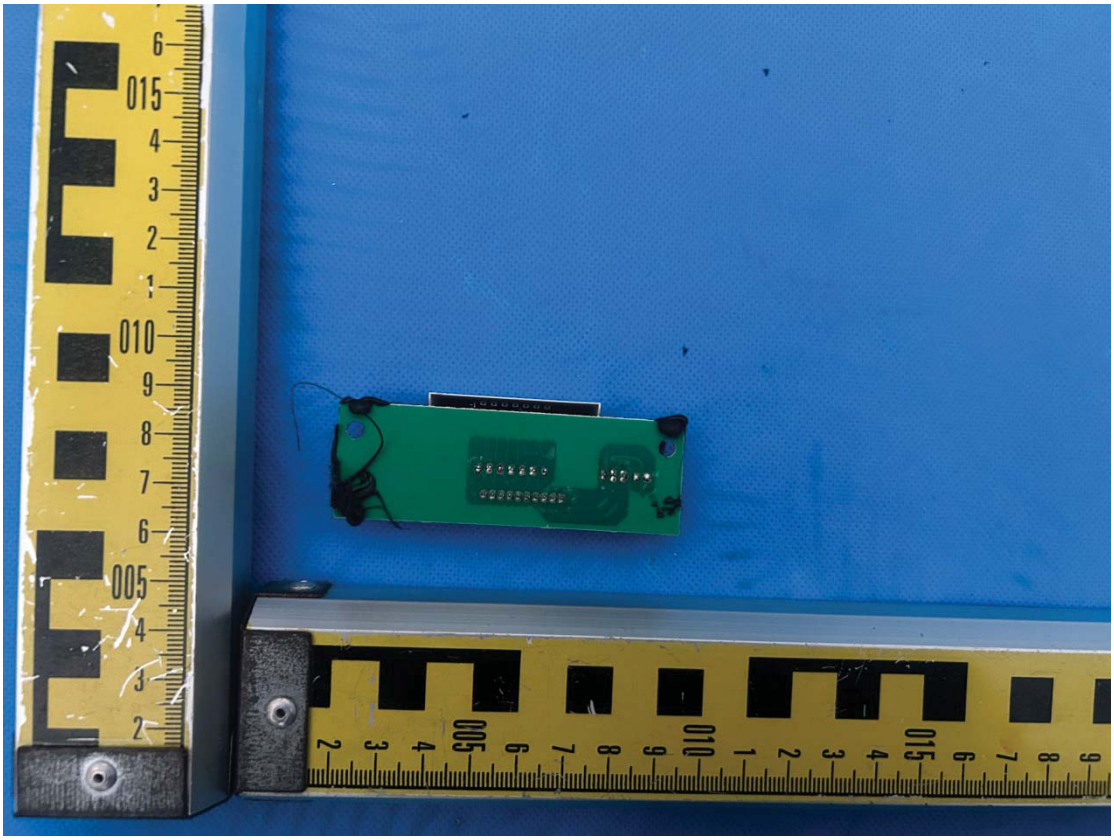

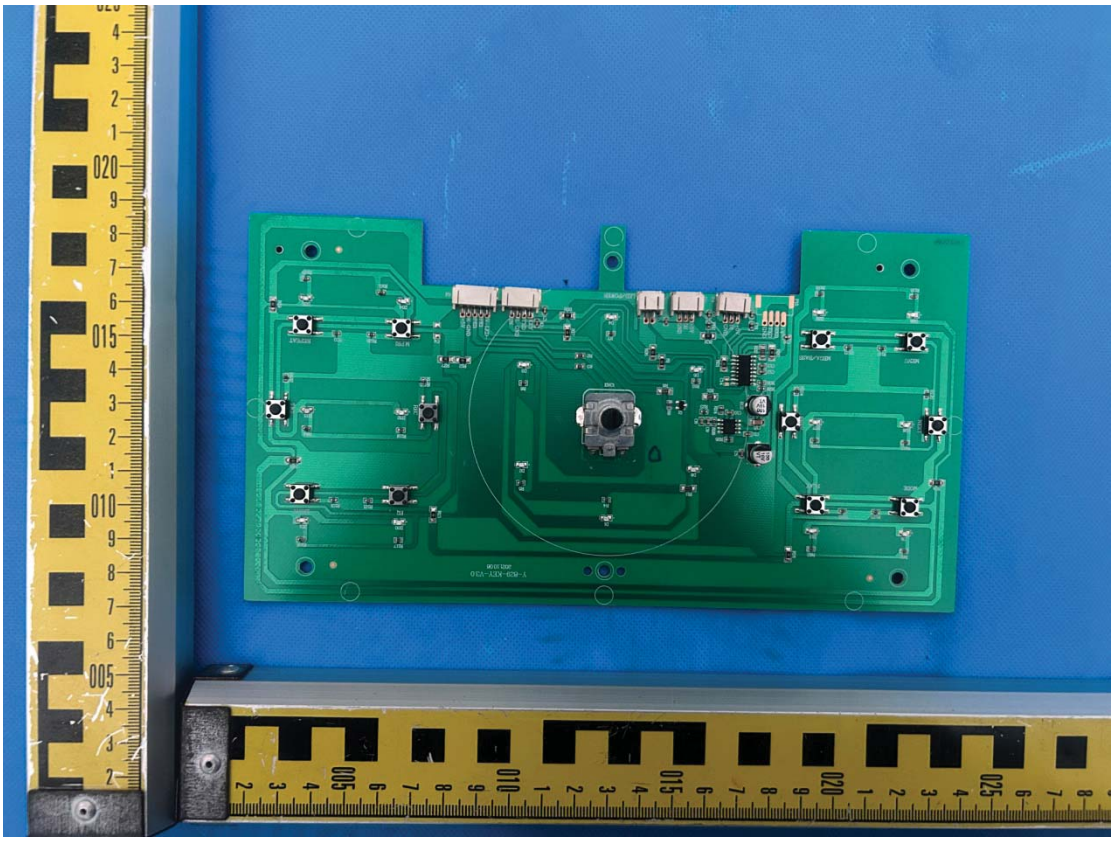

M12-7.5(12V7.5AH)
Valve Regulated Lead-Acid Battery
Caution
• Avoid short circuit
• Do not charge in sealed container
• Keep sparks, flame away
• Rechargeable after use
• Must be recycled or disposed of properly
Usage
For Stand-by Use
For Cycle use
Charging Voltage(V)
13.5~13.8
14.4~14.7
Max Charging Current(A)
0.15~0.25C
C means Ah value of battery's rated capacity
CE RoHS
Pb
Shenzhen Weiyetong Co.,Ltd.

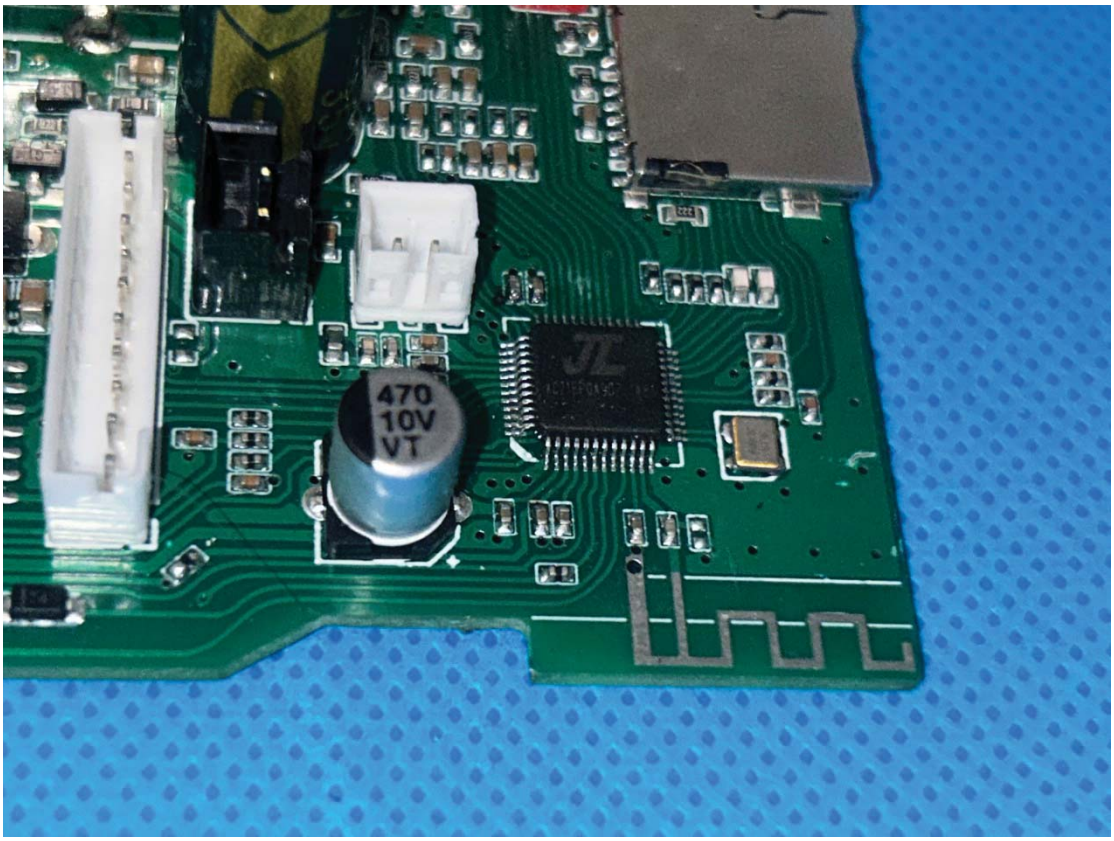
470
10V
VT

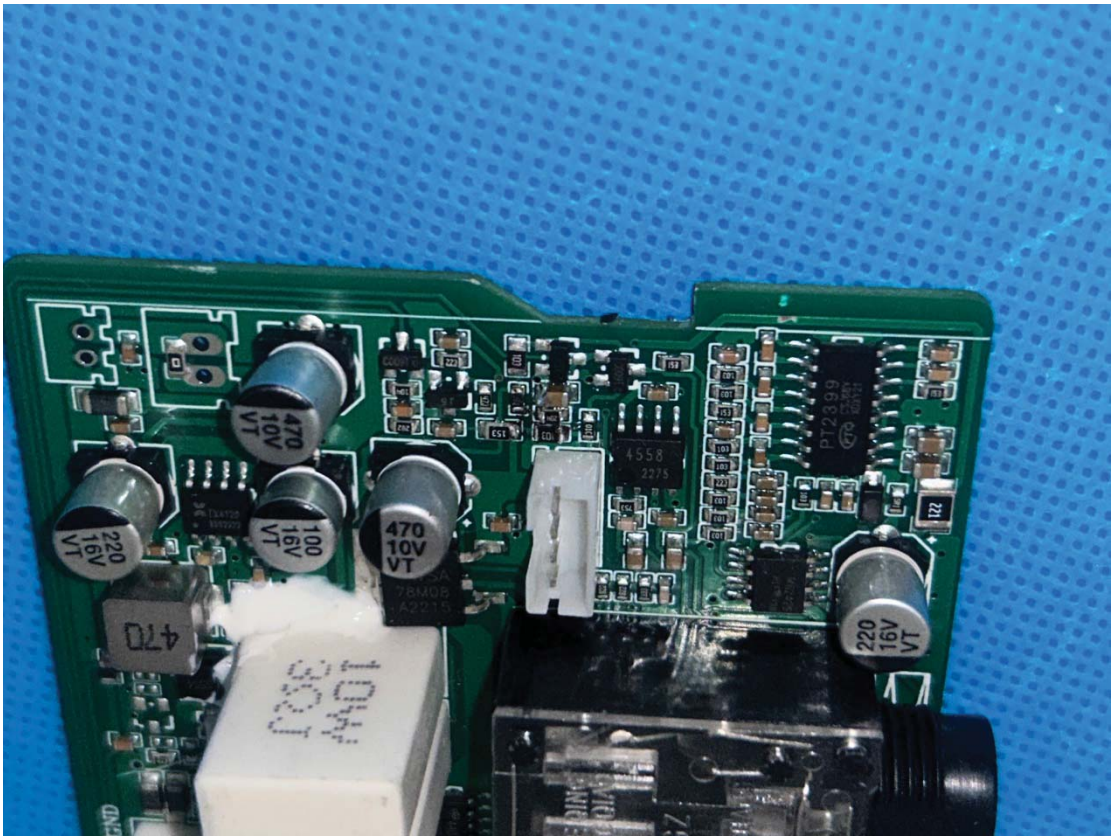
470
10V
VT
220
16V
VT
100
16V
VT
470
10V
VT
4558
PT2399
470
220
16V
VT

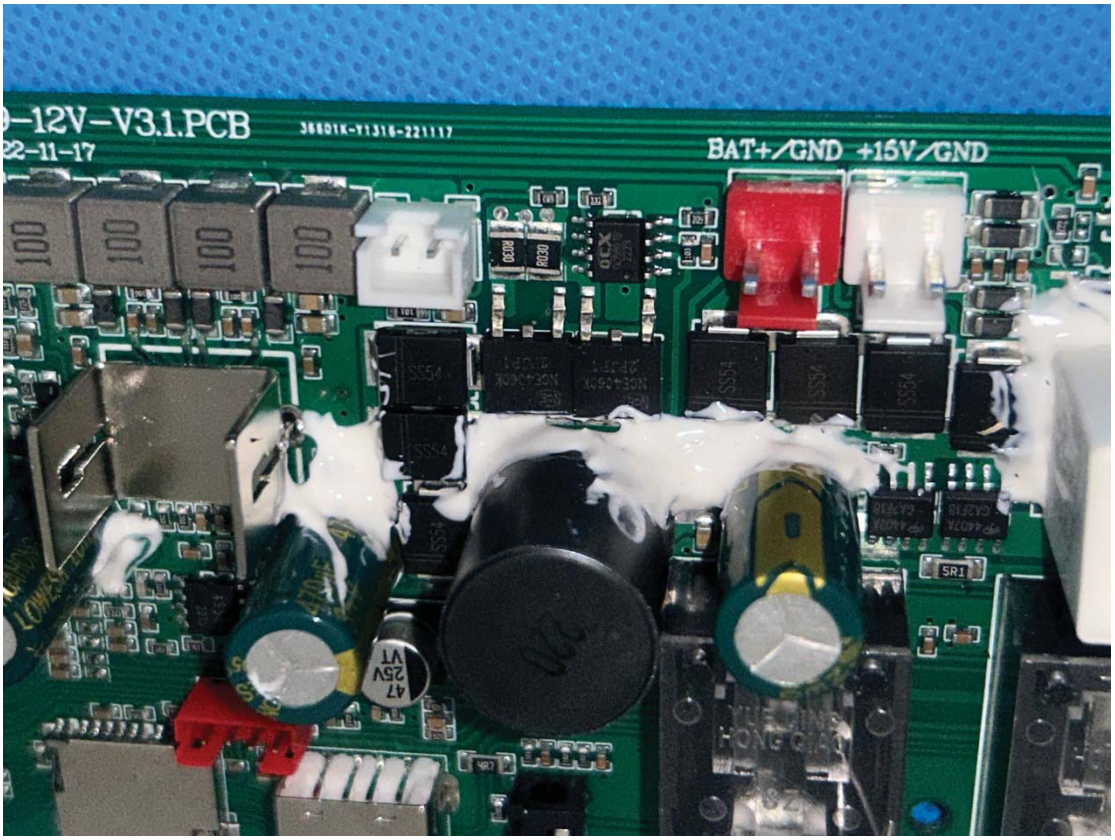
-12V-V3.1.PCB
22-11-17
BAT+/GND +15V/GND

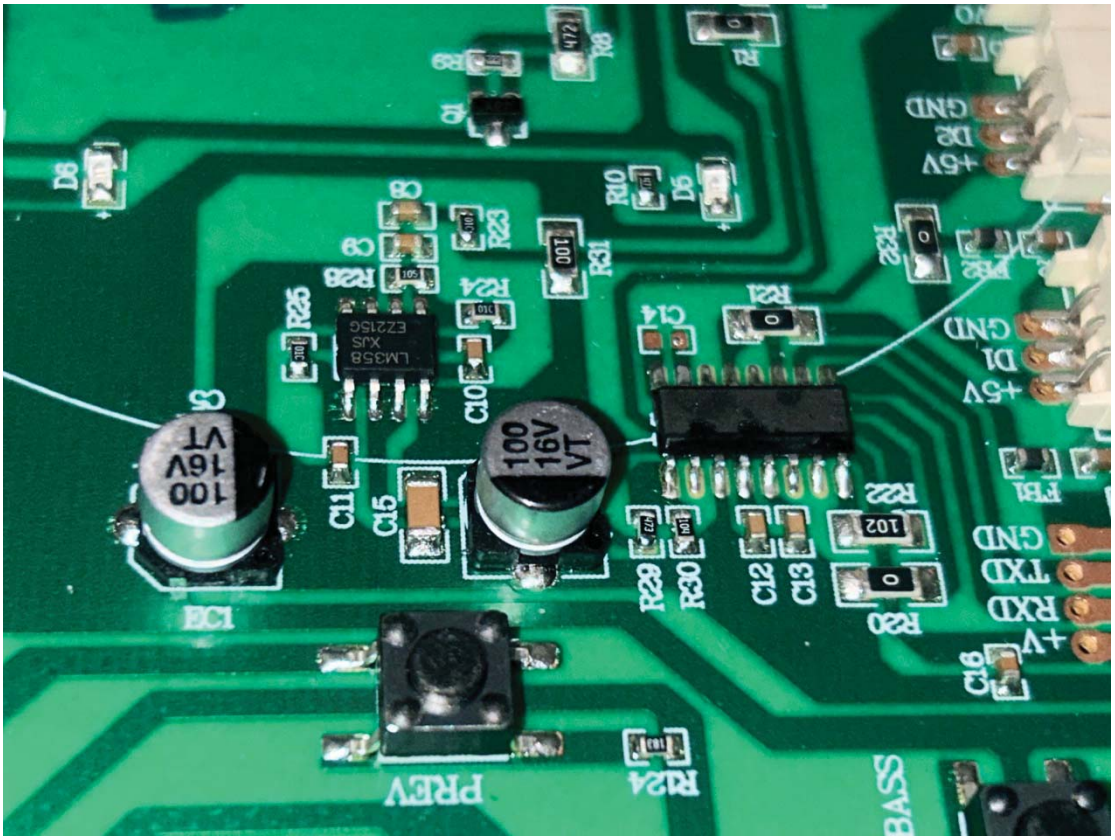
PREV
BASS
EC1
GND
TXD
RXD
+V
+5V
D2
D1