

**FCC 47 CFR PART 15 SUBPART E
ISED RSS-247 Issue 4**

TEST REPORT

For

Smart Projector

MODEL NUMBER: N3Ultra, N3Max

REPORT NUMBER: 4792183744-1-RF-2

ISSUE DATE: April 21, 2026

**FCC ID: 2AV2J-N3UM
IC : 27636-N3UM**

Prepared for

**Shenzhen Dangs Science and Technology Co., Ltd.
1301, Block D1, Chuangzhi Yuncheng, Liuxian Avenue, Nanshan District,
Shenzhen, Guangdong Province, China**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan,
Guangdong, China**

**Tel: +86 769 22038881
Fax: +86 769 33244054
Website: www.ul.com**

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	April 21, 2026	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
ON TIME AND DUTY CYCLE	ANSI C63.10-2020, Clause 12.2	None; for reporting purposes only.	Pass
6dB AND 26dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH	KDB 789033 D02 v02r01 Section C.1	FCC Part 15.407 (a)/(e), RSS-247 Issue 4, Clause 7.3.5.2 RSS-Gen Clause 6.7	Pass
CONDUCTED OUTPUT POWER	KDB 789033 D02 v02r01 Section E.3.a (Method PM)/KDB 789033 D02 v02r01 Section E.3.a (Method PM) Section E.2.d (Method SA-2)	FCC 15.407 (a) RSS-247 Clause 7.3	Pass
POWER SPECTRAL DENSITY	KDB 789033 D02 v02r01 Section F	FCC 15.407 (a) RSS-247 Clause 7.3	Pass
AC Power Line Conducted Emission	ANSI C63.10-2020, Clause 6.2.	FCC 15.207 RSS-GEN Clause 8.8	Pass
Radiated Emissions and Band Edge Measurement	KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6	FCC 15.407 (b) FCC 15.209 FCC 15.205 RSS-247 Clause 7.3 RSS-GEN Clause 8.9	Pass
FREQUENCY STABILITY	ANSI C63.10-2020, Clause 6.8	FCC 15.407 (g)	Pass
Dynamic Frequency Selection (Slave)	KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02	FCC Part 15.407 (h), RSS-247 Issue 4 Clause 7.3.6	Pass
Antenna Requirement	N/A	FCC 47 CFR Part 15.203/ 15.407(a)(1) (2), RSS-Gen Issue 5, Clause 6.8	Pass

1. For ISED, this report is also performed according to ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 standards.

2. For FCC, this report is also performed according to ANSI C63.10-2020 + Cor.1-2023 standards.

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <FCC 47 CFR PART 15 SUBPART E, ISED RSS-247 Issue 4> when <Simple Acceptance> decision rule is applied. Decision rule for statement of conformity: The measurement uncertainty is not taken into account for statement of conformity.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	6
2. TEST METHODOLOGY.....	7
3. FACILITIES AND ACCREDITATION.....	8
4. CALIBRATION AND UNCERTAINTY	9
4.1. MEASURING INSTRUMENT CALIBRATION	9
4.2. MEASUREMENT UNCERTAINTY.....	9
5. EQUIPMENT UNDER TEST	10
5.1. DESCRIPTION OF EUT	10
5.2. CHANNEL LIST.....	11
5.3. MAXIMUM POWER.....	12
5.4. TEST CHANNEL CONFIGURATION.....	13
5.5. THE WORSE CASE POWER SETTING PARAMETER.....	14
5.6. WORSE CASE CONFIGURATIONS	16
5.7. DESCRIPTION OF AVAILABLE ANTENNAS	17
5.8. SUPPORT UNITS FOR SYSTEM TEST.....	19
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	20
7. ANTENNA PORT TEST RESULTS	23
7.1. ON TIME AND DUTY CYCLE.....	23
7.2. 6DB AND 26DB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH	24
7.3. CONDUCTED OUTPUT POWER.....	26
7.4. POWER SPECTRAL DENSITY	29
7.5. FREQUENCY STABILITY	31
7.6. DYNAMIC FREQUENCY SELECTION (SLAVE)	33
8. RADIATED TEST RESULTS	37
8.1. RESTRICTED BANDEGE.....	46
8.2. SPURIOUS EMISSIONS(1 GHZ~8 GHZ)	76
8.3. SPURIOUS EMISSIONS(8 GHZ~18 GHZ)	102
8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)	134
8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)	137
8.6. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)	139
8.7. SPURIOUS EMISSIONS(30 MHZ~1 GHZ).....	141

9.	AC POWER LINE CONDUCTED EMISSION	143
10.	ANTENNA REQUIREMENT	147
11.	TEST DATA.....	148
11.1.	APPENDIX A: EMISSION BANDWIDTH.....	148
11.1.1.	Test Result.....	148
11.1.2.	Test Graphs	150
11.2.	APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	151
11.2.1.	Test Result.....	151
11.2.2.	Test Graphs	153
11.3.	APPENDIX C: MIN EMISSION BANDWIDTH.....	154
11.3.1.	Test Result.....	154
11.3.2.	Test Graphs	155
11.4.	APPENDIX D: MAXIMUM CONDUCTED OUTPUT POWER.....	156
11.4.1.	Test Result.....	156
11.4.2.	Test Graphs	159
11.5.	APPENDIX E: MAXIMUM POWER SPECTRAL DENSITY	165
11.5.1.	Test Result.....	165
11.5.2.	Test Graphs	168
11.6.	APPENDIX F: FREQUENCY STABILITY.....	171
11.6.1.	Test Result.....	171
11.7.	APPENDIX G: DUTY CYCLE	172
11.7.1.	Test Result.....	172
11.7.2.	Test Graphs	173
11.8.	APPENDIX H: DFS DETECTION THRESHOLDS	175
11.8.1.	Test Result.....	175
11.8.2.	Test Graphs	175
11.9.	APPENDIX I: CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME	176
11.9.1.	Test Result.....	176
11.9.2.	Test Graphs	176
11.10.	APPENDIX J: NON-OCCUPANCY PERIOD.....	177
11.10.1.	Test Graphs	177

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Shenzhen Dangs Science and Technology Co., Ltd.
Address: 1301, Block D1, Chuangzhi Yuncheng, Liuxian Avenue, Nanshan District, Shenzhen, Guangdong Province, China

Manufacturer Information


Company Name: Shenzhen Dangs Science and Technology Co., Ltd.
Address: 1301, Block D1, Chuangzhi Yuncheng, Liuxian Avenue, Nanshan District, Shenzhen, Guangdong Province, China

EUT Information

EUT Name: Smart Projector
Model: N3Ultra
Series Model: N3Max
Model difference: Please refer to section 5.1
Brand: Dangbei
Sample Received Date: March 26, 2026
Sample Status: Normal
Sample ID: 9570823
Date of Tested: March 27, 2026 to April 21, 2026


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47 CFR PART 15 SUBPART E ISED RSS-247 Issue 4	Pass

Prepared By:



James Qin
Project Engineer

Checked By:



Kebo Zhang
Operations Leader

Approved By:



Stephen Guo
Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard FCC 47 CFR PART 15 SUBPART E ISSED RSS-247 Issue 4, ANSI C63.10-2020 + Cor.1-2023, ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024, FCC 47 CFR Part 2, KDB 789033 D02 v02r01, RSS-GEN Issue 5, KDB 414788 D01 Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02, KDB 905462 D03 UNII clients without radar detection New Rules v01r02, KDB 905462 D04 Operational Modes for DFS Testing New Rules v01 and KDB 905462 D06 802 11 Channel Plans New Rules v02.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules. ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: C-20202, G-20240, R-20248 and T-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber E, the VCCI registration No. is G-20240 and R-20248 Shielding Room F, the VCCI registration No. is C-20202 and T-20202
---------------------------	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 40 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
	5.37 dB (26 GHz ~ 40 GHz)
Duty Cycle	±0.028%
Emission Bandwidth and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.766 dB
Maximum Power Spectral Density Level	±1.22 dB
Frequency Stability	±2.76%
Dynamic Frequency Selection	±1.01 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Smart Projector
Model	N3Ultra
Series Model	N3Max
Model difference	The only difference is the model number

Frequency Range:	5180 MHz to 5240 MHz 5260 MHz to 5320 MHz 5500 MHz to 5720 MHz 5745 MHz to 5825 MHz
DFS Operational mode:	Slave without radar detection
Type of Modulation:	IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM(256QAM, 64QAM, 16QAM, QPSK, BPSK)
Radio Technology:	IEEE 802.11a/n HT20/n HT40/ac VHT20/ac VHT40/ac VHT80
Normal Test Voltage:	AC 120 V, 60 Hz

5.2. CHANNEL LIST

UNII-1 (For Bandwidth=20MHz)		UNII-1 (For Bandwidth=40MHz)		UNII-1 (For Bandwidth=80MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

UNII-2A (For Bandwidth=20MHz)		UNII-2A (For Bandwidth=40MHz)		UNII-2A (For Bandwidth=80MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

UNII-2C (For Bandwidth=20MHz)		UNII-2C (For Bandwidth=40MHz)		UNII-2C (For Bandwidth=80MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	138	5690
112	5560	126	5630		
116	5580	134	5670		
120	5600	142	5710		
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				
144	5720				

UNII-3 (For Bandwidth=20MHz)		UNII-3 (For Bandwidth=40MHz)		UNII-3 (For Bandwidth=80MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

5.3. MAXIMUM POWER

IEEE Std. 802.11	Frequency (MHz)	Maximum Average Conducted Power (dBm)	Max Average EIRP (dBm)
a	5180 ~ 5825	18.74	24.23
n HT20		16.20	21.69
n HT40		17.47	22.96
ac VHT80		16.83	22.32

Note:

1. Maximum conducted output power = measured value + cable loss (provided by UL) + cable loss (provided by UL or client)
2. Maximum EIRP = maximum conducted output power + antenna gain

5.4. TEST CHANNEL CONFIGURATION

UNII-1 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 36(Low Channel), CH 40(MID Channel), CH 48(High Channel)	5180 MHz, 5200 MHz, 5240 MHz
802.11n HT20	CH 36(Low Channel), CH 40(MID Channel), CH 48(High Channel)	5180 MHz, 5200 MHz, 5240 MHz
802.11n HT40	CH 38(Low Channel), CH 46(High Channel)	5190 MHz, 5230 MHz
802.11ac VHT80	CH 42(Low Channel)	5210 MHz

UNII-2A Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 52(Low Channel), CH 56(MID Channel), CH 64(High Channel)	5260 MHz, 5280 MHz, 5320 MHz
802.11n HT20	CH 52(Low Channel), CH 56(MID Channel), CH 64(High Channel)	5260 MHz, 5280 MHz, 5320 MHz
802.11n HT40	CH 54(Low Channel), CH 62(High Channel)	5270 MHz, 5310 MHz
802.11ac VHT80	CH 58(Low Channel)	5290 MHz

UNII-2C Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 100(Low Channel), CH 116(MID Channel), CH 140(High Channel)	5500 MHz, 5580 MHz, 5700 MHz
802.11n HT20	CH 100(Low Channel), CH 116(MID Channel), CH 140(High Channel)	5500 MHz, 5580 MHz, 5700 MHz
802.11n HT40	CH 102(Low Channel), CH 110(MID Channel), CH 134(High Channel)	5510 MHz, 5550 MHz, 5670 MHz
802.11ac VHT80	CH 102(Low Channel), CH 122(High Channel)	5530 MHz, 5610 MHz

UNII-3 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 149(Low Channel), CH 157(MID Channel), CH 165(High Channel)	5745 MHz, 5785 MHz, 5825 MHz
802.11n HT20	CH 149(Low Channel), CH 157(MID Channel), CH 165(High Channel)	5745 MHz, 5785 MHz, 5825 MHz
802.11n HT40	CH 151(Low Channel), CH 159(High Channel)	5755MHz, 5795MHz
802.11ac VHT80	CH 155(Low Channel)	5775 MHz

Straddle Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 144	5720 MHz
802.11n HT20	CH 144	5720 MHz
802.11n HT40	CH 142	5710 MHz
802.11ac VHT80	CH 138	5690 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter	
Test Software	DTM

Mode	Freq(MHz)	Power setting
		ANT1 & ANT2
802.11A-CDD	5180	11
	5200	11
	5240	11
	5260	default
	5280	default
	5320	default
	5500	default
	5580	default
	5700	default
	5720-2C	default
	5720-3	default
	5745	default
	5785	default
	5825	default
802.11n 20M	5180	13.5
	5200	13.5
	5240	14
	5260	default
	5280	default
	5320	default
	5500	default
	5580	default
	5700	default
	5720-2C	default
	5720-3	default
	5745	default
	5785	default
	5825	default
802.11n 40M	5190	15
	5230	15
	5270	default
	5310	default

	5510	default
	5550	default
	5670	default
	5710-2C	default
	5710-3	default
	5755	default
	5795	default
802.11ac 80M	5210	default
	5290	default
	5530	default
	5610	default
	5690-2C	default
	5690-3	default
	5775	default

5.6. WORSE CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst case Data Rates declared by the customer:

802.11a 20 mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0
802.11ac VHT20 mode: MCS0
802.11ac VHT40 mode: MCS0
802.11ac VHT80 mode: MCS0

All modes support CDD mode.

802.11ac VHT20 and VHT40 mode are different from 802.11nHT20 and HT40 only in control messages, so for these 4 modes, only 802.11n HT20 and 802.11n HT40 worst case power modes radiated emission test data are recorded in the report .

The EUT has 2 separate antennas which correspond to 2 separate antenna ports. Core 1 and Core 2 correspond to antenna 1 and antenna 2 respectively.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

Conducted output power, power spectral density tests separately on each port with all supported MIMO port combinations.

Radiated emissions tests were performed with the MIMO modes. These were found to be the worst modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest conducted output power level, it was deemed to be the worst case.

Based on ANSI C63.10-2020 section 5.6.2.2(b), for Harmonics and Spurious Emissions, all modes have been tested, only the worst-case power and PSD modes were recorded in the report.

Worst case mode:

Worst Power Mode-UNII-1: 802.11n HT40

Worst PSD Mode-UNII-1: 802.11a 20

Worst Power and PSD Mode-UNII-2A/UNII-2C/UNII-3: 802.11a 20

5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna No.	Frequency Band	Antenna Type	Max Antenna Gain (dBi)	Power Directional Gain (dBi)	PSD Directional Gain (dBi)
1	5180-5240	PIFA antenna	3.04	3.04	6.05
2	5180-5240	PIFA antenna	3.04		

Antenna No.	Frequency Band	Antenna Type	Max Antenna Gain (dBi)	Power Directional Gain (dBi)	PSD Directional Gain (dBi)
1	5260-5320	PIFA antenna	3.17	3.17	6.18
2	5260-5320	PIFA antenna	3.17		

Antenna No.	Frequency Band	Antenna Type	Max Antenna Gain (dBi)	Power Directional Gain (dBi)	PSD Directional Gain (dBi)
1	5500-5720	PIFA antenna	4.45	4.45	7.46
2	5500-5720	PIFA antenna	4.45		

Antenna No.	Frequency Band	Antenna Type	Max Antenna Gain (dBi)	Power Directional Gain (dBi)	PSD Directional Gain (dBi)
1	5745-5825	PIFA antenna	5.49	5.49	8.50
2	5745-5825	PIFA antenna	5.49		

Note: The antenna gain is provided by client / obtained through lab tests.

The EUT support Cyclic Shift Diversity(CDD) mode.

MIMO output power port and MIMO PSD port summing were performed in accordance with KDB 662911 D01. For the CDD results the Directional Gain was calculated in accordance with the following method.

For output power measurements:

Directional gain= $G_{ANT} + \text{Array Gain}$

G_{ANT} : equal to the gain of the antenna having the highest gain

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$

For power spectral density (PSD) measurements:

Directional gain= $G_{ANT} + \text{Array Gain}$

Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

N_{ANT} : number of transmit antennas

N_{SS} : number of spatial streams, The worst case directional gain will occur when $N_{SS} = 1$

IEE Std. 802.11	Transmit and Receive Mode	Description
802.11a	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11n HT20	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11n HT40	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11ac VHT20	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11ac VHT40	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11ac VHT80	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
Note: 1. BT&WLAN 2.4G, BT & WLAN 5G, WLAN 2.4G & WLAN 5G can't transmit simultaneously (Declared by client)		

5.8. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remark
1	PC	Lenovo	E14	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

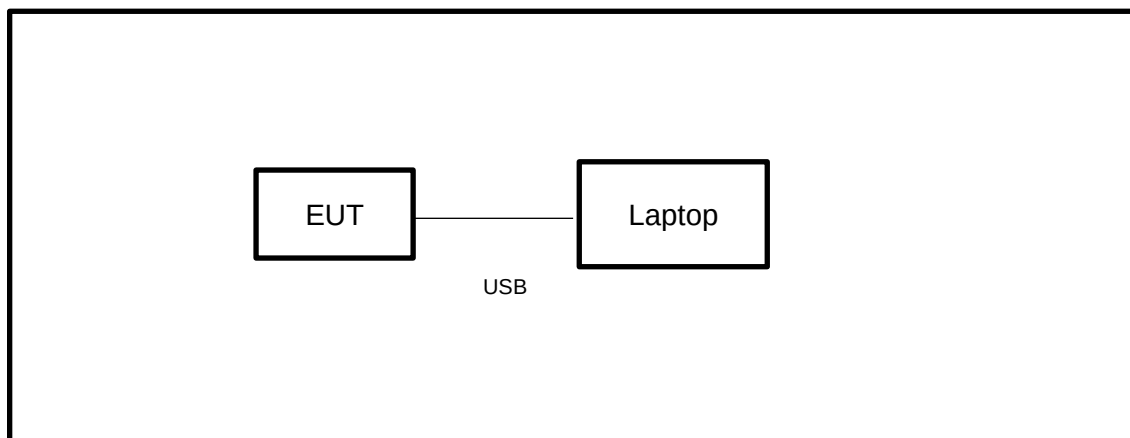

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Dec.26,2025	Dec.25,2026
Vector Signal Generator	R&S	SMBV100A	261637	Sep.12, 2025	Sep.11, 2026
Signal Generator	R&S	SMB100A	178553	Sep.12, 2025	Sep.11, 2026
Signal Analyzer	R&S	FSV40	101118	Sep.12, 2025	Sep.11, 2026
Software					
Description		Manufacturer		Name	Version
For R&S TS 8997 Test System		Rohde & Schwarz		EMC 32	10.60.10
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.12, 2025	Sep.11, 2026
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.12, 2025	Sep.11, 2026
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Sep.12, 2025	Sep.11, 2026
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Sep.12, 2025	Sep.11, 2026
DC power supply	TSSTAKASAGO	ZX-400L	409150160137	Sep.12, 2025	Sep.11, 2026
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Sep.12, 2025	Sep.11, 2026
Attenuator	Aglient	8495B	2814a12853	Sep.12, 2025	Sep.11, 2026
RF Control Unit	Tonscend	JS0806-2	23B80620666	Dec.26,2025	Dec.25,2026
Software					
Description	Manufacturer	Name			Version
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System			V3.2.22

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Sep.12, 2025	Sep.11, 2026
Two-Line V-Network	R&S	ENV216	101983	Sep.12, 2025	Sep.11, 2026
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Sep.12, 2025	Sep.11, 2026
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions(Below 1G)					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.12, 2025	Sep.11, 2026
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	June 28, 2024	June.27 2027
Preamplifier	HP	8447D	2944A09099	Sep.12, 2025	Sep.11, 2026
Loop antenna	Schwarzbeck	1519B	00008	Dec.09, 2024	Dec.08, 2027
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions(Above 1G)					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Signal Analyzer	R&S	FSV40	101117	Sep.12, 2025	Sep.11, 2026
Preamplifier	TDK	PA-02-001-3000	TRS-302-00051	Sep.12, 2025	Sep.11, 2026
Horn Antenna	ETS-Lindgren	3117	00213191	Jan.29,2026	Jan.28,2029
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.12, 2025	Sep.11, 2026
High Gain Horn Antenna	Schwarzbeck	BBHA-9170	697	Jun. 30, 2024	Jun. 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00002	Sep.12, 2025	Sep.11, 2026
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.12, 2025	Sep.11, 2026
Highpass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	Sep.12, 2025	Sep.11, 2026

Band Reject Filter	Wainwright	WRCJV12-5695-5725-5850-5880-40SS	4	Sep.12, 2025	Sep.11, 2026
Band Reject Filter	Wainwright	WRCJV20-5120-5150-5350-5380-60SS	2	Sep.12, 2025	Sep.11, 2026
Band Reject Filter	Wainwright	WRCJV20-5440-5470-5725-5755-60SS	1	Sep.12, 2025	Sep.11, 2026
Software					
Description	Manufacturer	Name		Version	
Test Software for Radiated Emission	Tonscend	JS32-RE		5.0.0	
Test Software for Radiated Emissions	Farad	EZ-EMC		Ver. UL-3A1	

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Sep.16, 2025	Sep.15, 2026
Barometer	Yiyi	Baro	N/A	Sep.19, 2025	Sep.18, 2026
Attenuator	Agilent	8495B	2814a12853	Sep.12, 2025	Sep.11, 2026

7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE

LIMITS


None; for reporting purposes only.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.B.

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW $\geq$ EBW if possible; otherwise, set RBW to the largest available value. Set VBW $\geq$ RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST SETUP

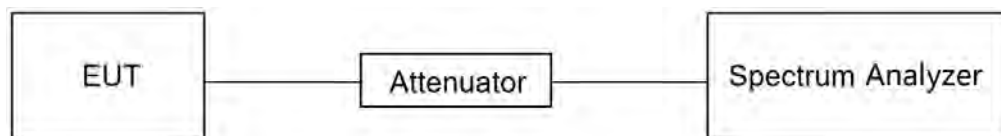

TEST ENVIRONMENT

Temperature	24.5°C	Relative Humidity	61.4%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	April 1, 2026	Test By	Bairong Liu
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix G

7.2. 6DB AND 26DB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

FCC 47 CFR Part15 Subpart E ISED RSS-247 ISSUE 4		
Test Item	Limit	Frequency Range (MHz)
26 dB Emission Bandwidth	For reporting purposes only.	5150 ~ 5250
26 dB Emission Bandwidth	For reporting purposes only.	5250 ~ 5350
26 dB Emission Bandwidth	For reporting purposes only.	5470 ~ 5725
6 dB Emission Bandwidth	The minimum 6 dB emission bandwidth shall be 500 kHz.	5725 ~ 5850
99 % Occupied Bandwidth	For reporting purposes only.	5150 ~ 5825 (For ISDE)

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.C1. for 26 dB Emission Bandwidth; section II.C2. for 6 dB Emission Bandwidth; section II.D. for 99 % Occupied Bandwidth.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6 dB Emission Bandwidth: RBW=100 kHz For 26 dB Emission bandwidth: approximately 1 % of the EBW. For 99 % Occupied Bandwidth: approximately 1 % ~ 5 % of the OBW.
VBW	For 6 dB Bandwidth: $\geq 3 \times \text{RBW}$ For 26 dB Bandwidth: $> 3 \times \text{RBW}$ For 99 % Bandwidth: $> 3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6/26 dB relative to the maximum level measured in the fundamental emission.

Calculation for 99 % Bandwidth of UNII-2C and UNII-3 Straddle Channel:

For Example: Fundamental Frequency: 5720 MHz

99 % OBW: 21.00 MHz

Turning Frequency: 5725 MHz

99 % Bandwidth of UNII-2C Band Portion = $(5725 - (5720 + (21.00/2))) = 15.50 \text{ MHz}$

99 % Bandwidth of UNII-3 Band Portion = $(5720 + (21.00/2) - 5725) = 5.50 \text{ MHz}$

Calculation for 26 dB Bandwidth of UNII-2C Straddle Channel:

For Example: Fundamental frequency: 5720 MHz

26 dB BW: 20.00 MHz

FL: 5710.16 MHz

FH: 5730.16 MHz

Turning Frequency: 5725 MHz

26 dB Bandwidth of UNII-2C Band Portion = $5725 - 5710.16 = 14.84$ MHz

Calculation for 6dB Bandwidth of UNII-3 Straddle Channel:

For Example: Fundamental frequency: 5720 MHz


6 dB BW: 16.44 MHz

FL: 5711.76 MHz

FH: 5728.2 MHz

Turning Frequency: 5725 MHz

6 dB Bandwidth of UNII-3 band Portion = $5728.2 - 5725 = 3.2$ MHz

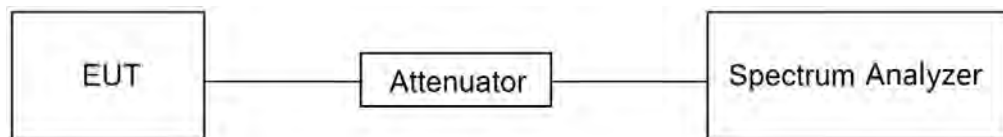TEST SETUP**TEST ENVIRONMENT**

Temperature	24.5°C	Relative Humidity	61.4%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	April 1, 2026	Test By	Bairong Liu
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix A&B&C

7.3. CONDUCTED OUTPUT POWER

LIMITS

FCC 47 CFR Part15 Subpart E		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	☐ Outdoor Access Point: 1 W (30 dBm) ☐ Indoor Access Point: 1 W (30 dBm) ☐ Fixed Point-To-Point Access Points: 1 W (30 dBm) ☒ Client Devices: 250 mW (24 dBm)	5150 ~ 5250
	Shall not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.	5250 ~ 5350 5470 ~ 5725
	Shall not exceed 1 Watt (30 dBm).	5725 ~ 5850

ISED RSS-247 ISSUE 4		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power or e.i.r.p.	The maximum e.i.r.p. shall not exceed 200 mW (23 dBm) or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99 % emission bandwidth in megahertz.	5150 ~ 5250
	a. The maximum conducted output power shall not exceed 250 mW (24 dBm) or $11 + 10 \log_{10} B$ dBm, whichever is less. b. The maximum e.i.r.p. shall not exceed 1.0 W (30 dBm) or $17 + 10 \log_{10} B$ dBm, whichever is less. B is the 99 % emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.	5250 ~ 5350 5470 ~ 5725
	Shall not exceed 1 Watt (30 dBm). The e.i.r.p. shall not exceed 4 W	5725 ~ 5850

Note:

The above limits are based upon the maximum antenna gain does not exceed 6 dBi.
 If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.E.

Method SA-2 (trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction.):

- Measure the duty cycle D of the transmitter output signal.
- Set span to encompass the entire 26 dB EBW or 99% OBW of the signal.


- (c) Set RBW = 1 MHz.
- (d) Set VBW $\geq$ 3 MHz.
- (e) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- (f) Sweep time = auto.
- (g) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (h) Do not use sweep triggering. Allow the sweep to “free run.”
- (i) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
- j) Compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument’s band power measurement function with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.
- k) Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add $[10 \log (1 / 0.25)] = 6 \text{ dB}$ if the duty cycle is 25%.

Method PM (Measurement using an RF average power meter):

- (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
 - a. The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
 - b. At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 - c. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II.B.
- (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- (iv) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25 %).

Note: Method SA-2 was used for straddle channel output power test, and Method PM was used for testing rest channels

TEST SETUP

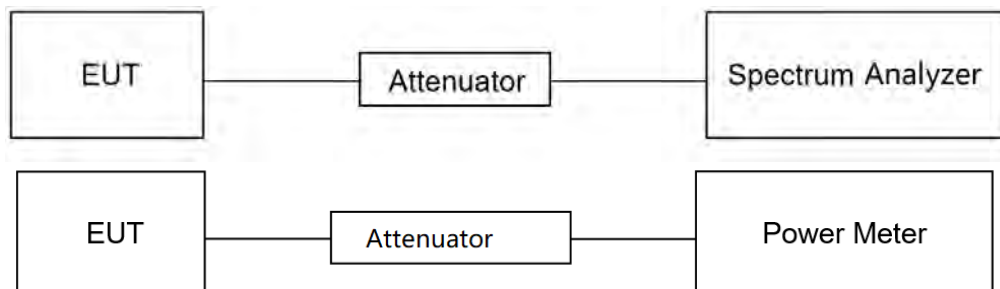

TEST ENVIRONMENT

Temperature	24.5°C	Relative Humidity	61.4%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	April 1, 2026	Test By	Bairong Liu
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix D

7.4. POWER SPECTRAL DENSITY

LIMITS

FCC 47 CFR Part15 Subpart E		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	☐ Outdoor Access Point: 17 dBm/MHz ☐ Indoor Access Point: 17 dBm/MHz ☐ Fixed Point-To-Point Access Points: 17 dBm/MHz ☒ Client Devices: 11 dBm/MHz	5150 ~ 5250
	11 dBm/MHz	5250 ~ 5350 5470 ~ 5725
	30 dBm/500kHz	5725 ~ 5850

ISED RSS-247 ISSUE 4		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.	5150 ~ 5250
	The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.	5250 ~ 5350 5470 ~ 5725
	30 dBm / 500 kHz	5725 ~ 5850

Note:

The above limits are based upon the maximum antenna gain does not exceed 6 dBi.
 If transmitting antennas of directional gain greater than 6 dBi are used, maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.F.

Connect the EUT to the spectrum analyzer and use the following settings:

For U-NII-1, U-NII-2A and U-NII-2C band:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	1 MHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Average
Sweep time	Auto


For U-NII-3:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	500 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Average
Sweep time	Auto

Allow trace to fully stabilize and use the peak search function on the instrument to find the peak of the spectrum and record its value.

Add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum, the result is the Maximum PSD over 1 MHz / 500 kHz reference bandwidth.

TEST SETUP

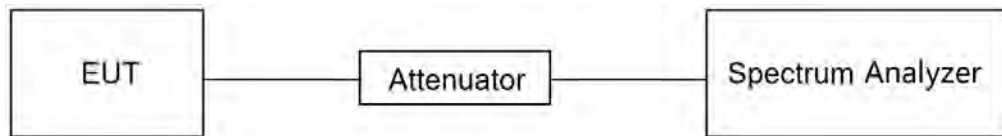

TEST ENVIRONMENT

Temperature	24.5°C	Relative Humidity	61.4%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	April 1, 2026	Test By	Bairong Liu
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix E

7.5. FREQUENCY STABILITY

LIMITS

The frequency of the carrier signal shall be maintained within band of operation.

TEST PROCEDURE

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between 0 °C ~ 40 °C (declared by customer).
2. The temperature was incremented by 10 °C intervals and the unit allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Connect the EUT to the spectrum analyzer and use the following settings:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	10 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

4. While maintaining a constant temperature inside the environmental chamber, turn the EUT on and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized.
5. Allow the trace to stabilize, find the peak value of the power envelope and record the frequency, then calculated the frequency drift.

TEST ENVIRONMENT

	Normal Test Conditions	Extreme Test Conditions
Relative Humidity	20 % ~ 75 %	/
Atmospheric Pressure	100 kPa ~ 102 kPa	/
Temperature	T _N (Normal Temperature): 25.1 °C	T _L (Low Temperature): 0 °C
		T _H (High Temperature): 40 °C
Supply Voltage	V _N (Normal Voltage): AC 120 V, 60 Hz	V _L (Low Voltage): AC 102 V
		V _H (High Voltage): AC 138 V

TEST SETUP

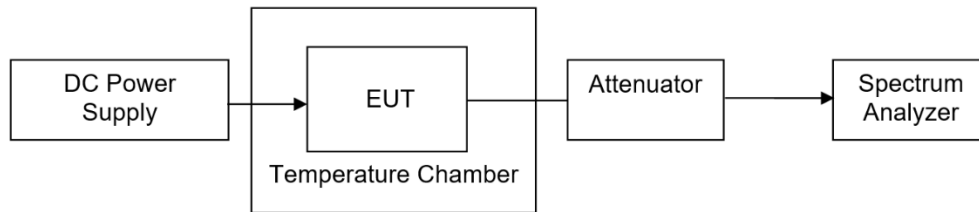

TEST ENVIRONMENT

Temperature	24.5°C	Relative Humidity	61.4%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	April 1, 2026	Test By	Bairong Liu
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix F

7.6. DYNAMIC FREQUENCY SELECTION (SLAVE)

LIMITS

(1) DFS Detection Thresholds

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

(2) DFS Response Requirements

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

APPLICABILITY OF DFS REQUIREMENTS

A U-NII network will employ a DFS function to detect signals from radar systems and to avoid co-channel operation with these systems. This applies to the 5250-5350 MHz and/or 5470-5725 MHz bands.

Within the context of the operation of the DFS function, a U-NII device will operate in either Master Mode or Client Mode. U-NII devices operating in Client Mode can only operate in a network controlled by a U-NII device operating in Master Mode.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	☐ Master	☒ Client Without Radar Detection	☐ Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	☐ Master Device or Client with Radar Detection	☒ Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	☐ Master Device or Client with Radar Detection	☒ Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

PARAMETERS OF RADAR TEST WAVEFORMS


This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 5 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A	Roundup $\left(\frac{f}{360} \right)$ $\left(\frac{19 \cdot 10^6}{PRI} \right)$	60%	30
		Test B			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a. Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. Test aggregate is average of the percentage of successful detections of short pulse radar types 1-4.

TEST SETUP

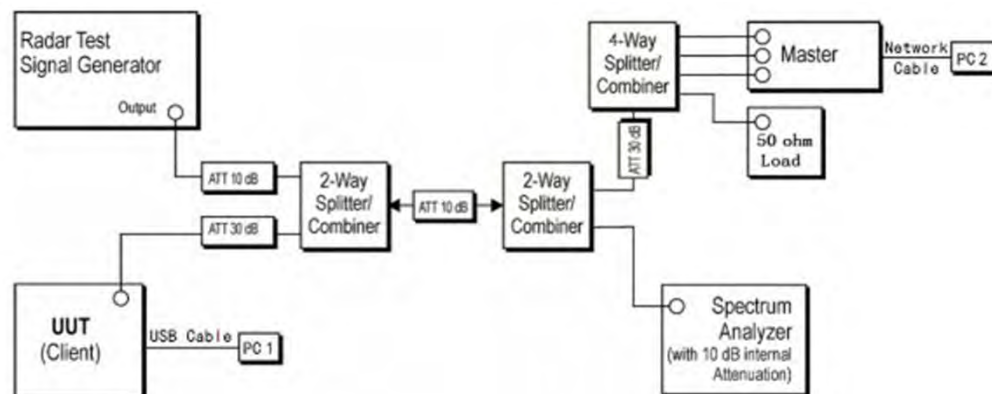

TEST ENVIRONMENT

Temperature	24.8°C	Relative Humidity	55%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	April 10, 2026	Test By	Bairong Liu
-----------	----------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix H&I&J

8. RADIATED TEST RESULTS

LIMITS

Refer to FCC 47 CFR §15.205, §15.209 and §15.407 (b).

Refer to ISED RSS-GEN Clause 8.9, Clause 8.10 and ISED RSS-247 7.3.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands refer to ISED RSS-GEN Clause 8.10

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.028	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC 47 CFR §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

Limits of unwanted/undesirable emission out of the restricted bands refer to FCC 47 CFR §15.407 (b) and ISSED RSS-247 7.3.

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1GHz)		
Frequency Range (MHz)	EIRP Limit	Field Strength Limit (dBuV/m) at 3 m
5150~5250 MHz	PK: -27 (dBm/MHz)	PK:68.2(dBμV/m)
5250~5350 MHz		
5470~5725 MHz		
5725~5850 MHz	PK: -27 (dBm/MHz) *1 PK: 10 (dBm/MHz) *2 PK: 15.6 (dBm/MHz) *3 PK: 27 (dBm/MHz) *4	PK: 68.2(dBμV/m) *1 PK: 105.2 (dBμV/m) *2 PK: 110.8(dBμV/m) *3 PK: 122.2 (dBμV/m) *4
Note: *1 beyond 75 MHz or more above of the band edge. *2 below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above. *3 below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above. *4 from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.		

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto


1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the

applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.

7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

X axis, Y axis, Z axis positions:

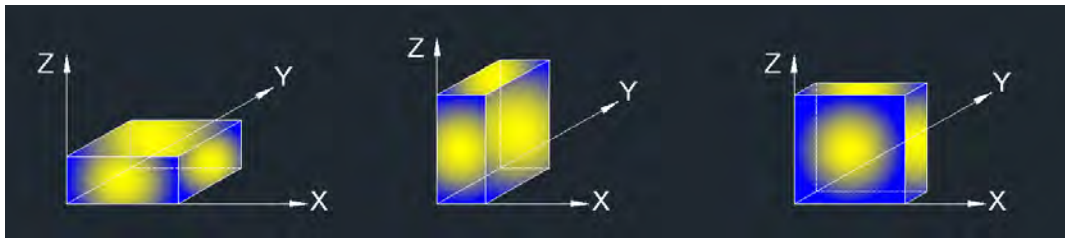

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.


Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

X axis, Y axis, Z axis positions:

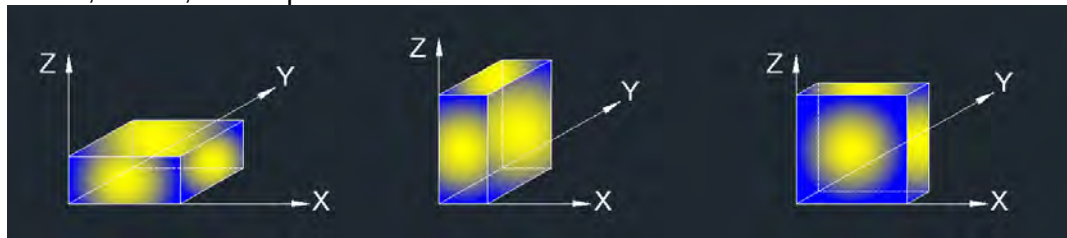

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.G.3 ~ II.G.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

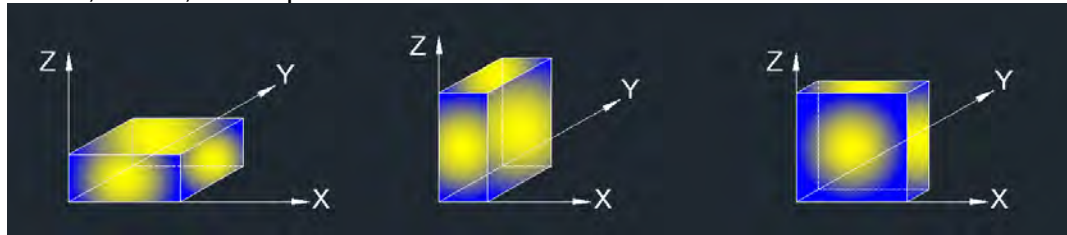

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (Z axis) data recorded in the report.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 7 GHz):

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.
9. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (7 GHz ~ 18 GHz):

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.
9. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):

Note:


1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (26 GHz ~ 40 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

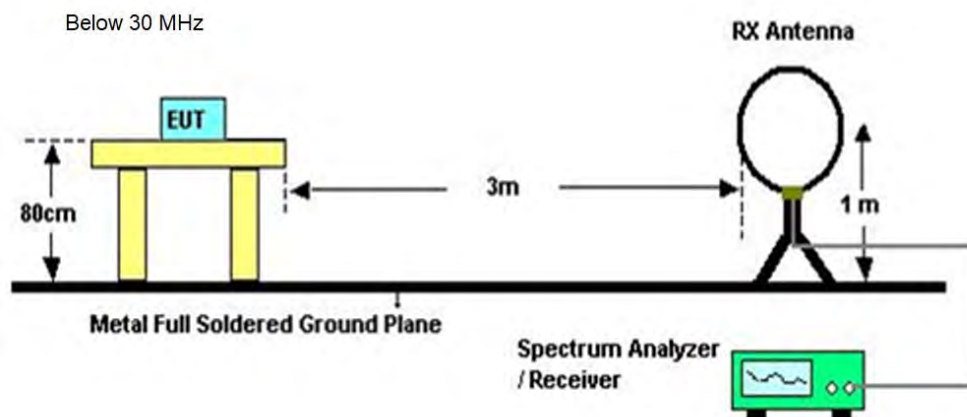

Below 1 GHz and above 30 MHz

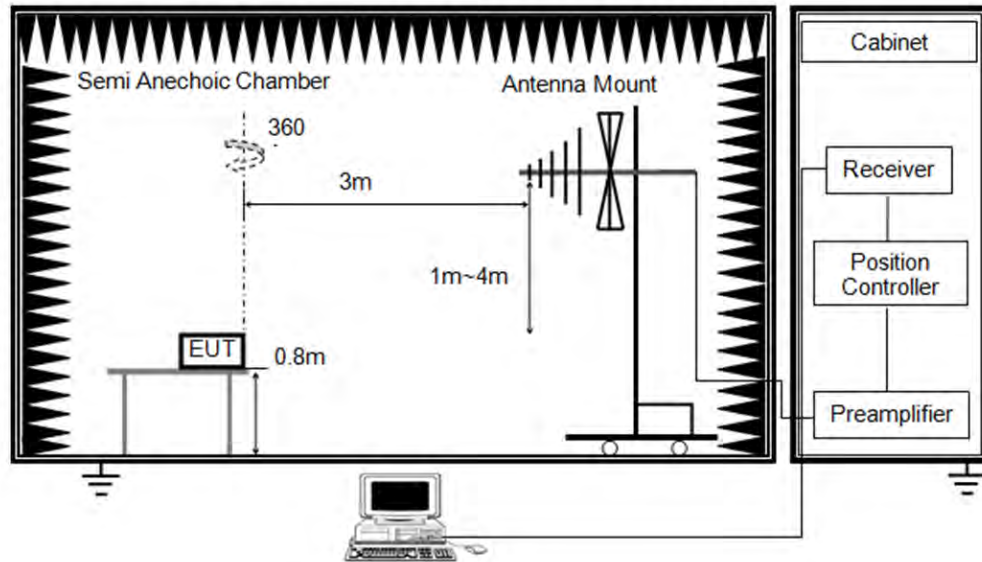

Above 1GHz

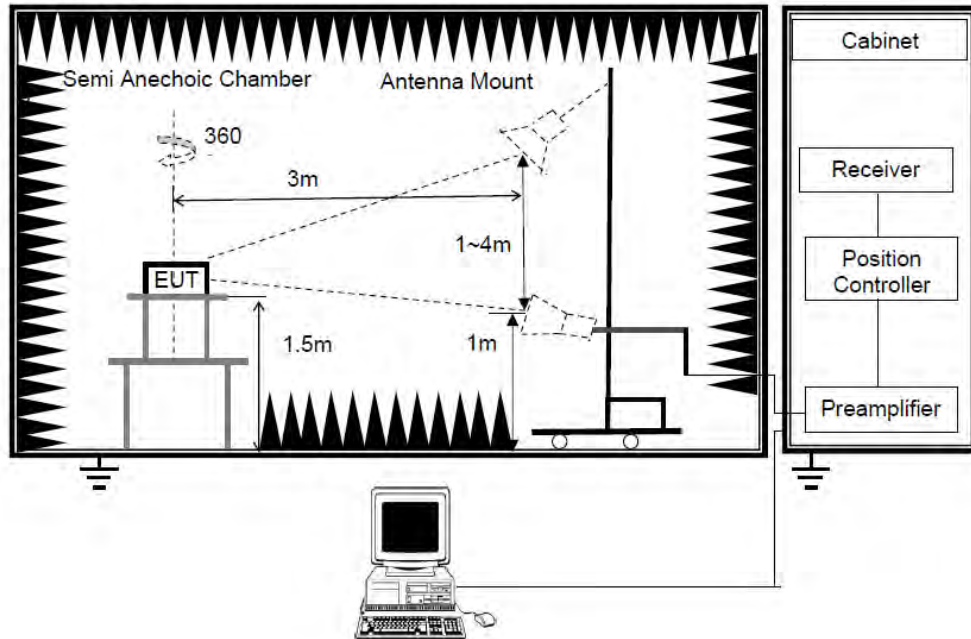

TEST ENVIRONMENT

Temperature	22.1℃	Relative Humidity	58%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz


TEST DATE / ENGINEER

Test Date	April 4, 2026	Test By	Leslie Xie
-----------	---------------	---------	------------

TEST RESULTS

8.1. RESTRICTED BANDEDGE

TX Radiated Test Result

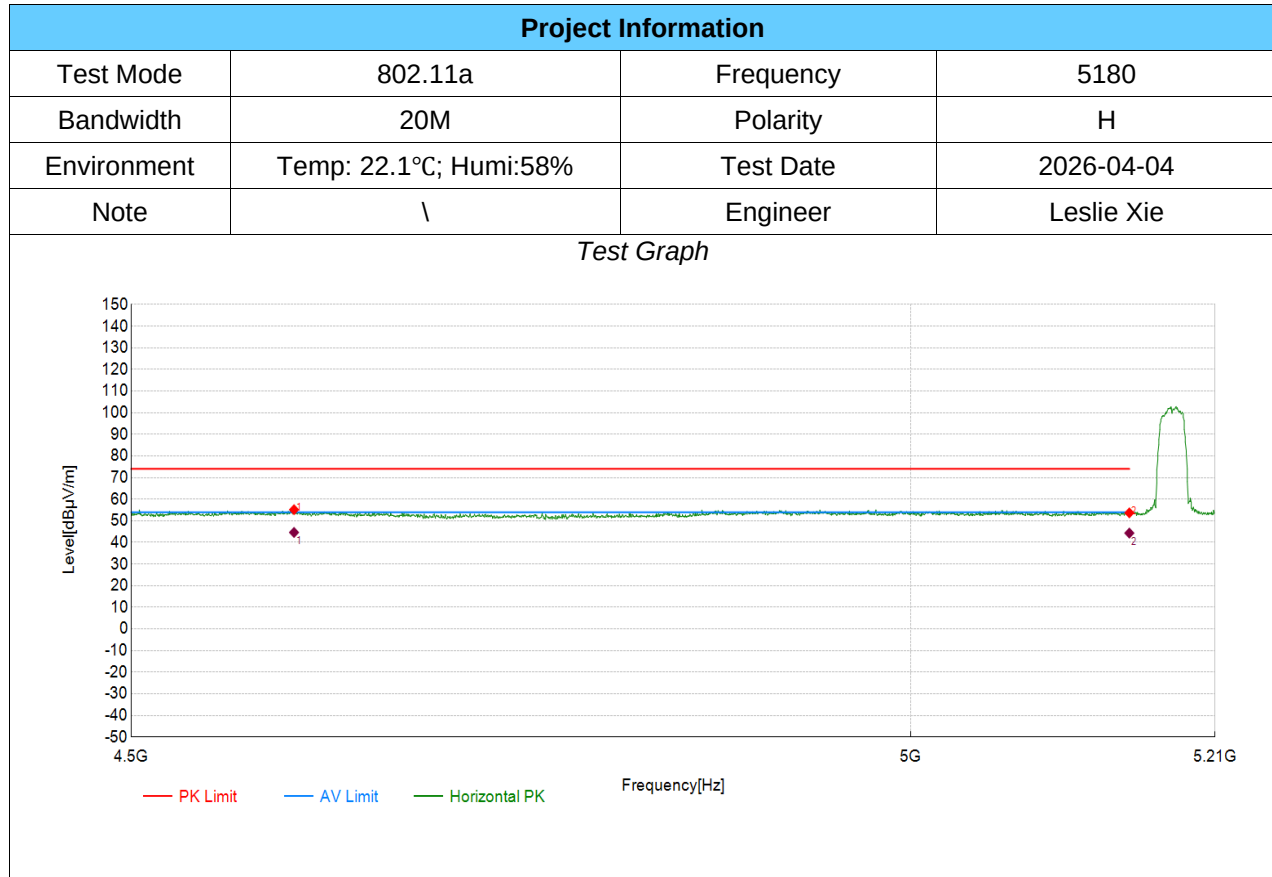

PEAK Data List


NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4600.16	40.93	55.16	14.23	74.00	18.84	PK	Horizontal	PASS
2	5150.00	40.35	53.68	13.33	74.00	20.32	PK	Horizontal	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	4600.16	14.23	30.41	44.64	54.00	9.36	Horizontal	PASS
2	5150.00	13.32	31.01	44.33	54.00	9.67	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

TX Radiated Test Result

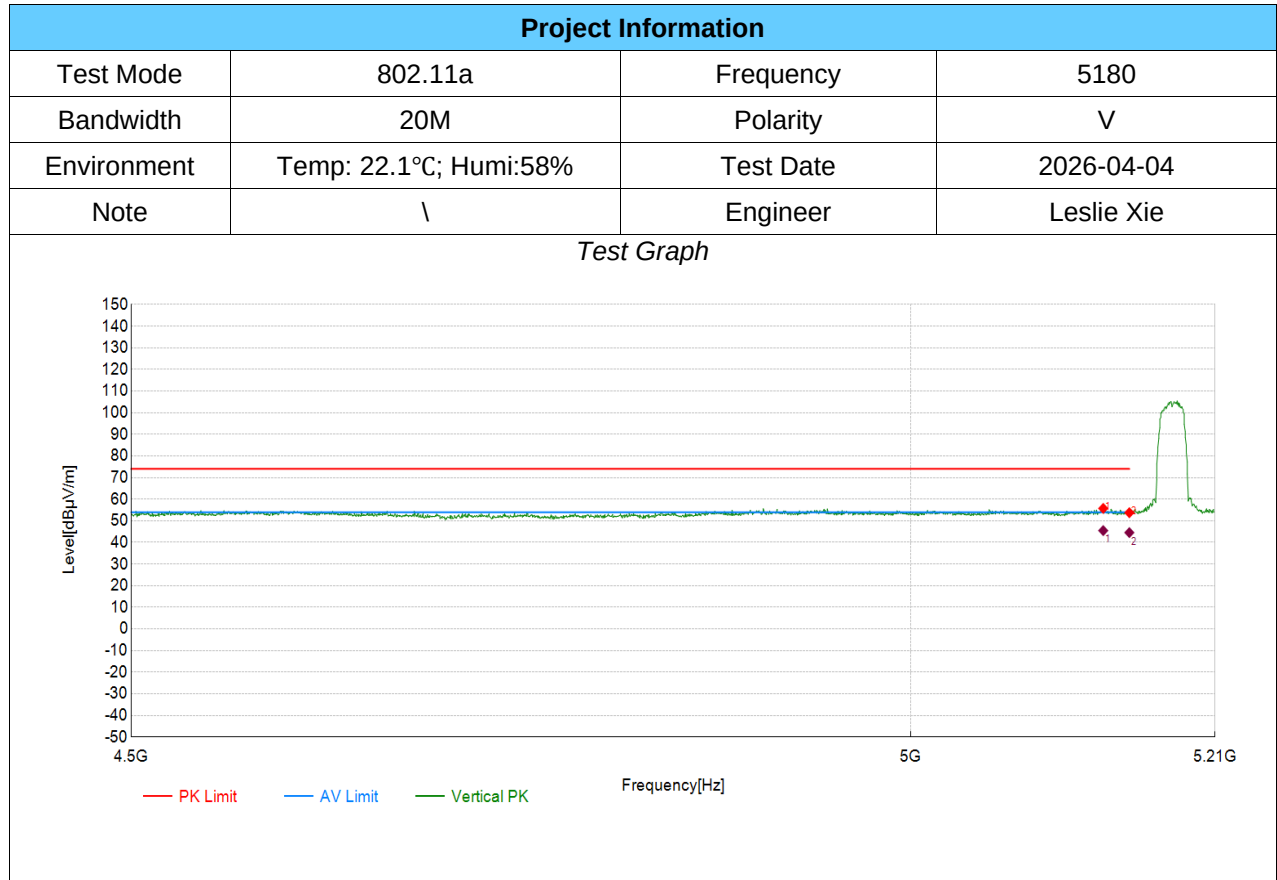


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5131.86	42.50	55.76	13.26	74.00	18.24	PK	Vertical	PASS
2	5150.00	40.42	53.75	13.33	74.00	20.25	PK	Vertical	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	5131.86	13.26	32.21	45.47	54.00	8.53	Vertical	PASS
2	5150.00	13.32	31.22	44.54	54.00	9.46	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

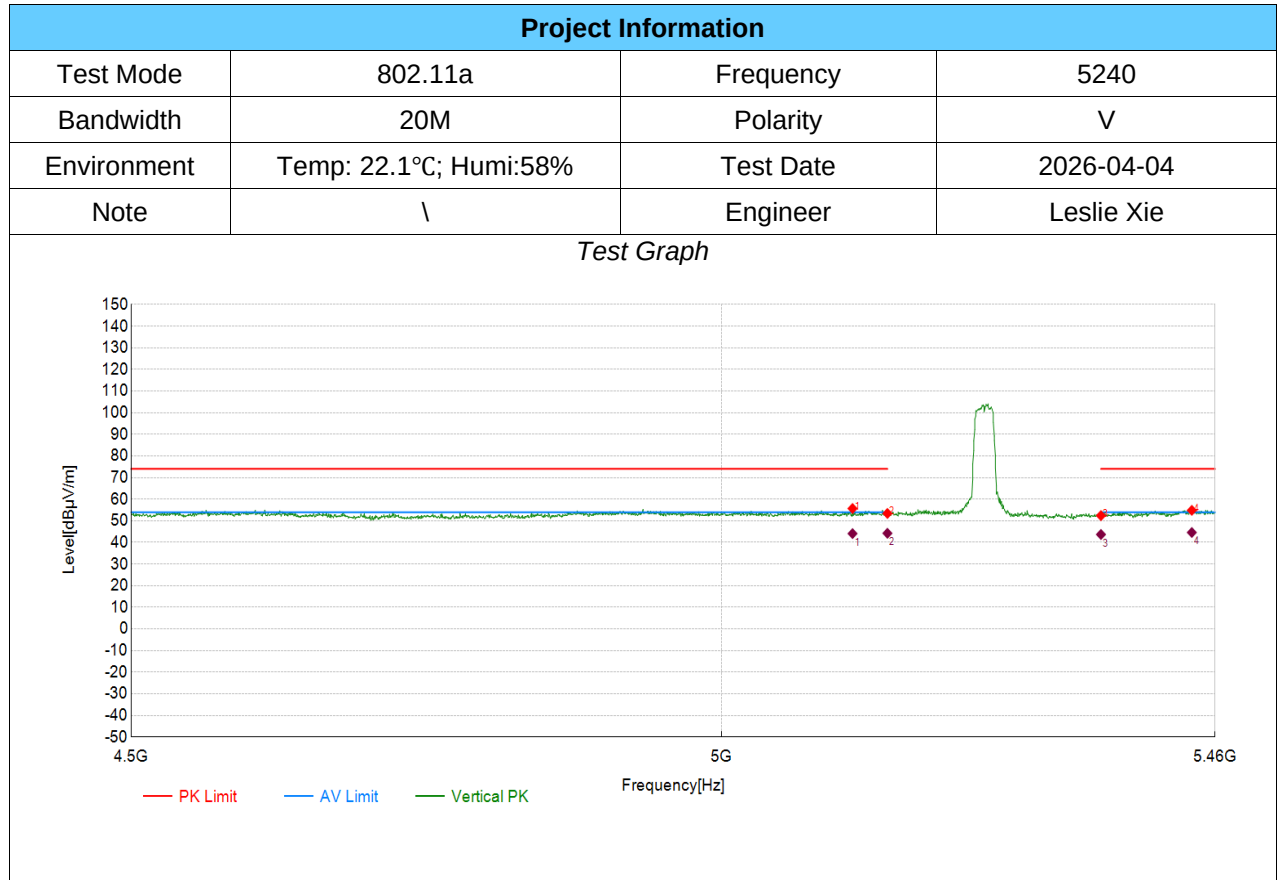


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5118.07	42.48	55.68	13.20	74.00	18.32	PK	Vertical	PASS
2	5150.00	40.09	53.42	13.33	74.00	20.58	PK	Vertical	PASS
3	5350.00	38.10	52.42	14.32	74.00	21.58	PK	Vertical	PASS
4	5437.43	39.06	54.86	15.80	74.00	19.14	PK	Vertical	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	5118.07	13.20	30.89	44.09	54.00	9.91	Vertical	PASS
2	5150.00	13.32	30.92	44.24	54.00	9.76	Vertical	PASS
3	5350.00	14.32	29.38	43.70	54.00	10.30	Vertical	PASS
4	5437.43	15.80	28.81	44.61	54.00	9.39	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

TX Radiated Test Result

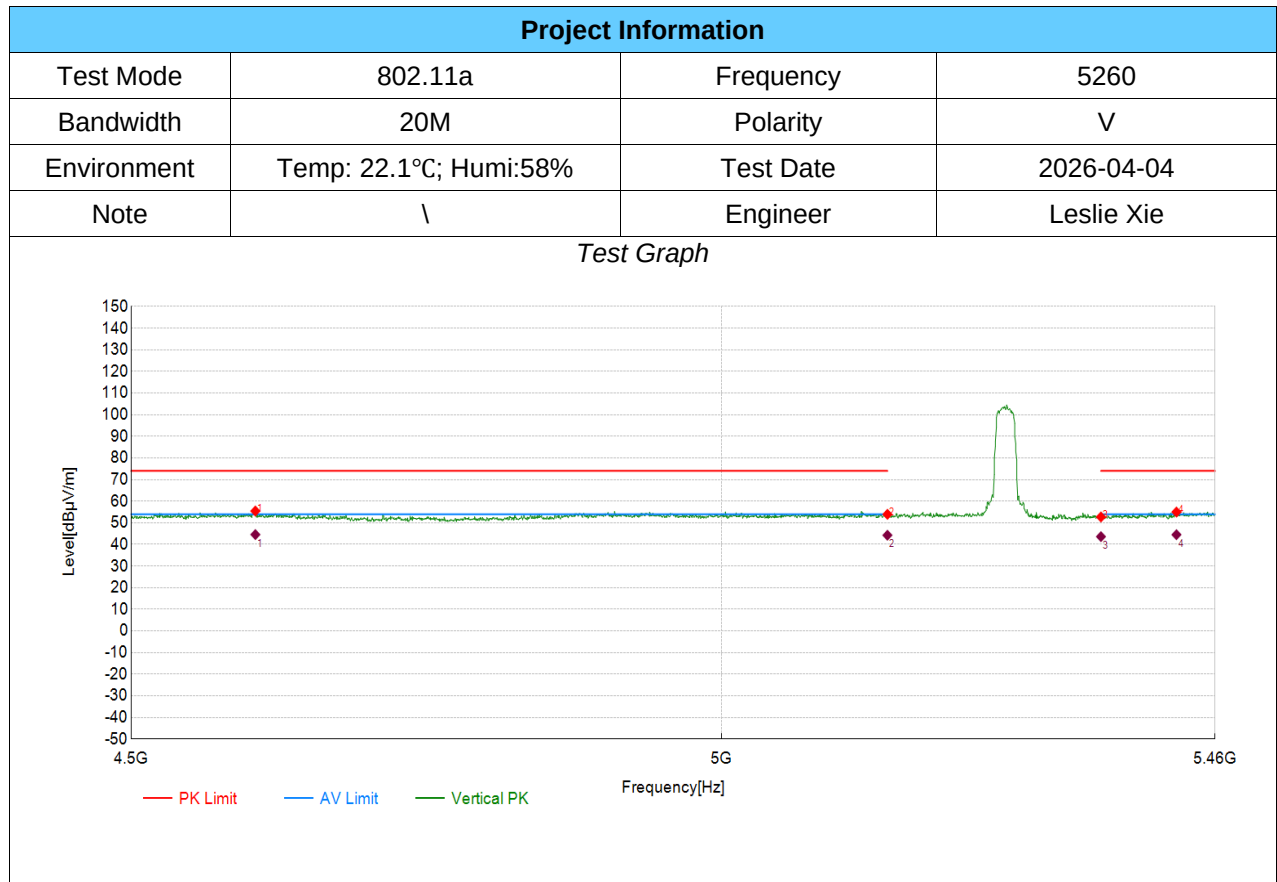

PEAK Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4600.85	41.24	55.46	14.22	74.00	18.54	PK	Vertical	PASS
2	5150.00	40.61	53.94	13.33	74.00	20.06	PK	Vertical	PASS
3	5350.00	38.41	52.73	14.32	74.00	21.27	PK	Vertical	PASS
4	5422.54	39.47	54.99	15.52	74.00	19.01	PK	Vertical	PASS


AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	4600.85	14.22	30.34	44.56	54.00	9.44	Vertical	PASS
2	5150.00	13.32	30.94	44.26	54.00	9.74	Vertical	PASS
3	5350.00	14.32	29.29	43.61	54.00	10.39	Vertical	PASS
4	5422.54	15.52	29.00	44.52	54.00	9.48	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level


TX Radiated Test Result

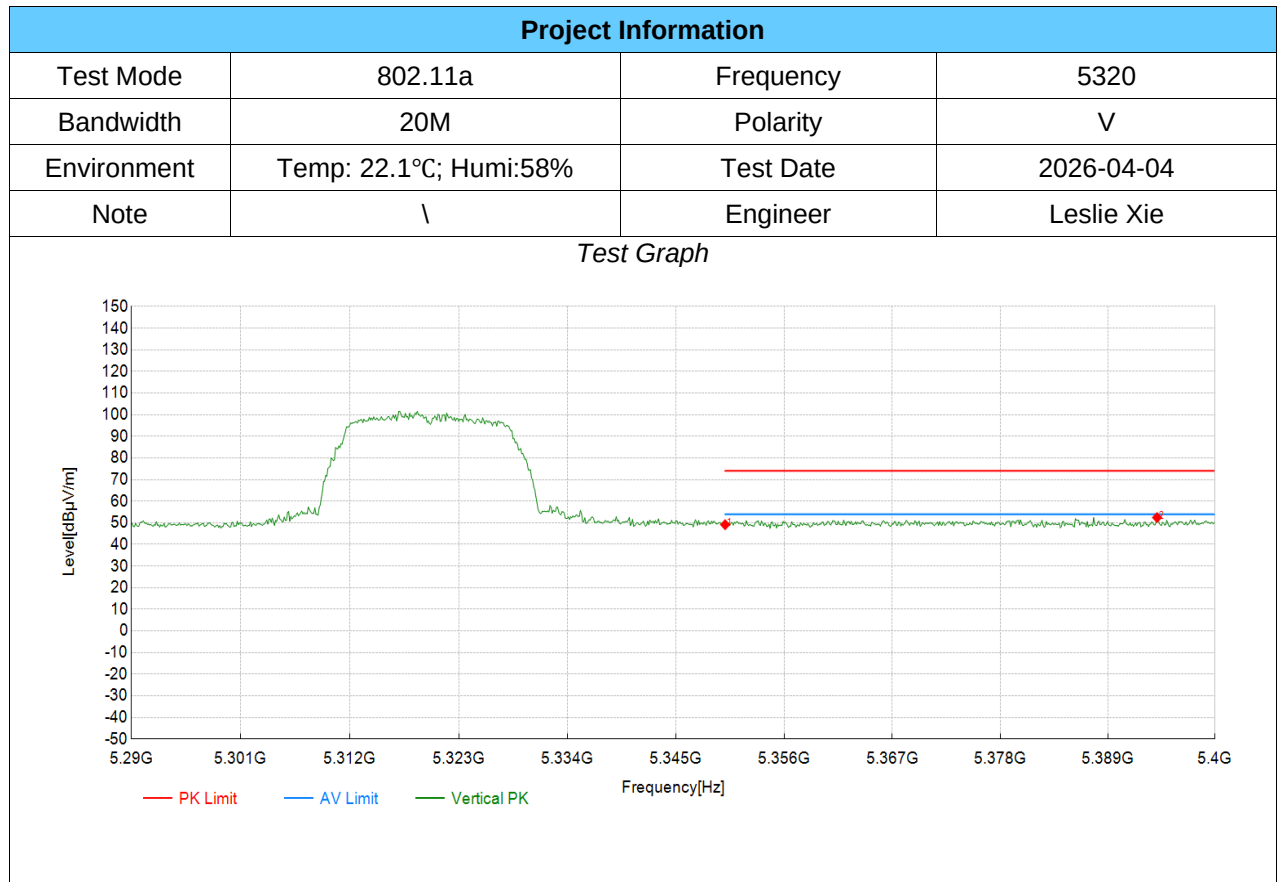

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	36.42	49.14	12.72	74.00	24.86	PK	Vertical	PASS
2	5394.06	39.04	52.43	13.39	74.00	21.57	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

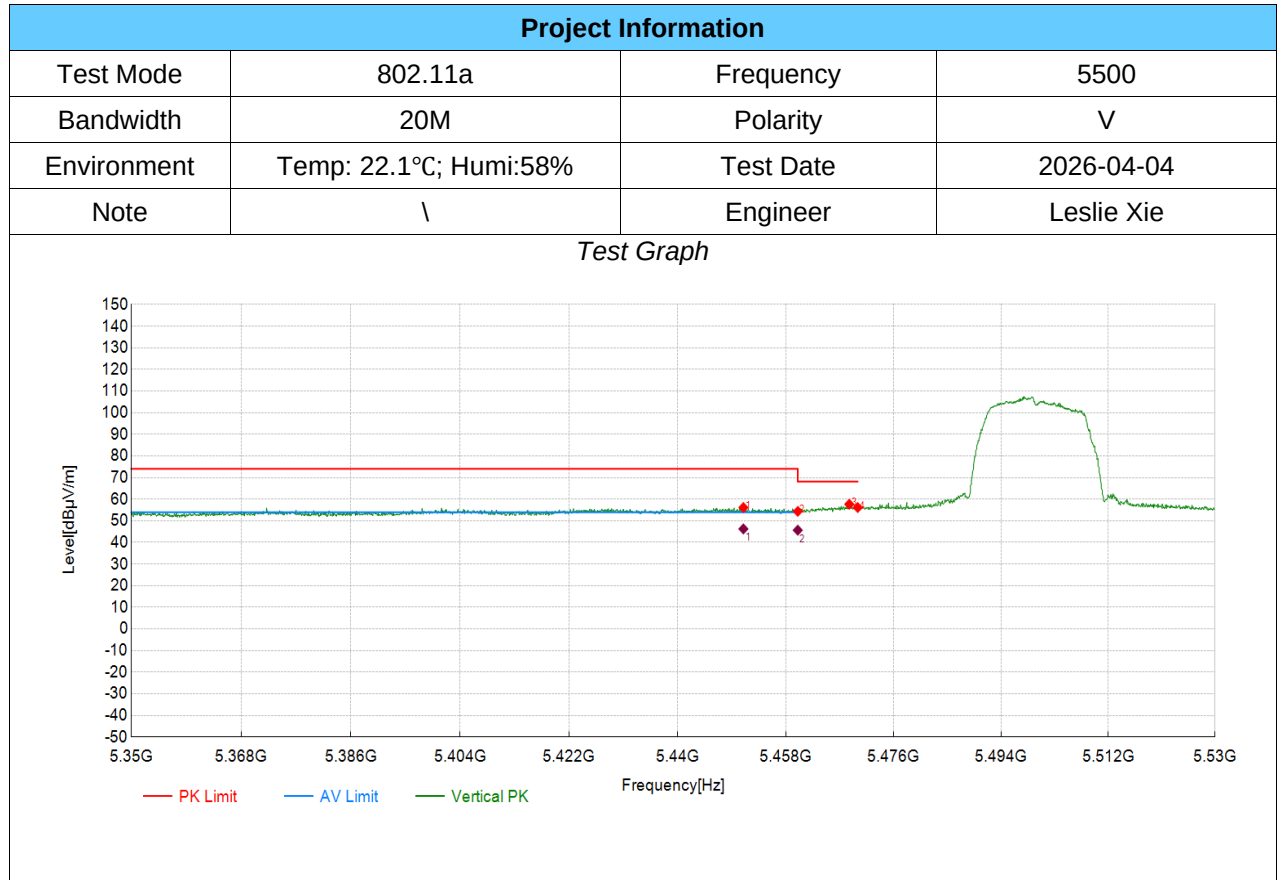


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5450.94	40.08	56.14	16.06	74.00	17.86	PK	Vertical	PASS
2	5460.00	38.15	54.39	16.24	74.00	19.61	PK	Vertical	PASS
3	5468.59	41.28	57.68	16.40	68.20	10.52	PK	Vertical	PASS
4	5470.00	39.71	56.15	16.44	68.20	12.05	PK	Vertical	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	5450.94	16.06	30.20	46.26	54.00	7.74	Vertical	PASS
2	5460.00	16.24	29.43	45.67	54.00	8.33	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level


TX Radiated Test Result

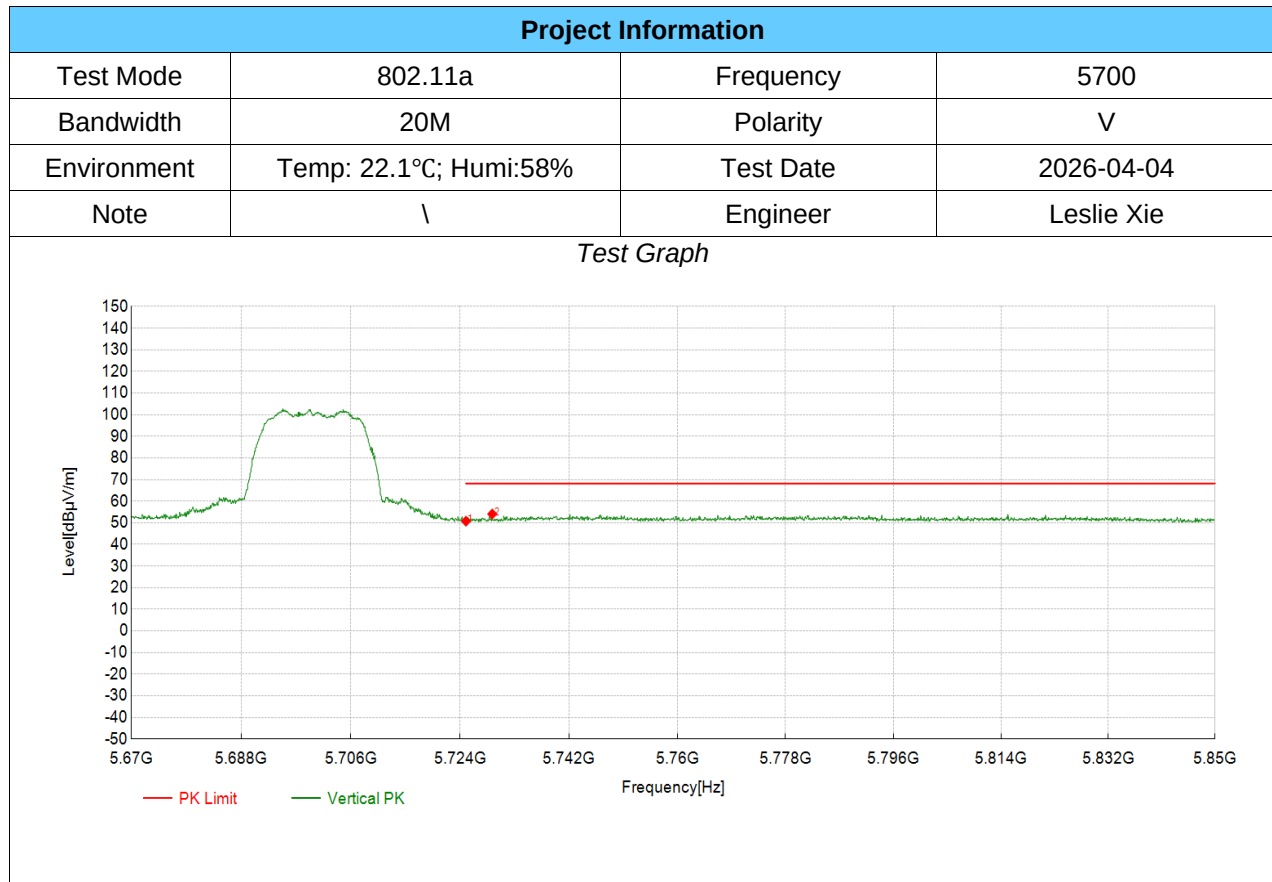

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	38.13	50.75	12.62	68.20	17.45	PK	Vertical	PASS
2	5729.34	41.44	54.07	12.63	68.20	14.13	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level


TX Radiated Test Result

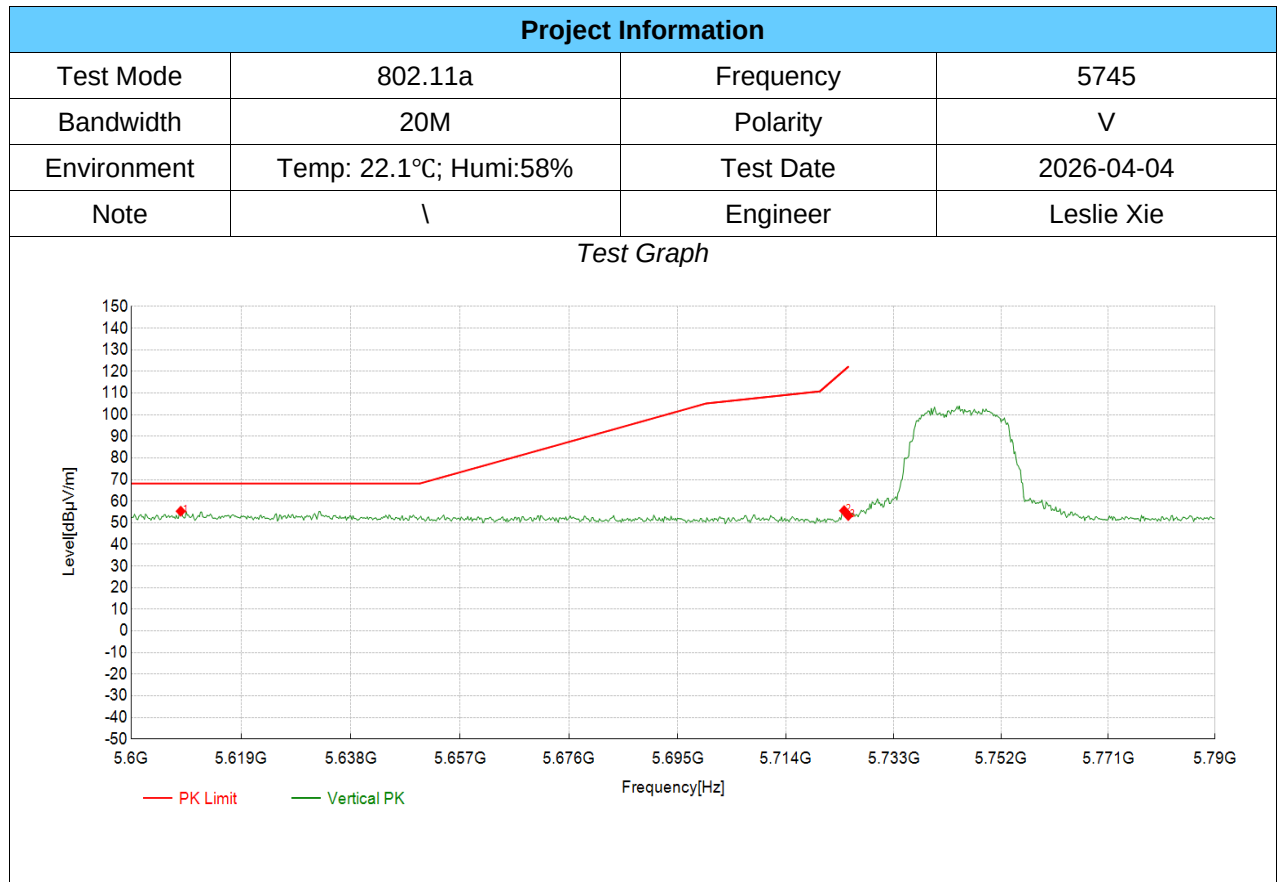

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5608.55	39.91	55.36	15.45	68.20	12.84	PK	Vertical	PASS
2	5724.26	41.42	55.63	14.21	120.51	64.88	PK	Vertical	PASS
3	5725.00	39.13	53.35	14.22	122.20	68.85	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

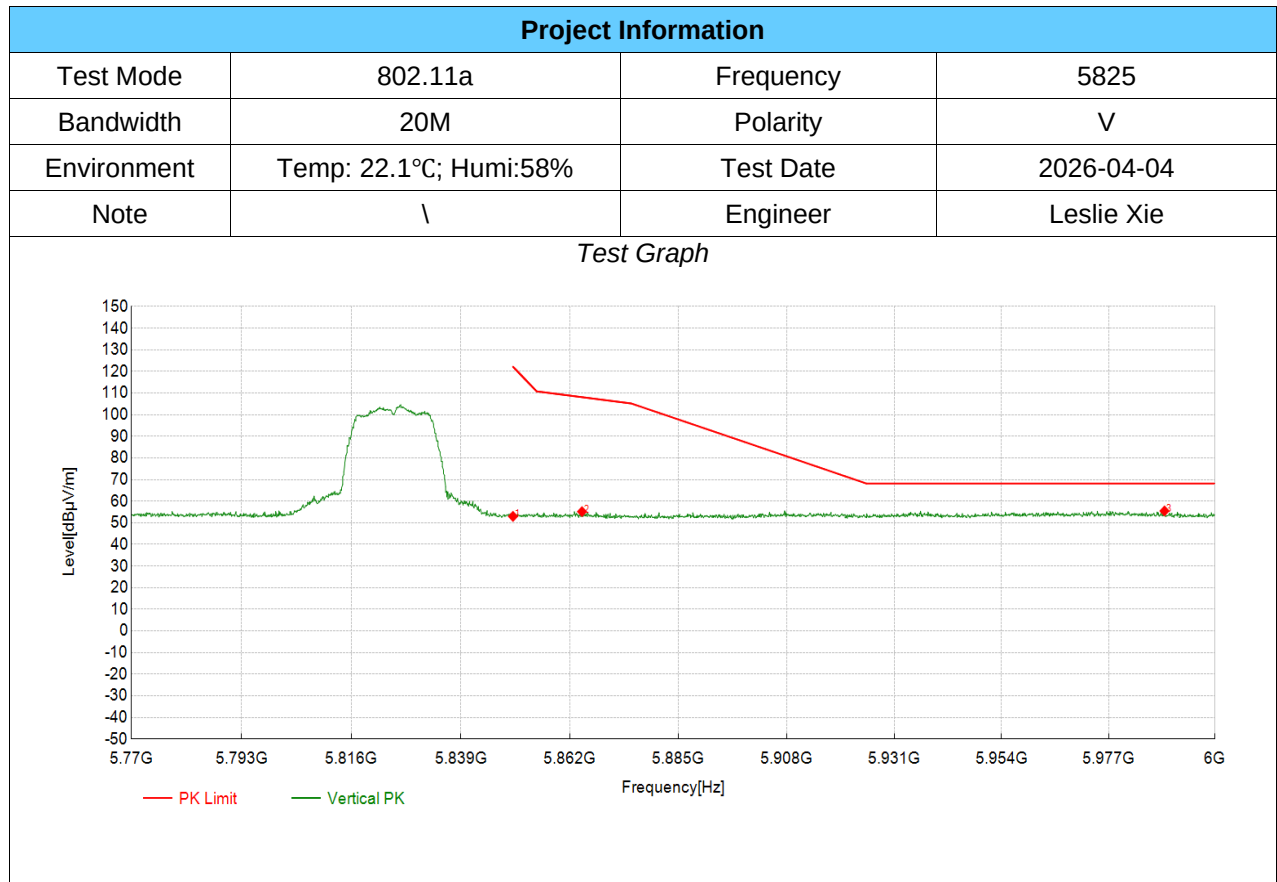

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5850.00	38.62	52.98	14.36	122.20	69.22	PK	Vertical	PASS
2	5864.58	40.85	55.19	14.34	108.12	52.93	PK	Vertical	PASS
3	5989.07	40.73	55.49	14.76	68.20	12.71	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

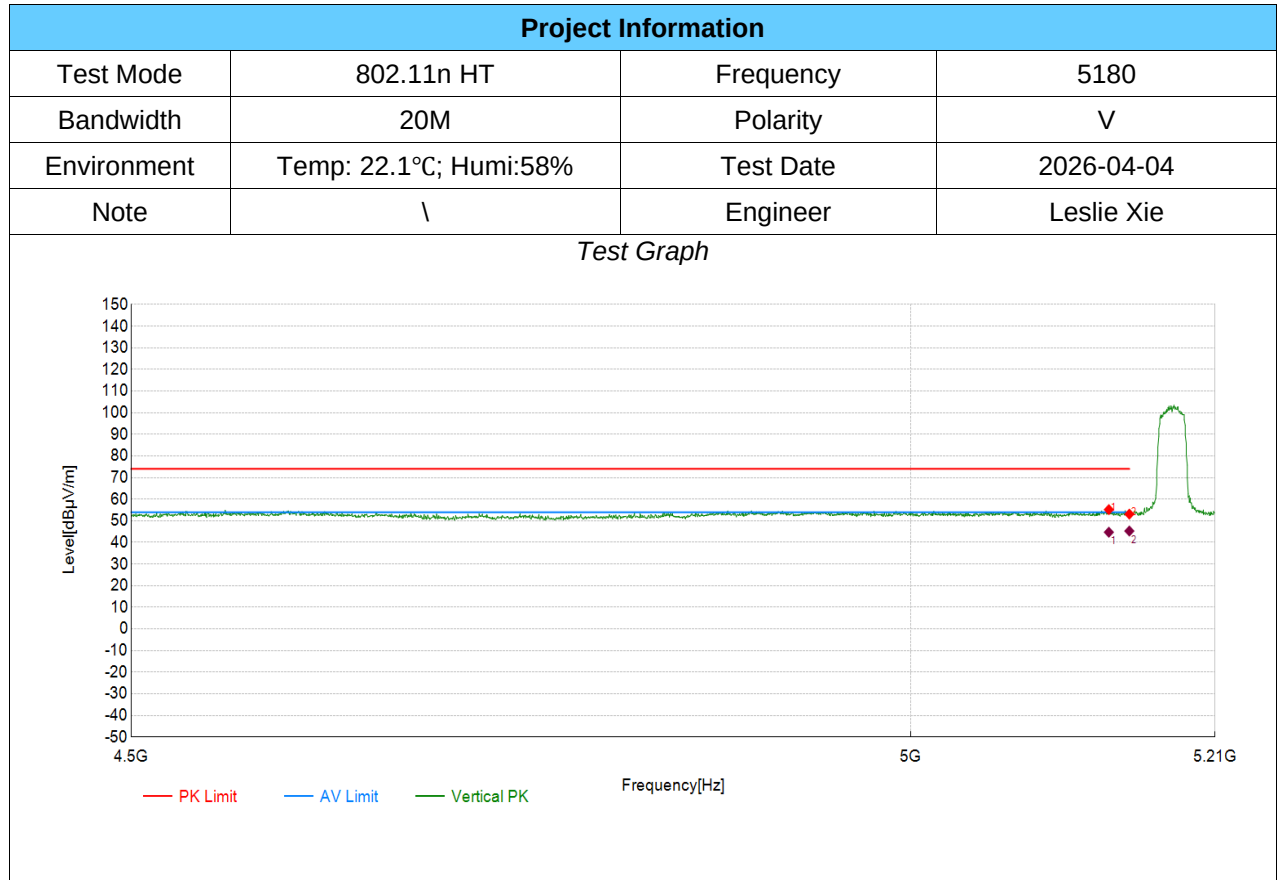

PEAK Data List


NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5135.77	41.91	55.18	13.27	74.00	18.82	PK	Vertical	PASS
2	5150.00	39.76	53.09	13.33	74.00	20.91	PK	Vertical	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	5135.77	13.27	31.45	44.72	54.00	9.28	Vertical	PASS
2	5150.00	13.32	31.97	45.29	54.00	8.71	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

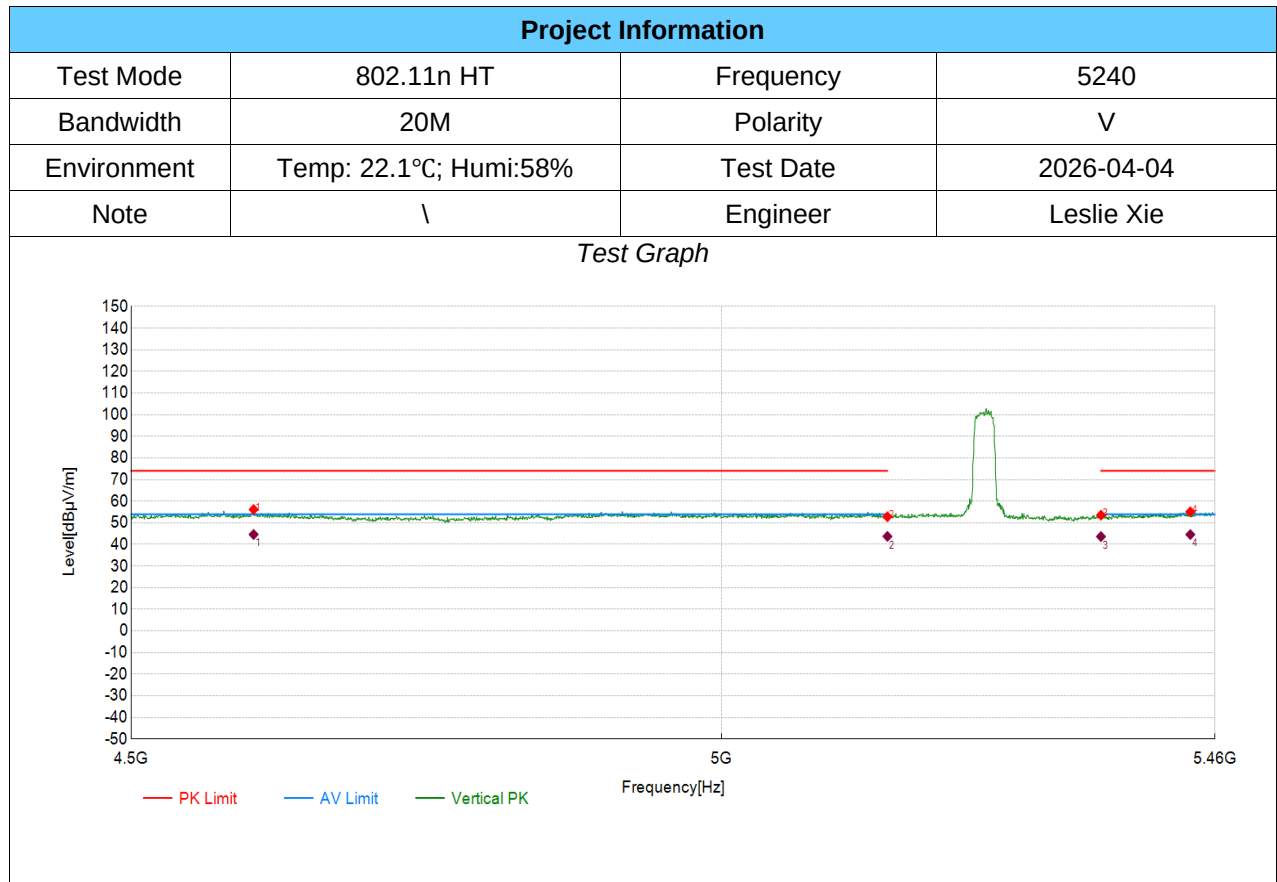

PEAK Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4599.41	41.92	56.15	14.23	74.00	17.85	PK	Vertical	PASS
2	5150.00	39.47	52.80	13.33	74.00	21.20	PK	Vertical	PASS
3	5350.00	39.23	53.55	14.32	74.00	20.45	PK	Vertical	PASS
4	5435.99	39.30	55.08	15.78	74.00	18.92	PK	Vertical	PASS


AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	4599.41	14.23	30.37	44.60	54.00	9.40	Vertical	PASS
2	5150.00	13.32	30.41	43.73	54.00	10.27	Vertical	PASS
3	5350.00	14.32	29.32	43.64	54.00	10.36	Vertical	PASS
4	5435.99	15.78	28.79	44.57	54.00	9.43	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

TX Radiated Test Result

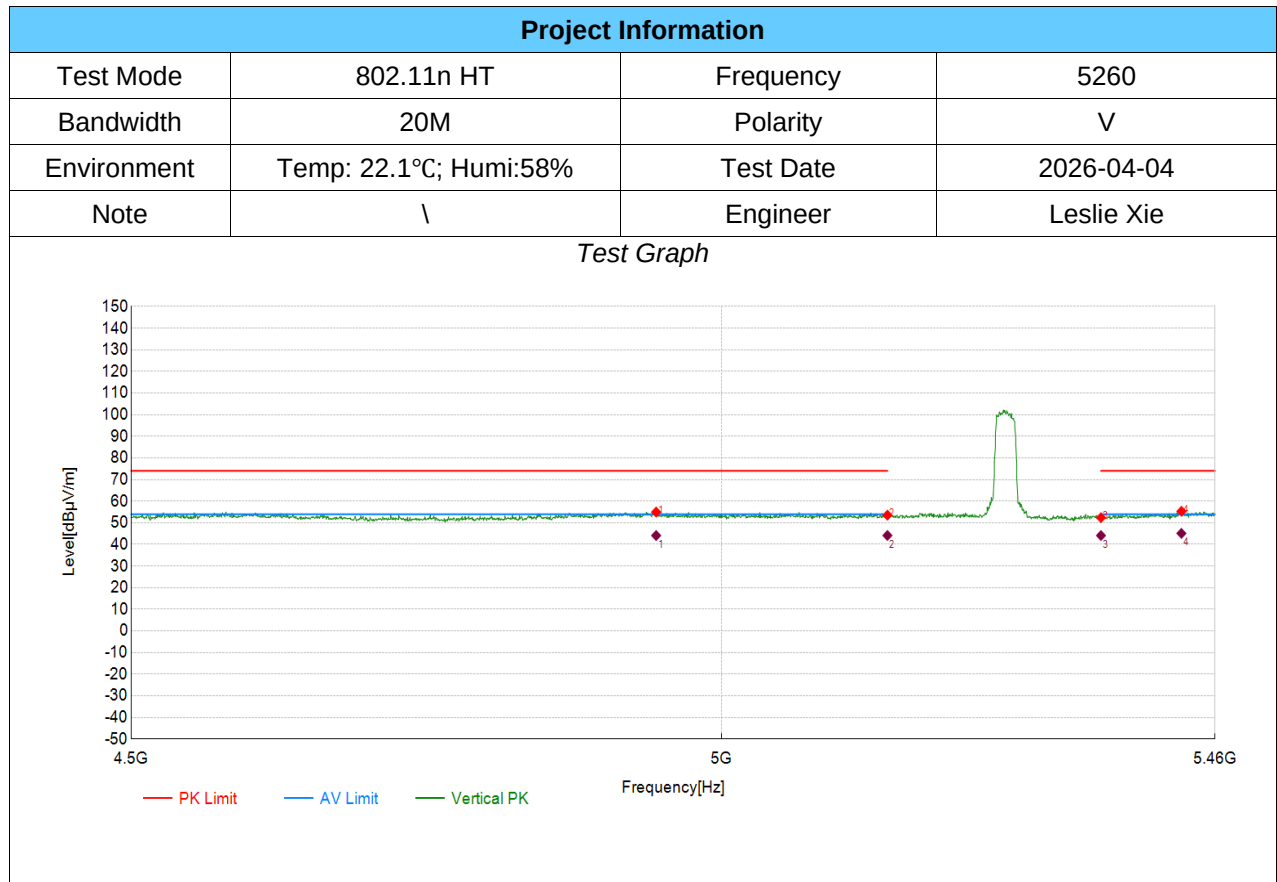


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4941.82	41.37	54.98	13.61	74.00	19.02	PK	Vertical	PASS
2	5150.00	40.21	53.54	13.33	74.00	20.46	PK	Vertical	PASS
3	5350.00	38.08	52.40	14.32	74.00	21.60	PK	Vertical	PASS
4	5427.34	39.74	55.35	15.61	74.00	18.65	PK	Vertical	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	4941.82	13.61	30.51	44.12	54.00	9.88	Vertical	PASS
2	5150.00	13.32	30.83	44.15	54.00	9.85	Vertical	PASS
3	5350.00	14.32	29.79	44.11	54.00	9.89	Vertical	PASS
4	5427.34	15.61	29.51	45.12	54.00	8.88	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

TX Radiated Test Result

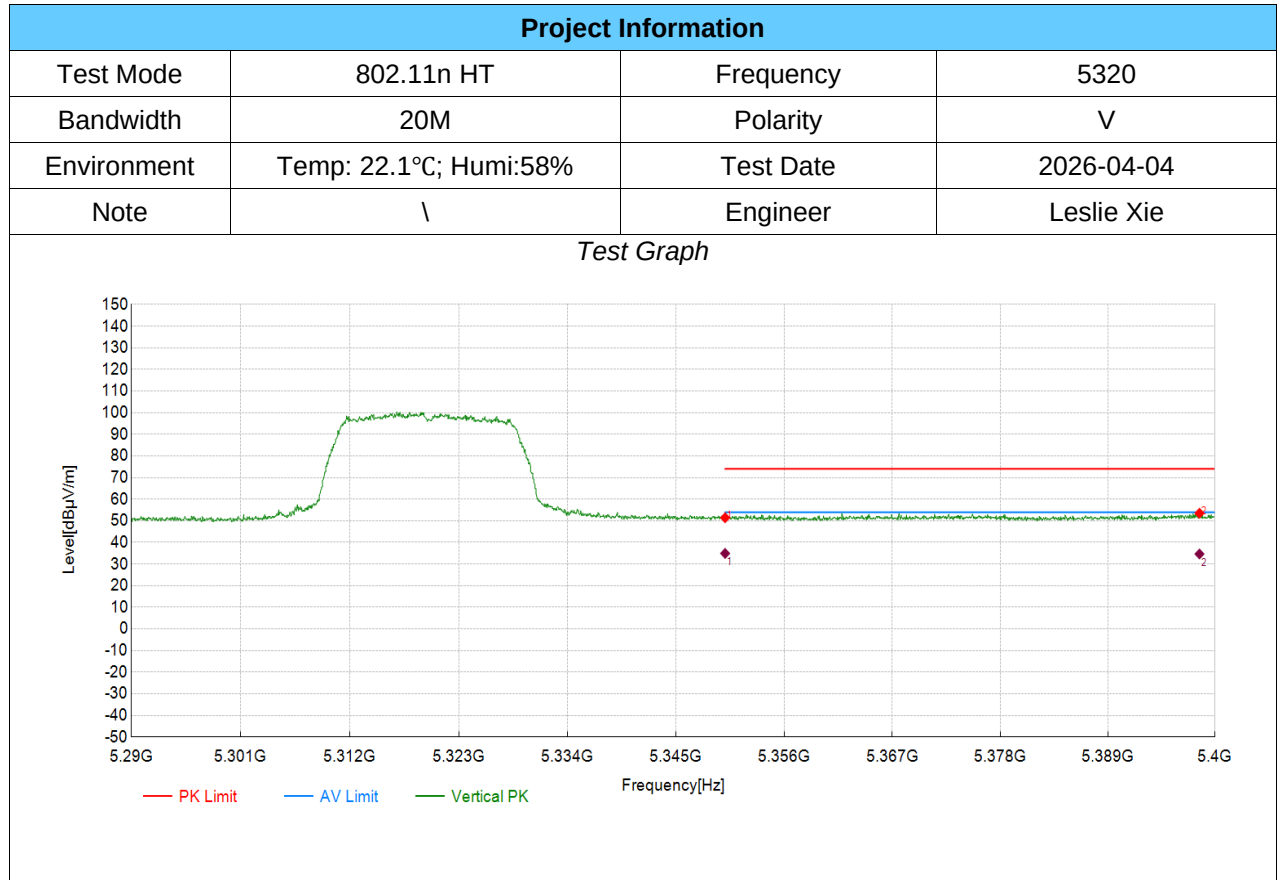

PEAK Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	38.71	51.43	12.72	74.00	22.57	PK	Vertical	PASS
2	5398.40	40.05	53.51	13.46	74.00	20.49	PK	Vertical	PASS


AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	5350.00	12.72	22.20	34.92	54.00	19.08	Vertical	PASS
2	5398.40	13.46	21.21	34.67	54.00	19.33	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

TX Radiated Test Result

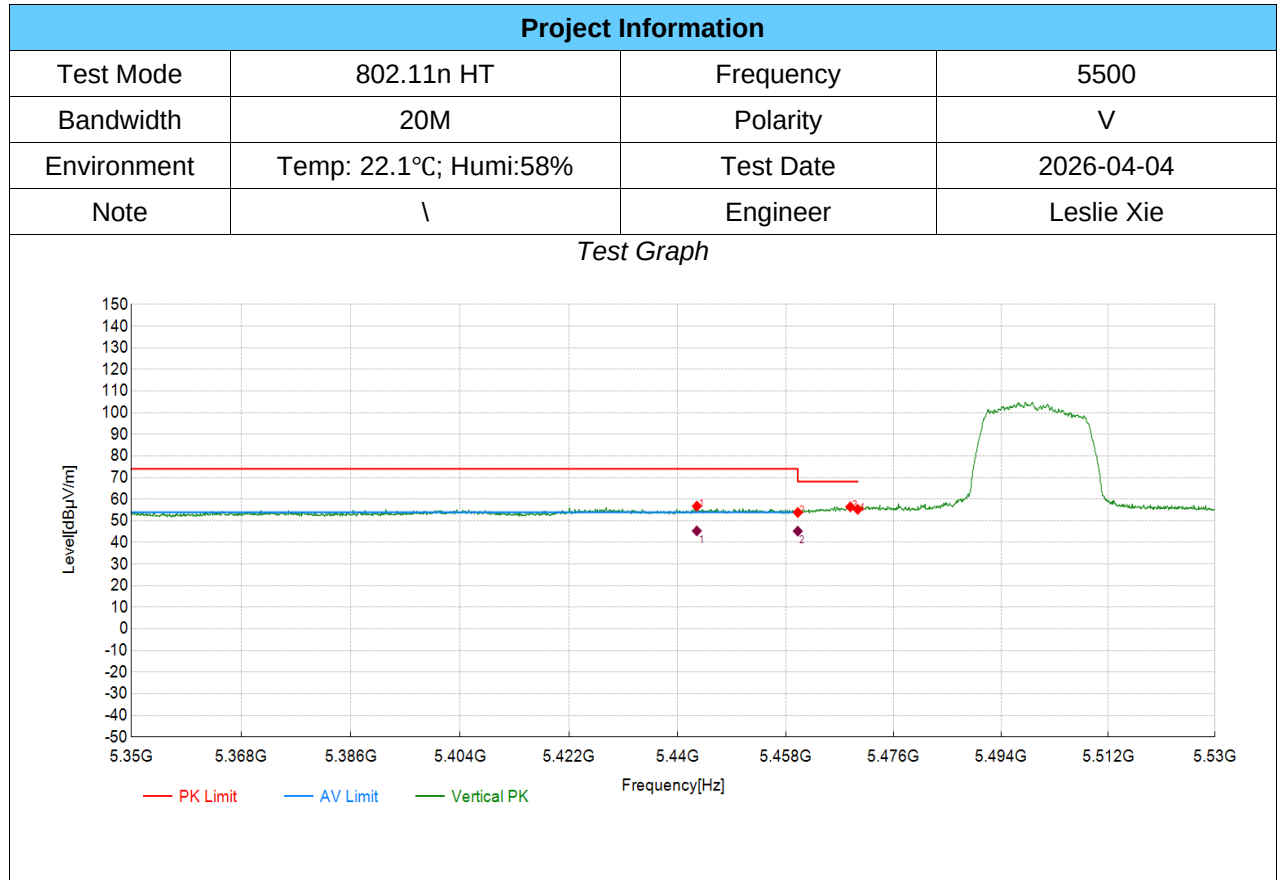


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5443.20	40.89	56.80	15.91	74.00	17.20	PK	Vertical	PASS
2	5460.00	37.62	53.86	16.24	74.00	20.14	PK	Vertical	PASS
3	5468.77	40.06	56.47	16.41	68.20	11.73	PK	Vertical	PASS
4	5470.00	38.85	55.29	16.44	68.20	12.91	PK	Vertical	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	5443.20	15.91	29.41	45.32	54.00	8.68	Vertical	PASS
2	5460.00	16.24	28.98	45.22	54.00	8.78	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

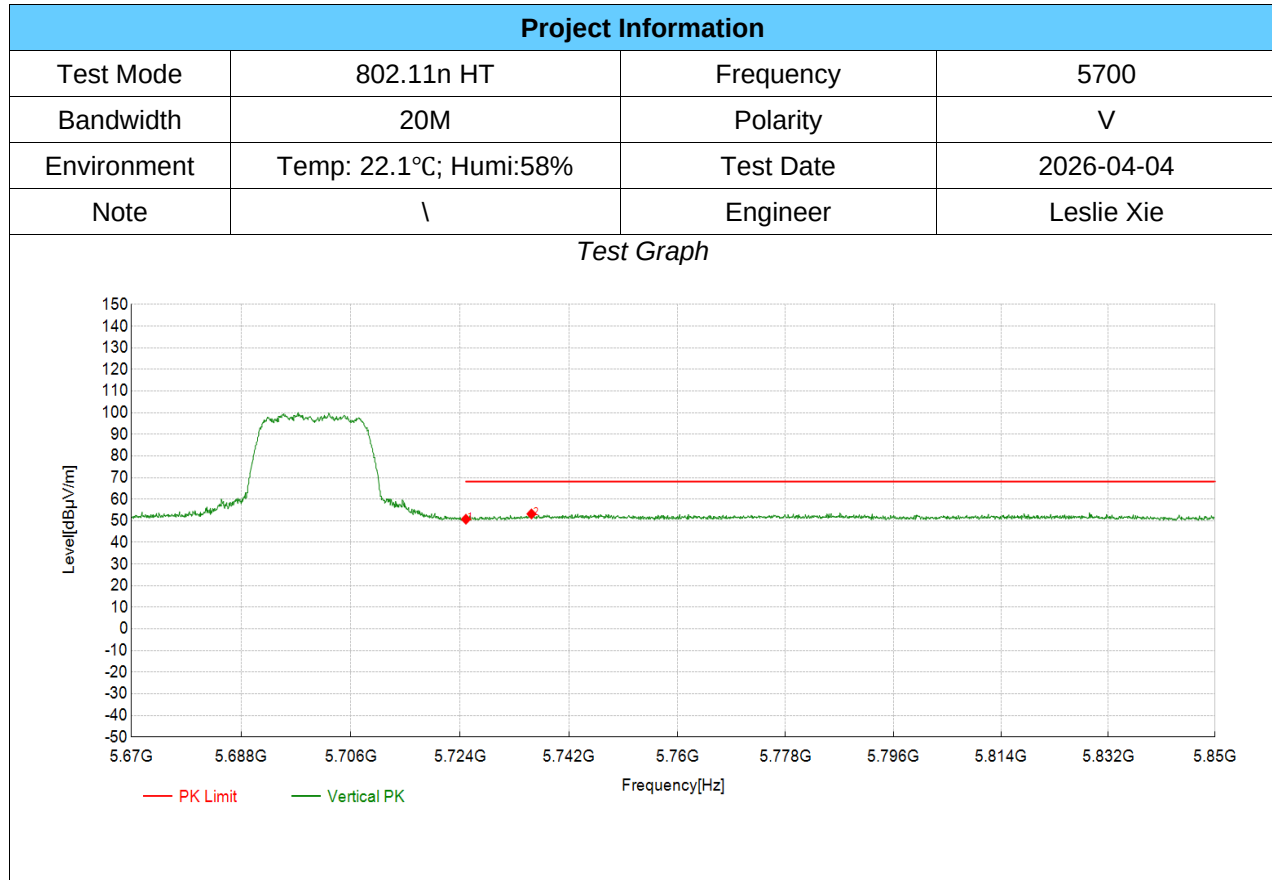

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	38.12	50.74	12.62	68.20	17.46	PK	Vertical	PASS
2	5735.82	40.55	53.20	12.65	68.20	15.00	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level


TX Radiated Test Result

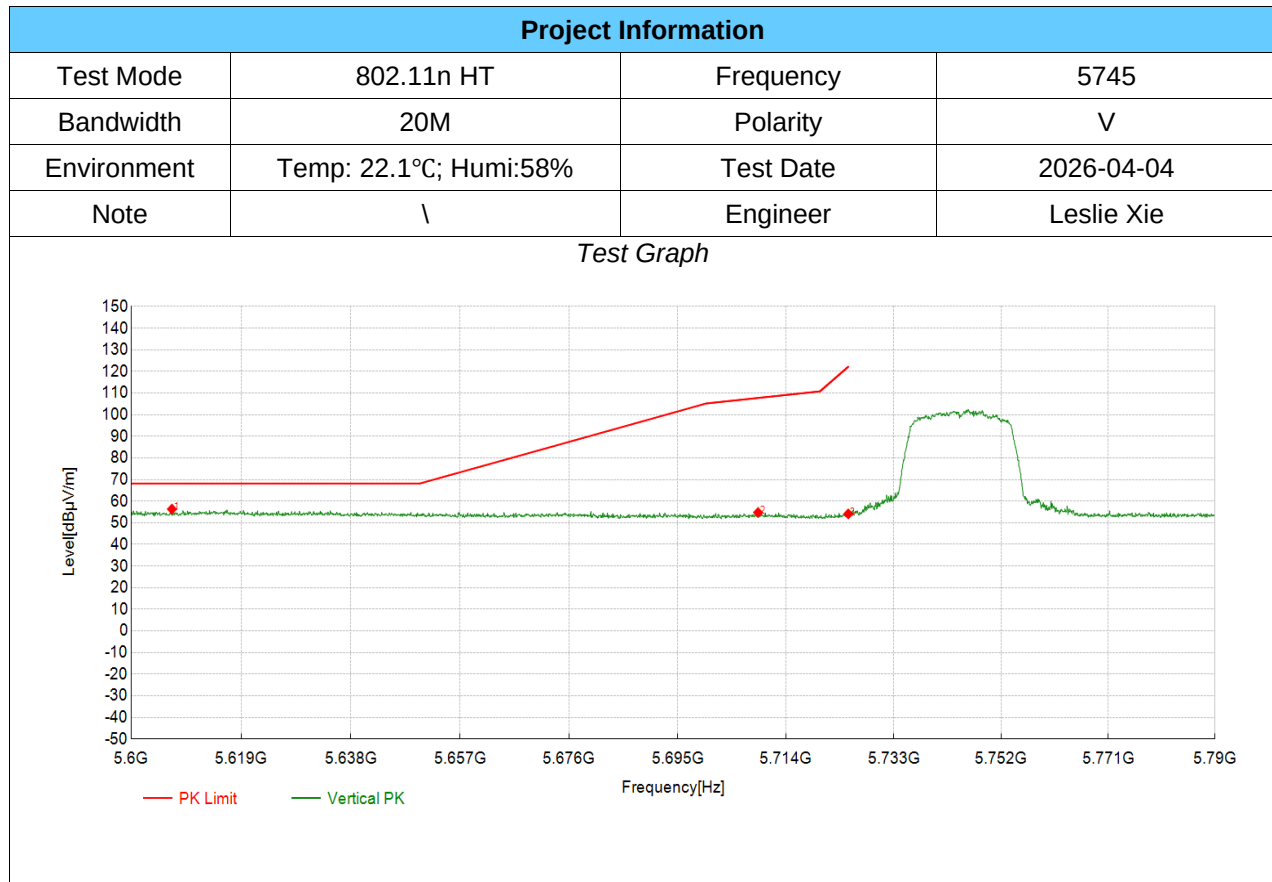

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5607.03	40.86	56.34	15.48	68.20	11.86	PK	Vertical	PASS
2	5709.11	40.59	54.76	14.17	107.75	52.99	PK	Vertical	PASS
3	5725.00	39.90	54.12	14.22	122.20	68.08	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

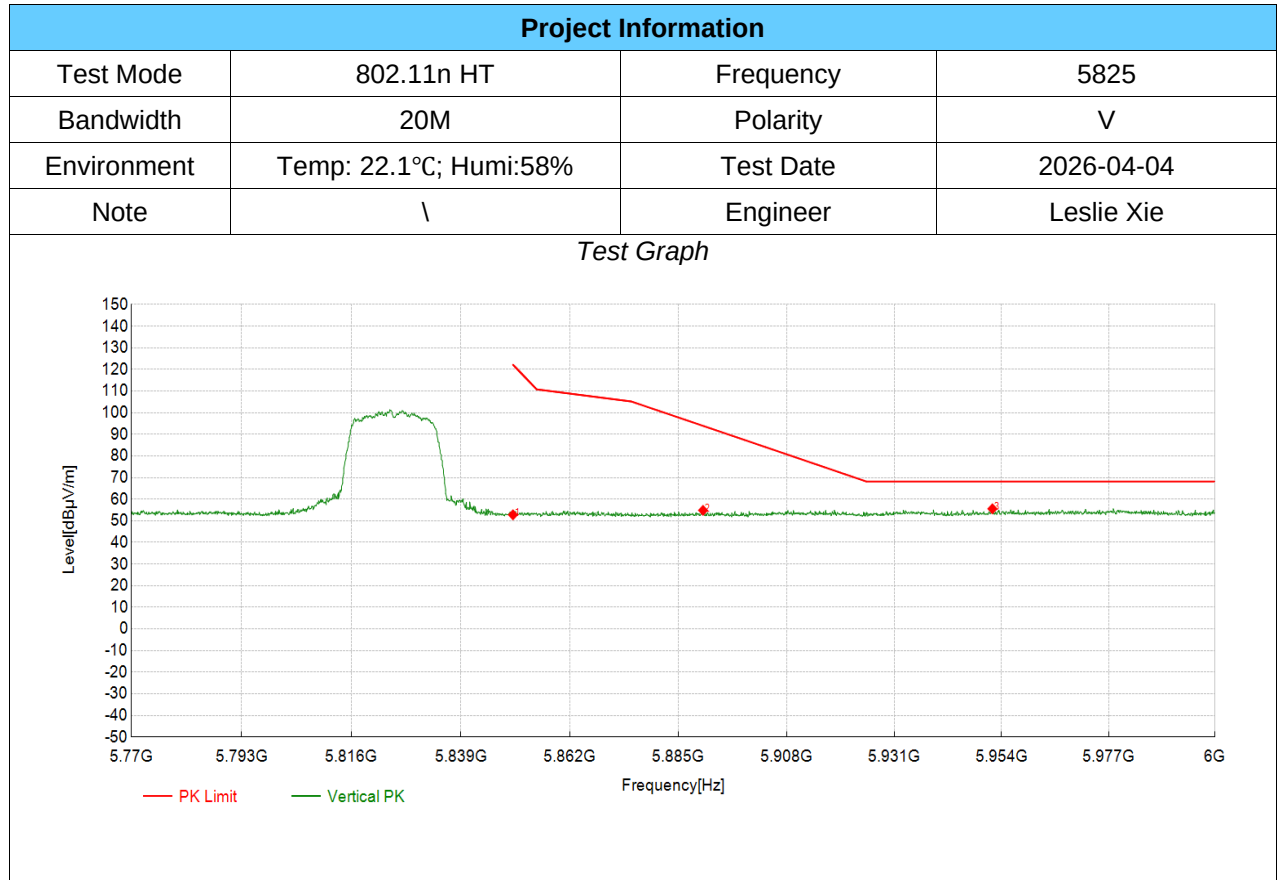

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5850.00	38.41	52.77	14.36	122.20	69.43	PK	Vertical	PASS
2	5890.24	40.53	54.83	14.30	93.93	39.10	PK	Vertical	PASS
3	5952.02	41.01	55.57	14.56	68.20	12.63	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

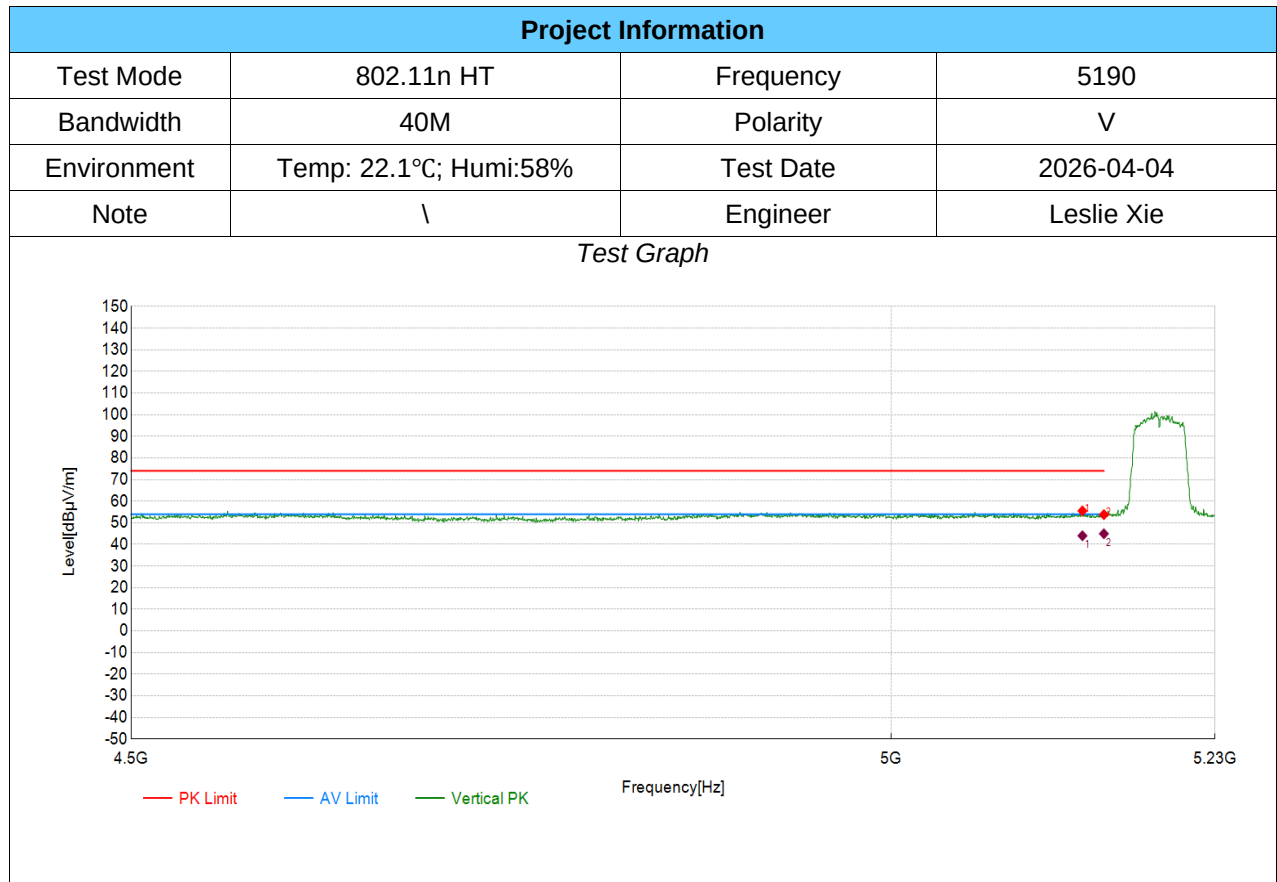

PEAK Data List


NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5134.69	42.25	55.52	13.27	74.00	18.48	PK	Vertical	PASS
2	5150.00	40.45	53.78	13.33	74.00	20.22	PK	Vertical	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	5134.69	13.27	30.73	44.00	54.00	10.00	Vertical	PASS
2	5150.00	13.32	31.62	44.94	54.00	9.06	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

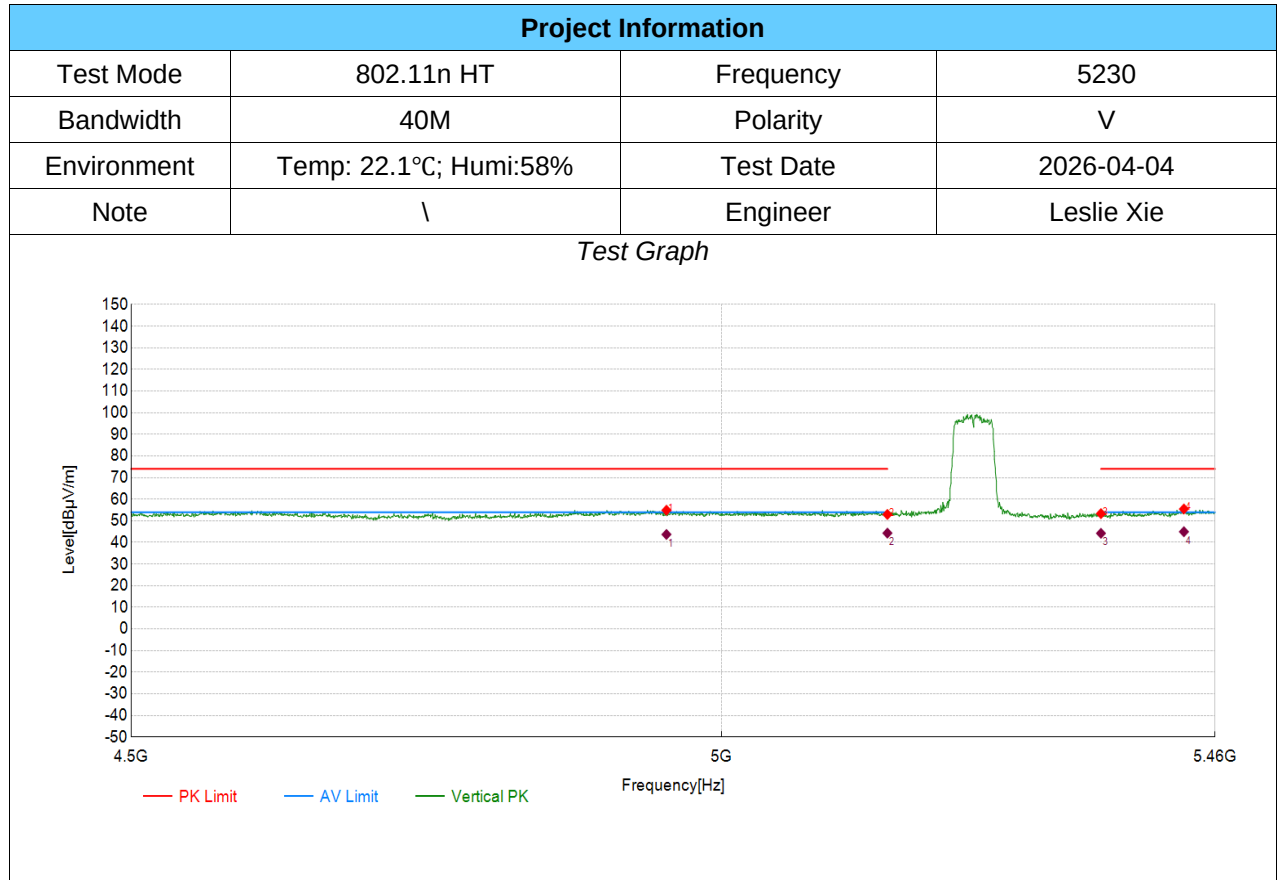

PEAK Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4950.95	41.38	54.92	13.54	74.00	19.08	PK	Vertical	PASS
2	5150.00	39.62	52.95	13.33	74.00	21.05	PK	Vertical	PASS
3	5350.00	39.00	53.32	14.32	74.00	20.68	PK	Vertical	PASS
4	5429.74	39.82	55.47	15.65	74.00	18.53	PK	Vertical	PASS


AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	4950.95	13.54	30.16	43.70	54.00	10.30	Vertical	PASS
2	5150.00	13.32	31.00	44.32	54.00	9.68	Vertical	PASS
3	5350.00	14.32	29.90	44.22	54.00	9.78	Vertical	PASS
4	5429.74	15.65	29.31	44.96	54.00	9.04	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

TX Radiated Test Result

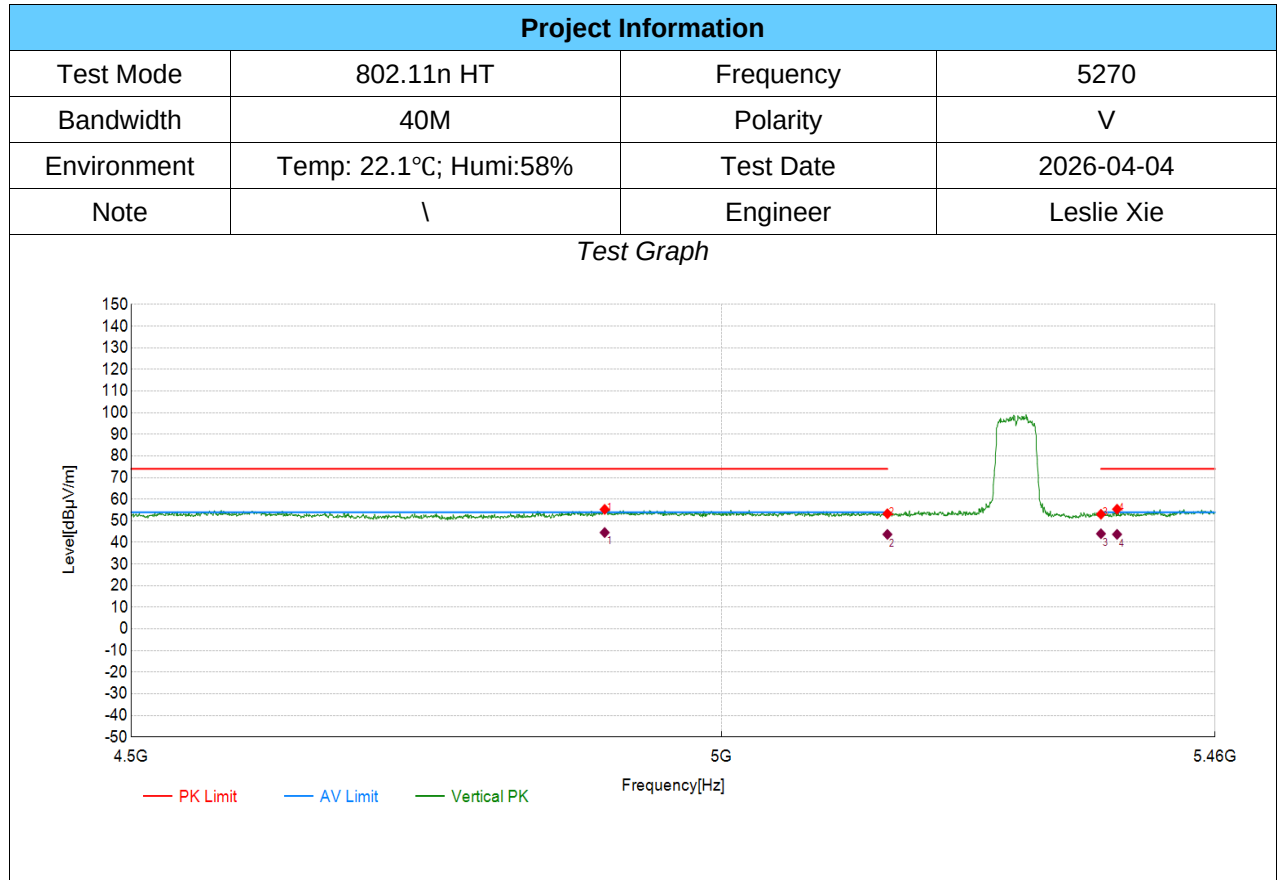

PEAK Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4896.68	41.36	55.28	13.92	74.00	18.72	PK	Vertical	PASS
2	5150.00	39.94	53.27	13.33	74.00	20.73	PK	Vertical	PASS
3	5350.00	38.73	53.05	14.32	74.00	20.95	PK	Vertical	PASS
4	5365.39	40.83	55.38	14.55	74.00	18.62	PK	Vertical	PASS


AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	4896.68	13.92	30.65	44.57	54.00	9.43	Vertical	PASS
2	5150.00	13.32	30.41	43.73	54.00	10.27	Vertical	PASS
3	5350.00	14.32	29.69	44.01	54.00	9.99	Vertical	PASS
4	5365.39	14.55	29.20	43.75	54.00	10.25	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

TX Radiated Test Result

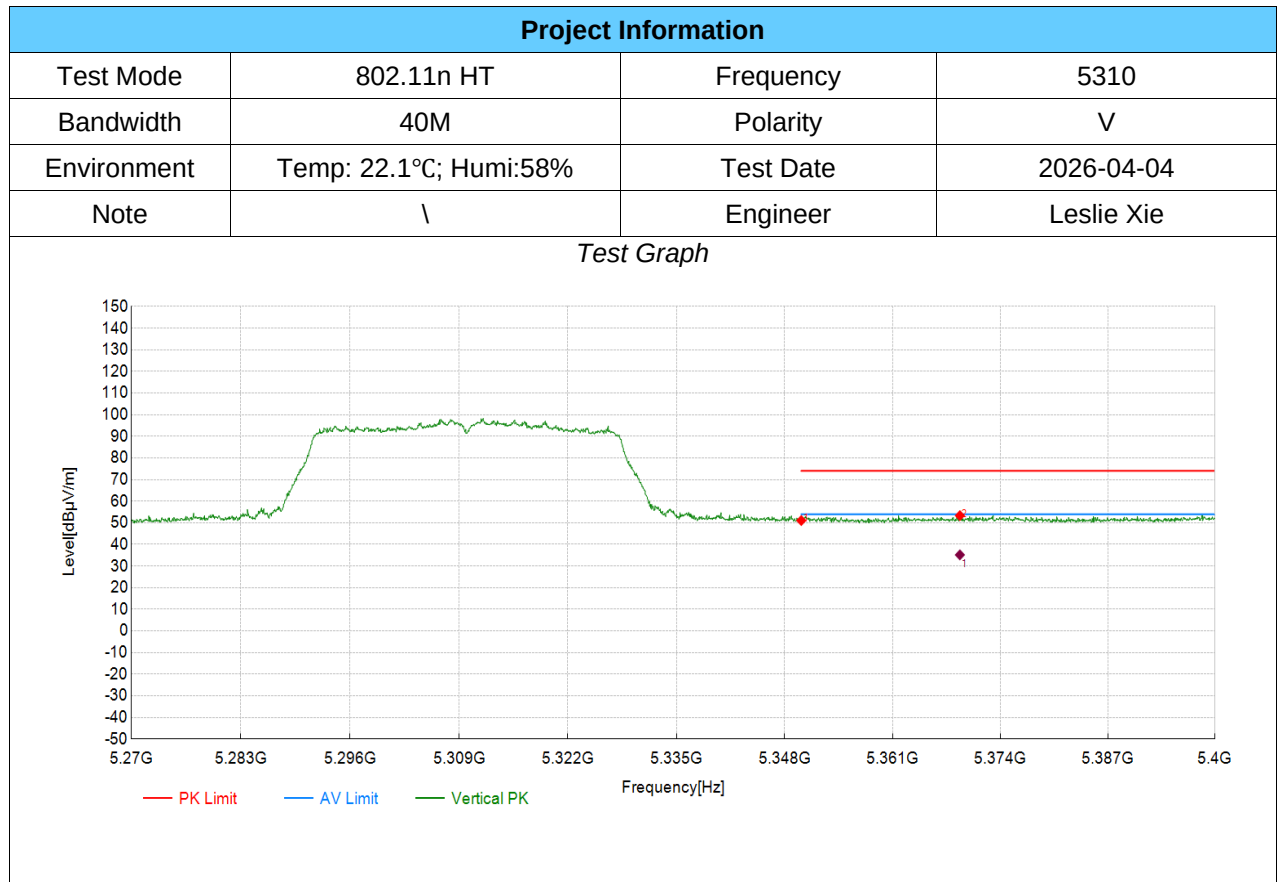

PEAK Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	38.36	51.08	12.72	74.00	22.92	PK	Vertical	PASS
2	5369.11	40.32	53.34	13.02	74.00	20.66	PK	Vertical	PASS


AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	5369.11	13.02	22.16	35.18	54.00	18.82	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

TX Radiated Test Result

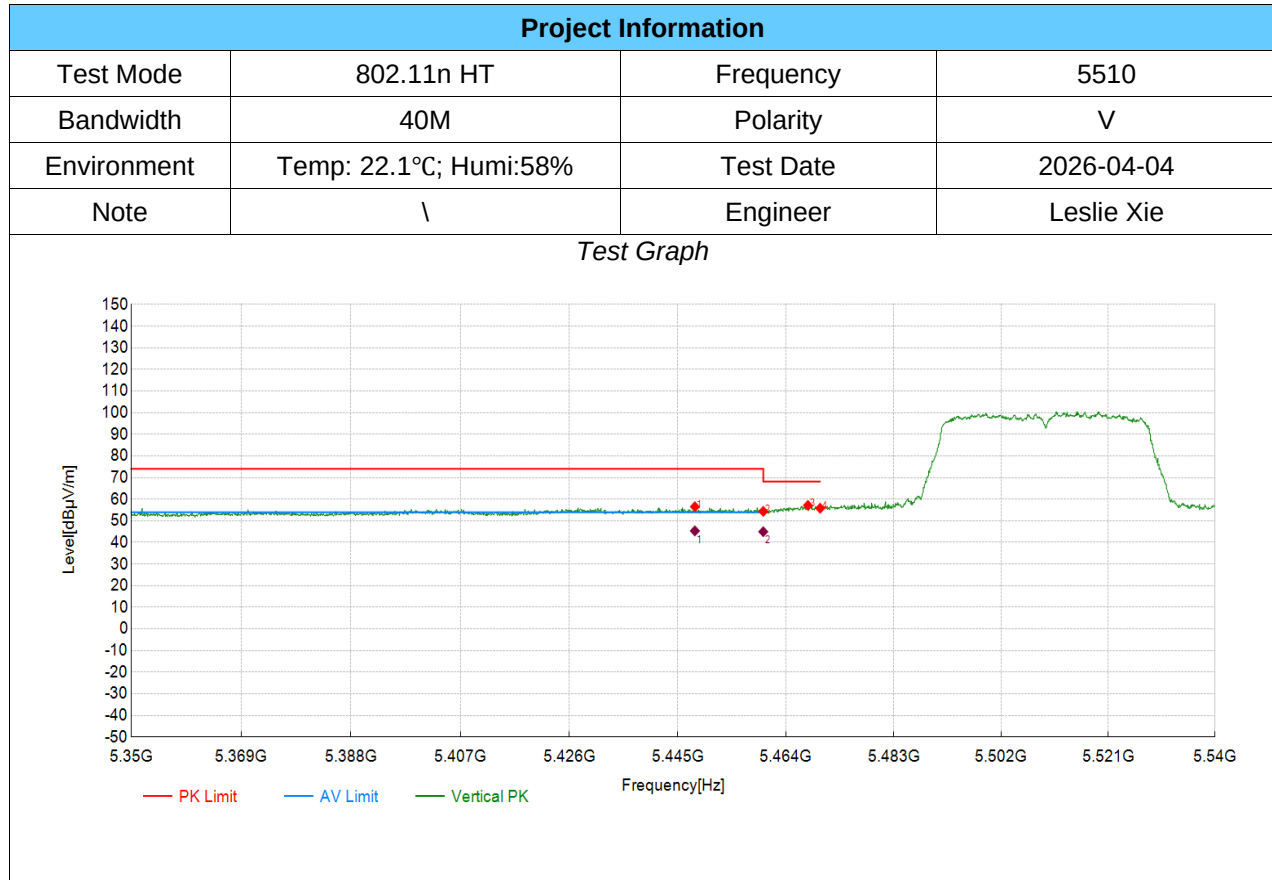

PEAK Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5447.99	40.51	56.52	16.01	74.00	17.48	PK	Vertical	PASS
2	5460.00	38.14	54.38	16.24	74.00	19.62	PK	Vertical	PASS
3	5467.86	40.76	57.15	16.39	68.20	11.05	PK	Vertical	PASS
4	5470.00	39.39	55.83	16.44	68.20	12.37	PK	Vertical	PASS


AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	5447.99	16.01	29.33	45.34	54.00	8.66	Vertical	PASS
2	5460.00	16.24	28.73	44.97	54.00	9.03	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level


TX Radiated Test Result

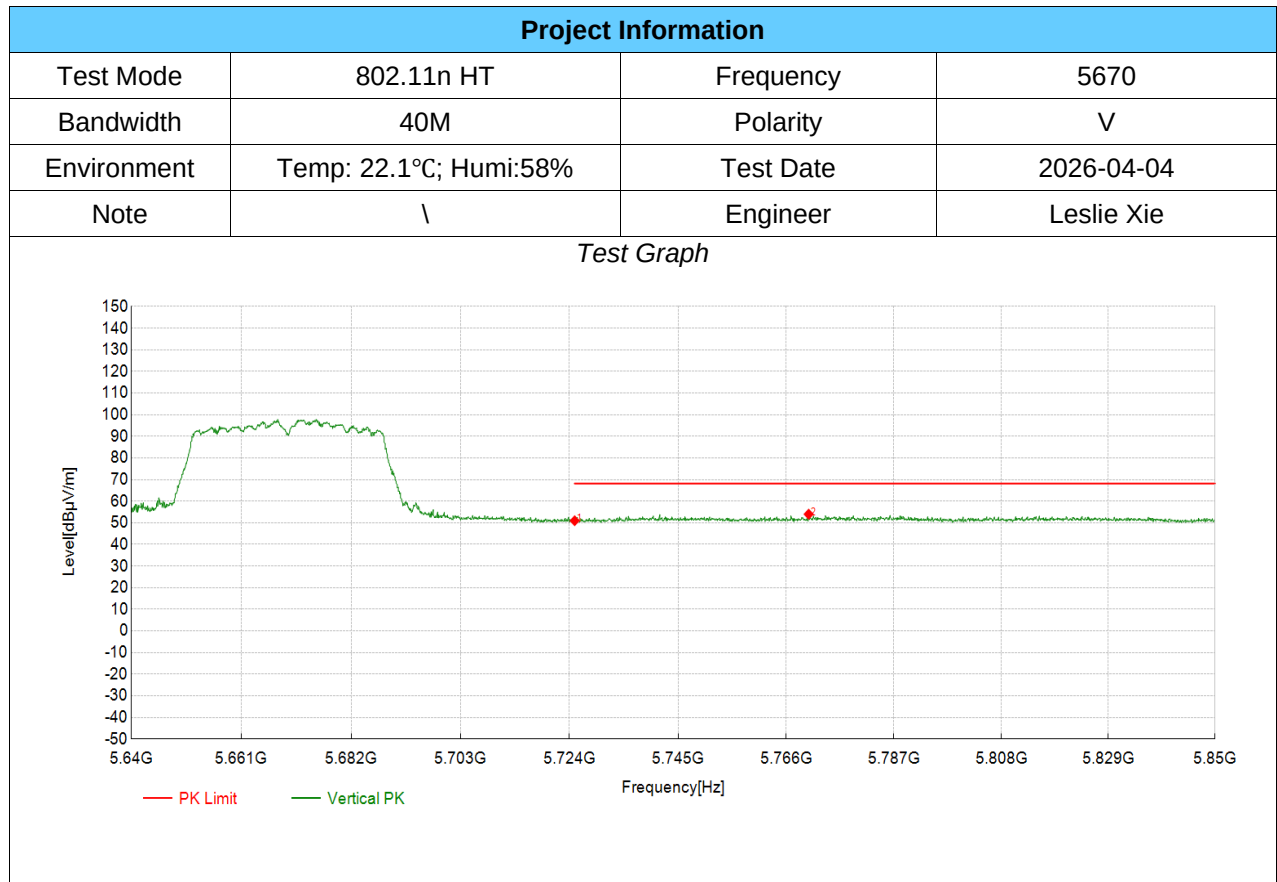

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	38.36	50.98	12.62	68.20	17.22	PK	Vertical	PASS
2	5770.37	41.23	53.99	12.76	68.20	14.21	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level


TX Radiated Test Result

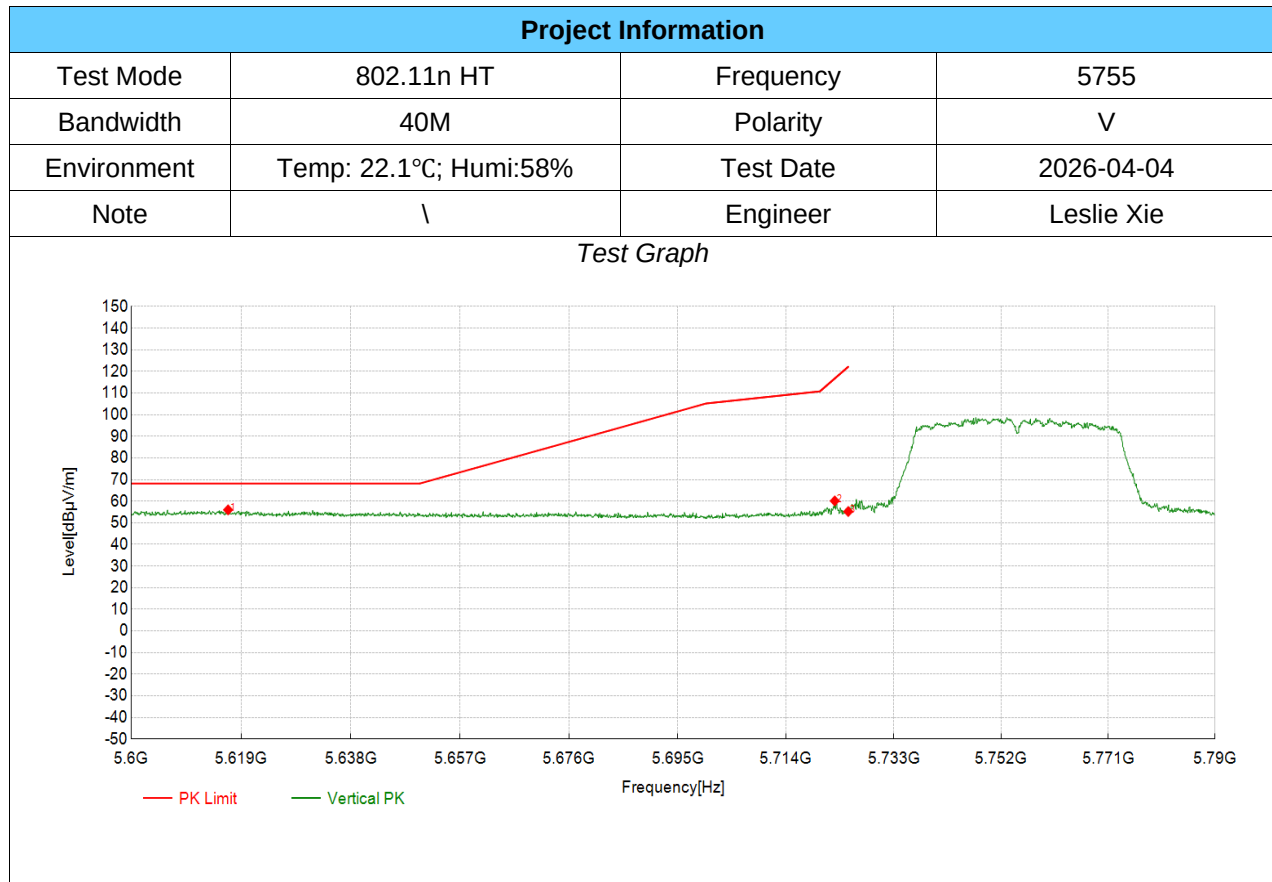

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5616.73	40.65	55.99	15.34	68.20	12.21	PK	Vertical	PASS
2	5722.61	45.94	60.15	14.21	116.75	56.60	PK	Vertical	PASS
3	5725.00	41.01	55.23	14.22	122.20	66.97	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

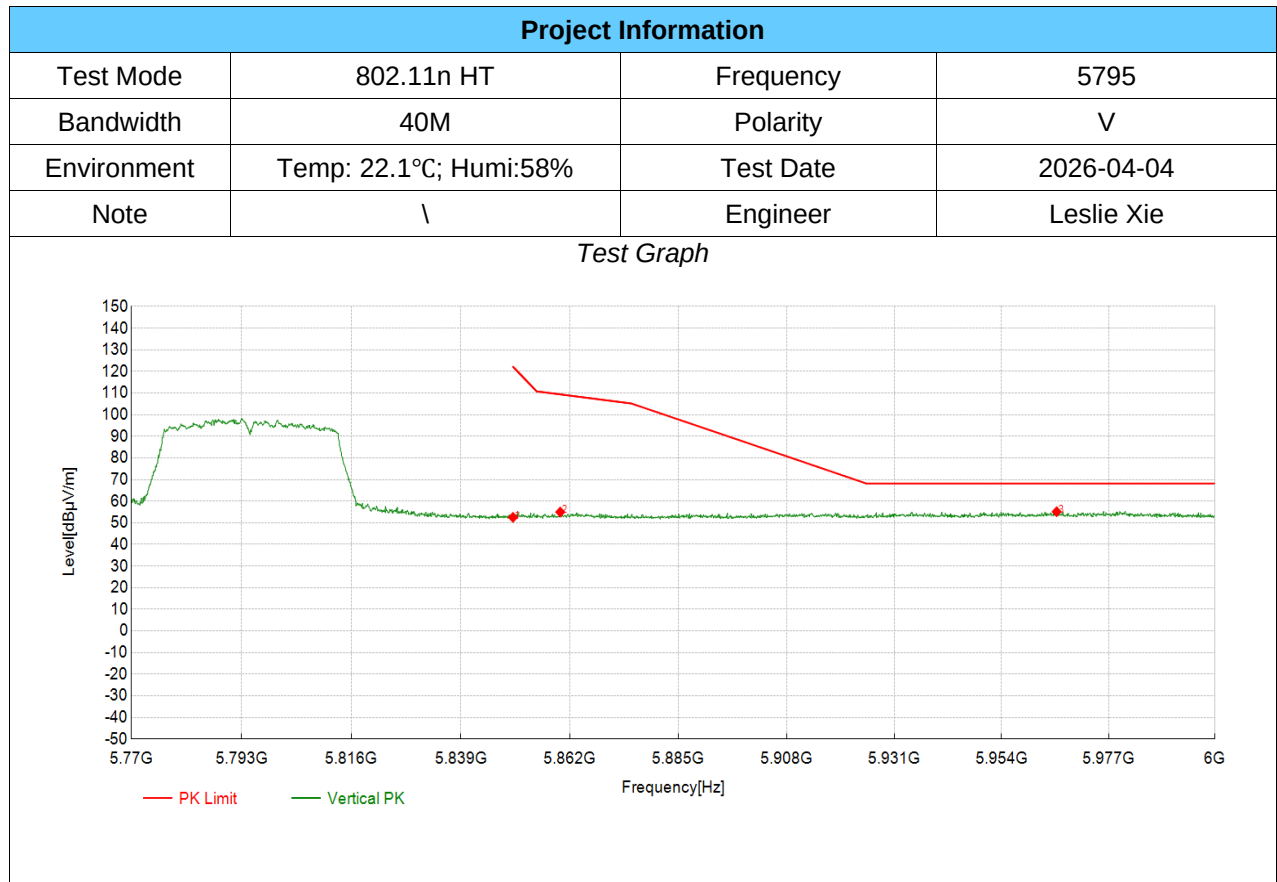

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5850.00	38.17	52.53	14.36	122.20	69.67	PK	Vertical	PASS
2	5859.97	40.65	54.99	14.34	109.41	54.42	PK	Vertical	PASS
3	5965.83	40.52	55.15	14.63	68.20	13.05	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

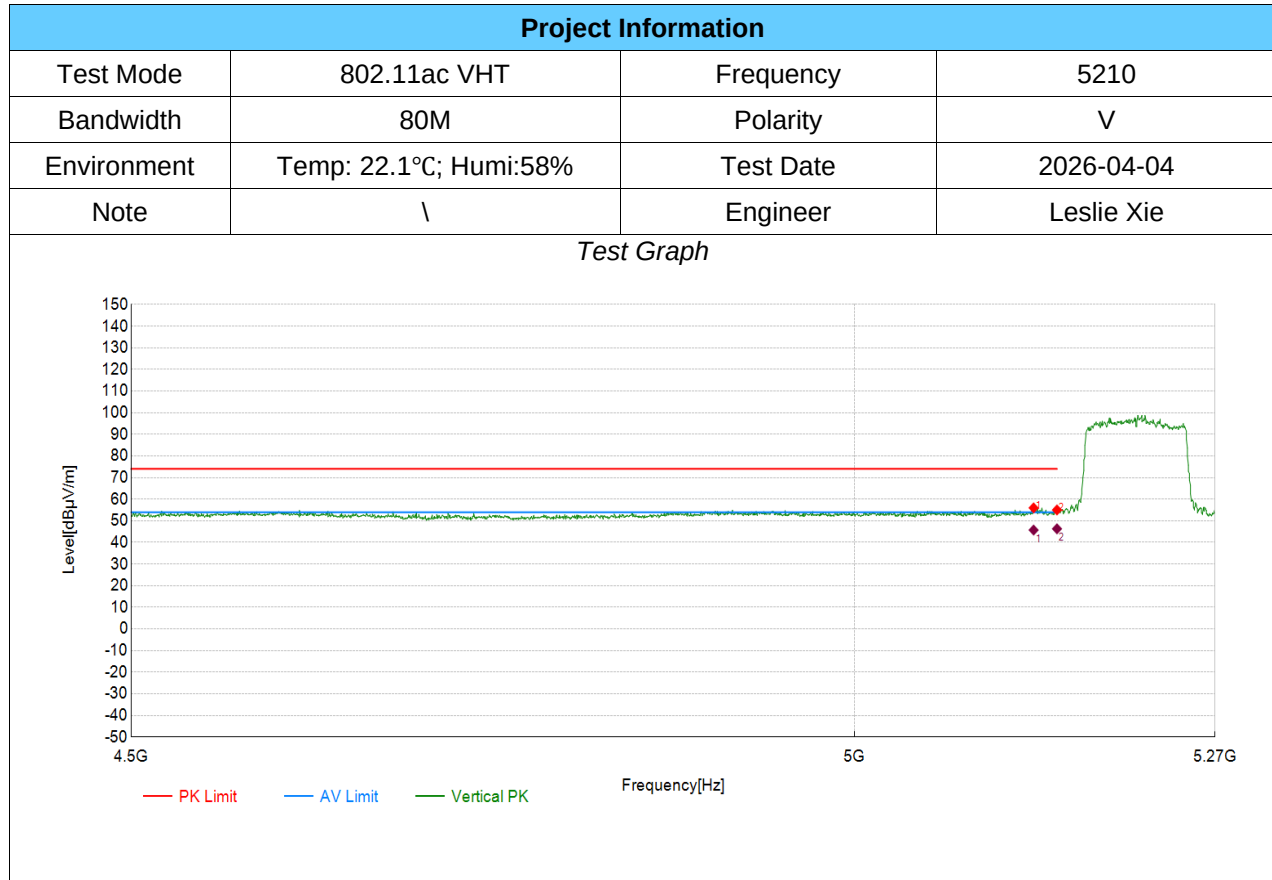

PEAK Data List


NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5132.49	42.72	55.98	13.26	74.00	18.02	PK	Vertical	PASS
2	5150.00	41.71	55.04	13.33	74.00	18.96	PK	Vertical	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	5132.49	13.26	32.48	45.74	54.00	8.26	Vertical	PASS
2	5150.00	13.32	32.97	46.29	54.00	7.71	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

TX Radiated Test Result

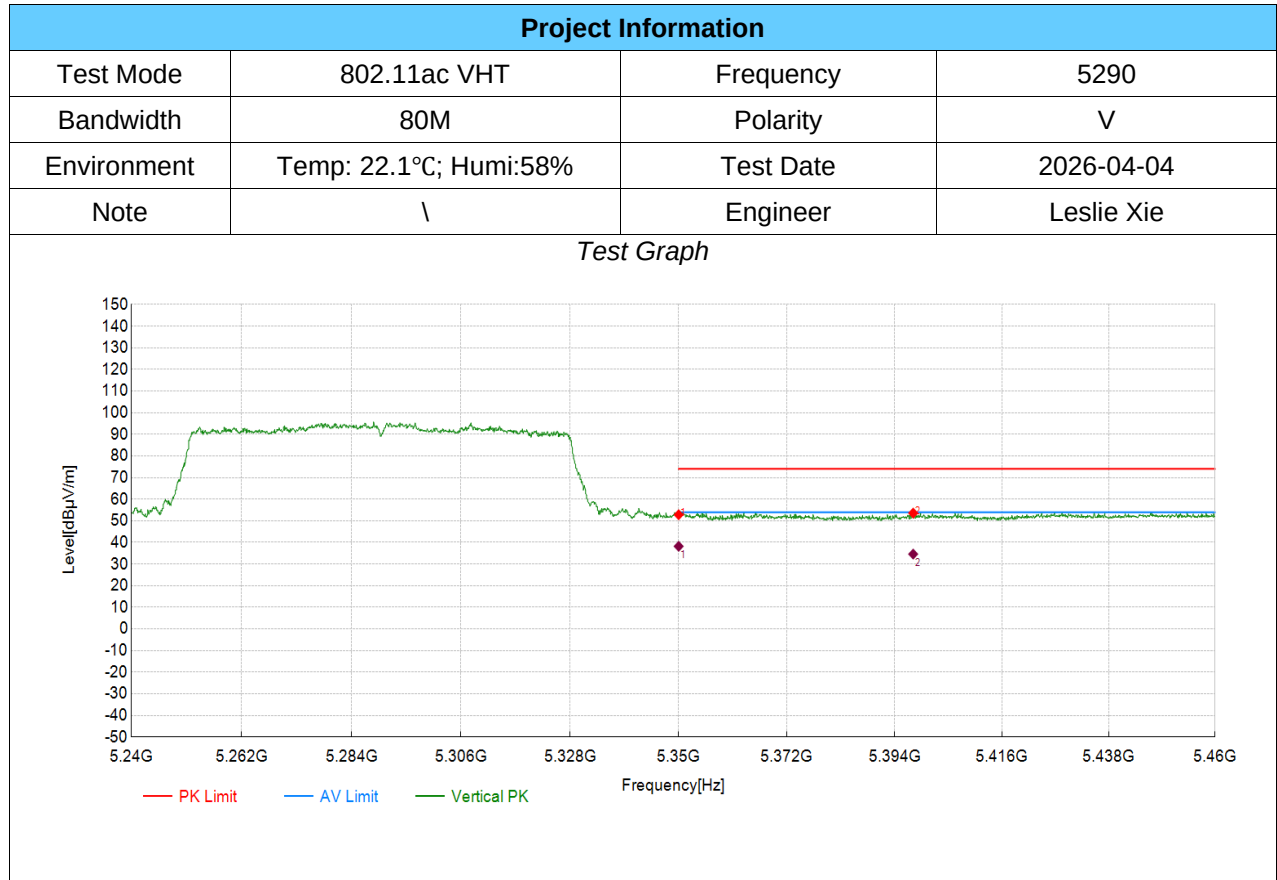


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	40.11	52.83	12.72	74.00	21.17	PK	Vertical	PASS
2	5397.82	40.11	53.56	13.45	74.00	20.44	PK	Vertical	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	5350.00	12.72	25.50	38.22	54.00	15.78	Vertical	PASS
2	5397.82	13.45	21.15	34.60	54.00	19.40	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

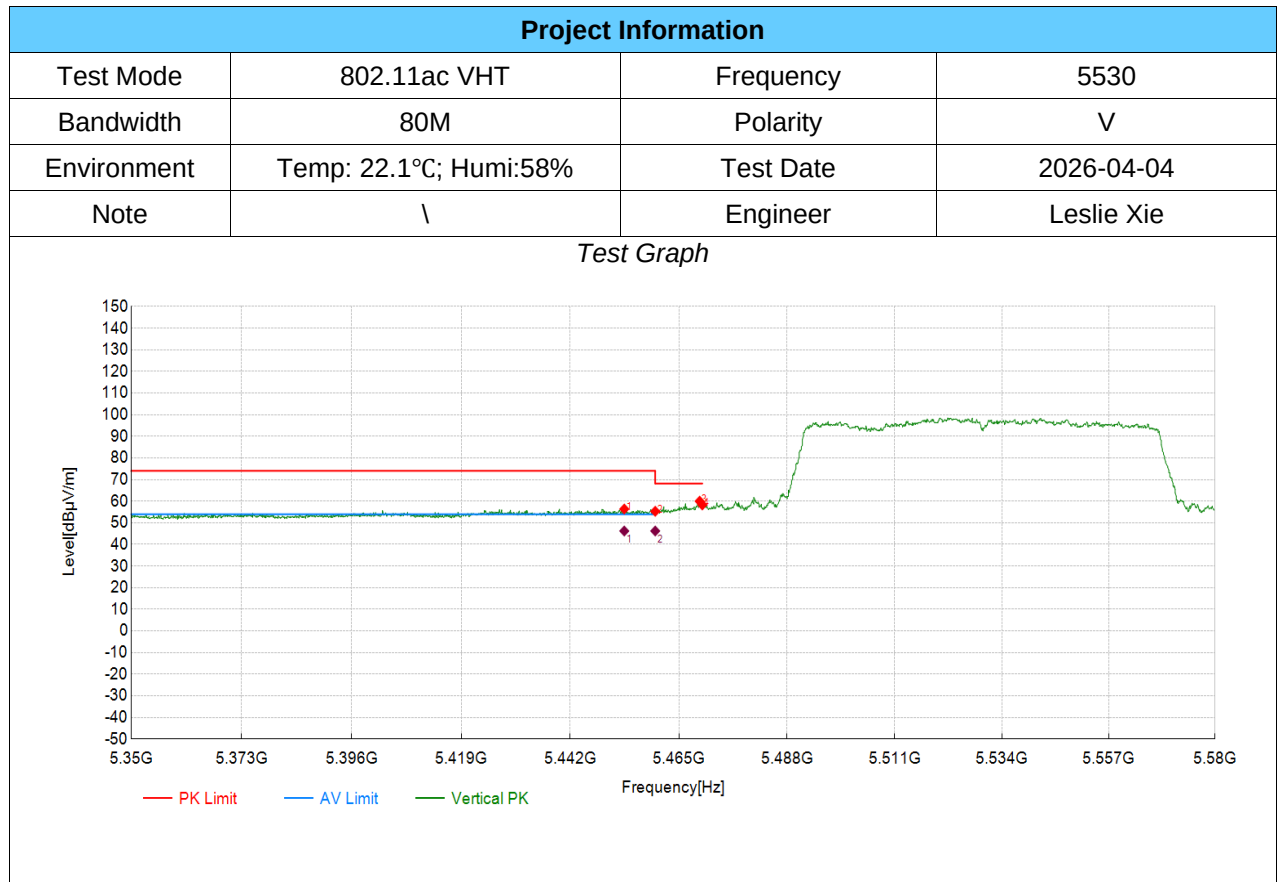

PEAK Data List


NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5453.44	40.28	56.39	16.11	74.00	17.61	PK	Vertical	PASS
2	5460.00	39.10	55.34	16.24	74.00	18.66	PK	Vertical	PASS
3	5469.43	43.59	60.01	16.42	68.20	8.19	PK	Vertical	PASS
4	5470.00	41.83	58.27	16.44	68.20	9.93	PK	Vertical	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	5453.44	16.11	30.11	46.22	54.00	7.78	Vertical	PASS
2	5460.00	16.24	29.98	46.22	54.00	7.78	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

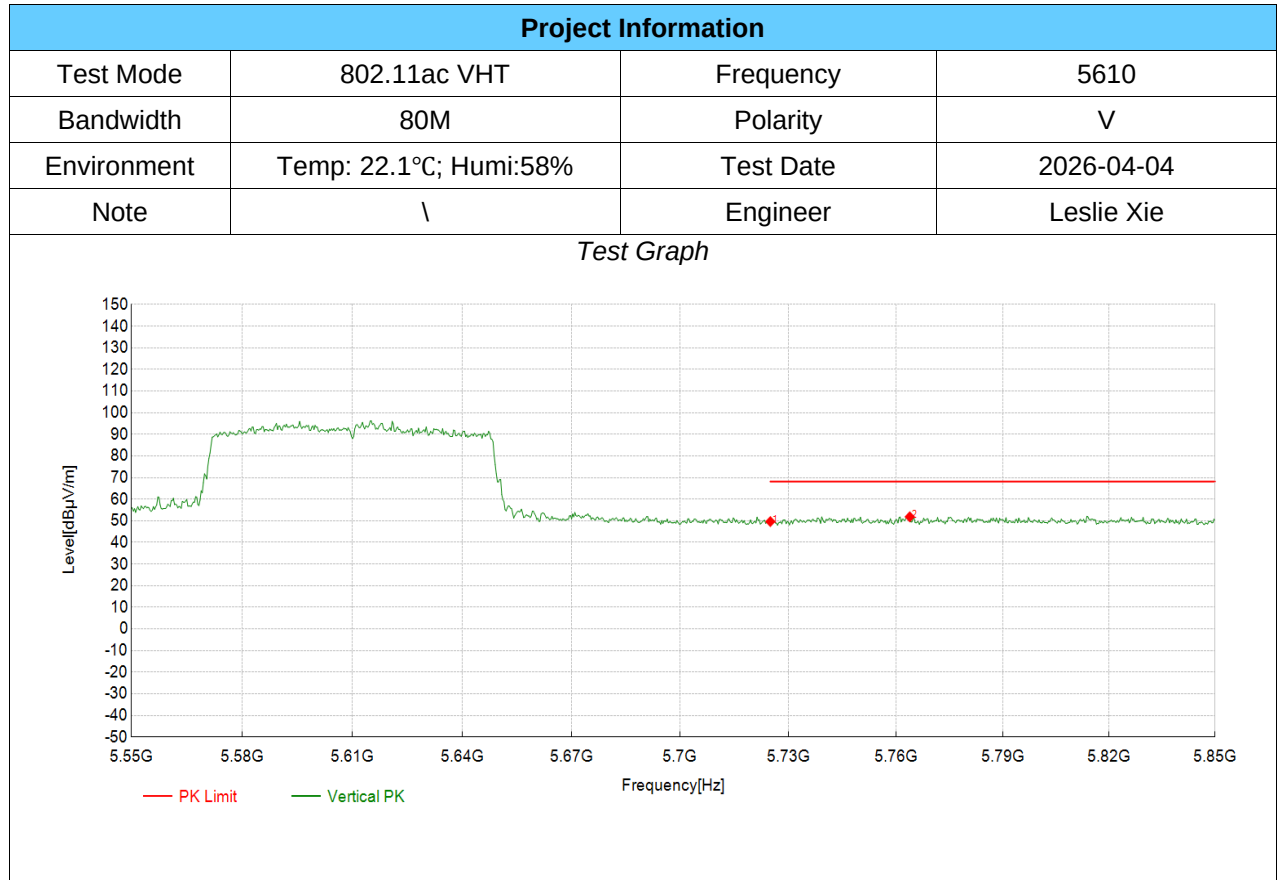

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	37.03	49.65	12.62	68.20	18.55	PK	Vertical	PASS
2	5763.90	39.13	51.87	12.74	68.20	16.33	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

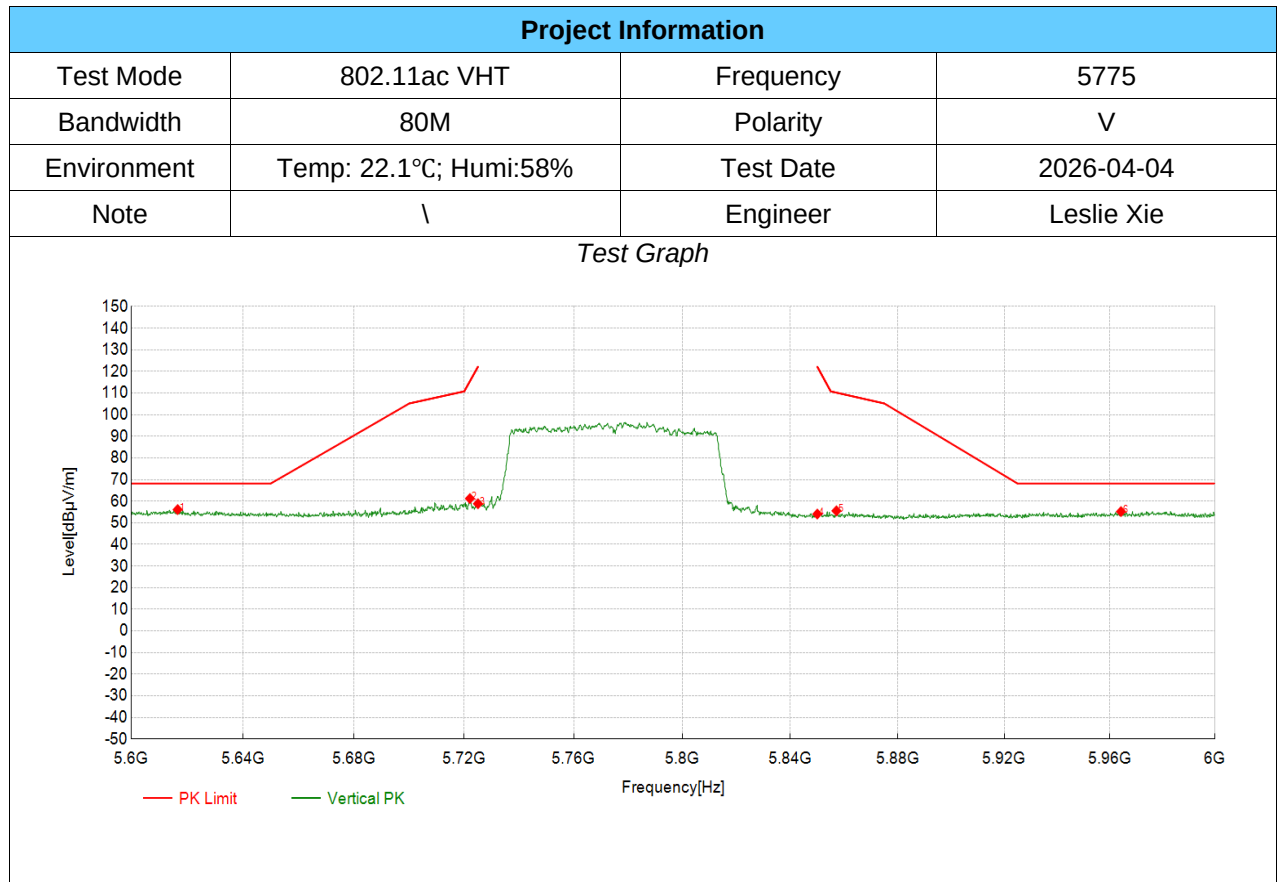


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5616.61	40.80	56.14	15.34	68.20	12.06	PK	Vertical	PASS
2	5722.06	47.03	61.24	14.21	115.50	54.26	PK	Vertical	PASS
3	5725.00	44.61	58.83	14.22	122.20	63.37	PK	Vertical	PASS
4	5850.00	39.70	54.06	14.36	122.20	68.14	PK	Vertical	PASS
5	5857.13	41.18	55.53	14.35	110.20	54.67	PK	Vertical	PASS
6	5964.18	40.57	55.20	14.63	68.20	13.00	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

8.2. SPURIOUS EMISSIONS(1 GHZ~8 GHZ)


TX Radiated Test Result

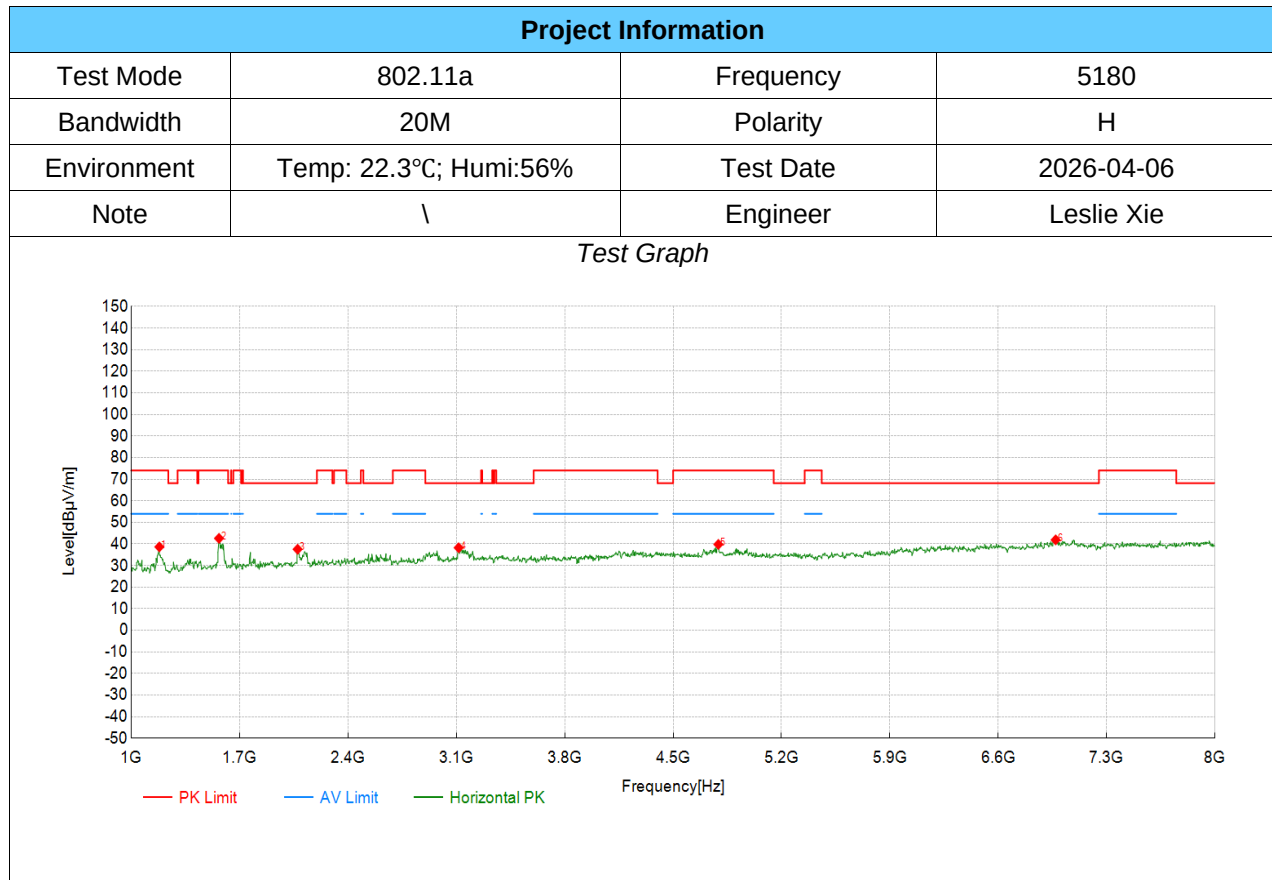

PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1182.09	66.60	38.63	-27.97	74.00	35.37	PK	Horizontal	PASS
2	1567.28	68.93	42.61	-26.32	74.00	31.39	PK	Horizontal	PASS
3	2075.04	62.35	37.56	-24.79	68.20	30.64	PK	Horizontal	PASS
4	3115.06	60.81	38.24	-22.57	68.20	29.96	PK	Horizontal	PASS
5	4792.40	59.67	39.81	-19.86	74.00	34.19	PK	Horizontal	PASS
6	6970.49	55.27	41.91	-13.36	68.20	26.29	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level


TX Radiated Test Result

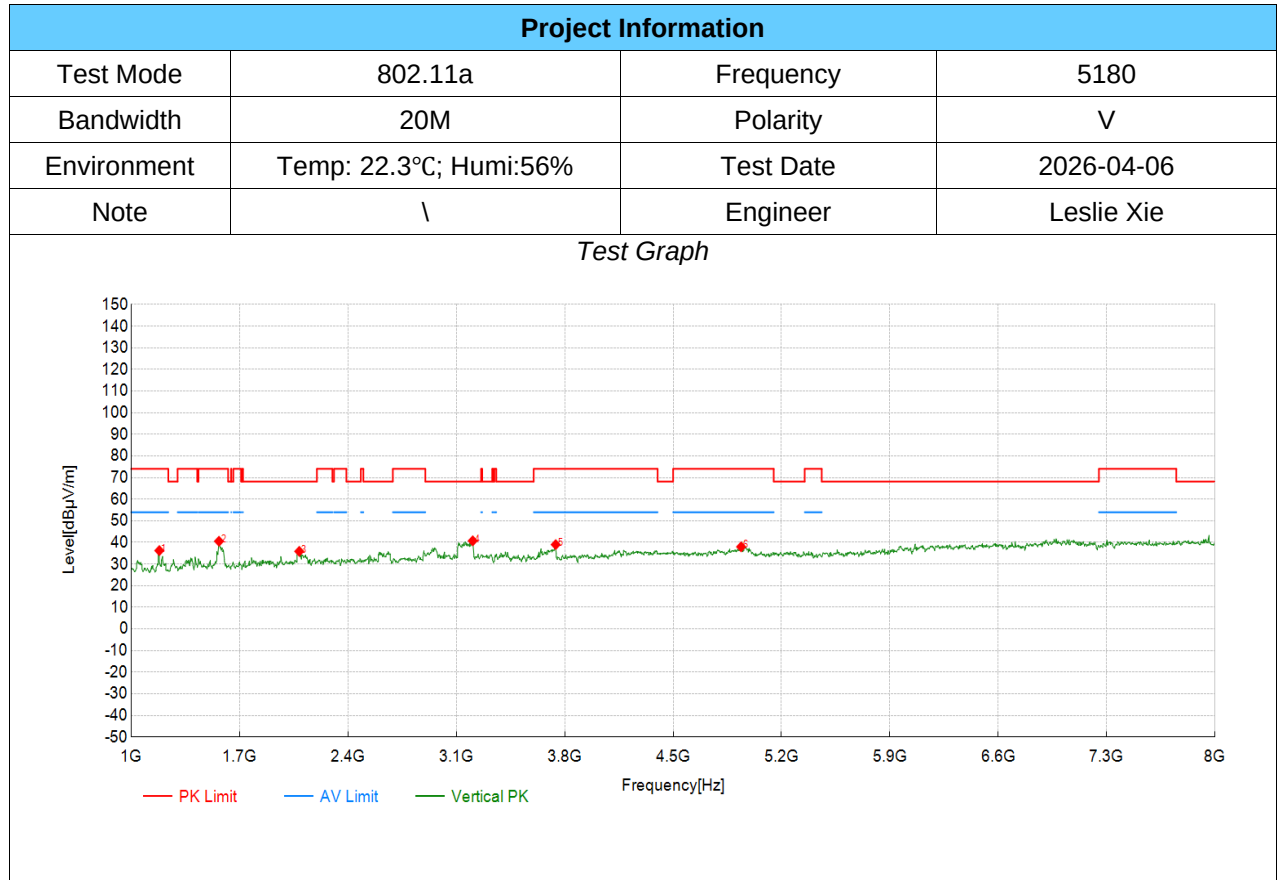

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1182.09	64.19	36.22	-27.97	74.00	37.78	PK	Vertical	PASS
2	1567.28	66.87	40.55	-26.32	74.00	33.45	PK	Vertical	PASS
3	2085.54	60.65	35.88	-24.77	68.20	32.32	PK	Vertical	PASS
4	3206.10	63.16	40.75	-22.41	68.20	27.45	PK	Vertical	PASS
5	3741.87	60.90	38.99	-21.91	74.00	35.01	PK	Vertical	PASS
6	4939.47	57.22	37.97	-19.25	74.00	36.03	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

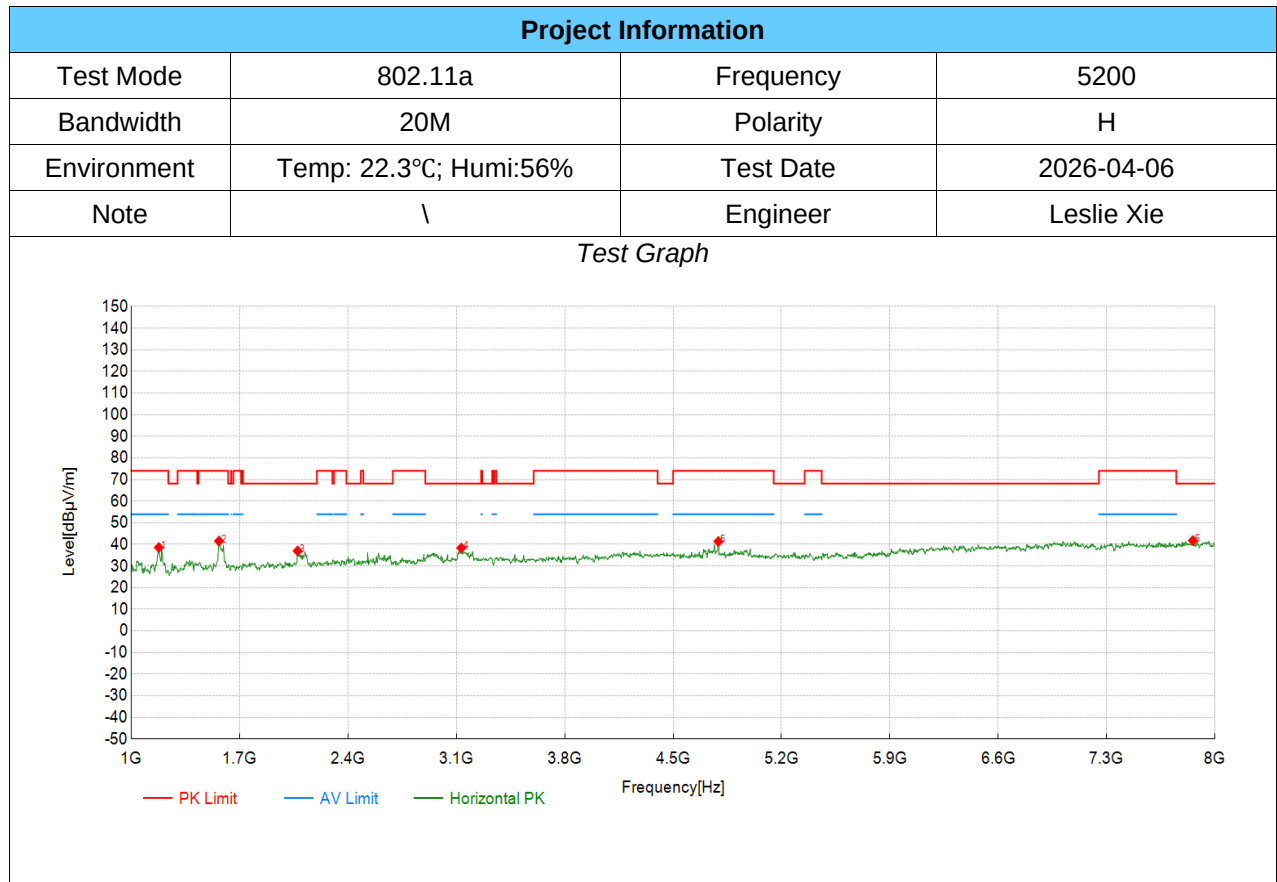

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1178.59	66.59	38.60	-27.99	74.00	35.40	PK	Horizontal	PASS
2	1567.28	67.87	41.55	-26.32	74.00	32.45	PK	Horizontal	PASS
3	2075.04	61.77	36.98	-24.79	68.20	31.22	PK	Horizontal	PASS
4	3132.57	60.89	38.36	-22.53	68.20	29.84	PK	Horizontal	PASS
5	4792.40	61.21	41.35	-19.86	74.00	32.65	PK	Horizontal	PASS
6	7856.43	55.15	41.79	-13.36	68.20	26.41	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level


TX Radiated Test Result

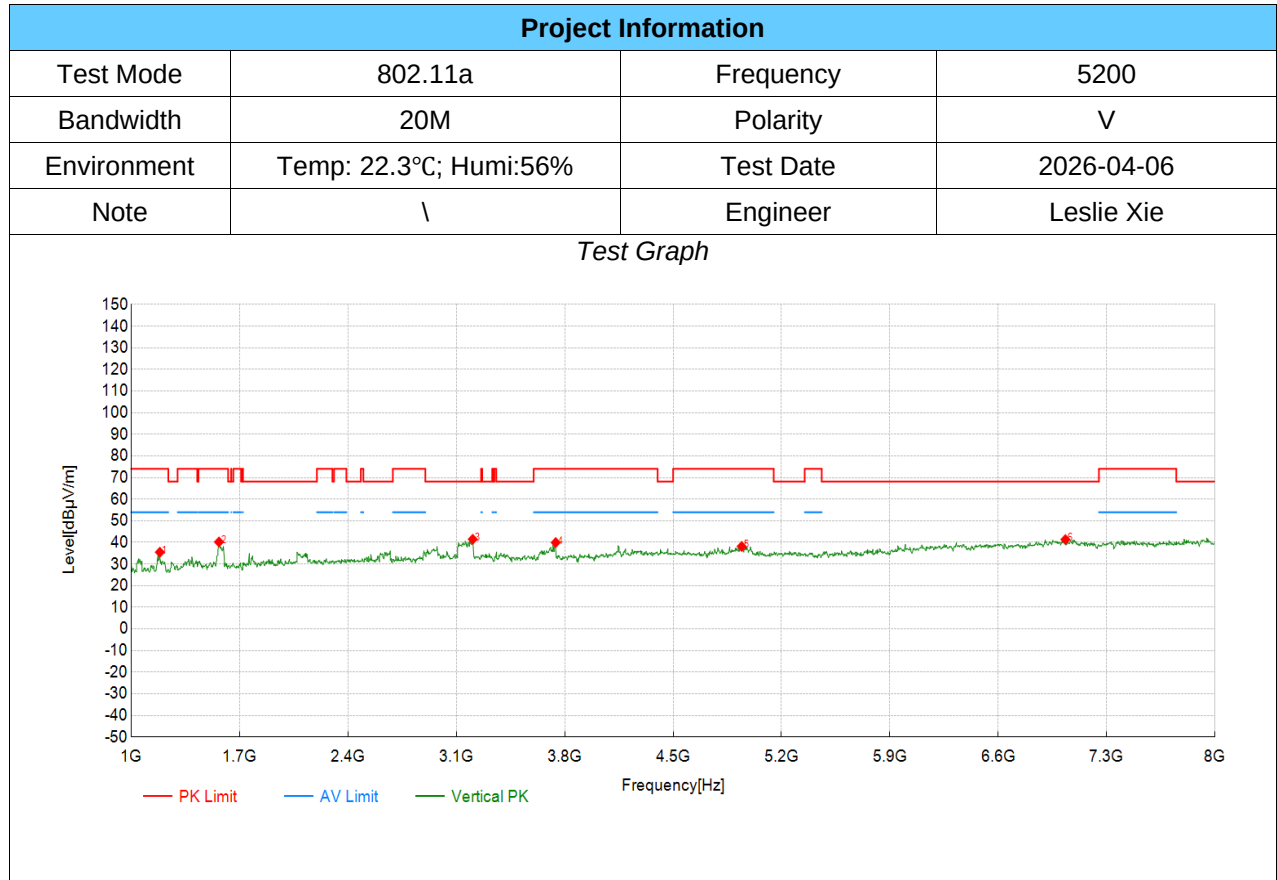

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1185.59	63.44	35.48	-27.96	74.00	38.52	PK	Vertical	PASS
2	1567.28	66.54	40.22	-26.32	74.00	33.78	PK	Vertical	PASS
3	3206.10	63.89	41.48	-22.41	68.20	26.72	PK	Vertical	PASS
4	3741.87	61.86	39.95	-21.91	74.00	34.05	PK	Vertical	PASS
5	4942.97	57.37	38.14	-19.23	74.00	35.86	PK	Vertical	PASS
6	7033.52	54.68	41.33	-13.35	68.20	26.87	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

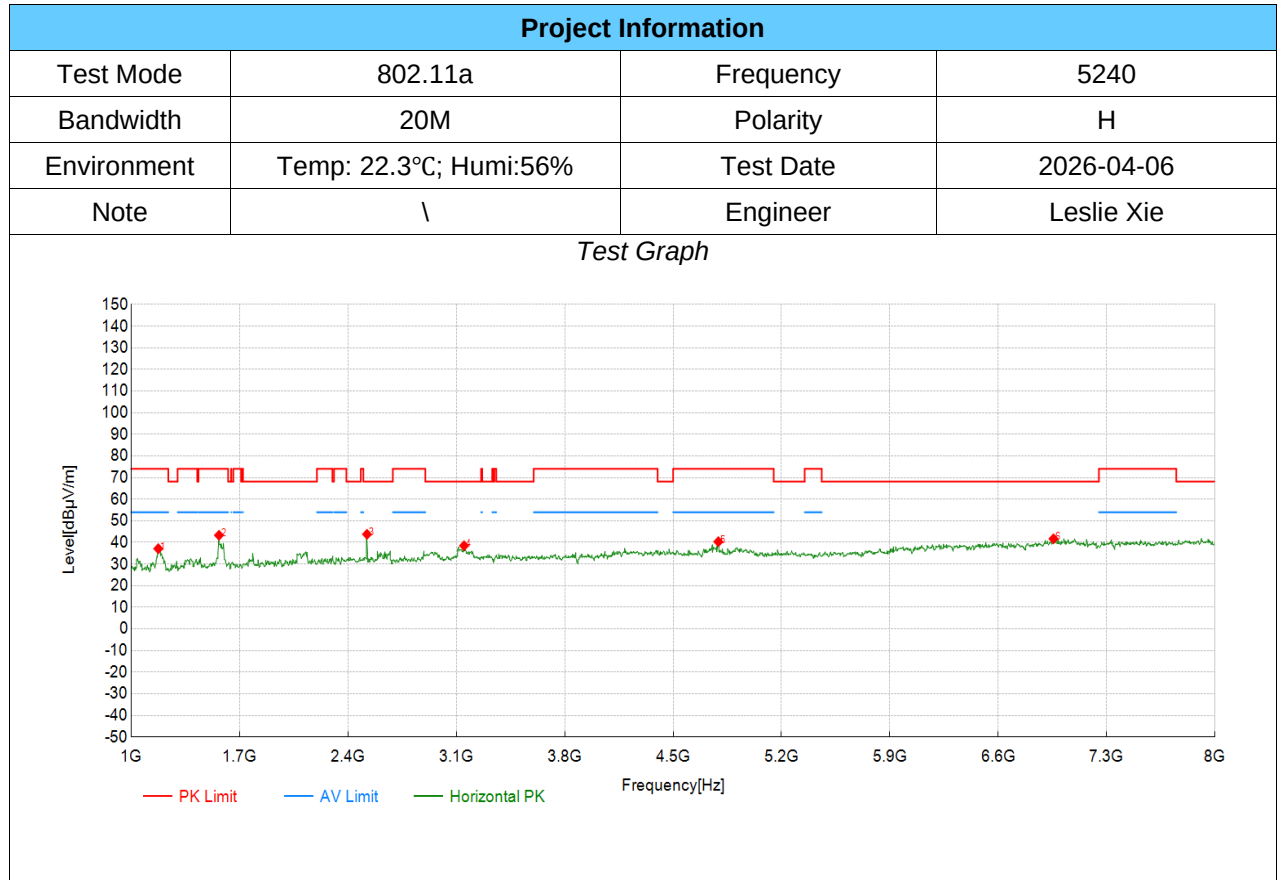

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1175.09	65.12	37.11	-28.01	74.00	36.89	PK	Horizontal	PASS
2	1567.28	69.64	43.32	-26.32	74.00	30.68	PK	Horizontal	PASS
3	2523.26	67.63	43.77	-23.86	68.20	24.43	PK	Horizontal	PASS
4	3150.08	61.00	38.49	-22.51	68.20	29.71	PK	Horizontal	PASS
5	4792.40	60.19	40.33	-19.86	74.00	33.67	PK	Horizontal	PASS
6	6956.48	55.17	41.69	-13.48	68.20	26.51	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

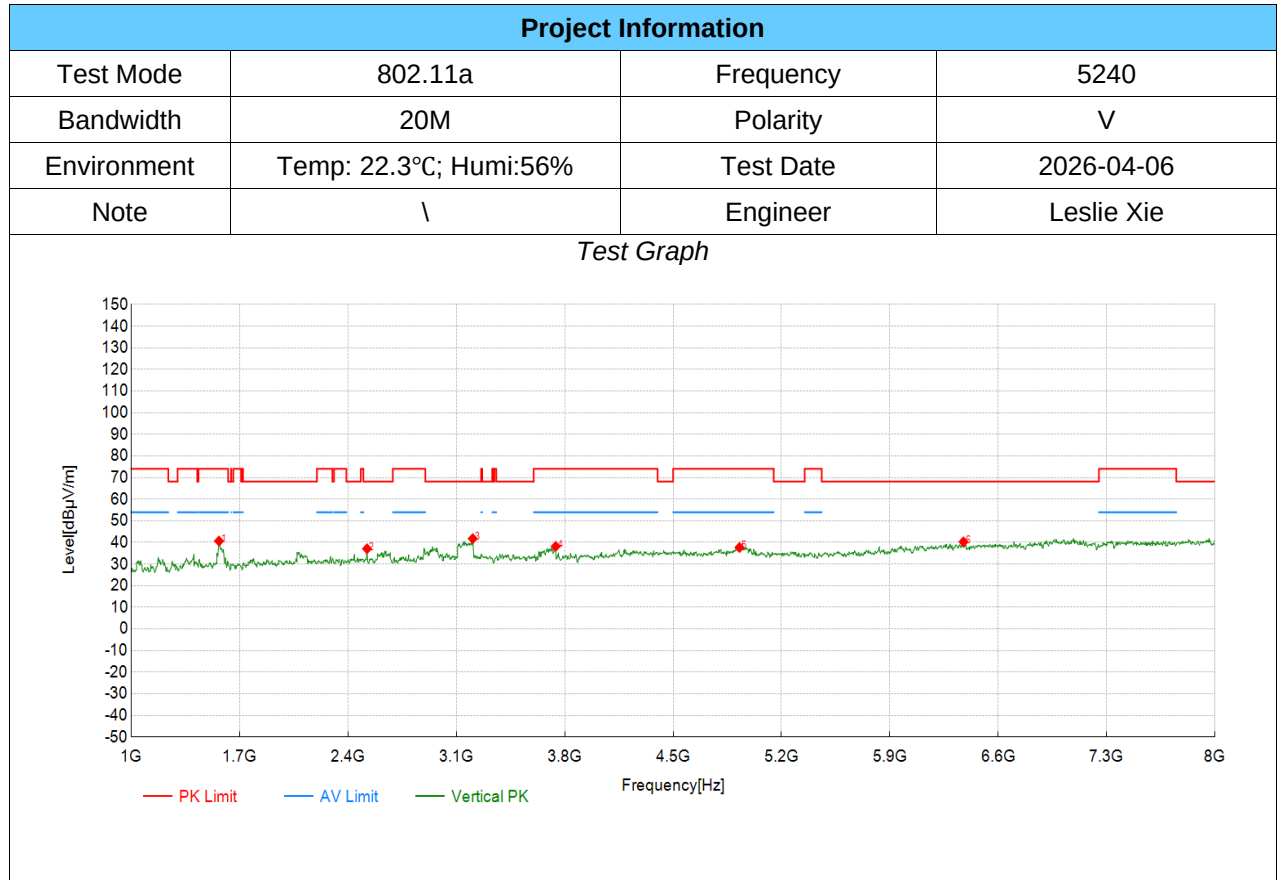

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1567.28	66.98	40.66	-26.32	74.00	33.34	PK	Vertical	PASS
2	2523.26	60.94	37.08	-23.86	68.20	31.12	PK	Vertical	PASS
3	3206.10	64.18	41.77	-22.41	68.20	26.43	PK	Vertical	PASS
4	3741.87	60.09	38.18	-21.91	74.00	35.82	PK	Vertical	PASS
5	4928.96	56.98	37.68	-19.30	74.00	36.32	PK	Vertical	PASS
6	6375.19	56.32	40.28	-16.04	68.20	27.92	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

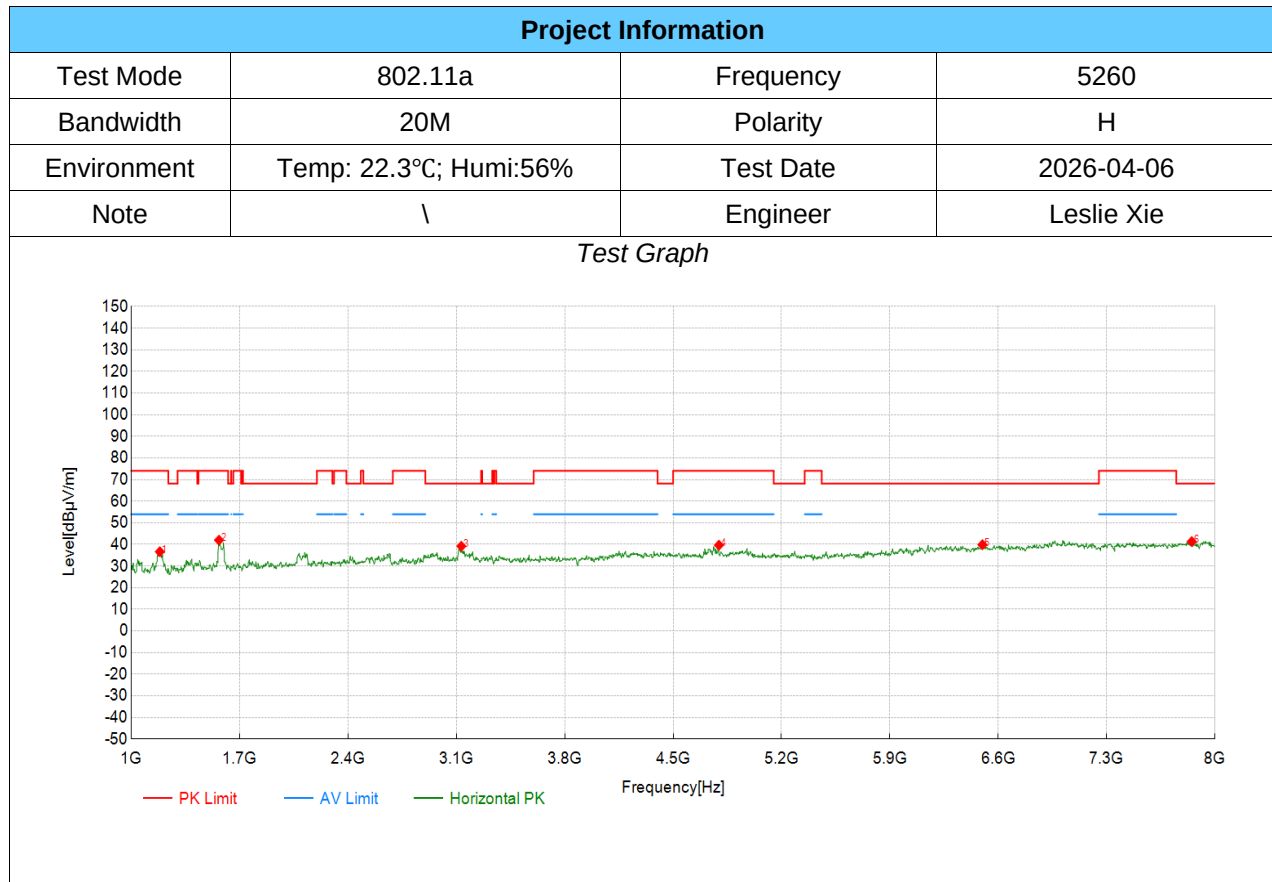

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1185.59	64.60	36.64	-27.96	74.00	37.36	PK	Horizontal	PASS
2	1567.28	68.32	42.00	-26.32	74.00	32.00	PK	Horizontal	PASS
3	3132.57	61.71	39.18	-22.53	68.20	29.02	PK	Horizontal	PASS
4	4795.90	59.51	39.65	-19.86	74.00	34.35	PK	Horizontal	PASS
5	6497.75	55.50	39.89	-15.61	68.20	28.31	PK	Horizontal	PASS
6	7849.42	54.72	41.34	-13.38	68.20	26.86	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

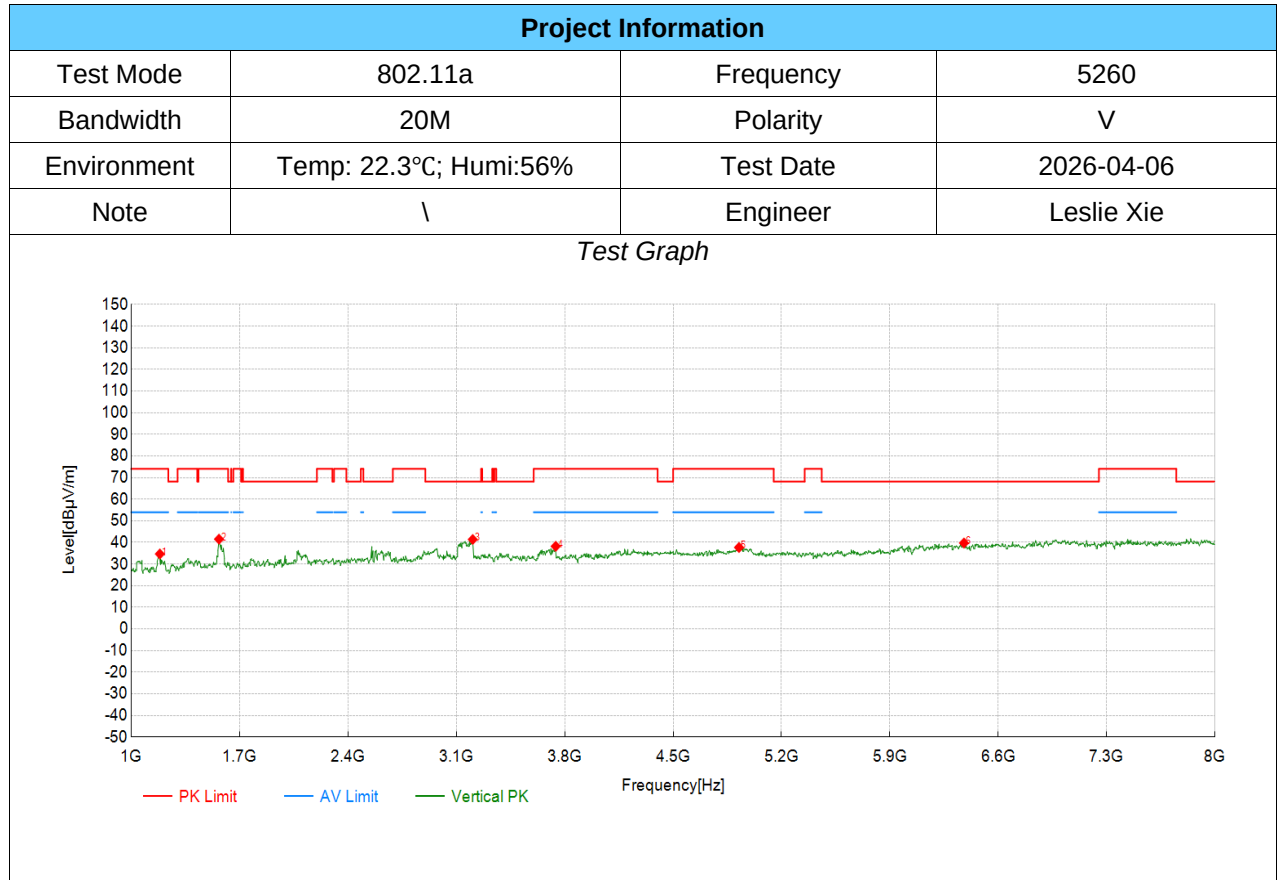

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1185.59	62.63	34.67	-27.96	74.00	39.33	PK	Vertical	PASS
2	1567.28	67.84	41.52	-26.32	74.00	32.48	PK	Vertical	PASS
3	3206.10	63.80	41.39	-22.41	68.20	26.81	PK	Vertical	PASS
4	3741.87	60.13	38.22	-21.91	74.00	35.78	PK	Vertical	PASS
5	4925.46	56.99	37.68	-19.31	74.00	36.32	PK	Vertical	PASS
6	6378.69	55.75	39.72	-16.03	68.20	28.48	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

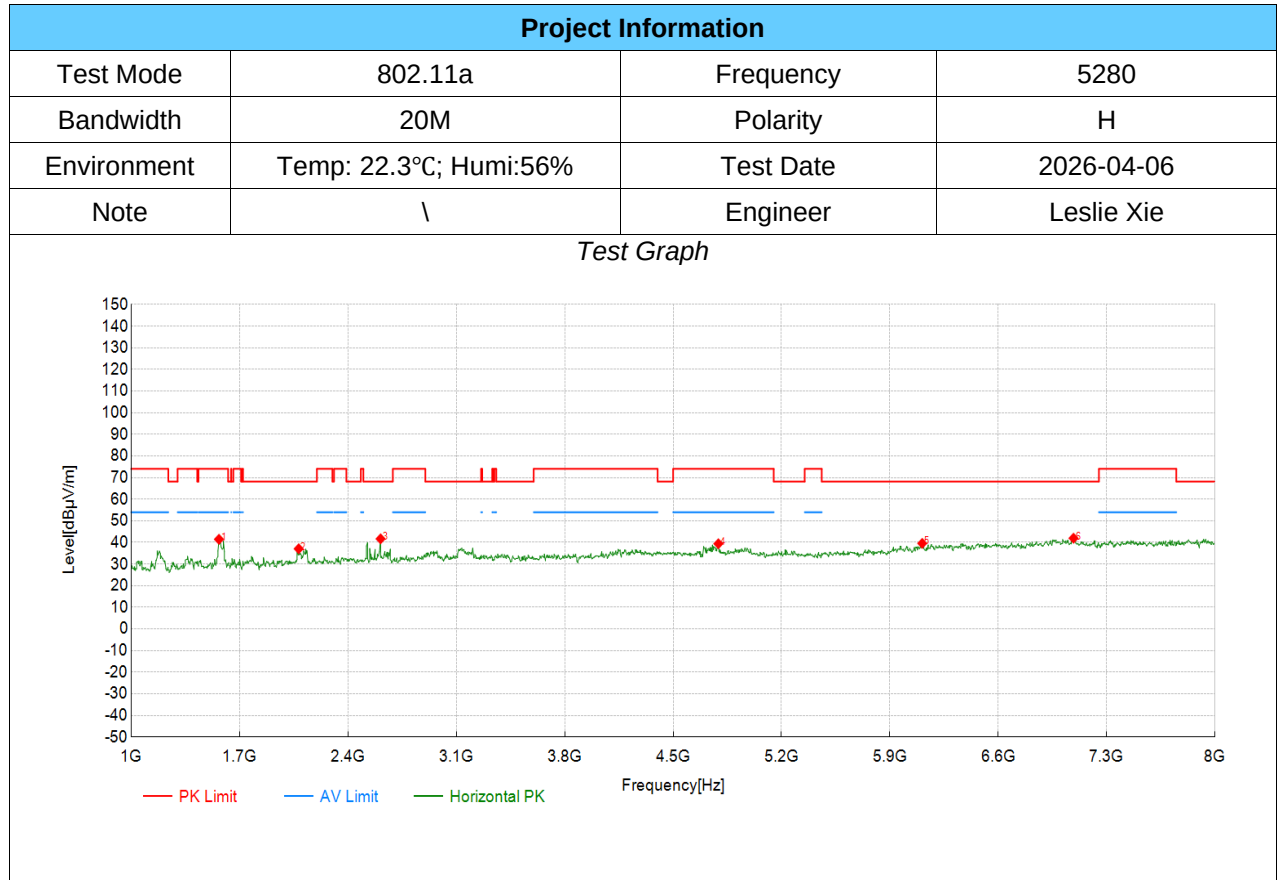

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1567.28	67.78	41.46	-26.32	74.00	32.54	PK	Horizontal	PASS
2	2082.04	61.86	37.09	-24.77	68.20	31.11	PK	Horizontal	PASS
3	2610.81	65.32	41.68	-23.64	68.20	26.52	PK	Horizontal	PASS
4	4792.40	59.27	39.41	-19.86	74.00	34.59	PK	Horizontal	PASS
5	6109.05	56.34	39.57	-16.77	68.20	28.63	PK	Horizontal	PASS
6	7086.04	55.65	41.95	-13.70	68.20	26.25	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level


TX Radiated Test Result

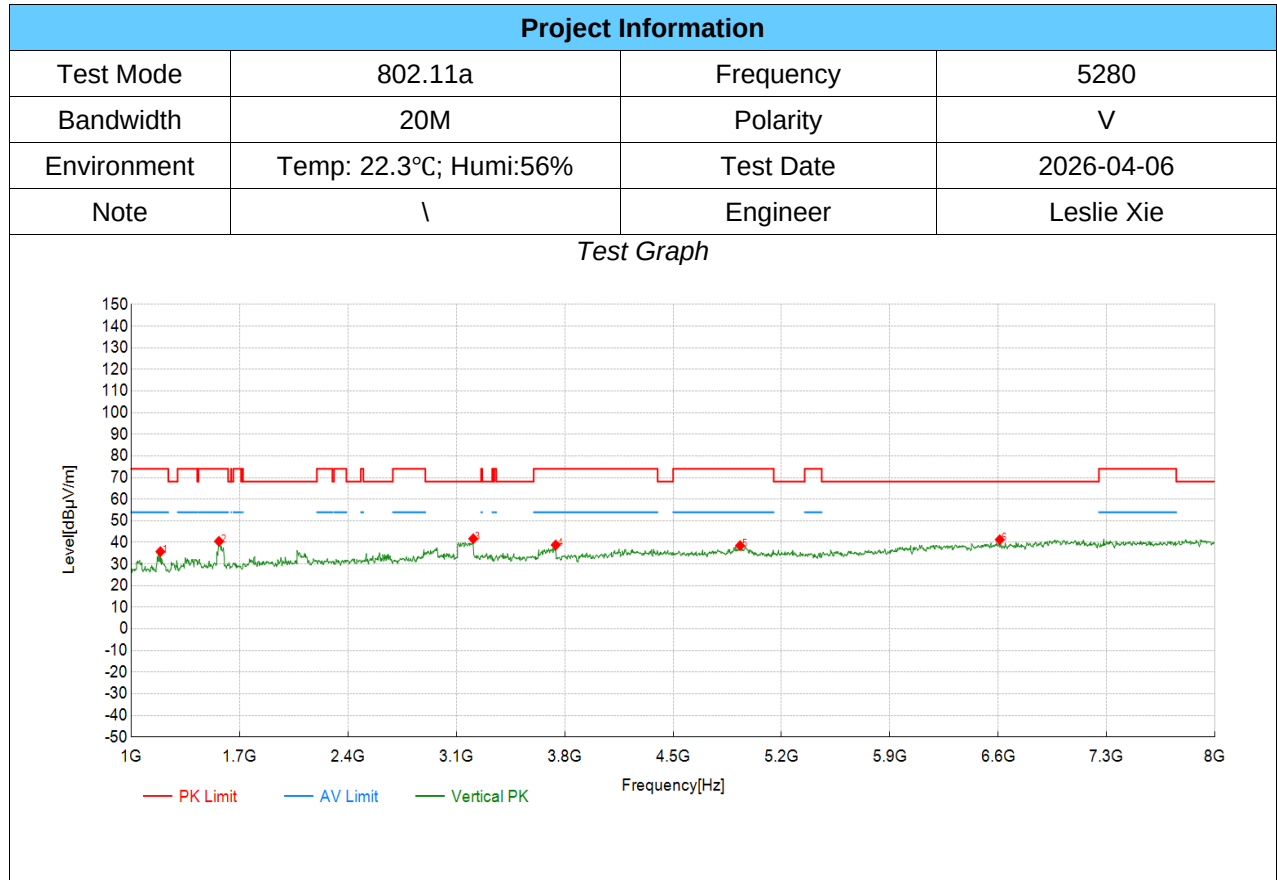

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1189.09	63.68	35.75	-27.93	74.00	38.25	PK	Vertical	PASS
2	1567.28	66.83	40.51	-26.32	74.00	33.49	PK	Vertical	PASS
3	3209.60	64.12	41.71	-22.41	68.20	26.49	PK	Vertical	PASS
4	3741.87	60.74	38.83	-21.91	74.00	35.17	PK	Vertical	PASS
5	4932.47	57.79	38.51	-19.28	74.00	35.49	PK	Vertical	PASS
6	6609.80	56.47	41.27	-15.20	68.20	26.93	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

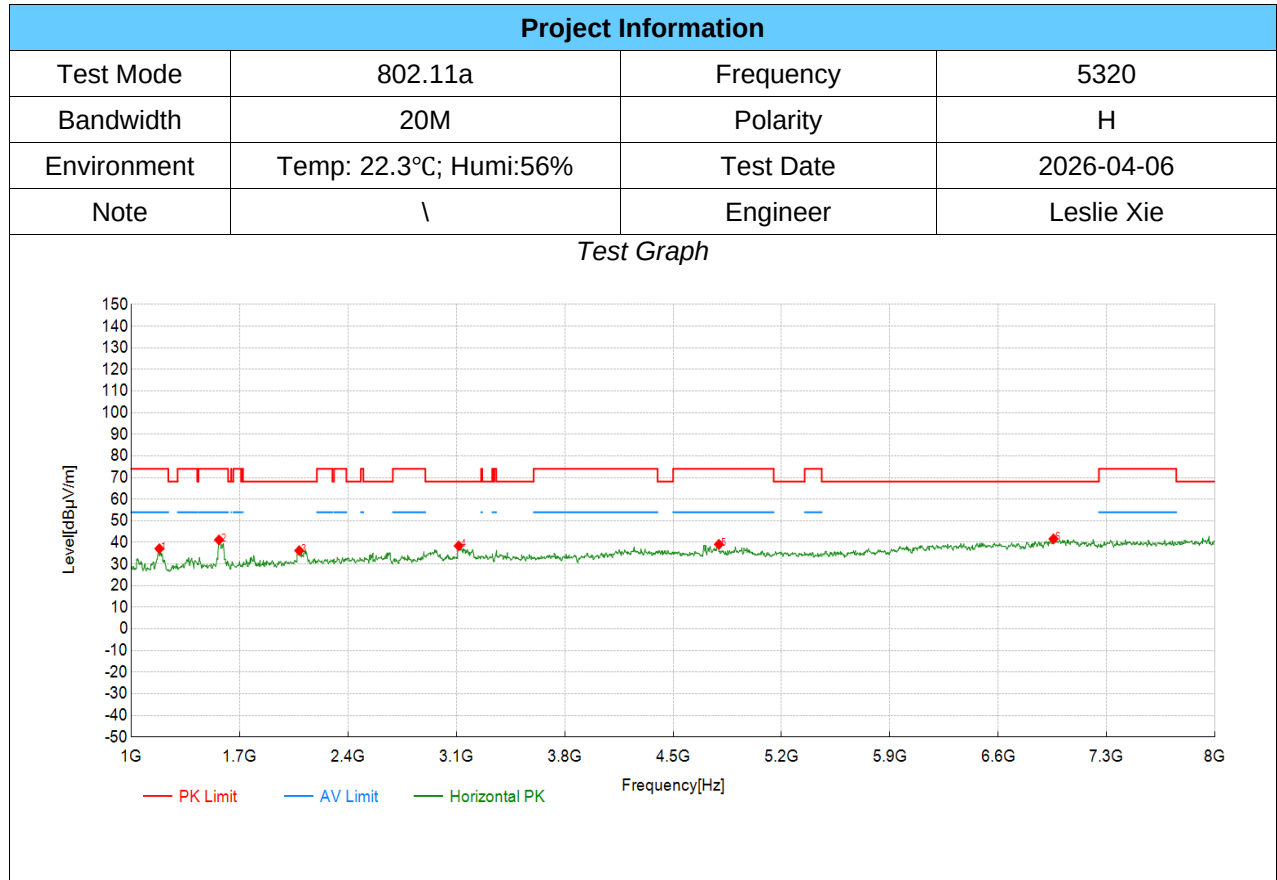

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1182.09	65.09	37.12	-27.97	74.00	36.88	PK	Horizontal	PASS
2	1567.28	67.50	41.18	-26.32	74.00	32.82	PK	Horizontal	PASS
3	2085.54	60.98	36.21	-24.77	68.20	31.99	PK	Horizontal	PASS
4	3115.06	60.97	38.40	-22.57	68.20	29.80	PK	Horizontal	PASS
5	4795.90	58.96	39.10	-19.86	74.00	34.90	PK	Horizontal	PASS
6	6956.48	55.09	41.61	-13.48	68.20	26.59	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

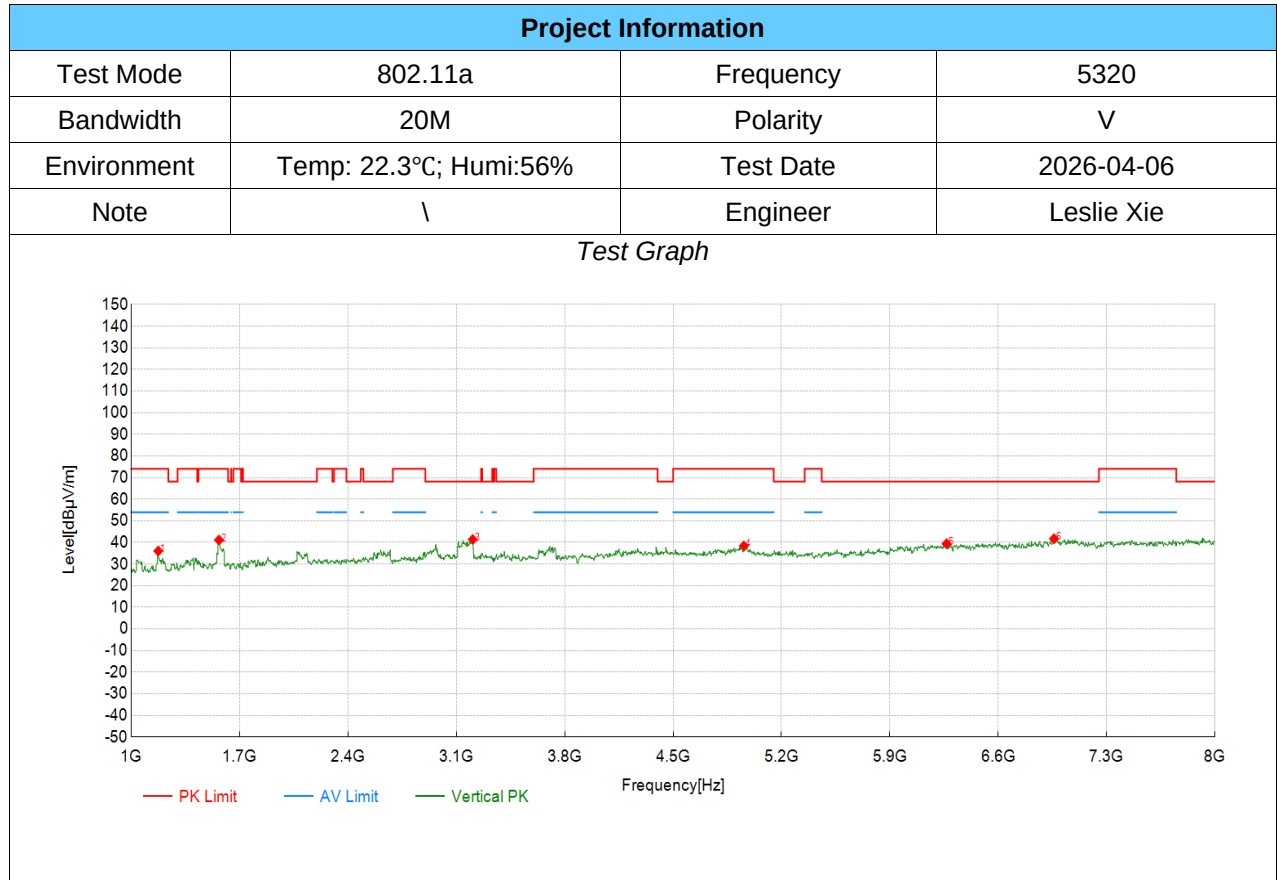

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1175.09	64.05	36.04	-28.01	74.00	37.96	PK	Vertical	PASS
2	1567.28	67.44	41.12	-26.32	74.00	32.88	PK	Vertical	PASS
3	3206.10	63.79	41.38	-22.41	68.20	26.82	PK	Vertical	PASS
4	4956.98	57.56	38.37	-19.19	74.00	35.63	PK	Vertical	PASS
5	6266.63	55.71	39.40	-16.31	68.20	28.80	PK	Vertical	PASS
6	6959.98	55.18	41.73	-13.45	68.20	26.47	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

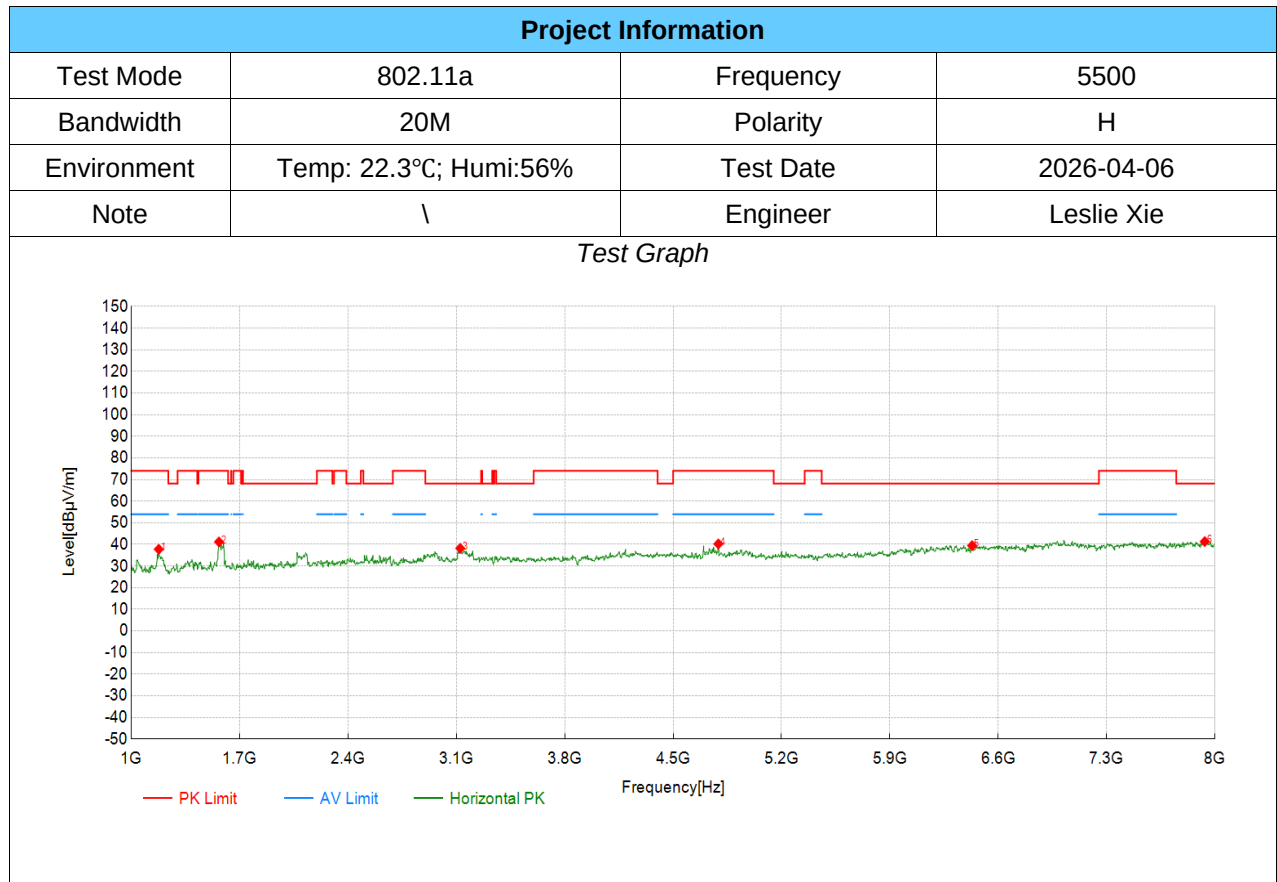

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1178.59	65.77	37.78	-27.99	74.00	36.22	PK	Horizontal	PASS
2	1567.28	67.48	41.16	-26.32	74.00	32.84	PK	Horizontal	PASS
3	3125.56	60.73	38.19	-22.54	68.20	30.01	PK	Horizontal	PASS
4	4792.40	60.11	40.25	-19.86	74.00	33.75	PK	Horizontal	PASS
5	6431.22	55.32	39.45	-15.87	68.20	28.75	PK	Horizontal	PASS
6	7933.47	54.49	41.35	-13.14	68.20	26.85	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

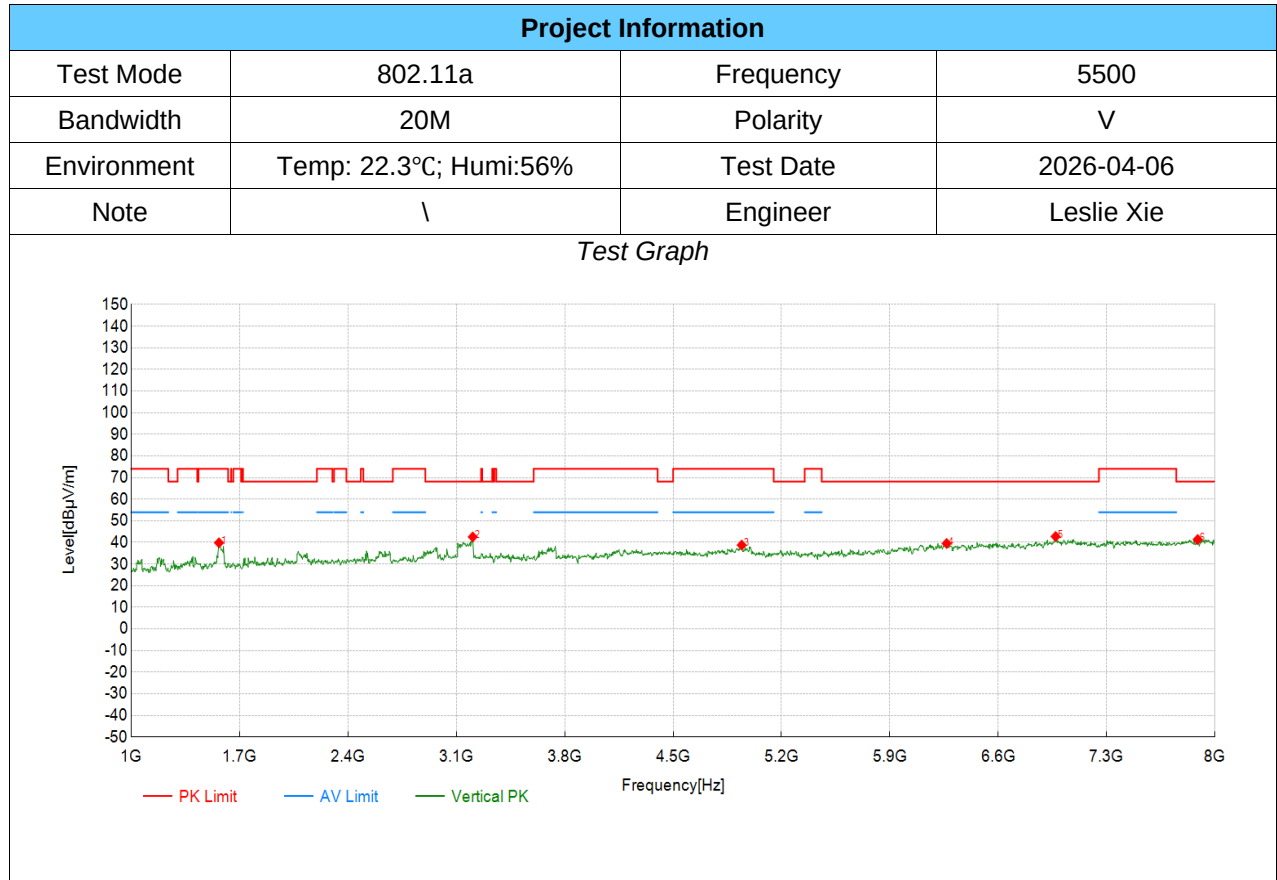

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1567.28	66.17	39.85	-26.32	74.00	34.15	PK	Vertical	PASS
2	3206.10	64.96	42.55	-22.41	68.20	25.65	PK	Vertical	PASS
3	4942.97	57.99	38.76	-19.23	74.00	35.24	PK	Vertical	PASS
4	6266.63	55.82	39.51	-16.31	68.20	28.69	PK	Vertical	PASS
5	6970.49	56.09	42.73	-13.36	68.20	25.47	PK	Vertical	PASS
6	7887.94	54.63	41.36	-13.27	68.20	26.84	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

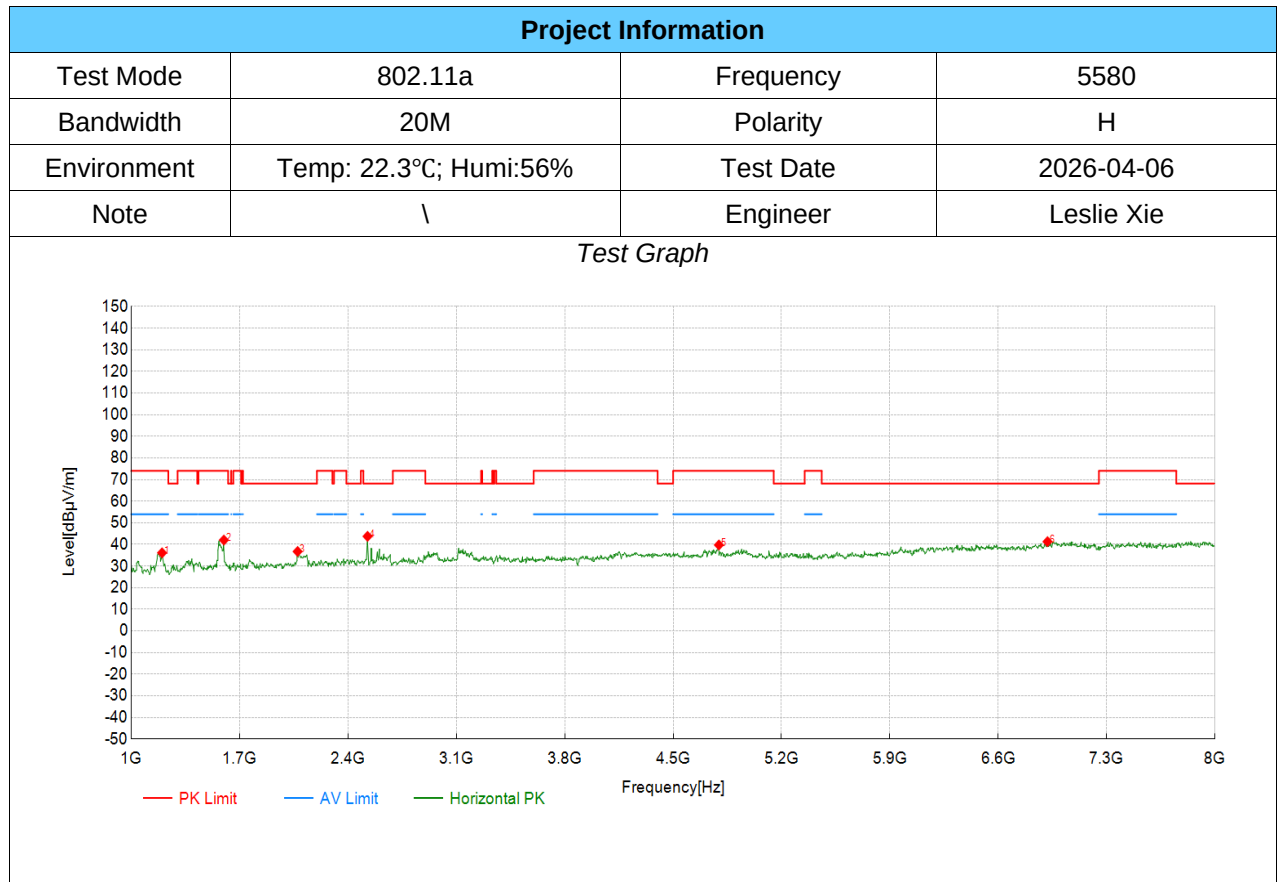

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1199.60	63.99	36.11	-27.88	74.00	37.89	PK	Horizontal	PASS
2	1598.80	68.28	42.02	-26.26	74.00	31.98	PK	Horizontal	PASS
3	2075.04	61.54	36.75	-24.79	68.20	31.45	PK	Horizontal	PASS
4	2526.76	67.60	43.75	-23.85	68.20	24.45	PK	Horizontal	PASS
5	4795.90	59.62	39.76	-19.86	74.00	34.24	PK	Horizontal	PASS
6	6917.96	55.07	41.30	-13.77	68.20	26.90	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

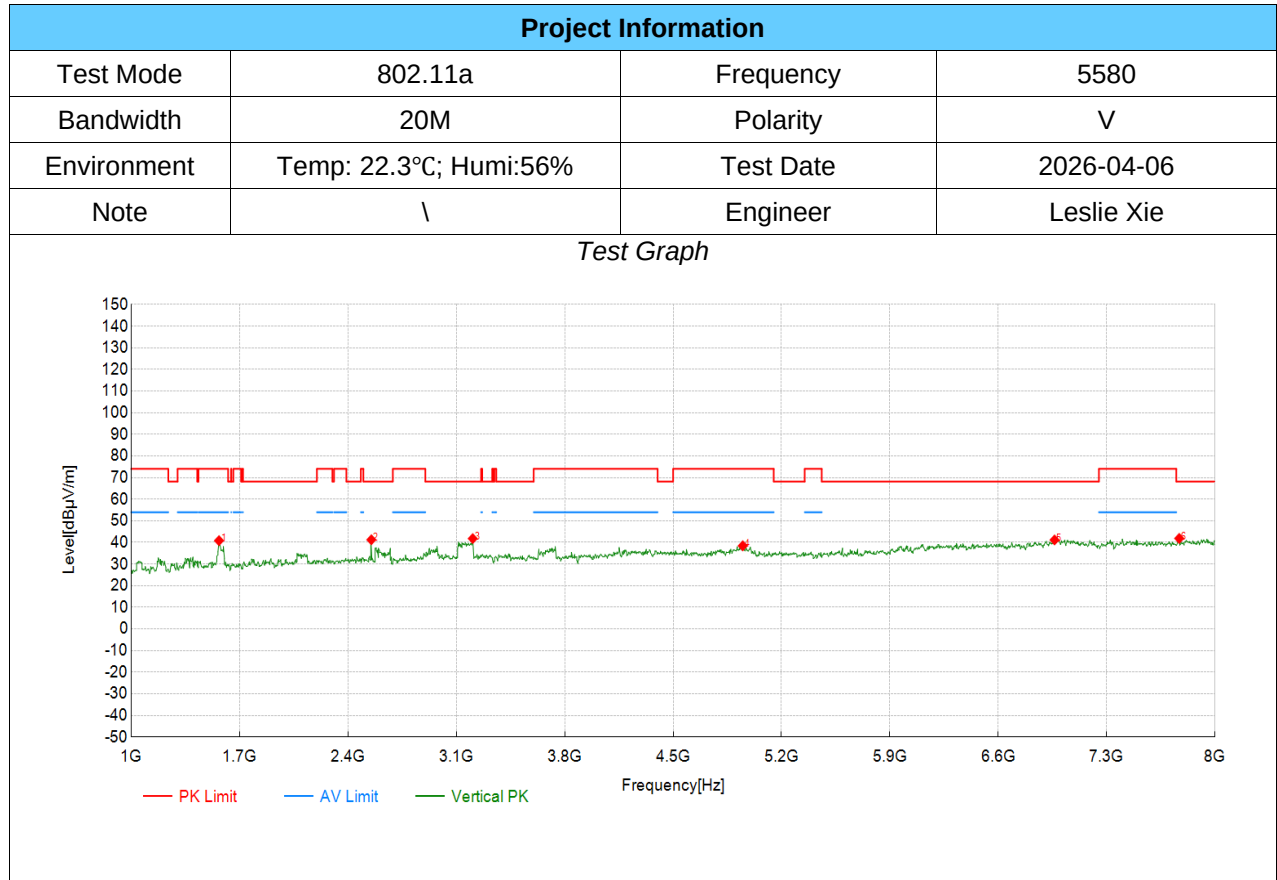

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1567.28	67.16	40.84	-26.32	74.00	33.16	PK	Vertical	PASS
2	2551.28	65.03	41.24	-23.79	68.20	26.96	PK	Vertical	PASS
3	3206.10	64.19	41.78	-22.41	68.20	26.42	PK	Vertical	PASS
4	4949.97	57.65	38.44	-19.21	74.00	35.56	PK	Vertical	PASS
5	6963.48	54.57	41.16	-13.41	68.20	27.04	PK	Vertical	PASS
6	7768.88	55.47	41.86	-13.61	68.20	26.34	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

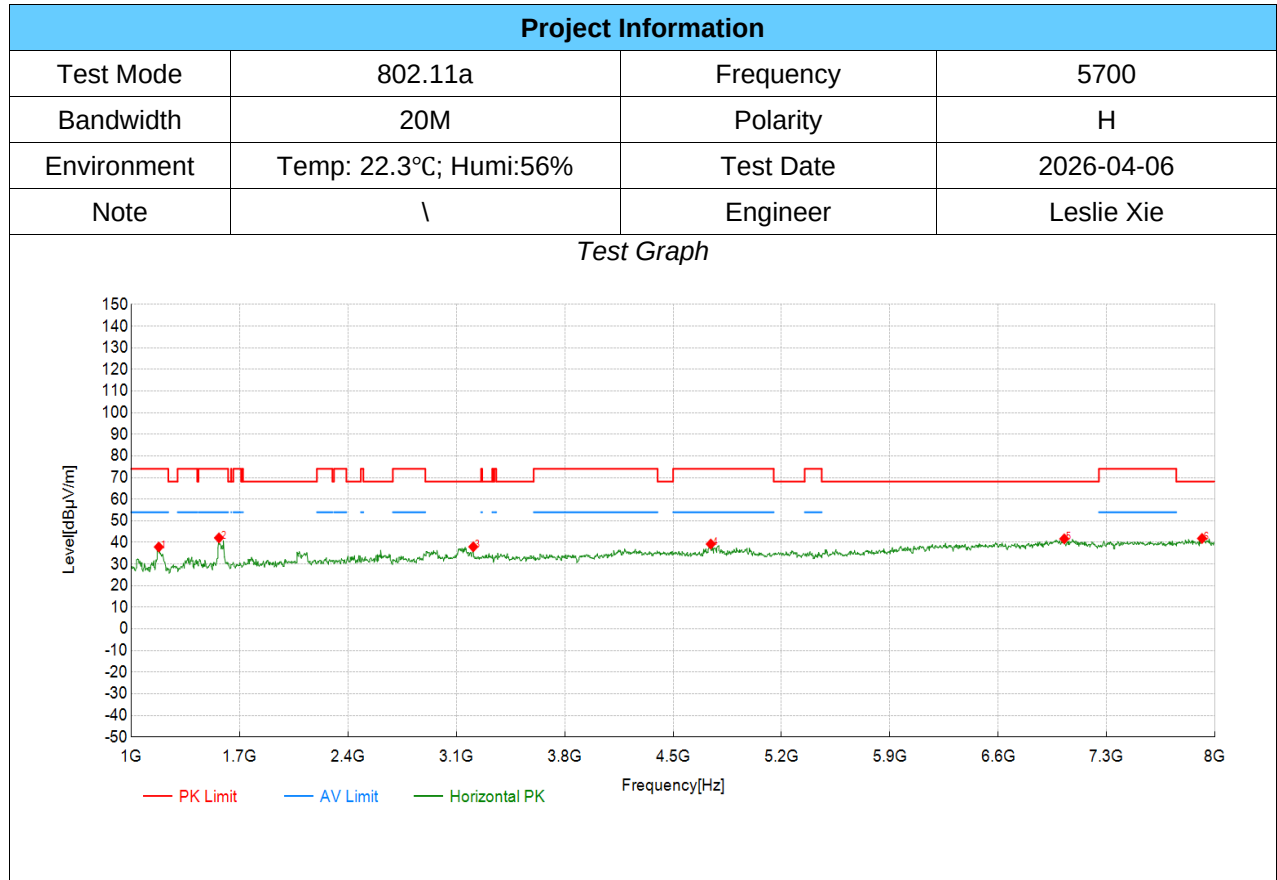

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1178.59	65.89	37.90	-27.99	74.00	36.10	PK	Horizontal	PASS
2	1567.28	68.44	42.12	-26.32	74.00	31.88	PK	Horizontal	PASS
3	3209.60	60.38	37.97	-22.41	68.20	30.23	PK	Horizontal	PASS
4	4743.37	59.28	39.25	-20.03	74.00	34.75	PK	Horizontal	PASS
5	7026.51	54.96	41.66	-13.30	68.20	26.54	PK	Horizontal	PASS
6	7915.96	55.02	41.84	-13.18	68.20	26.36	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

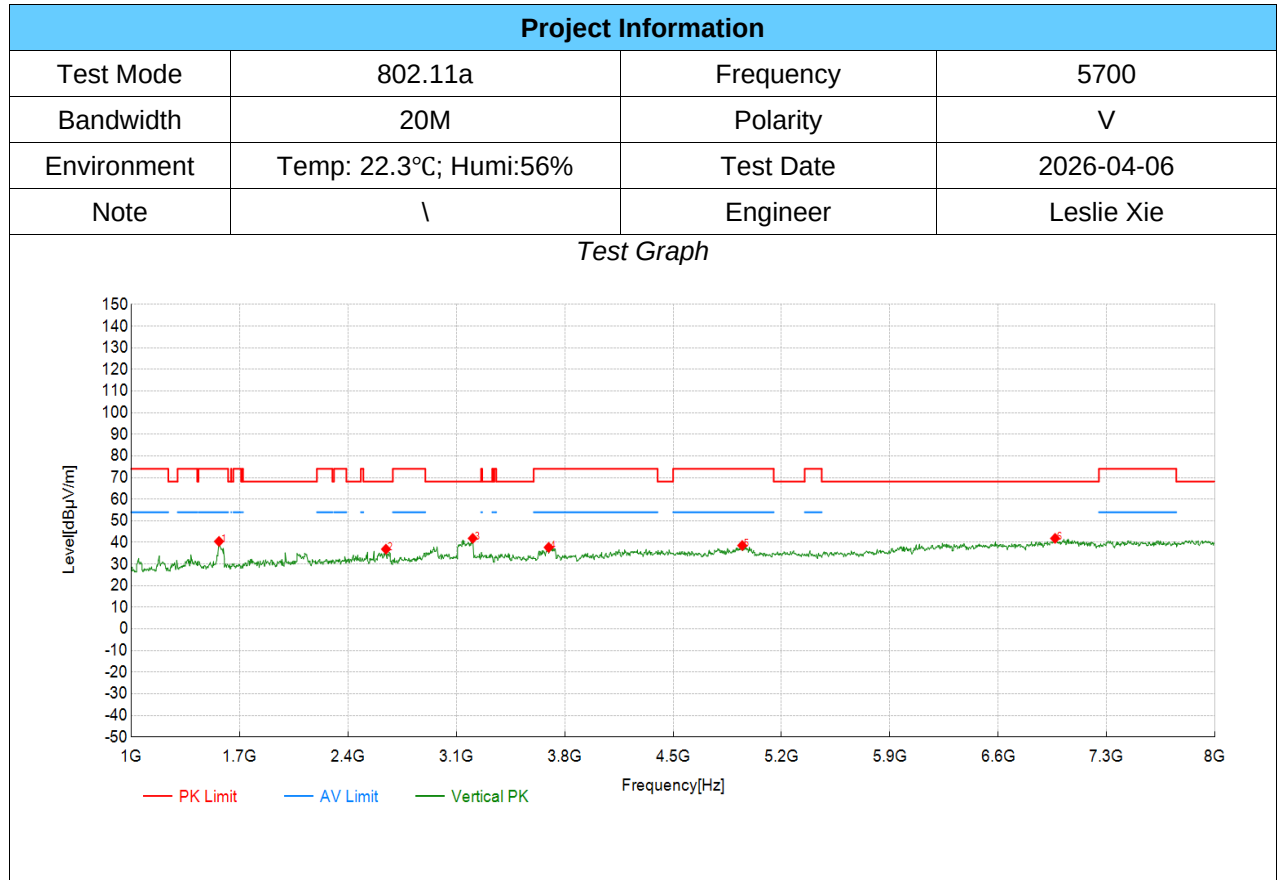

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1567.28	66.80	40.48	-26.32	74.00	33.52	PK	Vertical	PASS
2	2645.82	60.47	36.87	-23.60	68.20	31.33	PK	Vertical	PASS
3	3206.10	64.29	41.88	-22.41	68.20	26.32	PK	Vertical	PASS
4	3696.35	59.76	37.71	-22.05	74.00	36.29	PK	Vertical	PASS
5	4946.47	57.80	38.58	-19.22	74.00	35.42	PK	Vertical	PASS
6	6966.98	55.26	41.88	-13.38	68.20	26.32	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

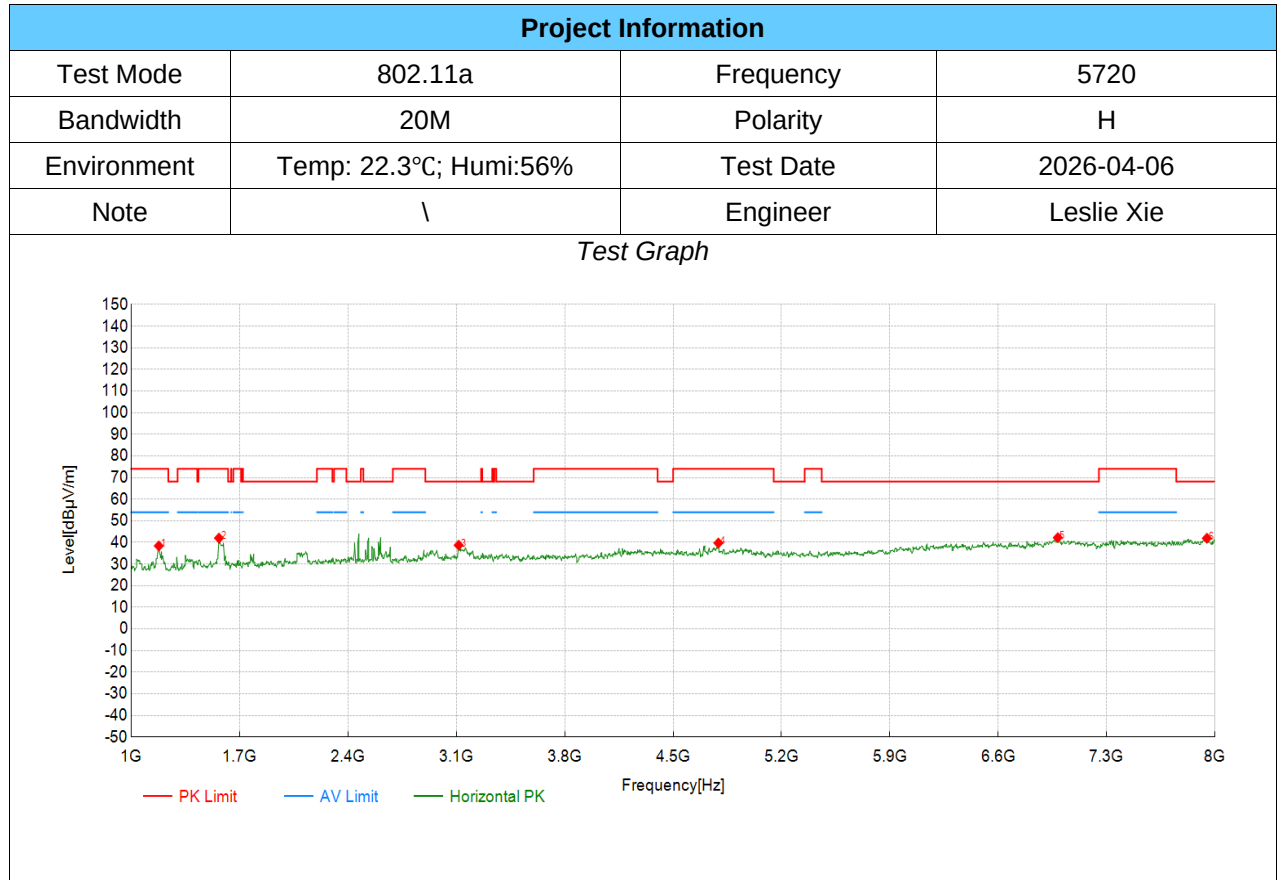

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1178.59	66.39	38.40	-27.99	74.00	35.60	PK	Horizontal	PASS
2	1567.28	68.35	42.03	-26.32	74.00	31.97	PK	Horizontal	PASS
3	3115.06	61.30	38.73	-22.57	68.20	29.47	PK	Horizontal	PASS
4	4792.40	59.58	39.72	-19.86	74.00	34.28	PK	Horizontal	PASS
5	6984.49	55.47	42.22	-13.25	68.20	25.98	PK	Horizontal	PASS
6	7947.47	55.02	41.93	-13.09	68.20	26.27	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

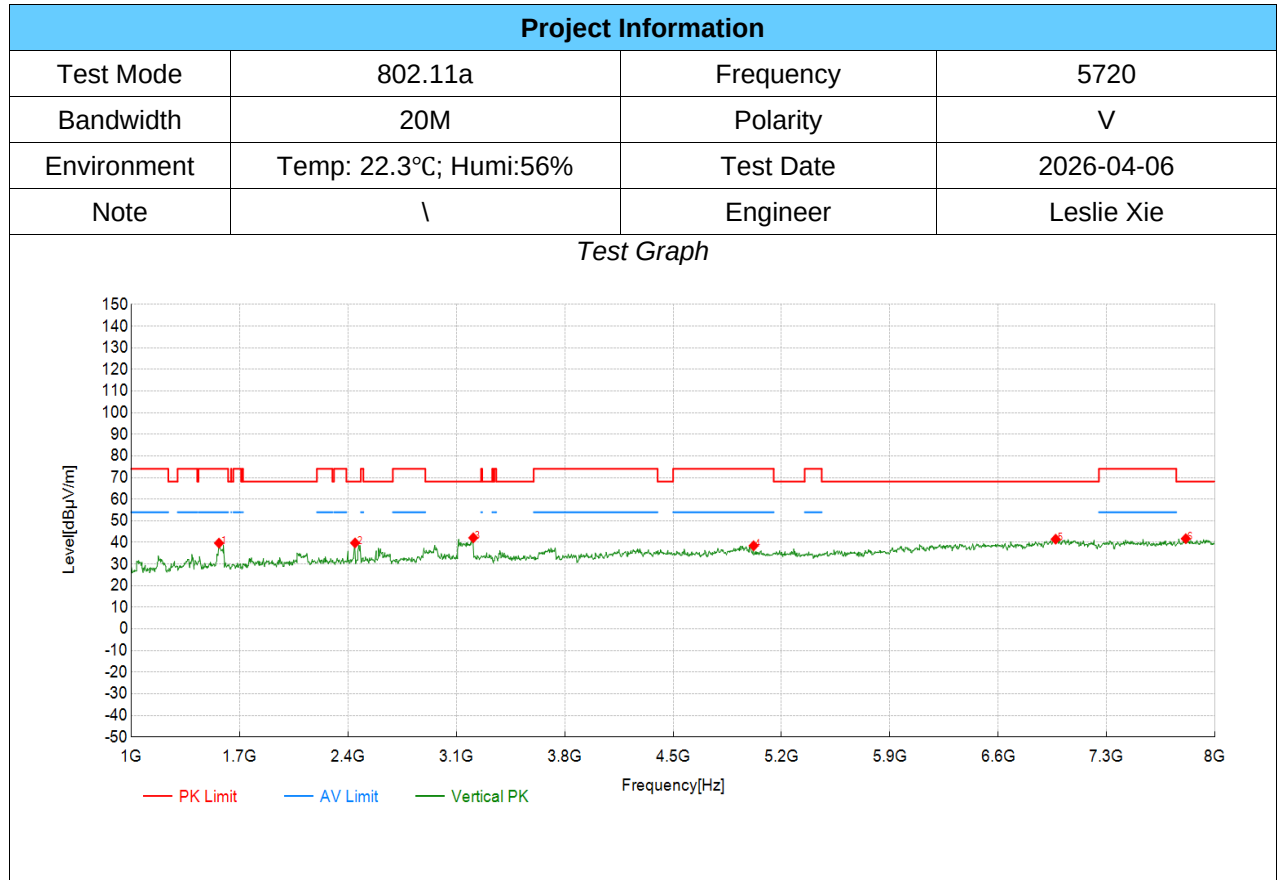

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1567.28	66.01	39.69	-26.32	74.00	34.31	PK	Vertical	PASS
2	2446.22	63.85	39.76	-24.09	68.20	28.44	PK	Vertical	PASS
3	3209.60	64.54	42.13	-22.41	68.20	26.07	PK	Vertical	PASS
4	5020.01	57.41	38.45	-18.96	74.00	35.55	PK	Vertical	PASS
5	6970.49	54.85	41.49	-13.36	68.20	26.71	PK	Vertical	PASS
6	7810.91	55.24	41.74	-13.50	68.20	26.46	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

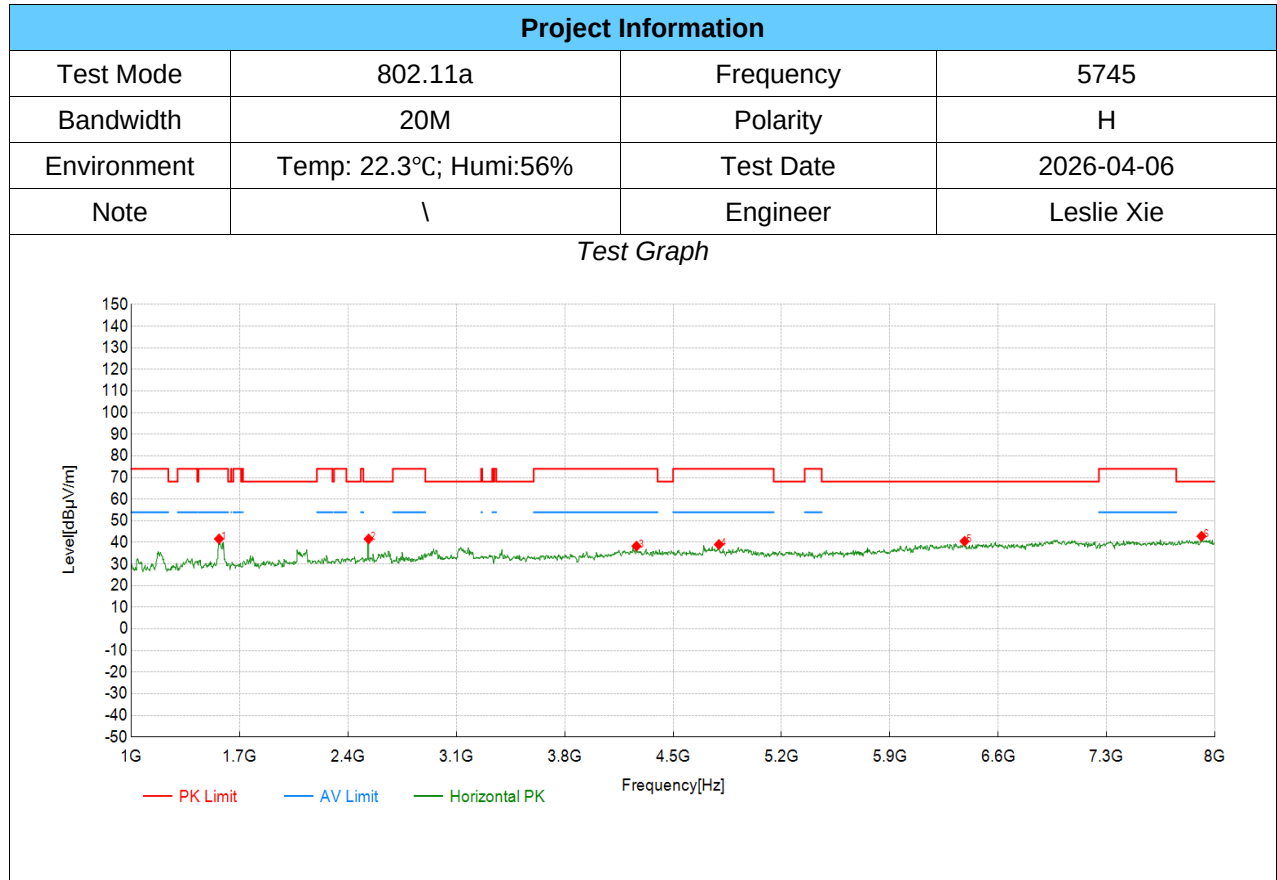

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1567.28	67.97	41.65	-26.32	74.00	32.35	PK	Horizontal	PASS
2	2533.77	65.45	41.62	-23.83	68.20	26.58	PK	Horizontal	PASS
3	4263.63	58.40	38.29	-20.11	74.00	35.71	PK	Horizontal	PASS
4	4795.90	58.90	39.04	-19.86	74.00	34.96	PK	Horizontal	PASS
5	6382.19	56.58	40.55	-16.03	68.20	27.65	PK	Horizontal	PASS
6	7912.46	56.05	42.85	-13.20	68.20	25.35	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level


TX Radiated Test Result

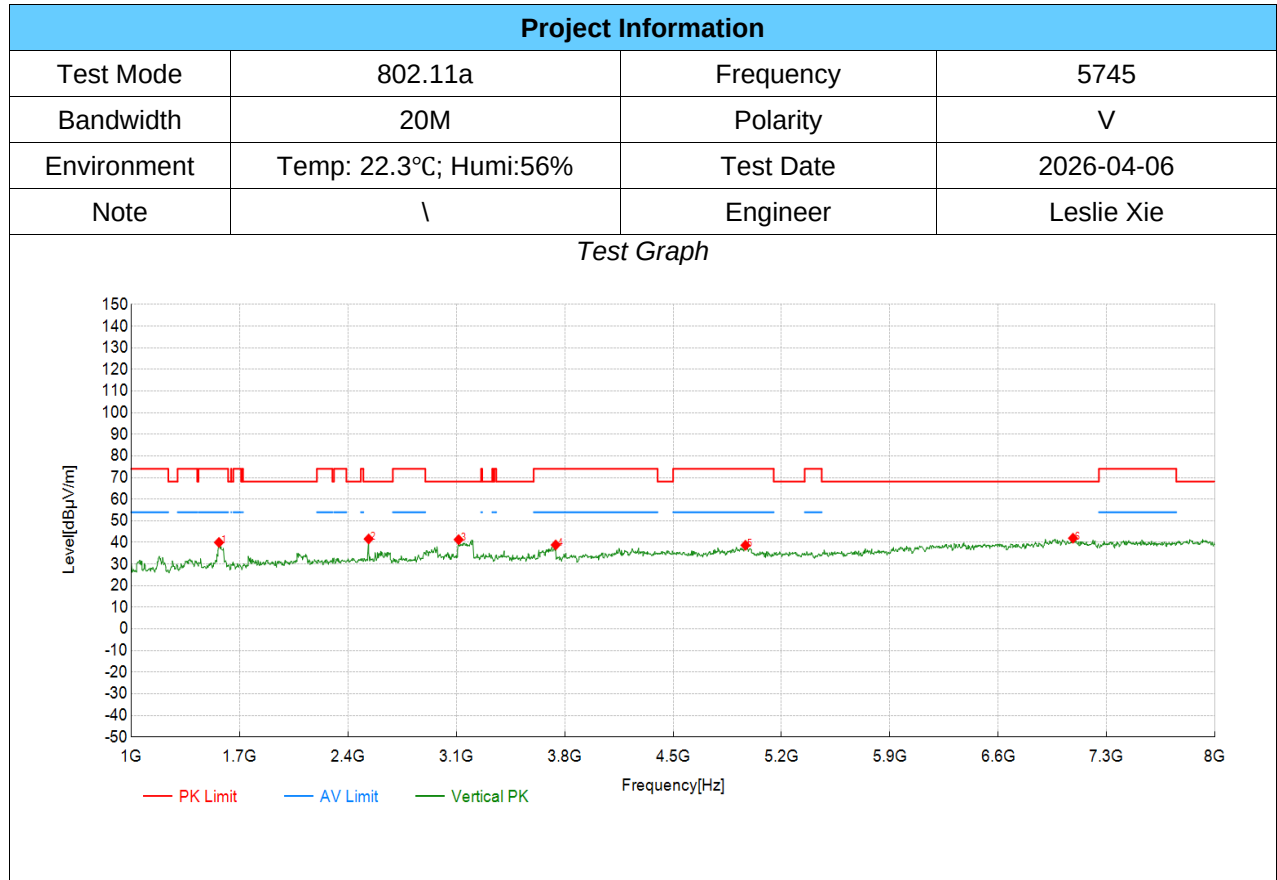

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1567.28	66.31	39.99	-26.32	74.00	34.01	PK	Vertical	PASS
2	2533.77	65.46	41.63	-23.83	68.20	26.57	PK	Vertical	PASS
3	3115.06	63.86	41.29	-22.57	68.20	26.91	PK	Vertical	PASS
4	3741.87	60.75	38.84	-21.91	74.00	35.16	PK	Vertical	PASS
5	4967.48	57.83	38.69	-19.14	74.00	35.31	PK	Vertical	PASS
6	7082.54	55.64	41.96	-13.68	68.20	26.24	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

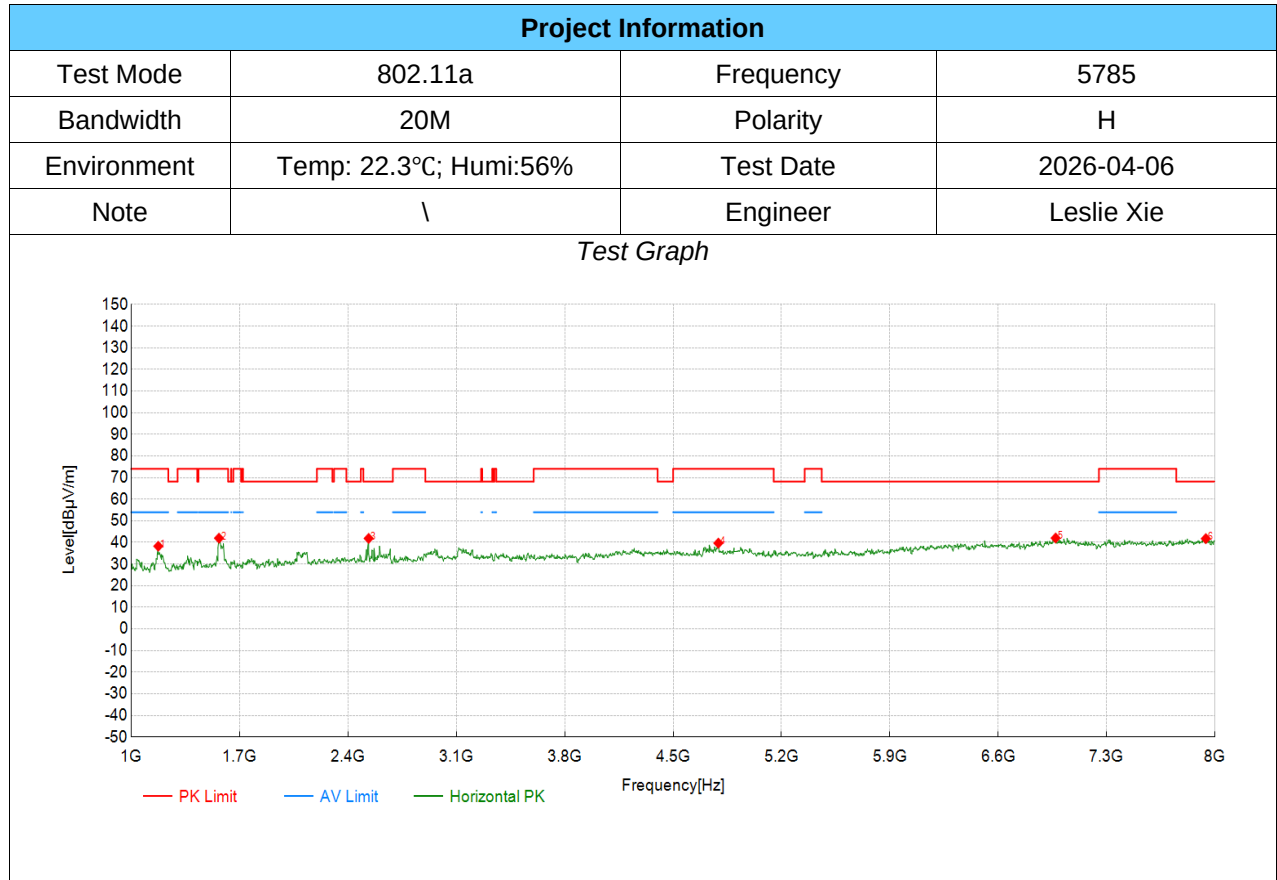

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1175.09	66.28	38.27	-28.01	74.00	35.73	PK	Horizontal	PASS
2	1567.28	68.30	41.98	-26.32	74.00	32.02	PK	Horizontal	PASS
3	2533.77	65.70	41.87	-23.83	68.20	26.33	PK	Horizontal	PASS
4	4792.40	59.55	39.69	-19.86	74.00	34.31	PK	Horizontal	PASS
5	6970.49	55.41	42.05	-13.36	68.20	26.15	PK	Horizontal	PASS
6	7940.47	54.86	41.75	-13.11	68.20	26.45	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

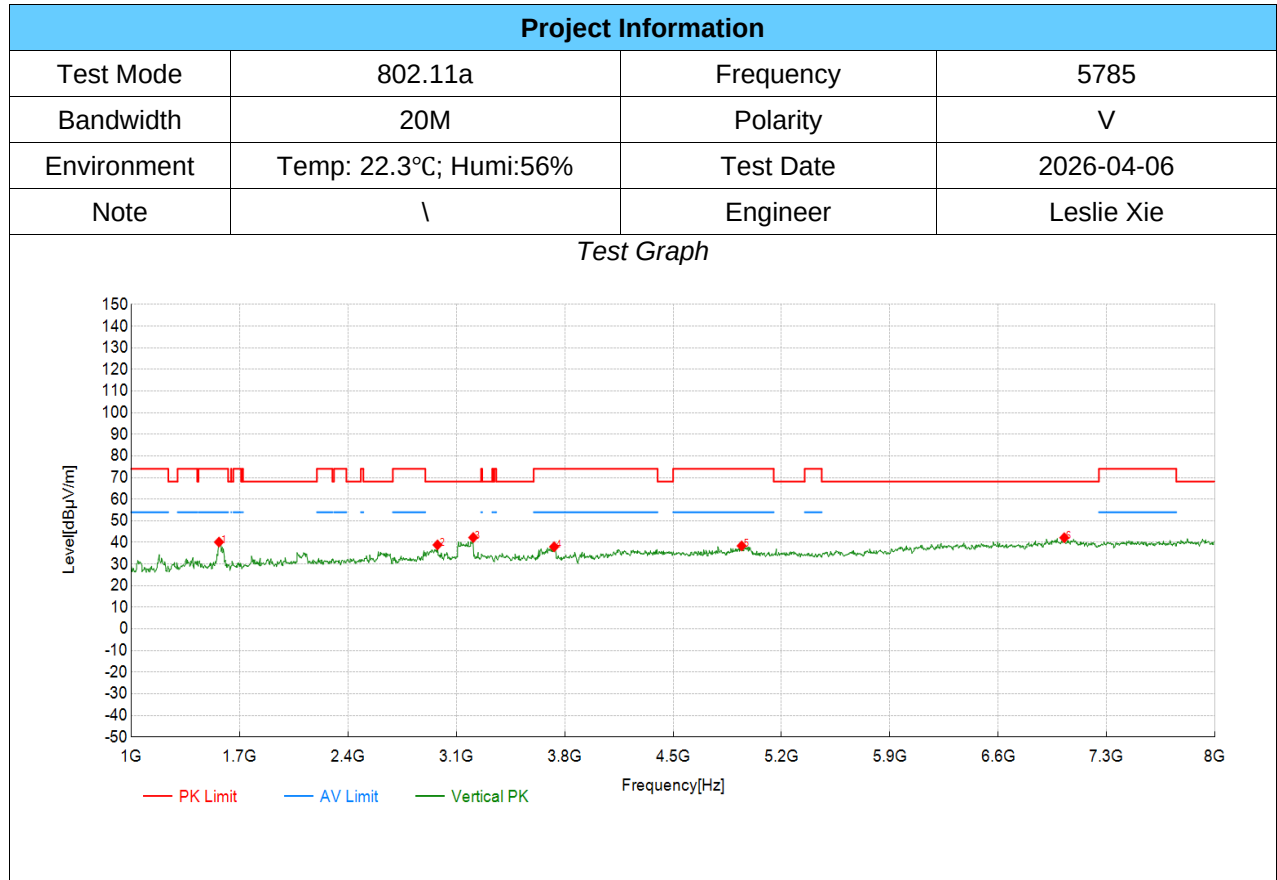

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1567.28	66.50	40.18	-26.32	74.00	33.82	PK	Vertical	PASS
2	2978.49	61.69	38.85	-22.84	68.20	29.35	PK	Vertical	PASS
3	3209.60	64.68	42.27	-22.41	68.20	25.93	PK	Vertical	PASS
4	3731.37	59.92	37.98	-21.94	74.00	36.02	PK	Vertical	PASS
5	4942.97	57.63	38.40	-19.23	74.00	35.60	PK	Vertical	PASS
6	7026.51	55.48	42.18	-13.30	68.20	26.02	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

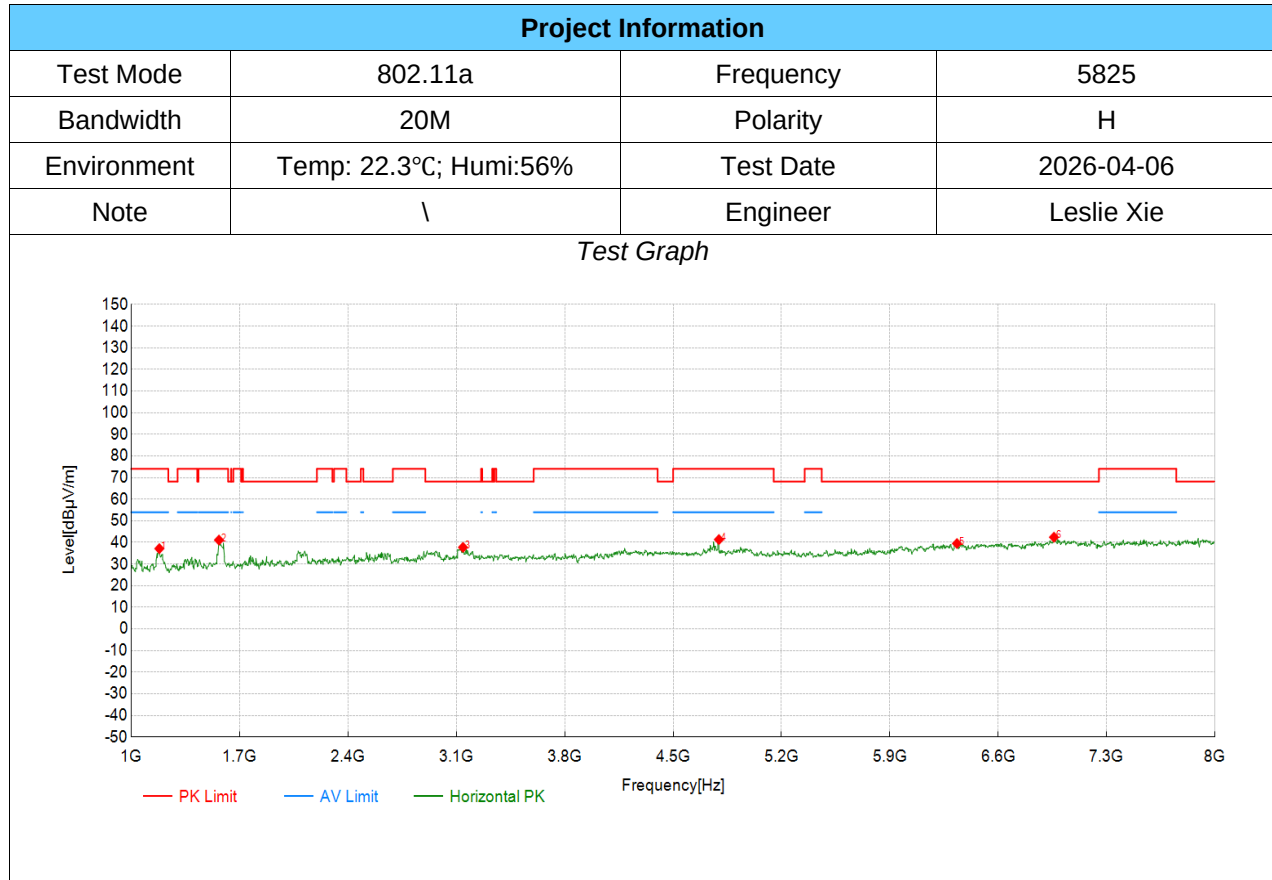

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1182.09	65.12	37.15	-27.97	74.00	36.85	PK	Horizontal	PASS
2	1567.28	67.42	41.10	-26.32	74.00	32.90	PK	Horizontal	PASS
3	3143.07	60.24	37.72	-22.52	68.20	30.48	PK	Horizontal	PASS
4	4795.90	61.20	41.34	-19.86	74.00	32.66	PK	Horizontal	PASS
5	6333.17	55.65	39.51	-16.14	68.20	28.69	PK	Horizontal	PASS
6	6959.98	55.87	42.42	-13.45	68.20	25.78	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

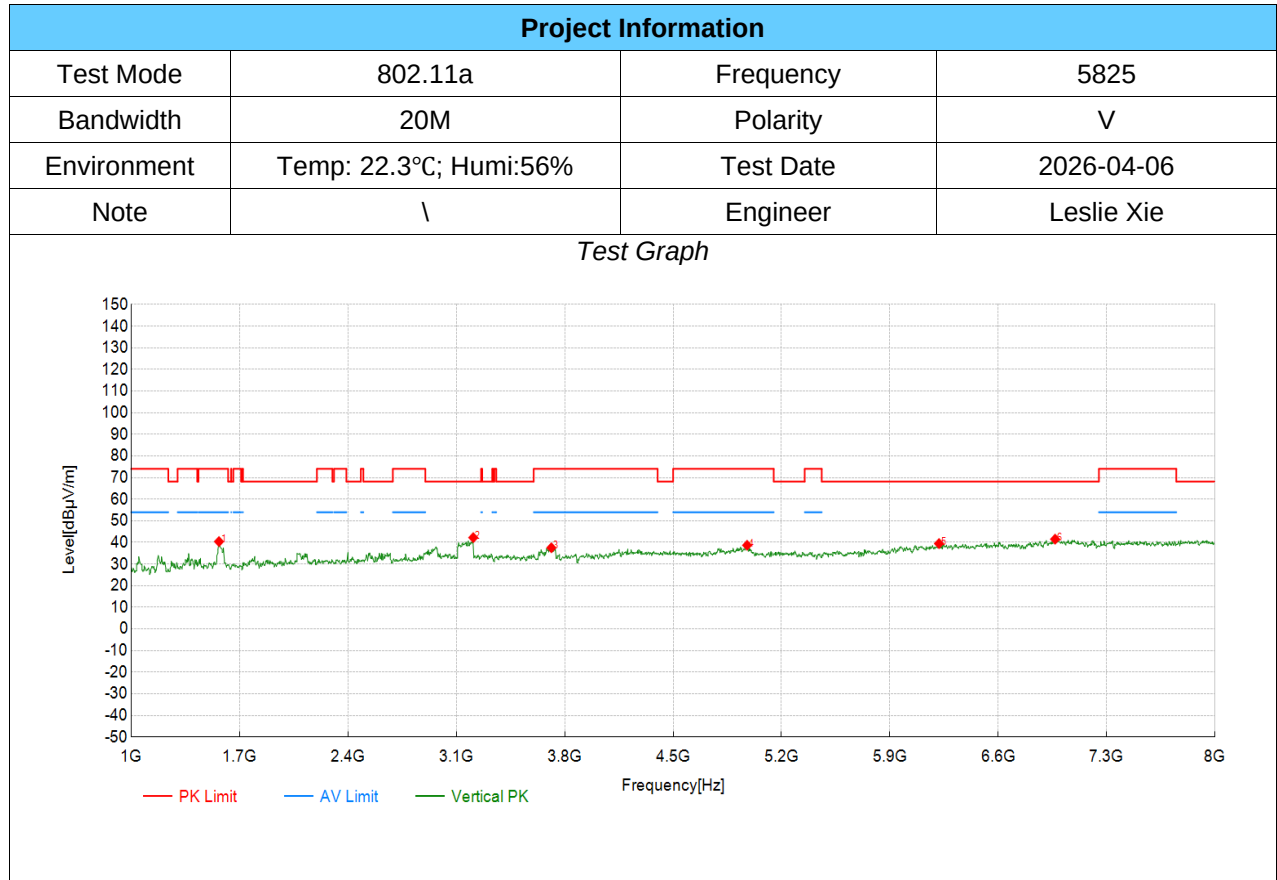


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1567.28	66.72	40.40	-26.32	74.00	33.60	PK	Vertical	PASS
2	3209.60	64.64	42.23	-22.41	68.20	25.97	PK	Vertical	PASS
3	3713.86	59.55	37.55	-22.00	74.00	36.45	PK	Vertical	PASS
4	4977.99	57.80	38.70	-19.10	74.00	35.30	PK	Vertical	PASS
5	6217.61	55.90	39.48	-16.42	68.20	28.72	PK	Vertical	PASS
6	6966.98	54.88	41.50	-13.38	68.20	26.70	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

8.3. SPURIOUS EMISSIONS(8 GHZ~18 GHZ)


TX Radiated Test Result

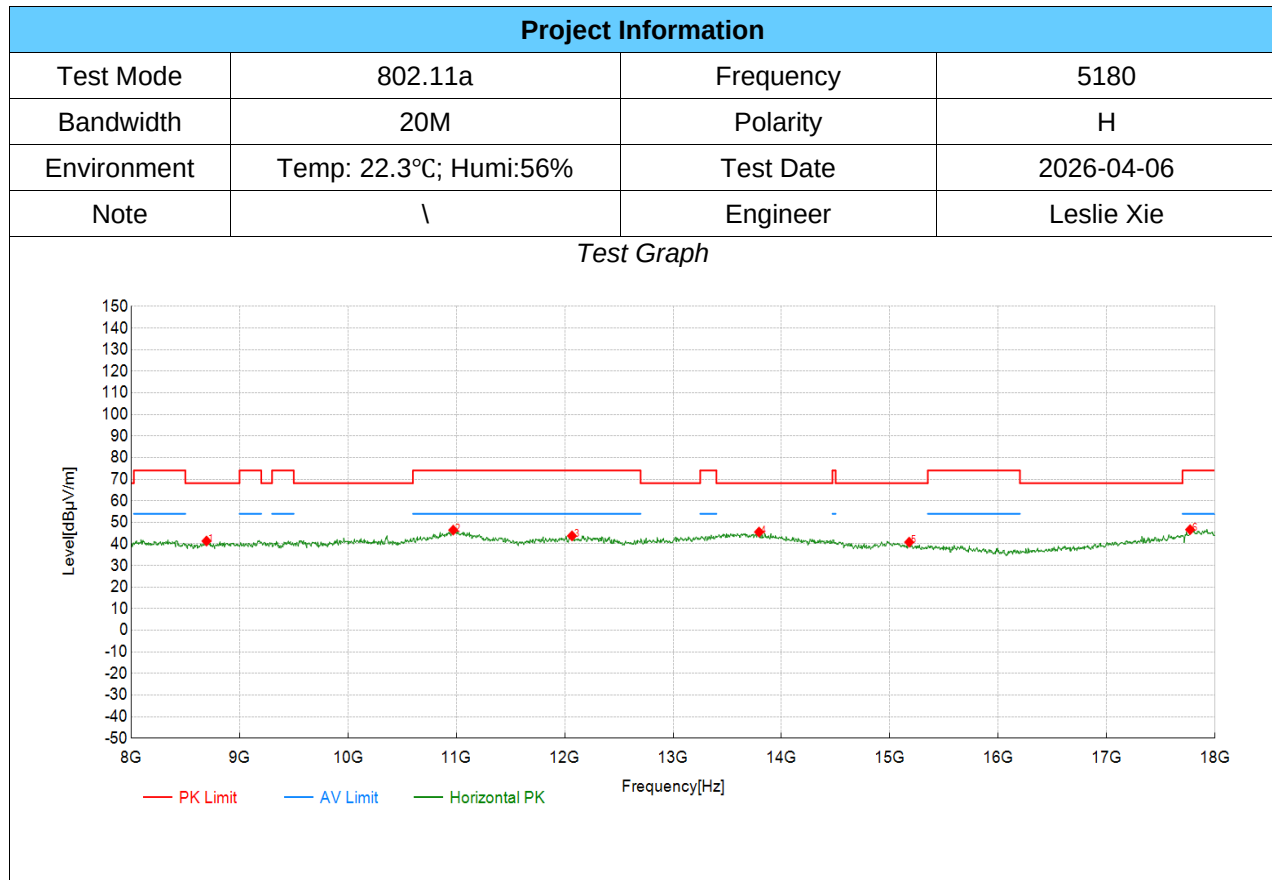

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	8695.35	52.78	41.35	-11.43	68.20	26.85	PK	Horizontal	PASS
2	10971.49	49.63	46.42	-3.21	74.00	27.58	PK	Horizontal	PASS
3	12067.03	51.33	43.74	-7.59	74.00	30.26	PK	Horizontal	PASS
4	13792.90	53.07	45.53	-7.54	68.20	22.67	PK	Horizontal	PASS
5	15178.59	51.37	40.84	-10.53	68.20	27.36	PK	Horizontal	PASS
6	17769.88	48.41	46.62	-1.79	74.00	27.38	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

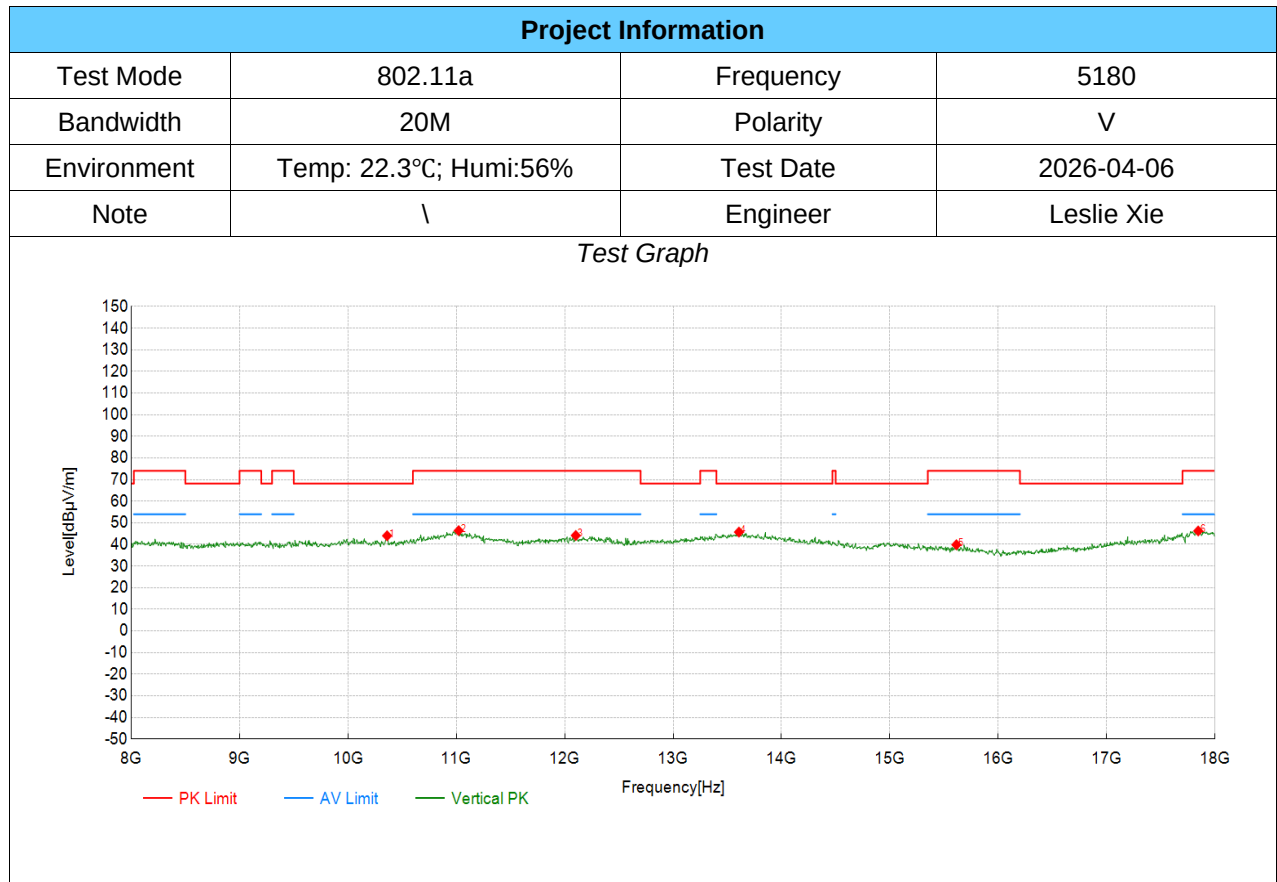

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10361.18	53.20	44.02	-9.18	68.20	24.18	PK	Vertical	PASS
2	11021.51	49.44	46.39	-3.05	74.00	27.61	PK	Vertical	PASS
3	12102.05	51.80	44.15	-7.65	74.00	29.85	PK	Vertical	PASS
4	13607.80	53.68	45.72	-7.96	68.20	22.48	PK	Vertical	PASS
5	15613.81	50.87	39.86	-11.01	74.00	34.14	PK	Vertical	PASS
6	17844.92	47.57	46.23	-1.34	74.00	27.77	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

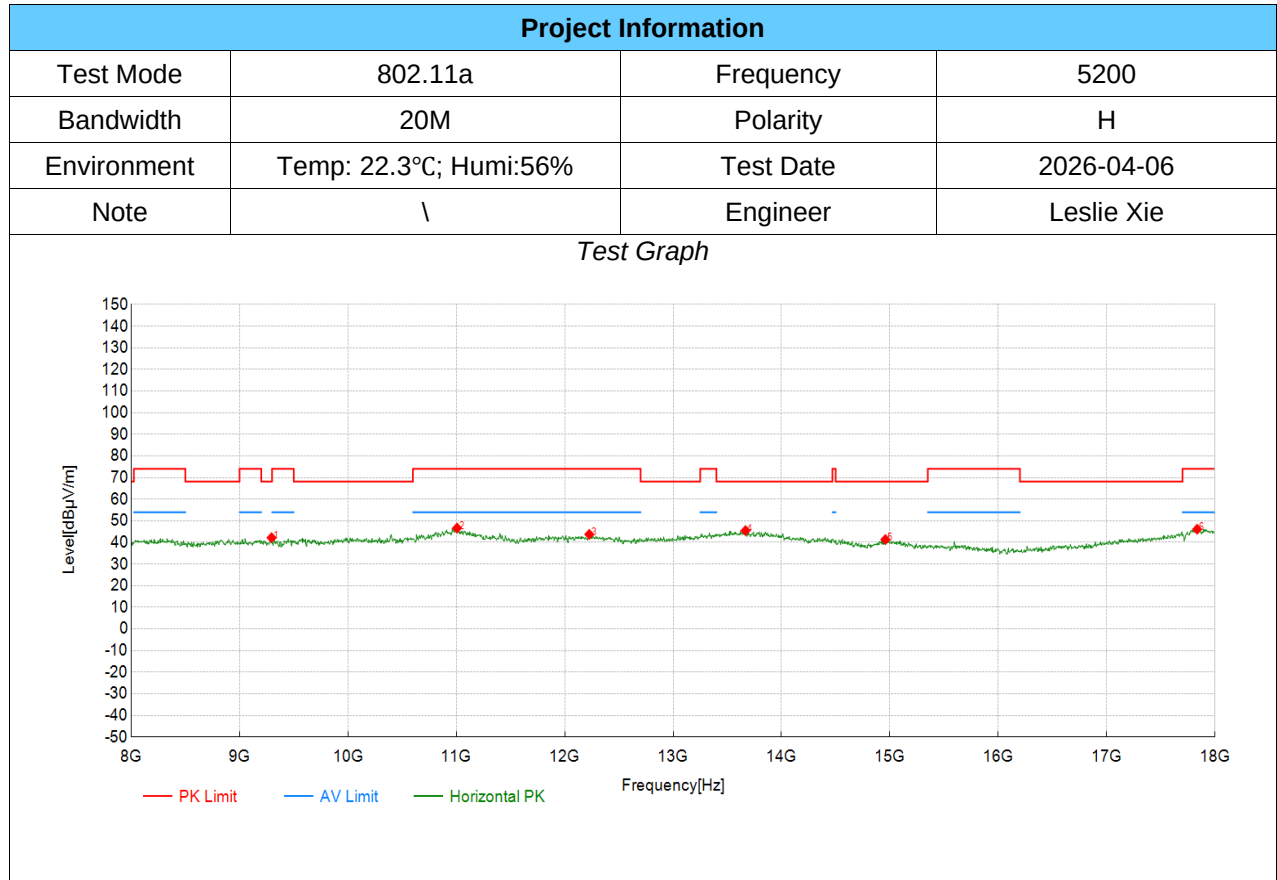

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9295.65	52.01	42.20	-9.81	68.20	26.00	PK	Horizontal	PASS
2	11006.50	49.58	46.63	-2.95	74.00	27.37	PK	Horizontal	PASS
3	12227.11	51.57	43.72	-7.85	74.00	30.28	PK	Horizontal	PASS
4	13667.83	53.30	45.48	-7.82	68.20	22.72	PK	Horizontal	PASS
5	14958.48	50.87	41.35	-9.52	68.20	26.85	PK	Horizontal	PASS
6	17834.92	47.46	46.11	-1.35	74.00	27.89	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

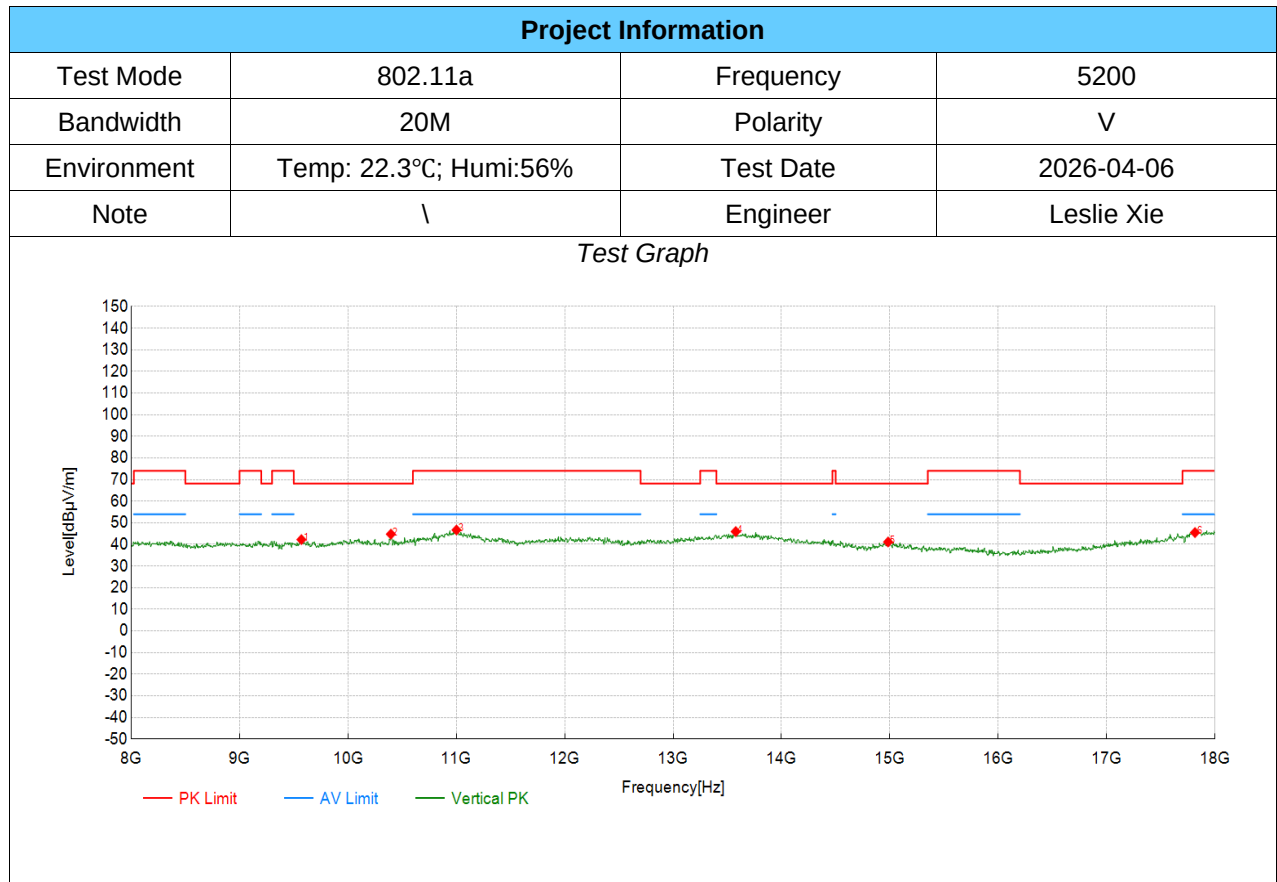

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9570.79	51.81	42.24	-9.57	68.20	25.96	PK	Vertical	PASS
2	10396.20	53.80	44.77	-9.03	68.20	23.43	PK	Vertical	PASS
3	11001.50	49.59	46.68	-2.91	74.00	27.32	PK	Vertical	PASS
4	13577.79	53.93	45.94	-7.99	68.20	22.26	PK	Vertical	PASS
5	14983.49	50.58	41.14	-9.44	68.20	27.06	PK	Vertical	PASS
6	17814.91	46.85	45.48	-1.37	74.00	28.52	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

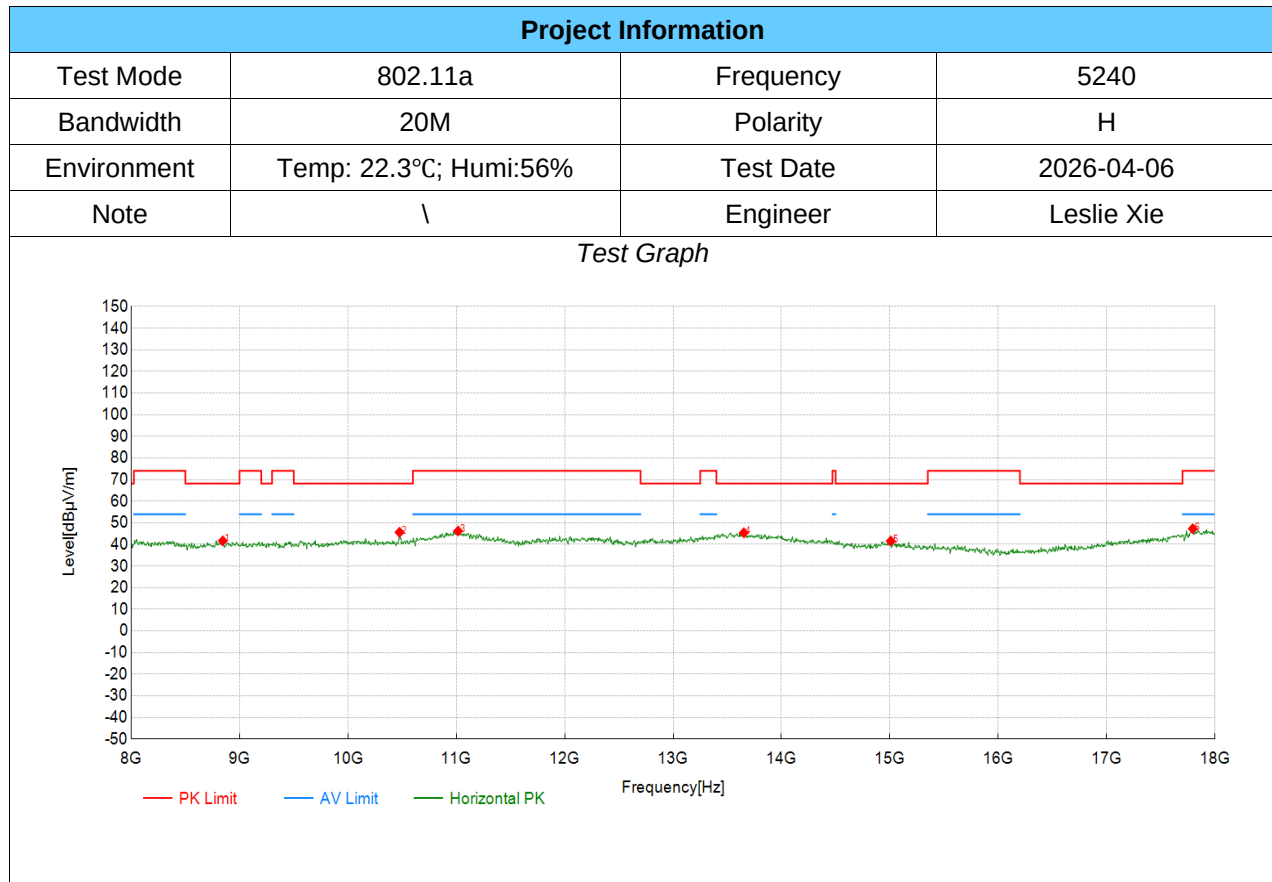

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	8845.42	52.31	41.67	-10.64	68.20	26.53	PK	Horizontal	PASS
2	10476.24	54.22	45.63	-8.59	68.20	22.57	PK	Horizontal	PASS
3	11016.51	49.23	46.21	-3.02	74.00	27.79	PK	Horizontal	PASS
4	13652.83	53.23	45.37	-7.86	68.20	22.83	PK	Horizontal	PASS
5	15008.50	51.04	41.59	-9.45	68.20	26.61	PK	Horizontal	PASS
6	17794.90	48.70	47.25	-1.45	74.00	26.75	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level


TX Radiated Test Result

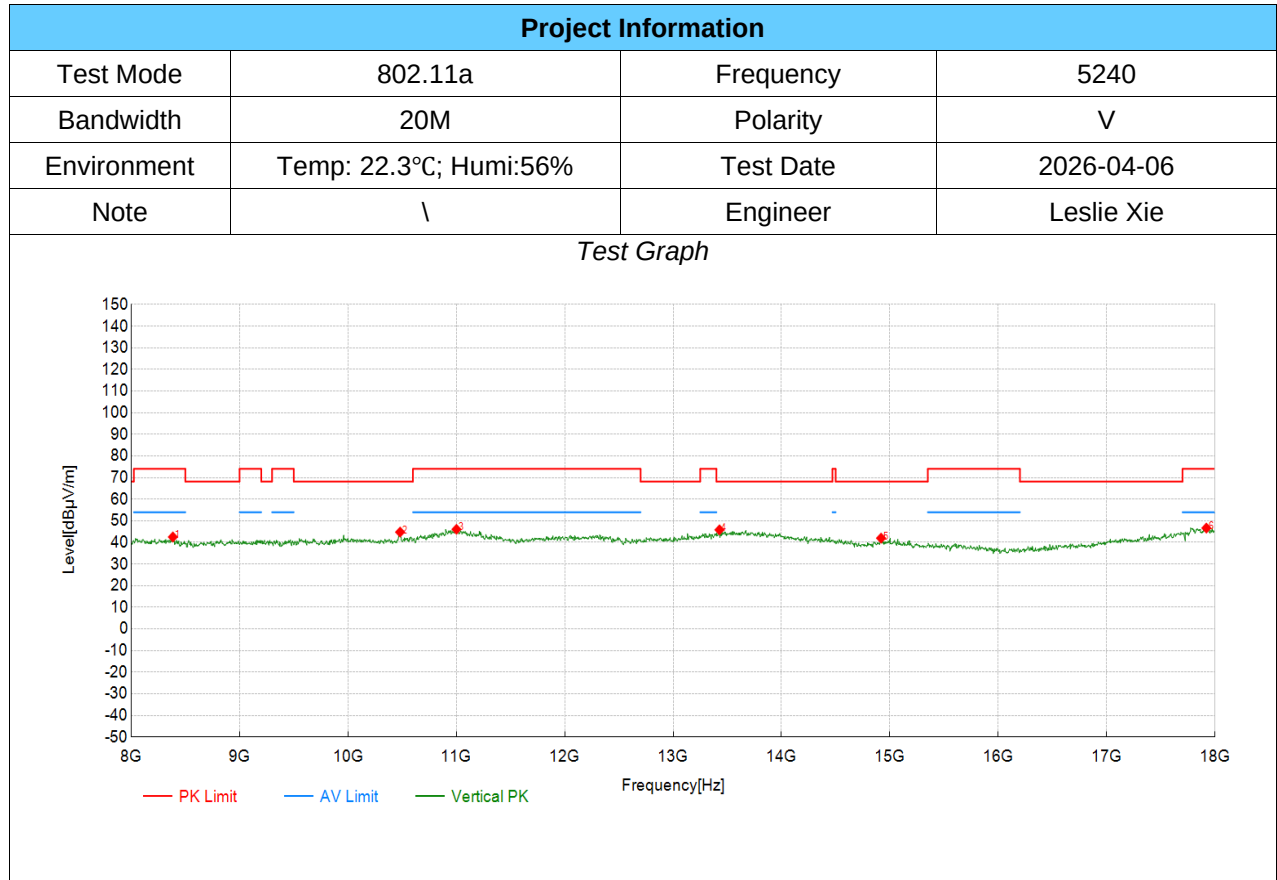

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	8385.19	53.80	42.52	-11.28	74.00	31.48	PK	Vertical	PASS
2	10481.24	53.36	44.80	-8.56	68.20	23.40	PK	Vertical	PASS
3	11001.50	48.98	46.07	-2.91	74.00	27.93	PK	Vertical	PASS
4	13427.71	54.01	45.83	-8.18	68.20	22.37	PK	Vertical	PASS
5	14918.46	51.61	41.99	-9.62	68.20	26.21	PK	Vertical	PASS
6	17919.96	47.90	46.64	-1.26	74.00	27.36	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

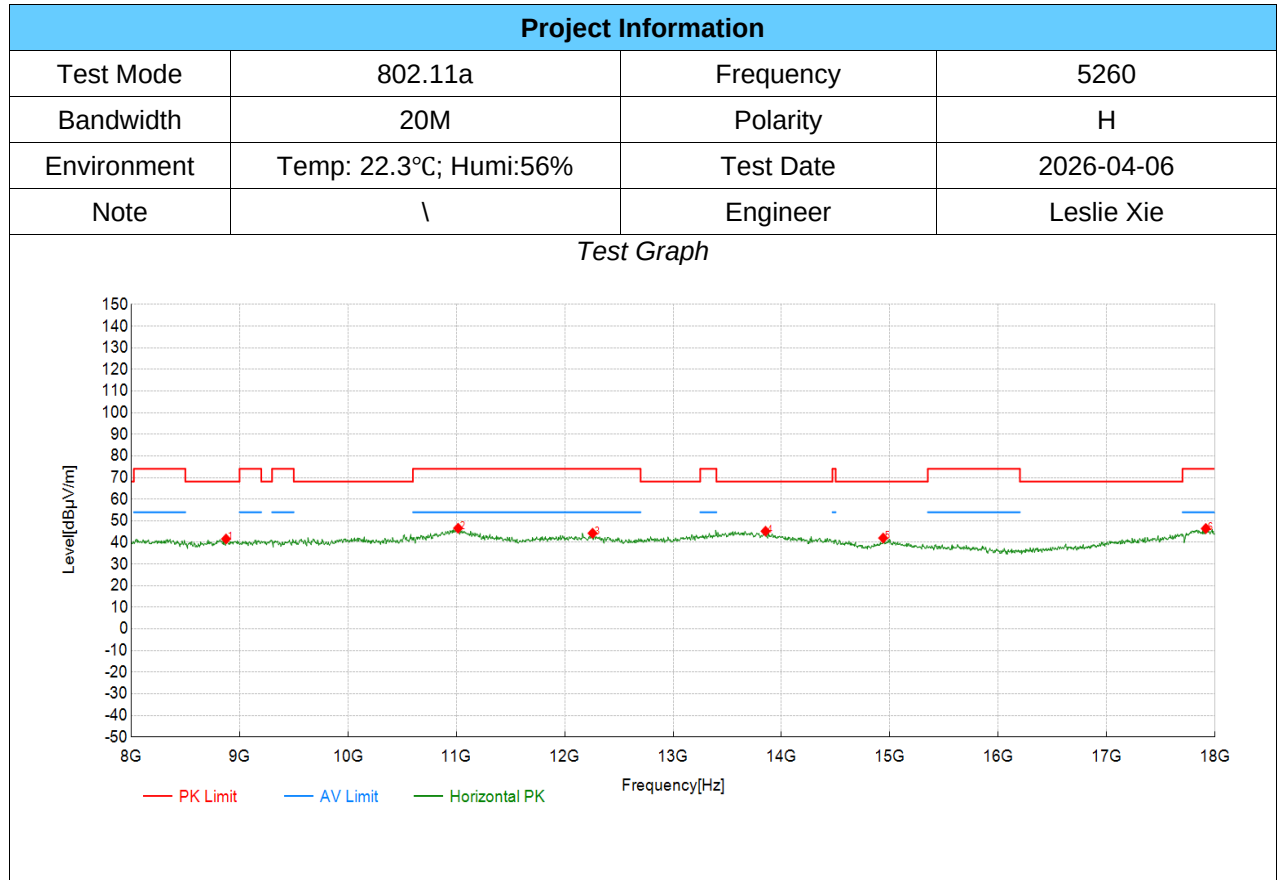

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	8875.44	52.31	41.61	-10.70	68.20	26.59	PK	Horizontal	PASS
2	11016.51	49.60	46.58	-3.02	74.00	27.42	PK	Horizontal	PASS
3	12257.13	52.10	44.25	-7.85	74.00	29.75	PK	Horizontal	PASS
4	13852.93	52.80	45.19	-7.61	68.20	23.01	PK	Horizontal	PASS
5	14938.47	51.60	42.02	-9.58	68.20	26.18	PK	Horizontal	PASS
6	17914.96	47.70	46.43	-1.27	74.00	27.57	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

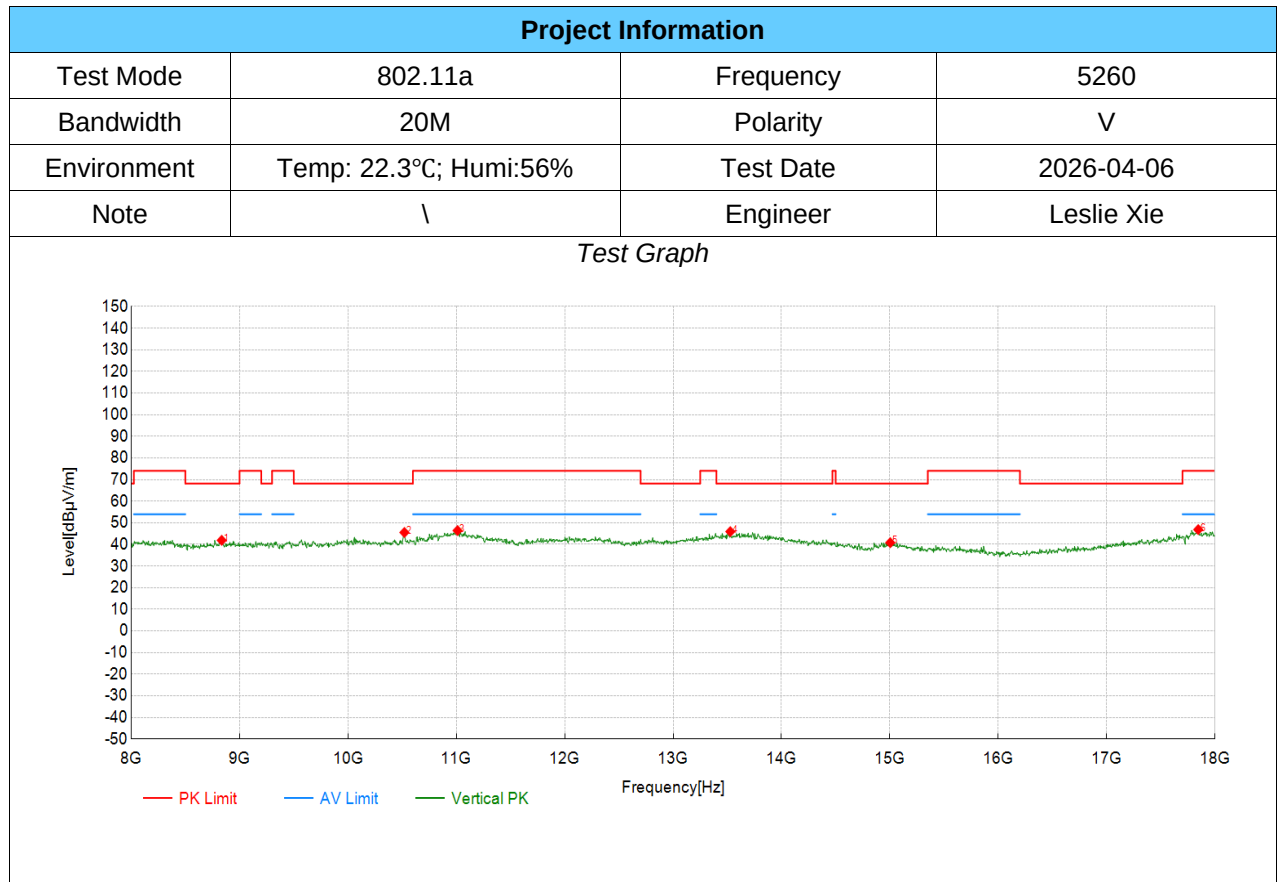

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	8835.42	52.53	41.91	-10.62	68.20	26.29	PK	Vertical	PASS
2	10521.26	53.71	45.54	-8.17	68.20	22.66	PK	Vertical	PASS
3	11011.51	49.42	46.43	-2.99	74.00	27.57	PK	Vertical	PASS
4	13527.76	53.92	45.93	-7.99	68.20	22.27	PK	Vertical	PASS
5	15003.50	50.24	40.82	-9.42	68.20	27.38	PK	Vertical	PASS
6	17844.92	48.19	46.85	-1.34	74.00	27.15	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

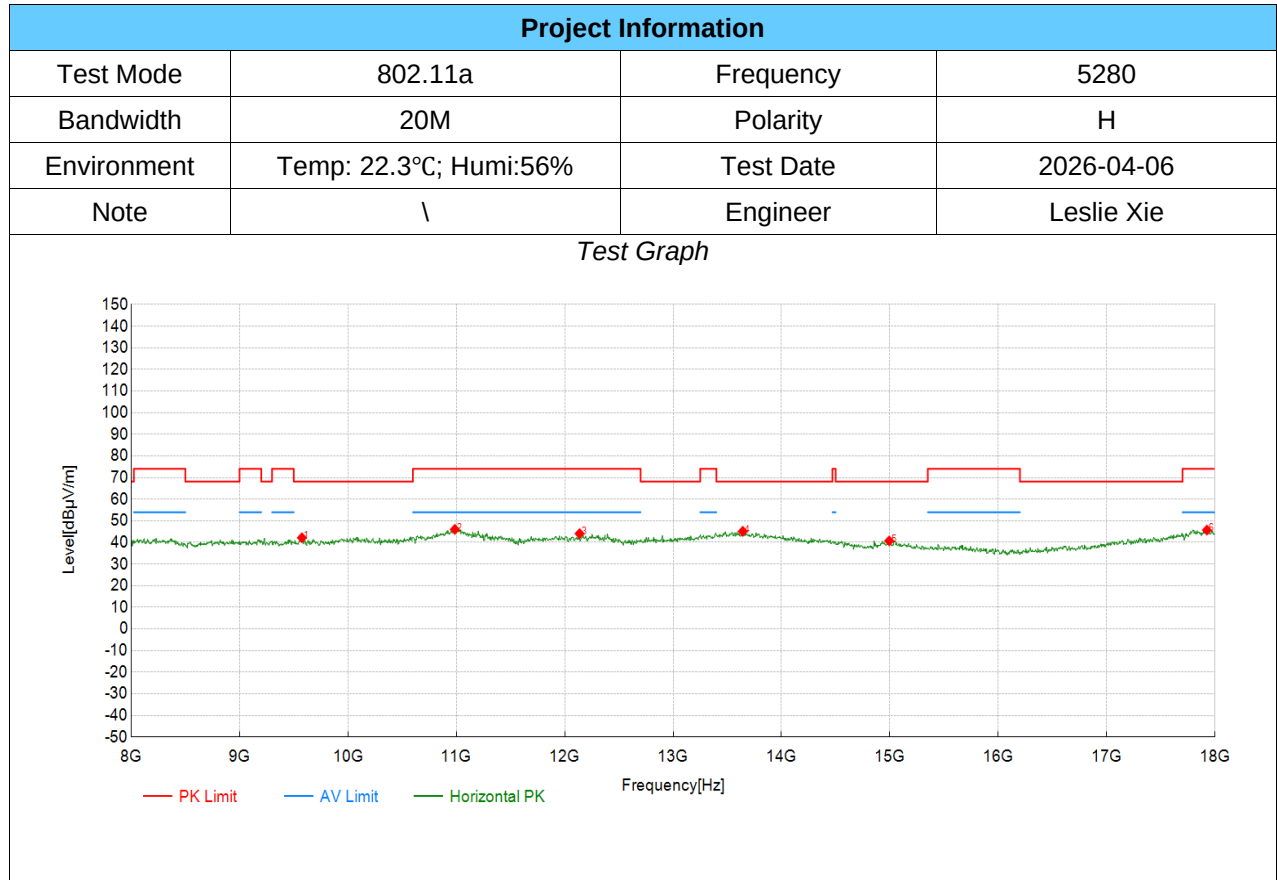

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9575.79	51.75	42.17	-9.58	68.20	26.03	PK	Horizontal	PASS
2	10986.49	49.09	46.04	-3.05	74.00	27.96	PK	Horizontal	PASS
3	12137.07	51.79	44.08	-7.71	74.00	29.92	PK	Horizontal	PASS
4	13642.82	53.02	45.14	-7.88	68.20	23.06	PK	Horizontal	PASS
5	14993.50	50.14	40.72	-9.42	68.20	27.48	PK	Horizontal	PASS
6	17924.96	46.99	45.73	-1.26	74.00	28.27	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level


TX Radiated Test Result

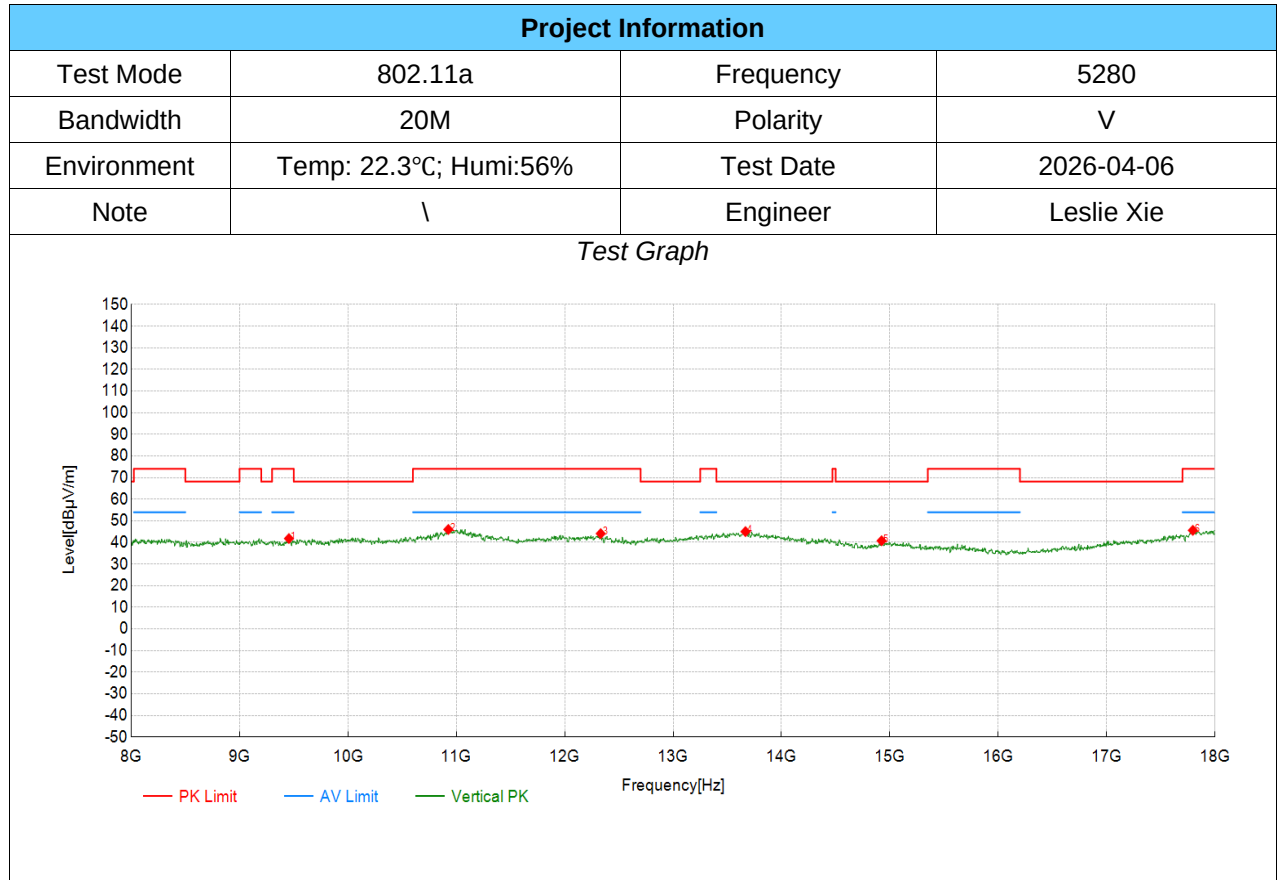

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9455.73	51.54	41.80	-9.74	74.00	32.20	PK	Vertical	PASS
2	10926.46	49.71	46.00	-3.71	74.00	28.00	PK	Vertical	PASS
3	12332.17	51.95	44.09	-7.86	74.00	29.91	PK	Vertical	PASS
4	13667.83	52.82	45.00	-7.82	68.20	23.20	PK	Vertical	PASS
5	14923.46	50.38	40.77	-9.61	68.20	27.43	PK	Vertical	PASS
6	17794.90	47.04	45.59	-1.45	74.00	28.41	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

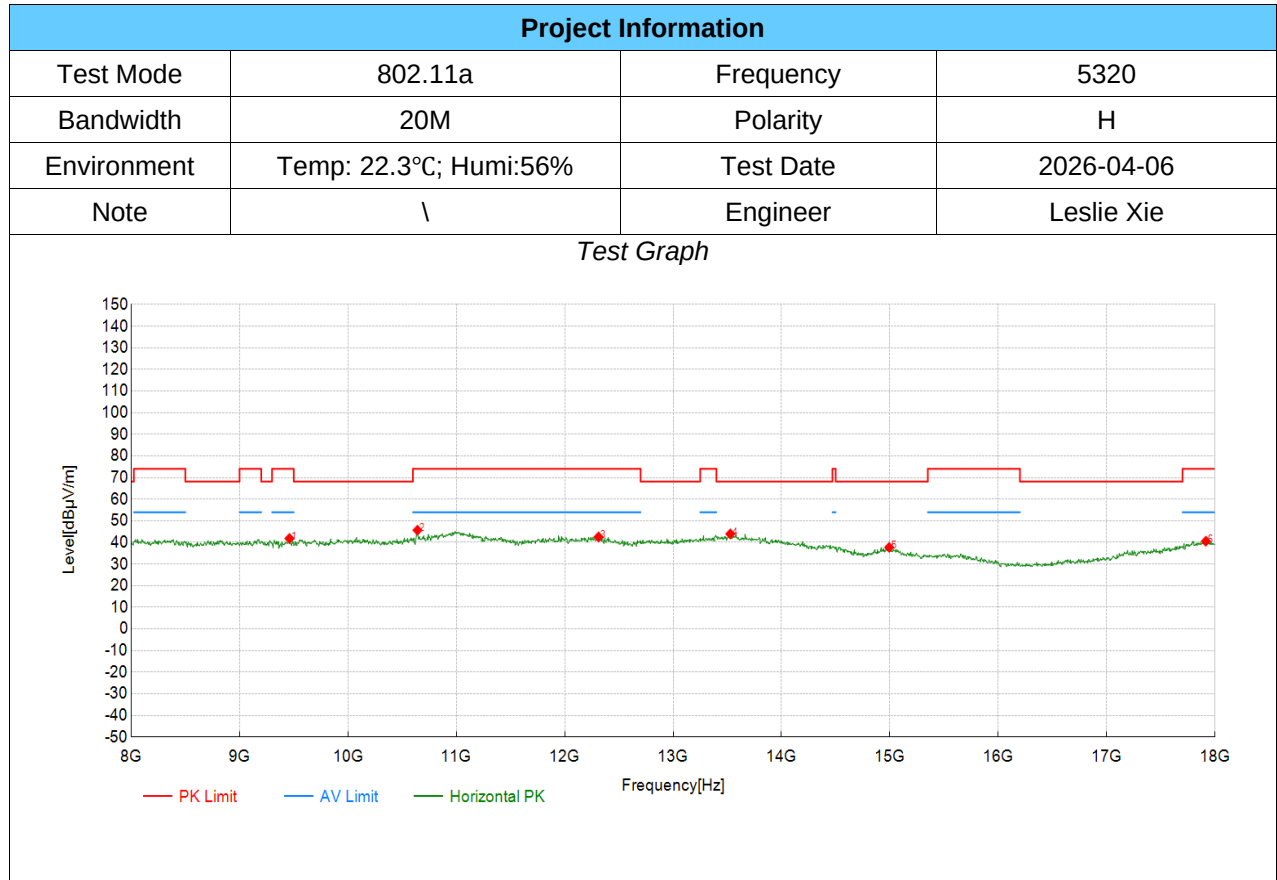

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9460.73	51.58	41.84	-9.74	74.00	32.16	PK	Horizontal	PASS
2	10641.32	52.35	45.66	-6.69	74.00	28.34	PK	Horizontal	PASS
3	12312.16	50.40	42.54	-7.86	74.00	31.46	PK	Horizontal	PASS
4	13527.76	51.93	43.94	-7.99	68.20	24.26	PK	Horizontal	PASS
5	14993.50	47.16	37.74	-9.42	68.20	30.46	PK	Horizontal	PASS
6	17914.96	41.83	40.56	-1.27	74.00	33.44	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

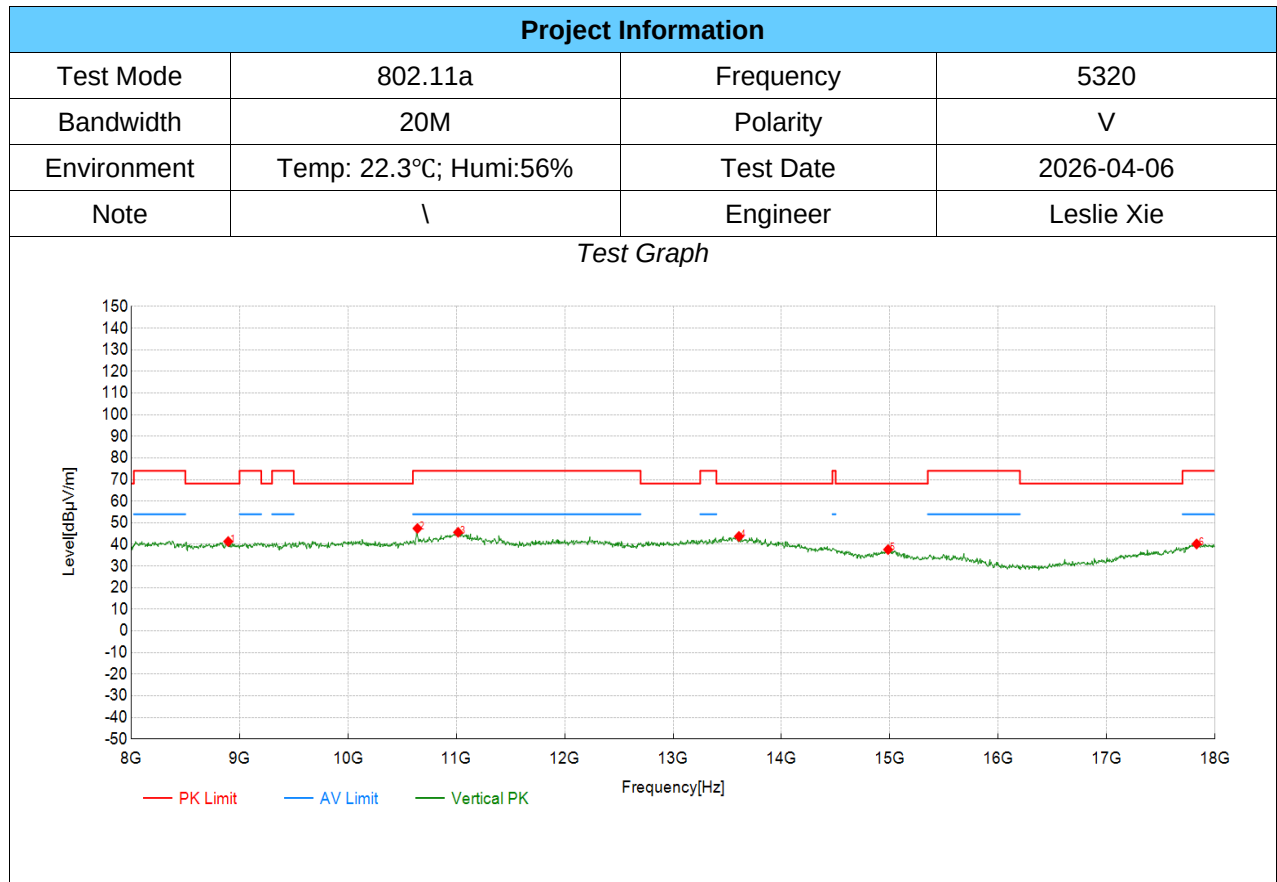

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	8895.45	52.10	41.35	-10.75	68.20	26.85	PK	Vertical	PASS
2	10641.32	54.09	47.40	-6.69	74.00	26.60	PK	Vertical	PASS
3	11016.51	48.63	45.61	-3.02	74.00	28.39	PK	Vertical	PASS
4	13607.80	51.65	43.69	-7.96	68.20	24.51	PK	Vertical	PASS
5	14983.49	47.06	37.62	-9.44	68.20	30.58	PK	Vertical	PASS
6	17829.91	41.57	40.22	-1.35	74.00	33.78	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

TX Radiated Test Result

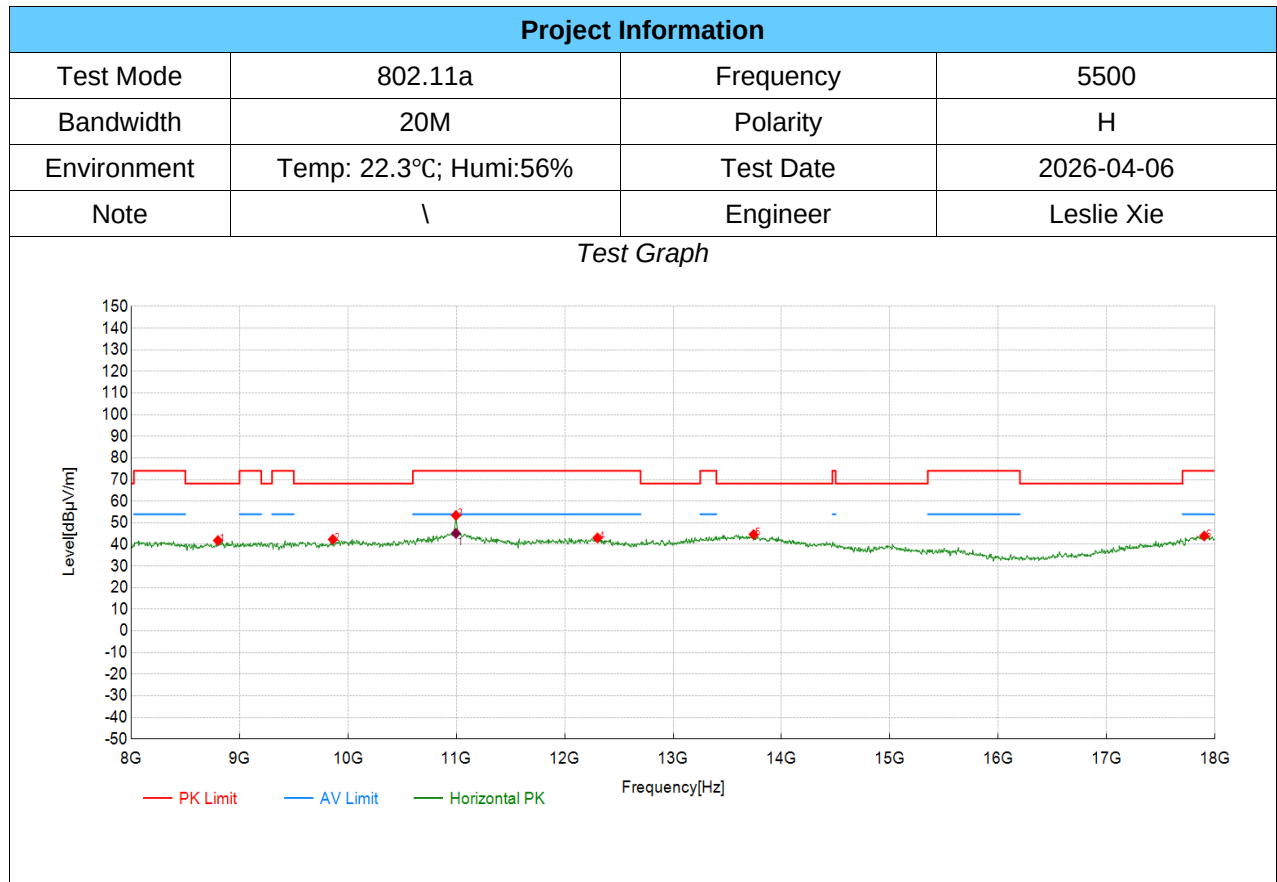


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	8800.40	52.35	41.81	-10.54	68.20	26.39	PK	Horizontal	PASS
2	9860.93	52.39	42.34	-10.05	68.20	25.86	PK	Horizontal	PASS
3	10996.50	56.35	53.41	-2.94	74.00	20.59	PK	Horizontal	PASS
4	12302.15	50.89	43.03	-7.86	74.00	30.97	PK	Horizontal	PASS
5	13742.87	52.25	44.59	-7.66	68.20	23.61	PK	Horizontal	PASS
6	17899.95	45.17	43.89	-1.28	74.00	30.11	PK	Horizontal	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	10996.50	-2.94	48.07	45.13	54.00	8.87	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

TX Radiated Test Result

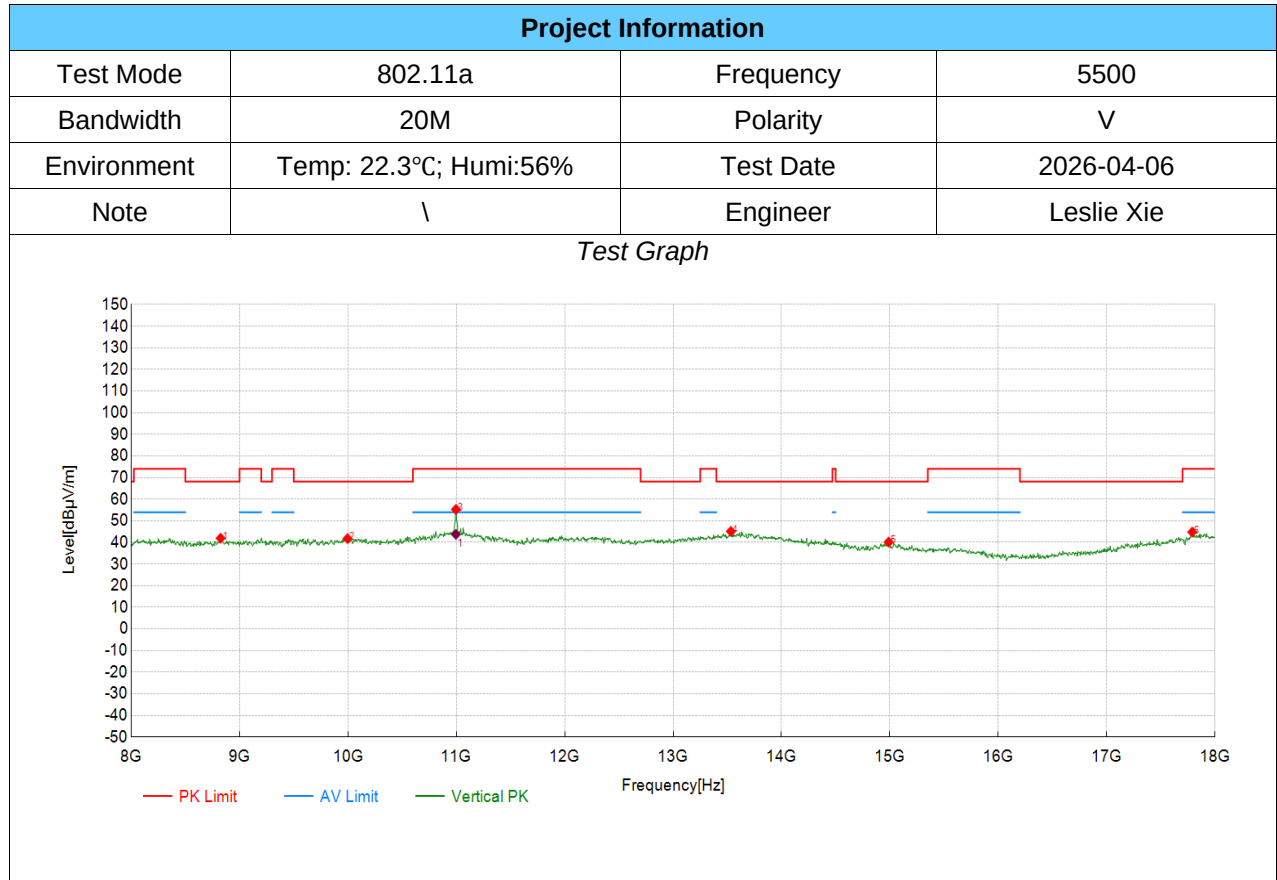


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	8825.41	52.55	41.96	-10.59	68.20	26.24	PK	Vertical	PASS
2	9996.00	50.81	41.80	-9.01	68.20	26.40	PK	Vertical	PASS
3	10996.50	58.22	55.28	-2.94	74.00	18.72	PK	Vertical	PASS
4	13532.77	53.10	45.10	-8.00	68.20	23.10	PK	Vertical	PASS
5	14988.49	49.60	40.16	-9.44	68.20	28.04	PK	Vertical	PASS
6	17789.89	46.34	44.82	-1.52	74.00	29.18	PK	Vertical	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	10996.50	-2.94	46.66	43.72	54.00	10.28	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

TX Radiated Test Result

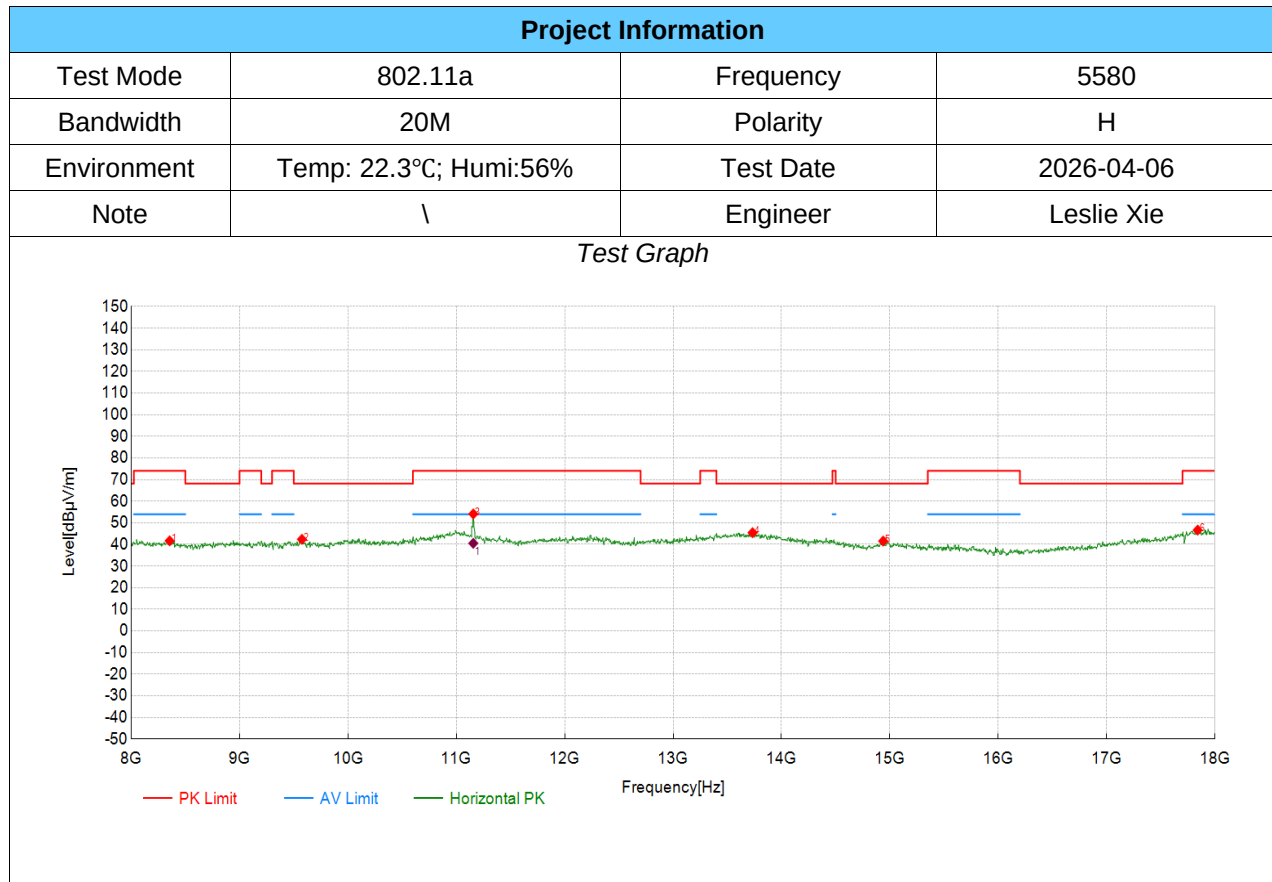

PEAK Data List


NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	8355.18	53.16	41.67	-11.49	74.00	32.33	PK	Horizontal	PASS
2	9575.79	51.95	42.37	-9.58	68.20	25.83	PK	Horizontal	PASS
3	11156.58	58.17	54.12	-4.05	74.00	19.88	PK	Horizontal	PASS
4	13732.87	53.13	45.44	-7.69	68.20	22.76	PK	Horizontal	PASS
5	14938.47	51.14	41.56	-9.58	68.20	26.64	PK	Horizontal	PASS
6	17839.92	47.96	46.62	-1.34	74.00	27.38	PK	Horizontal	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	11156.58	-4.05	44.59	40.54	54.00	13.46	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level


TX Radiated Test Result

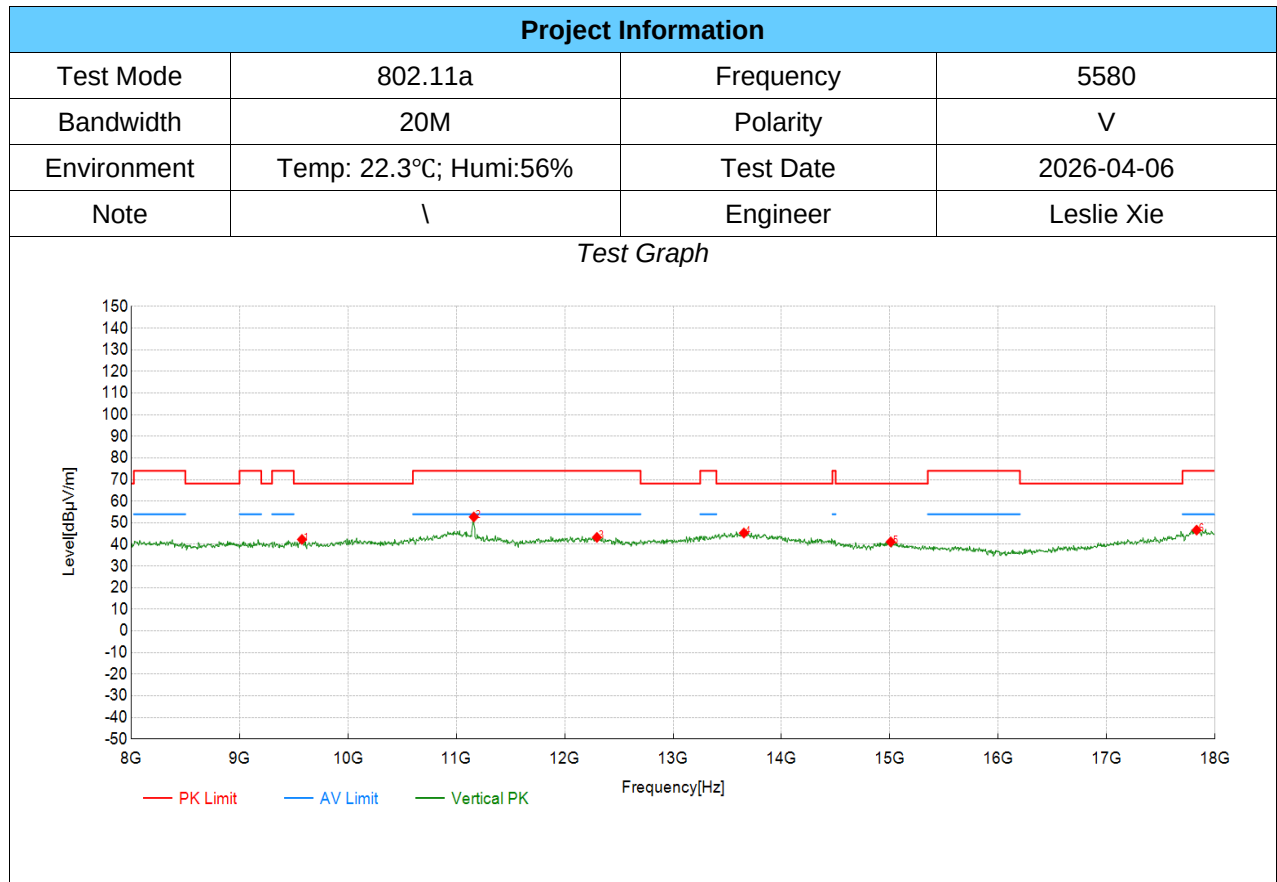

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9575.79	51.88	42.30	-9.58	68.20	25.90	PK	Vertical	PASS
2	11161.58	56.78	52.70	-4.08	74.00	21.30	PK	Vertical	PASS
3	12297.15	51.11	43.25	-7.86	74.00	30.75	PK	Vertical	PASS
4	13652.83	53.15	45.29	-7.86	68.20	22.91	PK	Vertical	PASS
5	15008.50	50.63	41.18	-9.45	68.20	27.02	PK	Vertical	PASS
6	17829.91	47.97	46.62	-1.35	74.00	27.38	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

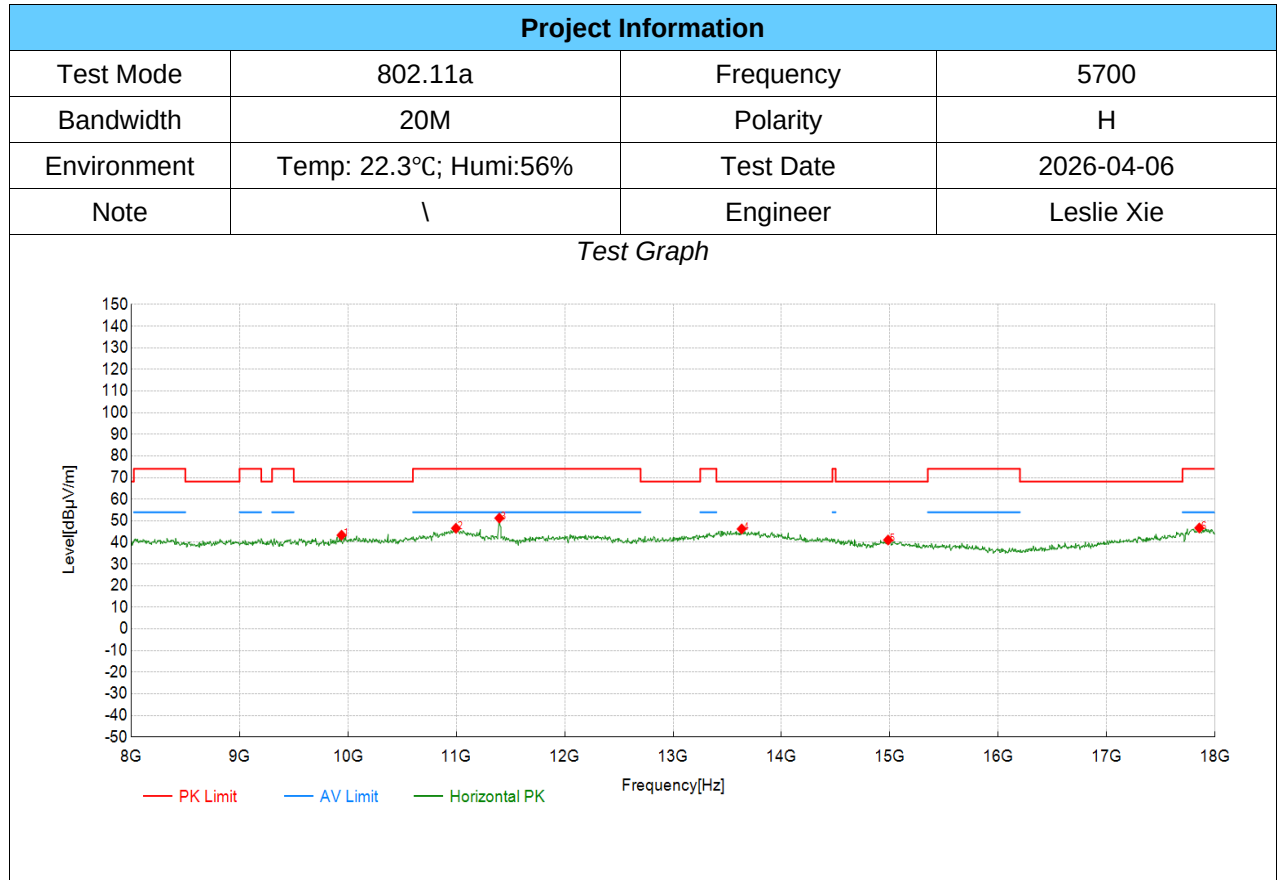

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9940.97	52.77	43.35	-9.42	68.20	24.85	PK	Horizontal	PASS
2	10996.50	49.49	46.55	-2.94	74.00	27.45	PK	Horizontal	PASS
3	11396.70	57.37	51.25	-6.12	74.00	22.75	PK	Horizontal	PASS
4	13632.82	54.15	46.24	-7.91	68.20	21.96	PK	Horizontal	PASS
5	14983.49	50.56	41.12	-9.44	68.20	27.08	PK	Horizontal	PASS
6	17854.93	48.01	46.68	-1.33	74.00	27.32	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

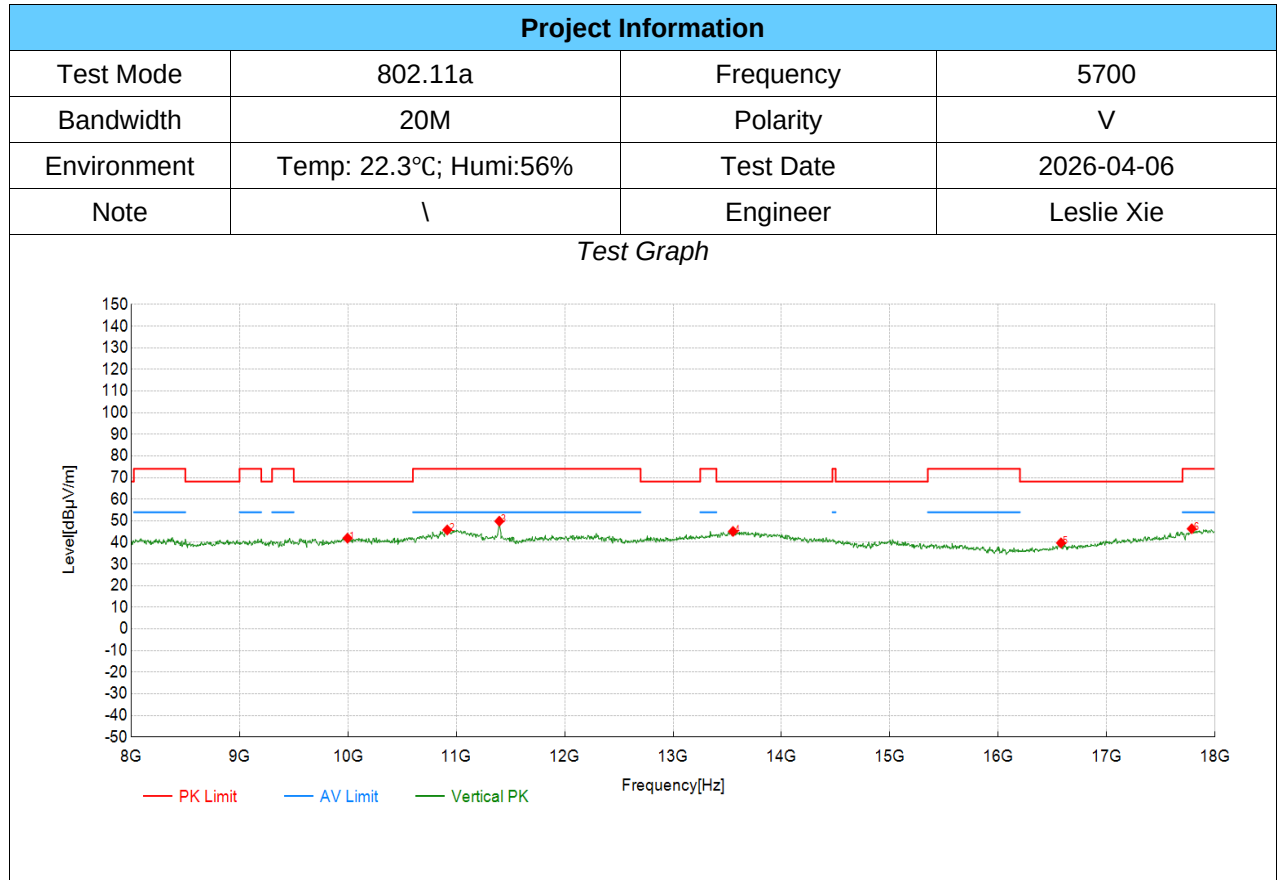

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9996.00	50.99	41.98	-9.01	68.20	26.22	PK	Vertical	PASS
2	10916.46	49.59	45.77	-3.82	74.00	28.23	PK	Vertical	PASS
3	11396.70	55.95	49.83	-6.12	74.00	24.17	PK	Vertical	PASS
4	13552.78	53.08	45.10	-7.98	68.20	23.10	PK	Vertical	PASS
5	16579.29	50.07	39.78	-10.29	68.20	28.42	PK	Vertical	PASS
6	17784.89	47.92	46.33	-1.59	74.00	27.67	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

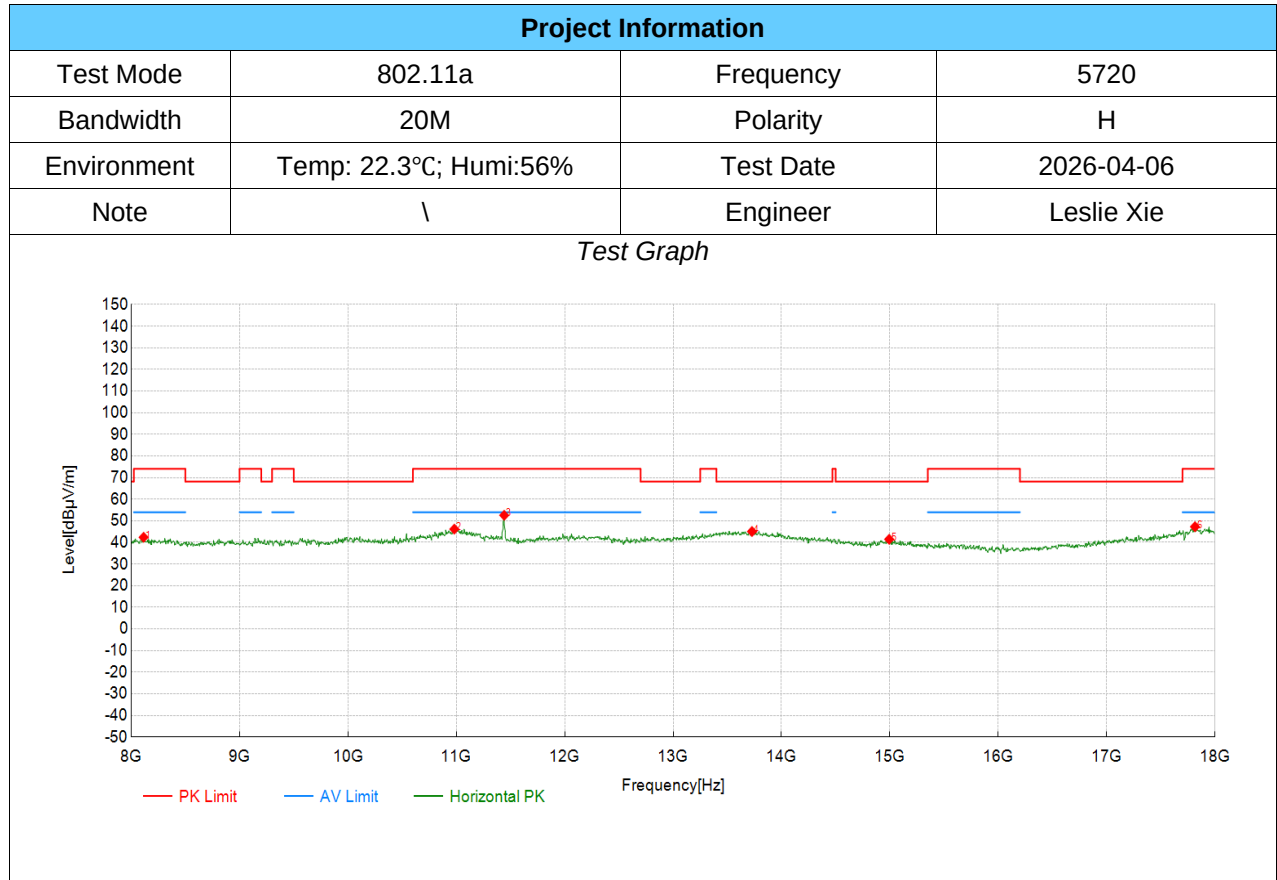

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	8115.06	54.87	42.39	-12.48	74.00	31.61	PK	Horizontal	PASS
2	10981.49	49.27	46.16	-3.11	74.00	27.84	PK	Horizontal	PASS
3	11441.72	59.23	52.56	-6.67	74.00	21.44	PK	Horizontal	PASS
4	13727.86	52.76	45.07	-7.69	68.20	23.13	PK	Horizontal	PASS
5	14993.50	50.87	41.45	-9.42	68.20	26.75	PK	Horizontal	PASS
6	17814.91	48.63	47.26	-1.37	74.00	26.74	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

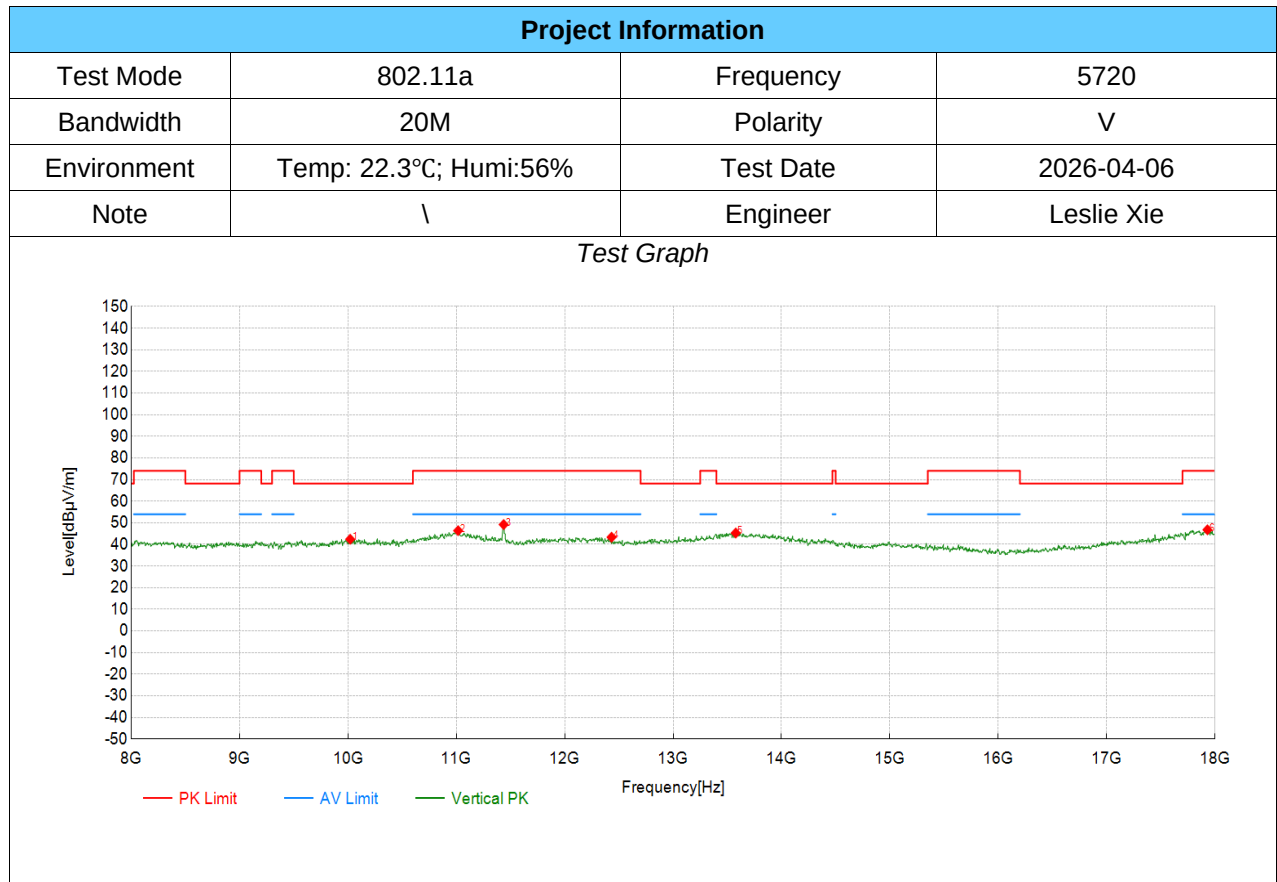

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10021.01	51.48	42.41	-9.07	68.20	25.79	PK	Vertical	PASS
2	11016.51	49.40	46.38	-3.02	74.00	27.62	PK	Vertical	PASS
3	11436.72	55.81	49.20	-6.61	74.00	24.80	PK	Vertical	PASS
4	12432.22	51.53	43.34	-8.19	74.00	30.66	PK	Vertical	PASS
5	13577.79	53.29	45.30	-7.99	68.20	22.90	PK	Vertical	PASS
6	17929.96	48.02	46.77	-1.25	74.00	27.23	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

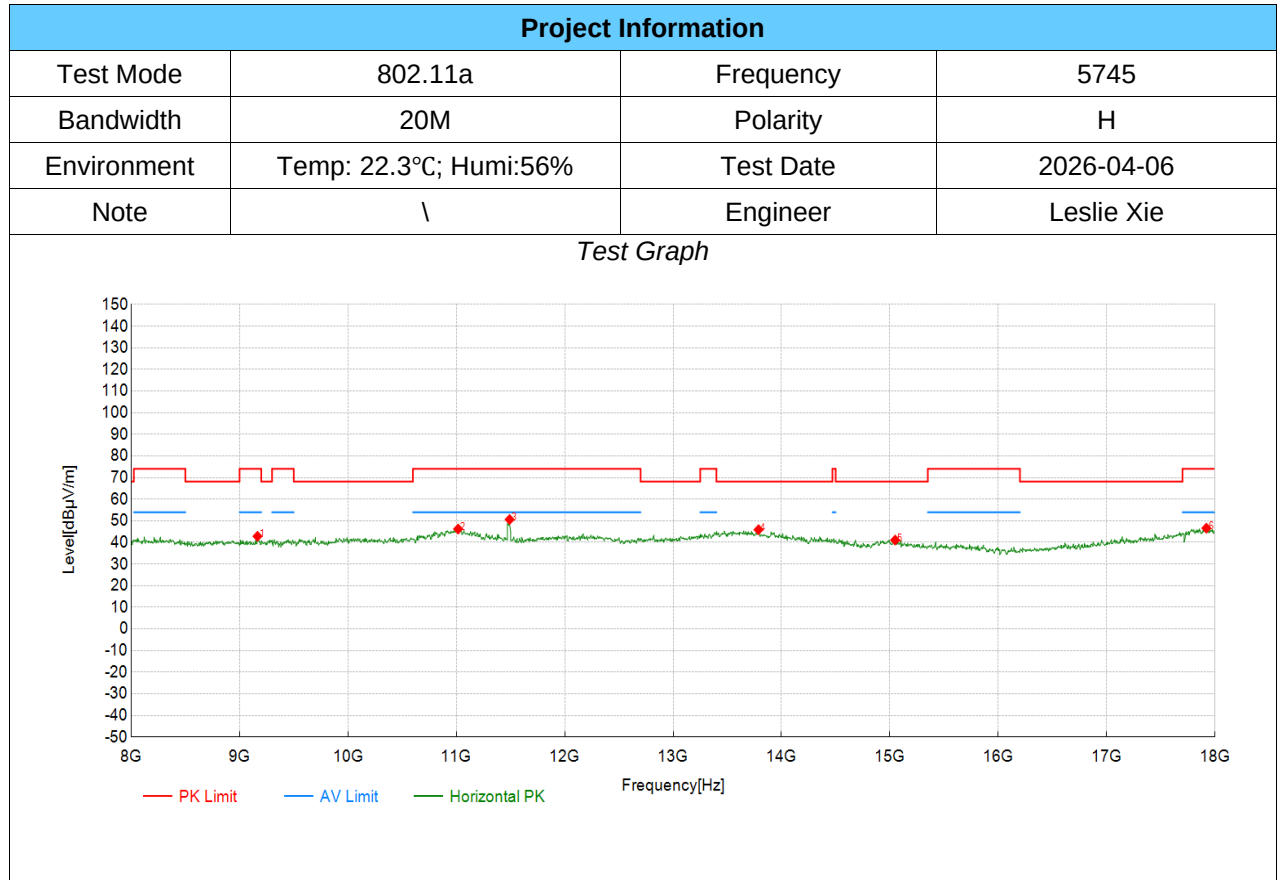

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9165.58	52.82	42.84	-9.98	74.00	31.16	PK	Horizontal	PASS
2	11016.51	49.22	46.20	-3.02	74.00	27.80	PK	Horizontal	PASS
3	11491.75	57.90	50.61	-7.29	74.00	23.39	PK	Horizontal	PASS
4	13787.89	53.45	45.89	-7.56	68.20	22.31	PK	Horizontal	PASS
5	15048.52	50.82	41.11	-9.71	68.20	27.09	PK	Horizontal	PASS
6	17919.96	47.85	46.59	-1.26	74.00	27.41	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

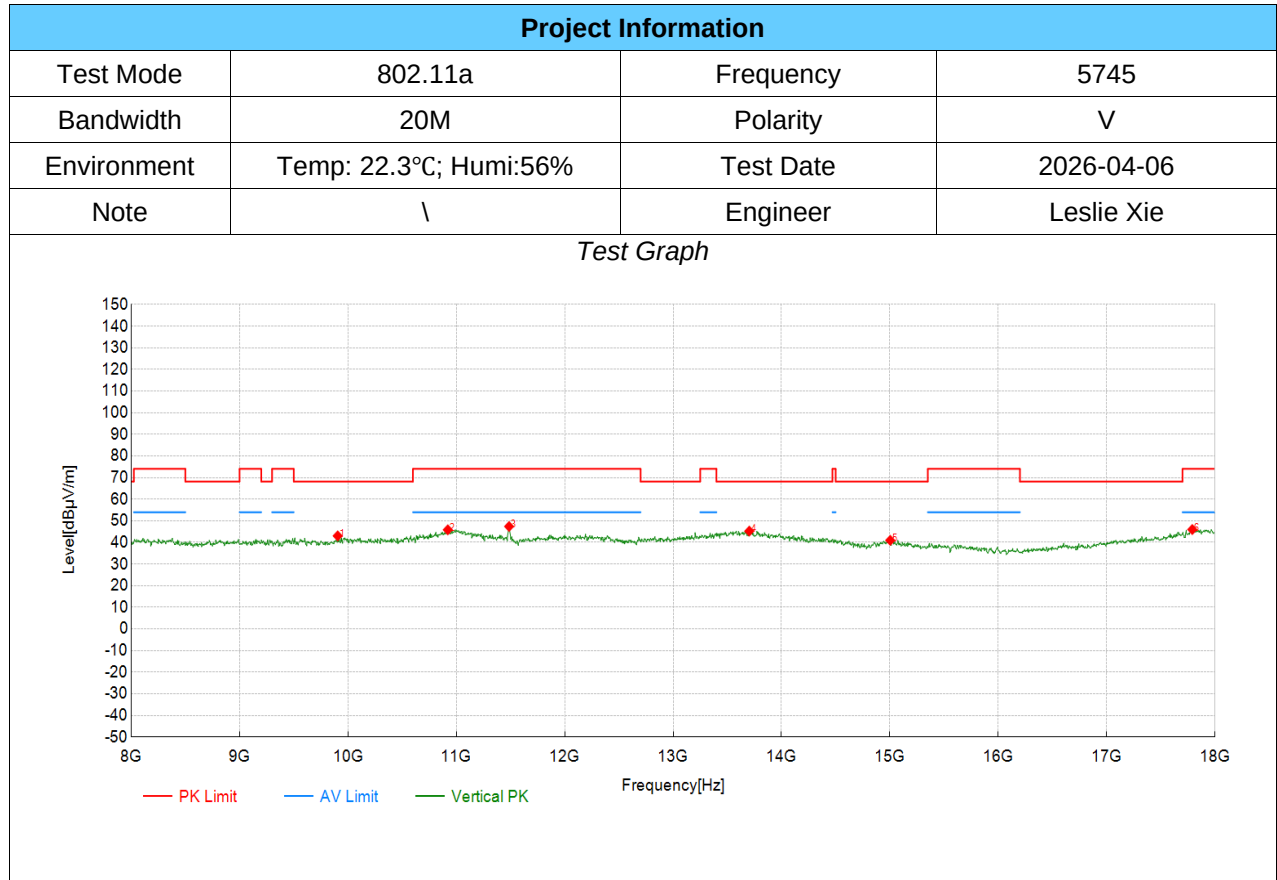

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9905.95	52.73	43.03	-9.70	68.20	25.17	PK	Vertical	PASS
2	10921.46	49.60	45.84	-3.76	74.00	28.16	PK	Vertical	PASS
3	11486.74	54.63	47.40	-7.23	74.00	26.60	PK	Vertical	PASS
4	13702.85	53.00	45.25	-7.75	68.20	22.95	PK	Vertical	PASS
5	15003.50	50.40	40.98	-9.42	68.20	27.22	PK	Vertical	PASS
6	17789.89	47.50	45.98	-1.52	74.00	28.02	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

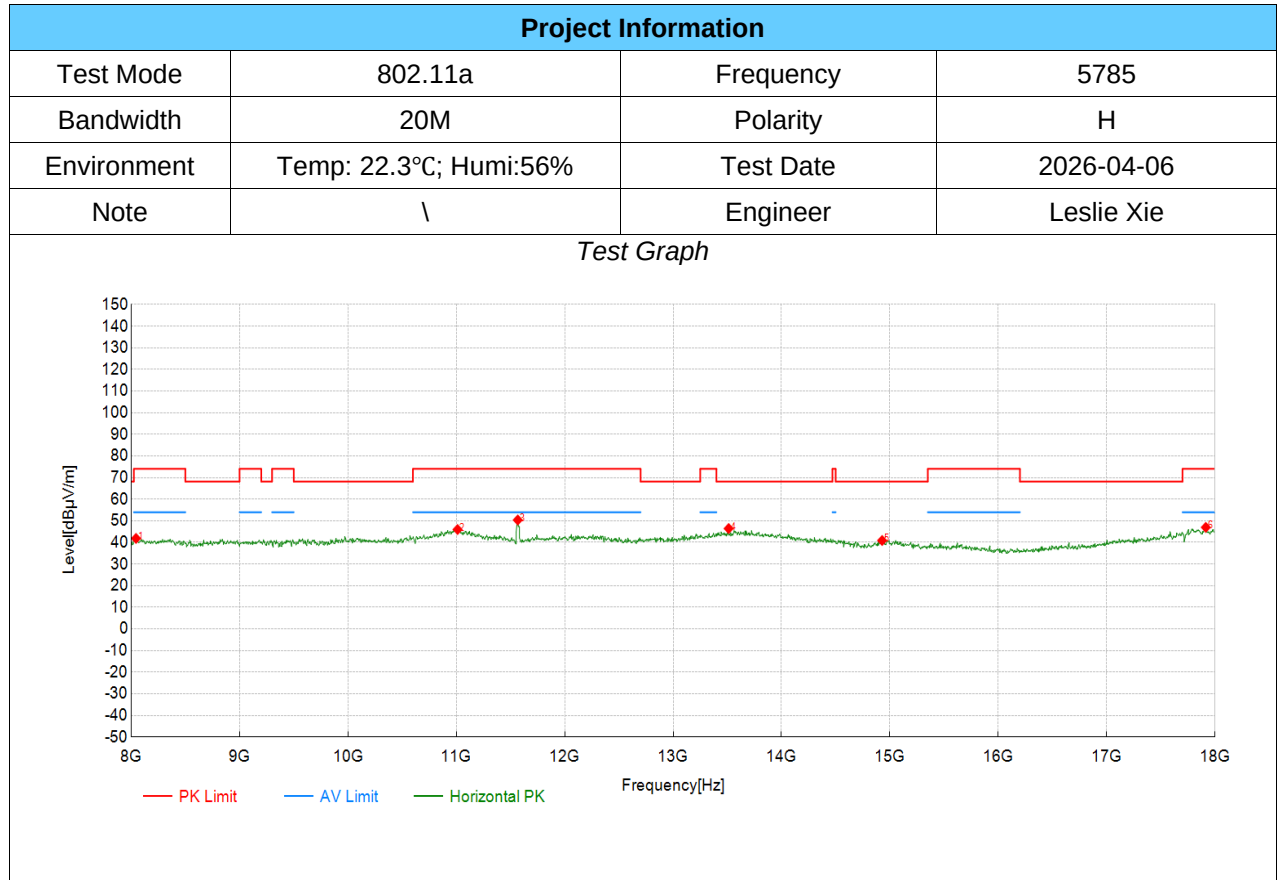

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	8045.02	54.25	41.86	-12.39	74.00	32.14	PK	Horizontal	PASS
2	11011.51	48.97	45.98	-2.99	74.00	28.02	PK	Horizontal	PASS
3	11566.78	58.15	50.39	-7.76	74.00	23.61	PK	Horizontal	PASS
4	13512.76	54.42	46.43	-7.99	68.20	21.77	PK	Horizontal	PASS
5	14928.46	50.49	40.90	-9.59	68.20	27.30	PK	Horizontal	PASS
6	17914.96	48.24	46.97	-1.27	74.00	27.03	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

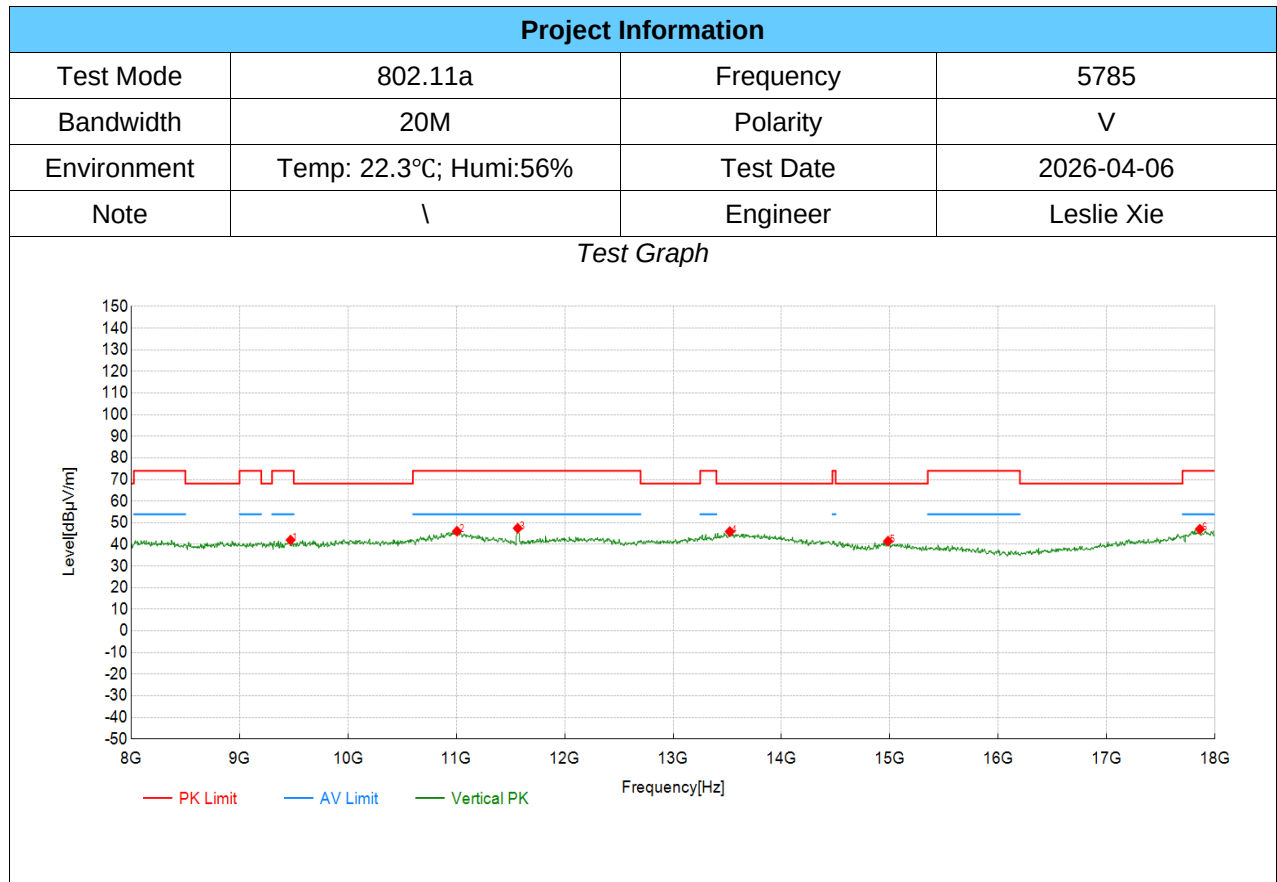

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9470.74	51.74	42.02	-9.72	74.00	31.98	PK	Vertical	PASS
2	11006.50	49.05	46.10	-2.95	74.00	27.90	PK	Vertical	PASS
3	11566.78	55.24	47.48	-7.76	74.00	26.52	PK	Vertical	PASS
4	13522.76	53.92	45.93	-7.99	68.20	22.27	PK	Vertical	PASS
5	14983.49	50.95	41.51	-9.44	68.20	26.69	PK	Vertical	PASS
6	17859.93	48.37	47.05	-1.32	74.00	26.95	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

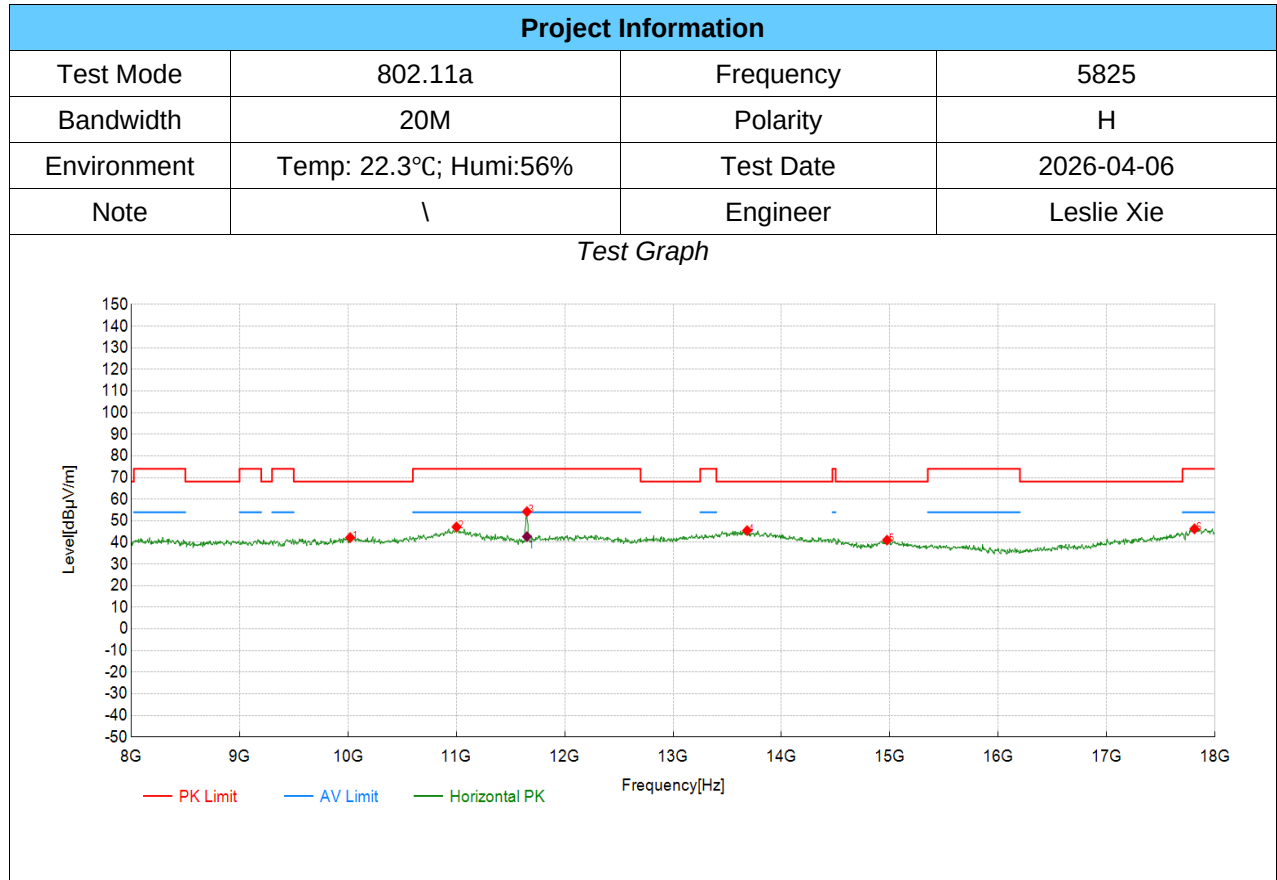


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10021.01	51.32	42.25	-9.07	68.20	25.95	PK	Horizontal	PASS
2	11001.50	50.07	47.16	-2.91	74.00	26.84	PK	Horizontal	PASS
3	11651.83	62.12	54.26	-7.86	74.00	19.74	PK	Horizontal	PASS
4	13682.84	53.28	45.48	-7.80	68.20	22.72	PK	Horizontal	PASS
5	14973.49	50.54	41.07	-9.47	68.20	27.13	PK	Horizontal	PASS
6	17809.90	47.65	46.28	-1.37	74.00	27.72	PK	Horizontal	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	11651.83	-7.86	50.56	42.70	54.00	11.30	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level


TX Radiated Test Result

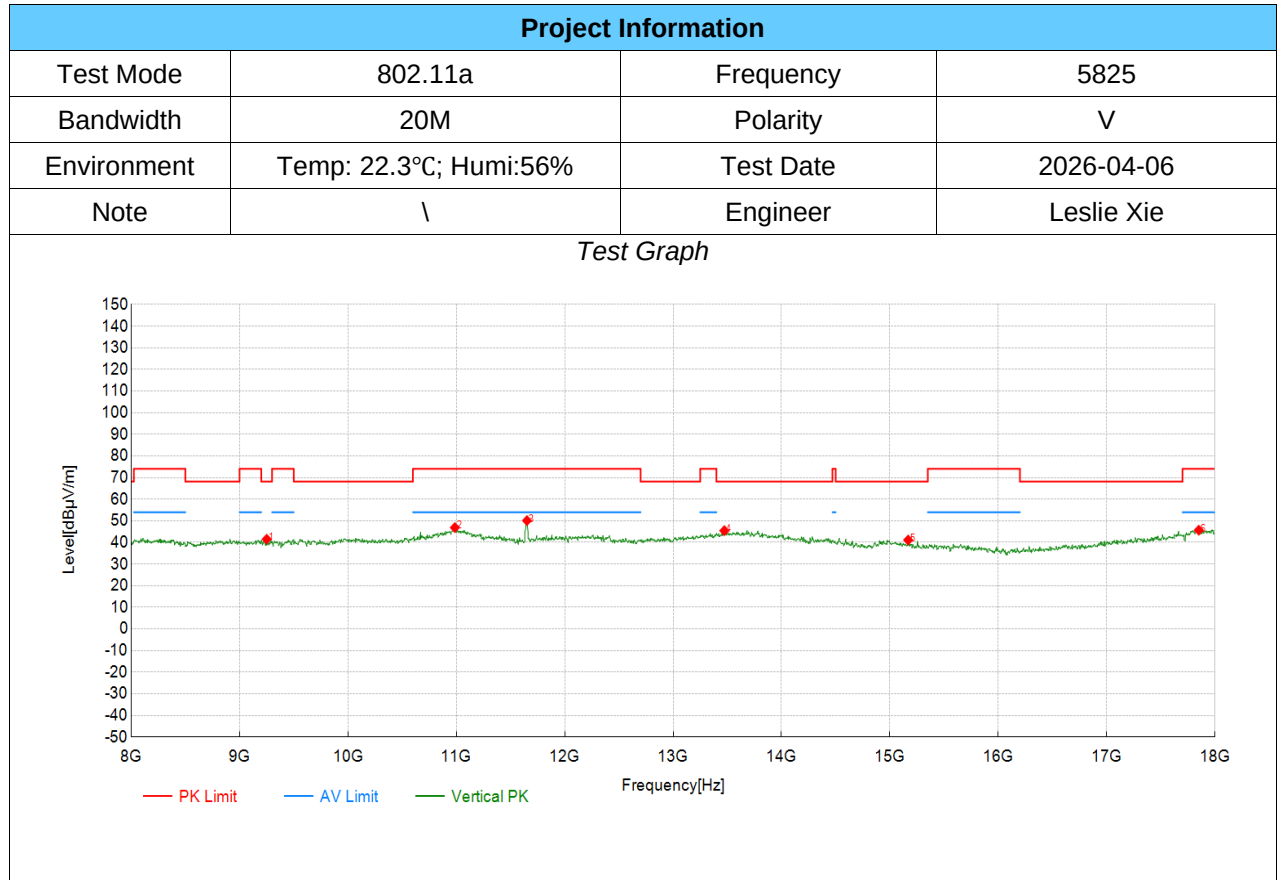

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9250.63	51.32	41.52	-9.80	68.20	26.68	PK	Vertical	PASS
2	10986.49	49.92	46.87	-3.05	74.00	27.13	PK	Vertical	PASS
3	11651.83	57.97	50.11	-7.86	74.00	23.89	PK	Vertical	PASS
4	13472.74	53.51	45.44	-8.07	68.20	22.76	PK	Vertical	PASS
5	15168.58	51.58	41.12	-10.46	68.20	27.08	PK	Vertical	PASS
6	17849.92	46.98	45.65	-1.33	74.00	28.35	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

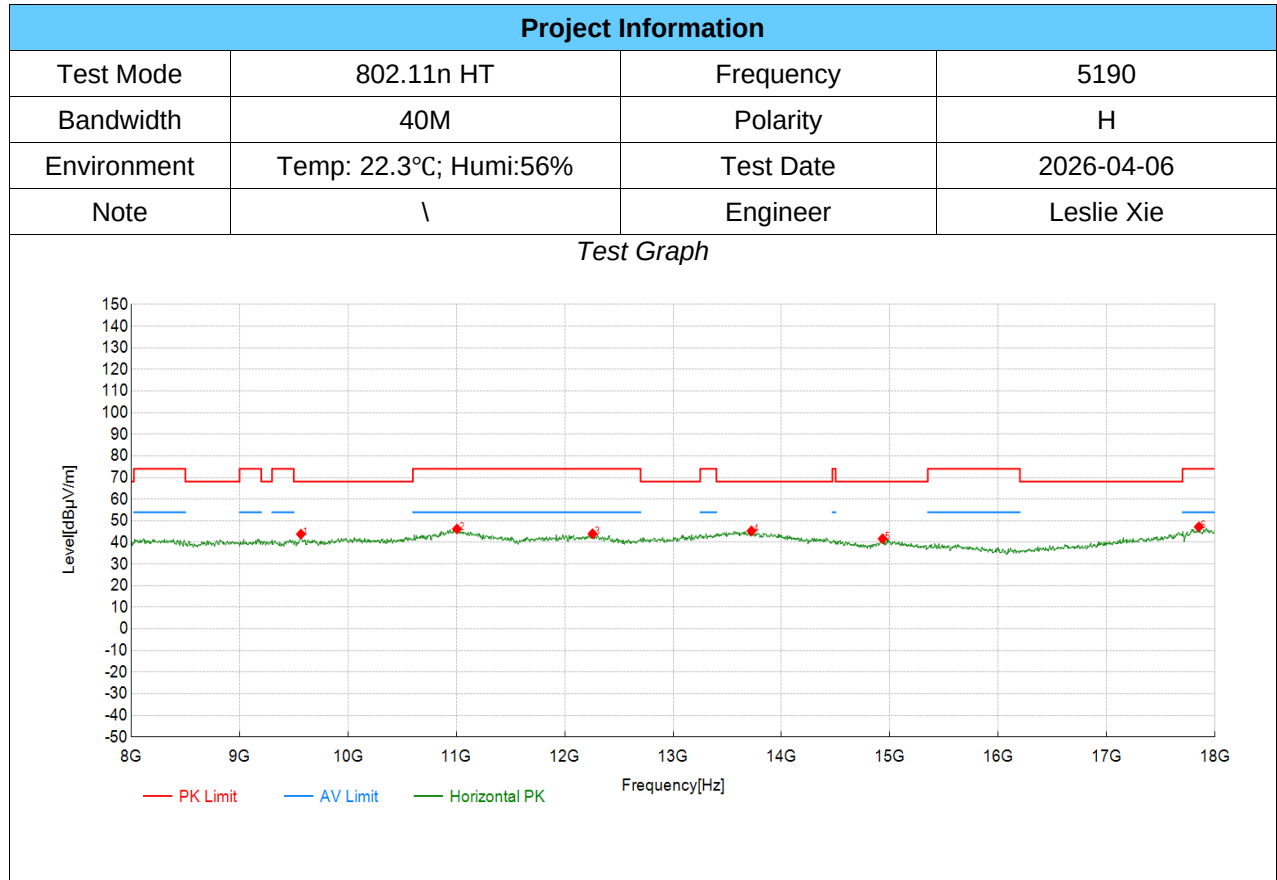

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9565.78	53.43	43.85	-9.58	68.20	24.35	PK	Horizontal	PASS
2	11006.50	49.15	46.20	-2.95	74.00	27.80	PK	Horizontal	PASS
3	12257.13	51.88	44.03	-7.85	74.00	29.97	PK	Horizontal	PASS
4	13722.86	52.99	45.29	-7.70	68.20	22.91	PK	Horizontal	PASS
5	14933.47	51.29	41.71	-9.58	68.20	26.49	PK	Horizontal	PASS
6	17849.92	48.54	47.21	-1.33	74.00	26.79	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

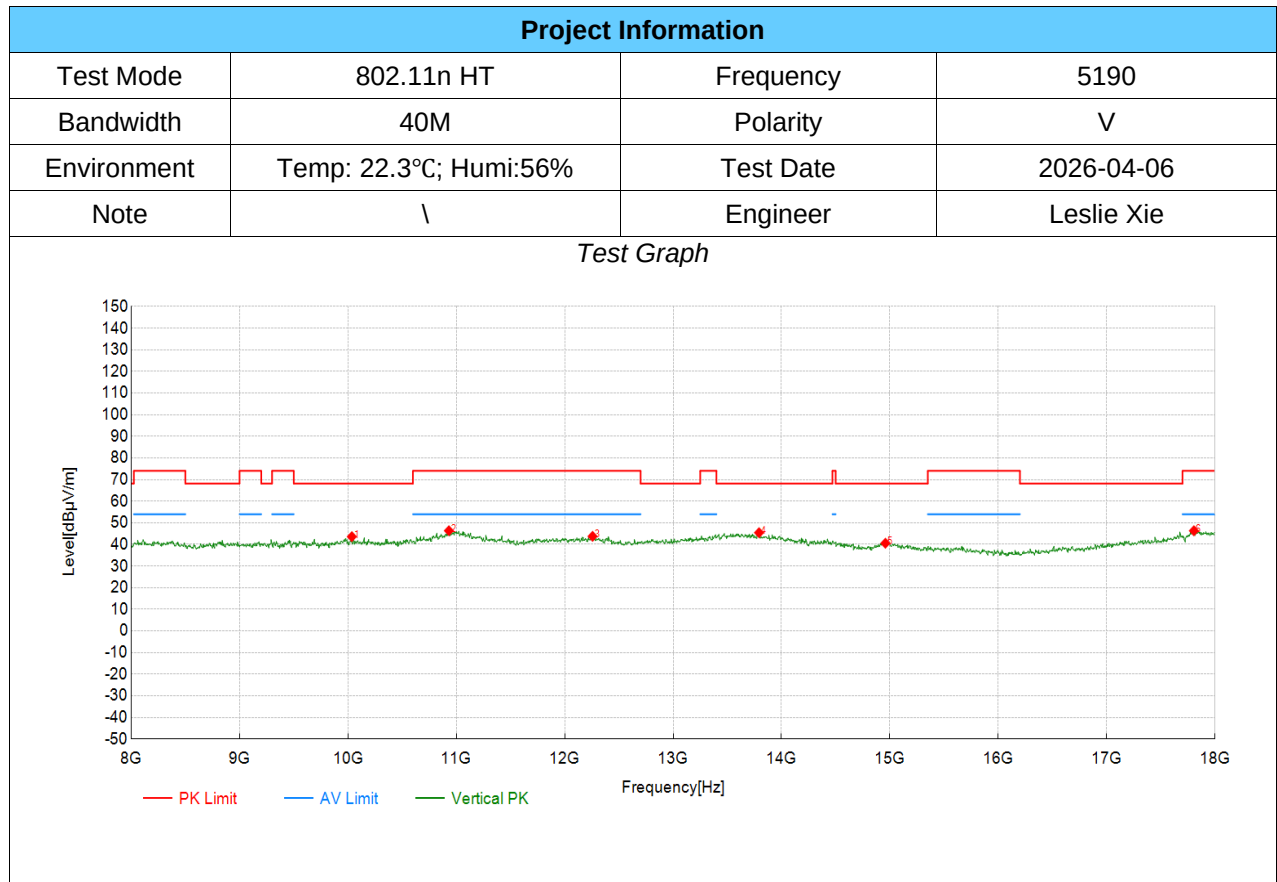

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10036.02	52.76	43.61	-9.15	68.20	24.59	PK	Vertical	PASS
2	10931.47	50.01	46.35	-3.66	74.00	27.65	PK	Vertical	PASS
3	12257.13	51.61	43.76	-7.85	74.00	30.24	PK	Vertical	PASS
4	13792.90	52.97	45.43	-7.54	68.20	22.77	PK	Vertical	PASS
5	14958.48	50.07	40.55	-9.52	68.20	27.65	PK	Vertical	PASS
6	17804.90	47.71	46.33	-1.38	74.00	27.67	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

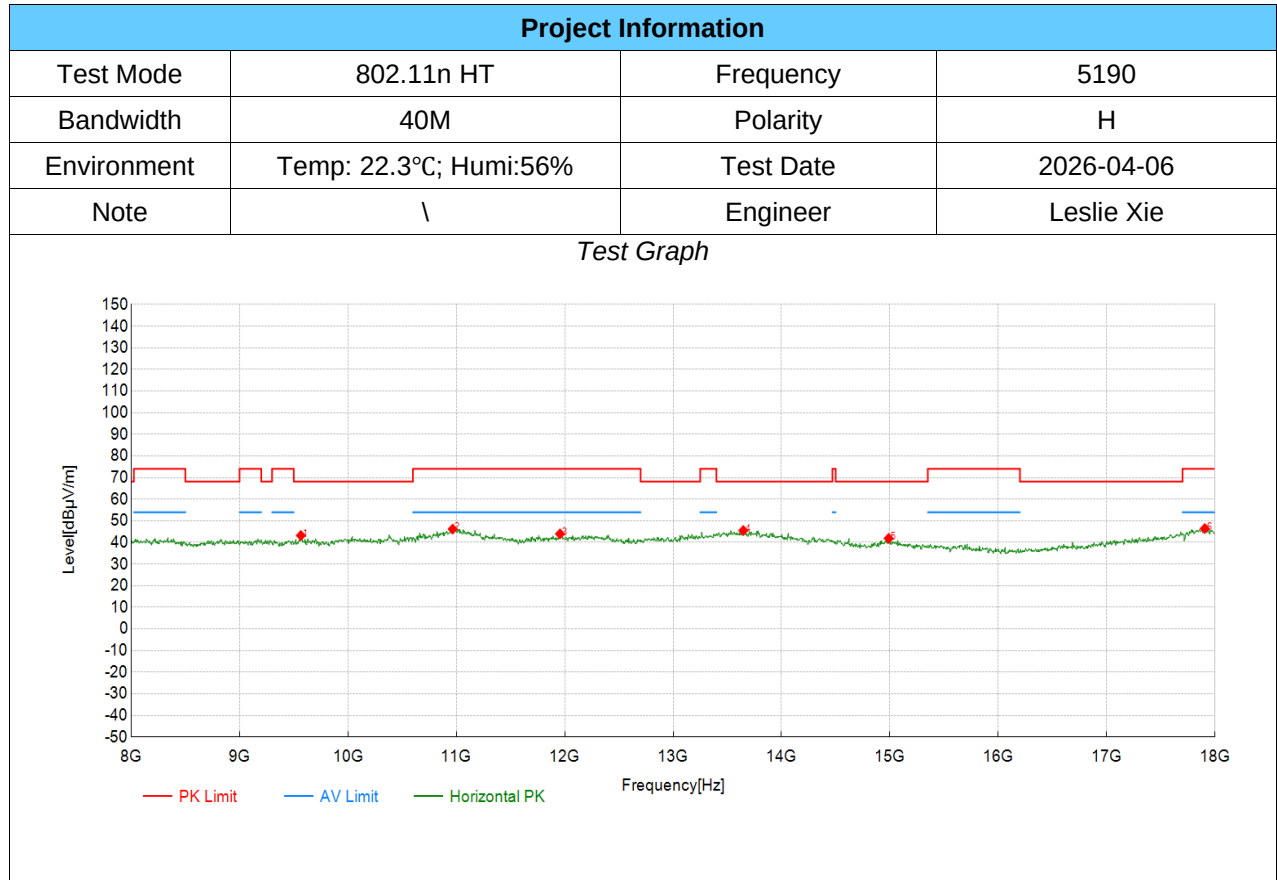

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9565.78	52.79	43.21	-9.58	68.20	24.99	PK	Horizontal	PASS
2	10966.48	49.45	46.19	-3.26	74.00	27.81	PK	Horizontal	PASS
3	11956.98	51.46	43.97	-7.49	74.00	30.03	PK	Horizontal	PASS
4	13647.82	53.36	45.49	-7.87	68.20	22.71	PK	Horizontal	PASS
5	14988.49	51.30	41.86	-9.44	68.20	26.34	PK	Horizontal	PASS
6	17904.95	47.70	46.42	-1.28	74.00	27.58	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

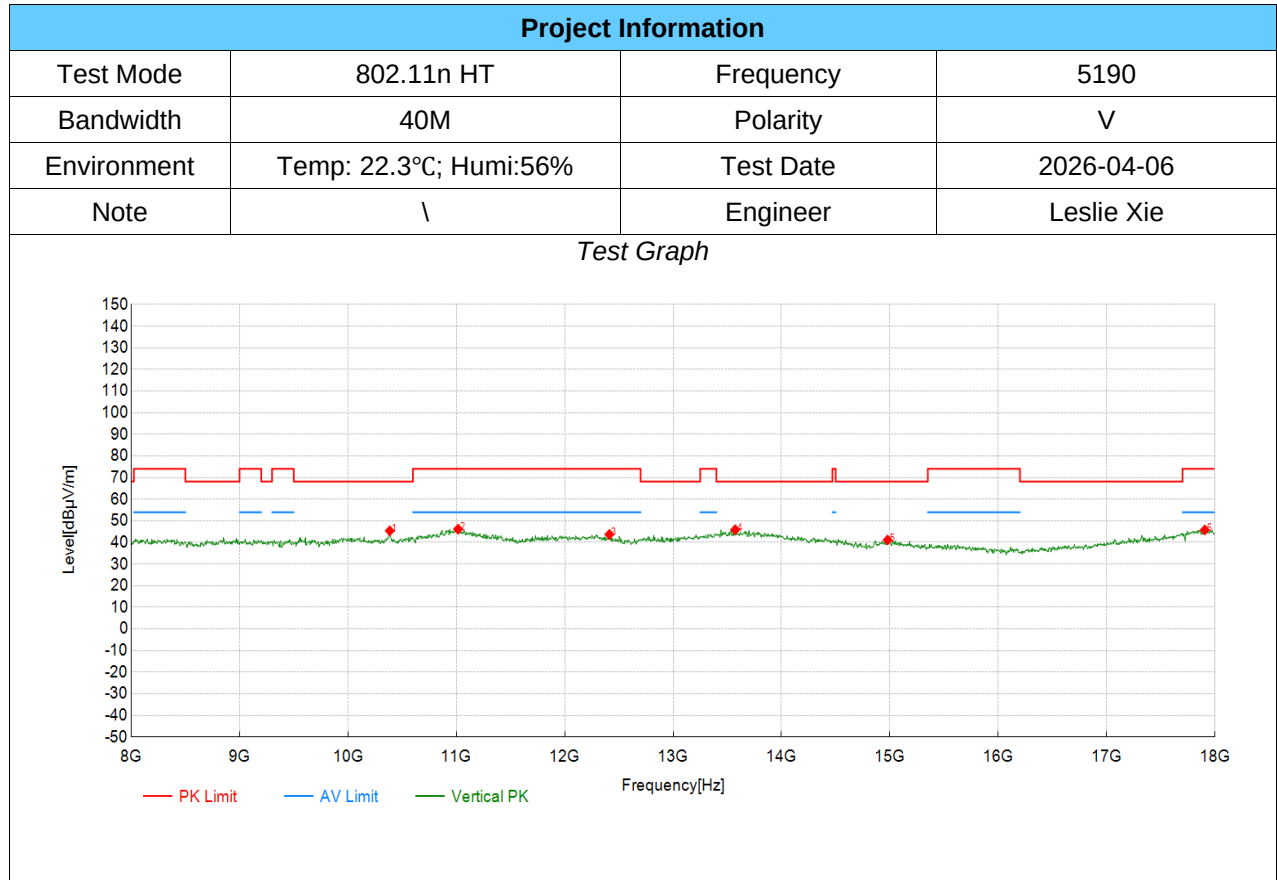

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10386.19	54.44	45.37	-9.07	68.20	22.83	PK	Vertical	PASS
2	11016.51	49.18	46.16	-3.02	74.00	27.84	PK	Vertical	PASS
3	12412.21	51.69	43.70	-7.99	74.00	30.30	PK	Vertical	PASS
4	13572.79	53.86	45.88	-7.98	68.20	22.32	PK	Vertical	PASS
5	14978.49	50.59	41.13	-9.46	68.20	27.07	PK	Vertical	PASS
6	17904.95	47.03	45.75	-1.28	74.00	28.25	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

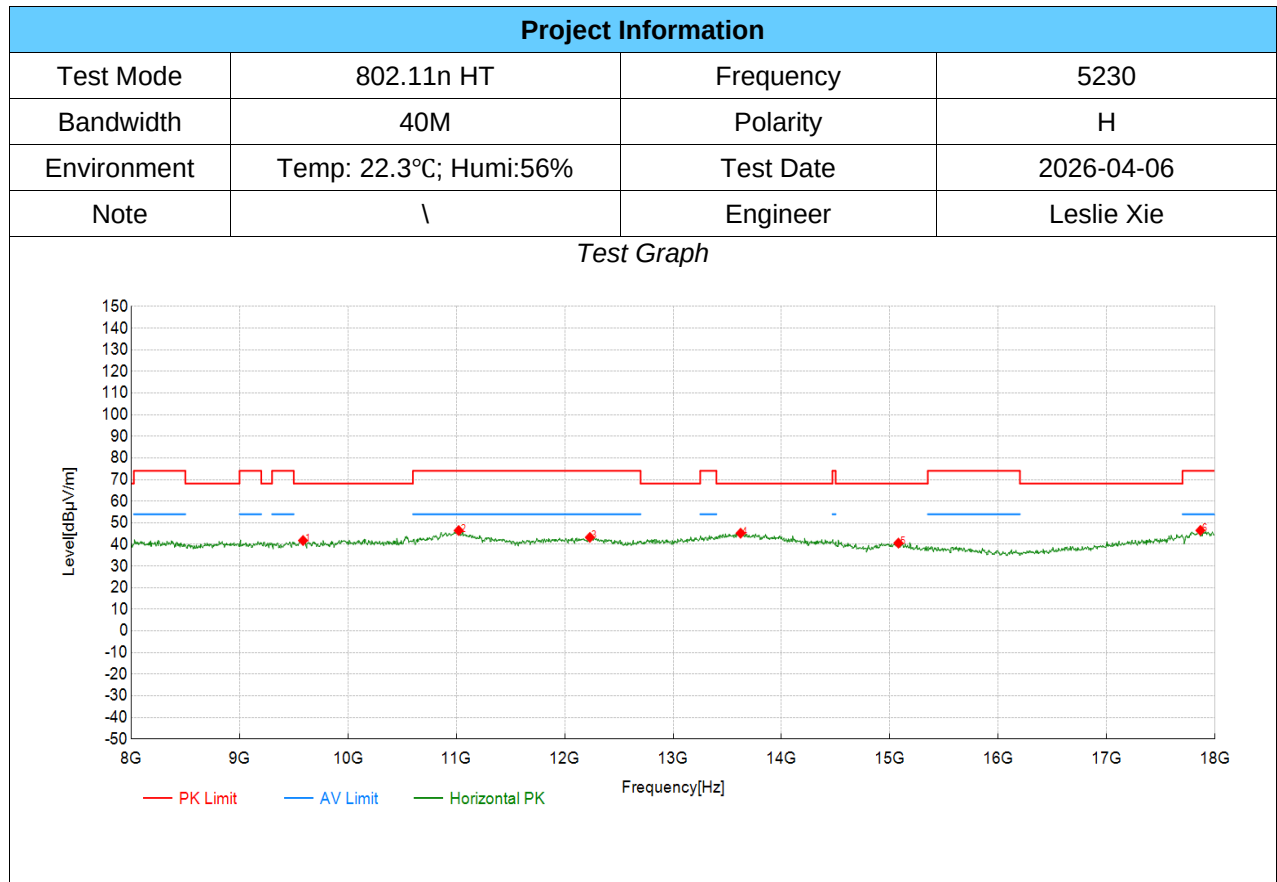

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9585.79	51.38	41.82	-9.56	68.20	26.38	PK	Horizontal	PASS
2	11021.51	49.48	46.43	-3.05	74.00	27.57	PK	Horizontal	PASS
3	12232.12	51.11	43.27	-7.84	74.00	30.73	PK	Horizontal	PASS
4	13622.81	53.12	45.19	-7.93	68.20	23.01	PK	Horizontal	PASS
5	15078.54	50.52	40.63	-9.89	68.20	27.57	PK	Horizontal	PASS
6	17864.93	47.81	46.49	-1.32	74.00	27.51	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

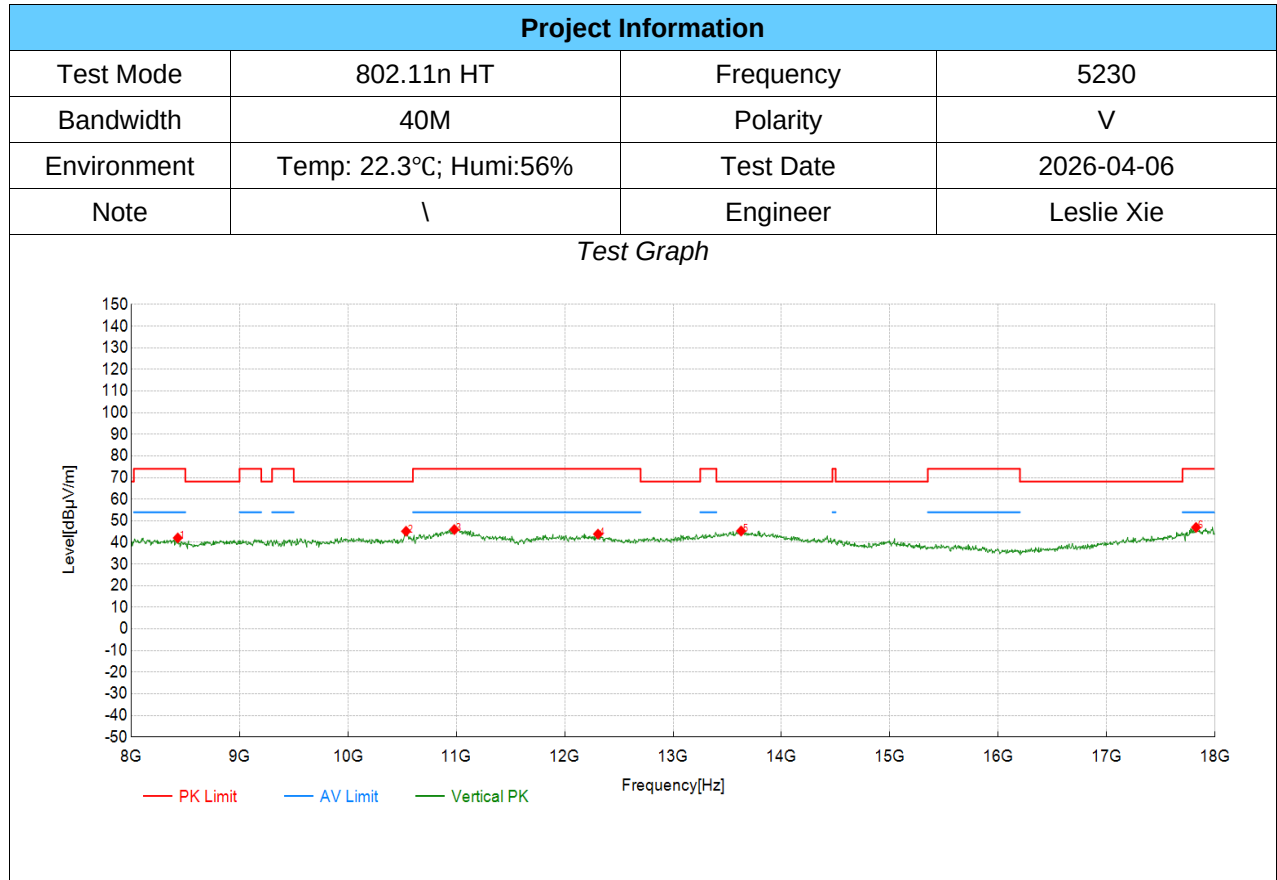


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	8430.22	53.45	42.09	-11.36	74.00	31.91	PK	Vertical	PASS
2	10536.27	53.14	45.18	-7.96	68.20	23.02	PK	Vertical	PASS
3	10981.49	49.06	45.95	-3.11	74.00	28.05	PK	Vertical	PASS
4	12307.15	51.73	43.87	-7.86	74.00	30.13	PK	Vertical	PASS
5	13627.81	53.22	45.30	-7.92	68.20	22.90	PK	Vertical	PASS
6	17824.91	48.30	46.94	-1.36	74.00	27.06	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC120V_60Hz

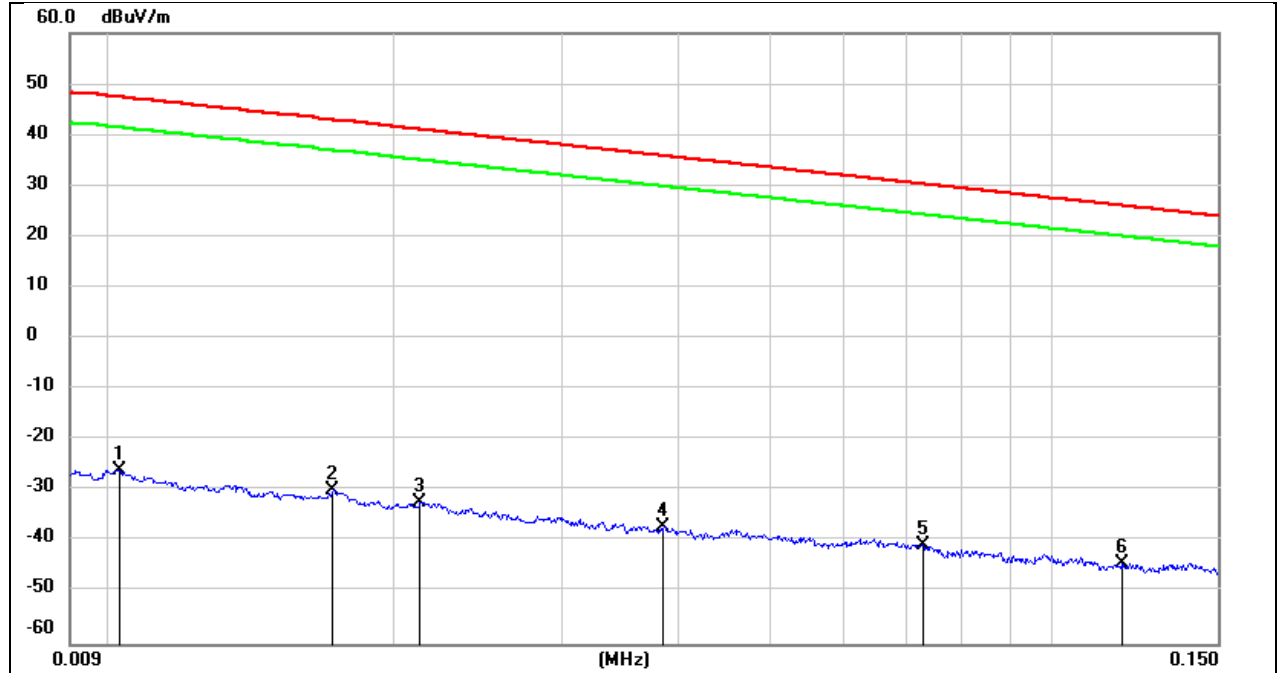


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0102	75.55	-101.40	-25.85	47.43	-77.35	-4.07	-73.28	peak
2	0.0171	71.38	-101.36	-29.98	42.94	-81.48	-8.56	-72.92	peak
3	0.0212	69.04	-101.35	-32.31	41.07	-83.81	-10.43	-73.38	peak
4	0.0386	64.28	-101.43	-37.15	35.87	-88.65	-15.63	-73.02	peak
5	0.0728	60.99	-101.58	-40.59	30.36	-92.09	-21.14	-70.95	peak
6	0.1184	57.52	-101.74	-44.22	26.14	-95.72	-25.36	-70.36	peak

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC120V_60Hz

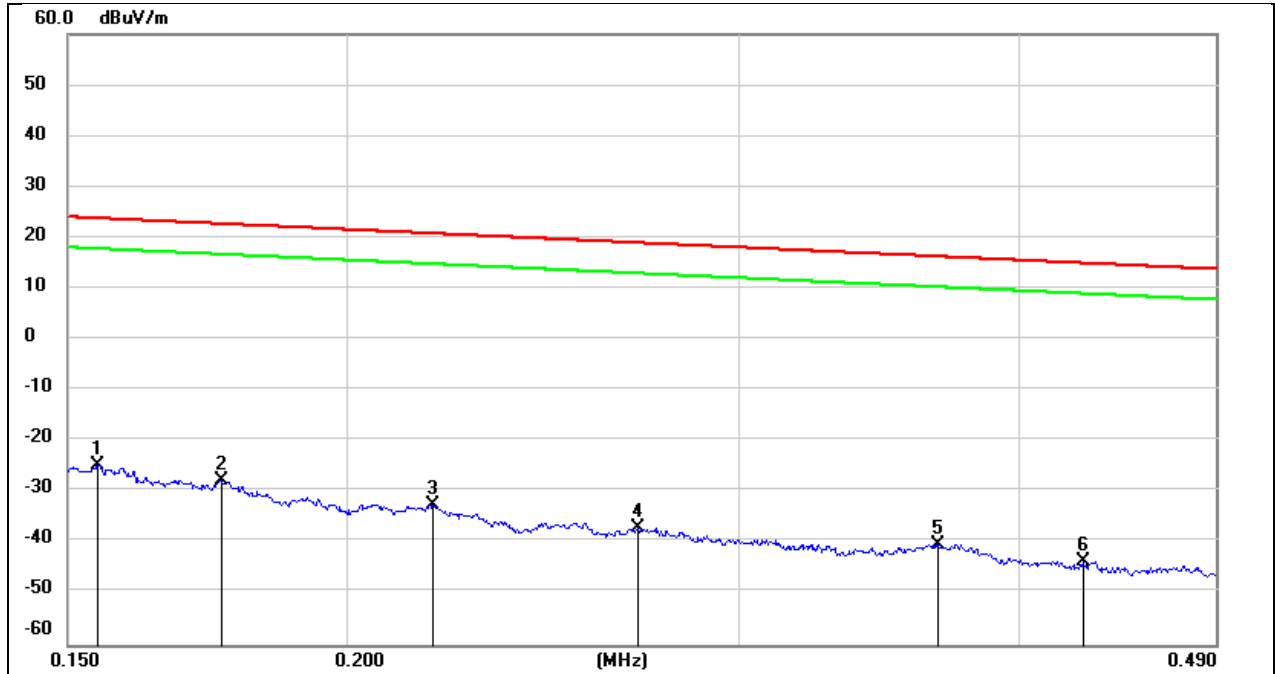

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1547	76.81	-101.65	-24.84	23.81	-76.34	-27.69	-48.65	peak
2	0.1758	73.88	-101.68	-27.80	22.71	-79.30	-28.79	-50.51	peak
3	0.2187	69.25	-101.75	-32.50	20.80	-84.00	-30.70	-53.30	peak
4	0.2701	64.81	-101.82	-37.01	18.97	-88.51	-32.53	-55.98	peak
5	0.3679	61.73	-101.93	-40.20	16.29	-91.70	-35.21	-56.49	peak
6	0.4269	58.34	-101.99	-43.65	15.00	-95.15	-36.50	-58.65	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC120V_60Hz

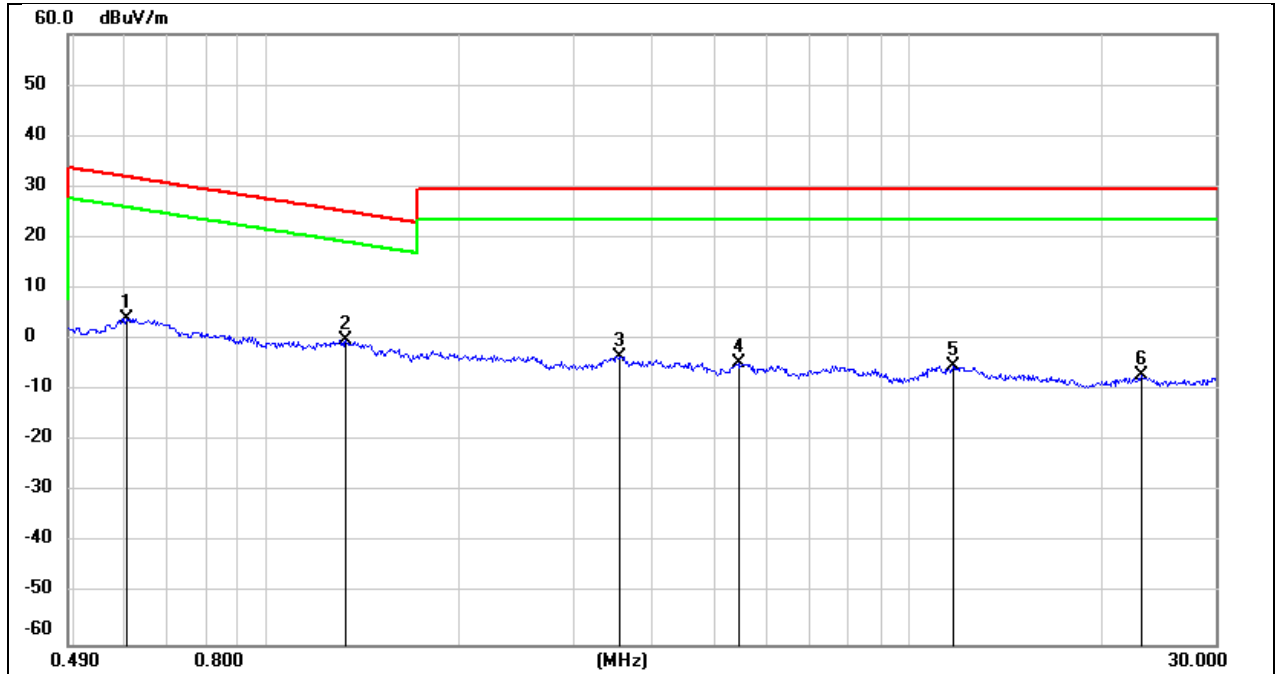

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.6044	66.15	-62.09	4.06	31.98	-47.44	-19.52	-27.92	peak
2	1.3263	61.98	-62.11	-0.13	25.15	-51.63	-26.35	-25.28	peak
3	3.5590	57.92	-61.44	-3.52	29.54	-55.02	-21.96	-33.06	peak
4	5.4180	56.66	-61.43	-4.77	29.54	-56.27	-21.96	-34.31	peak
5	11.7332	55.52	-60.88	-5.36	29.54	-56.86	-21.96	-34.90	peak
6	22.9766	53.50	-60.60	-7.10	29.54	-58.60	-21.96	-36.64	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC120V_60Hz

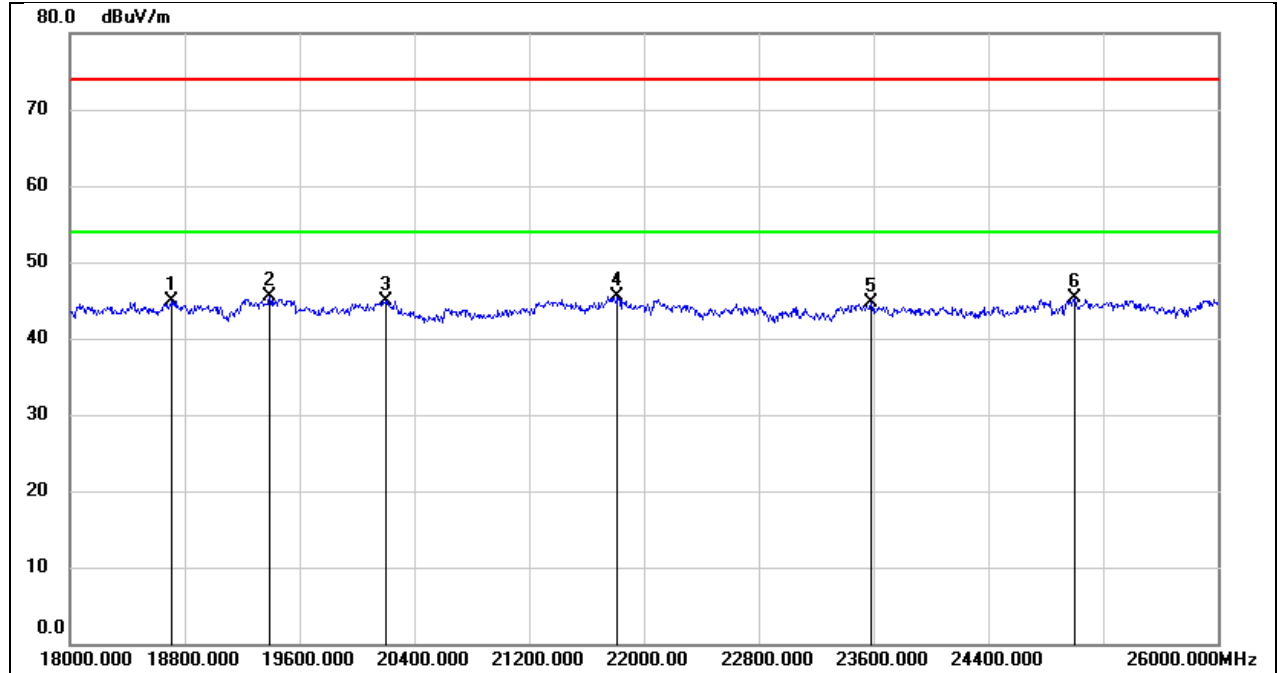

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18712.000	50.37	-5.40	44.97	74.00	-29.03	peak
2	19392.000	51.12	-5.57	45.55	74.00	-28.45	peak
3	20200.000	50.54	-5.58	44.96	74.00	-29.04	peak
4	21816.000	49.78	-4.37	45.41	74.00	-28.59	peak
5	23584.000	47.92	-3.15	44.77	74.00	-29.23	peak
6	25000.000	47.36	-2.10	45.26	74.00	-28.74	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	AC120V_60Hz

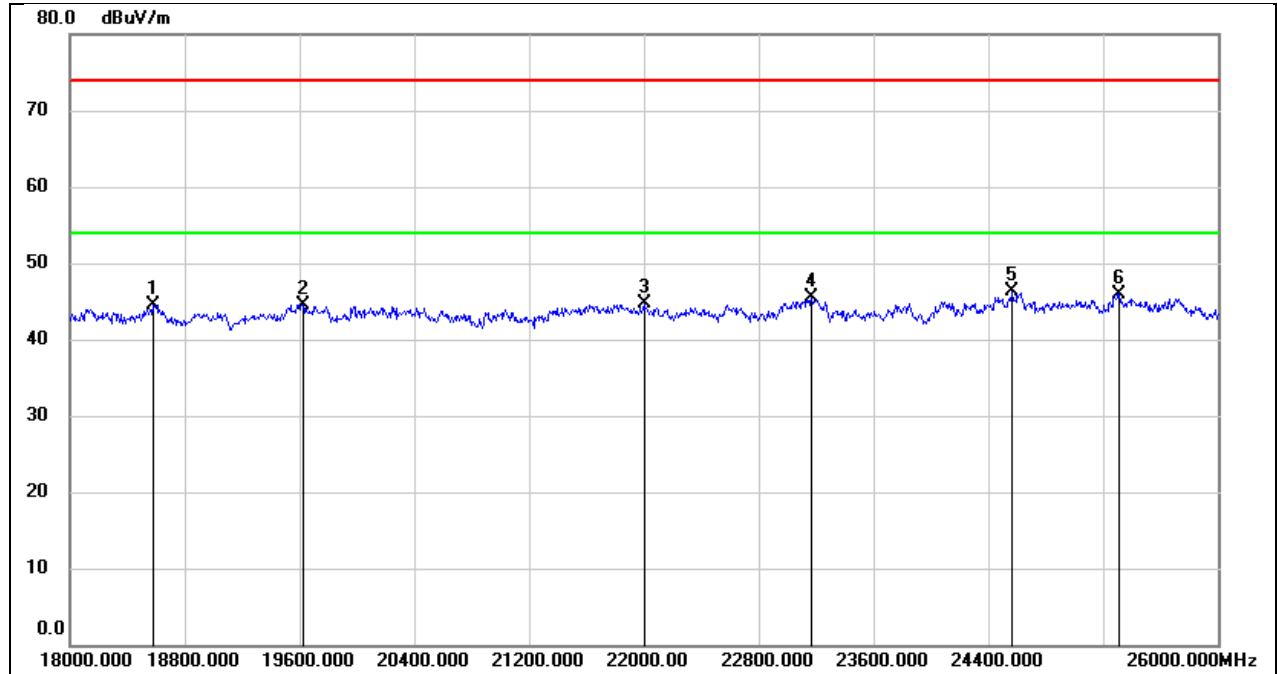

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18576.000	49.79	-5.30	44.49	74.00	-29.51	peak
2	19624.000	49.86	-5.40	44.46	74.00	-29.54	peak
3	22000.000	49.25	-4.48	44.77	74.00	-29.23	peak
4	23168.000	48.82	-3.39	45.43	74.00	-28.57	peak
5	24568.000	48.60	-2.33	46.27	74.00	-27.73	peak
6	25312.000	47.70	-1.70	46.00	74.00	-28.00	peak


8.6. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC120V_60Hz

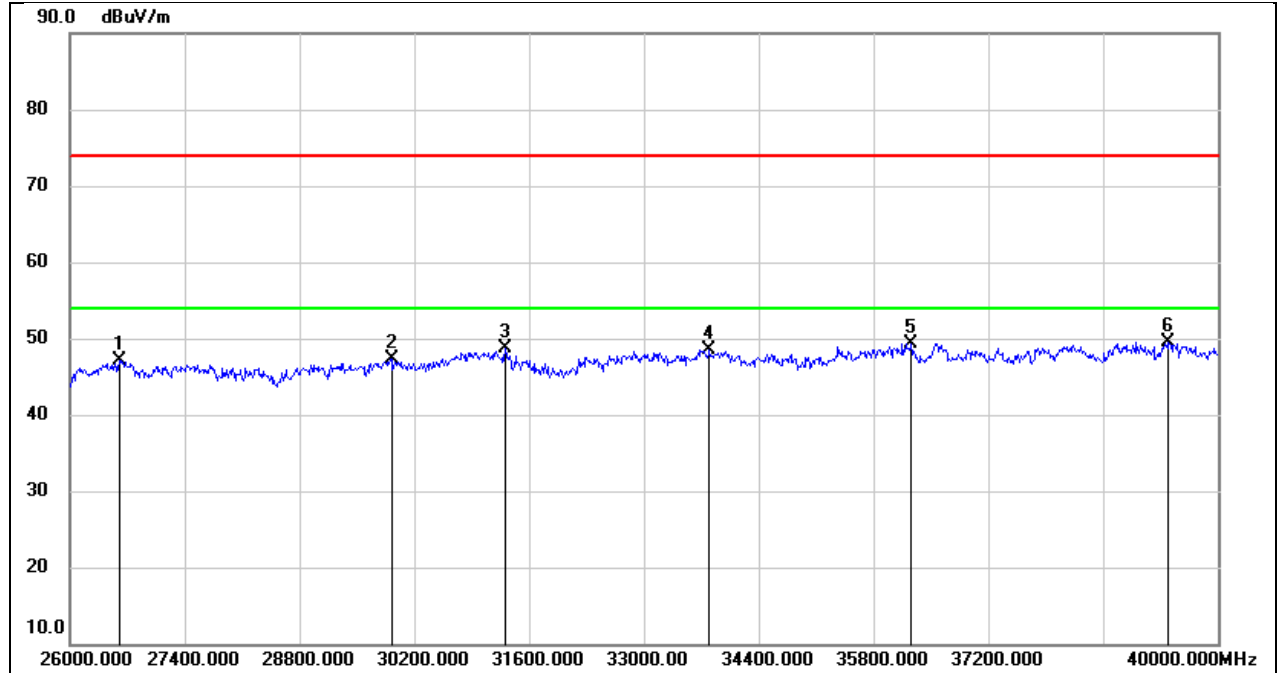

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26602.000	51.87	-4.80	47.07	74.00	-26.93	peak
2	29920.000	48.72	-1.43	47.29	74.00	-26.71	peak
3	31306.000	49.59	-0.90	48.69	74.00	-25.31	peak
4	33798.000	48.00	0.46	48.46	74.00	-25.54	peak
5	36262.000	46.10	3.28	49.38	74.00	-24.62	peak
6	39398.000	44.82	4.65	49.47	74.00	-24.53	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	AC120V_60Hz

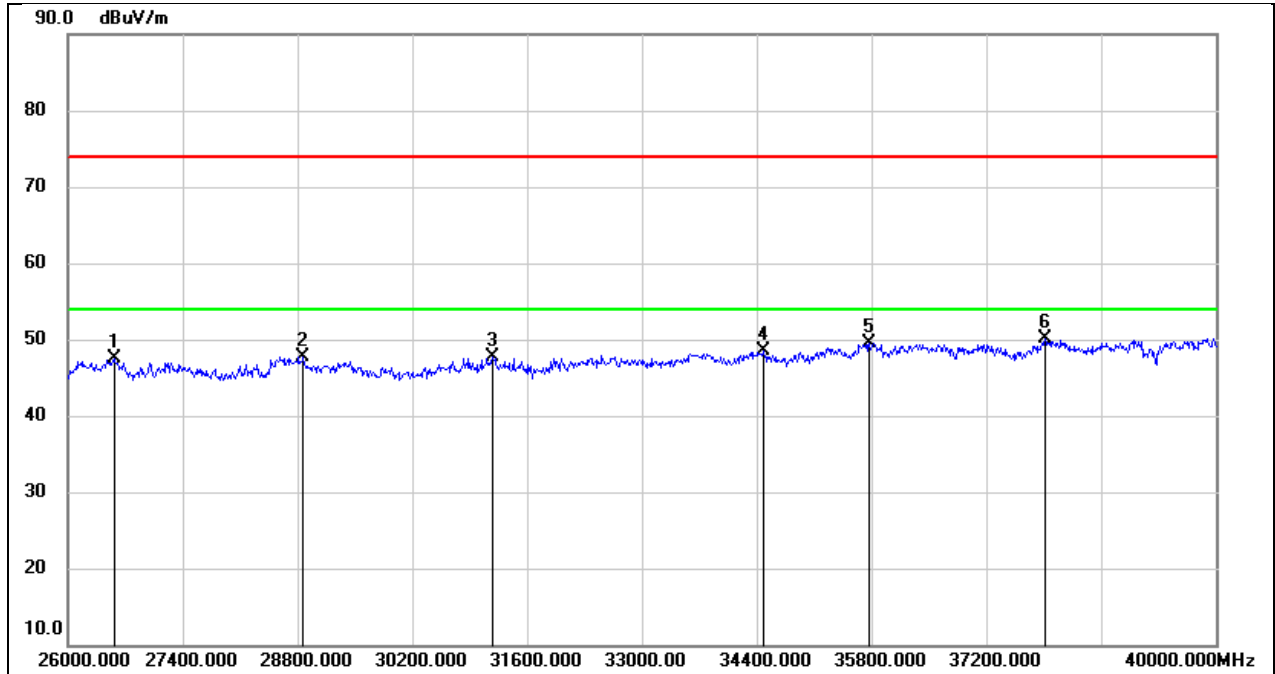

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26560.000	52.17	-4.76	47.41	74.00	-26.59	peak
2	28870.000	48.60	-0.95	47.65	74.00	-26.35	peak
3	31180.000	48.59	-0.79	47.80	74.00	-26.20	peak
4	34484.000	47.55	0.94	48.49	74.00	-25.51	peak
5	35772.000	45.96	3.53	49.49	74.00	-24.51	peak
6	37914.000	46.69	3.40	50.09	74.00	-23.91	peak


8.7. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC120V_60Hz

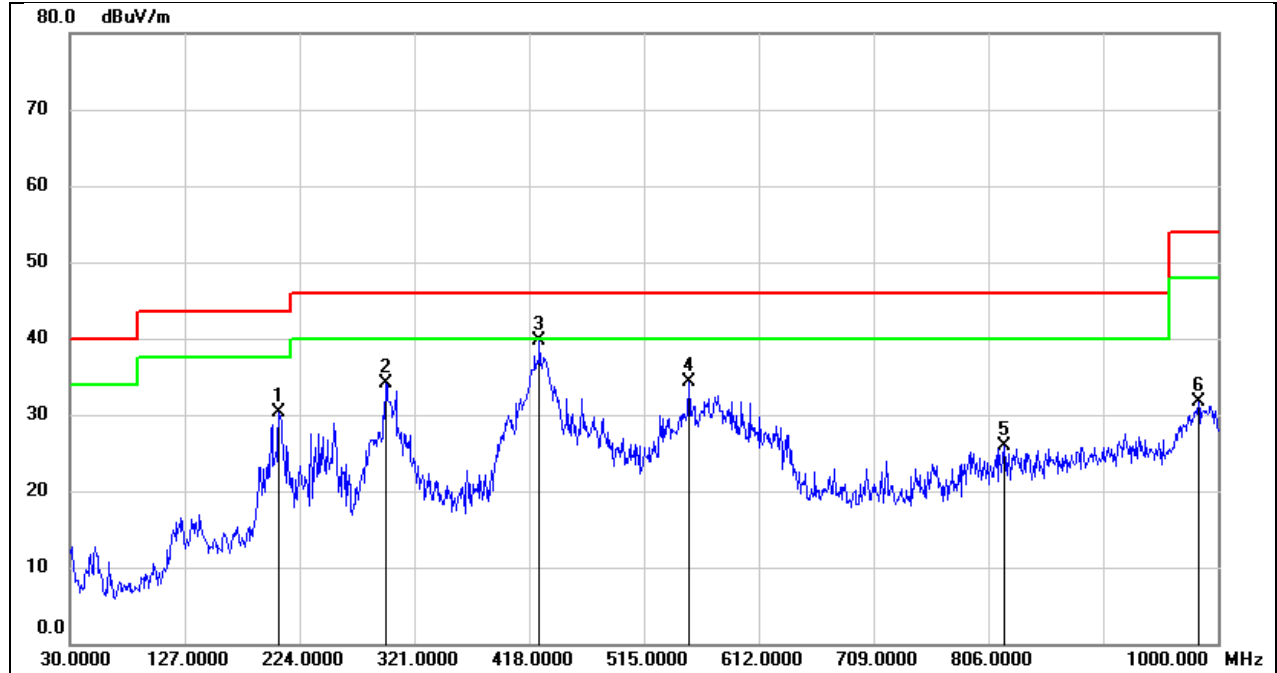

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	206.5399	43.15	-12.76	30.39	43.50	-13.11	peak
2	296.7500	45.66	-11.47	34.19	46.00	-11.81	peak
3	426.7300	48.45	-8.65	39.80	46.00	-6.20	peak
4	552.8300	40.89	-6.66	34.23	46.00	-11.77	peak
5	819.5800	27.95	-2.12	25.83	46.00	-20.17	peak
6	983.5100	31.63	0.00	31.63	54.00	-22.37	peak

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	AC120V_60Hz

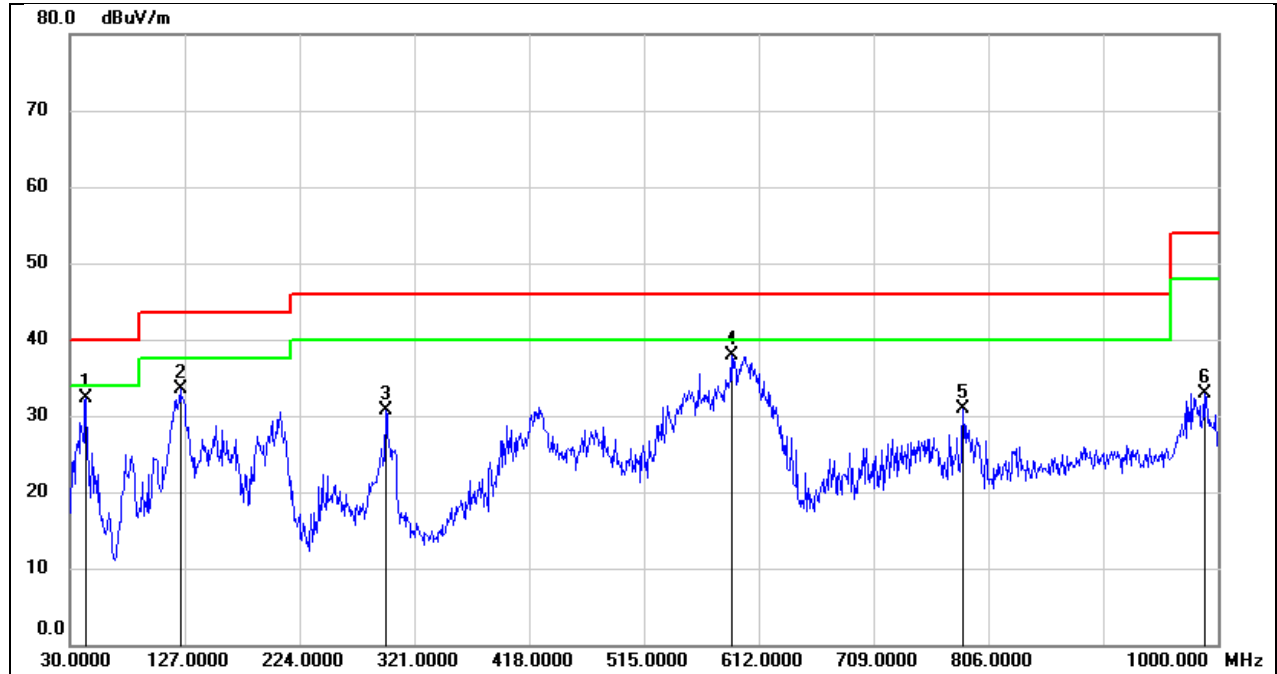

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	43.5800	47.41	-15.02	32.39	40.00	-7.61	peak
2	123.1200	48.33	-14.83	33.50	43.50	-10.00	peak
3	296.7500	42.26	-11.47	30.79	46.00	-15.21	peak
4	588.7199	43.64	-5.76	37.88	46.00	-8.12	peak
5	784.6599	33.67	-2.84	30.83	46.00	-15.17	peak
6	988.3600	32.89	0.09	32.98	54.00	-21.02	peak

9. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to FCC 47 CFR §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

*Decreases with the logarithm of the frequency.


TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2020. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

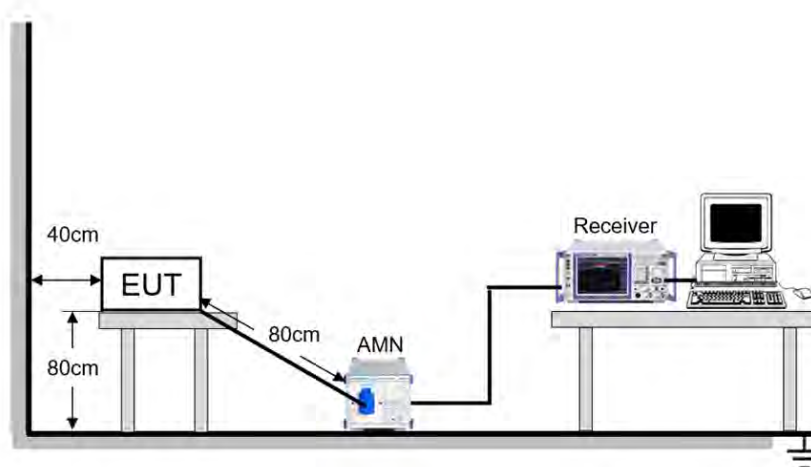

TEST ENVIRONMENT


Temperature	24.4℃	Relative Humidity	68%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	April 21, 2026	Test By	Wite Chen
-----------	----------------	---------	-----------

TEST RESULTS

Test Mode:	802.11a 20	Frequency(MHz):	5180
Line:	Line		

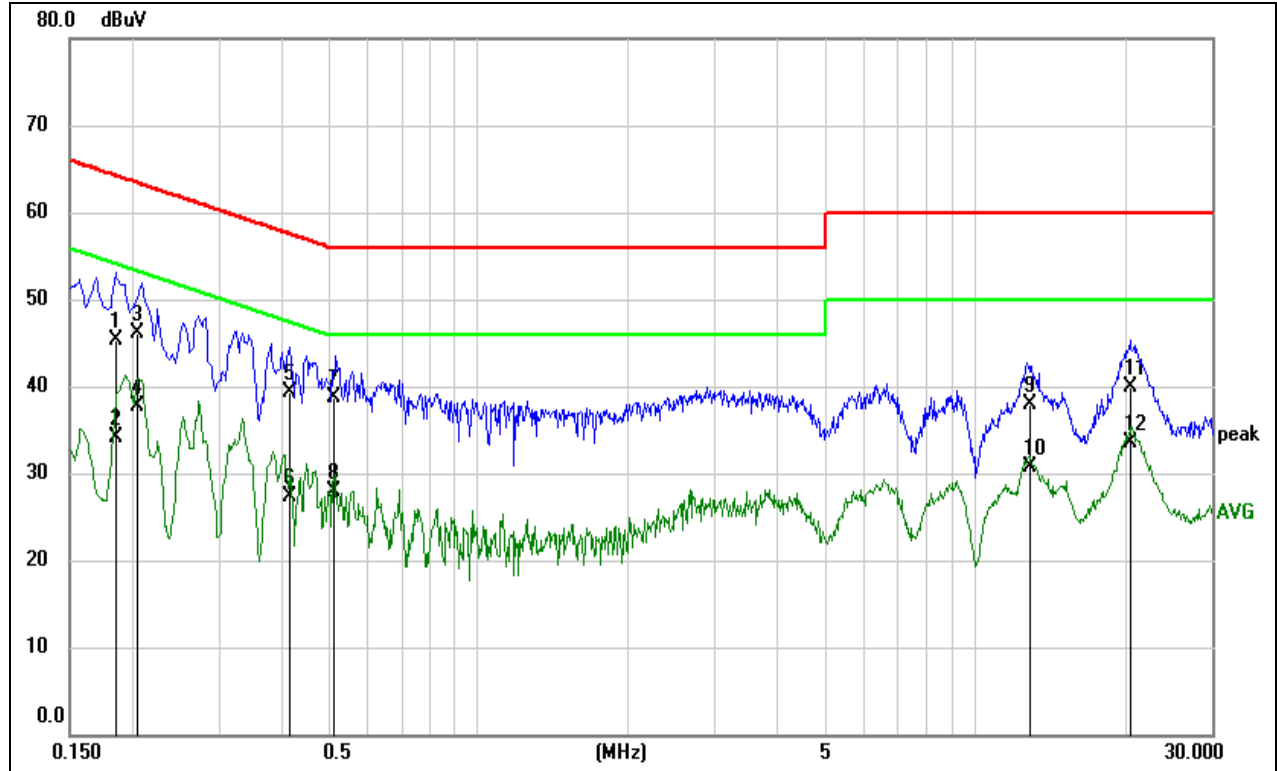


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1865	35.59	9.69	45.28	64.19	-18.91	QP
2	0.1865	24.41	9.69	34.10	54.19	-20.09	AVG
3	0.2056	36.48	9.64	46.12	63.38	-17.26	QP
4	0.2056	28.00	9.64	37.64	53.38	-15.74	AVG
5	0.4142	29.57	9.71	39.28	57.56	-18.28	QP
6	0.4142	17.66	9.71	27.37	47.56	-20.19	AVG
7	0.5125	28.90	9.73	38.63	56.00	-17.37	QP
8	0.5125	18.08	9.73	27.81	46.00	-18.19	AVG
9	12.8307	28.08	9.75	37.83	60.00	-22.17	QP
10	12.8307	21.00	9.75	30.75	50.00	-19.25	AVG
11	20.5187	30.17	9.83	40.00	60.00	-20.00	QP
12	20.5187	23.61	9.83	33.44	50.00	-16.56	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11a 20	Frequency(MHz):	5180
Line:	Neutral		

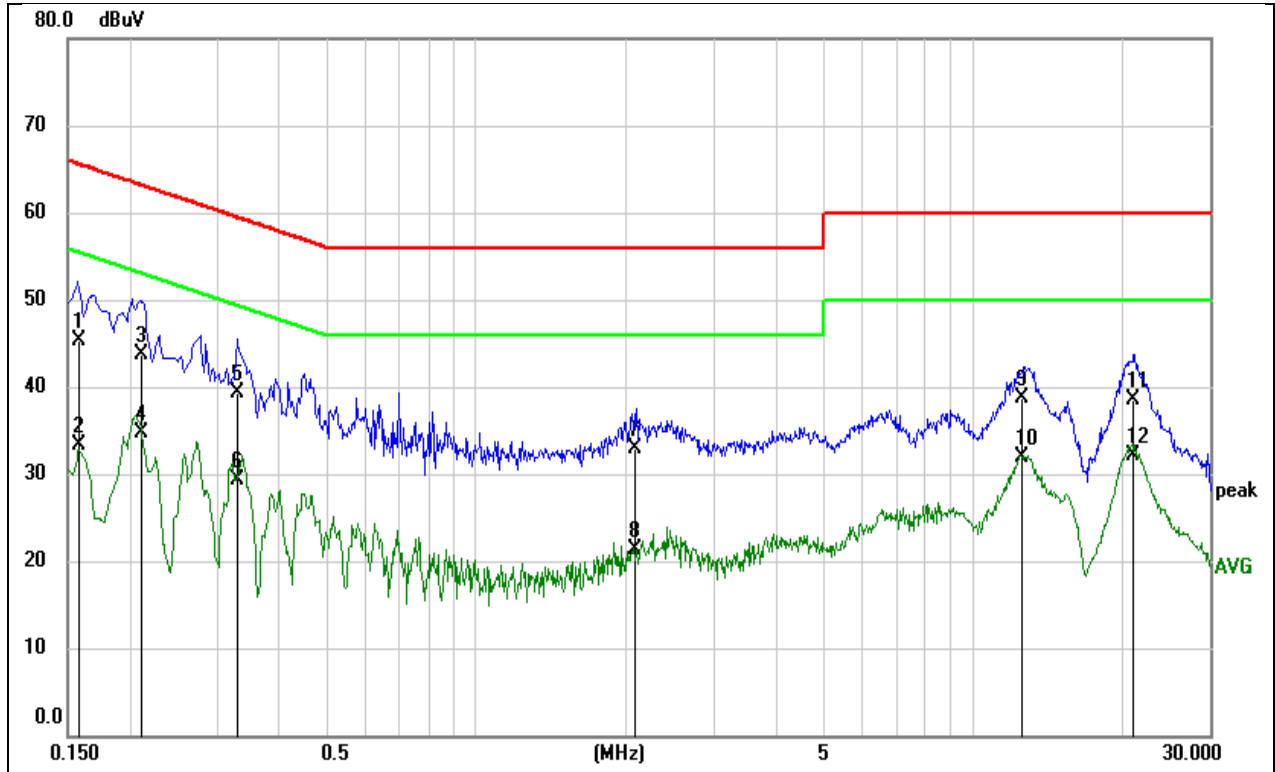

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1583	35.75	9.54	45.29	65.55	-20.26	QP
2	0.1583	23.75	9.54	33.29	55.55	-22.26	AVG
3	0.2115	34.18	9.54	43.72	63.15	-19.43	QP
4	0.2115	25.18	9.54	34.72	53.15	-18.43	AVG
5	0.3290	29.79	9.58	39.37	59.48	-20.11	QP
6	0.3290	19.71	9.58	29.29	49.48	-20.19	AVG
7	2.0939	23.42	9.55	32.97	56.00	-23.03	QP
8	2.0939	11.80	9.55	21.35	46.00	-24.65	AVG
9	12.6241	28.94	9.79	38.73	60.00	-21.27	QP
10	12.6241	22.14	9.79	31.93	50.00	-18.07	AVG
11	20.9819	28.78	9.81	38.59	60.00	-21.41	QP
12	20.9819	22.28	9.81	32.09	50.00	-17.91	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

11. TEST DATA


11.1. APPENDIX A: EMISSION BANDWIDTH

11.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Verdict
11A-CDD	Ant1	5180	20.00	5169.96	5189.96	PASS
	Ant2	5180	20.16	5169.92	5190.08	PASS
	Ant1	5200	20.36	5189.84	5210.20	PASS
	Ant2	5200	19.88	5190.16	5210.04	PASS
	Ant1	5240	19.88	5230.00	5249.88	PASS
	Ant2	5240	20.04	5230.00	5250.04	PASS
	Ant1	5260	20.28	5249.80	5270.08	PASS
	Ant2	5260	20.24	5249.84	5270.08	PASS
	Ant1	5280	20.04	5269.92	5289.96	PASS
	Ant2	5280	20.40	5269.84	5290.24	PASS
	Ant1	5320	20.08	5309.88	5329.96	PASS
	Ant2	5320	19.88	5310.00	5329.88	PASS
	Ant1	5500	19.88	5490.04	5509.92	PASS
	Ant2	5500	20.08	5489.92	5510.00	PASS
	Ant1	5580	20.08	5569.92	5590.00	PASS
	Ant2	5580	20.00	5569.88	5589.88	PASS
	Ant1	5700	20.12	5689.92	5710.04	PASS
	Ant2	5700	19.76	5690.08	5709.84	PASS
	Ant1	5720	20.16	5709.80	5729.96	PASS
	Ant2	5720	20.12	5709.92	5730.04	PASS
	Ant1	5720 UNII-2C	15.2	5709.80	5725	PASS
	Ant2	5720 UNII-2C	15.08	5709.92	5725	PASS
	Ant1	5720 UNII-3	4.96	5725	5729.96	PASS
	Ant2	5720 UNII-3	5.04	5725	5730.04	PASS
	Ant1	5745	20.08	5734.92	5755.00	PASS
	Ant2	5745	20.20	5734.84	5755.04	PASS
	Ant1	5785	20.28	5774.88	5795.16	PASS
	Ant2	5785	19.96	5774.96	5794.92	PASS
	Ant1	5825	20.24	5814.92	5835.16	PASS
	Ant2	5825	20.16	5814.88	5835.04	PASS
11N20MIMO	Ant1	5180	20.52	5169.72	5190.24	PASS
	Ant2	5180	20.48	5169.68	5190.16	PASS
	Ant1	5200	20.60	5189.72	5210.32	PASS
	Ant2	5200	20.44	5189.76	5210.20	PASS
	Ant1	5240	20.32	5229.84	5250.16	PASS
	Ant2	5240	20.04	5229.96	5250.00	PASS
	Ant1	5260	20.36	5249.80	5270.16	PASS
	Ant2	5260	20.32	5249.88	5270.20	PASS
	Ant1	5280	20.52	5269.72	5290.24	PASS
	Ant2	5280	20.32	5269.88	5290.20	PASS
	Ant1	5320	20.52	5309.76	5330.28	PASS
	Ant2	5320	20.28	5309.76	5330.04	PASS
	Ant1	5500	20.52	5489.76	5510.28	PASS
	Ant2	5500	20.16	5489.96	5510.12	PASS
	Ant1	5580	20.60	5569.68	5590.28	PASS
	Ant2	5580	20.32	5569.76	5590.08	PASS
	Ant1	5700	20.48	5689.76	5710.24	PASS
	Ant2	5700	20.36	5689.84	5710.20	PASS
	Ant1	5720	20.44	5709.76	5730.20	PASS
	Ant2	5720	20.08	5709.96	5730.04	PASS
	Ant1	5720 UNII-2C	15.24	5709.76	5725	PASS
	Ant2	5720 UNII-2C	15.04	5709.96	5725	PASS

	Ant1	5720_UNII-3	5.2	5725	5730.20	PASS
	Ant2	5720_UNII-3	5.04	5725	5730.04	PASS
	Ant1	5745	20.56	5734.68	5755.24	PASS
	Ant2	5745	20.24	5734.84	5755.08	PASS
	Ant1	5785	20.44	5774.76	5795.20	PASS
	Ant2	5785	20.32	5774.76	5795.08	PASS
	Ant1	5825	20.36	5814.84	5835.20	PASS
	Ant2	5825	20.40	5814.84	5835.24	PASS
11N40MIMO	Ant1	5190	40.80	5169.68	5210.48	PASS
	Ant2	5190	40.88	5169.60	5210.48	PASS
	Ant1	5230	40.32	5209.84	5250.16	PASS
	Ant2	5230	40.16	5210.00	5250.16	PASS
	Ant1	5270	41.12	5249.44	5290.56	PASS
	Ant2	5270	40.32	5249.84	5290.16	PASS
	Ant1	5310	41.20	5289.52	5330.72	PASS
	Ant2	5310	40.16	5289.92	5330.08	PASS
	Ant1	5510	40.88	5489.52	5530.40	PASS
	Ant2	5510	40.48	5489.84	5530.32	PASS
	Ant1	5550	41.12	5529.36	5570.48	PASS
	Ant2	5550	40.48	5529.76	5570.24	PASS
	Ant1	5670	41.28	5649.28	5690.56	PASS
	Ant2	5670	40.56	5649.84	5690.40	PASS
	Ant1	5710	41.36	5689.44	5730.80	PASS
	Ant2	5710	40.48	5689.76	5730.24	PASS
	Ant1	5710_UNII-2C	35.56	5689.44	5725	PASS
	Ant2	5710_UNII-2C	35.24	5689.76	5725	PASS
	Ant1	5710_UNII-3	5.8	5725	5730.80	PASS
	Ant2	5710_UNII-3	5.24	5725	5730.24	PASS
	Ant1	5755	40.80	5734.60	5775.40	PASS
	Ant2	5755	40.64	5734.76	5775.40	PASS
	Ant1	5795	41.20	5774.36	5815.56	PASS
	Ant2	5795	40.64	5774.60	5815.24	PASS
11AC80MIMO	Ant1	5210	81.92	5169.20	5251.12	PASS
	Ant2	5210	82.72	5169.20	5251.92	PASS
	Ant1	5290	81.92	5249.20	5331.12	PASS
	Ant2	5290	80.48	5250.00	5330.48	PASS
	Ant1	5530	82.08	5489.04	5571.12	PASS
	Ant2	5530	81.12	5489.36	5570.48	PASS
	Ant1	5610	82.08	5569.20	5651.28	PASS
	Ant2	5610	80.80	5569.84	5650.64	PASS
	Ant1	5690	82.08	5649.04	5731.12	PASS
	Ant2	5690	80.96	5649.68	5730.64	PASS
	Ant1	5690_UNII-2C	75.96	5649.04	5725	PASS
	Ant2	5690_UNII-2C	75.32	5649.68	5725	PASS
	Ant1	5690_UNII-3	6.12	5725	5731.12	PASS
	Ant2	5690_UNII-3	5.64	5725	5730.64	PASS
	Ant1	5775	82.08	5734.04	5816.12	PASS
	Ant2	5775	80.80	5734.68	5815.48	PASS

11.1.2. Test Graphs

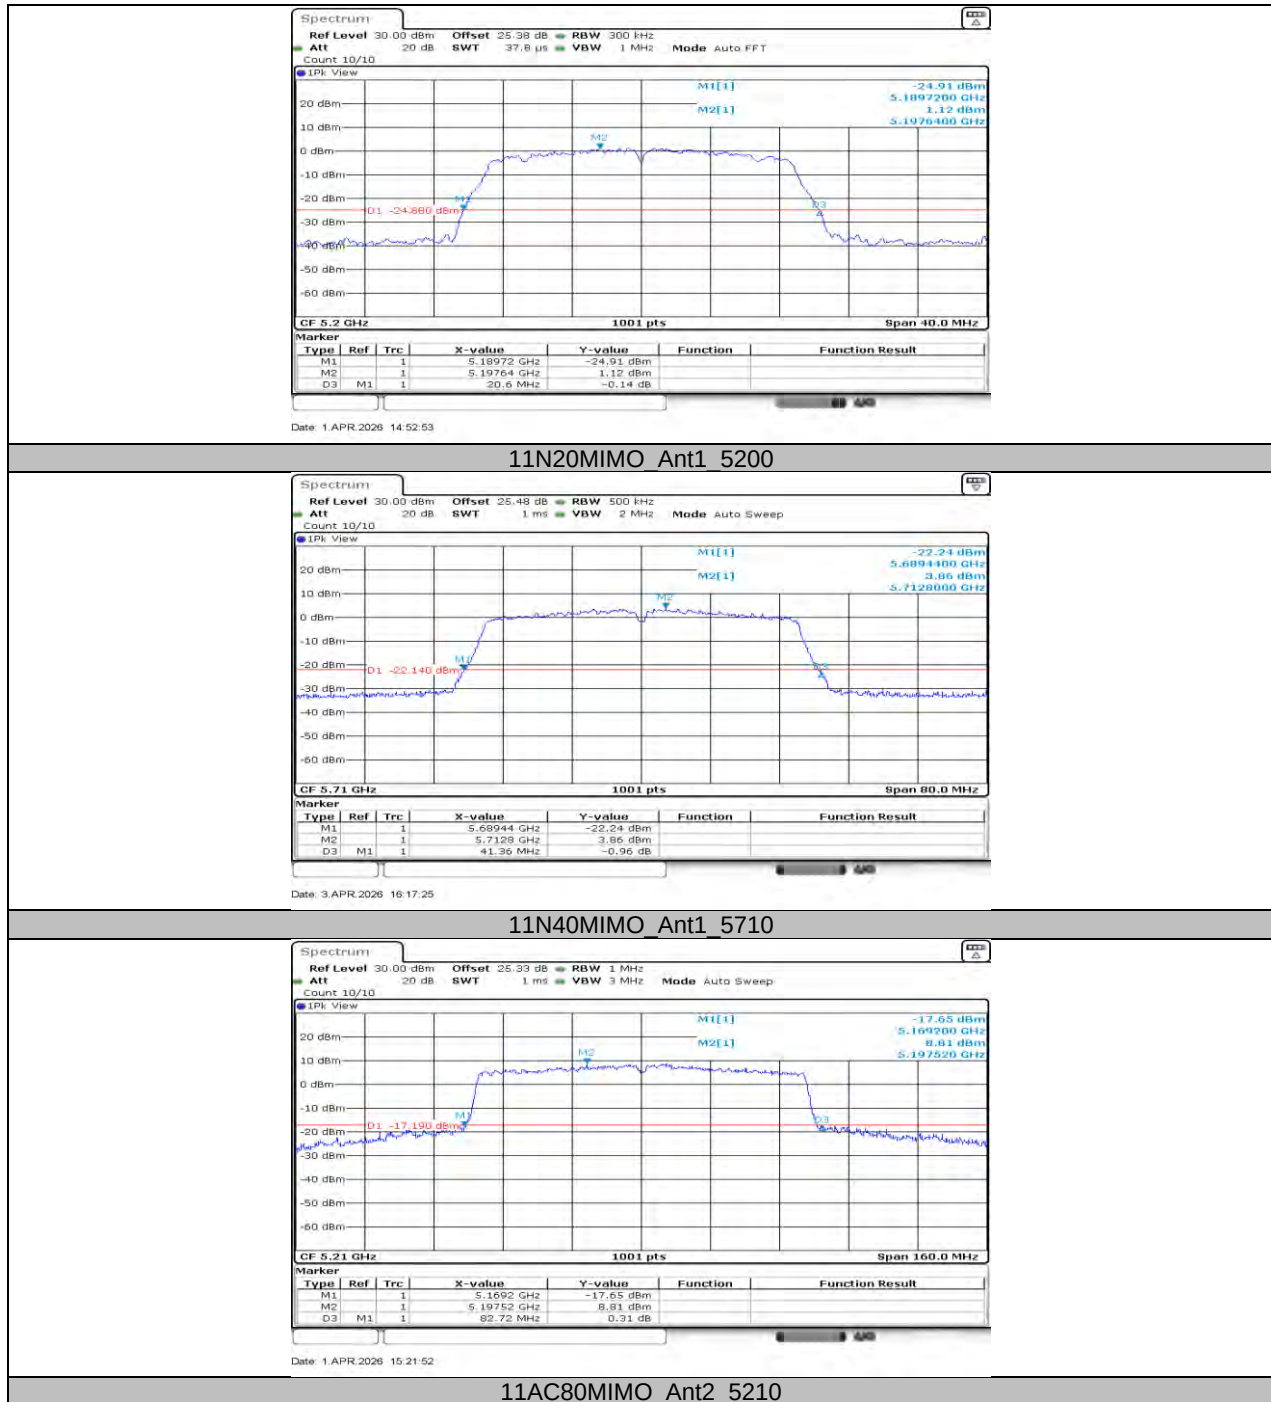

Note:

1. Only the worst data plots were reported to show setting parameter compliance with testing method/procedure.
2. RBW setting to 300kHz is used in 802.11a/n HT20 modes.
3. RBW setting to 500kHz is used in 802.11n HT40 mode.
4. RBW setting to 1MHz is used in 802.11ac VHT80 mode.


11.2. APPENDIX B: OCCUPIED CHANNEL BANDWIDTH

11.2.1. Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
11A-CDD	Ant1	5180	17.063	5171.4086	5188.4715	PASS
	Ant2	5180	16.823	5171.5285	5188.3516	PASS
	Ant1	5200	17.183	5191.3686	5208.5514	PASS
	Ant2	5200	16.823	5191.5684	5208.3916	PASS
	Ant1	5240	17.143	5231.3686	5248.5115	PASS
	Ant2	5240	16.823	5231.5684	5248.3916	PASS
	Ant1	5260	17.143	5251.3686	5268.5115	PASS
	Ant2	5260	16.863	5251.5285	5268.3916	PASS
	Ant1	5280	17.183	5271.3686	5288.5514	PASS
	Ant2	5280	16.863	5271.5285	5288.3916	PASS
	Ant1	5320	17.183	5311.3686	5328.5514	PASS
	Ant2	5320	16.823	5311.5285	5328.3516	PASS
	Ant1	5500	17.183	5491.3686	5508.5514	PASS
	Ant2	5500	16.783	5491.5684	5508.3516	PASS
	Ant1	5580	17.183	5571.3686	5588.5514	PASS
	Ant2	5580	16.863	5571.4885	5588.3516	PASS
	Ant1	5700	17.183	5691.3686	5708.5514	PASS
	Ant2	5700	16.863	5691.5285	5708.3916	PASS
	Ant1	5720	17.183	5711.3287	5728.5115	PASS
	Ant2	5720	16.863	5711.5285	5728.3916	PASS
	Ant1	5720 UNII-2C	13.671	5711.3287	5725	PASS
	Ant2	5720 UNII-2C	13.471	5711.5285	5725	PASS
	Ant1	5720 UNII-3	3.511	5725	5728.5115	PASS
	Ant2	5720 UNII-3	3.392	5725	5728.3916	PASS
	Ant1	5745	17.183	5736.3686	5753.5514	PASS
	Ant2	5745	16.823	5736.5285	5753.3516	PASS
	Ant1	5785	17.183	5776.3686	5793.5514	PASS
	Ant2	5785	16.823	5776.5285	5793.3516	PASS
	Ant1	5825	17.183	5816.3686	5833.5514	PASS
	Ant2	5825	16.903	5816.4885	5833.3916	PASS
11N20MIMO	Ant1	5180	17.942	5171.0090	5188.9510	PASS
	Ant2	5180	17.702	5171.1289	5188.8312	PASS
	Ant1	5200	17.982	5191.0090	5208.9910	PASS
	Ant2	5200	17.742	5191.1289	5208.8711	PASS
	Ant1	5240	17.982	5231.0090	5248.9910	PASS
	Ant2	5240	17.702	5231.1289	5248.8312	PASS
	Ant1	5260	17.982	5251.0090	5268.9910	PASS
	Ant2	5260	17.702	5251.1289	5268.8312	PASS
	Ant1	5280	17.982	5271.0090	5288.9910	PASS
	Ant2	5280	17.702	5271.1289	5288.8312	PASS
	Ant1	5320	17.982	5311.0090	5328.9910	PASS
	Ant2	5320	17.702	5311.1289	5328.8312	PASS
	Ant1	5500	17.982	5491.0090	5508.9910	PASS
	Ant2	5500	17.702	5491.1289	5508.8312	PASS
	Ant1	5580	18.022	5570.9690	5588.9910	PASS
	Ant2	5580	17.702	5571.1289	5588.8312	PASS
	Ant1	5700	18.022	5690.9690	5708.9910	PASS
	Ant2	5700	17.702	5691.1289	5708.8312	PASS
	Ant1	5720	17.982	5711.0090	5728.9910	PASS
	Ant2	5720	17.702	5711.1289	5728.8312	PASS
	Ant1	5720 UNII-2C	13.991	5711.0090	5725	PASS
	Ant2	5720 UNII-2C	13.871	5711.1289	5725	PASS
	Ant1	5720 UNII-3	3.991	5725	5728.9910	PASS

	Ant2	5720 UNII-3	3.831	5725	5728.8312	PASS
	Ant1	5745	18.022	5735.9690	5753.9910	PASS
	Ant2	5745	17.702	5736.1289	5753.8312	PASS
	Ant1	5785	18.022	5775.9690	5793.9910	PASS
	Ant2	5785	17.702	5776.1289	5793.8312	PASS
	Ant1	5825	17.982	5816.0090	5833.9910	PASS
	Ant2	5825	17.702	5816.1289	5833.8312	PASS
11N40MIMO	Ant1	5190	36.284	5171.9381	5208.2218	PASS
	Ant2	5190	36.284	5171.8581	5208.1419	PASS
	Ant1	5230	36.284	5211.9381	5248.2218	PASS
	Ant2	5230	36.284	5211.9381	5248.2218	PASS
	Ant1	5270	36.204	5251.9381	5288.1419	PASS
	Ant2	5270	36.444	5251.8581	5288.3017	PASS
	Ant1	5310	36.124	5291.9381	5328.0619	PASS
	Ant2	5310	36.444	5291.7782	5328.2218	PASS
	Ant1	5510	36.284	5491.8581	5528.1419	PASS
	Ant2	5510	36.444	5491.8581	5528.3017	PASS
	Ant1	5550	36.204	5531.9381	5568.1419	PASS
	Ant2	5550	36.444	5531.7782	5568.2218	PASS
	Ant1	5670	36.204	5651.8581	5688.0619	PASS
	Ant2	5670	36.523	5651.7782	5688.3017	PASS
	Ant1	5710	36.204	5691.9381	5728.1419	PASS
	Ant2	5710	36.523	5691.7782	5728.3017	PASS
	Ant1	5710 UNII-2C	33.062	5691.9381	5725	PASS
	Ant2	5710 UNII-2C	33.222	5691.7782	5725	PASS
	Ant1	5710 UNII-3	3.142	5725	5728.1419	PASS
	Ant2	5710 UNII-3	3.302	5725	5728.3017	PASS
	Ant1	5755	36.284	5736.8581	5773.1419	PASS
	Ant2	5755	36.523	5736.7782	5773.3017	PASS
	Ant1	5795	36.204	5776.8581	5813.0619	PASS
	Ant2	5795	36.523	5776.7782	5813.3017	PASS
11AC80MIMO	Ant1	5210	76.084	5171.9580	5248.0420	PASS
	Ant2	5210	75.764	5172.1179	5247.8821	PASS
	Ant1	5290	75.764	5252.1179	5327.8821	PASS
	Ant2	5290	75.285	5252.4376	5327.7223	PASS
	Ant1	5530	75.764	5492.1179	5567.8821	PASS
	Ant2	5530	75.285	5492.4376	5567.7223	PASS
	Ant1	5610	75.764	5572.1179	5647.8821	PASS
	Ant2	5610	75.604	5572.2777	5647.8821	PASS
	Ant1	5690	75.764	5652.1179	5727.8821	PASS
	Ant2	5690	75.445	5652.2777	5727.7223	PASS
	Ant1	5690 UNII-2C	72.882	5652.1179	5725	PASS
	Ant2	5690 UNII-2C	72.722	5652.2777	5725	PASS
	Ant1	5690 UNII-3	2.882	5725	5727.8821	PASS
	Ant2	5690 UNII-3	2.722	5725	5727.7223	PASS
	Ant1	5775	75.764	5737.1179	5812.8821	PASS
	Ant2	5775	75.445	5737.4376	5812.8821	PASS

11.2.2. Test Graphs

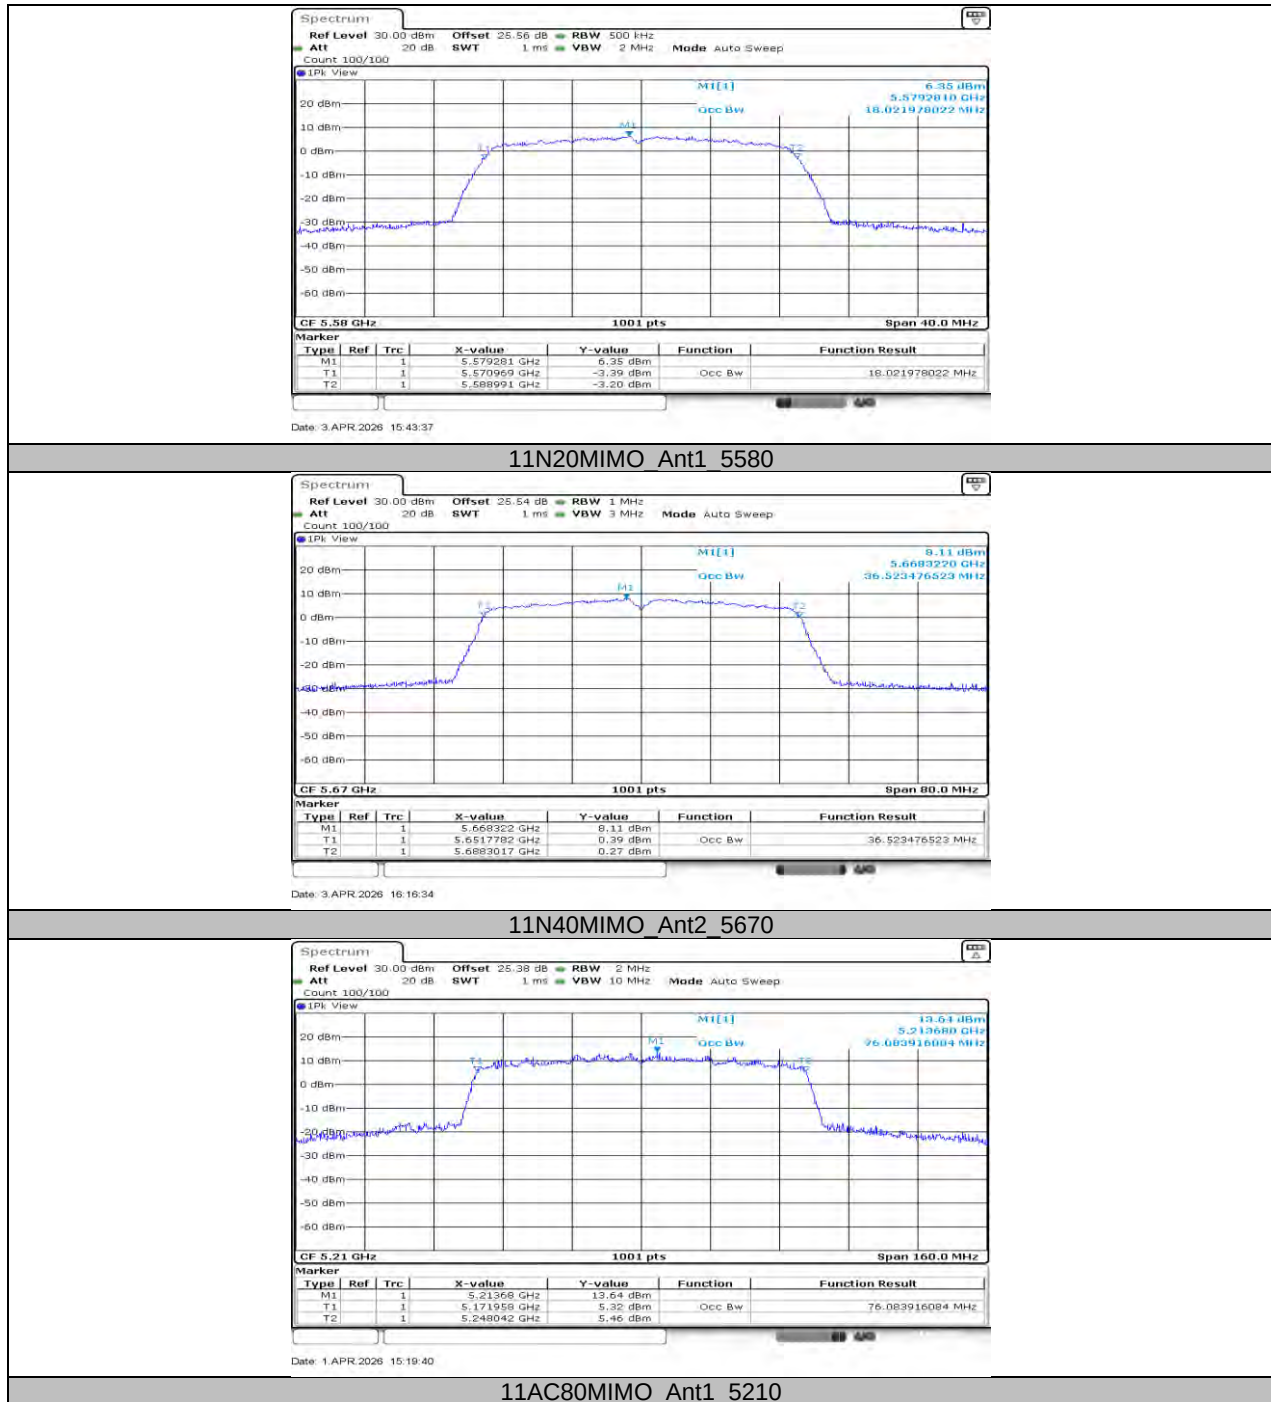

Note:


1. Only the worst data plots were reported to show setting parameter compliance with testing method/procedure.
2. RBW setting to 500kHz is used in 802.11a/n HT20 modes.
3. RBW setting to 1MHz is used in 802.11n HT40 modes.
4. RBW setting to 2MHz is used in 802.11ac VHT80 modes.

11.3. APPENDIX C: MIN EMISSION BANDWIDTH

11.3.1. Test Result

Test Mode	Antenna	Frequency[MHz]	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A-CDD	Ant1	5720	15.12	5712.40	5727.52	---	---
	Ant2	5720	15.12	5712.44	5727.56	---	---
	Ant1	5720_UNII-2C	12.6	5712.40	5725	---	---
	Ant2	5720_UNII-2C	12.56	5712.44	5725	---	---
	Ant1	5720_UNII-3	2.52	5725	5727.52	≥ 0.5	PASS
	Ant2	5720_UNII-3	2.56	5725	5727.56	≥ 0.5	PASS
	Ant1	5745	13.76	5738.72	5752.48	≥ 0.5	PASS
	Ant2	5745	13.84	5738.68	5752.52	≥ 0.5	PASS
	Ant1	5785	14.40	5777.44	5791.84	≥ 0.5	PASS
	Ant2	5785	15.12	5777.40	5792.52	≥ 0.5	PASS
	Ant1	5825	13.84	5818.72	5832.56	≥ 0.5	PASS
	Ant2	5825	16.28	5816.84	5833.12	≥ 0.5	PASS
11N20MIMO	Ant1	5720	17.32	5711.20	5728.52	---	---
	Ant2	5720	15.12	5712.40	5727.52	---	---
	Ant1	5720_UNII-2C	13.8	5711.20	5725	---	---
	Ant2	5720_UNII-2C	12.6	5712.40	5725	---	---
	Ant1	5720_UNII-3	3.52	5725	5728.52	≥ 0.5	PASS
	Ant2	5720_UNII-3	2.52	5725	5727.52	≥ 0.5	PASS
	Ant1	5745	15.96	5737.40	5753.36	≥ 0.5	PASS
	Ant2	5745	16.52	5736.60	5753.12	≥ 0.5	PASS
	Ant1	5785	17.28	5776.20	5793.48	≥ 0.5	PASS
	Ant2	5785	15.72	5776.80	5792.52	≥ 0.5	PASS
	Ant1	5825	14.96	5817.48	5832.44	≥ 0.5	PASS
	Ant2	5825	17.32	5816.44	5833.76	≥ 0.5	PASS
11N40MIMO	Ant1	5710	35.20	5692.40	5727.60	---	---
	Ant2	5710	35.20	5692.40	5727.60	---	---
	Ant1	5710_UNII-2C	32.6	5692.40	5725	---	---
	Ant2	5710_UNII-2C	32.6	5692.40	5725	---	---
	Ant1	5710_UNII-3	2.6	5725	5727.60	≥ 0.5	PASS
	Ant2	5710_UNII-3	2.6	5725	5727.60	≥ 0.5	PASS
	Ant1	5755	35.04	5737.48	5772.52	≥ 0.5	PASS
	Ant2	5755	35.04	5737.48	5772.52	≥ 0.5	PASS
	Ant1	5795	35.12	5777.48	5812.60	≥ 0.5	PASS
	Ant2	5795	35.12	5777.48	5812.60	≥ 0.5	PASS
11AC80MIMO	Ant1	5690	73.28	5654.32	5727.60	---	---
	Ant2	5690	75.20	5652.40	5727.60	---	---
	Ant1	5690_UNII-2C	70.68	5654.32	5725	---	---
	Ant2	5690_UNII-2C	72.6	5652.40	5725	---	---
	Ant1	5690_UNII-3	2.6	5725	5727.60	≥ 0.5	PASS
	Ant2	5690_UNII-3	2.6	5725	5727.60	≥ 0.5	PASS
	Ant1	5775	75.20	5737.40	5812.60	≥ 0.5	PASS
	Ant2	5775	74.56	5738.04	5812.60	≥ 0.5	PASS

11.3.2. Test Graphs

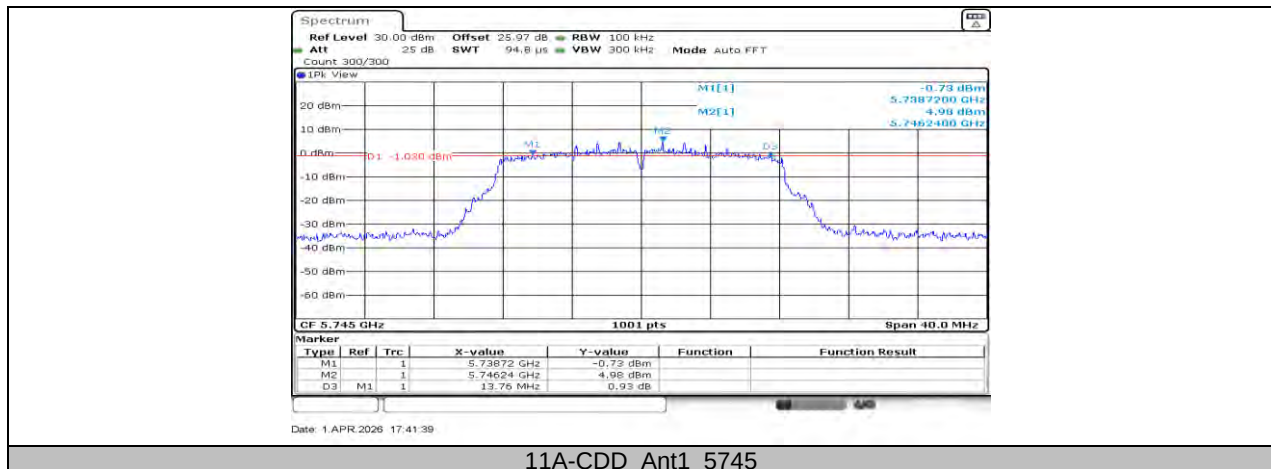

Note:

1. Only the worst data plots were reported to show setting parameter compliance with testing method/procedure.
2. For all modes, RBW setting to 100kHz is used on 6dB bandwidth measurement.

11.4. APPENDIX D: MAXIMUM CONDUCTED OUTPUT POWER

11.4.1. Test Result

Test Mode	Antenna	Frequency[MHz]	Power [dBm]	FCC Limit [dBm]	ISED Limit [dBm]	EIRP [dBm]	Limit [dBm]	Verdict
11A-CDD	Ant1	5180	10.32	≤23.98	---	13.36	≤22.32	PASS
	Ant2	5180	10.24	≤23.98	---	13.28	≤22.26	PASS
	total	5180	13.29	≤23.98	---	16.33	≤22.26	PASS
	Ant1	5200	10.25	≤23.98	---	13.29	≤22.35	PASS
	Ant2	5200	10.16	≤23.98	---	13.20	≤22.26	PASS
	total	5200	13.22	≤23.98	---	16.26	≤22.26	PASS
	Ant1	5240	9.94	≤23.98	---	12.98	≤22.34	PASS
	Ant2	5240	9.95	≤23.98	---	12.99	≤22.26	PASS
	total	5240	12.96	≤23.98	---	16.00	≤22.26	PASS
	Ant1	5260	14.67	≤23.98	≤23.34	17.84	≤29.34	PASS
	Ant2	5260	14.65	≤23.98	≤23.27	17.82	≤29.27	PASS
	total	5260	17.67	≤23.98	≤23.27	20.84	≤29.27	PASS
	Ant1	5280	14.74	≤23.98	≤23.35	17.91	≤29.35	PASS
	Ant2	5280	14.73	≤23.98	≤23.27	17.90	≤29.27	PASS
	total	5280	17.75	≤23.98	≤23.27	20.92	≤29.27	PASS
	Ant1	5320	14.96	≤23.98	≤23.35	18.13	≤29.35	PASS
	Ant2	5320	14.47	≤23.98	≤23.26	17.64	≤29.26	PASS
	total	5320	17.73	≤23.98	≤23.26	20.90	≤29.26	PASS
	Ant1	5500	15.10	≤23.98	≤23.35	19.55	≤29.35	PASS
	Ant2	5500	14.57	≤23.98	≤23.25	19.02	≤29.25	PASS
	total	5500	17.85	≤23.98	≤23.25	22.30	≤29.25	PASS
	Ant1	5580	15.30	≤23.98	≤23.35	19.75	≤29.35	PASS
	Ant2	5580	14.89	≤23.98	≤23.27	19.34	≤29.27	PASS
	total	5580	18.11	≤23.98	≤23.27	22.56	≤29.27	PASS
	Ant1	5700	15.37	≤23.98	≤23.35	19.82	≤29.35	PASS
	Ant2	5700	15.11	≤23.96	≤23.27	19.56	≤29.27	PASS
	total	5700	18.25	≤23.96	≤23.27	22.70	≤29.27	PASS
	Ant1	5720 UNII-2C	14.78	≤22.82	≤22.36	19.23	≤28.36	PASS
	Ant2	5720 UNII-2C	14.44	≤22.78	≤22.29	18.89	≤28.29	PASS
	total	5720 UNII-2C	17.62	≤22.78	≤22.29	22.07	≤28.29	PASS
	Ant1	5720 UNII-3	7.04	≤30.00	≤30.00	12.53	---	PASS
	Ant2	5720 UNII-3	6.78	≤30.00	≤30.00	12.27	---	PASS
	total	5720 UNII-3	9.92	≤30.00	≤30.00	15.41	---	PASS
	Ant1	5745	15.75	≤30.00	≤30.00	21.24	---	PASS
	Ant2	5745	15.71	≤30.00	≤30.00	21.20	---	PASS
	total	5745	18.74	≤30.00	≤30.00	24.23	---	PASS
	Ant1	5785	15.48	≤30.00	≤30.00	20.97	---	PASS
	Ant2	5785	15.46	≤30.00	≤30.00	20.95	---	PASS
	total	5785	18.48	≤30.00	≤30.00	23.97	---	PASS
	Ant1	5825	15.25	≤30.00	≤30.00	20.74	---	PASS
	Ant2	5825	15.23	≤30.00	≤30.00	20.72	---	PASS
	total	5825	18.25	≤30.00	≤30.00	23.74	---	PASS
11N20MIMO	Ant1	5180	10.20	≤23.98	---	13.24	≤22.54	PASS
	Ant2	5180	10.27	≤23.98	---	13.31	≤22.48	PASS
	total	5180	13.25	≤23.98	---	16.29	≤22.48	PASS
	Ant1	5200	10.02	≤23.98	---	13.06	≤22.55	PASS
	Ant2	5200	10.19	≤23.98	---	13.23	≤22.49	PASS
	total	5200	13.12	≤23.98	---	16.16	≤22.49	PASS
	Ant1	5240	10.29	≤23.98	---	13.33	≤22.55	PASS
	Ant2	5240	10.52	≤23.98	---	13.56	≤22.48	PASS
	total	5240	13.42	≤23.98	---	16.46	≤22.48	PASS
	Ant1	5260	11.94	≤23.98	≤23.55	15.11	≤29.55	PASS
	Ant2	5260	12.09	≤23.98	≤23.48	15.26	≤29.48	PASS
	total	5260	15.03	≤23.98	≤23.48	18.20	≤29.48	PASS


	Ant1	5280	12.18	≤23.98	≤23.55	15.35	≤29.55	PASS
	Ant2	5280	12.31	≤23.98	≤23.48	15.48	≤29.48	PASS
	total	5280	15.26	≤23.98	≤23.48	18.43	≤29.48	PASS
	Ant1	5320	12.17	≤23.98	≤23.55	15.34	≤29.55	PASS
	Ant2	5320	11.90	≤23.98	≤23.48	15.07	≤29.48	PASS
	total	5320	15.05	≤23.98	≤23.48	18.22	≤29.48	PASS
	Ant1	5500	12.43	≤23.98	≤23.55	16.88	≤29.55	PASS
	Ant2	5500	12.17	≤23.98	≤23.48	16.62	≤29.48	PASS
	total	5500	15.31	≤23.98	≤23.48	19.76	≤29.48	PASS
	Ant1	5580	12.54	≤23.98	≤23.56	16.99	≤29.56	PASS
	Ant2	5580	12.31	≤23.98	≤23.48	16.76	≤29.48	PASS
	total	5580	15.44	≤23.98	≤23.48	19.89	≤29.48	PASS
	Ant1	5700	12.64	≤23.98	≤23.56	17.09	≤29.56	PASS
	Ant2	5700	12.63	≤23.98	≤23.48	17.08	≤29.48	PASS
	total	5700	15.65	≤23.98	≤23.48	20.10	≤29.48	PASS
	Ant1	5720 UNII-2C	12.09	≤22.83	≤22.46	16.54	≤28.46	PASS
	Ant2	5720 UNII-2C	12.02	≤22.77	≤22.42	16.47	≤28.42	PASS
	total	5720 UNII-2C	15.07	≤22.77	≤22.42	19.52	≤28.42	PASS
	Ant1	5720 UNII-3	4.86	≤30.00	≤30.00	10.35	---	PASS
	Ant2	5720 UNII-3	4.83	≤30.00	≤30.00	10.32	---	PASS
	total	5720 UNII-3	7.86	≤30.00	≤30.00	13.35	---	PASS
	Ant1	5745	13.16	≤30.00	≤30.00	18.65	---	PASS
	Ant2	5745	13.22	≤30.00	≤30.00	18.71	---	PASS
	total	5745	16.20	≤30.00	≤30.00	21.69	---	PASS
	Ant1	5785	12.80	≤30.00	≤30.00	18.29	---	PASS
	Ant2	5785	13.00	≤30.00	≤30.00	18.49	---	PASS
	total	5785	15.91	≤30.00	≤30.00	21.40	---	PASS
	Ant1	5825	12.63	≤30.00	≤30.00	18.12	---	PASS
	Ant2	5825	12.76	≤30.00	≤30.00	18.25	---	PASS
	total	5825	15.71	≤30.00	≤30.00	21.20	---	PASS
11N40MIMO	Ant1	5190	13.22	≤23.98	---	16.26	≤23.00	PASS
	Ant2	5190	13.04	≤23.98	---	16.08	≤23.00	PASS
	total	5190	16.14	≤23.98	---	19.18	≤23.00	PASS
	Ant1	5230	13.06	≤23.98	---	16.10	≤23.00	PASS
	Ant2	5230	12.94	≤23.98	---	15.98	≤23.00	PASS
	total	5230	16.01	≤23.98	---	19.05	≤23.00	PASS
	Ant1	5270	13.27	≤23.98	≤23.98	16.44	≤30.00	PASS
	Ant2	5270	13.38	≤23.98	≤23.98	16.55	≤30.00	PASS
	total	5270	16.34	≤23.98	≤23.98	19.51	≤30.00	PASS
	Ant1	5310	13.54	≤23.98	≤23.98	16.71	≤30.00	PASS
	Ant2	5310	13.21	≤23.98	≤23.98	16.38	≤30.00	PASS
	total	5310	16.39	≤23.98	≤23.98	19.56	≤30.00	PASS
	Ant1	5510	13.87	≤23.98	≤23.98	18.32	≤30.00	PASS
	Ant2	5510	13.31	≤23.98	≤23.98	17.76	≤30.00	PASS
	total	5510	16.61	≤23.98	≤23.98	21.06	≤30.00	PASS
	Ant1	5550	13.95	≤23.98	≤23.98	18.40	≤30.00	PASS
	Ant2	5550	13.70	≤23.98	≤23.98	18.15	≤30.00	PASS
	total	5550	16.84	≤23.98	≤23.98	21.29	≤30.00	PASS
	Ant1	5670	14.21	≤23.98	≤23.98	18.66	≤30.00	PASS
	Ant2	5670	14.01	≤23.98	≤23.98	18.46	≤30.00	PASS
	total	5670	17.12	≤23.98	≤23.98	21.57	≤30.00	PASS
	Ant1	5710 UNII-2C	13.68	≤23.98	≤23.98	18.13	≤30.00	PASS
	Ant2	5710 UNII-2C	13.49	≤23.98	≤23.98	17.94	≤30.00	PASS
	total	5710 UNII-2C	16.60	≤23.98	≤23.98	21.05	≤30.00	PASS
	Ant1	5710 UNII-3	0.14	≤30.00	≤30.00	5.63	---	PASS
	Ant2	5710 UNII-3	-0.02	≤30.00	≤30.00	5.47	---	PASS
	total	5710 UNII-3	3.07	≤30.00	≤30.00	8.56	---	PASS
	Ant1	5755	14.44	≤30.00	≤30.00	19.93	---	PASS
	Ant2	5755	14.47	≤30.00	≤30.00	19.96	---	PASS
	total	5755	17.47	≤30.00	≤30.00	22.96	---	PASS


	Ant1	5795	14.13	≤30.00	≤30.00	19.62	---	PASS
	Ant2	5795	14.00	≤30.00	≤30.00	19.49	---	PASS
	total	5795	17.08	≤30.00	≤30.00	22.57	---	PASS
11AC80MIMO	Ant1	5210	13.15	≤23.98	---	16.19	≤23.00	PASS
	Ant2	5210	12.87	≤23.98	---	15.91	≤23.00	PASS
	total	5210	16.02	≤23.98	---	19.06	≤23.00	PASS
	Ant1	5290	13.00	≤23.98	≤23.98	16.17	≤30.00	PASS
	Ant2	5290	12.82	≤23.98	≤23.98	15.99	≤30.00	PASS
	total	5290	15.92	≤23.98	≤23.98	19.09	≤30.00	PASS
	Ant1	5530	13.44	≤23.98	≤23.98	17.89	≤30.00	PASS
	Ant2	5530	13.16	≤23.98	≤23.98	17.61	≤30.00	PASS
	total	5530	16.31	≤23.98	≤23.98	20.76	≤30.00	PASS
	Ant1	5610	13.76	≤23.98	≤23.98	18.21	≤30.00	PASS
	Ant2	5610	13.35	≤23.98	≤23.98	17.80	≤30.00	PASS
	total	5610	16.57	≤23.98	≤23.98	21.02	≤30.00	PASS
	Ant1	5690 UNII-2C	13.60	≤23.98	≤23.98	18.05	≤30.00	PASS
	Ant2	5690 UNII-2C	13.29	≤23.98	≤23.98	17.74	≤30.00	PASS
	total	5690 UNII-2C	16.46	≤23.98	≤23.98	20.91	≤30.00	PASS
	Ant1	5690 UNII-3	-1.91	≤30.00	≤30.00	3.58	---	PASS
	Ant2	5690 UNII-3	-2.24	≤30.00	≤30.00	3.25	---	PASS
	total	5690 UNII-3	0.94	≤30.00	≤30.00	6.43	---	PASS
	Ant1	5775	13.85	≤30.00	≤30.00	19.34	---	PASS
	Ant2	5775	13.78	≤30.00	≤30.00	19.27	---	PASS
	total	5775	16.83	≤30.00	≤30.00	22.32	---	PASS

Note: 1. Conducted Power=Meas. Level+ Correction Factor


2. The Duty Cycle Factor (refer to section 7.1) had already compensated to the test data.

11.4.2. Test Graphs

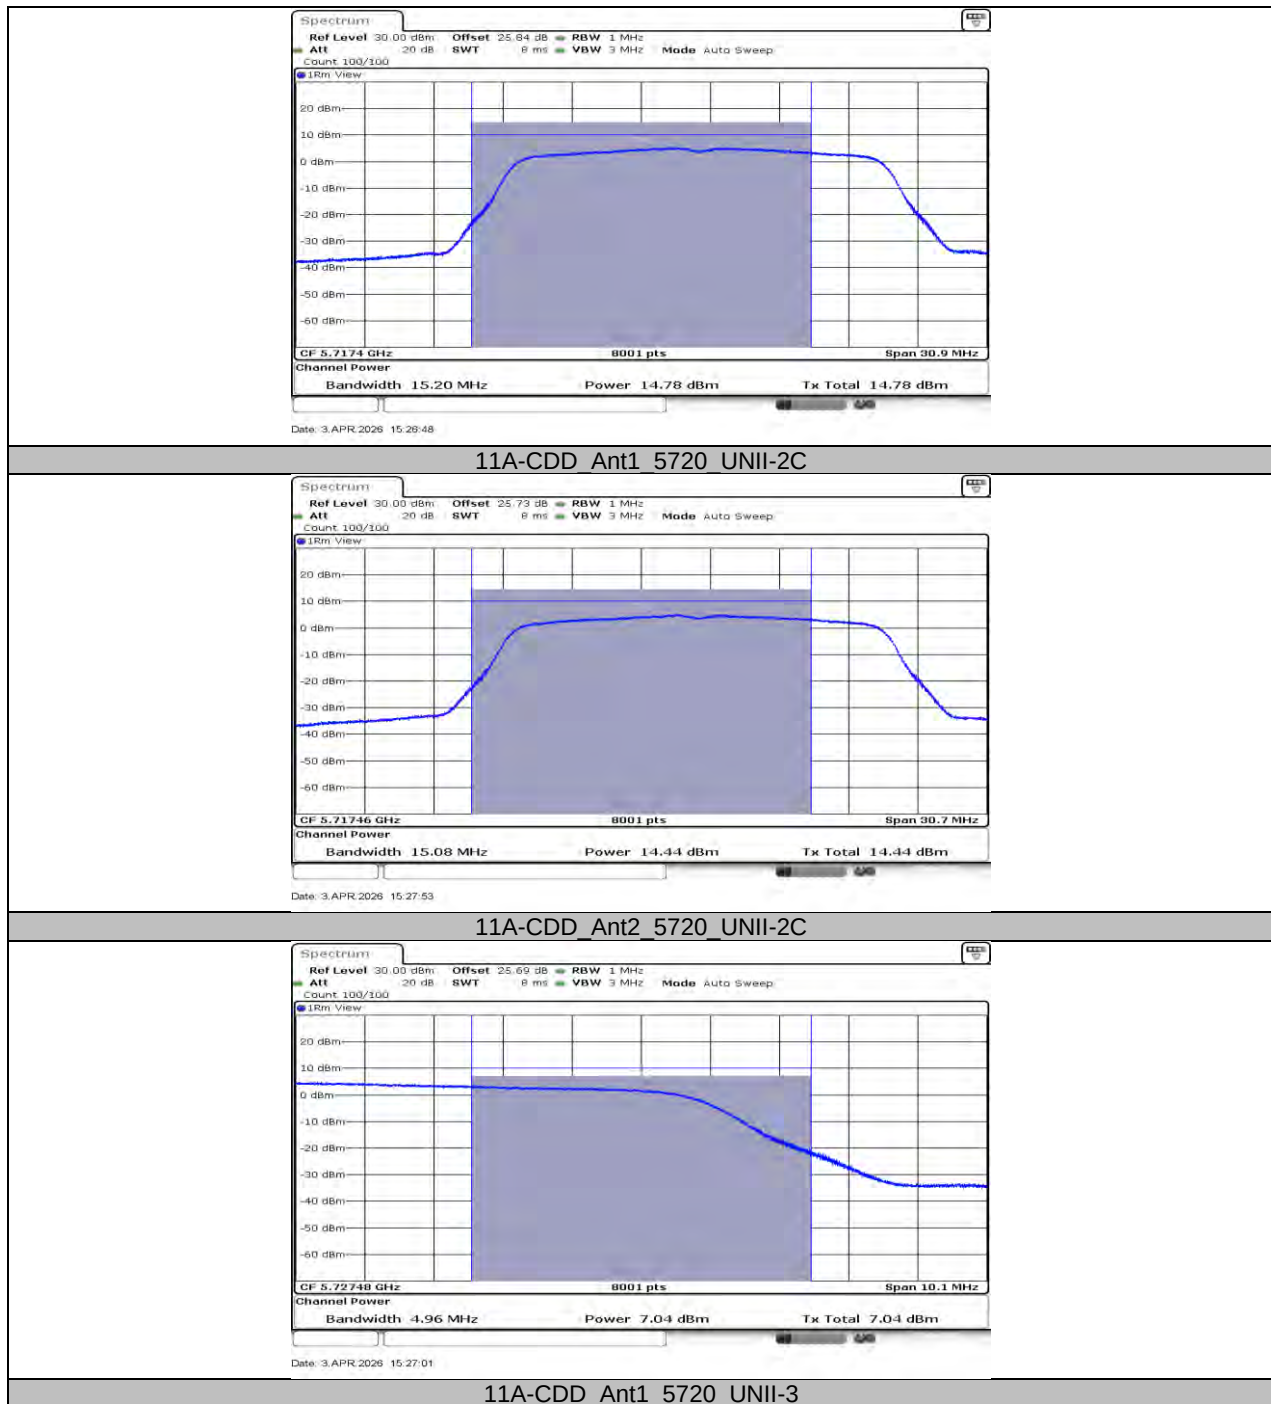


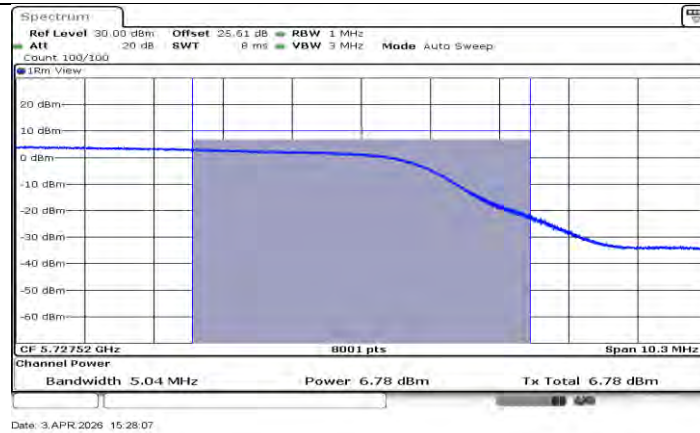


11A-CDD_Ant2_5720_UNII-3

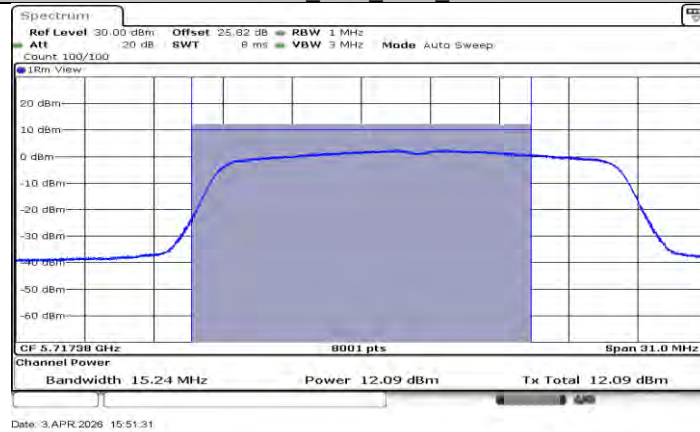


11N20MIMO_Ant1_5720_UNII-2C

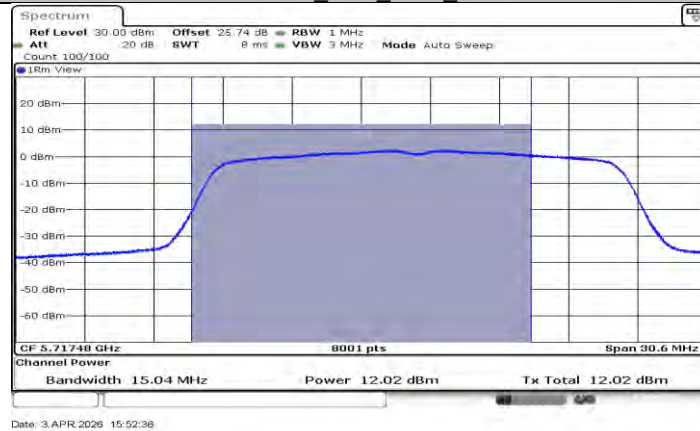


11N20MIMO_Ant2_5720_UNII-2C

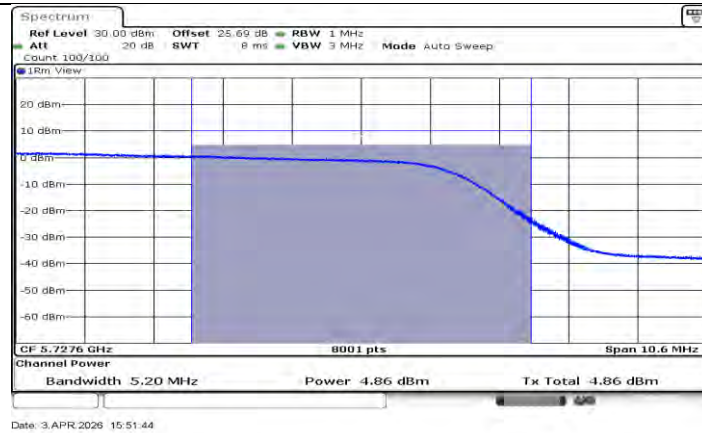


11N20MIMO_Ant1_5720_UNII-3

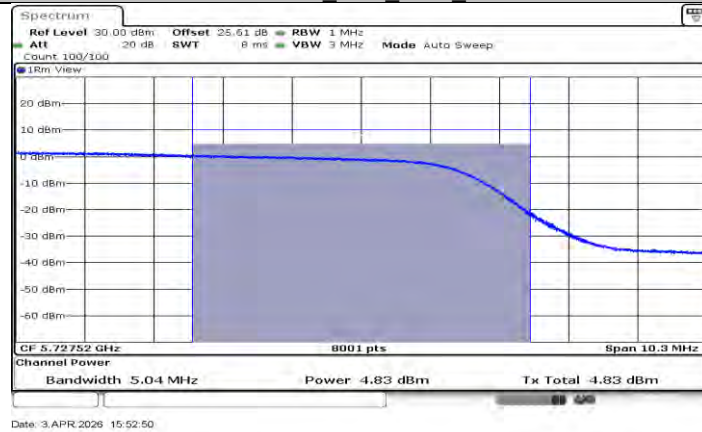

11N20MIMO_Ant2_5720_UNII-3

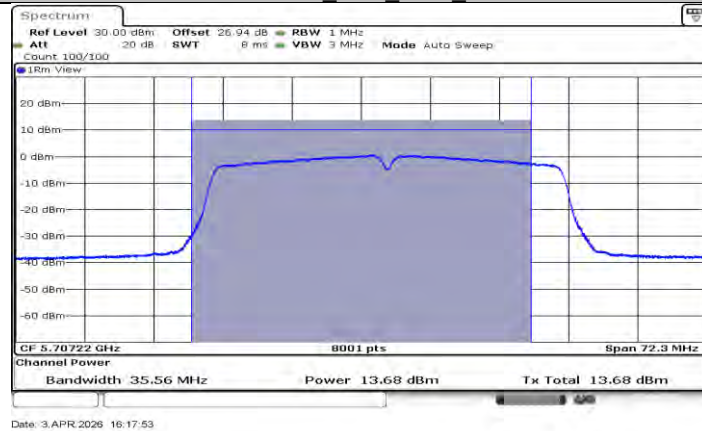

11N40MIMO_Ant1_5710_UNII-2C

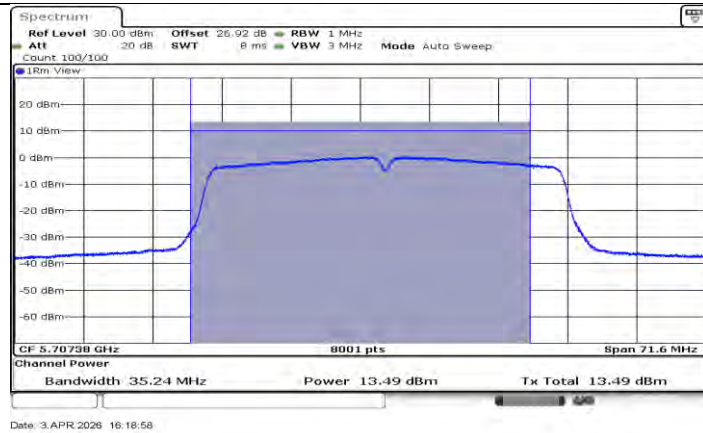


11N40MIMO_Ant2_5710_UNII-2C




11N40MIMO_Ant1_5710_UNII-3



11N40MIMO_Ant2_5710_UNII-3

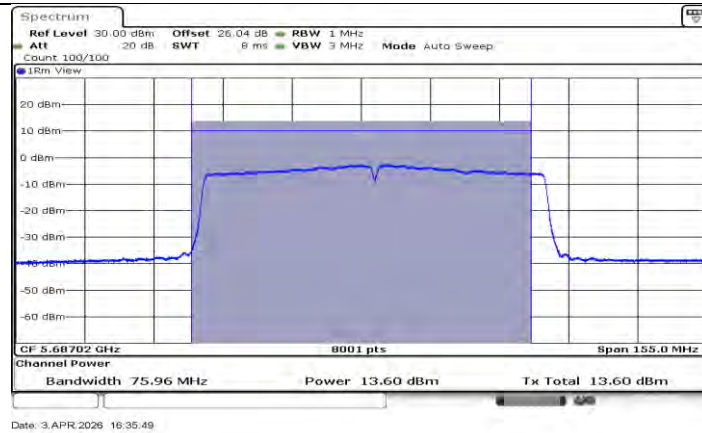


11AC80MIMO_Ant1_5690_UNII-2C

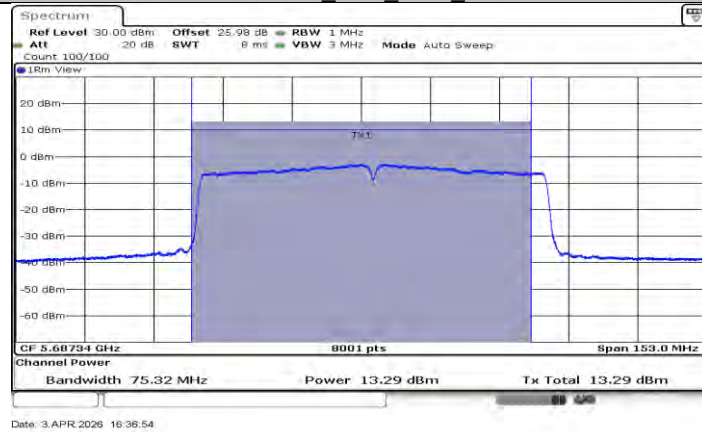

11AC80MIMO_Ant2_5690_UNII-2C



11AC80MIMO_Ant1_5690_UNII-3

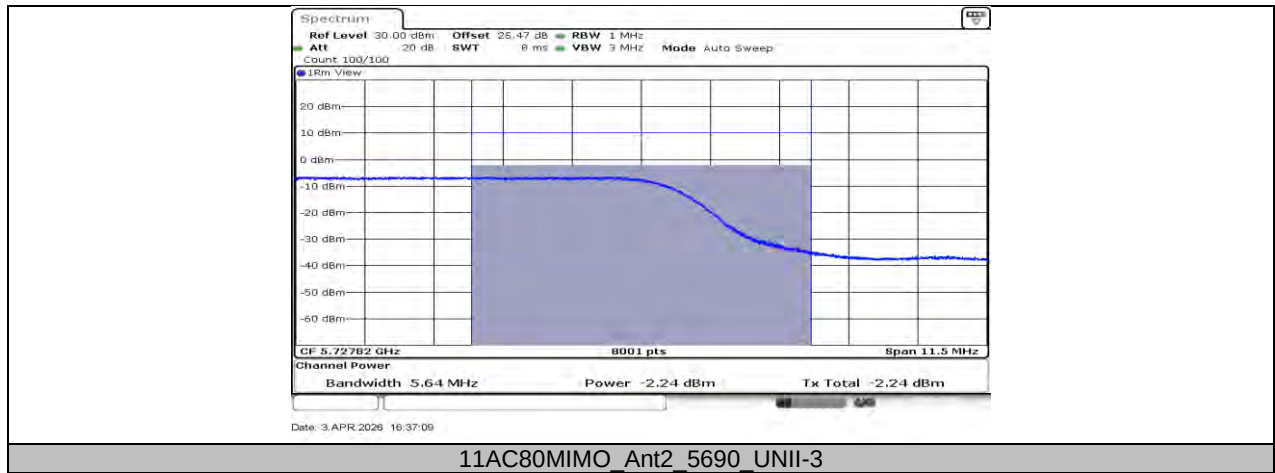

11.5. APPENDIX E: MAXIMUM POWER SPECTRAL DENSITY

11.5.1. Test Result

Test Mode	Antenna	Frequency[MHz]	Power [dBm/MHz]	Limit [dBm/MHz]	EIRP [dBm/MHz]	Limit [dBm/MHz]	Verdict
11A-CDD	Ant1	5180	-0.06	≤11.00	2.98	≤10.00	PASS
	Ant2	5180	-0.05	≤11.00	2.99	≤10.00	PASS
	total	5180	2.96	≤10.95	9.01	≤10.00	PASS
	Ant1	5200	-0.08	≤11.00	2.96	≤10.00	PASS
	Ant2	5200	-0.20	≤11.00	2.84	≤10.00	PASS
	total	5200	2.87	≤10.95	8.92	≤10.00	PASS
	Ant1	5240	-0.46	≤11.00	2.58	≤10.00	PASS
	Ant2	5240	-0.35	≤11.00	2.69	≤10.00	PASS
	total	5240	2.61	≤10.95	8.66	≤10.00	PASS
	Ant1	5260	4.25	≤11.00	7.42	---	PASS
	Ant2	5260	4.33	≤11.00	7.50	---	PASS
	total	5260	7.30	≤10.82	13.48	---	PASS
	Ant1	5280	4.30	≤11.00	7.47	---	PASS
	Ant2	5280	4.37	≤11.00	7.54	---	PASS
	total	5280	7.35	≤10.82	13.53	---	PASS
	Ant1	5320	4.76	≤11.00	7.93	---	PASS
	Ant2	5320	4.00	≤11.00	7.17	---	PASS
	total	5320	7.41	≤10.82	13.59	---	PASS
	Ant1	5500	4.92	≤11.00	9.37	---	PASS
	Ant2	5500	4.22	≤11.00	8.67	---	PASS
	total	5500	7.59	≤9.54	15.05	---	PASS
	Ant1	5580	4.91	≤11.00	9.36	---	PASS
	Ant2	5580	4.88	≤11.00	9.33	---	PASS
	total	5580	7.91	≤9.54	15.37	---	PASS
	Ant1	5700	5.05	≤11.00	9.50	---	PASS
	Ant2	5700	4.81	≤11.00	9.26	---	PASS
	total	5700	7.94	≤9.54	15.40	---	PASS
	Ant1	5720 UNII-2C	5.21	≤11.00	9.66	---	PASS
	Ant2	5720 UNII-2C	4.70	≤11.00	9.15	---	PASS
	total	5720 UNII-2C	7.97	≤9.54	15.43	---	PASS
	Ant1	5720 UNII-3	0.35	≤30.00	5.84	---	PASS
	Ant2	5720 UNII-3	0.22	≤30.00	5.71	---	PASS
	total	5720 UNII-3	3.30	≤27.50	11.80	---	PASS
	Ant1	5745	2.96	≤30.00	8.45	---	PASS
	Ant2	5745	2.79	≤30.00	8.28	---	PASS
	total	5745	5.89	≤27.50	14.39	---	PASS
	Ant1	5785	2.45	≤30.00	7.94	---	PASS
	Ant2	5785	2.60	≤30.00	8.09	---	PASS
	total	5785	5.54	≤27.50	14.04	---	PASS
	Ant1	5825	2.13	≤30.00	7.62	---	PASS
	Ant2	5825	2.09	≤30.00	7.58	---	PASS
	total	5825	5.12	≤27.50	13.62	---	PASS
11N20MIMO	Ant1	5180	-0.33	≤11.00	2.71	≤10.00	PASS
	Ant2	5180	-0.18	≤11.00	2.86	≤10.00	PASS
	total	5180	2.76	≤10.95	8.81	≤10.00	PASS
	Ant1	5200	-0.40	≤11.00	2.64	≤10.00	PASS
	Ant2	5200	-0.14	≤11.00	2.90	≤10.00	PASS
	total	5200	2.74	≤10.95	8.79	≤10.00	PASS
	Ant1	5240	-0.23	≤11.00	2.81	≤10.00	PASS
	Ant2	5240	0.08	≤11.00	3.12	≤10.00	PASS
	total	5240	2.94	≤10.95	8.99	≤10.00	PASS
	Ant1	5260	1.51	≤11.00	4.68	---	PASS
	Ant2	5260	1.58	≤11.00	4.75	---	PASS
	total	5260	4.56	≤10.82	10.74	---	PASS
	Ant1	5280	1.68	≤11.00	4.85	---	PASS


	Ant2	5280	1.89	≤11.00	5.06	---	PASS
	total	5280	4.80	≤10.82	10.98	---	PASS
	Ant1	5320	1.65	≤11.00	4.82	---	PASS
	Ant2	5320	1.84	≤11.00	5.01	---	PASS
	total	5320	4.76	≤10.82	10.94	---	PASS
	Ant1	5500	1.94	≤11.00	6.39	---	PASS
	Ant2	5500	1.84	≤11.00	6.29	---	PASS
	total	5500	4.90	≤9.54	12.36	---	PASS
	Ant1	5580	2.06	≤11.00	6.51	---	PASS
	Ant2	5580	1.89	≤11.00	6.34	---	PASS
	total	5580	4.99	≤9.54	12.45	---	PASS
	Ant1	5700	2.38	≤11.00	6.83	---	PASS
	Ant2	5700	2.41	≤11.00	6.86	---	PASS
	total	5700	5.41	≤9.54	12.87	---	PASS
	Ant1	5720 UNII-2C	2.43	≤11.00	6.88	---	PASS
	Ant2	5720 UNII-2C	2.29	≤11.00	6.74	---	PASS
	total	5720 UNII-2C	5.37	≤9.54	12.83	---	PASS
	Ant1	5720 UNII-3	-2.34	≤30.00	3.15	---	PASS
	Ant2	5720 UNII-3	-2.44	≤30.00	3.05	---	PASS
	total	5720 UNII-3	0.62	≤27.50	9.12	---	PASS
	Ant1	5745	0.01	≤30.00	5.50	---	PASS
	Ant2	5745	-0.03	≤30.00	5.46	---	PASS
	total	5745	3.00	≤27.50	11.50	---	PASS
	Ant1	5785	-0.25	≤30.00	5.24	---	PASS
	Ant2	5785	-0.20	≤30.00	5.29	---	PASS
	total	5785	2.79	≤27.50	11.29	---	PASS
	Ant1	5825	-0.68	≤30.00	4.81	---	PASS
	Ant2	5825	-0.56	≤30.00	4.93	---	PASS
	total	5825	2.39	≤27.50	10.89	---	PASS
11N40MIMO	Ant1	5190	-0.19	≤11.00	2.85	≤10.00	PASS
	Ant2	5190	-0.22	≤11.00	2.82	≤10.00	PASS
	total	5190	2.81	≤10.95	8.86	≤10.00	PASS
	Ant1	5230	-0.24	≤11.00	2.80	≤10.00	PASS
	Ant2	5230	-0.11	≤11.00	2.93	≤10.00	PASS
	total	5230	2.84	≤10.95	8.89	≤10.00	PASS
	Ant1	5270	-0.39	≤11.00	2.78	---	PASS
	Ant2	5270	-0.13	≤11.00	3.04	---	PASS
	total	5270	2.75	≤10.82	8.93	---	PASS
	Ant1	5310	0.00	≤11.00	3.17	---	PASS
	Ant2	5310	-0.33	≤11.00	2.84	---	PASS
	total	5310	2.85	≤10.82	9.03	---	PASS
	Ant1	5510	0.25	≤11.00	4.70	---	PASS
	Ant2	5510	-0.05	≤11.00	4.40	---	PASS
	total	5510	3.11	≤9.54	10.57	---	PASS
	Ant1	5550	0.44	≤11.00	4.89	---	PASS
	Ant2	5550	0.19	≤11.00	4.64	---	PASS
	total	5550	3.33	≤9.54	10.79	---	PASS
	Ant1	5670	0.80	≤11.00	5.25	---	PASS
	Ant2	5670	0.52	≤11.00	4.97	---	PASS
	total	5670	3.67	≤9.54	11.13	---	PASS
	Ant1	5710 UNII-2C	0.54	≤11.00	4.99	---	PASS
	Ant2	5710 UNII-2C	0.14	≤11.00	4.59	---	PASS
	total	5710 UNII-2C	3.35	≤9.54	10.81	---	PASS
	Ant1	5710 UNII-3	-5.44	≤30.00	0.05	---	PASS
	Ant2	5710 UNII-3	-5.61	≤30.00	-0.12	---	PASS
	total	5710 UNII-3	-2.51	≤27.50	5.99	---	PASS
	Ant1	5755	-1.74	≤30.00	3.75	---	PASS
	Ant2	5755	-1.78	≤30.00	3.71	---	PASS
	total	5755	1.25	≤27.50	9.75	---	PASS
	Ant1	5795	-2.15	≤30.00	3.34	---	PASS

	Ant2	5795	-2.25	≤ 30.00	3.24	---	PASS
	total	5795	0.81	≤ 27.50	9.31	---	PASS
11AC80MIMO	Ant1	5210	-3.47	≤ 11.00	-0.43	≤ 10.00	PASS
	Ant2	5210	-3.67	≤ 11.00	-0.63	≤ 10.00	PASS
	total	5210	-0.56	≤ 10.95	5.49	≤ 10.00	PASS
	Ant1	5290	-3.39	≤ 11.00	-0.22	---	PASS
	Ant2	5290	-3.53	≤ 11.00	-0.36	---	PASS
	total	5290	-0.45	≤ 10.82	5.73	---	PASS
	Ant1	5530	-2.72	≤ 11.00	1.73	---	PASS
	Ant2	5530	-3.24	≤ 11.00	1.21	---	PASS
	total	5530	0.04	≤ 9.54	7.50	---	PASS
	Ant1	5610	-2.55	≤ 11.00	1.90	---	PASS
	Ant2	5610	-3.18	≤ 11.00	1.27	---	PASS
	total	5610	0.16	≤ 9.54	7.62	---	PASS
	Ant1	5690 UNII-2C	-2.55	≤ 11.00	1.90	---	PASS
	Ant2	5690 UNII-2C	-2.99	≤ 11.00	1.46	---	PASS
	total	5690 UNII-2C	0.25	≤ 9.54	7.71	---	PASS
	Ant1	5690 UNII-3	-8.90	≤ 30.00	-3.41	---	PASS
	Ant2	5690 UNII-3	-9.20	≤ 30.00	-3.71	---	PASS
	total	5690 UNII-3	-6.04	≤ 27.50	2.46	---	PASS
	Ant1	5775	-5.42	≤ 30.00	0.07	---	PASS
	Ant2	5775	-5.51	≤ 30.00	-0.02	---	PASS
	total	5775	-2.45	≤ 27.50	6.05	---	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.

2.The Duty Cycle Factor and RBW Factor is compensated in the test data.

11.5.2. Test Graphs

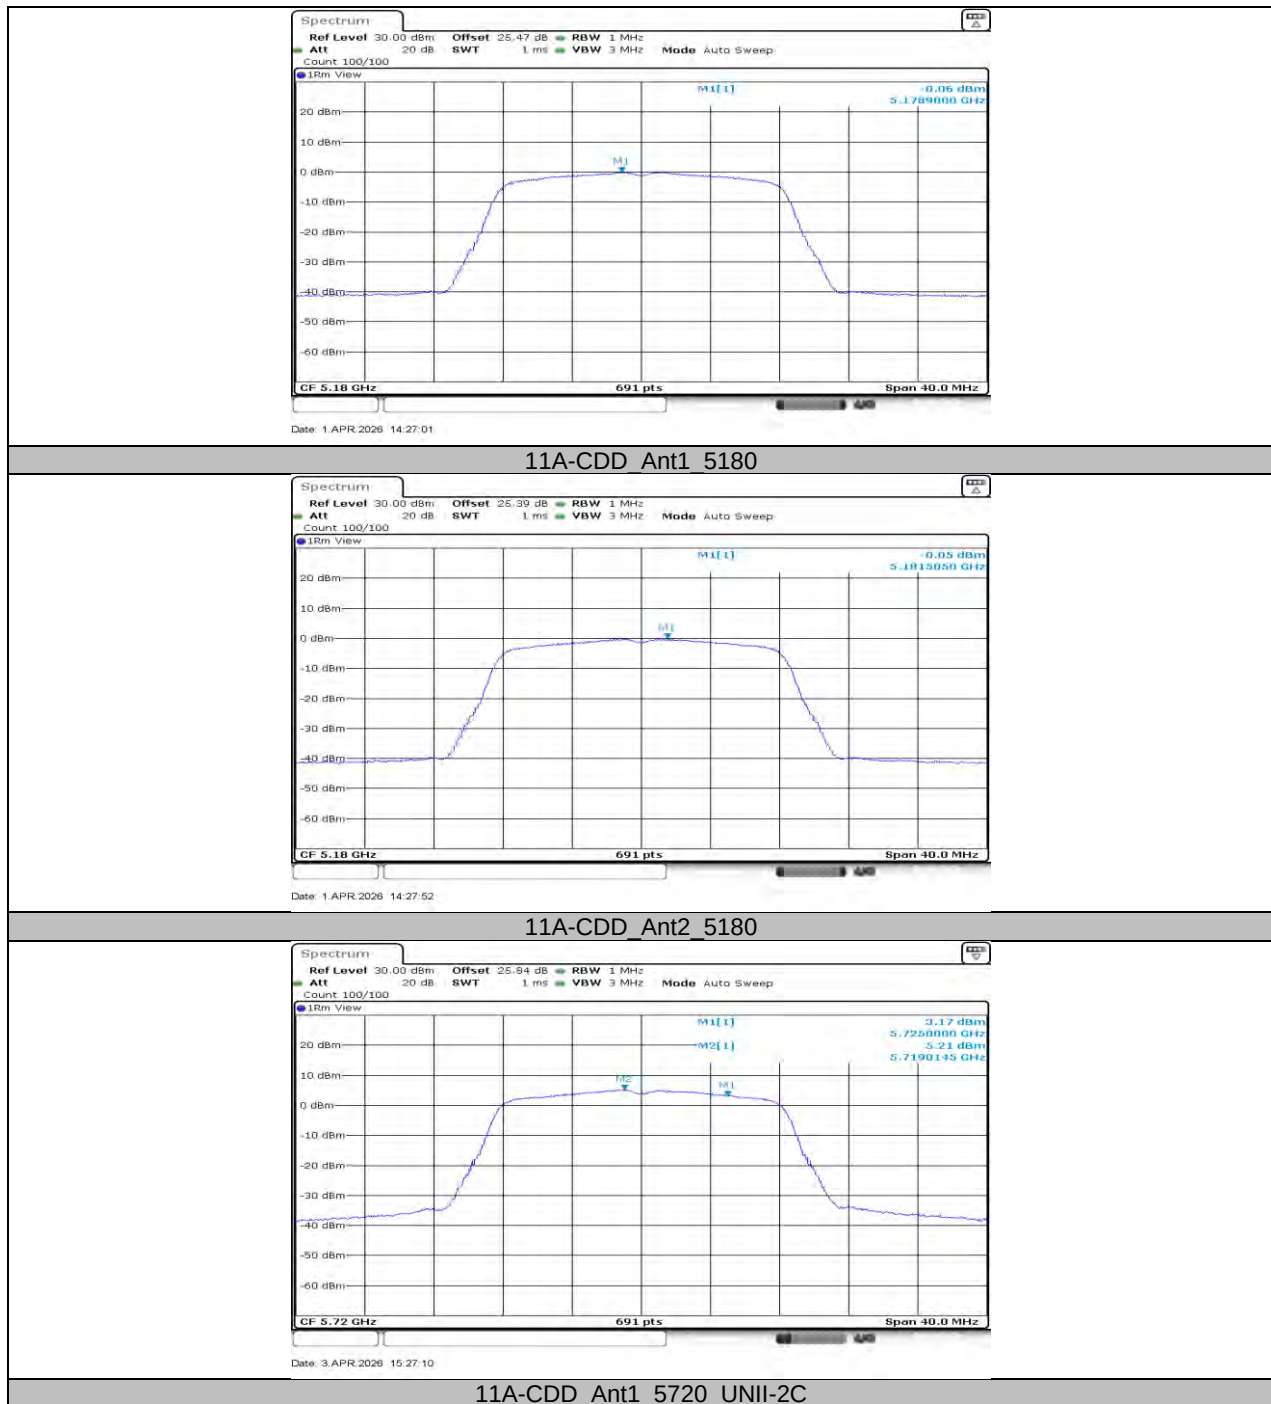




11A-CDD_Ant2_5720_UNII-2C



11A-CDD_Ant1_5720_UNII-3



11A-CDD_Ant2_5720_UNII-3

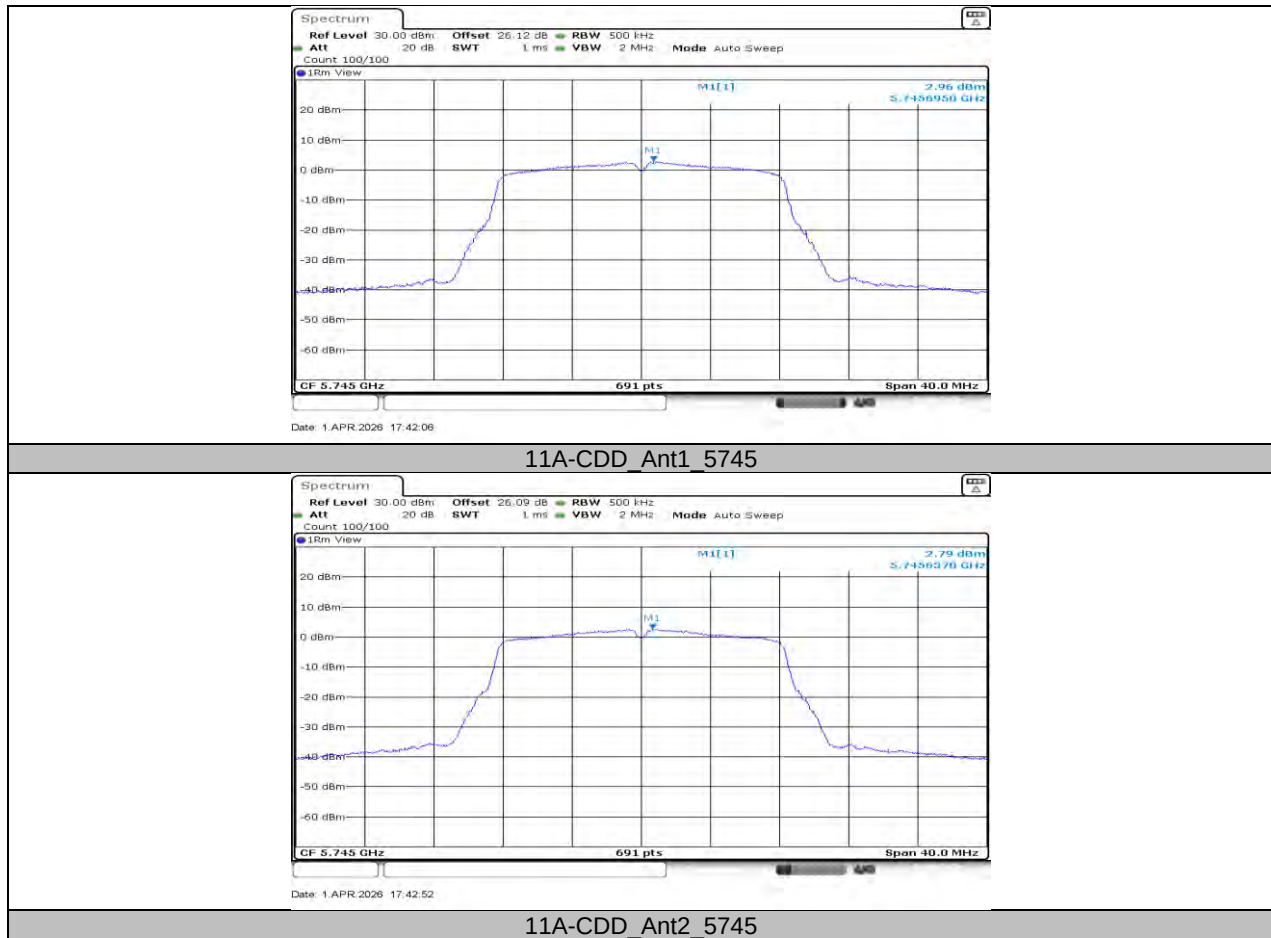

Note:

1. Only Low channel plot is reported to show setting parameter compliance with testing method/procedure.
2. For all modes, RBW setting to 1MHz is used on PSD measurement in UNII-1/UNII-2A/UNII-2C.
3. For all modes, RBW setting to 500kHz is used on PSD measurement in UNII-3.

11.6. APPENDIX F: FREQUENCY STABILITY

11.6.1. Test Result

Frequency Error vs. Voltage									
802.11a:5200MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)
TN	VL	5200.0179	3.43	5200.0122	2.34	5200.0210	4.04	5200.0019	0.37
TN	VN	5200.0240	4.62	5199.9774	-4.34	5200.0014	0.28	5199.9814	-3.59
TN	VH	5200.0083	1.60	5200.0031	0.60	5200.0150	2.88	5199.9974	-0.50
Frequency Error vs. Temperature									
802.11a:5200MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)
40	VN	5199.9775	-4.33	5200.0110	2.12	5200.0050	0.96	5199.9811	-3.63
30	VN	5200.0071	1.37	5200.0201	3.87	5200.0155	2.99	5199.9796	-3.91
20	VN	5199.9988	-0.23	5199.9772	-4.39	5199.9753	-4.75	5200.0144	2.76
10	VN	5200.0147	2.83	5199.9825	-3.37	5200.0152	2.93	5199.9946	-1.04
0	VN	5199.9931	-1.32	5199.9772	-4.39	5199.9980	-0.38	5199.9856	-2.77

Note:

1. All antennas, test modes and test channels have been tested, only the worst data record in the report.
2. For the detail Test Conditions, please refer to section 7.5 TEST ENVIRONMENT.

11.7. APPENDIX G: DUTY CYCLE

11.7.1. Test Result

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11A-CDD	1.38	1.43	0.9650	96.50	0.15	0.72	1
11N20MIMO	1.29	1.33	0.9699	96.99	0.13	0.78	1
11N40MIMO	0.10	0.14	0.7143	71.43	1.46	10.00	10
11AC80MIMO	0.33	0.37	0.8919	89.19	0.50	3.03	4

Note:

Duty Cycle Correction Factor=10log (1/x).


Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

11.7.2. Test Graphs



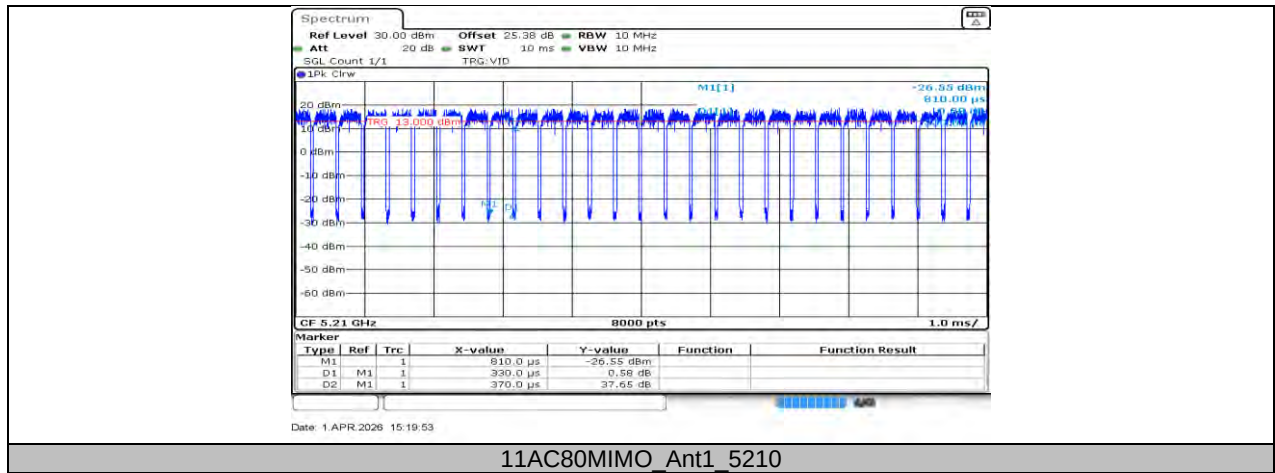


11.8. APPENDIX H: DFS DETECTION THRESHOLDS

11.8.1. Test Result

TestMode	Channel	Radar Type	Result	Verdict
11AC80MIMO	5530	Type0	-62.29	PASS

11.8.2. Test Graphs

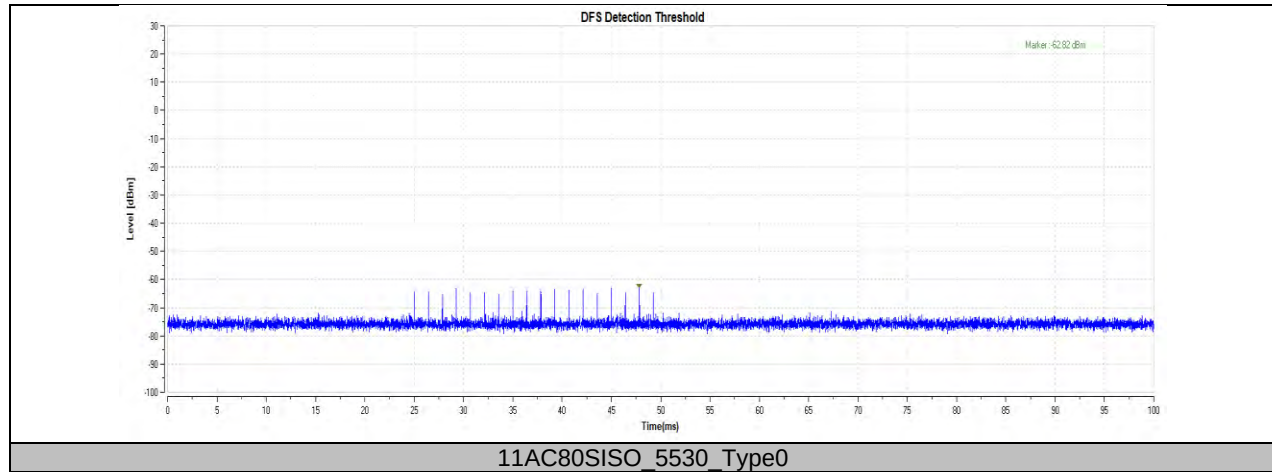


11.9. APPENDIX I: CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME

11.9.1. Test Result

TestMode	Channel	CCT[ms]	Limit[ms]	CMT[ms]	Limit[ms]	Verdict
11AC80MIMO	5530	200+7.8	200+60	513.5	10000	PASS

11.9.2. Test Graphs

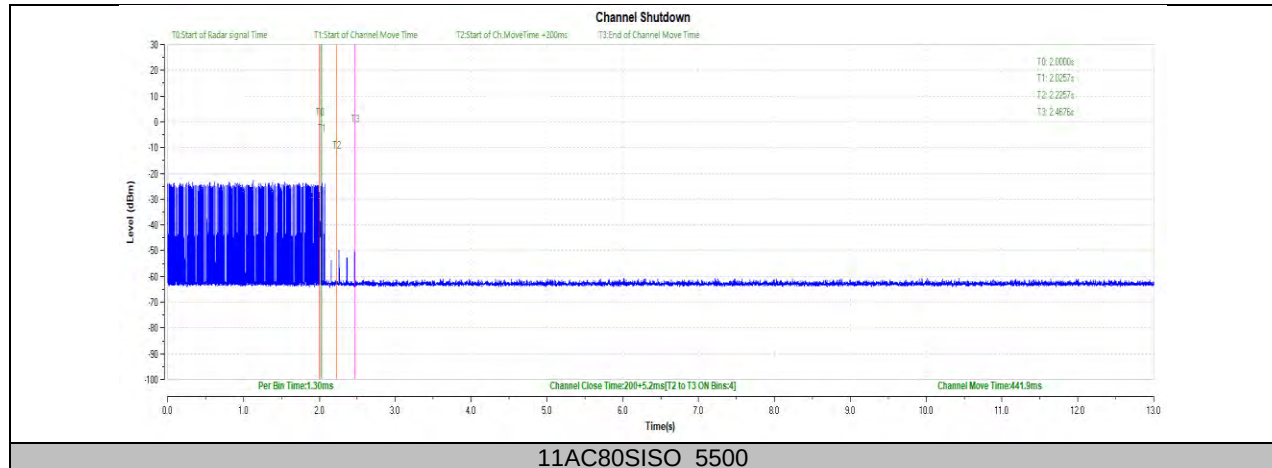


11.10. APPENDIX J: NON-OCCUPANCY PERIOD

Test Result

TestMode	Channel	Result	Limit[s]	Verdict
11AC80MIMO	5530	see test graph	≥ 1800	PASS

11.10.1. Test Graphs

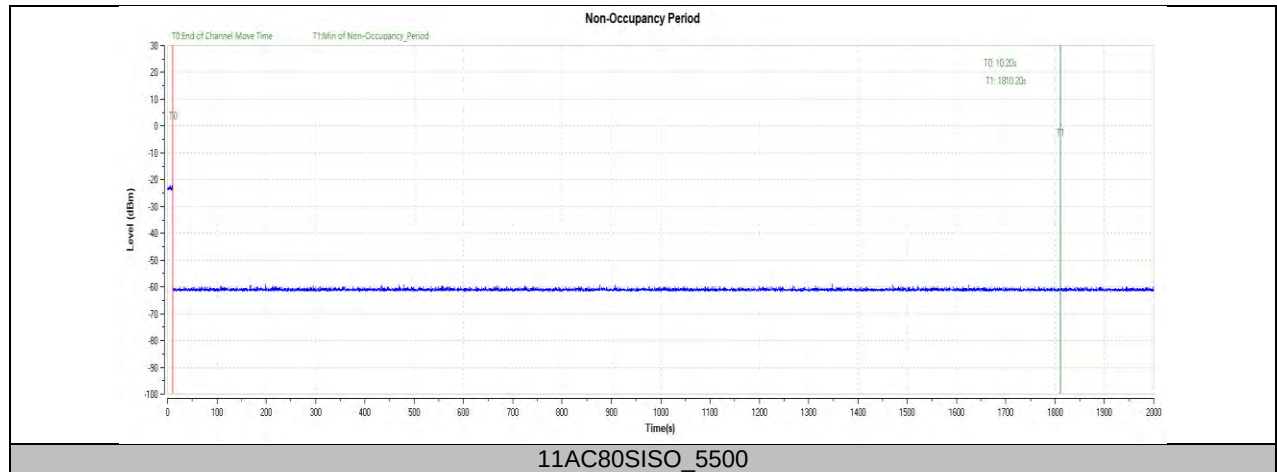

END OF REPORT