

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

47 CFR FCC Part 22

47 CFR FCC Part 24

47 CFR FCC Part 27

47 CFR FCC Part 90

Report No.: RFBCKS-WTW-P26020124-2

FCC ID: 2AV57GDSBB1

Product: Telematics Device

Brand: Geotab

Model No.: GDSBB1

Received Date: 2026/2/5

Test Date: 2026/5/5

Issued Date: 2026/5/15

Applicant: Geotab Inc.

Address: 2440 Winston Park Dr, Oakville, ON L6H 7V2

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, Taiwan

FCC Registration / 788550 / TW0003

Designation Number:

Approved by:

Jeremy Lin

, **Date:**

2026/5/15

Jeremy Lin / Project Engineer

This test report consists of 27 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : **Gina Liu / Specialist**



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate.....	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Supplementary Information	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Antenna Description of EUT	6
3.3 Test Mode Applicability and Tested Channel Detail	6
3.4 Test Program Used and Operation Descriptions	7
3.5 Connection Diagram of EUT and Peripheral Devices	7
3.6 Configuration of Peripheral Devices and Cable Connections	7
4 Test Instruments	8
4.1 Unwanted Emissions below 1 GHz	8
4.2 Radiated Spurious Emissions below 1GHz	9
4.3 Unwanted Emissions above 1 GHz	10
4.4 Radiated Spurious Emissions above 1GHz	11
5 Limits of Test Items.....	12
5.1 Unwanted Emissions below 1 GHz	12
5.2 Radiated Spurious Emissions below 1GHz	12
5.3 Unwanted Emissions above 1 GHz	12
5.4 Radiated Spurious Emissions above 1GHz	12
6 Test Arrangements	13
6.1 Unwanted Emissions below 1 GHz	13
6.1.1 Test Setup	13
6.1.2 Test Procedure	14
6.2 Radiated Spurious Emissions below 1GHz	15
6.2.1 Test Setup	15
6.2.2 Test Procedure	16
6.3 Unwanted Emissions above 1 GHz	17
6.3.1 Test Setup	17
6.3.2 Test Procedure	17
6.4 Radiated Spurious Emissions above 1GHz	18
6.4.1 Test Setup	18
6.4.2 Test Procedure	18
7 Test Results of Test Item	19
7.1 Unwanted Emissions below 1 GHz	19
7.2 Radiated Spurious Emissions below 1GHz	21
7.3 Unwanted Emissions above 1 GHz	23
7.4 Radiated Spurious Emissions above 1GHz	25
8 Pictures of Test Arrangements	26
9 Information of the Testing Laboratories	27

Release Control Record

Issue No.	Description	Date Issued
RFBCKS-WTW-P26020124-2	Original release.	2026/5/15

1 Certificate

Product: Telematics Device

Brand: Geotab

Test Model: GDSBB1

Sample Status: Engineering sample

Applicant: Geotab Inc.

Test Date: 2026/5/5

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)
47 CFR FCC Part 22
47 CFR FCC Part 24
47 CFR FCC Part 27
47 CFR FCC Part 90

Measurement procedure: ANSI C63.10-2020
ANSI C63.26-2015

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

Standard / Clause	Test Item	Result	Remark
15.205 /15.209 /15.247(d)	Unwanted Emissions below 1 GHz	Pass	Meet the requirement of limit.
Part 2.1053 Part 22.917 Part 24.238 Part 27.53(h) Part 27.53(g) Part 27.53(c)(f) Part 90.543(e)(f)	Radiated Spurious Emissions below 1GHz	Pass	Meet the requirement of limit.
15.205 /15.209 /15.247(d)	Unwanted Emissions above 1 GHz	Pass	Meet the requirement of limit.
Part 2.1053 Part 22.917 Part 24.238 Part 27.53(h) Part 27.53(g) Part 27.53(c)(f) Part 90.543(e)(f)	Radiated Spurious Emissions above 1GHz	Pass	Meet the requirement of limit.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Specification	Uncertainty (±)
Radiated Spurious Emissions below 1GHz	9 kHz ~ 30 MHz	3.59 dB
	30 MHz ~ 1 GHz	3.6 dB
Radiated Spurious Emissions above 1GHz	1 GHz ~ 18 GHz	2.29 dB
	18 GHz ~ 40 GHz	2.29 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Telematics Device	
Brand	Geotab	
Test Model	GDSBB1	
Modulation Technology	BT-LE	DTS
	LTE Cat.1	OFDM, OFDMA, SC-FDMA
Operating Frequency	BT	2402 ~ 2480 MHz
	LTE Cat.1	LTE Cat.1 Band 2: 1850.7 ~ 1909.3 MHz LTE Cat.1 Band 4: 1710.7 ~ 1754.3 MHz LTE Cat.1 Band 5: 824.7 ~ 848.3 MHz LTE Cat.1 Band 12: 699.7 ~ 715.3 MHz LTE Cat.1 Band 13: 779.5 ~ 784.5 MHz LTE Cat.1 Band 14: 790.5 ~ 795.5 MHz LTE Cat.1 Band 66: 1710.7 ~ 1779.3 MHz LTE Cat.1 Band 71: 665.5 ~ 695.5 MHz

Note:

1. There are Bluetooth and WWAN technology used for the EUT.
2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 Antenna Description of EUT

The BT antenna information of EUT is listed as below.

Brand	Model	Antenna Net Gain (dBi)	Frequency range (MHz)	Antenna Type	Connector Type
GEOTAB	PRT-0005620	2.0	2400~24835	PIFA	none(like solder)

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

The WWAN antenna information of EUT is listed as below.

Brand	Model	Antenna Net Gain (dBi)	Frequency range (MHz)	Antenna Type	Connector Type
WNC	UOC-GO9C	2.64	617~960	Monopole	none(like solder)
		3.56	1700~2200		
		3.85	2500~2700		

* The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.3 Test Mode Applicability and Tested Channel Detail

Following channel(s) was (were) selected for the final test as listed below:

Test Item	Combination	Mode	Tested Channel
Unwanted Emissions below 1 GHz	1	BT-LE 2M	19
Radiated Spurious Emissions below 1GHz	1	LTE Cat.1 Band 5 10M	20525
Unwanted Emissions above 1 GHz	1	BT-LE 2M	19
Radiated Spurious Emissions above 1GHz	1	LTE Cat.1 Band 5 10M	20525

3.4 Test Program Used and Operation Descriptions


BT Function

Controlling software STM32CubeMonitor-RF_V1.2.0 has been activated to set the EUT under transmission condition continuously at specific channel frequency.

WWAN Function

There is no need to controlling software during the test, and the EUT can be paired with the Radio Communication Analyzer to test the connection when it is powered on.

3.5 Connection Diagram of EUT and Peripheral Devices

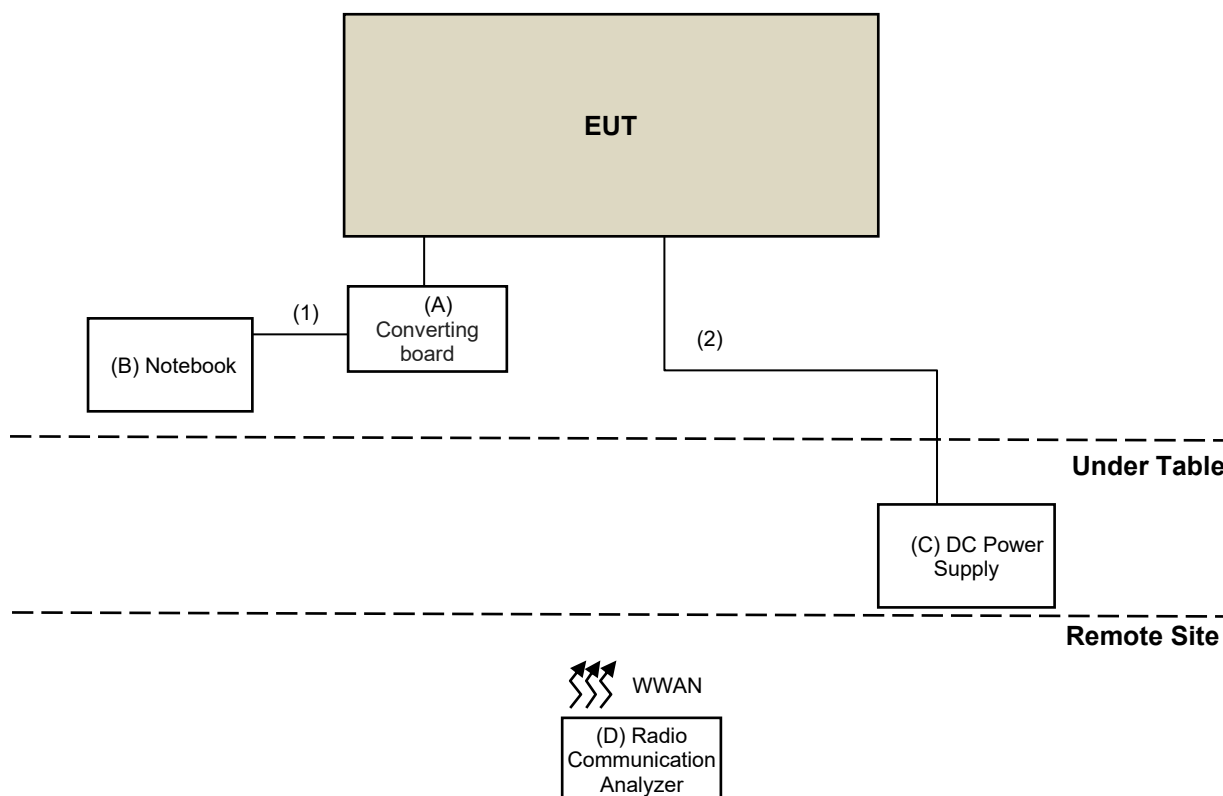

3.6 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Converting board	NA	NA	NA	NA	Supplied by applicant
B	Notebook	Lenovo	X260 4G	PC0ECUAT	NA	Provided by Lab
C	DC Power Supply	OWON	ODP3122	ODP31222137036	NA	Provided by Lab
D	Radio Communication Analyzer	Anritsu	MT8821C	6201462755	NA	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	Micro USB Cable	1	1	N	0	Provided by Lab
2	DC Cable	1	2	N	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn BV ADT	AT100	AT93021705	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-160	2025/9/16	2026/9/15
Loop Antenna TESEQ	HLA 6121	45745	2025/9/1	2026/8/31
MXE EMI Receiver Agilent	N9038A	MY51210203	2025/8/27	2026/8/26
Preamplifier Agilent	8447D	2944A10638	2026/4/18	2027/4/17
Preamplifier EMCI	EMC001340	980201	2025/9/21	2026/9/20
RF Coaxial Cable Woken	8D-FB	Cable-CH9-01	2026/4/18	2027/4/17
Signal & Spectrum Analyzer R&S	FSW43	101582	2026/5/2	2027/5/1
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 4(Hwaya).
2. Tested Date: 2026/5/5

4.2 Radiated Spurious Emissions below 1GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn BV ADT	AT100	AT93021705	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-160	2025/9/16	2026/9/15
Loop Antenna TESEQ	HLA 6121	45745	2025/9/1	2026/8/31
MXE EMI Receiver Agilent	N9038A	MY51210203	2025/8/27	2026/8/26
Preamplifier Agilent	8447D	2944A10638	2026/4/18	2027/4/17
Preamplifier EMCI	EMC001340	980201	2025/9/21	2026/9/20
RF Coaxial Cable Woken	8D-FB	Cable-CH9-01	2026/4/18	2027/4/17
Signal & Spectrum Analyzer R&S	FSW43	101582	2026/5/2	2027/5/1
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 4(Hwaya).
2. Tested Date: 2026/5/5

4.3 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn BV ADT	AT100	AT93021705	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	5	N/A	N/A
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-1169	2025/11/9	2026/11/8
	BBHA 9170	9170-480	2025/11/9	2026/11/8
		BBHA9170243	2025/11/9	2026/11/8
MXE EMI Receiver Agilent	N9038A	MY51210203	2025/8/27	2026/8/26
Preamplifier Agilent	8449B	3008A02367	2026/1/3	2027/1/2
Preamplifier EMCI	EMC 184045	980116	2025/9/21	2026/9/20
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	2025/6/30	2026/6/29
	EMC102-KM-KM-3000	150929	2025/6/30	2026/6/29
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	2026/1/3	2027/1/2
RF Coaxial Cable HUBER+SUHNER&EMCI	SUCOFLEX 104& EMC104-SM-SM8000	CABLE-CH9-02 (248780+171006)	2026/1/3	2027/1/2
Signal & Spectrum Analyzer R&S	FSW43	101582	2026/5/2	2027/5/1
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 4(Hwaya).
2. Tested Date: 2026/5/5

4.4 Radiated Spurious Emissions above 1GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn BV ADT	AT100	AT93021705	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	5	N/A	N/A
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-1169	2025/11/9	2026/11/8
MXE EMI Receiver Agilent	N9038A	MY51210203	2025/8/27	2026/8/26
Preamplifier Agilent	8449B	3008A02367	2026/1/3	2027/1/2
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	2026/1/3	2027/1/2
RF Coaxial Cable HUBER+SUHNER&EMCI	SUCOFLEX 104& EMC104-SM-SM8000	CABLE-CH9-02 (248780+171006)	2026/1/3	2027/1/2
Signal & Spectrum Analyzer R&S	FSW43	101582	2026/5/2	2027/5/1
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 4(Hwaya).
2. Tested Date: 2026/5/5

5 Limits of Test Items

5.1 Unwanted Emissions below 1 GHz

For FCC 15.247:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.2 Radiated Spurious Emissions below 1GHz

For LTE Cat.1 Band 5:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

5.3 Unwanted Emissions above 1 GHz

For FCC 15.247:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

5.4 Radiated Spurious Emissions above 1GHz

For LTE Cat.1 Band 5:


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

6 Test Arrangements


6.1 Unwanted Emissions below 1 GHz

6.1.1 Test Setup

For Radiated emission below 30 MHz

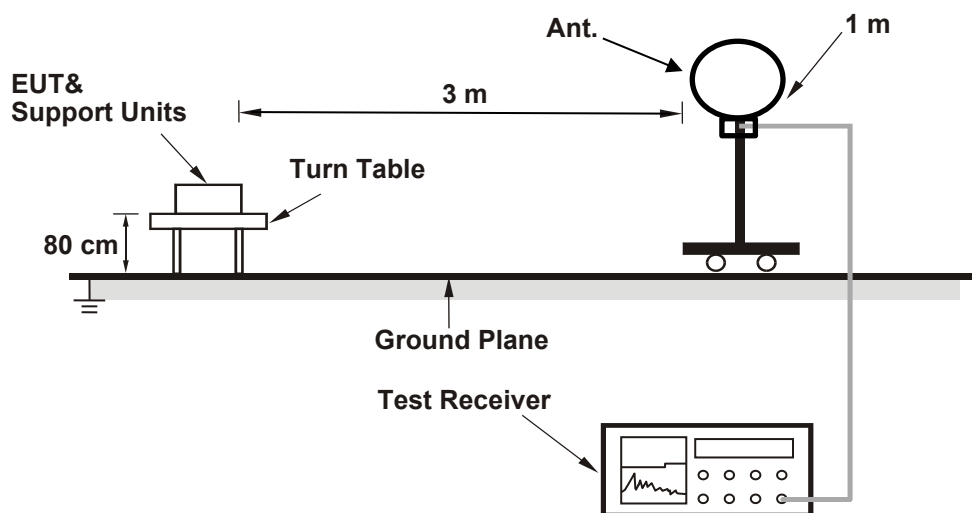

For Radiated emission above 30 MHz

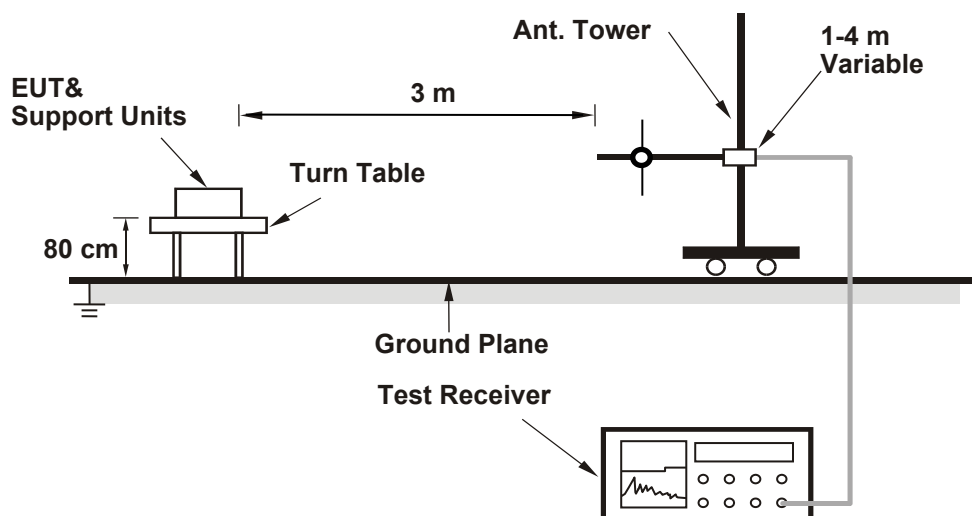

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.1.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode (however, peak detector measurements may be used to determine compliance with QP requirements), except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-peak(QP) detect function, Average(AV) detect function, Peak(PK) detect function and specified bandwidth with maximum hold mode when the test frequencies less than or equal to 1 GHz.


Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz (however, peak detector measurements may be used to determine compliance with QP requirements).
2. All modes of operation were investigated and the worst-case emissions are reported.


6.2 Radiated Spurious Emissions below 1GHz

6.2.1 Test Setup

For Radiated emission below 30 MHz

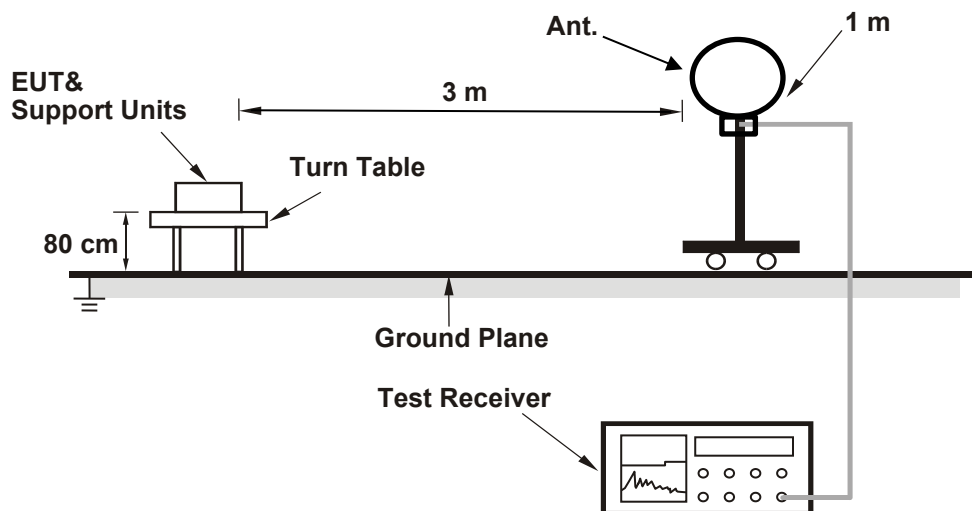

For Radiated emission above 30 MHz

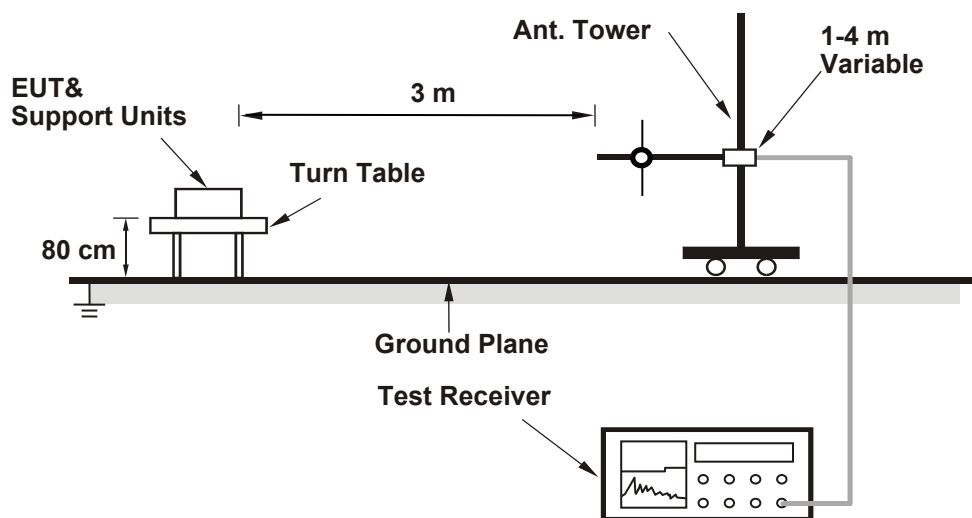

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.2.2 Test Procedure

The EUT is configured to set data modulation and maximum power using WWAN technology.


- a. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) height of turn table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following ANSI C63.26 section 5.5 and 5.2.7
- e. $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
- f. $ERP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz. Set detector = average.
2. The amplitude of spurious emissions in the range 9 kHz to 30 MHz which are attenuated more than 20 dB below the permissible value need not be reported.

6.3 Unwanted Emissions above 1 GHz

6.3.1 Test Setup

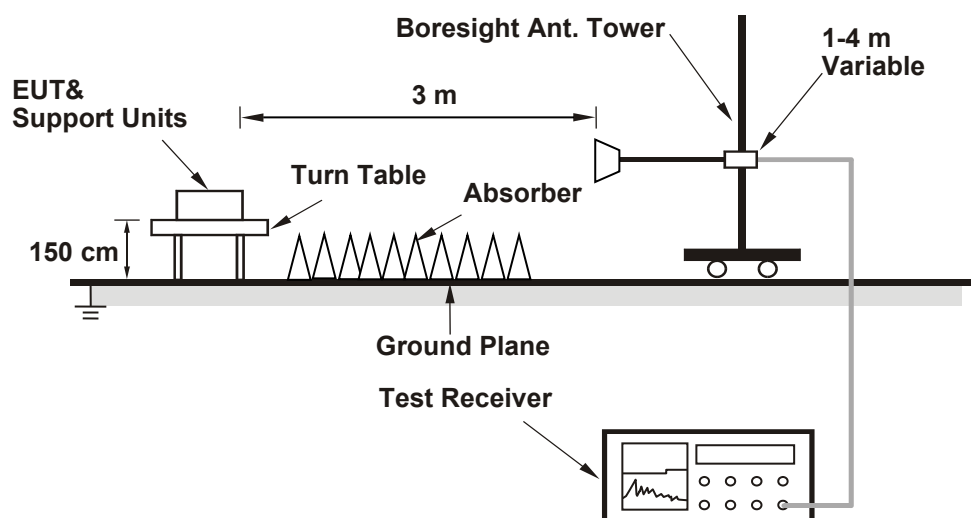

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.3.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

6.4 Radiated Spurious Emissions above 1GHz

6.4.1 Test Setup

For radiated emission above 1 GHz

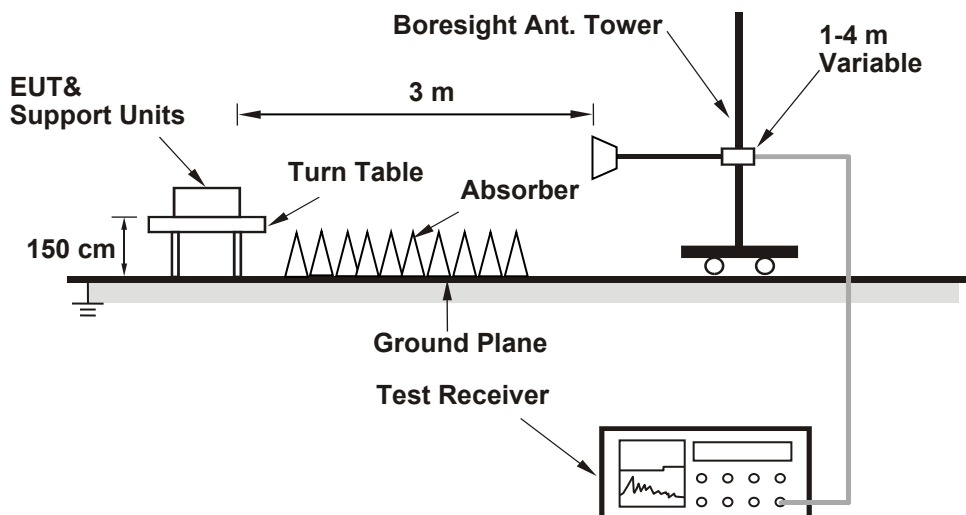

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.4.2 Test Procedure

The EUT is configured to set data modulation and maximum power using WWAN technology.

- In the semi-anechoic chamber, EUT placed on the 1.5 m height of turn table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- Following ANSI C63.26 section 5.5 and 5.2.7
- $EIRP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
- $ERP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz. Set detector = average.

7 Test Results of Test Item

7.1 Unwanted Emissions below 1 GHz


FCC 15.247

Combination	1		
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	94.99	38.2 QP	43.5	-5.3	1.99 H	214	52.7	-14.5
2	171.62	33.5 QP	43.5	-10.0	1.50 H	267	42.8	-9.3
3	239.54	36.6 QP	46.0	-9.4	1.50 H	96	46.4	-9.8
4	266.68	32.0 QP	46.0	-14.0	1.50 H	181	40.5	-8.5
5	333.61	30.3 QP	46.0	-15.7	1.50 H	173	36.9	-6.6
6	517.91	31.9 QP	46.0	-14.1	1.99 H	331	34.9	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

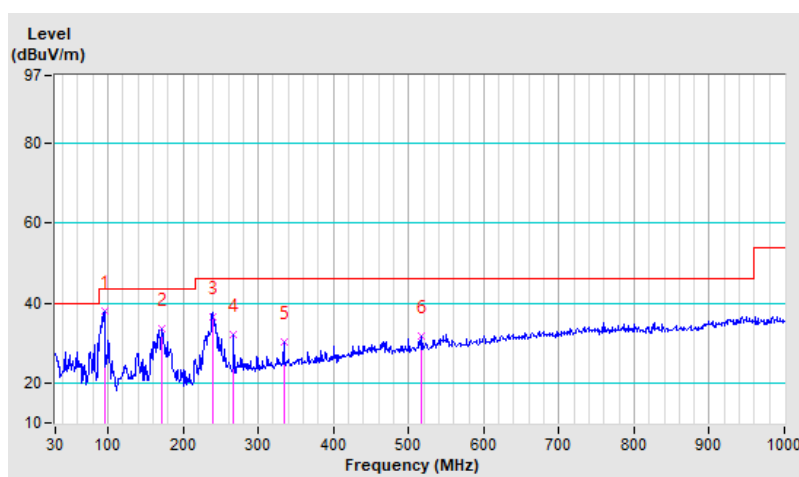


Combination	1		
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	26.9 QP	40.0	-13.1	1.50 V	168	37.6	-10.7
2	63.95	20.1 QP	40.0	-19.9	1.99 V	90	30.2	-10.1
3	74.62	20.8 QP	40.0	-19.2	1.00 V	145	33.0	-12.2
4	92.28	26.3 QP	43.5	-17.2	1.00 V	132	41.0	-14.7
5	160.95	30.9 QP	43.5	-12.6	1.00 V	259	39.9	-9.0
6	240.47	34.0 QP	46.0	-12.0	1.99 V	48	43.8	-9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

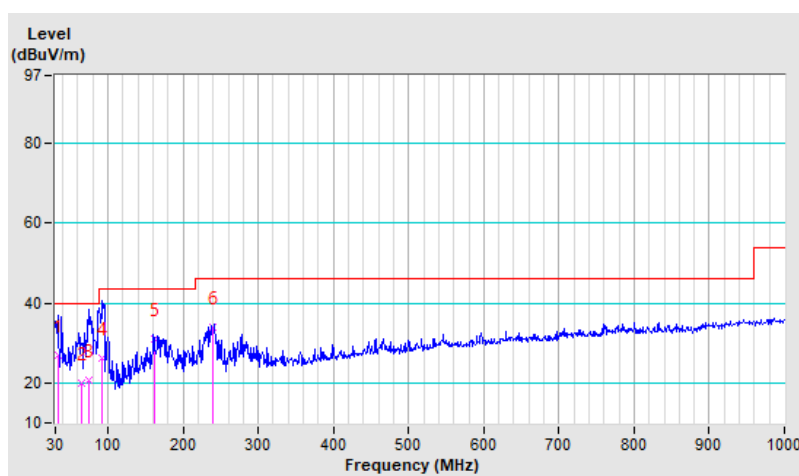

7.2 Radiated Spurious Emissions below 1GHz


FCC Part 22

Combination	1		
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.40	-36.99	-13.00	-23.99	2.00 H	33	69.72	-106.71
2	110.51	-40.81	-13.00	-27.81	2.00 H	345	68.80	-109.61
3	167.74	-49.57	-13.00	-36.57	2.00 H	244	56.88	-106.45
4	190.05	-53.41	-13.00	-40.41	2.00 H	78	55.42	-108.83
5	374.35	-51.37	-13.00	-38.37	2.00 H	126	51.99	-103.36
6	549.92	-57.78	-13.00	-44.78	2.00 H	179	42.07	-99.85

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

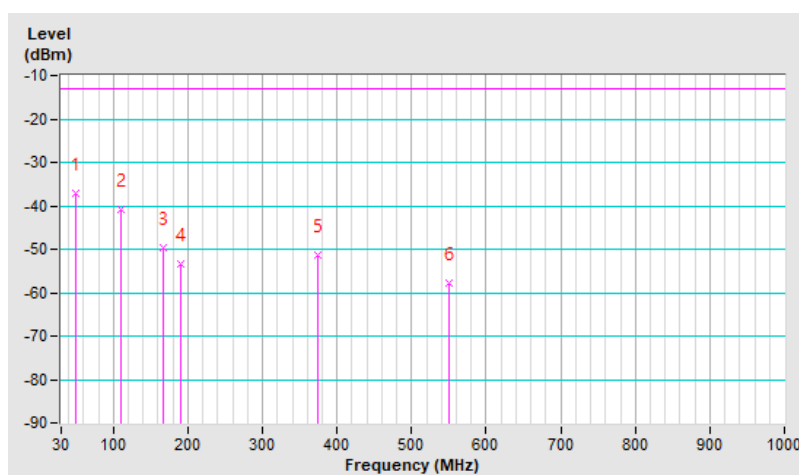


Combination	1		
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.78	-19.06	-13.00	-6.06	1.00 V	31	88.98	-108.04
2	46.49	-23.85	-13.00	-10.85	1.00 V	63	82.93	-106.78
3	63.95	-23.80	-13.00	-10.80	1.00 V	150	83.78	-107.58
4	174.53	-43.45	-13.00	-30.45	1.00 V	203	63.52	-106.97
5	313.24	-56.37	-13.00	-43.37	1.00 V	174	48.04	-104.41
6	437.40	-55.98	-13.00	-42.98	1.00 V	227	45.79	-101.77

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

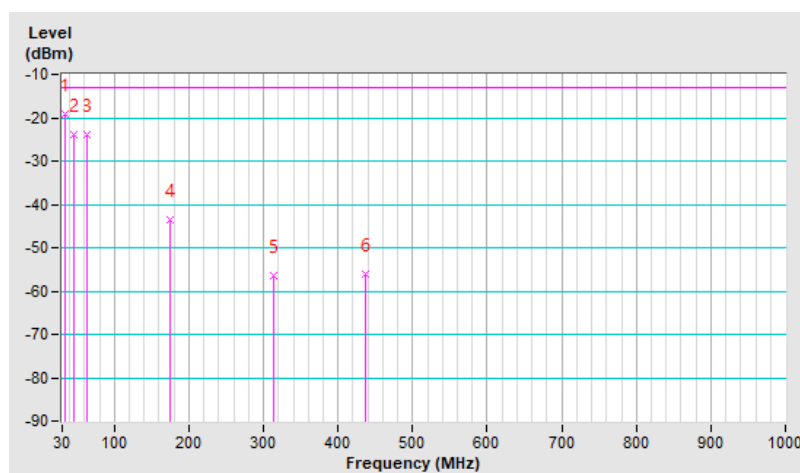

7.3 Unwanted Emissions above 1 GHz

FCC 15.247

Combination	1		
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25.2 °C, 78.3% RH
Tested By	Rex Wang		


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440	104.4 PK			2.52 H	88	69.5	34.9
2	*2440	102.2 AV			2.52 H	88	67.3	34.9
3	4880	52.9 PK	74.0	-21.1	3.52 H	66	41.4	11.5
4	4880	39.4 AV	54.0	-14.6	3.52 H	66	27.9	11.5
5	7320	61.5 PK	74.0	-12.5	3.54 H	75	42.4	19.1
6	7320	49.7 AV	54.0	-4.3	3.54 H	75	30.6	19.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440	98.1 PK			1.00 V	112	63.2	34.9
2	*2440	95.3 AV			1.00 V	112	60.4	34.9
3	4880	52.7 PK	74.0	-21.3	1.55 V	146	41.2	11.5
4	4880	39.1 AV	54.0	-14.9	1.55 V	146	27.6	11.5
5	7320	60.5 PK	74.0	-13.5	1.50 V	147	41.4	19.1
6	7320	47.0 AV	54.0	-7.0	1.50 V	147	27.9	19.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	----------------	-------------------------------	--

BT LE-2M Channel 19

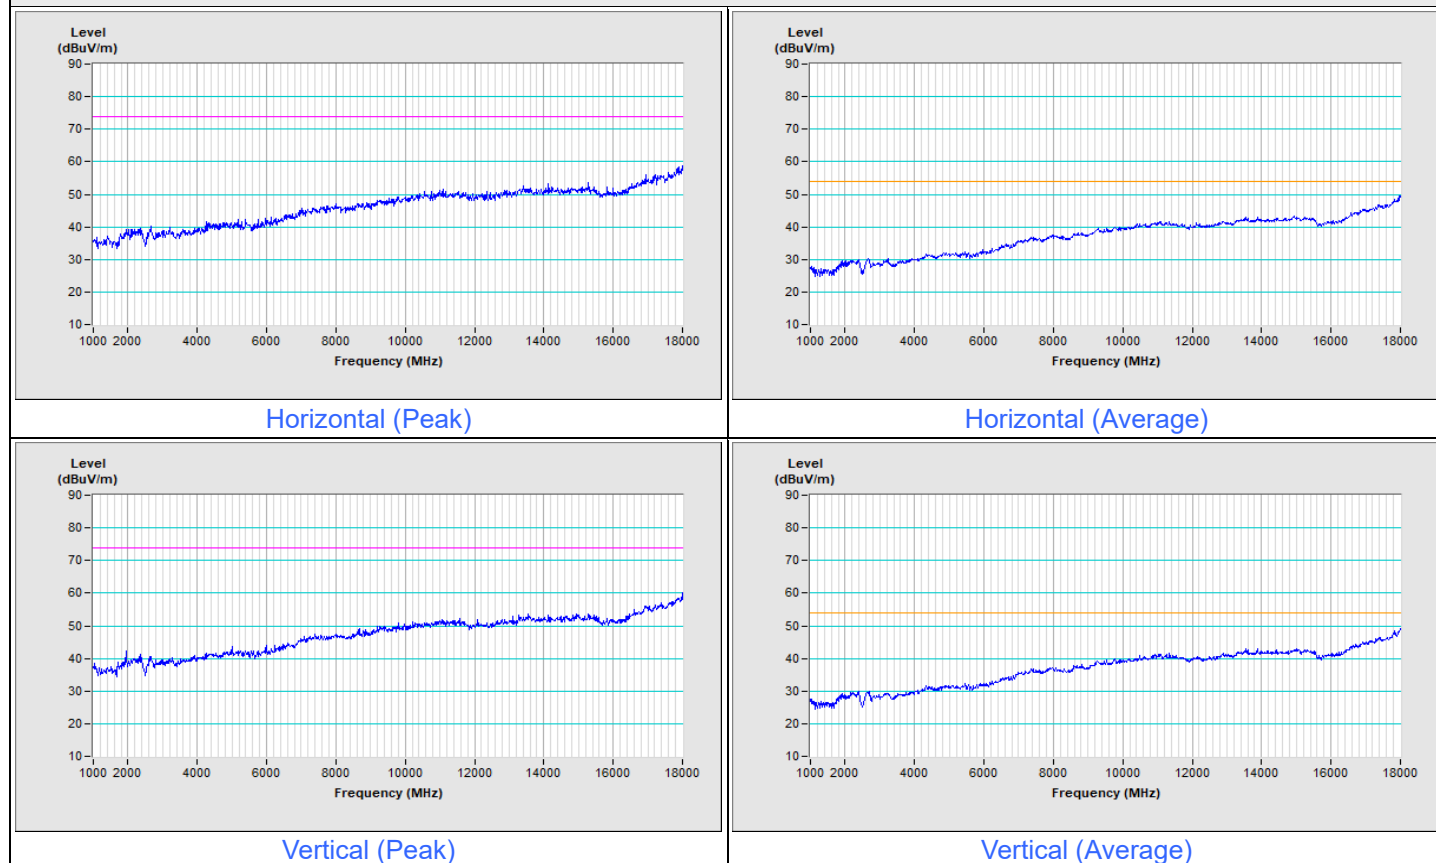

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 25 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

7.4 Radiated Spurious Emissions above 1GHz

FCC Part 22

Combination	1		
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-46.79	-13.00	-33.79	2.85 H	144	54.23	-101.02
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-48.62	-13.00	-35.62	1.55 V	234	52.40	-101.02

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---