

TEST REPORT

Reference No. : WTD25D04107076W005
FCC ID..... : 2AV5BL1401
Applicant..... : Shenzhen Zolon Technology Co.,Ltd.
Address : 401, Building 3, Shenzhen Software Park, Maling Community, Yuehai Sub-district, Nanshan District, Shenzhen, China
Manufacturer : Shenzhen Zolon Technology Co.,Ltd.
Address : 401, Building 3, Shenzhen Software Park, Maling Community, Yuehai Sub-district, Nanshan District, Shenzhen, China
Product..... : Smart Computer
Model(s)..... : L1401
Standards..... : FCC 47CFR Part 15 Section 15.407
Date of Receipt sample..... : 2025-05-19
Date of Test..... : 2025-05-27 to 2025-06-05
Date of Issue : 2025-06-06
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

Approved by:

James Cheng

James Cheng / Project Engineer



Deval Qin / Designated Reviewer

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS.....	2
3 REVISION HISTORY.....	3
4 GENERAL INFORMATION.....	4
4.1 GENERAL DESCRIPTION OF E.U.T.....	4
4.2 DETAILS OF E.U.T.....	4
4.3 CHANNEL LIST.....	5
4.4 TEST MODE DESCRIPTION	8
4.5 TEST FACILITY	8
5 EQUIPMENT USED DURING TEST.....	9
5.1 EQUIPMENTS LIST	9
5.2 DESCRIPTION OF SUPPORT UNITS.....	10
5.3 MEASUREMENT UNCERTAINTY	10
6 TEST SUMMARY.....	11
7 DUTY CYCLE.....	12
7.1 SUMMARY OF TEST RESULTS.....	12
8 RADIATED EMISSIONS	26
8.1 EUT OPERATION.....	26
8.2 TEST SETUP	27
8.3 SPECTRUM ANALYZER SETUP	28
8.4 TEST PROCEDURE.....	29
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	29
8.6 SUMMARY OF TEST RESULTS.....	30
9 BAND EDGE	60
9.1 TEST PRODUCE.....	60
9.2 TEST RESULT.....	61
10 6 DB BANDWIDTH	85
10.1 TEST PROCEDURE	85
10.2 TEST RESULT	85
11 26 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	93
11.1 TEST PROCEDURE	93
11.2 TEST RESULT	94
12 CONDUCTED OUTPUT POWER	119
12.1 TEST PROCEDURE	119
12.2 TEST RESULT	120
13 POWER SPECTRAL DENSITY	154
13.1 TEST PROCEDURE	154
13.2 TEST RESULT	155
14 FREQUENCY STABILITY	189
14.1 TEST PROCEDURE	189
14.2 TEST RESULT	190
15 ANTENNA REQUIREMENT	192
16 RF EXPOSURE.....	192
17 PHOTOGRAPHS OF TEST SETUP AND EUT.....	192

3 Revision History

Test Report No.	Date of Receipt Sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD25D04107076W005	2025-05-19	2025-05-27 to 2025-06-05	2025-06-06	original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	Smart Computer
Model(s):	L1401
Model Description:	N/A
Test Sample No.:	1-1/1
Wi-Fi Specification:	802.11a/ n(HT20/40)/ac(VHT20/40/80)
Hardware Version:	L1401
Software Version:	V0.0.0.1
Storage Location:	Internal Storage

4.2 Details of E.U.T.

Operation Frequency:	802.11a/n(HT20)/ac(VHT20): U-NII-1: 5180-5240MHz, U-NII-2A: 5260-5320MHz(DFS), U-NII-2C: 5500-5700MHz(DFS), U-NII-3: 5745-5825MHz 802.11n(HT40)/ac(VHT40): U-NII-1: 5190-5230MHz, U-NII-2A: 5270-5310MHz(DFS), U-NII-2C: 5510-5670MHz(DFS), U-NII-3: 5755-5795MHz 802.11ac(VHT80): U-NII-1: 5210MHz, U-NII-2A: 5290MHz(DFS), U-NII-2C: 5530-5610MHz(DFS), U-NII-3: 5775MHz
Max. RF output power:	U-NII-1: 16.67dBm U-NII-2A: 15.52dBm U-NII-2C: 17.66dBm U-NII-3: 18.35dBm
Type of Modulation:	802.11a: OFDM(BPSK, QPSK, 16QAM, 64QAM) 802.11n: OFDM(BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM(BPSK, QPSK, 16QAM, 64QAM, 256QAM)
DFS Function:	Slave without radar detection
Antenna installation:	FPC Antenna
Antenna Gain:	U-NII-1: 5.82dBi U-NII-2A: 5.78dBi U-NII-2C: 6.24dBi U-NII-3: 5.88dBi

Note:#: The antenna gain is provided by the applicant, and the applicant should be responsible for its authenticity, WALTEK lab has not verified the authenticity of its information.

Ratings:	Input: 12.0V=5.0A
Adapter information:	MODEL: ADT-65NS-D00 INPUT: 100-240~50/60Hz 1.6A OUTPUT: 5.0V=3.0A 15.0W or 9.0V=3.0A 27.0W or 12.0V=5.0A 60W or 15.0V=4.33A 64.95W or 20.0V=3.25A 65.0W

4.3 Channel List

U-NII-1 (5.15-5.25GHz)			
channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	38	5190
40	5200	42	5210
44	5220	46	5230
48	5240		

U-NII-2A (5.25-5.35GHz)			
channel	Frequency(MHz)	channel	Frequency(MHz)
52	5260	54	5270
56	5280	58	5290
60	5300	62	5310
64	5320		

U-NII-2C (5.47-5.725GHz)			
channel	Frequency(MHz)	channel	Frequency(MHz)
100	5500	102	5510
104	5520	106	5530
108	5540	110	5550
112	5560	116	5580
118	5590	120	5600
122	5610	124	5620
126	5630	128	5640
132	5660	134	5670
136	5680	140	5700

U-NII-3 (5.725-5.85GHz)			
channel	Frequency(MHz)	channel	Frequency(MHz)
149	5745	151	5755
153	5765	155	5775
157	5785	159	5795
161	5805	165	5825

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11a/n(HT20)/ac(VHT20):

channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	40	5200
48	5240		

channel	Frequency(MHz)	channel	Frequency(MHz)
52	5260	56	5280
64	5320		

channel	Frequency(MHz)	channel	Frequency(MHz)
100	5500	120	5600
140	5700		

channel	Frequency(MHz)	channel	Frequency(MHz)
149	5745	157	5785
165	5825		

For 802.11n(HT40)/ac(VHT40):

channel	Frequency(MHz)	channel	Frequency(MHz)
38	5190	46	5230

channel	Frequency(MHz)	channel	Frequency(MHz)
54	5270	62	5310

channel	Frequency(MHz)	channel	Frequency(MHz)
102	5510	110	5550
134	5670		

channel	Frequency(MHz)	channel	Frequency(MHz)
151	5755	159	5795

For 802.11ac(VHT80):

channel	Frequency(MHz)	channel	Frequency(MHz)
42	5210		

channel	Frequency(MHz)	channel	Frequency(MHz)
58	5290		

channel	Frequency(MHz)	channel	Frequency(MHz)
106	5530	122	5610

channel	Frequency(MHz)	channel	Frequency(MHz)
155	5775		

4.4 Test Mode Description

During testing, Channel and Power Controlling Software provided by the applicant was used to control the operating channel as well as the maximum output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Transmitting duty cycle is no less 98%.

The software is TermAssist and SecureCRT tool Use together.

Test Items	Mode	Data Rate	TX/RX
Radiated Emissions	802.11a(HT20)	6 Mbps	TX
	802.11n(HT20/40)/ac(VHT20/40/80)	MCS0	TX
Duty Cycle	802.11a(HT20)	6 Mbps	TX
	802.11n(HT20/40)/ac(VHT20/40/80)	MCS0	TX
Band Edge	802.11a(HT20)	6 Mbps	TX
	802.11n(HT20/40)/ac(VHT20/40/80)	MCS0	TX
6dB Bandwidth	802.11a(HT20)	6 Mbps	TX
	802.11n(HT20/40)/ac(VHT20/40/80)	MCS0	TX
26dB Bandwidth and 99% Occupied Bandwidth	802.11a(HT20)	6 Mbps	TX
	802.11n(HT20/40)/ac(VHT20/40/80)	MCS0	TX
Conducted Output Power	802.11a(HT20)	6 Mbps	TX
	802.11n(HT20/40)/ac(VHT20/40/80)	MCS0	TX
Power Spectral Density	802.11a(HT20)	6 Mbps	TX
	802.11n(HT20/40)/ac(VHT20/40/80)	MCS0	TX
Frequency Stability	Un-modulation	/	TX

4.5 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

5 Equipment Used during Test

5.1 Equipments List

3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP30	100091	2025-04-19	2026-04-18
2	Amplifier	Agilent	8447D	2944A10178	2024-07-18	2025-07-17
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2024-07-21	2025-07-20
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2025-04-19	2026-04-18
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2025-01-17	2026-01-16
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2024-07-18	2025-07-17
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2024-07-18	2025-07-17
8	Coaxial Cable (above 1GHz)	ZT26-NJ-NJ-8M/FA	1GHz-18GHz	NA	2025-04-19	2026-04-18
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2025-04-19	2026-04-18
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2024-11-04	2025-11-03
3	Active Loop Antenna	Com-Power Corp.	AL-130R	10160007	2025-04-21	2026-04-20
4	Amplifier	ANRITSU	MH648A	M43381	2025-04-19	2026-04-18
5	Cable	HUBER+SUHNER	CBL2	525178	2025-04-19	2026-04-18
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Spectrum Analyzer	R&S	FSP40	100501	2024-07-18	2025-07-17
2.	EXA Signal Analyzer	Malaysia Keysight	N9010A	MY50520207	2025-04-19	2026-04-18

Test Software:

Test Item	Software name	Software version
Radiated Emission(3m)	EZ-EMC	EZ-EMC(RA-03A1-1)

5.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

5.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

6 Test Summary

Test Items	Test Requirement	Result
Radiated Emissions	15.407(a) 15.205(a) 15.209(a)	PASS
Duty Cycle	KDB 789033	PASS
6dB Bandwidth	15.407(a)	PASS
26 dB Emission Bandwidth & 99% Occupied Bandwidth	15.407(a)	PASS
Maximum Conducted Output Power	15.407(a)	PASS
Power Spectral Density	15.407(a)	PASS
Restricted bands around fundamental frequency	15.407(a)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

7 Duty cycle

Test Requirement:	FCC 47CFR Part 15 Section 15.407 KDB789033 D02 General U-NII Test Procedures New Rules v02r01, Section (B)
Test Method:	ANSI C63.10-2020+A1-2024
Test Limit:	N/A
Test Result:	PASS
Remark:	Through Pre-scan, and found 802.11a at lowest channel is the worst case. Only the worst case is recorded in the report.


7.1 Summary of Test Results

Type of Modulation	On time ms	Period ms	Duty Cycle linear	Duty Cycle %	Duty Cycle Factor(dB)	Average Factor(dB)
U-NII-1 802.11a	2.027	2.062	0.98	98.30	0.07	-0.15
U-NII-1 802.11n(HT20)	1.887	1.927	0.98	97.92	0.09	-0.18
U-NII-1 802.11n(HT40)	0.926	0.962	0.96	96.26	0.17	-0.33
U-NII-1 802.11ac(VHT20)	1.901	1.937	0.98	98.14	0.08	-0.16
U-NII-1 802.11ac(VHT40)	0.934	0.97	0.96	96.29	0.16	-0.33
U-NII-1 802.11ac(VHT80)	0.458	0.492	0.93	93.09	0.31	-0.62
U-NII-2A 802.11a	2.027	2.067	0.98	98.06	0.08	-0.17
U-NII-2A 802.11n(HT20)	1.889	1.926	0.98	98.08	0.08	-0.17
U-NII-2A 802.11n(HT40)	0.929	0.966	0.96	96.17	0.17	-0.34
U-NII-2A 802.11ac(VHT20)	1.898	1.938	0.98	97.94	0.09	-0.18
U-NII-2A 802.11ac(VHT40)	0.935	0.972	0.96	96.19	0.17	-0.34
U-NII-2A 802.11ac(VHT80)	0.456	0.491	0.93	92.87	0.32	-0.64
U-NII-2C 802.11a	2.032	2.067	0.98	98.31	0.07	-0.15
U-NII-2C 802.11n(HT20)	1.892	1.927	0.98	98.18	0.08	-0.16
U-NII-2C 802.11n(HT40)	0.928	0.961	0.97	96.57	0.15	-0.30
U-NII-2C 802.11ac(VHT20)	1.902	1.937	0.98	98.19	0.08	-0.16
U-NII-2C 802.11ac(VHT40)	0.939	0.9741	0.96	96.40	0.16	-0.32
U-NII-2C 802.11ac(VHT80)	0.4572	0.4922	0.93	92.89	0.32	-0.64


U-NII-3 802.11a	2.023	2.063	0.98	98.06	0.09	-0.17
U-NII-3 802.11n(HT20)	1.888	1.923	0.98	98.18	0.08	-0.16
U-NII-3 802.11n(HT40)	0.9274	0.9629	0.96	96.31	0.16	-0.33
U-NII-3 802.11ac(VHT20)	1.898	1.938	0.98	97.94	0.09	-0.18
U-NII-3 802.11ac(VHT40)	0.9375	0.973	0.96	96.35	0.16	-0.32
U-NII-3 802.11ac(VHT80)	0.4573	0.4923	0.93	92.89	0.32	-0.64

Test result plots shown as follows:


802.11a U-NII-1 Low channel

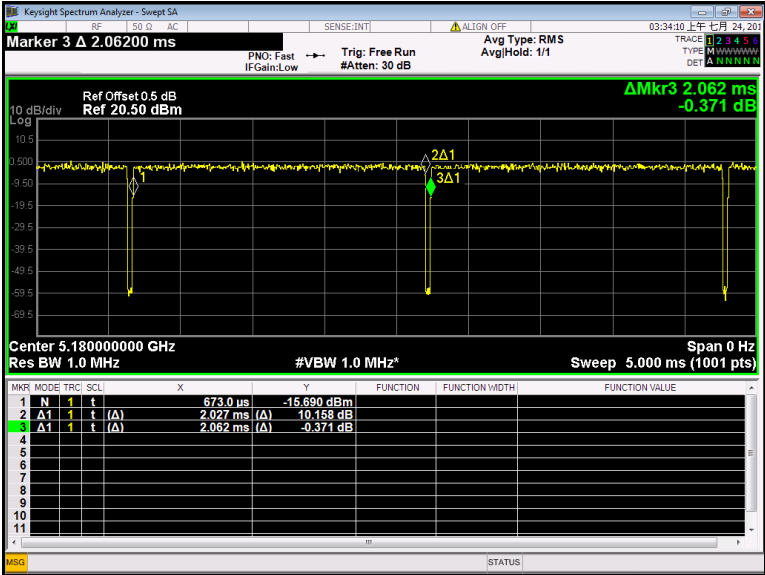


802.11n(HT20) U-NII-1 Low channel

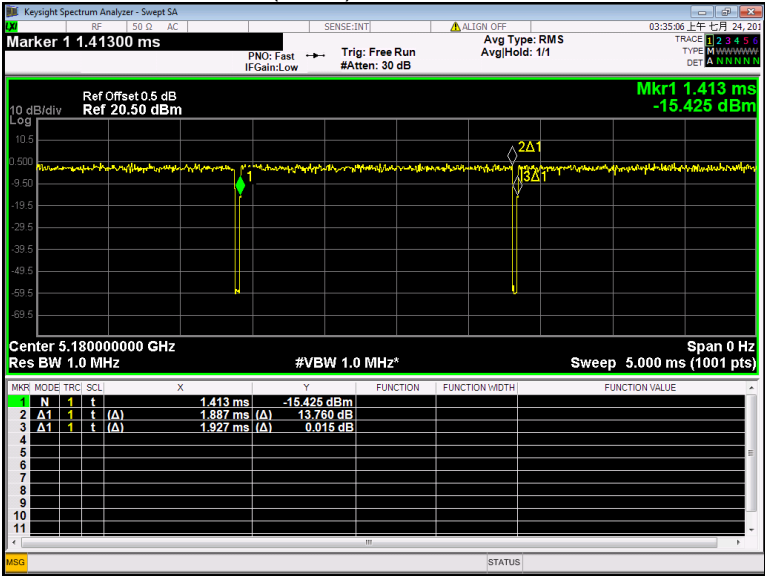


802.11n(HT40) U-NII-1 Low channel

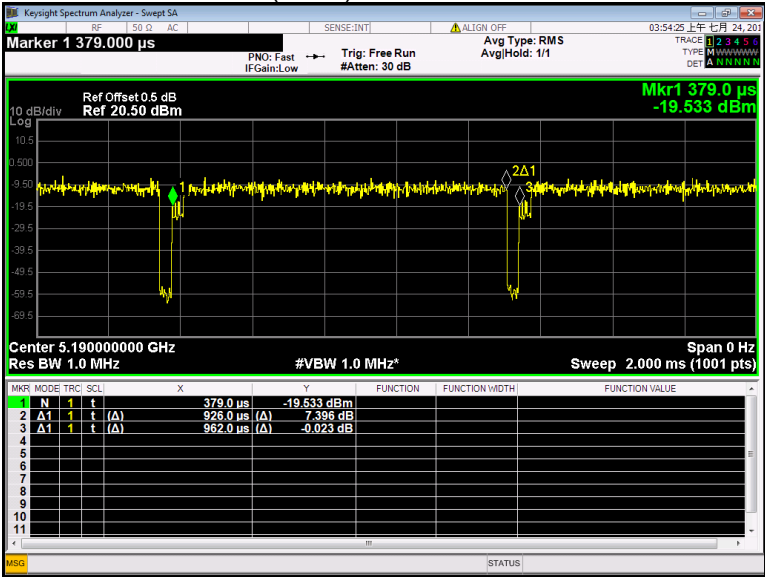


802.11ac(VHT20) U-NII-1 Low channel

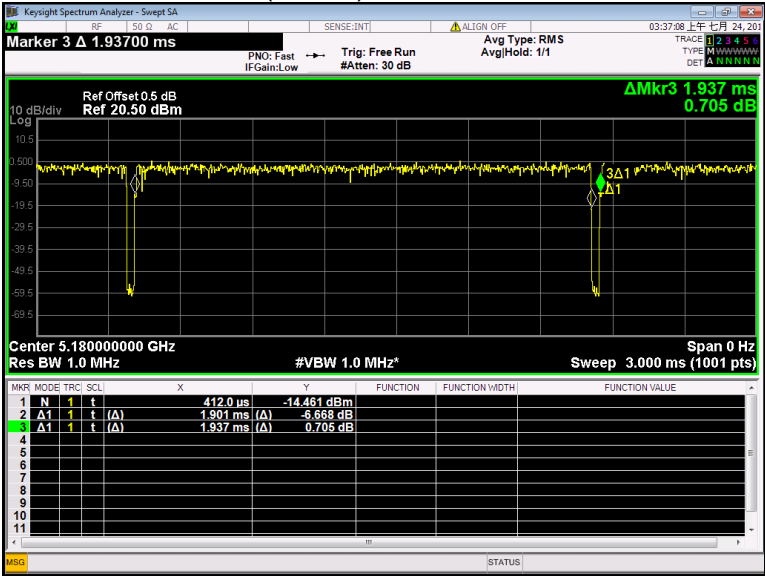


802.11ac(VHT40) U-NII-1 Low channel

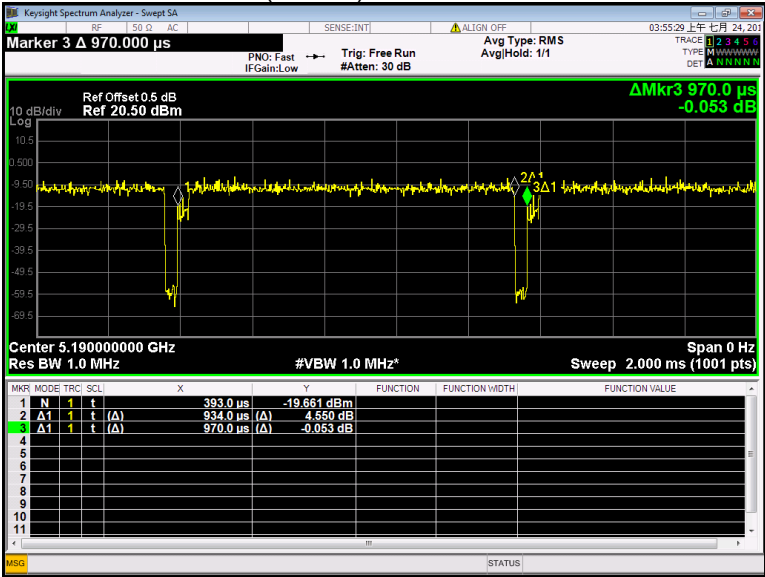


802.11ac(VHT80) U-NII-1 Low channel

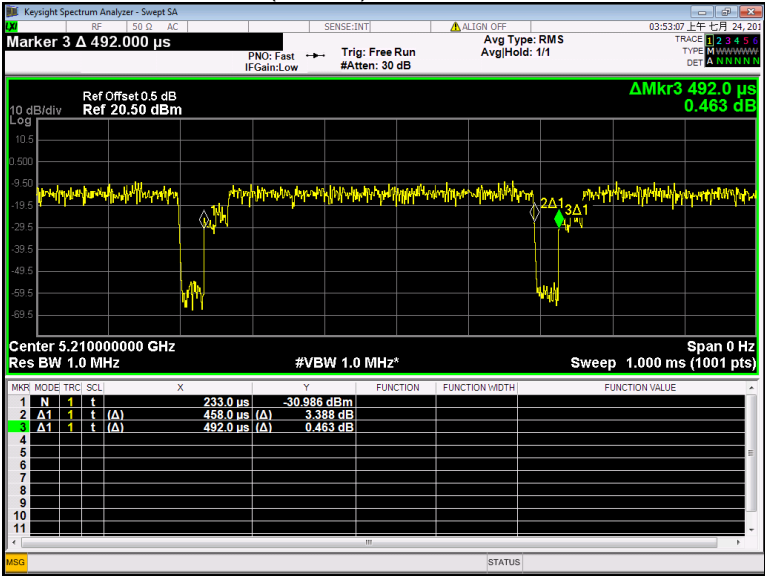


802.11a U-NII-2A Low channel

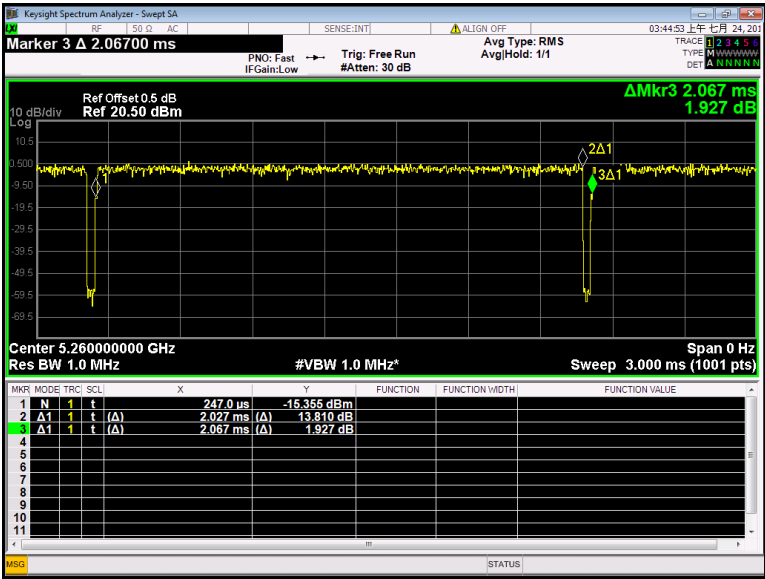


802.11n(HT20) U-NII-2A Low channel

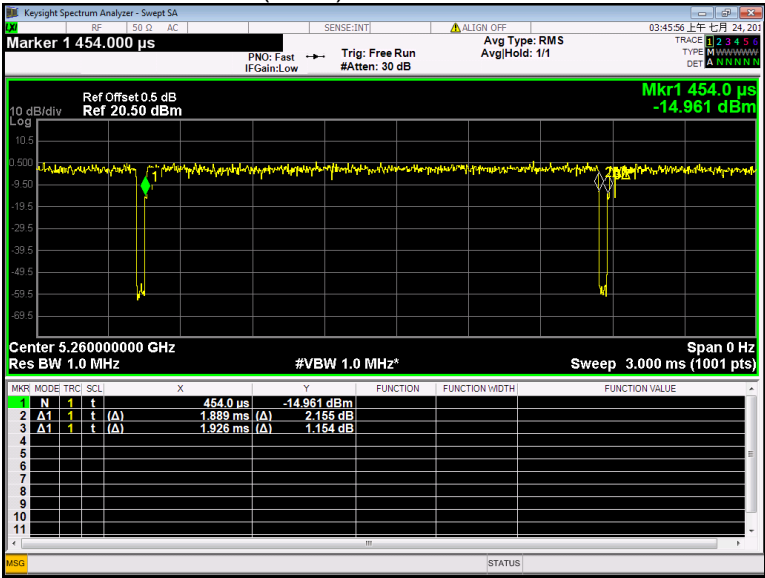


802.11n(HT40) U-NII-2A Low channel

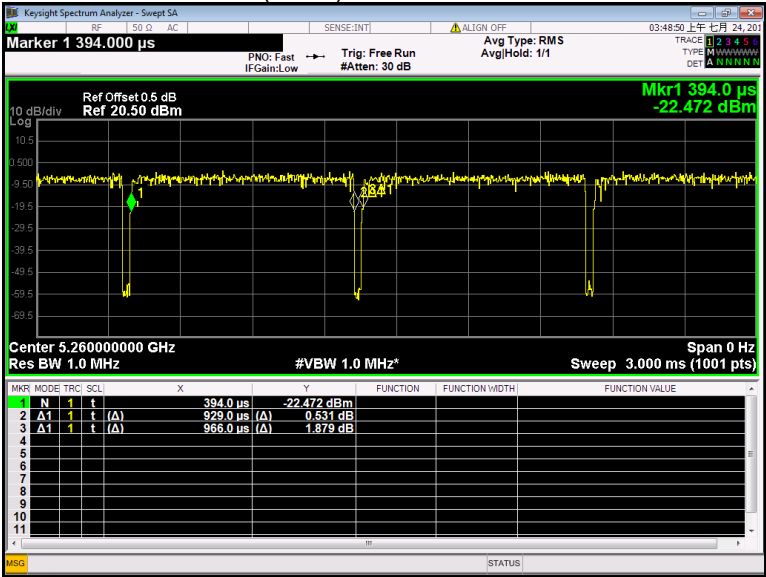


802.11ac(VHT20) U-NII-2A Low channel

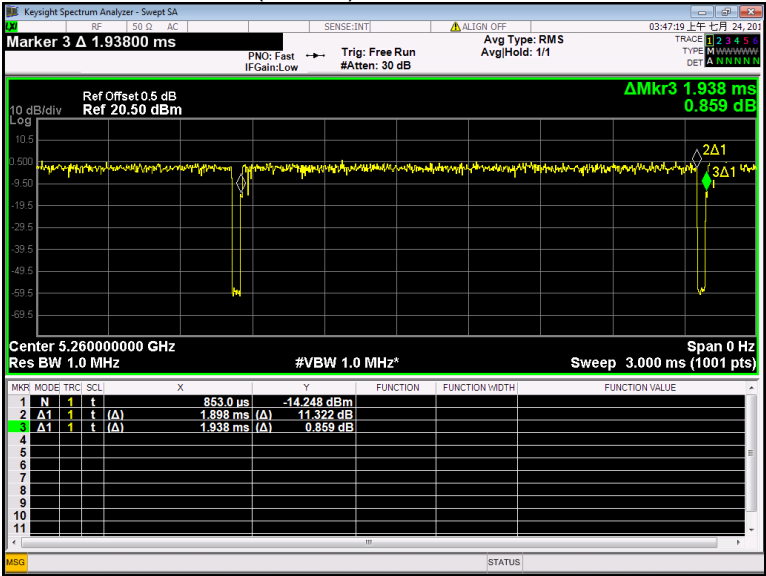


802.11ac(VHT40) U-NII-2A Low channel

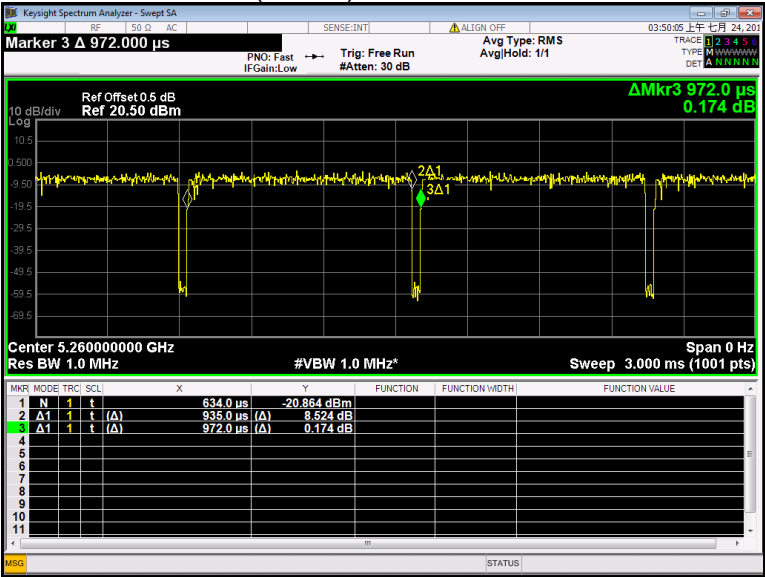


802.11ac(VHT80) U-NII-2A Low channel

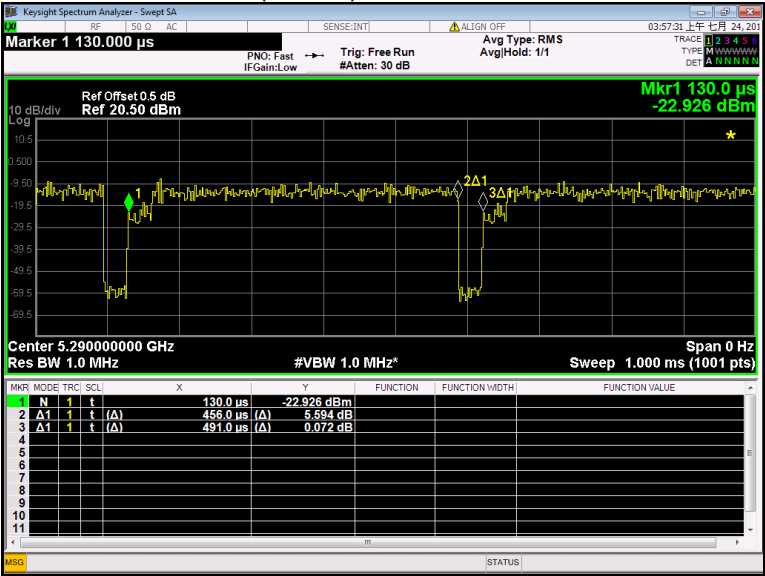


802.11a U-NII-2C Low channel

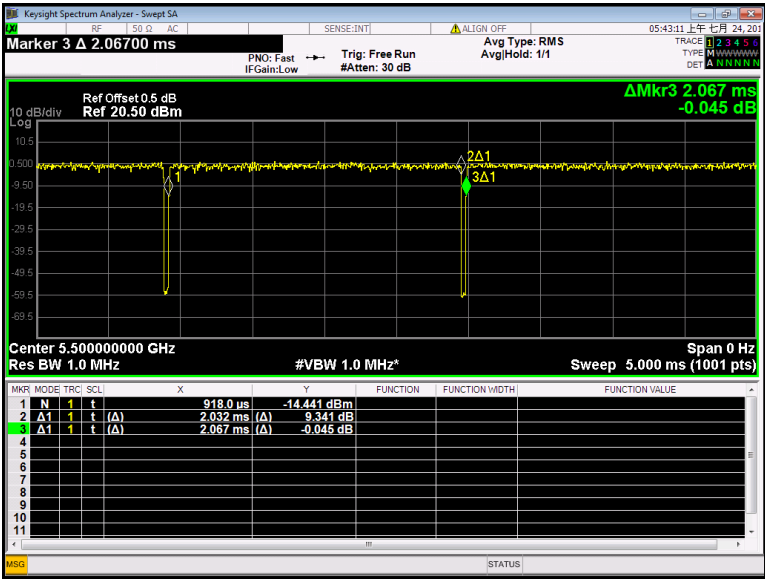


802.11n(HT20) U-NII-2C Low channel

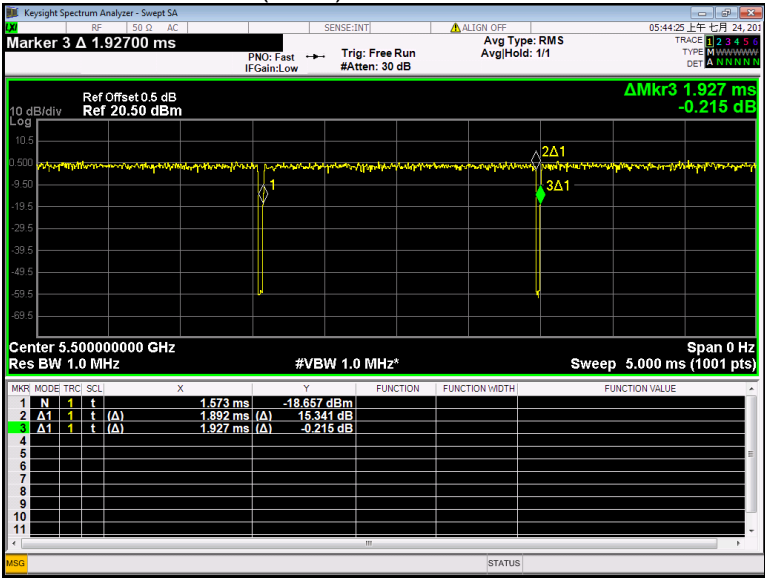


802.11n(HT40) U-NII-2C Low channel

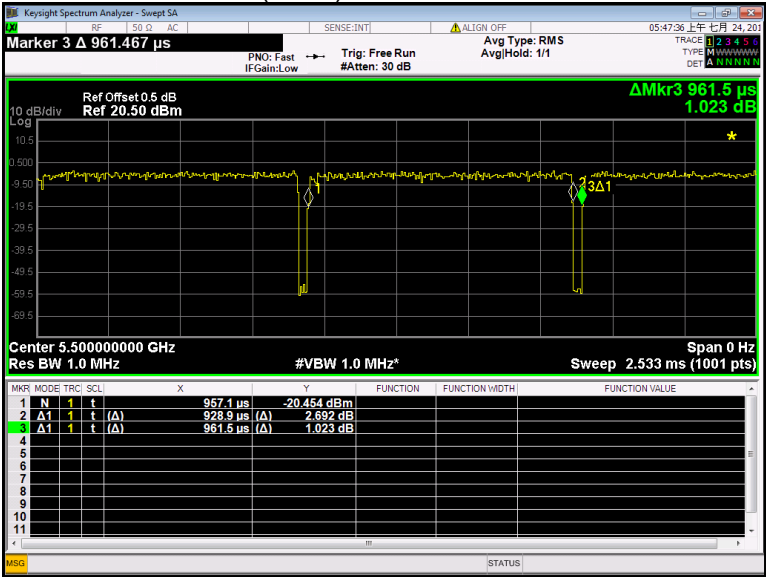


802.11ac(VHT20) U-NII-2C Low channel

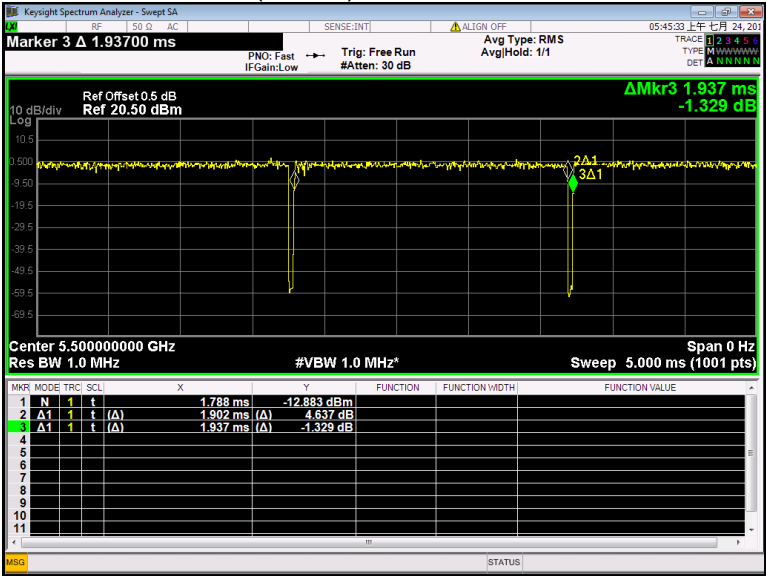


802.11ac(VHT40) U-NII-2C Low channel

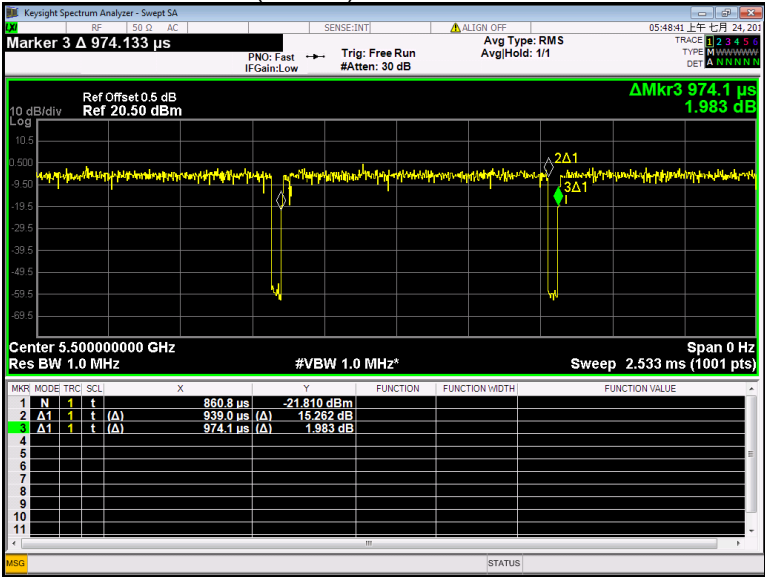


802.11ac(VHT80) U-NII-2C Low channel

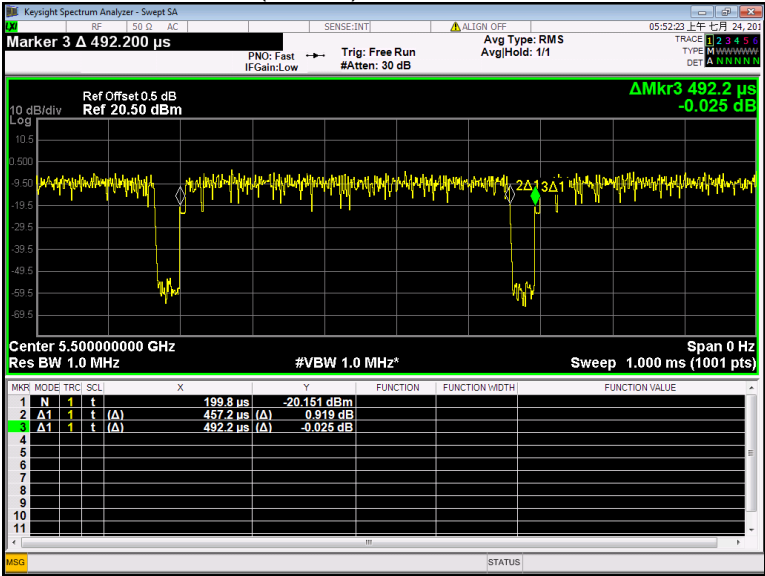


802.11a U-NII-3 Low channel

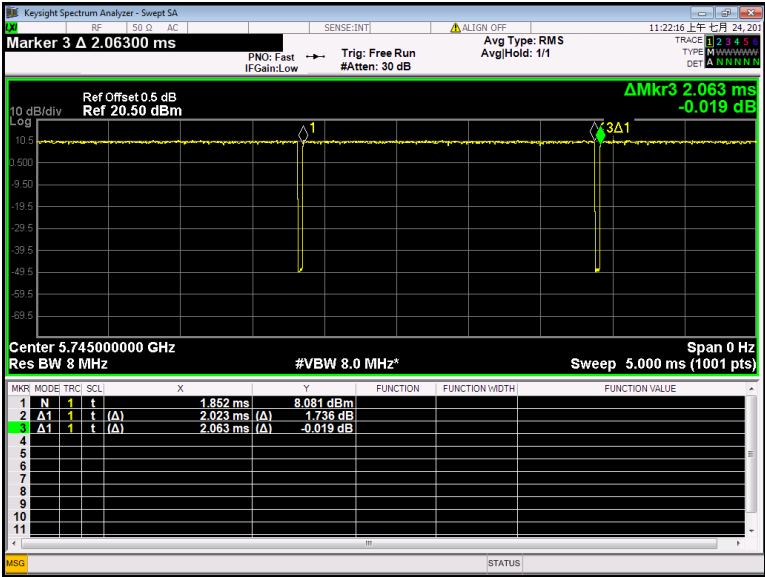


802.11n(HT20) U-NII-3 Low channel

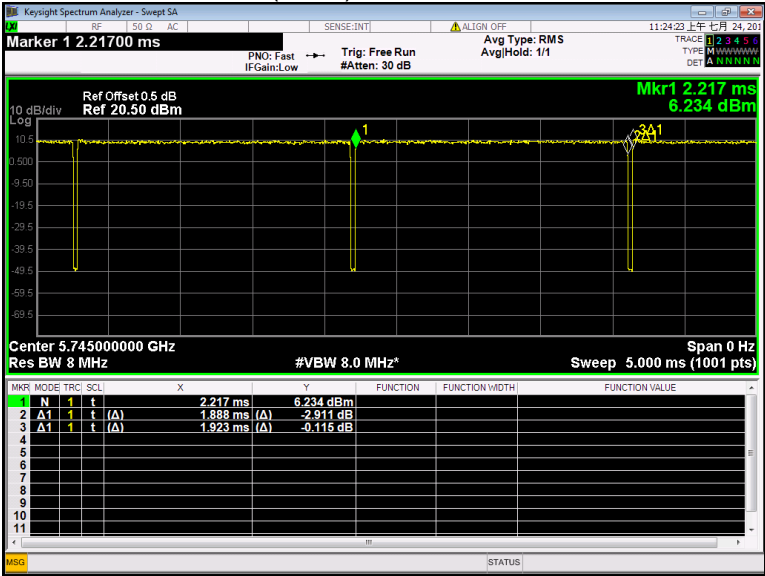


802.11n(HT40) U-NII-3 Low channel

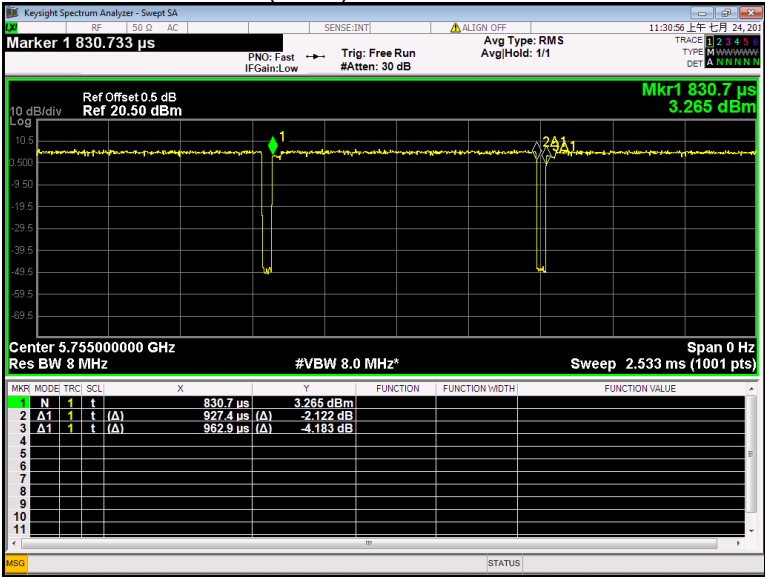


802.11ac(VHT20) U-NII-3 Low channel

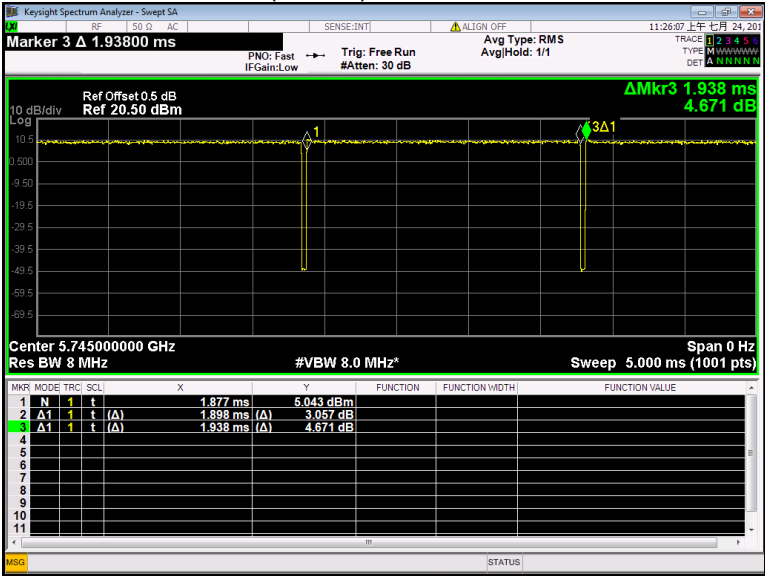

802.11ac(VHT40) U-NII-3 Low channel

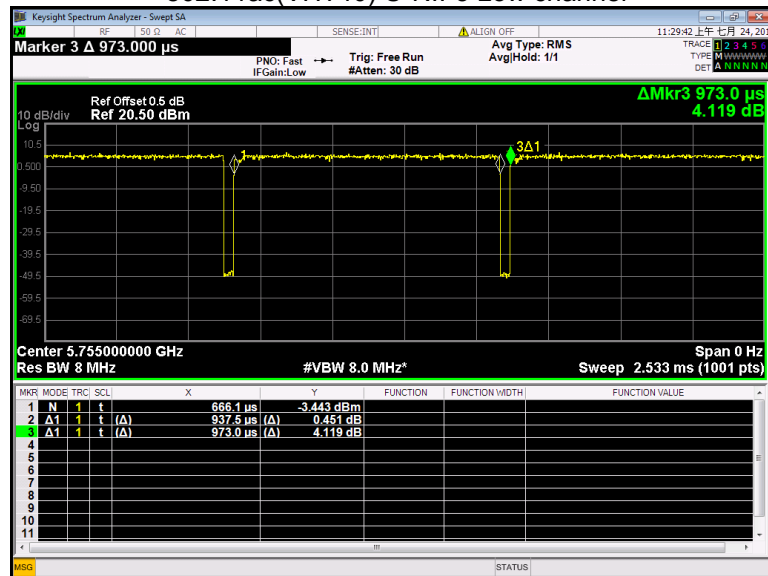

802.11ac(VHT80) U-NII-3 Low channel

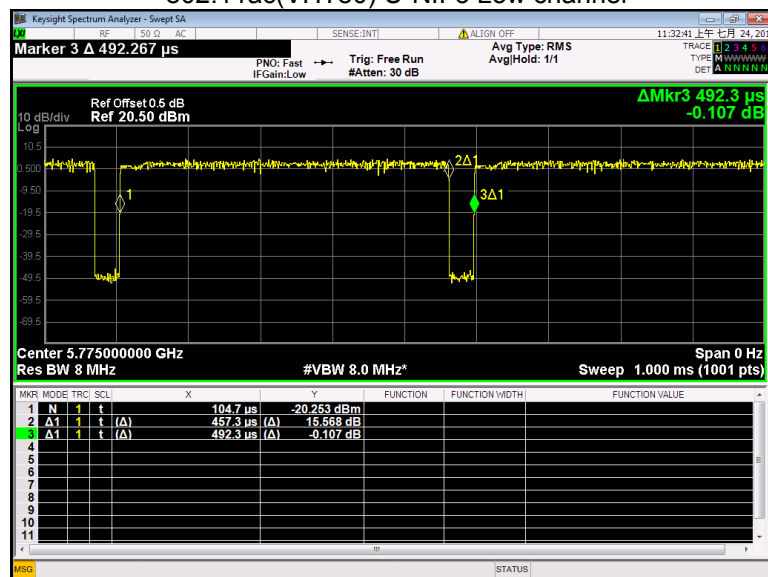

8 Radiated Emissions

Test Requirement: FCC 47CFR Part 15 Section 15.209 & 15.407

Test Method: ANSI C63.10-2020+A1-2024

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Distance	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10-2020+A1-2024.


The test setup for emission measurement below 30MHz.

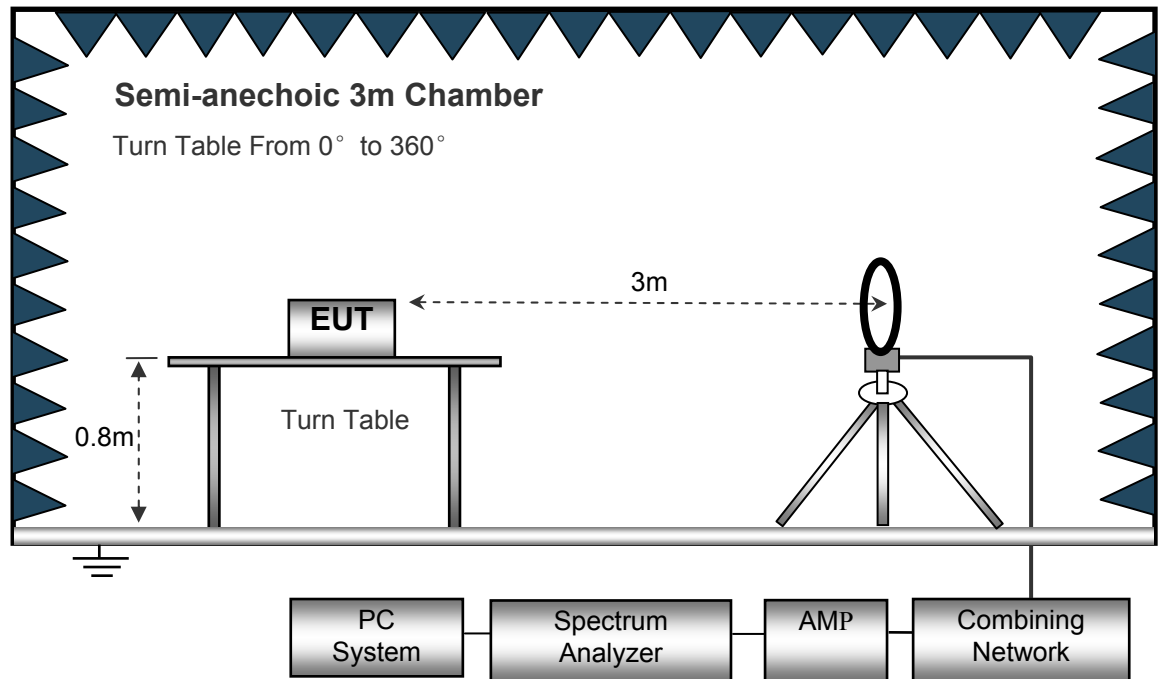

The test setup for emission measurement from 30 MHz to 1 GHz.

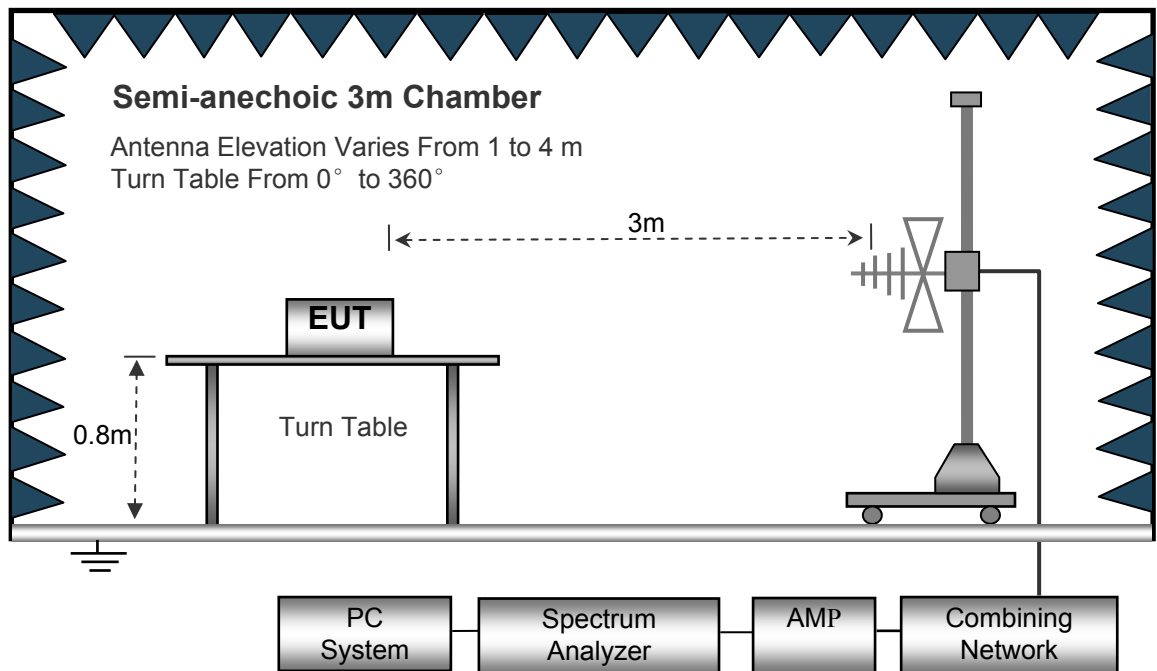

The test setup for emission measurement above 1 GHz.

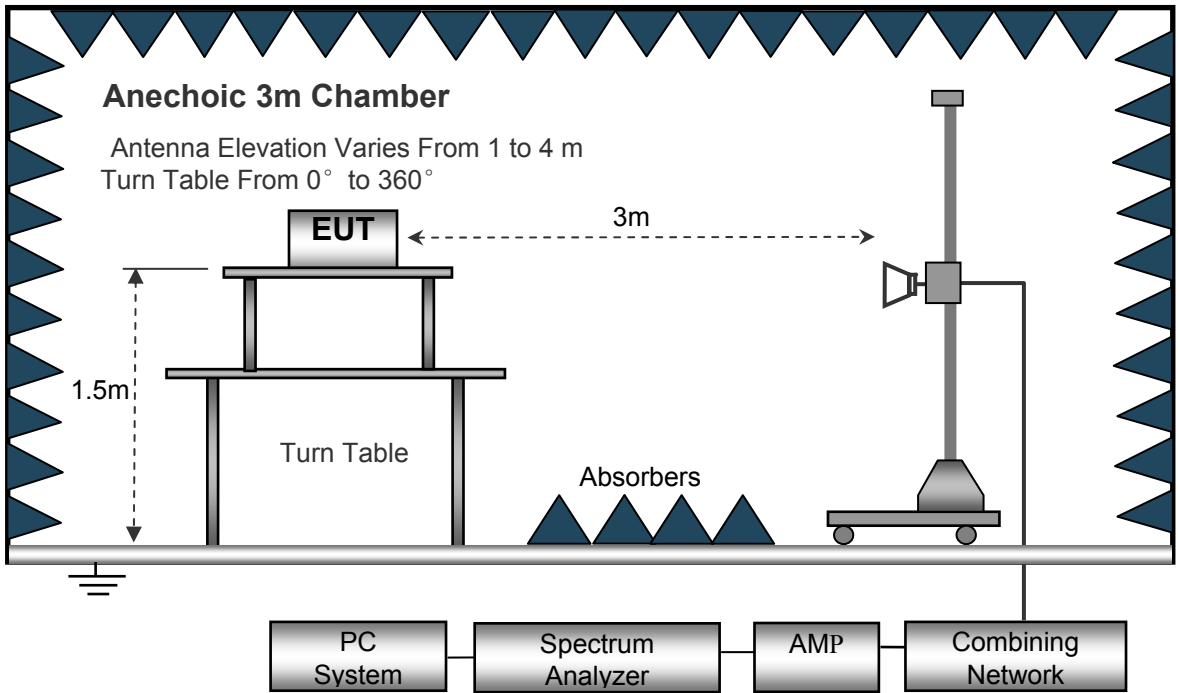

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth.....10kHz
Video Bandwidth.....10kHz
Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....100kHz
Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....1MHz
Video Bandwidth.....3MHz
DetectorAve.
Resolution Bandwidth.....1MHz
Video Bandwidth.....10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

8.6 Summary of Test Results


Test Frequency: 9KHz~30MHz

The measurements were more than 20 dB below the limit and not reported.


Test Frequency: 30MHz ~ 1GHz

Remark: only the worst data (U-NII-2A 802.11ac(VHT80) Low Channel) were reported.

Antenna Polarization: Vertical

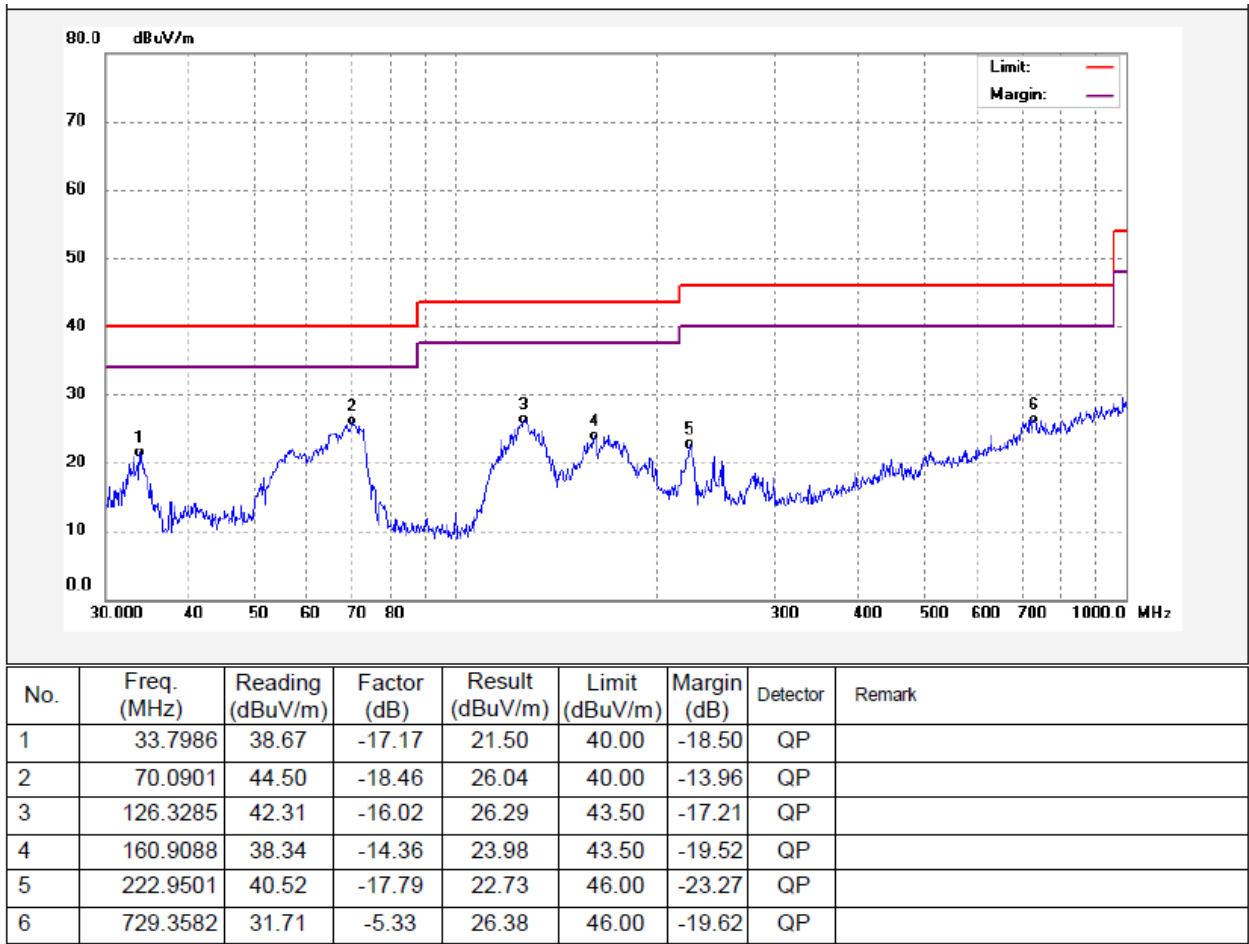

Antenna Polarization: Horizontal

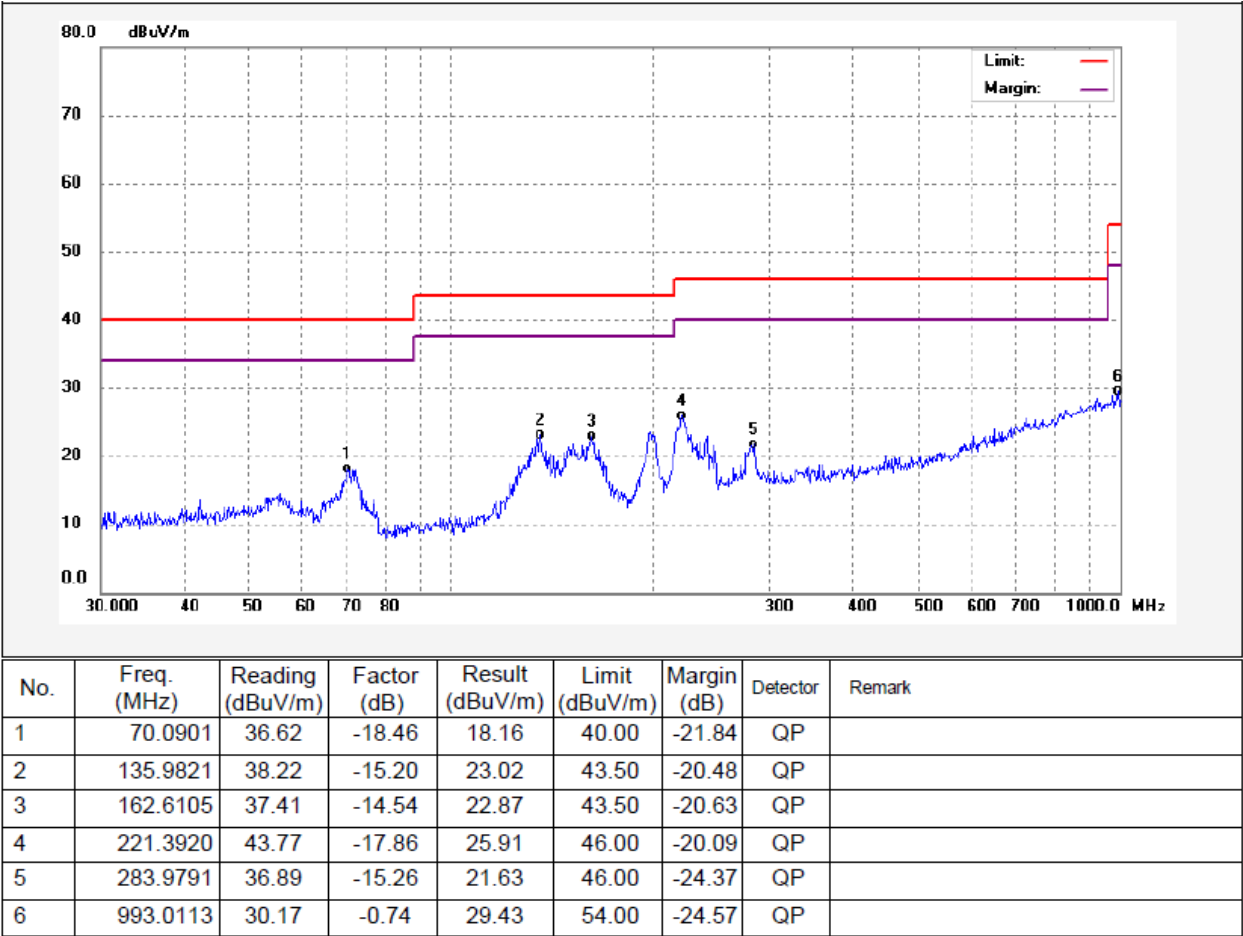

Test Frequency : 1GHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a U-NII-1 Low Channel 5180MHz									
4513.47	53.99	PK	127	1.9	H	-2.03	51.96	74.00	-22.04
4513.47	43.54	Ave	127	1.9	H	-2.03	41.51	54.00	-12.49
5143.53	52.69	PK	331	1.6	H	-1.02	51.67	74.00	-22.33
5143.53	44.30	Ave	331	1.6	H	-1.02	43.28	54.00	-10.72
10360.00	41.39	PK	6	1.3	H	5.33	46.72	74.00	-27.28
10360.00	37.98	Ave	6	1.3	H	5.33	43.31	54.00	-10.69
802.11a U-NII-1 Middle channel 5200MHz									
4515.50	53.89	PK	207	1.7	H	-1.94	51.95	74.00	-22.05
4515.50	42.90	Ave	207	1.7	H	-1.94	40.96	54.00	-13.04
5127.48	52.54	PK	294	1.2	H	-1.06	51.48	74.00	-22.52
5127.48	43.62	Ave	294	1.2	H	-1.06	42.56	54.00	-11.44
10400.00	41.07	PK	223	1.6	H	5.21	46.28	74.00	-27.72
10400.00	36.71	Ave	223	1.6	H	5.21	41.92	54.00	-12.08

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a U-NII-1 High channel 5240MHz									
4537.16	53.54	PK	106	1.3	H	-2.24	51.30	74.00	-22.70
4537.16	41.55	Ave	106	1.3	H	-2.24	39.31	54.00	-14.69
5128.92	51.81	PK	69	1.4	H	-1.09	50.72	74.00	-23.28
5128.92	43.62	Ave	69	1.4	H	-1.09	42.53	54.00	-11.47
10480.00	40.87	PK	106	1.7	H	5.14	46.01	74.00	-27.99
10480.00	37.95	Ave	106	1.7	H	5.14	43.09	54.00	-10.91
802.11a U-NII-2A Low Channel 5260MHz									
4519.45	55.16	PK	78	1.1	H	-2.03	53.13	74.00	-20.87
4519.45	41.13	Ave	78	1.1	H	-2.03	39.10	54.00	-14.90
5143.19	53.14	PK	271	1.7	H	-1.02	52.12	74.00	-21.88
5143.19	39.13	Ave	271	1.7	H	-1.02	38.11	54.00	-15.89
10520.00	41.43	PK	114	1.4	H	5.33	46.76	74.00	-27.24
10520.00	33.51	Ave	114	1.4	H	5.33	38.84	54.00	-15.16

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a U-NII-2A middle channel 5280MHz									
4513.84	54.95	PK	179	1.9	H	-1.94	53.01	74.00	-20.99
4513.84	40.08	Ave	179	1.9	H	-1.94	38.14	54.00	-15.86
5127.96	53.07	PK	243	1.3	H	-1.06	52.01	74.00	-21.99
5127.96	39.13	Ave	243	1.3	H	-1.06	38.07	54.00	-15.93
10560.00	41.17	PK	173	1.2	H	5.21	46.38	74.00	-27.62
10560.00	32.03	Ave	173	1.2	H	5.21	37.24	54.00	-16.76
802.11a U-NII-2A High channel 5320MHz									
4530.69	53.50	PK	291	1.4	H	-2.24	51.26	74.00	-22.74
4530.69	39.17	Ave	291	1.4	H	-2.24	36.93	54.00	-17.07
5137.22	53.46	PK	29	1.1	H	-1.09	52.37	74.00	-21.63
5137.22	38.85	Ave	29	1.1	H	-1.09	37.76	54.00	-16.24
10640.00	39.98	PK	121	1.9	H	5.14	45.12	74.00	-28.88
10640.00	32.06	Ave	121	1.9	H	5.14	37.20	54.00	-16.80

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a U-NII-2C Low Channel 5500MHz									
4524.16	52.99	PK	316	1.7	H	-2.03	50.96	74.00	-23.04
4524.16	40.05	Ave	316	1.7	H	-2.03	38.02	54.00	-15.98
5122.99	52.84	PK	138	1.6	H	-1.02	51.82	74.00	-22.18
5122.99	38.43	Ave	138	1.6	H	-1.02	37.41	54.00	-16.59
11000.00	41.17	PK	279	1.2	H	5.33	46.50	74.00	-27.50
11000.00	37.22	Ave	279	1.2	H	5.33	42.55	54.00	-11.45
802.11a U-NII-2C Middle channel 5600MHz									
4519.78	52.62	PK	260	1.1	H	-1.94	50.68	74.00	-23.32
4519.78	39.67	Ave	260	1.1	H	-1.94	37.73	54.00	-16.27
5148.94	52.15	PK	334	1.8	H	-1.06	51.09	74.00	-22.91
5148.94	38.60	Ave	334	1.8	H	-1.06	37.54	54.00	-16.46
11200.00	39.77	PK	205	2.0	H	5.21	44.98	74.00	-29.02
11200.00	36.29	Ave	205	2.0	H	5.21	41.50	54.00	-12.50

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a U-NII-2C High channel 5700MHz									
4533.37	52.55	PK	170	1.9	H	-2.24	50.31	74.00	-23.69
4533.37	39.22	Ave	170	1.9	H	-2.24	36.98	54.00	-17.02
5139.03	51.70	PK	201	1.7	H	-1.09	50.61	74.00	-23.39
5139.03	37.83	Ave	201	1.7	H	-1.09	36.74	54.00	-17.26
11400.00	40.19	PK	199	1.8	H	5.14	45.33	74.00	-28.67
11400.00	35.94	Ave	199	1.8	H	5.14	41.08	54.00	-12.92
802.11a U-NII-3 Low Channel 5745MHz									
4507.69	53.09	PK	296	1.8	H	-2.06	51.03	74.00	-22.97
4507.69	40.35	Ave	296	1.8	H	-2.06	38.29	54.00	-15.71
5354.40	41.05	PK	286	1.3	H	5.93	46.98	74.00	-27.02
5354.40	36.64	Ave	286	1.3	H	5.93	42.57	54.00	-11.43
11490.00	46.20	PK	24	1.4	H	-1.25	44.95	74.00	-29.05
11490.00	37.37	Ave	24	1.4	H	-1.25	36.12	54.00	-17.88

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a U-NII-3 middle channel 5785MHz									
4507.48	52.77	PK	177	1.4	H	-2.03	50.74	74.00	-23.26
4507.48	39.25	Ave	177	1.4	H	-2.03	37.22	54.00	-16.78
5355.21	40.34	PK	211	1.2	H	5.81	46.15	74.00	-27.85
5355.21	37.32	Ave	211	1.2	H	5.81	43.13	54.00	-10.87
11570.00	46.61	PK	175	1.8	H	-1.22	45.39	74.00	-28.61
11570.00	37.72	Ave	175	1.8	H	-1.22	36.50	54.00	-17.50
802.11a U-NII-3 High channel 5825MHz									
4526.89	51.47	PK	225	1.9	H	-1.84	49.63	74.00	-24.37
4526.89	38.02	Ave	225	1.9	H	-1.84	36.18	54.00	-17.82
5378.04	41.22	PK	65	1.7	H	5.84	47.06	74.00	-26.94
5378.04	36.84	Ave	65	1.7	H	5.84	42.68	54.00	-11.32
11650.00	46.10	PK	223	1.2	H	-1.30	44.80	74.00	-29.20
11650.00	38.39	Ave	223	1.2	H	-1.30	37.09	54.00	-16.91

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT20) U-NII-1 Low Channel 5180MHz									
4537.08	50.90	PK	357	1.2	H	-2.14	48.76	74.00	-25.24
4537.08	36.63	Ave	357	1.2	H	-2.14	34.49	54.00	-19.51
5143.16	45.85	PK	303	1.5	H	-1.06	44.79	74.00	-29.21
5143.16	39.31	Ave	303	1.5	H	-1.06	38.25	54.00	-15.75
10360.00	40.74	PK	194	1.6	H	5.33	46.07	74.00	-27.93
10360.00	37.30	Ave	194	1.6	H	5.33	42.63	54.00	-11.37
802.11n(HT20) U-NII-1 Middle channel 5200MHz									
4535.34	49.71	PK	81	1.7	H	-2.12	47.59	74.00	-26.41
4535.34	35.57	Ave	81	1.7	H	-2.12	33.45	54.00	-20.55
5134.38	46.07	PK	33	1.2	H	-1.06	45.01	74.00	-28.99
5134.38	41.08	Ave	33	1.2	H	-1.06	40.02	54.00	-13.98
10400.00	42.13	PK	237	1.6	H	5.21	47.34	74.00	-26.66
10400.00	38.66	Ave	237	1.6	H	5.21	43.87	54.00	-10.13

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT20) U-NII-1 High channel 5240MHz									
4516.67	50.42	PK	113	1.9	H	-1.96	48.46	74.00	-25.54
4516.67	34.65	Ave	113	1.9	H	-1.96	32.69	54.00	-21.31
5123.89	46.29	PK	147	1.4	H	-1.06	45.23	74.00	-28.77
5123.89	43.07	Ave	147	1.4	H	-1.06	42.01	54.00	-11.99
10480.00	40.55	PK	6	1.1	H	5.14	45.69	74.00	-28.31
10480.00	38.08	Ave	6	1.1	H	5.14	43.22	54.00	-10.78
802.11n(HT20) U-NII-2A Low Channel 5260MHz									
4510.65	38.32	PK	231	1.7	H	-2.03	36.29	74.00	-37.71
4510.65	45.34	Ave	231	1.7	H	-2.03	43.31	54.00	-10.69
5114.69	38.57	PK	152	1.5	H	-1.02	37.55	74.00	-36.45
5114.69	39.79	Ave	152	1.5	H	-1.02	38.77	54.00	-15.23
10520.00	38.78	PK	198	1.2	H	5.33	44.11	74.00	-29.89
10520.00	35.96	Ave	198	1.2	H	5.33	41.29	54.00	-12.71

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT20) U-NII-2A middle channel 5280MHz									
4503.15	37.96	PK	35	1.0	H	-1.94	36.02	74.00	-37.98
4503.15	45.47	Ave	35	1.0	H	-1.94	43.53	54.00	-10.47
5127.69	40.02	PK	334	1.7	H	-1.06	38.96	74.00	-35.04
5127.69	41.64	Ave	334	1.7	H	-1.06	40.58	54.00	-13.42
10560.00	37.85	PK	329	1.9	H	5.21	43.06	74.00	-30.94
10560.00	36.95	Ave	329	1.9	H	5.21	42.16	54.00	-11.84
802.11n(HT20) U-NII-2A High channel 5320MHz									
4538.35	39.04	PK	106	1.8	H	-2.24	36.80	74.00	-37.20
4538.35	44.32	Ave	106	1.8	H	-2.24	42.08	54.00	-11.92
5148.50	41.03	PK	235	1.9	H	-1.09	39.94	74.00	-34.06
5148.50	41.88	Ave	235	1.9	H	-1.09	40.79	54.00	-13.21
10640.00	38.38	PK	65	1.6	H	5.14	43.52	74.00	-30.48
10640.00	35.45	Ave	65	1.6	H	5.14	40.59	54.00	-13.41

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT20) U-NII-2C Low Channel 5500MHz									
4534.63	38.49	PK	178	1.6	H	-2.03	36.46	74.00	-37.54
4534.63	36.15	Ave	178	1.6	H	-2.03	34.12	54.00	-19.88
5127.96	46.30	PK	51	1.1	H	-1.02	45.28	74.00	-28.72
5127.96	38.58	Ave	51	1.1	H	-1.02	37.56	54.00	-16.44
11000.00	36.51	PK	217	1.8	H	5.33	41.84	74.00	-32.16
11000.00	31.18	Ave	217	1.8	H	5.33	36.51	54.00	-17.49
802.11n(HT20) U-NII-2C Middle channel 5600MHz									
4526.17	37.11	PK	180	1.1	H	-1.94	35.17	74.00	-38.83
4526.17	36.75	Ave	180	1.1	H	-1.94	34.81	54.00	-19.19
5124.33	45.45	PK	138	1.5	H	-1.06	44.39	74.00	-29.61
5124.33	39.12	Ave	138	1.5	H	-1.06	38.06	54.00	-15.94
11200.00	36.06	PK	123	1.3	H	5.21	41.27	74.00	-32.73
11200.00	31.18	Ave	123	1.3	H	5.21	36.39	54.00	-17.61

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT20) U-NII-2C High channel 5700MHz									
4513.60	36.93	PK	298	1.3	H	-2.24	34.69	74.00	-39.31
4513.60	35.94	Ave	298	1.3	H	-2.24	33.70	54.00	-20.30
5117.77	47.17	PK	122	2.0	H	-1.09	46.08	74.00	-27.92
5117.77	40.52	Ave	122	2.0	H	-1.09	39.43	54.00	-14.57
11400.00	37.38	PK	264	1.1	H	5.14	42.52	74.00	-31.48
11400.00	31.69	Ave	264	1.1	H	5.14	36.83	54.00	-17.17
802.11n(HT20) U-NII-3 Low Channel 5745MHz									
4502.42	35.09	PK	278	1.1	H	-2.06	33.03	74.00	-40.97
4502.42	46.48	Ave	278	1.1	H	-2.06	44.42	54.00	-9.58
5366.33	37.08	PK	268	1.1	H	5.93	43.01	74.00	-30.99
5366.33	38.81	Ave	268	1.1	H	5.93	44.74	54.00	-9.26
11490.00	46.88	PK	311	1.2	H	-1.25	45.63	74.00	-28.37
11490.00	39.30	Ave	311	1.2	H	-1.25	38.05	54.00	-15.95

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT20) U-NII-3 middle channel 5785MHz									
4516.26	34.58	PK	20	1.4	H	-2.03	32.55	74.00	-41.45
4516.26	46.62	Ave	20	1.4	H	-2.03	44.59	54.00	-9.41
5368.35	38.34	PK	290	1.2	H	5.81	44.15	74.00	-29.85
5368.35	37.38	Ave	290	1.2	H	5.81	43.19	54.00	-10.81
11570.00	46.79	PK	329	1.9	H	-1.22	45.57	74.00	-28.43
11570.00	39.17	Ave	329	1.9	H	-1.22	37.95	54.00	-16.05
802.11n(HT20) U-NII-3 High channel 5825MHz									
4535.13	34.91	PK	197	1.1	H	-1.84	33.07	74.00	-40.93
4535.13	46.33	Ave	197	1.1	H	-1.84	44.49	54.00	-9.51
5377.38	36.77	PK	330	1.3	H	5.84	42.61	74.00	-31.39
5377.38	40.09	Ave	330	1.3	H	5.84	45.93	54.00	-8.07
11650.00	46.78	PK	53	1.7	H	-1.30	45.48	74.00	-28.52
11650.00	38.64	Ave	53	1.7	H	-1.30	37.34	54.00	-16.66

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(VHT20) U-NII-1 Low Channel 5180MHz									
4515.54	45.51	PK	138	1.7	H	-1.86	43.65	74.00	-30.35
4515.54	39.03	Ave	138	1.7	H	-1.86	37.17	54.00	-16.83
5126.75	34.25	PK	214	1.0	H	-1.06	33.19	74.00	-40.81
5126.75	44.45	Ave	214	1.0	H	-1.06	43.39	54.00	-10.61
10360.00	45.54	PK	111	1.6	H	5.33	50.87	74.00	-23.13
10360.00	38.45	Ave	111	1.6	H	5.33	43.78	54.00	-10.22
802.11ac(VHT20) U-NII-1 Middle channel 5200MHz									
4530.25	45.76	PK	219	1.0	H	-1.82	43.94	74.00	-30.06
4530.25	38.67	Ave	219	1.0	H	-1.82	36.85	54.00	-17.15
5115.99	33.84	PK	28	1.8	H	-1.06	32.78	74.00	-41.22
5115.99	45.83	Ave	28	1.8	H	-1.06	44.77	54.00	-9.23
10400.00	41.95	PK	62	1.2	H	5.21	47.16	74.00	-26.84
10400.00	37.17	Ave	62	1.2	H	5.21	42.38	54.00	-11.62

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(VHT20) U-NII-1 High channel 5240MHz									
4506.54	45.47	PK	155	1.1	H	-1.81	43.66	74.00	-30.34
4506.54	37.94	Ave	155	1.1	H	-1.81	36.13	54.00	-17.87
5117.32	33.18	PK	294	1.1	H	-1.06	32.12	74.00	-41.88
5117.32	46.34	Ave	294	1.1	H	-1.06	45.28	54.00	-8.72
10480.00	42.28	PK	205	1.9	H	5.14	47.42	74.00	-26.58
10480.00	37.75	Ave	205	1.9	H	5.14	42.89	54.00	-11.11
802.11ac(VHT20) U-NII-2A Low Channel 5260MHz									
4519.23	43.70	PK	5	1.5	H	-2.03	41.67	74.00	-32.33
4519.23	38.86	Ave	5	1.5	H	-2.03	36.83	54.00	-17.17
5115.87	46.04	PK	217	1.2	H	-1.02	45.02	74.00	-28.98
5115.87	37.56	Ave	217	1.2	H	-1.02	36.54	54.00	-17.46
10520.00	34.70	PK	164	1.7	H	5.33	40.03	74.00	-33.97
10520.00	44.08	Ave	164	1.7	H	5.33	49.41	54.00	-4.59

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(VHT20) U-NII-2A middle channel 5280MHz									
4514.43	42.60	PK	144	1.6	H	-1.94	40.66	74.00	-33.34
4514.43	37.63	Ave	144	1.6	H	-1.94	35.69	54.00	-18.31
5123.53	47.55	PK	325	1.7	H	-1.06	46.49	74.00	-27.51
5123.53	37.27	Ave	325	1.7	H	-1.06	36.21	54.00	-17.79
10560.00	35.14	PK	273	1.0	H	5.21	40.35	74.00	-33.65
10560.00	43.60	Ave	273	1.0	H	5.21	48.81	54.00	-5.19
802.11ac(VHT20) U-NII-2A High channel 5320MHz									
4511.99	43.29	PK	322	1.3	H	-2.24	41.05	74.00	-32.95
4511.99	38.47	Ave	322	1.3	H	-2.24	36.23	54.00	-17.77
5132.28	46.57	PK	276	1.1	H	-1.09	45.48	74.00	-28.52
5132.28	37.37	Ave	276	1.1	H	-1.09	36.28	54.00	-17.72
10640.00	35.61	PK	68	1.8	H	5.14	40.75	74.00	-33.25
10640.00	44.72	Ave	68	1.8	H	5.14	49.86	54.00	-4.14

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(VHT20) U-NII-2C Low Channel 5500MHz									
4519.37	33.25	PK	353	1.2	H	-2.03	31.22	74.00	-42.78
4519.37	42.43	Ave	353	1.2	H	-2.03	40.40	54.00	-13.60
5139.73	44.92	PK	143	2.0	H	-1.02	43.90	74.00	-30.10
5139.73	37.04	Ave	143	2.0	H	-1.02	36.02	54.00	-17.98
11000.00	34.66	PK	199	1.7	H	5.33	39.99	74.00	-34.01
11000.00	36.75	Ave	199	1.7	H	5.33	42.08	54.00	-11.92
802.11ac(VHT20) U-NII-2C Middle channel 5600MHz									
4508.60	31.88	PK	321	1.7	H	-1.94	29.94	74.00	-44.06
4508.60	41.99	Ave	321	1.7	H	-1.94	40.05	54.00	-13.95
5122.09	46.59	PK	103	1.4	H	-1.06	45.53	74.00	-28.47
5122.09	36.82	Ave	103	1.4	H	-1.06	35.76	54.00	-18.24
11200.00	34.79	PK	105	1.7	H	5.21	40.00	74.00	-34.00
11200.00	36.16	Ave	105	1.7	H	5.21	41.37	54.00	-12.63

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(VHT20) U-NII-2C High channel 5700MHz									
4500.25	32.81	PK	333	1.7	H	-2.24	30.57	74.00	-43.43
4500.25	42.65	Ave	333	1.7	H	-2.24	40.41	54.00	-13.59
5119.42	47.70	PK	293	1.7	H	-1.09	46.61	74.00	-27.39
5119.42	37.24	Ave	293	1.7	H	-1.09	36.15	54.00	-17.85
11400.00	35.24	PK	321	1.4	H	5.14	40.38	74.00	-33.62
11400.00	37.20	Ave	321	1.4	H	5.14	42.34	54.00	-11.66
802.11ac(VHT20) U-NII-3 Low Channel 5745MHz									
4503.59	45.57	PK	340	1.9	H	-1.92	43.65	74.00	-30.35
4503.59	38.15	Ave	340	1.9	H	-1.92	36.23	54.00	-17.77
5379.57	40.61	PK	270	1.8	H	5.93	46.54	74.00	-27.46
5379.57	36.08	Ave	270	1.8	H	5.93	42.01	54.00	-11.99
11490.00	45.58	PK	336	1.3	H	-1.03	44.55	74.00	-29.45
11490.00	39.19	Ave	336	1.3	H	-1.03	38.16	54.00	-15.84

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(VHT20) U-NII-3 middle channel 5785MHz									
4530.07	44.83	PK	360	1.1	H	-1.97	42.86	74.00	-31.14
4530.07	37.51	Ave	360	1.1	H	-1.97	35.54	54.00	-18.46
5362.15	42.25	PK	83	1.5	H	5.81	48.06	74.00	-25.94
5362.15	37.07	Ave	83	1.5	H	5.81	42.88	54.00	-11.12
11570.00	46.58	PK	230	1.5	H	-1.05	45.53	74.00	-28.47
11570.00	37.70	Ave	230	1.5	H	-1.05	36.65	54.00	-17.35
802.11ac(VHT20) U-NII-3 High channel 5825MHz									
4513.36	45.82	PK	129	1.2	H	-1.88	43.94	74.00	-30.06
4513.36	36.98	Ave	129	1.2	H	-1.88	35.10	54.00	-18.90
5384.01	41.79	PK	219	1.5	H	5.84	47.63	74.00	-26.37
5384.01	37.80	Ave	219	1.5	H	5.84	43.64	54.00	-10.36
11650.00	46.02	PK	19	1.5	H	-1.06	44.96	74.00	-29.04
11650.00	37.59	Ave	19	1.5	H	-1.06	36.53	54.00	-17.47

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT40) U-NII-1 Low Channel 5190MHz									
4503.38	43.37	PK	322	1.7	H	-1.89	41.48	74.00	-32.52
4503.38	34.24	Ave	322	1.7	H	-1.89	32.35	54.00	-21.65
5124.83	47.52	PK	71	1.6	H	-1.06	46.46	74.00	-27.54
5124.83	41.77	Ave	71	1.6	H	-1.06	40.71	54.00	-13.29
10380.00	41.08	PK	134	1.4	H	5.26	46.34	74.00	-27.66
10380.00	34.62	Ave	134	1.4	H	5.26	39.88	54.00	-14.12
802.11n(HT40) U-NII-1 High channel 5230MHz									
4523.11	43.14	PK	331	1.3	H	-1.94	41.20	74.00	-32.80
4523.11	34.45	Ave	331	1.3	H	-1.94	32.51	54.00	-21.49
5114.50	47.02	PK	344	1.2	H	-1.06	45.96	74.00	-28.04
5114.50	41.25	Ave	344	1.2	H	-1.06	40.19	54.00	-13.81
10460.00	43.12	PK	224	1.6	H	5.28	48.40	74.00	-25.60
10460.00	37.68	Ave	224	1.6	H	5.28	42.96	54.00	-11.04

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT40) U-NII-2A Low Channel 5270MHz									
4527.58	42.65	PK	320	1.8	H	-1.89	40.76	74.00	-33.24
4527.58	38.64	Ave	320	1.8	H	-1.89	36.75	54.00	-17.25
5127.12	48.28	PK	20	1.7	H	-1.06	47.22	74.00	-26.78
5127.12	40.45	Ave	20	1.7	H	-1.06	39.39	54.00	-14.61
10540.00	46.27	PK	93	1.2	H	5.26	51.53	74.00	-22.47
10540.00	36.80	Ave	93	1.2	H	5.26	42.06	54.00	-11.94
802.11n(HT40) U-NII-2A High channel 5310MHz									
4529.38	43.42	PK	242	1.4	H	-1.94	41.48	74.00	-32.52
4529.38	38.39	Ave	242	1.4	H	-1.94	36.45	54.00	-17.55
5132.14	49.02	PK	22	1.8	H	-1.06	47.96	74.00	-26.04
5132.14	42.11	Ave	22	1.8	H	-1.06	41.05	54.00	-12.95
10620.00	43.16	PK	237	1.7	H	5.28	48.44	74.00	-25.56
10620.00	38.50	Ave	237	1.7	H	5.28	43.78	54.00	-10.22

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT40) U-NII-2C Low Channel 5510MHz									
4510.52	43.72	PK	267	1.9	H	-1.89	41.83	74.00	-32.17
4510.52	37.81	Ave	267	1.9	H	-1.89	35.92	54.00	-18.08
5126.79	45.62	PK	2	1.9	H	-1.06	44.56	74.00	-29.44
5126.79	38.96	Ave	2	1.9	H	-1.06	37.90	54.00	-16.10
11020.00	42.13	PK	52	1.6	H	5.26	47.39	74.00	-26.61
11020.00	36.45	Ave	52	1.6	H	5.26	41.71	54.00	-12.29
802.11n(HT40) U-NII-2C Middle channel 5550MHz									
4502.75	43.01	PK	275	2.0	H	-1.94	41.07	74.00	-32.93
4502.75	38.27	Ave	275	2.0	H	-1.94	36.33	54.00	-17.67
5112.49	47.33	PK	62	1.1	H	-1.06	46.27	74.00	-27.73
5112.49	40.72	Ave	62	1.1	H	-1.06	39.66	54.00	-14.34
11100.00	45.54	PK	85	1.5	H	5.28	50.82	74.00	-23.18
11100.00	36.32	Ave	85	1.5	H	5.28	41.60	54.00	-12.40
802.11n(HT40) U-NII-2C High channel 5670MHz									
4521.05	43.77	PK	255	1.7	H	-1.94	41.83	74.00	-32.17
4521.05	37.76	Ave	255	1.7	H	-1.94	35.82	54.00	-18.18
5135.59	47.63	PK	142	1.1	H	-1.06	46.57	74.00	-27.43
5135.59	39.90	Ave	142	1.1	H	-1.06	38.84	54.00	-15.16
11340.00	40.61	PK	22	1.8	H	5.28	45.89	74.00	-28.11
11340.00	32.82	Ave	22	1.8	H	5.28	38.10	54.00	-15.90

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT40) U-NII-3 Low Channel 5755MHz									
4528.95	40.27	PK	118	1.9	H	-1.96	38.31	74.00	-35.69
4528.95	33.08	Ave	118	1.9	H	-1.96	31.12	54.00	-22.88
5378.11	39.97	PK	169	1.3	H	5.88	45.85	74.00	-28.15
5378.11	35.83	Ave	169	1.3	H	5.88	41.71	54.00	-12.29
11510.00	45.22	PK	268	1.4	H	-1.01	44.21	74.00	-29.79
11510.00	39.34	Ave	268	1.4	H	-1.01	38.33	54.00	-15.67
802.11n(HT40) U-NII-3 High Channel 5795MHz									
4501.02	40.49	PK	232	1.9	H	-1.92	38.57	74.00	-35.43
4501.02	33.00	Ave	232	1.9	H	-1.92	31.08	54.00	-22.92
5359.24	42.23	PK	149	1.7	H	5.63	47.86	74.00	-26.14
5359.24	37.39	Ave	149	1.7	H	5.63	43.02	54.00	-10.98
11590.00	45.76	PK	132	1.1	H	-1.04	44.72	74.00	-29.28
11590.00	37.07	Ave	132	1.1	H	-1.04	36.03	54.00	-17.97

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(VHT40) U-NII-1 Low Channel 5190MHz									
4505.38	37.57	PK	238	1.5	H	-1.91	35.66	74.00	-38.34
4505.38	31.99	Ave	238	1.5	H	-1.91	30.08	54.00	-23.92
5146.84	45.51	PK	236	1.3	H	-1.06	44.45	74.00	-29.55
5146.84	39.61	Ave	236	1.3	H	-1.06	38.55	54.00	-15.45
10380.00	39.89	PK	169	1.0	H	5.26	45.15	74.00	-28.85
10380.00	35.84	Ave	169	1.0	H	5.26	41.10	54.00	-12.90
802.11ac(VHT40) U-NII-1 High channel 5230MHz									
4529.42	36.64	PK	295	1.9	H	-1.93	34.71	74.00	-39.29
4529.42	32.39	Ave	295	1.9	H	-1.93	30.46	54.00	-23.54
5134.96	45.84	PK	108	1.6	H	-1.06	44.78	74.00	-29.22
5134.96	39.19	Ave	108	1.6	H	-1.06	38.13	54.00	-15.87
10460.00	42.18	PK	290	1.2	H	5.28	47.46	74.00	-26.54
10460.00	36.89	Ave	290	1.2	H	5.28	42.17	54.00	-11.83

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(VHT40) U-NII-2A Low Channel 5270MHz									
4534.52	43.02	PK	298	1.5	H	-1.89	41.13	74.00	-32.87
4534.52	37.28	Ave	298	1.5	H	-1.89	35.39	54.00	-18.61
5134.79	47.12	PK	233	1.1	H	-1.06	46.06	74.00	-27.94
5134.79	38.46	Ave	233	1.1	H	-1.06	37.40	54.00	-16.60
10540.00	42.78	PK	74	2.0	H	5.26	48.04	74.00	-25.96
10540.00	33.61	Ave	74	2.0	H	5.26	38.87	54.00	-15.13
802.11ac(VHT40) U-NII-2A High channel 5310MHz									
4517.02	42.80	PK	295	1.9	H	-1.94	40.86	74.00	-33.14
4517.02	37.76	Ave	295	1.9	H	-1.94	35.82	54.00	-18.18
5140.53	48.45	PK	206	1.5	H	-1.06	47.39	74.00	-26.61
5140.53	38.06	Ave	206	1.5	H	-1.06	37.00	54.00	-17.00
10620.00	43.53	PK	100	1.3	H	5.28	48.81	74.00	-25.19
10620.00	37.65	Ave	100	1.3	H	5.28	42.93	54.00	-11.07

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(VHT40) U-NII-2C Low Channel 5510MHz									
4527.46	42.95	PK	286	1.3	H	-1.89	41.06	74.00	-32.94
4527.46	36.79	Ave	286	1.3	H	-1.89	34.90	54.00	-19.10
5112.12	45.95	PK	335	1.9	H	-1.06	44.89	74.00	-29.11
5112.12	40.49	Ave	335	1.9	H	-1.06	39.43	54.00	-14.57
11020.00	43.20	PK	339	1.1	H	5.26	48.46	74.00	-25.54
11020.00	37.48	Ave	339	1.1	H	5.26	42.74	54.00	-11.26
802.11ac(VHT40) U-NII-2C Middle channel 5550MHz									
4524.47	42.91	PK	123	1.4	H	-1.94	40.97	74.00	-33.03
4524.47	36.53	Ave	123	1.4	H	-1.94	34.59	54.00	-19.41
5130.59	46.75	PK	110	1.1	H	-1.06	45.69	74.00	-28.31
5130.59	41.92	Ave	110	1.1	H	-1.06	40.86	54.00	-13.14
11100.00	43.27	PK	192	1.4	H	5.28	48.55	74.00	-25.45
11100.00	37.35	Ave	192	1.4	H	5.28	42.63	54.00	-11.37
802.11ac(VHT40) U-NII-2C High channel 5670MHz									
4525.88	43.87	PK	197	2.0	H	-1.94	41.93	74.00	-32.07
4525.88	36.71	Ave	197	2.0	H	-1.94	34.77	54.00	-19.23
5144.18	47.49	PK	13	1.9	H	-1.06	46.43	74.00	-27.57
5144.18	41.99	Ave	13	1.9	H	-1.06	40.93	54.00	-13.07
11340.00	42.79	PK	49	1.6	H	5.28	48.07	74.00	-25.93
11340.00	35.31	Ave	49	1.6	H	5.28	40.59	54.00	-13.41

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(VHT40) U-NII-3 Low Channel 5755MHz									
4536.71	34.70	PK	176	1.9	H	-1.92	32.78	74.00	-41.22
4536.71	30.25	Ave	176	1.9	H	-1.92	28.33	54.00	-25.67
5360.86	40.75	PK	217	1.6	H	5.88	46.63	74.00	-27.37
5360.86	34.67	Ave	217	1.6	H	5.88	40.55	54.00	-13.45
11510.00	45.01	PK	272	1.2	H	-1.07	43.94	74.00	-30.06
11510.00	37.82	Ave	272	1.2	H	-1.07	36.75	54.00	-17.25
802.11ac(VHT40) U-NII-3 High Channel 5795MHz									
4503.12	34.67	PK	181	1.2	H	-1.86	32.81	74.00	-41.19
4503.12	30.95	Ave	181	1.2	H	-1.86	29.09	54.00	-24.91
5385.61	42.09	PK	292	1.1	H	5.63	47.72	74.00	-26.28
5385.61	37.93	Ave	292	1.1	H	5.63	43.56	54.00	-10.44
11590.00	45.31	PK	229	1.1	H	-1.03	44.28	74.00	-29.72
11590.00	37.40	Ave	229	1.1	H	-1.03	36.37	54.00	-17.63

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(VHT80) U-NII-1 Low Channel 5210MHz									
4529.64	31.46	PK	56	1.9	H	-1.88	29.58	74.00	-44.42
4529.64	42.16	Ave	56	1.9	H	-1.88	40.28	54.00	-13.72
5126.47	39.65	PK	332	1.2	H	-1.06	38.59	74.00	-35.41
5126.47	45.90	Ave	332	1.2	H	-1.06	44.84	54.00	-9.16
10420.00	42.30	PK	305	1.1	H	4.65	46.95	74.00	-27.05
10420.00	37.79	Ave	305	1.1	H	4.65	42.44	54.00	-11.56
802.11ac(VHT80) U-NII-2A Low Channel 5290MHz									
4530.77	41.97	PK	14	1.4	H	-1.88	40.09	74.00	-33.91
4530.77	39.76	Ave	14	1.4	H	-1.88	37.88	54.00	-16.12
5122.42	44.93	PK	8	1.8	H	-1.06	43.87	74.00	-30.13
5122.42	43.46	Ave	8	1.8	H	-1.06	42.40	54.00	-11.60
10580.00	36.62	PK	121	1.6	H	4.65	41.27	74.00	-32.73
10580.00	38.21	Ave	121	1.6	H	4.65	42.86	54.00	-11.14

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(VHT80) U-NII-2C Low Channel 5530MHz									
4532.45	39.02	PK	120	1.4	H	-1.88	37.14	74.00	-36.86
4532.45	44.92	Ave	120	1.4	H	-1.88	43.04	54.00	-10.96
5143.59	43.38	PK	116	1.1	H	-1.06	42.32	74.00	-31.68
5143.59	37.63	Ave	116	1.1	H	-1.06	36.57	54.00	-17.43
11060.00	45.43	PK	76	1.4	H	4.65	50.08	74.00	-23.92
11060.00	37.54	Ave	76	1.4	H	4.65	42.19	54.00	-11.81
802.11ac(VHT80) U-NII-3 Low channel 5775MHz									
4519.11	41.25	PK	155	2.0	H	-1.85	39.40	74.00	-34.60
4519.11	42.93	Ave	155	2.0	H	-1.85	41.08	54.00	-12.92
5361.43	42.06	PK	305	1.7	H	4.83	46.89	74.00	-27.11
5361.43	37.07	Ave	305	1.7	H	4.83	41.90	54.00	-12.10
11550.00	45.49	PK	69	1.5	H	-1.14	44.35	74.00	-29.65
11550.00	39.39	Ave	69	1.5	H	-1.14	38.25	54.00	-15.75

Test Frequency: 12GHz~40GHz

The measurements were more than 20 dB below the limit and not reported.

9 Band Edge

Test Requirement:	FCC 47CFR Part 15 Section 15.407
Test Method:	ANSI C63.10-2020+A1-2024
Test Limit:	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27dBm/MHz. For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
Test Result:	PASS


9.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


9.2 Test Result

Test result plots shown as follows:


802.11a U-NII-1 Band edge-left side

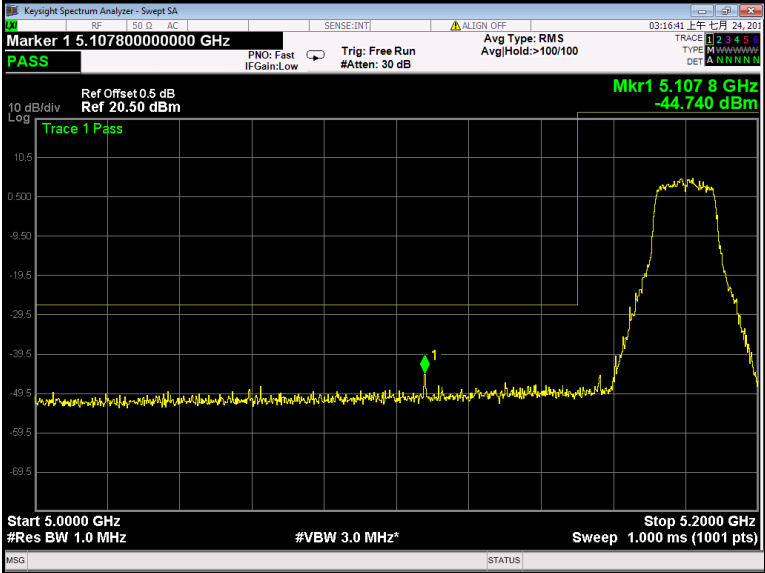


802.11a U-NII-1 Band edge-right side

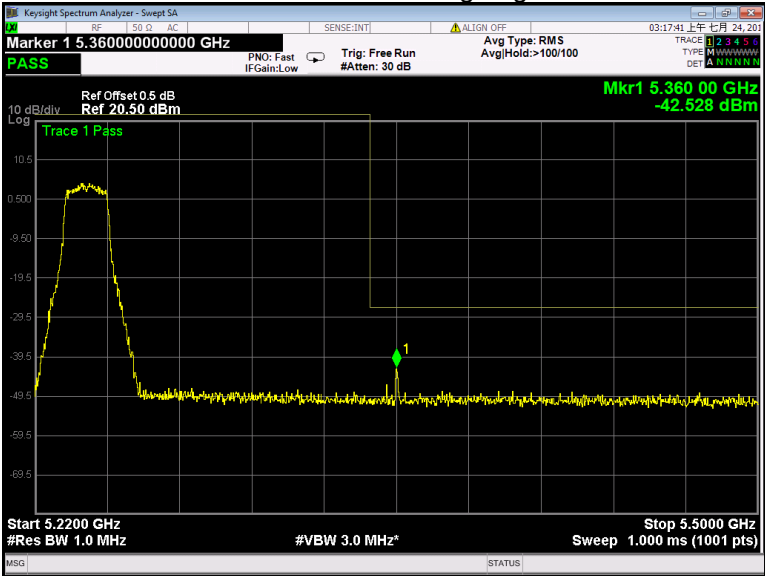


802.11a U-NII-2A Band edge-left side

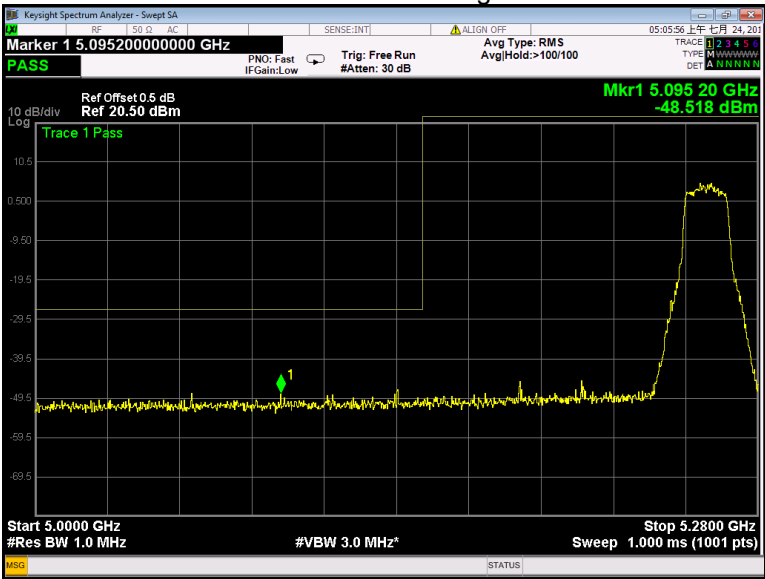


802.11a U-NII-2A Band edge-right side

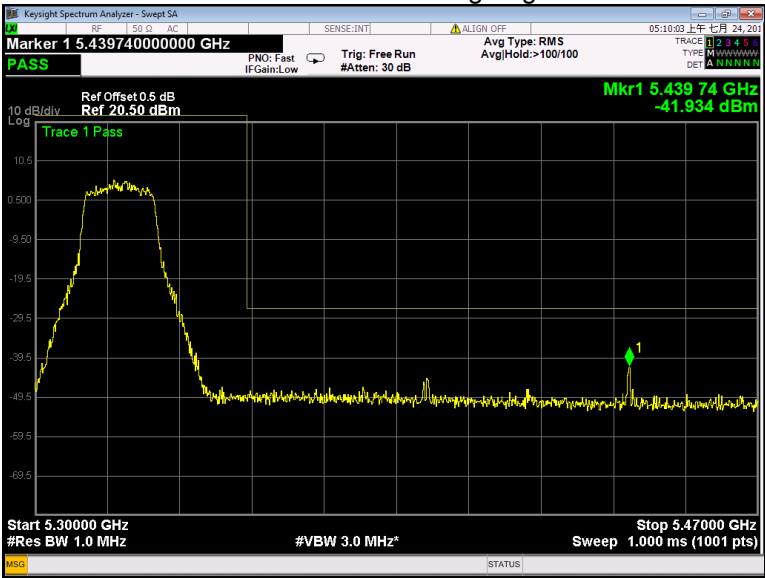


802.11a U-NII-2C Band edge-left side

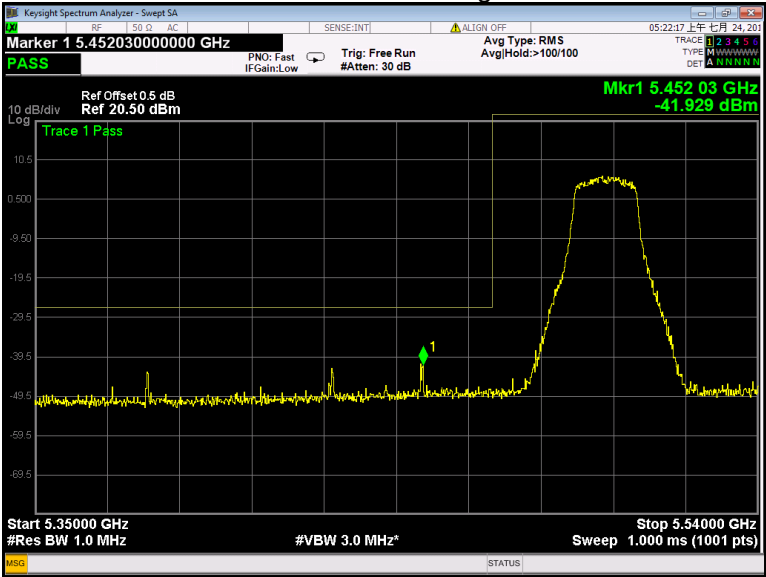


802.11a U-NII-2C Band edge-right side

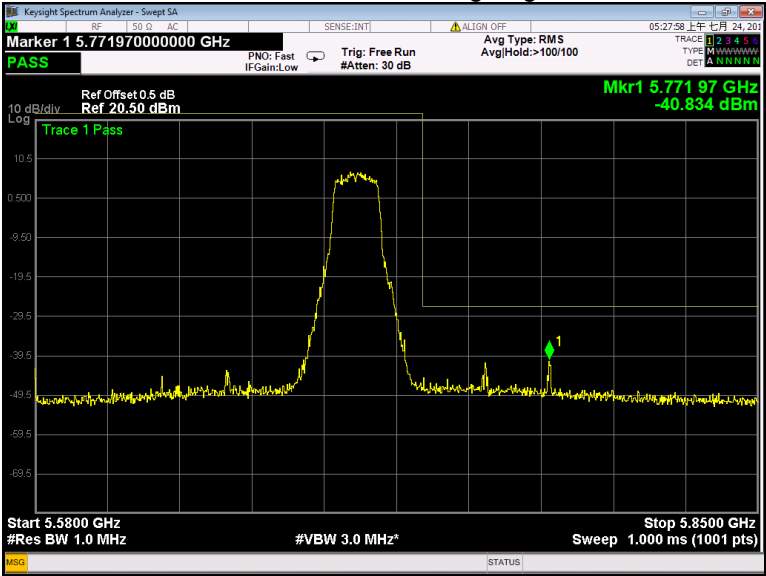


802.11a U-NII-3 Band edge-left side

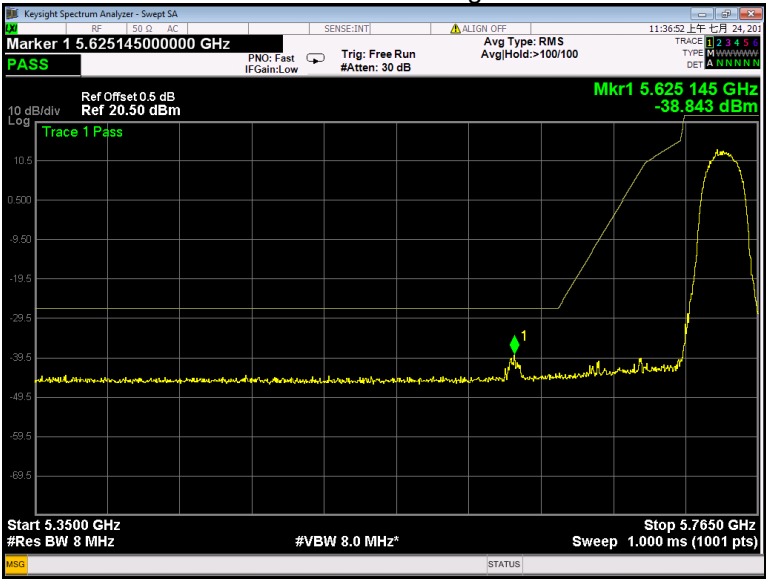


802.11a U-NII-3 Band edge-right side

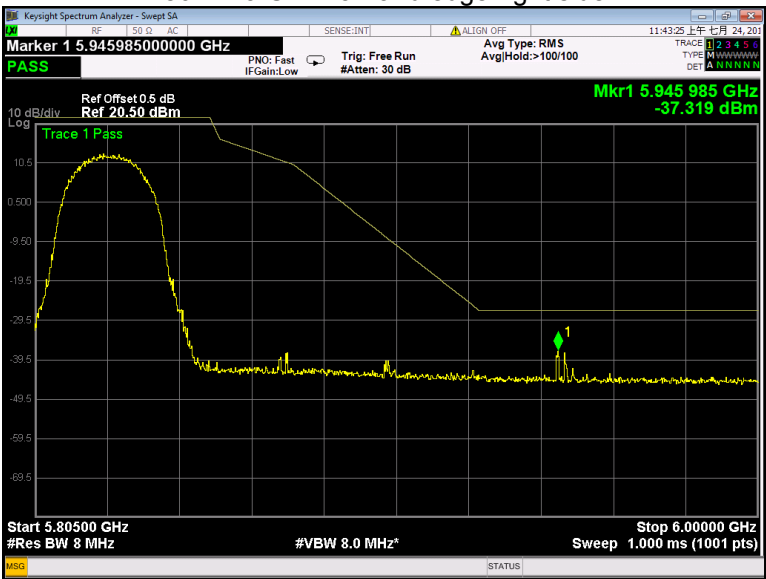


802.11n(HT20) U-NII-1 Band edge-left side

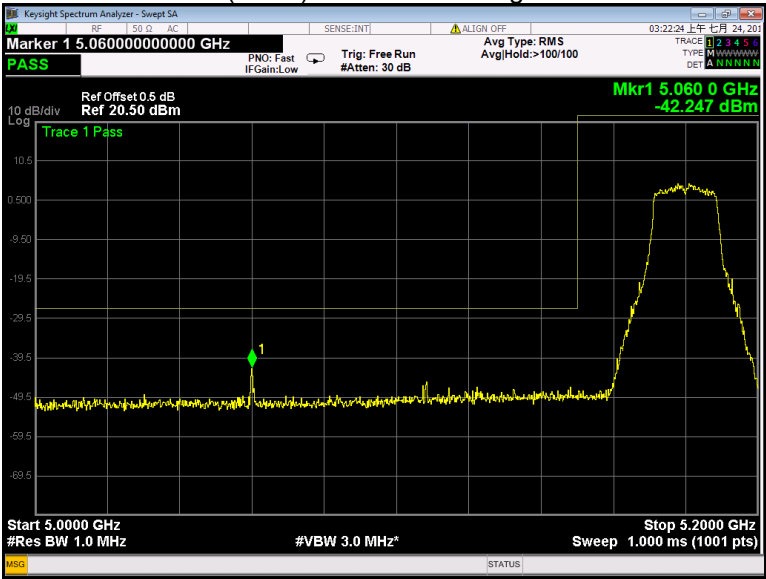


802.11n(HT20) U-NII-1 Band edge-right side

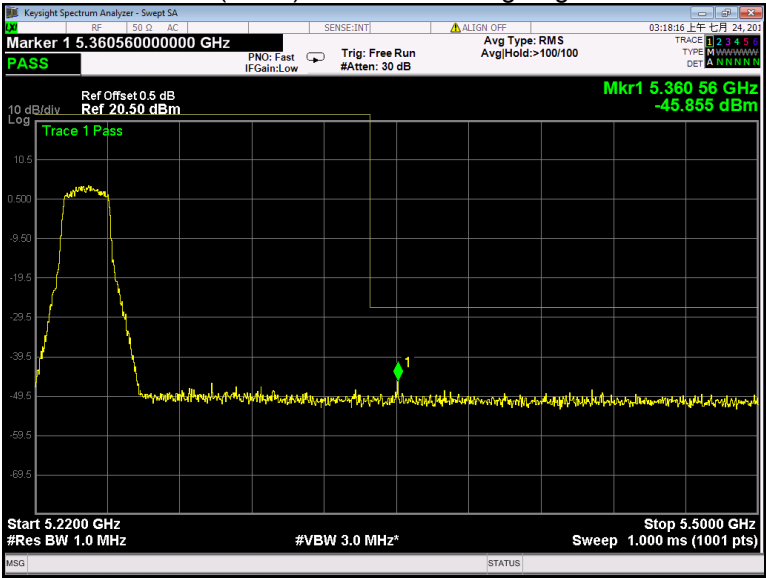


802.11n(HT20) U-NII-2A Band edge-left side

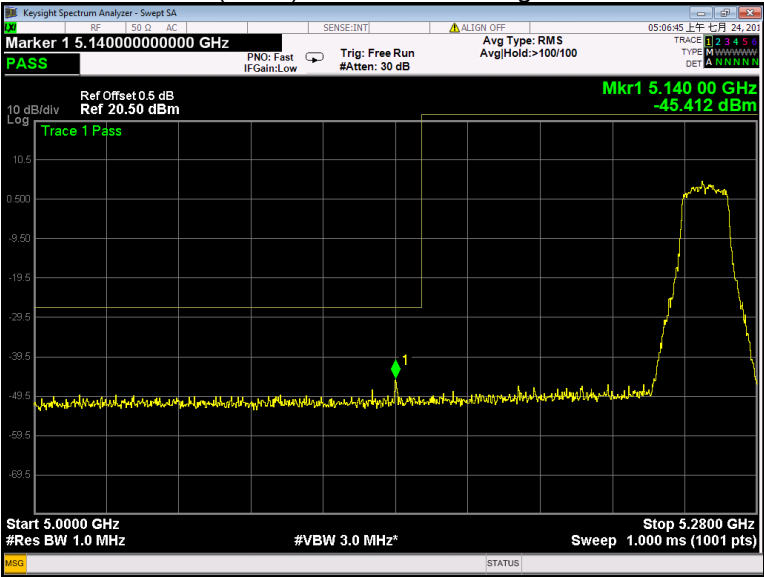


802.11n(HT20) U-NII-2A Band edge-right side

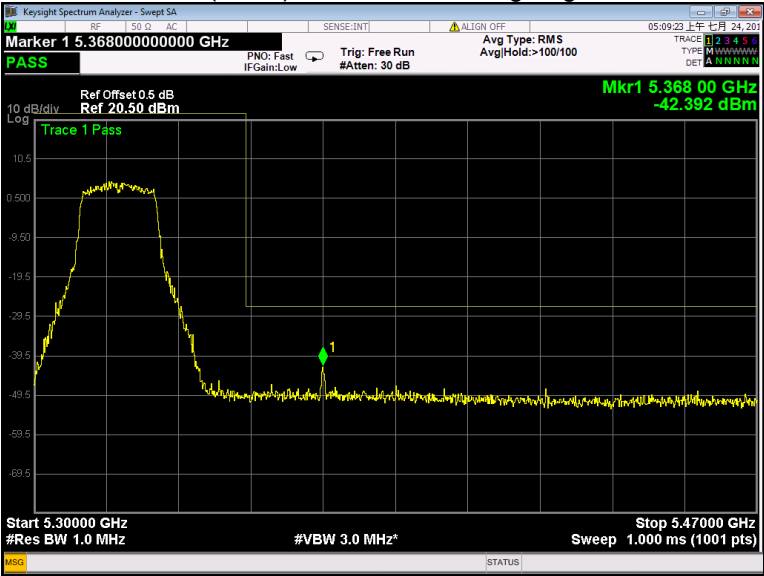


802.11n(HT20) U-NII-2C Band edge-left side

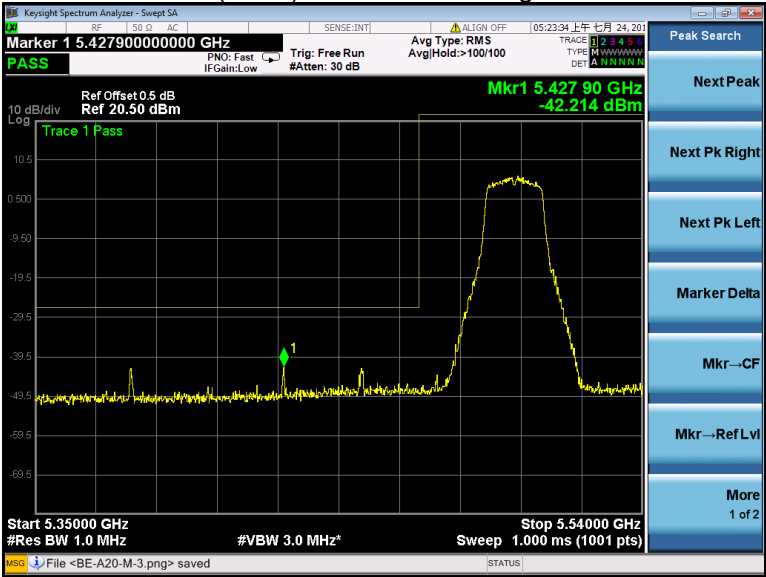


802.11n(HT20) U-NII-2C Band edge-right side

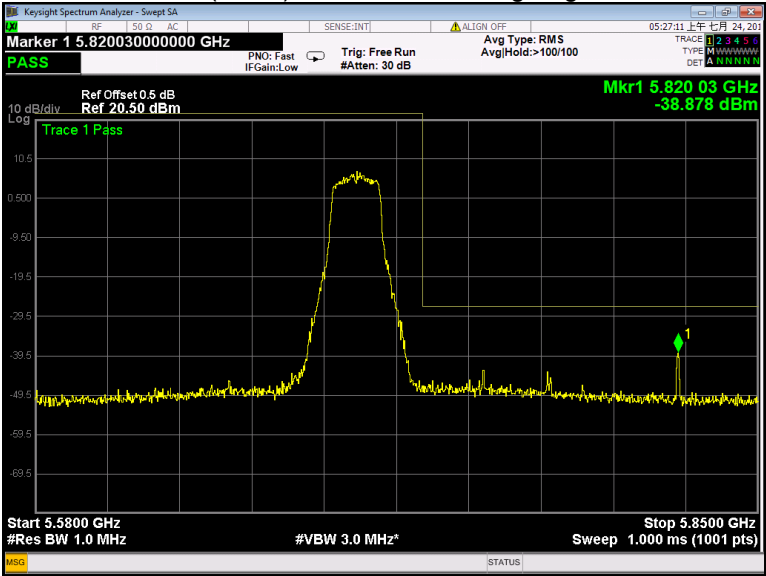


802.11n(HT20) U-NII-3 Band edge-left side

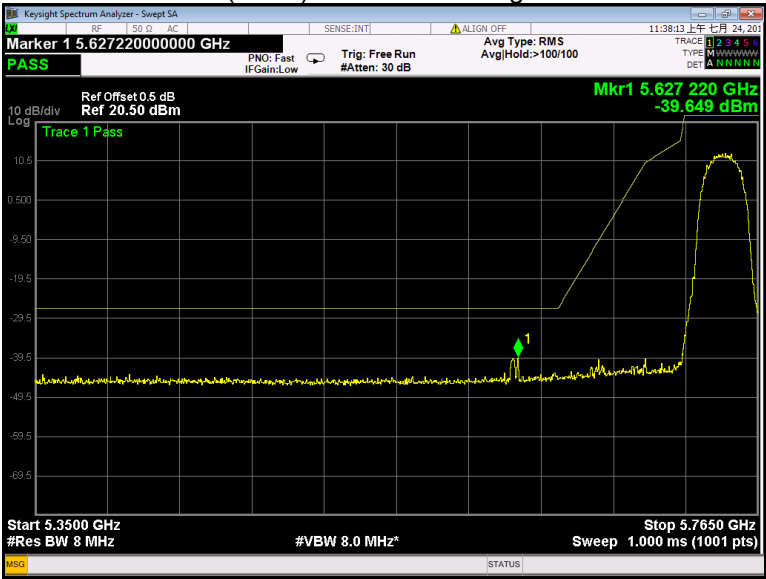


802.11n(HT20) U-NII-3 Band edge-right side

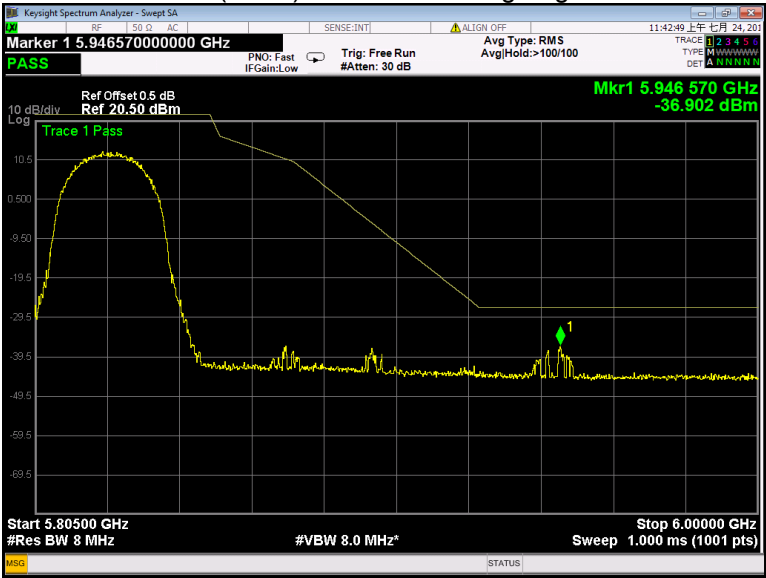


802.11n(HT40) U-NII-1 Band edge-left side

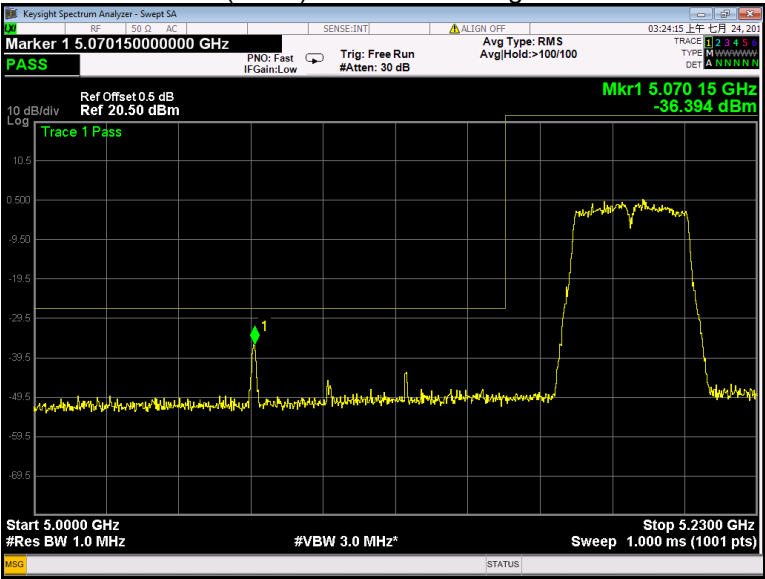


802.11n(HT40) U-NII-1 Band edge-right side

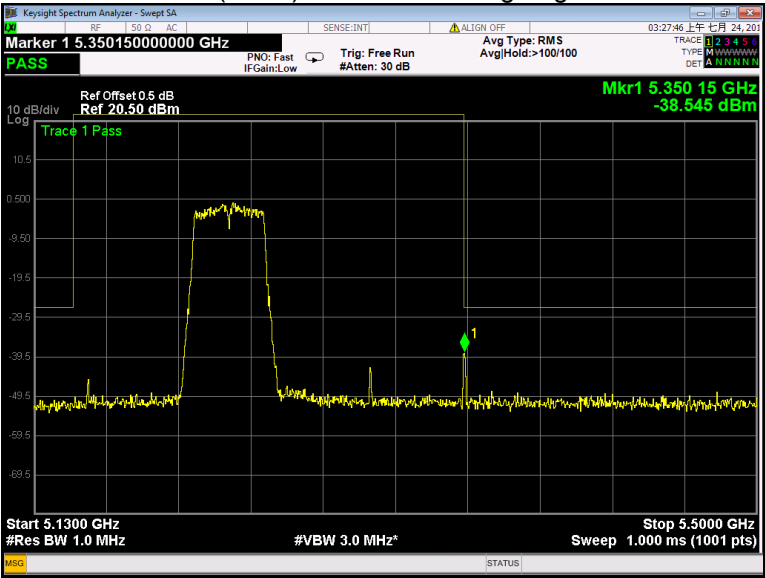


802.11n(HT40) U-NII-2A Band edge-left side

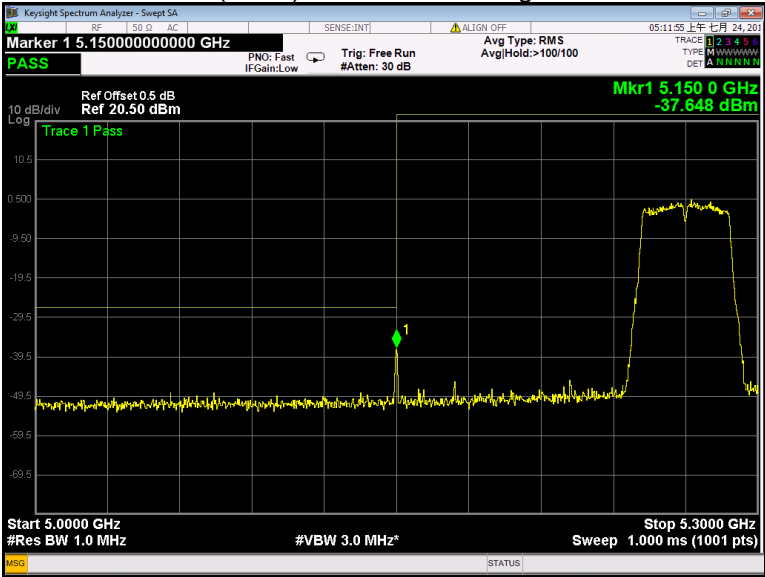


802.11n(HT40) U-NII-2A Band edge-right side

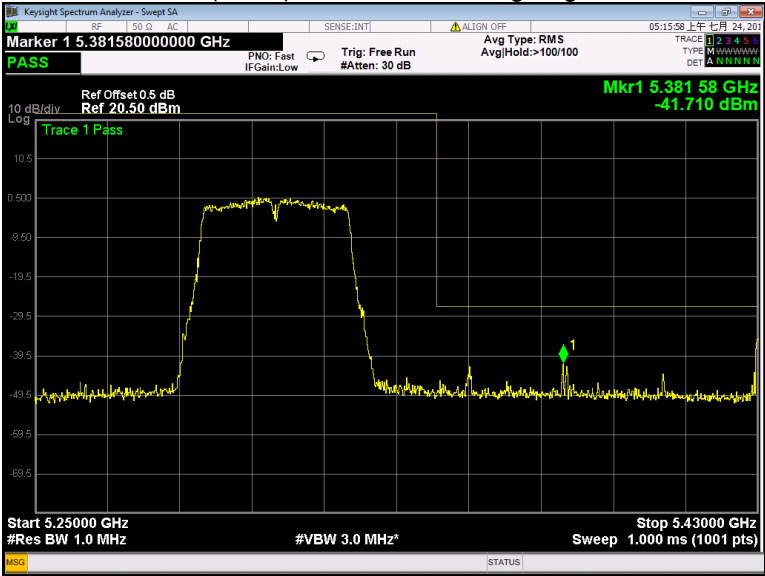


802.11n(HT40) U-NII-2C Band edge-left side

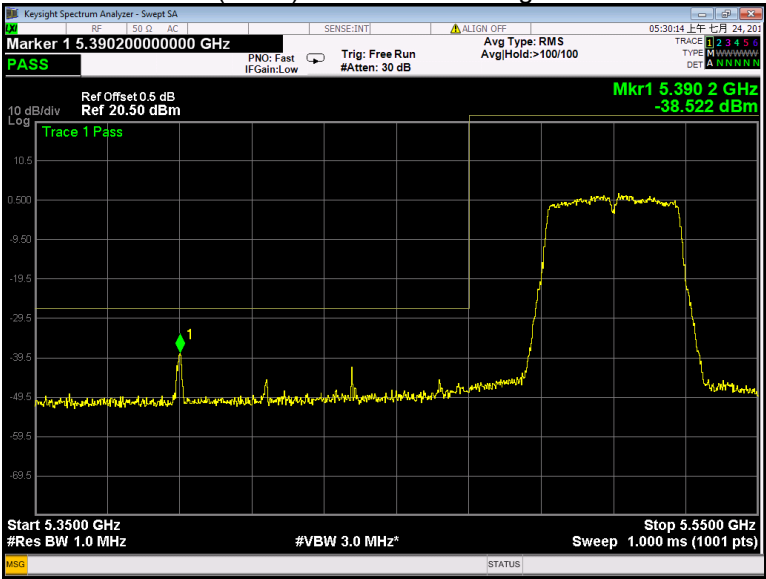


802.11n(HT40) U-NII-2C Band edge-right side

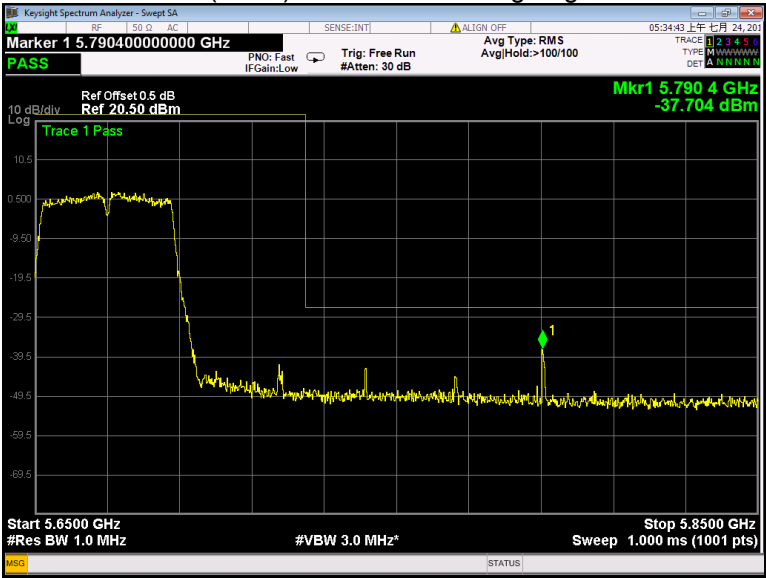


802.11n(HT40) U-NII-3 Band edge-left side

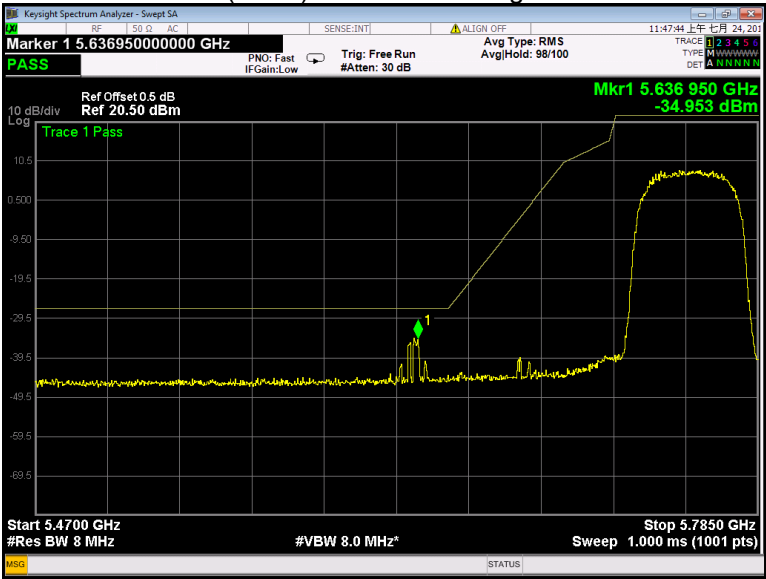


802.11n(HT40) U-NII-3 Band edge-right side

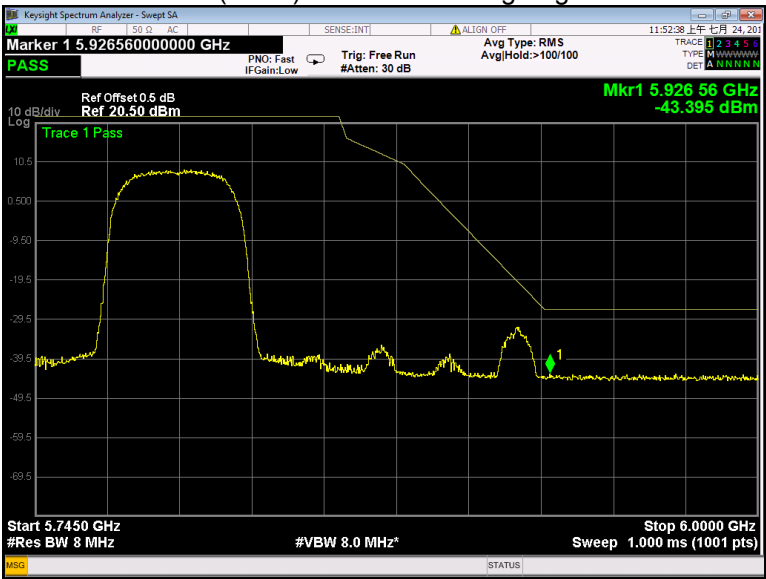


802.11ac(VHT20) U-NII-1 Band edge-left side

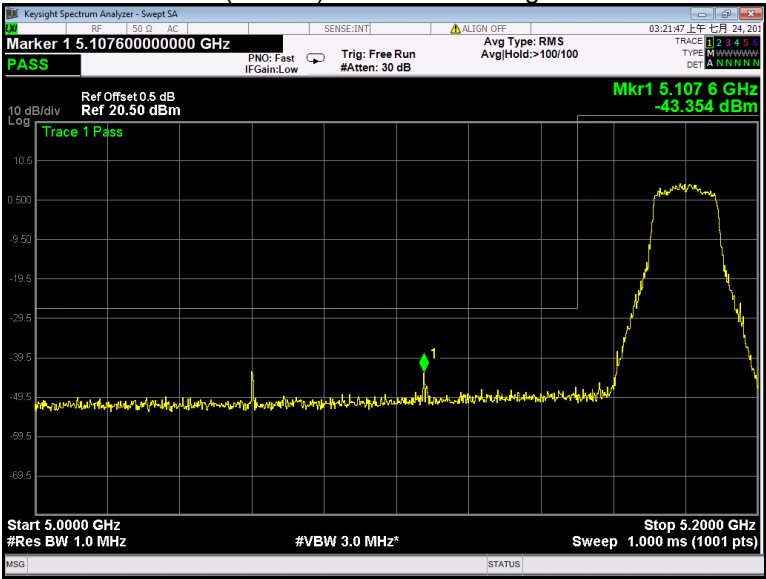


802.11ac(VHT20) U-NII-1 Band edge-right side

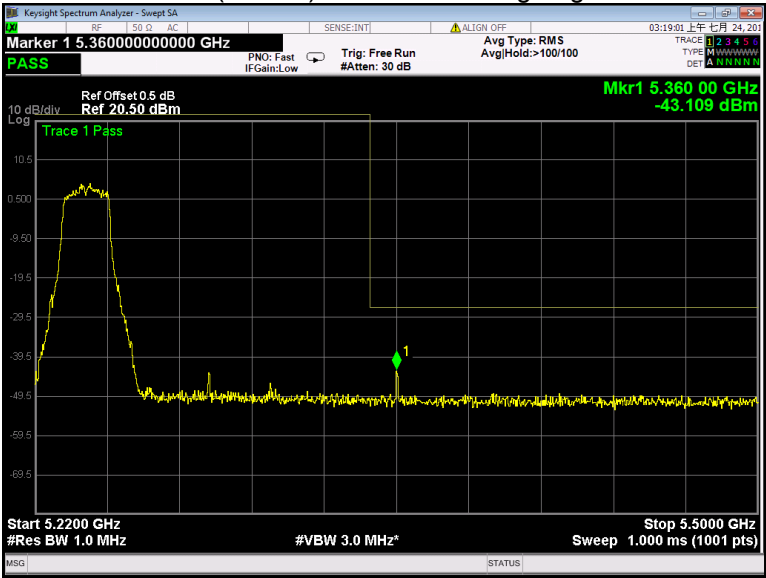


802.11ac(VHT20) U-NII-2A Band edge-left side

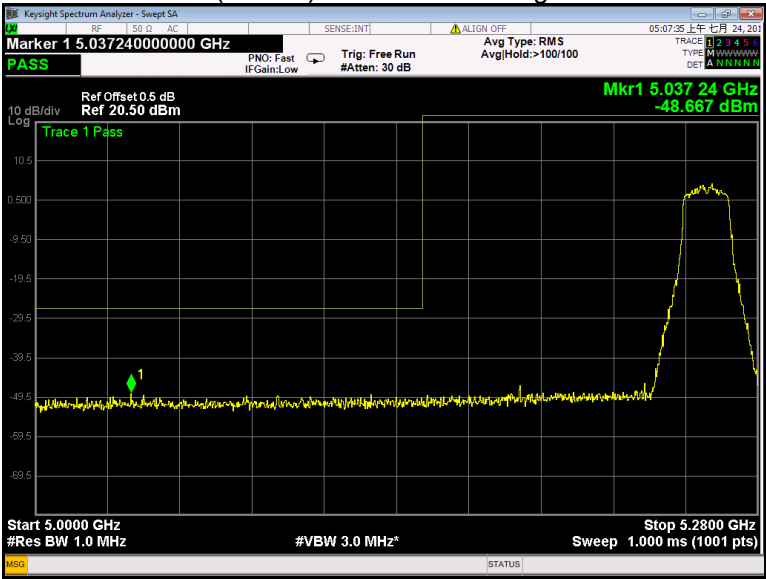


802.11ac(VHT20) U-NII-2A Band edge-right side

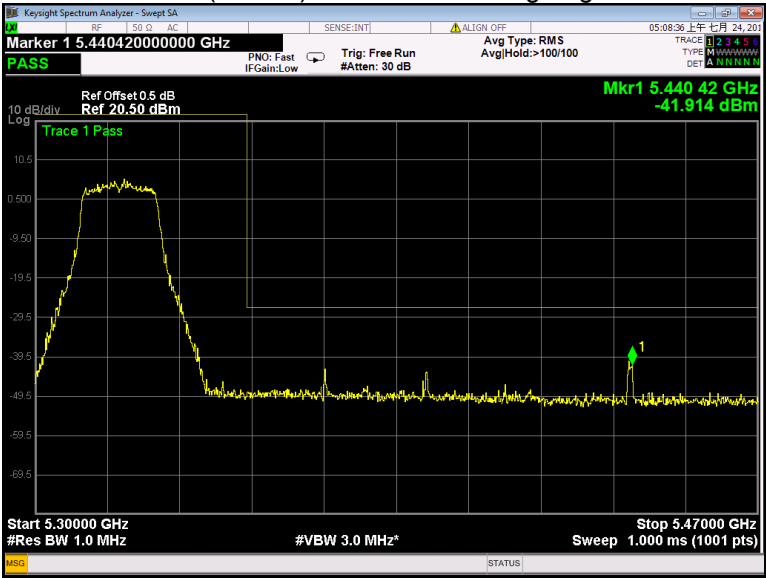


802.11ac(VHT20) U-NII-2C Band edge-left side

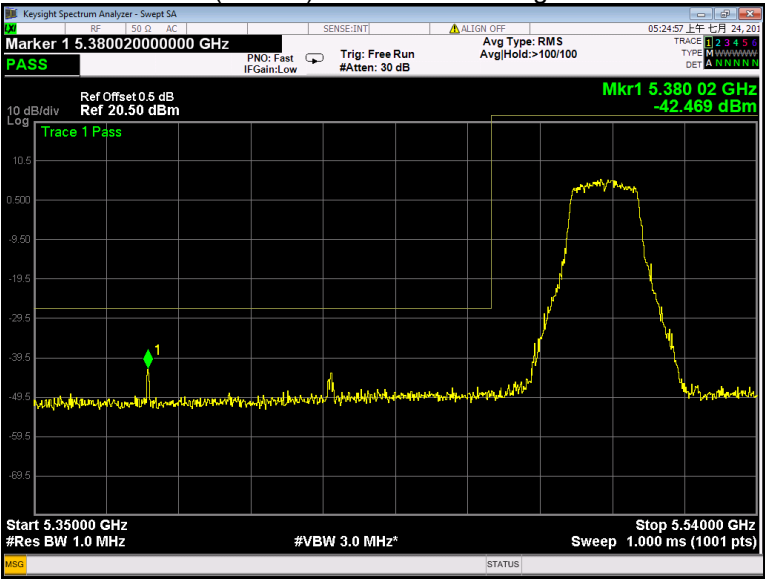


802.11ac(VHT20) U-NII-2C Band edge-right side

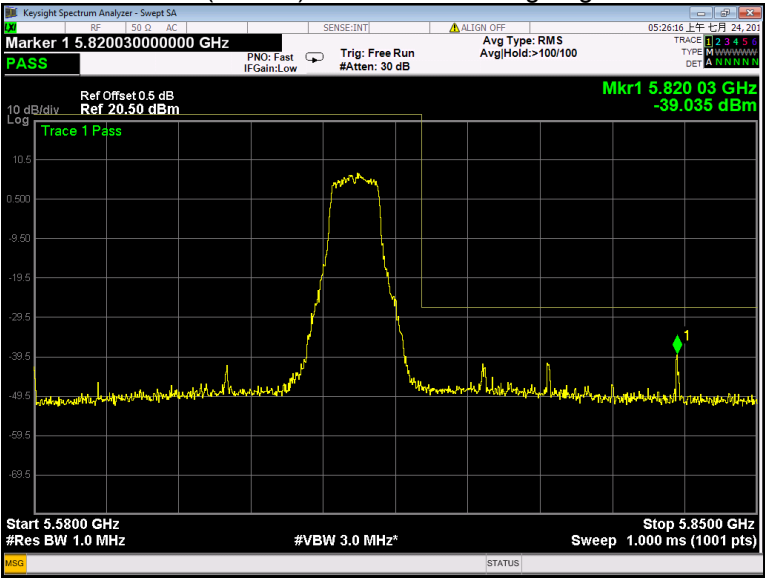


802.11ac(VHT20) U-NII-3 Band edge-left side

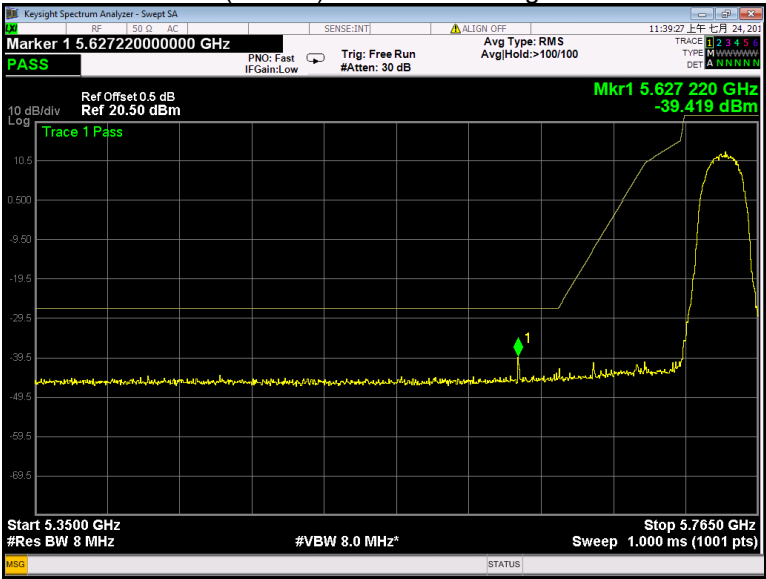


802.11ac(VHT20) U-NII-3 Band edge-right side

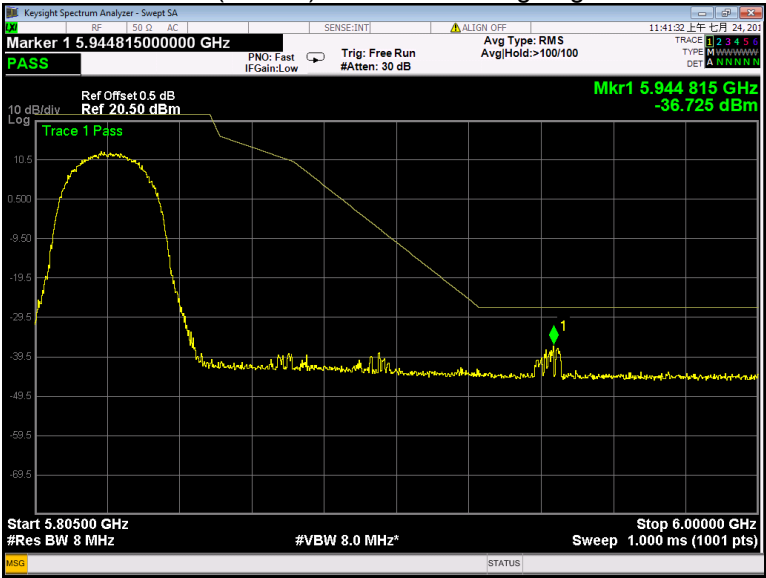


802.11ac(VHT40) U-NII-1 Band edge-left side

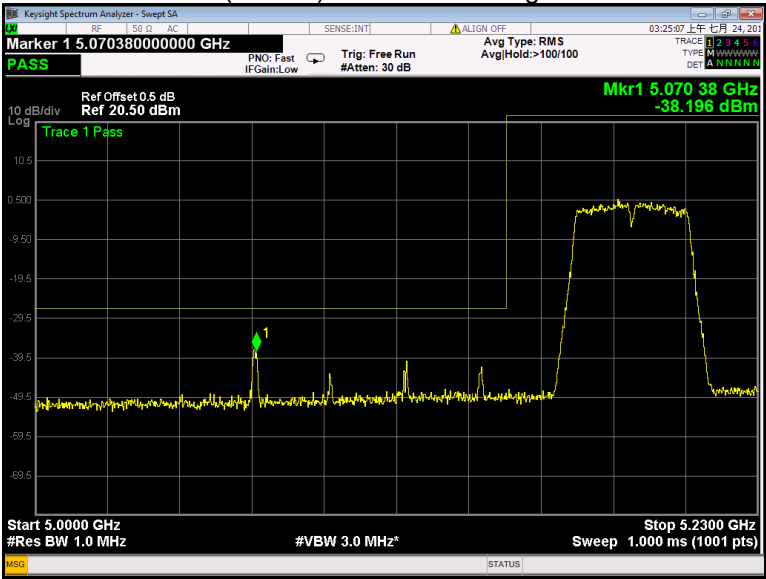


802.11ac(VHT40) U-NII-1 Band edge-right side

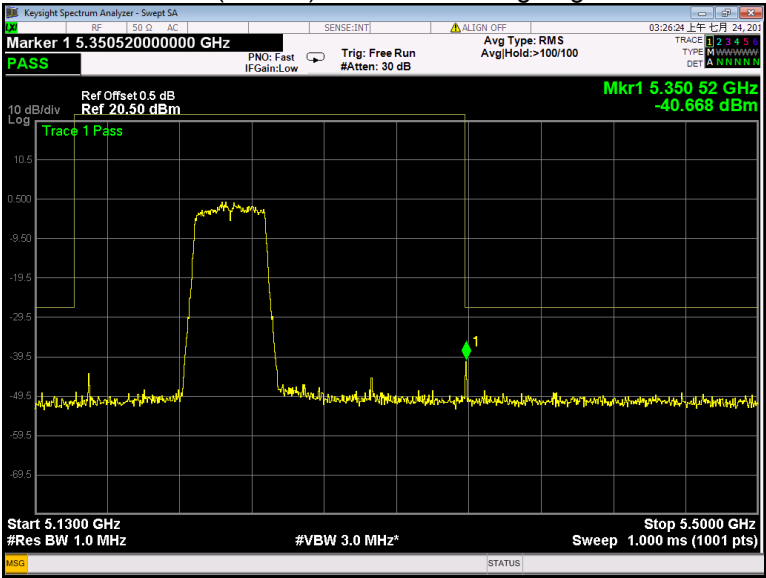


802.11ac(VHT40) U-NII-2A Band edge-left side

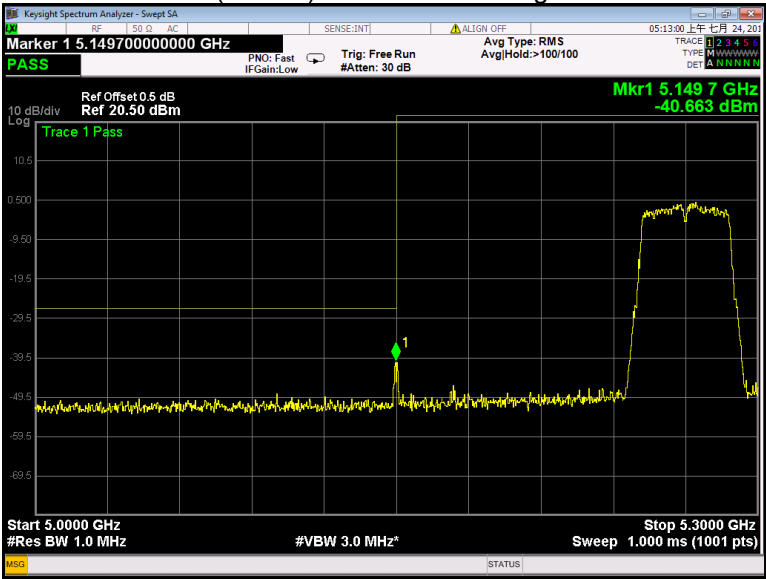


802.11ac(VHT40) U-NII-2A Band edge-right side

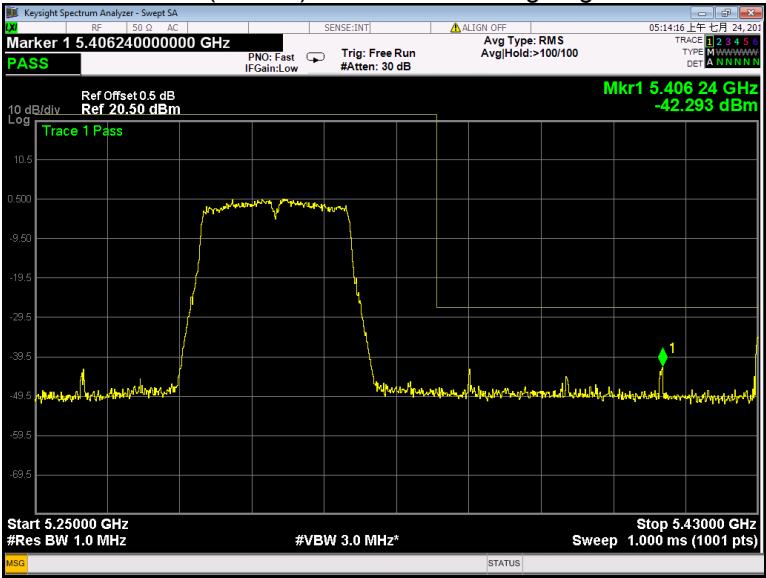


802.11ac(VHT40) U-NII-2C Band edge-left side

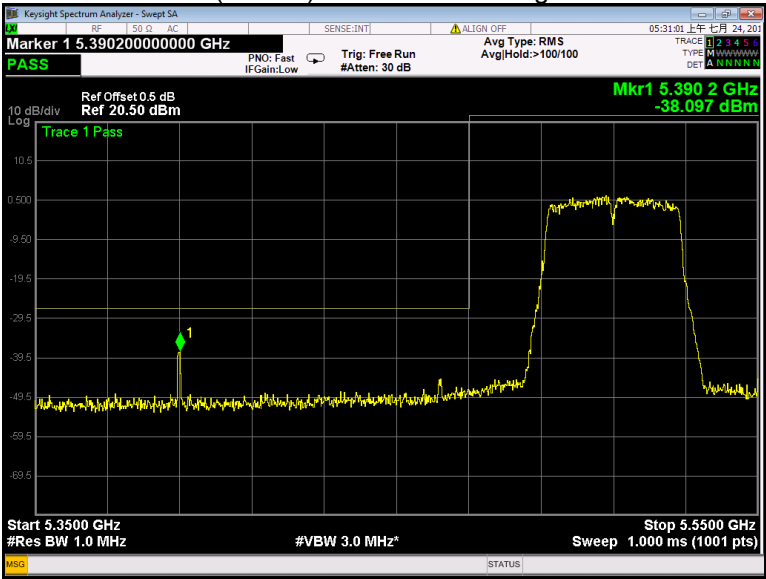


802.11ac(VHT40) U-NII-2C Band edge-right side

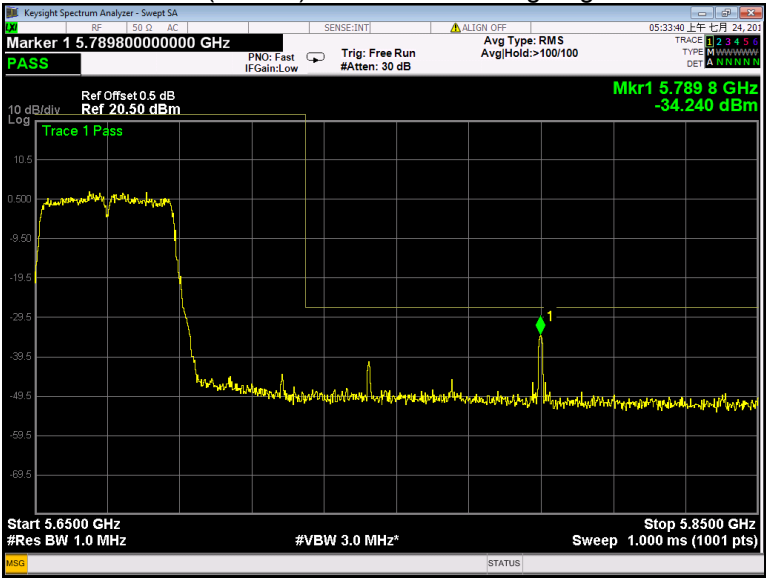


802.11ac(VHT40) U-NII-3 Band edge-left side

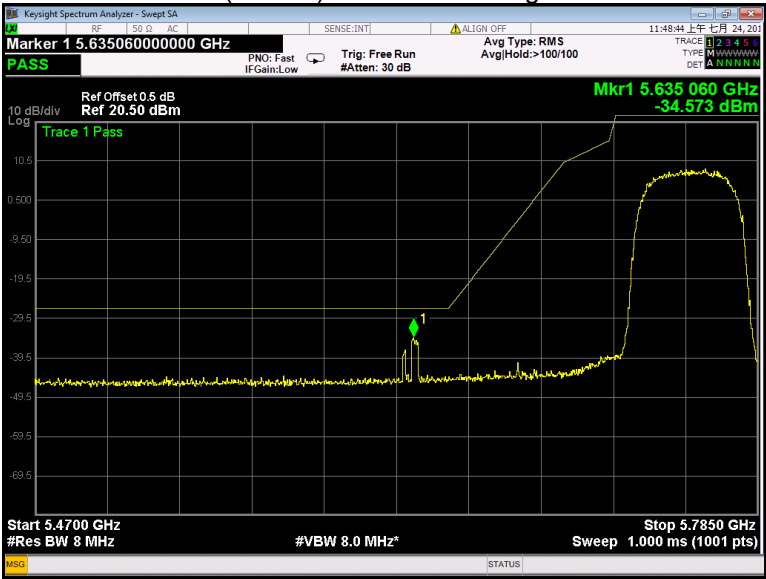


802.11ac(VHT40) U-NII-3 Band edge-right side

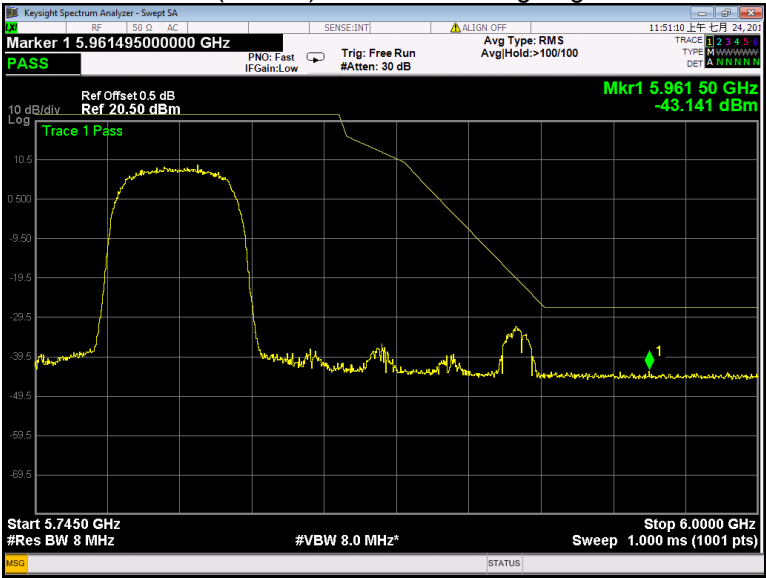


802.11ac(VHT80) U-NII-1 Band edge-left side

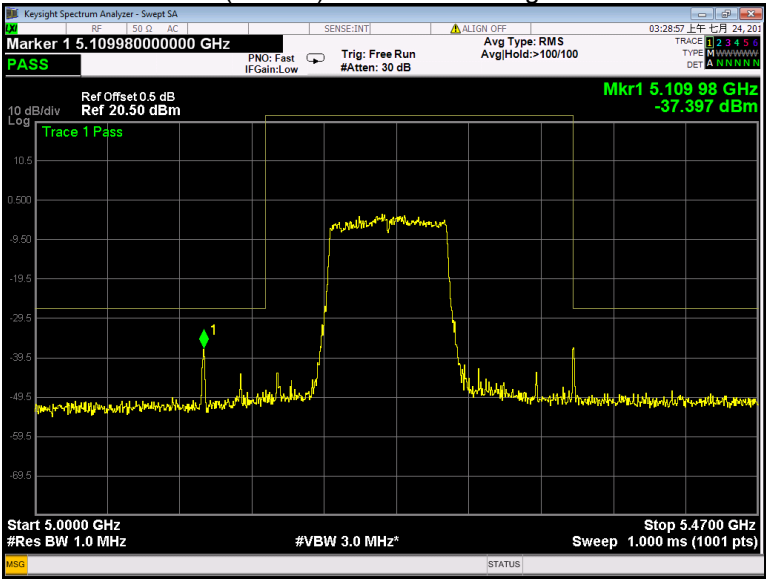


802.11ac(VHT80) U-NII-1 Band edge-right side

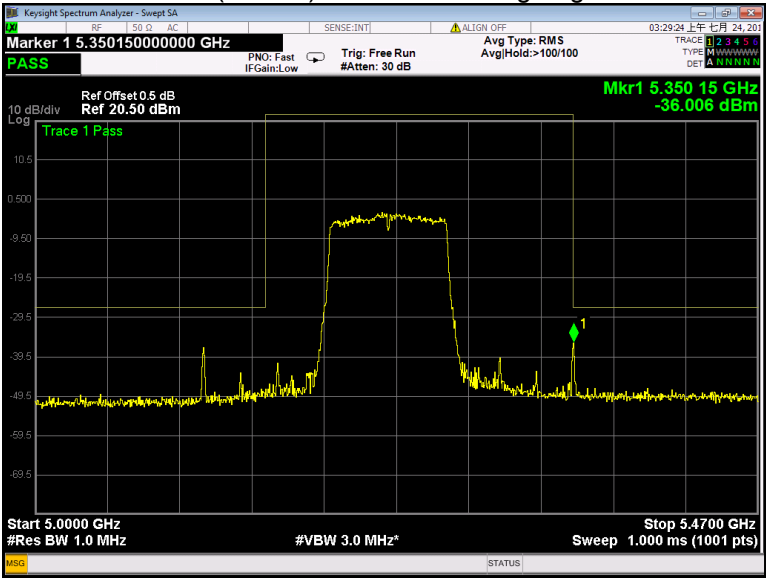


802.11ac(VHT80) U-NII-2A Band edge-left side

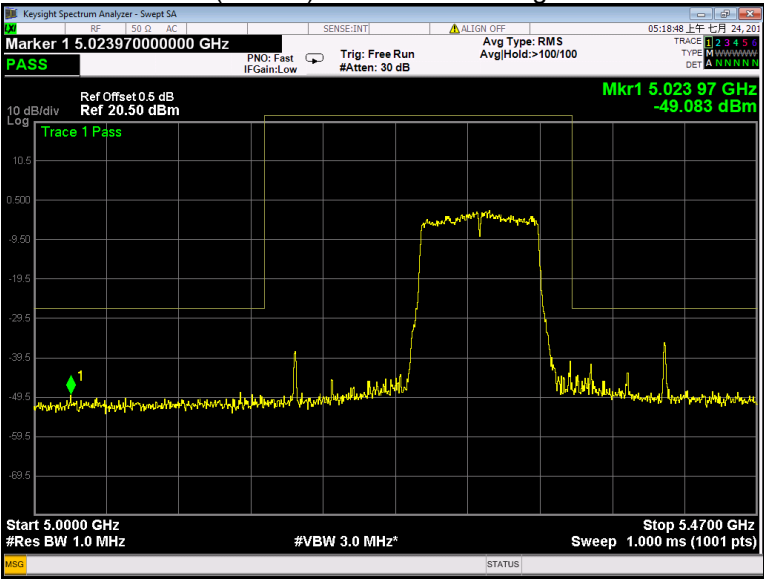


802.11ac(VHT80) U-NII-2A Band edge-right side

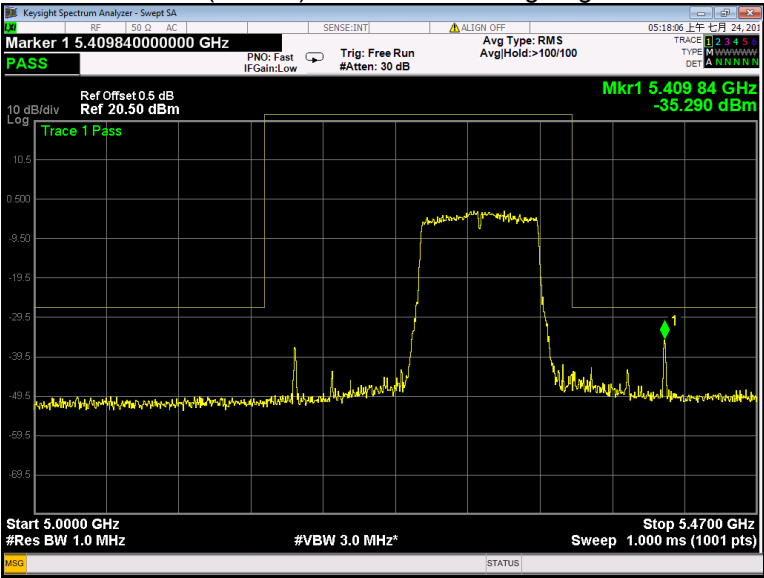


802.11ac(VHT80) U-NII-2C Band edge-left side

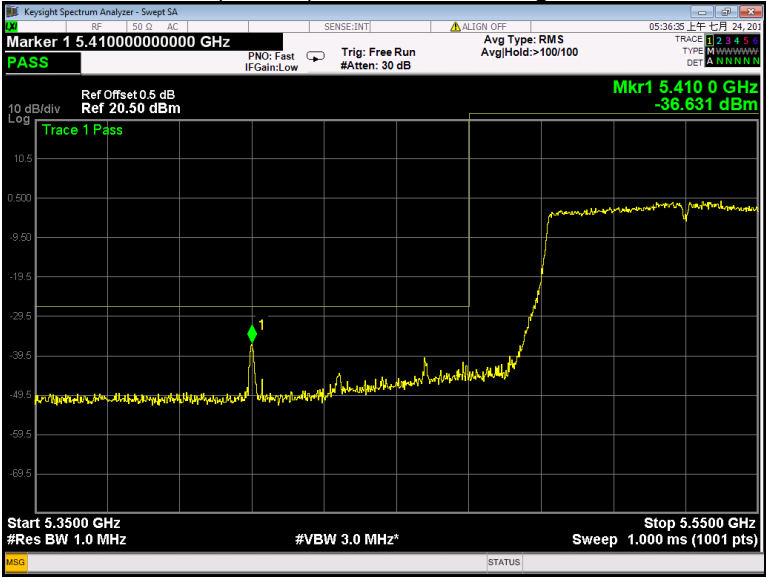


802.11ac(VHT80) U-NII-2C Band edge-right side

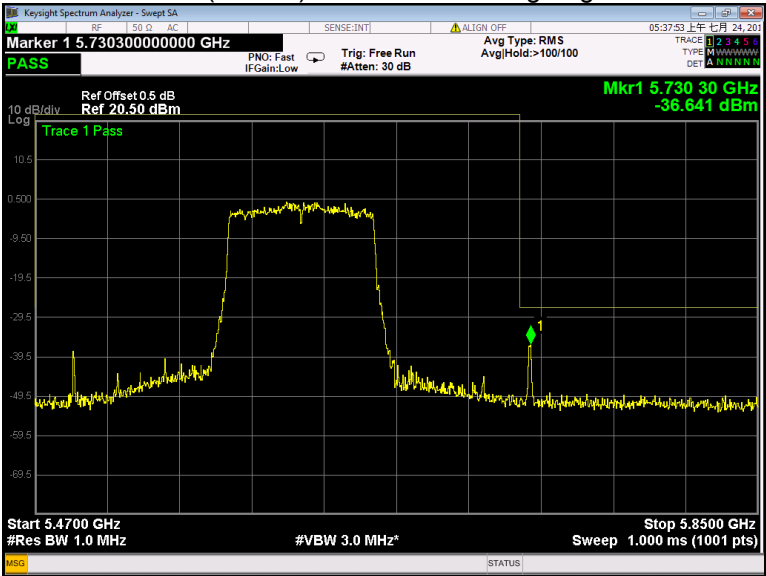

802.11ac(VHT80) U-NII-3 Band edge-left side

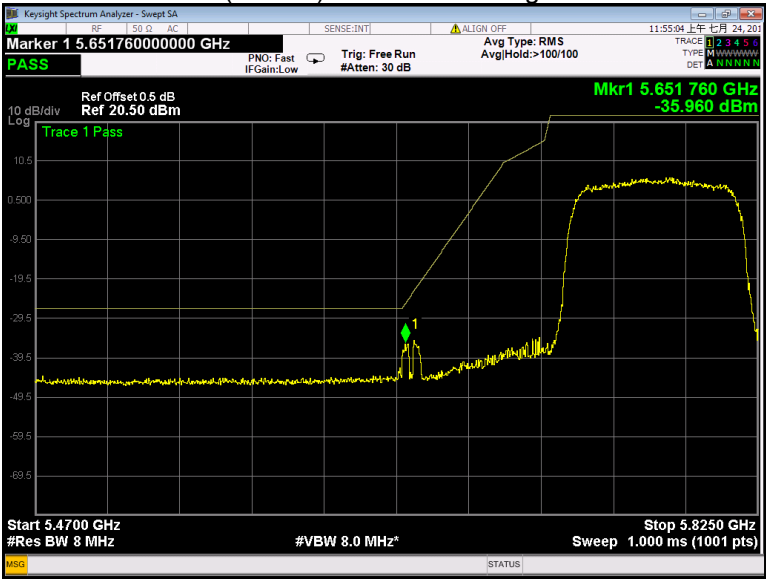

802.11ac(VHT80) U-NII-3 Band edge-right side

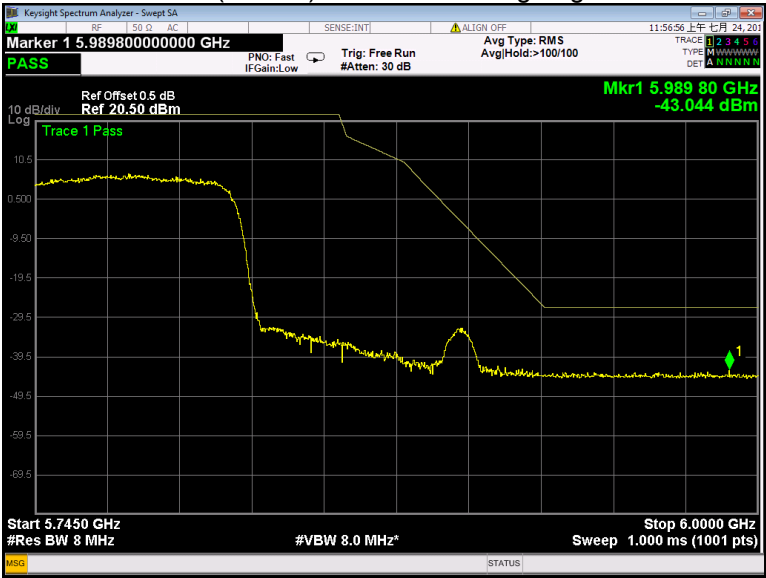

10 6 dB Bandwidth

Test Requirement:	FCC 47CFR Part 15 Section 15.407(e) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General U-NII Test Procedures New Rules v02r01 Section C
Test Limit:	≥ 500 kHz
Test Result:	PASS

10.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

10.2 Test Result


Band	Operation mode	6 dB Bandwidth (MHz)		
		Low	Middle	High
U-NII-3	802.11a	15.65	16.30	15.92
	802.11n(HT20)	17.17	17.52	17.53
	802.11n(HT40)	36.27	/	36.25
	802.11ac(VHT20)	15.32	17.14	17.15
	802.11ac(VHT40)	35.91	/	35.92
	802.11ac(VHT80)	75.17	/	/

Test result plots shown as follows:


802.11a U-NII-3 Low channel

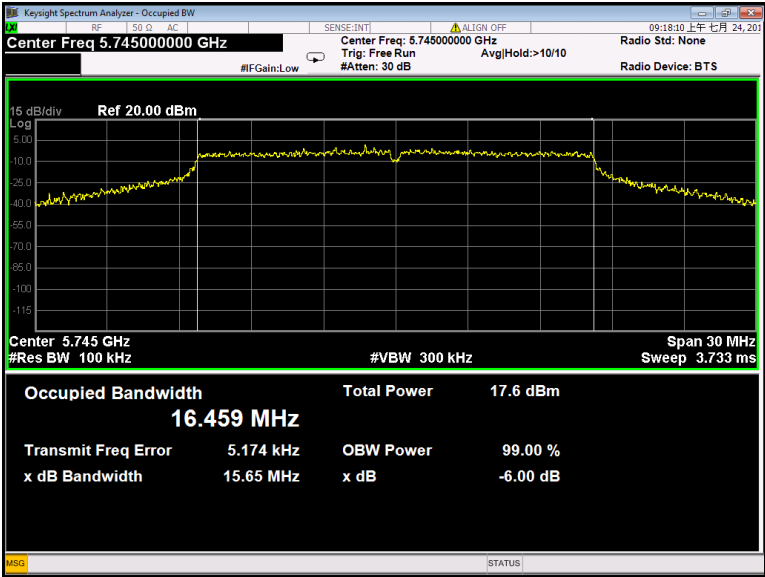


802.11a U-NII-3 Middle channel

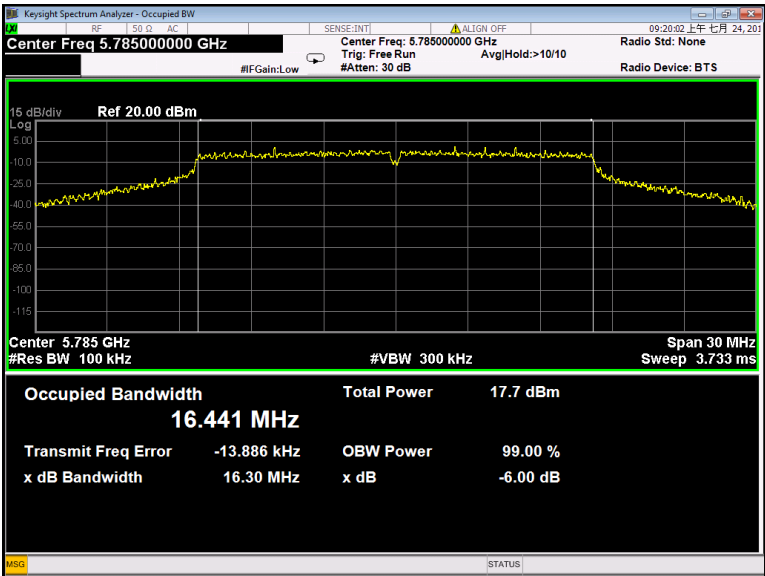


802.11a U-NII-3 High channel

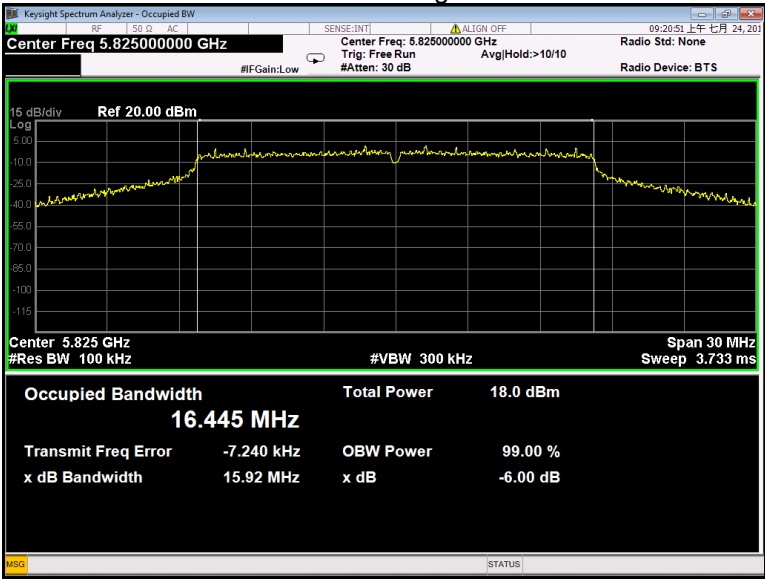


802.11n(HT20) U-NII-3 Low channel

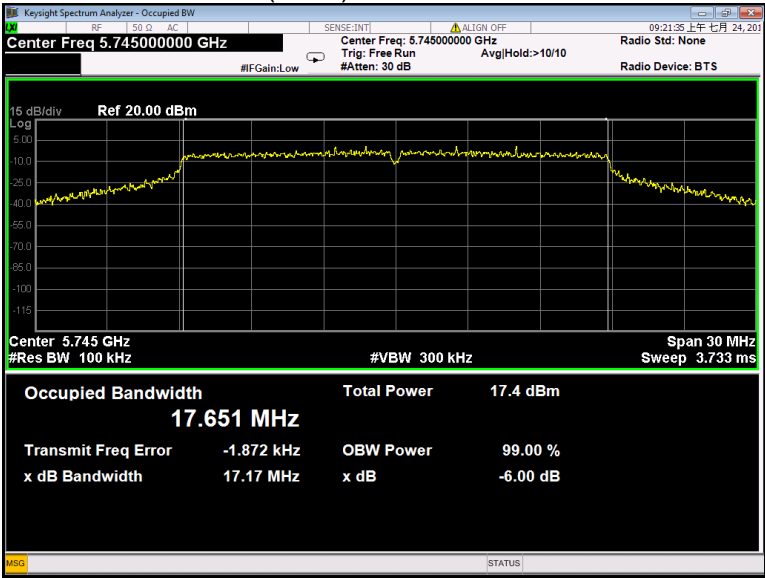


802.11n(HT20) U-NII-3 Middle channel

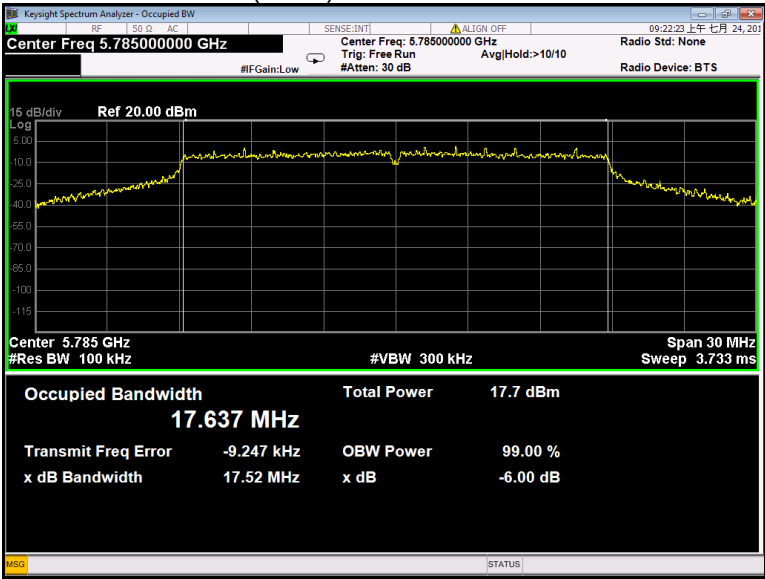


802.11n(HT20) U-NII-3 High channel


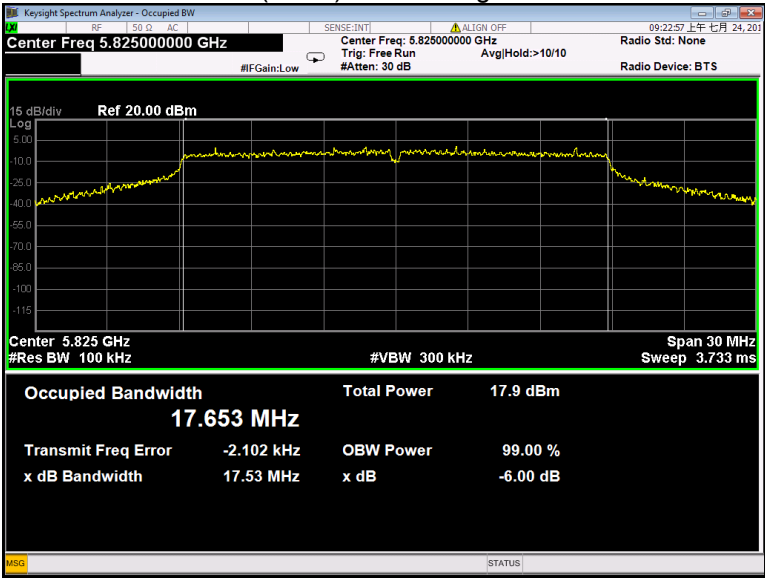


802.11n(HT40) U-NII-3 Low channel

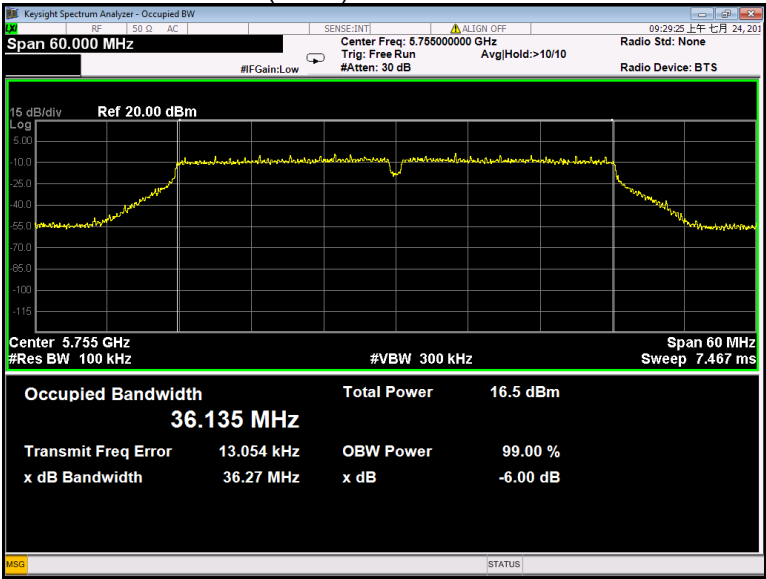


802.11n(HT40) U-NII-3 High channel

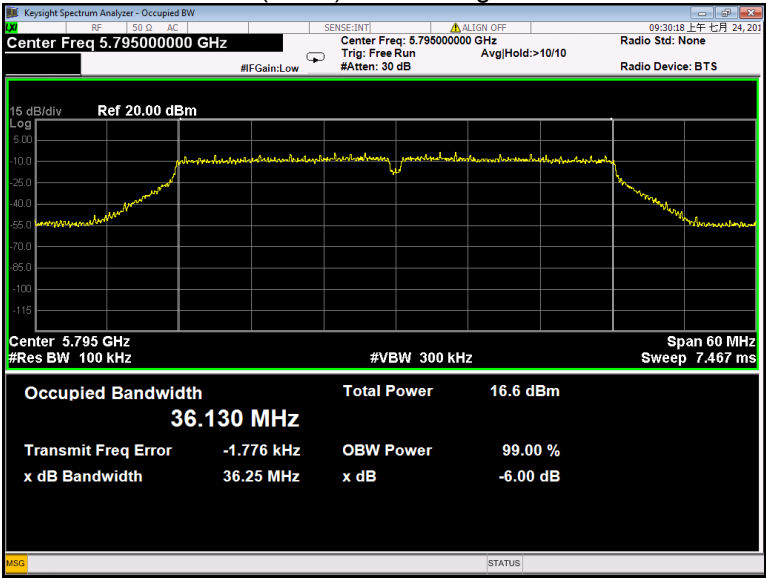


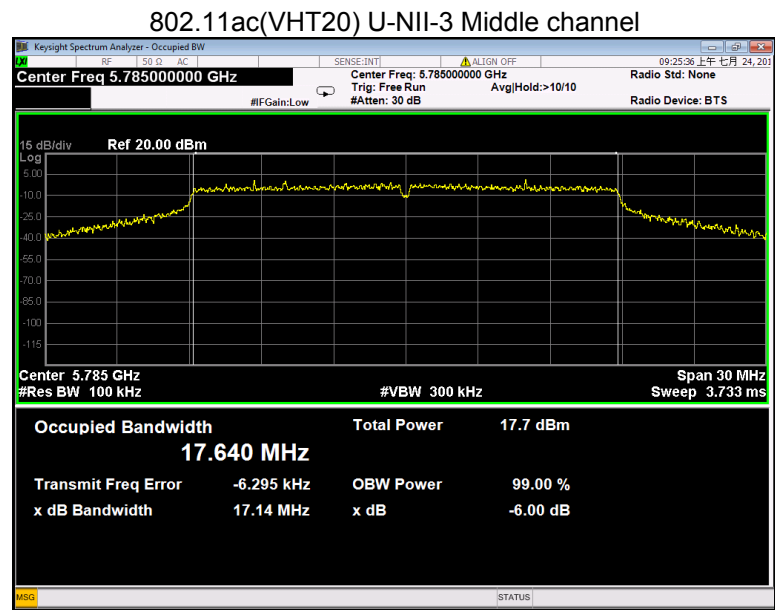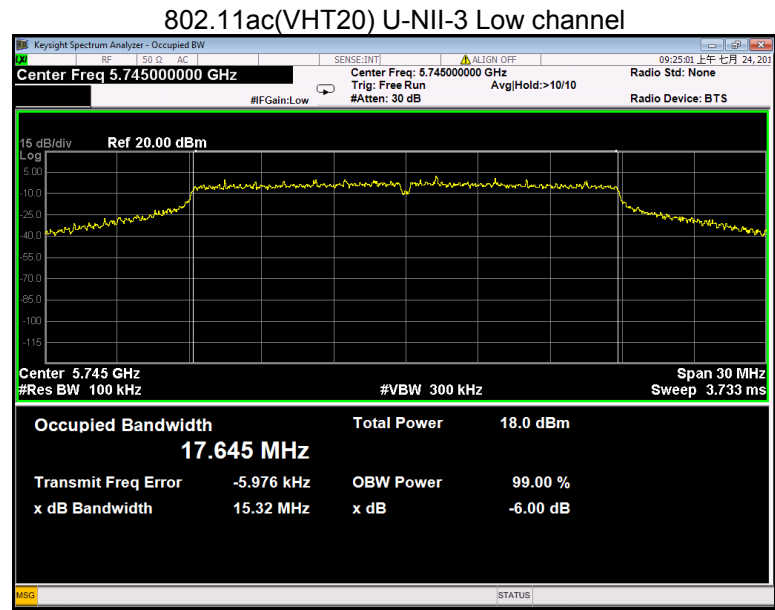


802.11ac(VHT20) U-NII-3 High channel

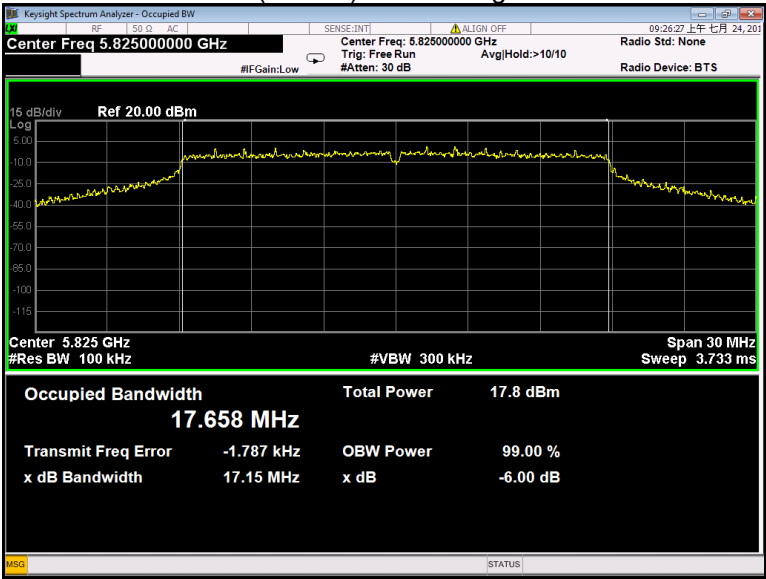


802.11ac(VHT40) U-NII-3 Low channel

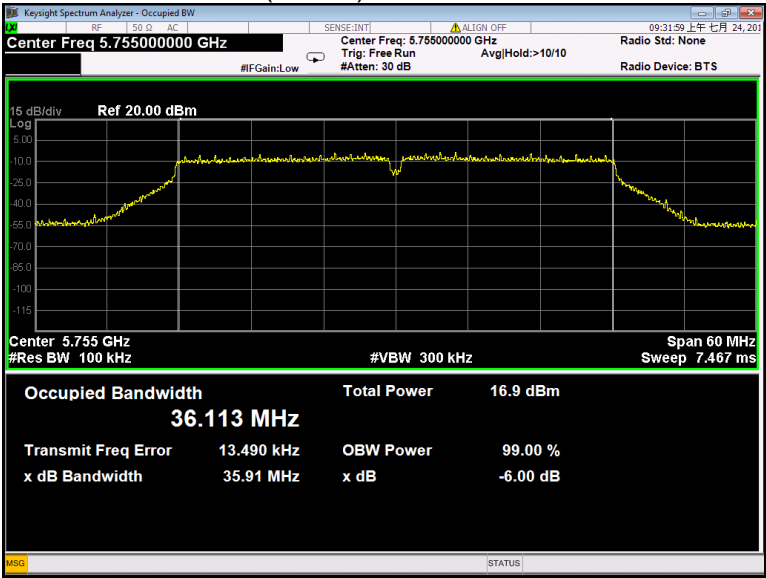

802.11ac(VHT40) U-NII-3 High channel

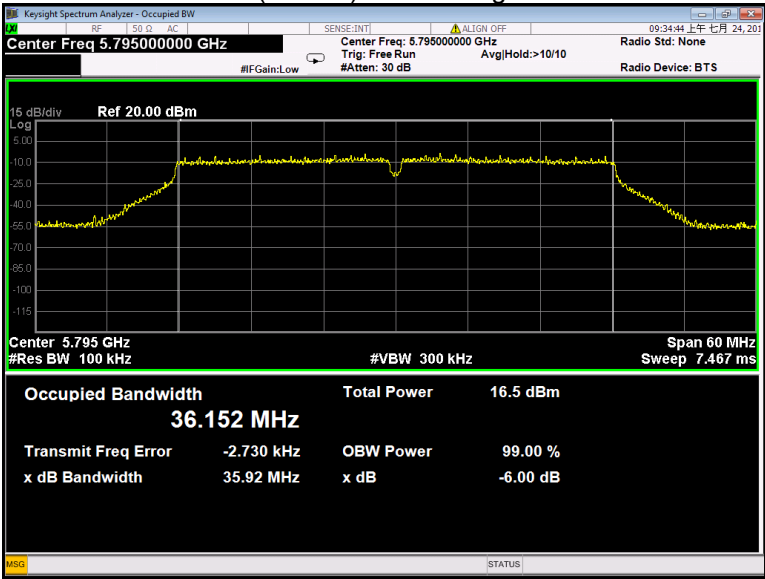

802.11ac(VHT80) U-NII-3 Low channel

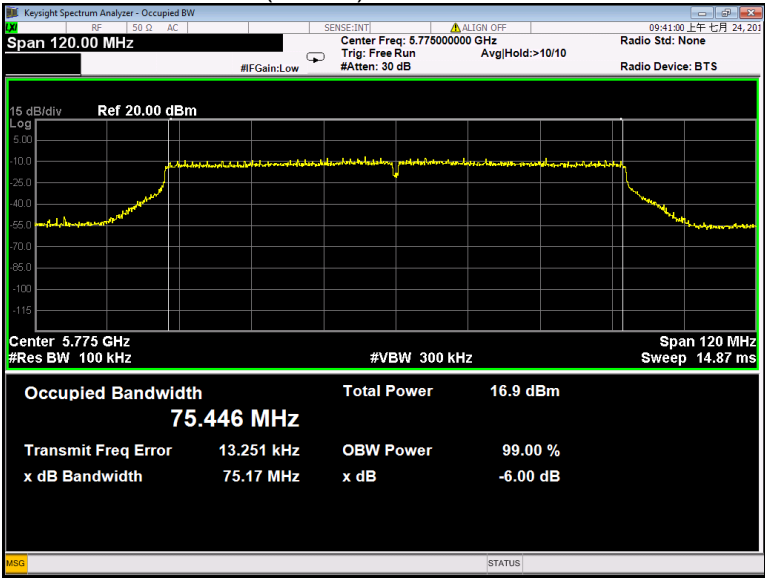

11 26 dB Bandwidth and 99% Occupied Bandwidth

Test Requirement:	FCC 47CFR Part 15 Section 15.407 (a) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General U-NII Test Procedures New Rules v02r01 Section D
Test Limit:	No restriction limits
Test Result:	PASS

11.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 1% to 5% of the OBW, VBW = 3x RBW

11.2 Test Result

Band	Operation mode	26 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
U-NII-1	802.11a	22.17	22.21	22.06	16.601	16.596	16.575
	802.11n(HT20)	23.44	23.23	22.65	17.737	17.741	17.717
	802.11n(HT40)	41.76	/	41.16	36.213	/	36.209
	802.11ac(VHT20)	23.74	23.46	23.18	17.779	17.751	17.747
	802.11ac(VHT40)	41.46	/	41.54	36.235	/	36.208
	802.11ac(VHT80)	83.29	/	/	75.730	/	/

Band	Operation mode	26 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
U-NII-2A	802.11a	22.92	21.99	22.56	16.644	16.572	16.582
	802.11n(HT20)	22.78	23.18	22.69	17.730	17.716	17.768
	802.11n(HT40)	41.18	/	41.48	36.196	/	36.210
	802.11ac(VHT20)	23.20	24.12	23.10	17.748	17.776	17.752
	802.11ac(VHT40)	41.83	/	41.52	36.216	/	36.197
	802.11ac(VHT80)	83.35	/	/	75.706	/	/


Band	Operation mode	26 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
U-NII-2C	802.11a	22.56	22.80	22.35	16.584	16.579	16.604
	802.11n(HT20)	22.69	23.37	22.19	17.727	17.740	17.721
	802.11n(HT40)	40.95	41.14	40.96	36.196	36.210	36.226
	802.11ac(VHT20)	22.83	22.50	22.38	17.722	17.751	17.736
	802.11ac(VHT40)	41.14	41.17	41.35	36.236	36.200	36.225
	802.11ac(VHT80)	83.22	/	84.21	75.719	/	75.702

Band	Operation mode	99% Bandwidth (MHz)		
		Low	Middle	High
U-NII-3	802.11a	16.574	16.572	16.527
	802.11n(HT20)	17.739	17.724	17.697
	802.11n(HT40)	36.198	/	36.230
	802.11ac(VHT20)	17.743	17.735	17.726
	802.11ac(VHT40)	36.209	/	36.217
	802.11ac(VHT80)	75.617	/	/


Test result plots shown as follows:

26 dB Bandwidth and 99% Occupied Bandwidth


802.11a U-NII-1 Low channel

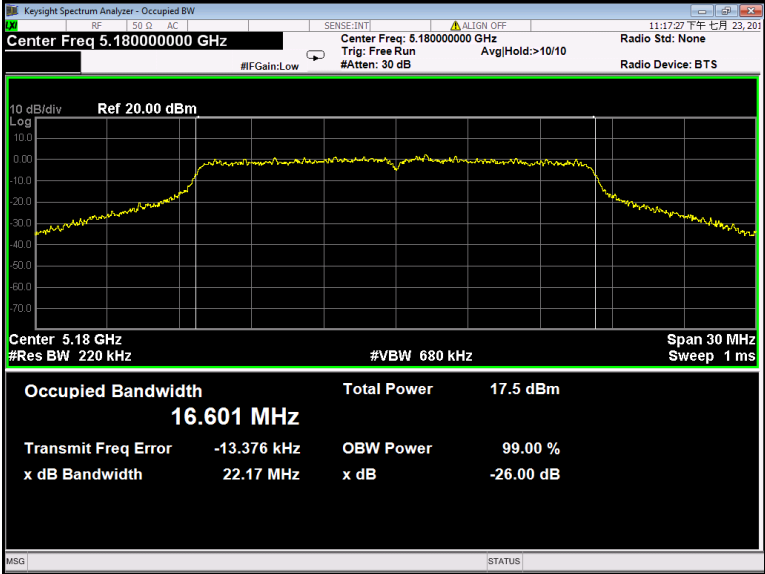


802.11a U-NII-1 Middle channel

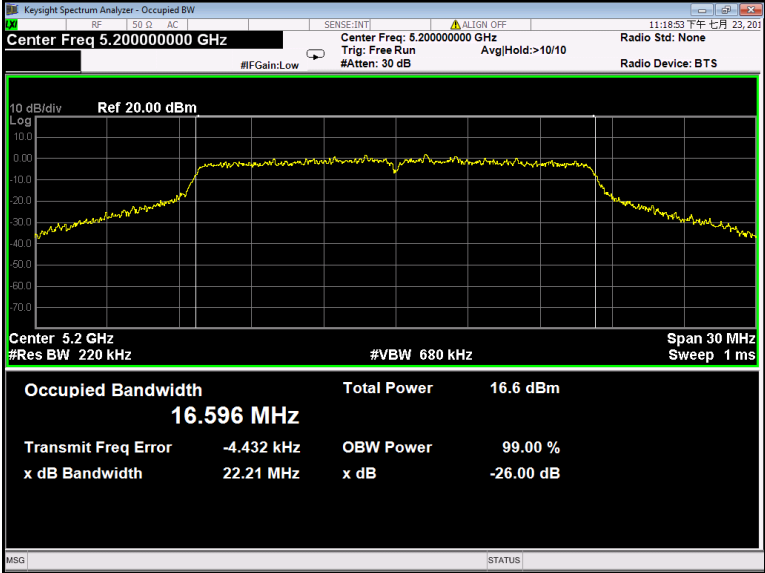


802.11a U-NII-1 High channel

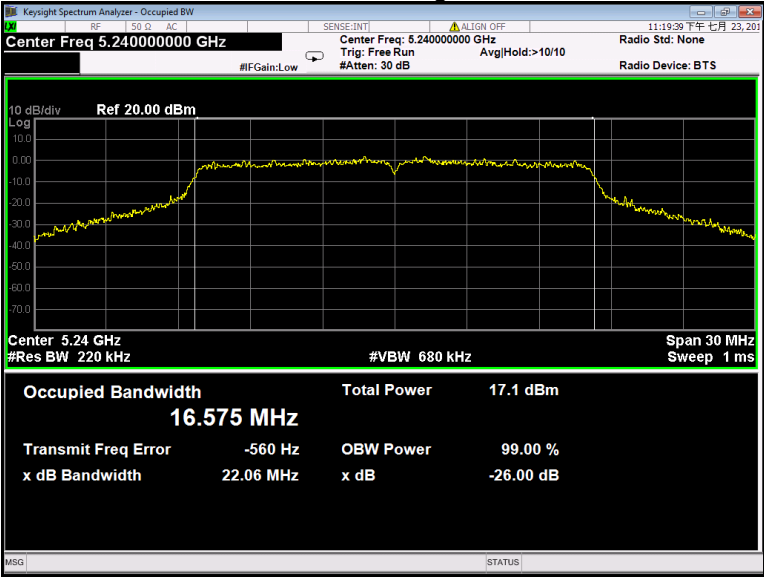


802.11n(HT20) U-NII-1 Low channel

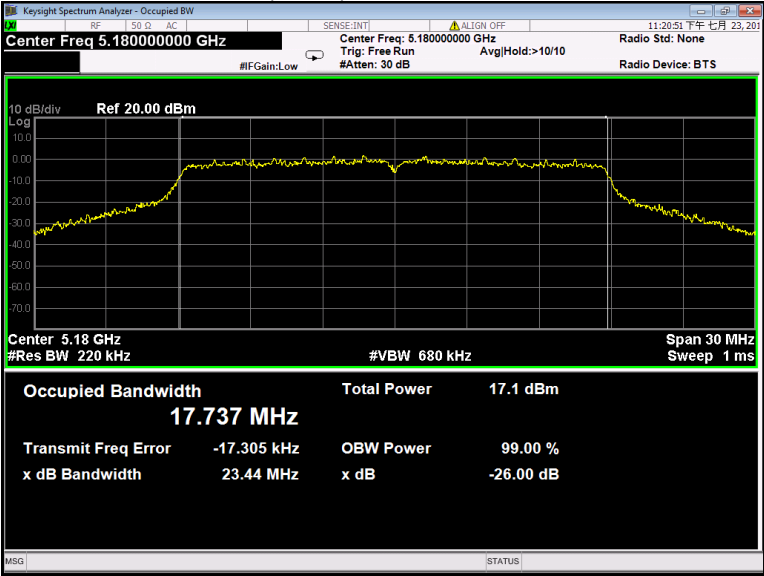


802.11n(HT20) U-NII-1 Middle channel

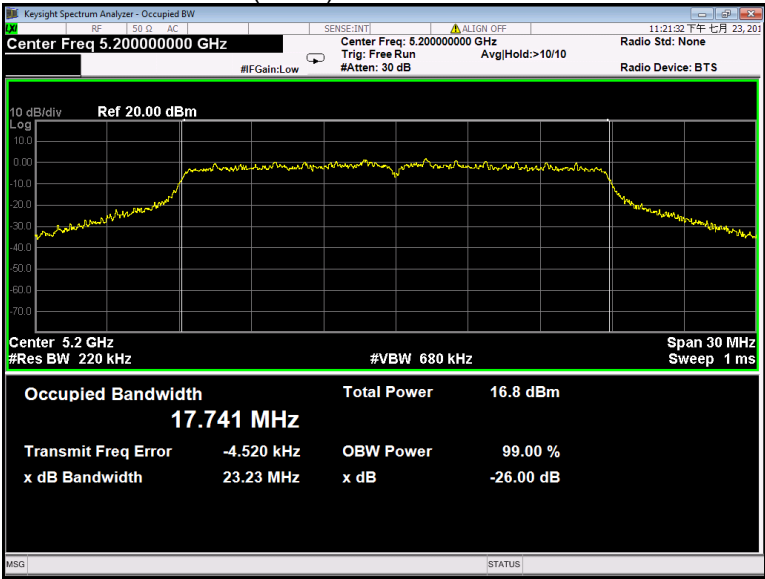


802.11n(HT20) U-NII-1 High channel


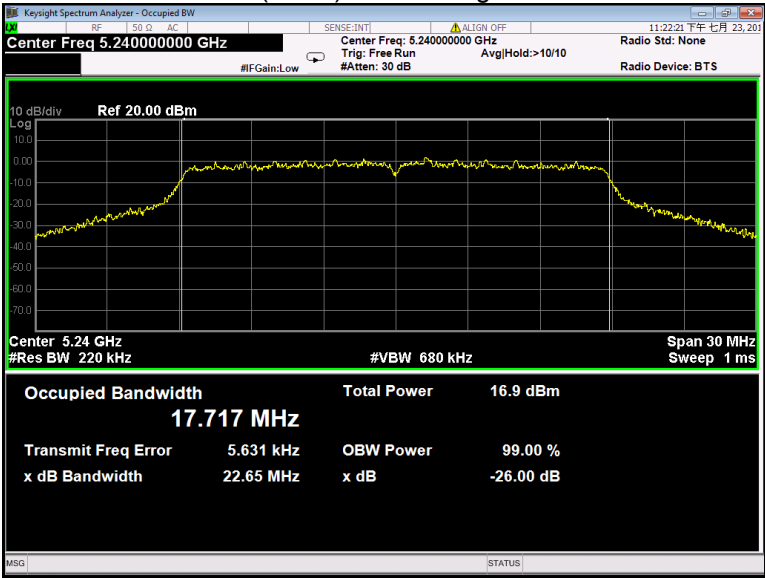


802.11n(HT40) U-NII-1 Low channel

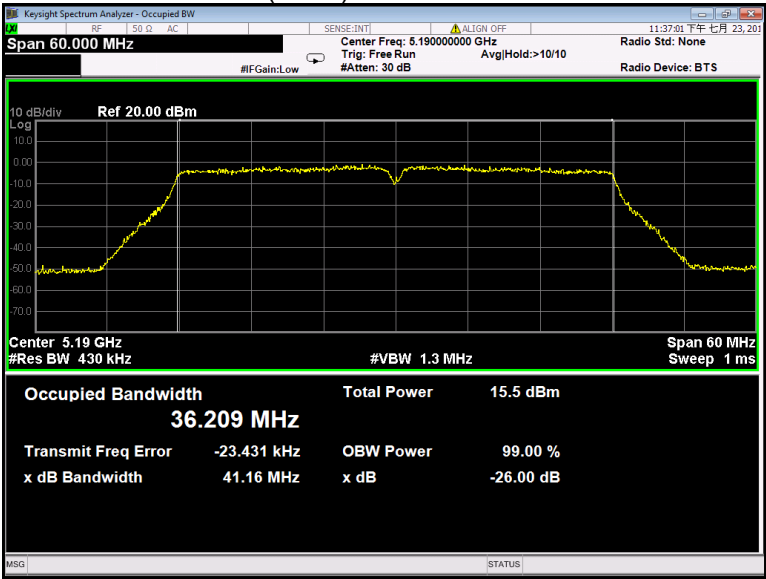


802.11n(HT40) U-NII-1 High channel

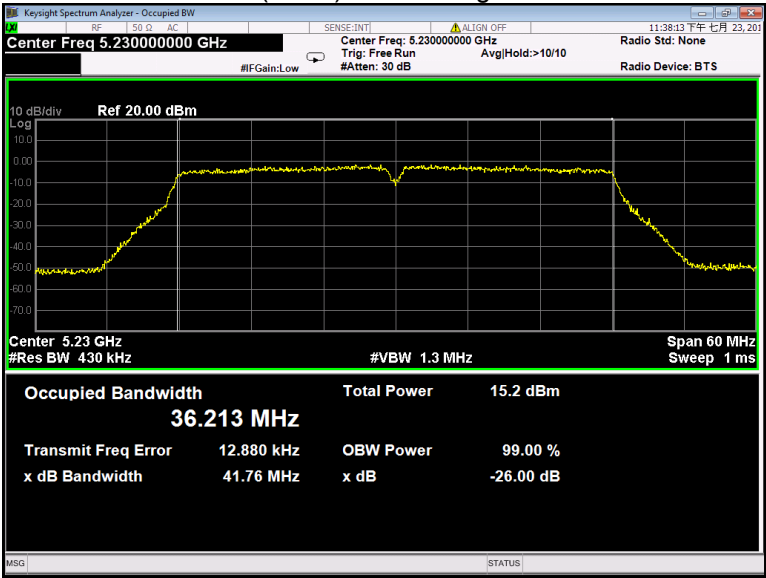


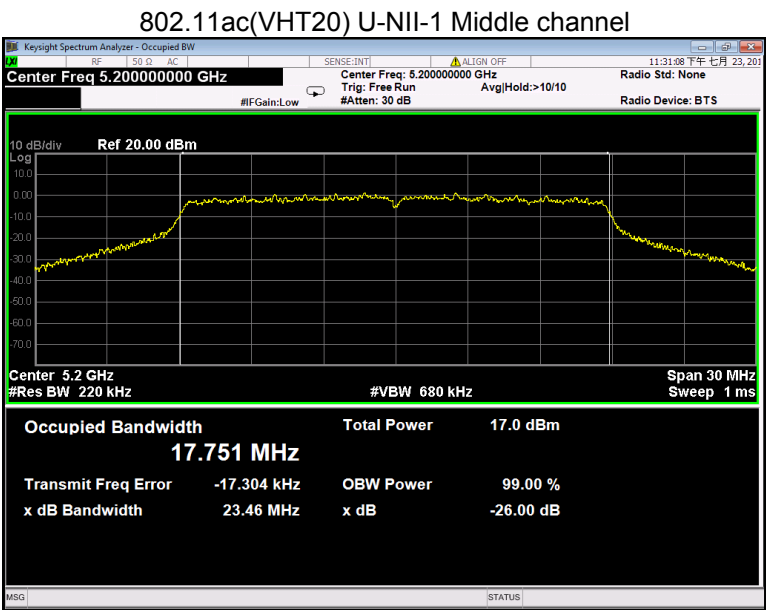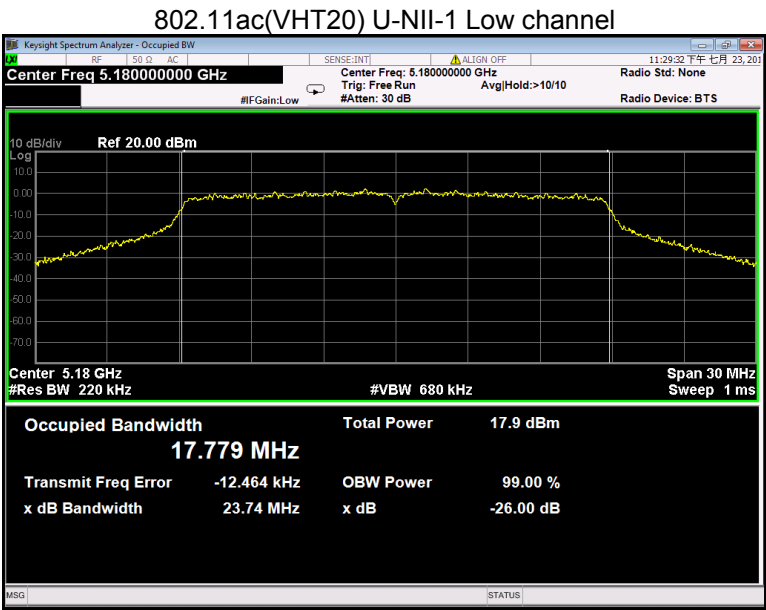


802.11ac(VHT20) U-NII-1 High channel

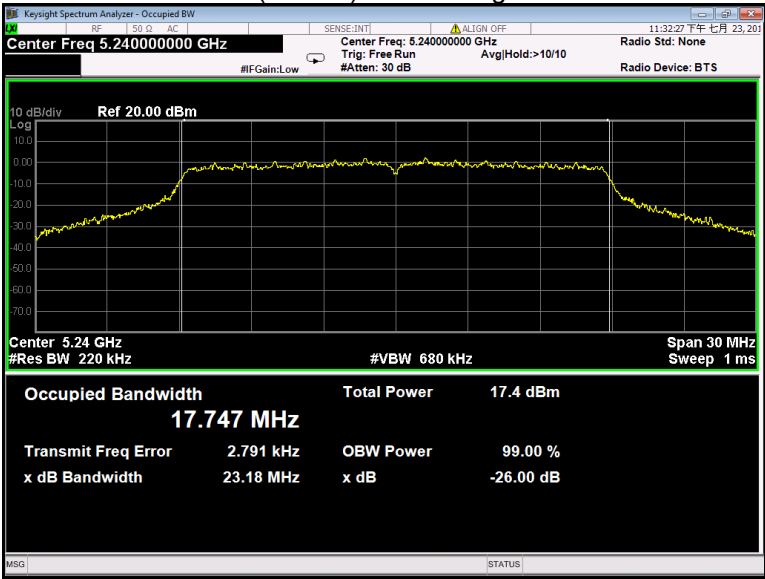


802.11ac(VHT40) U-NII-1 Low channel

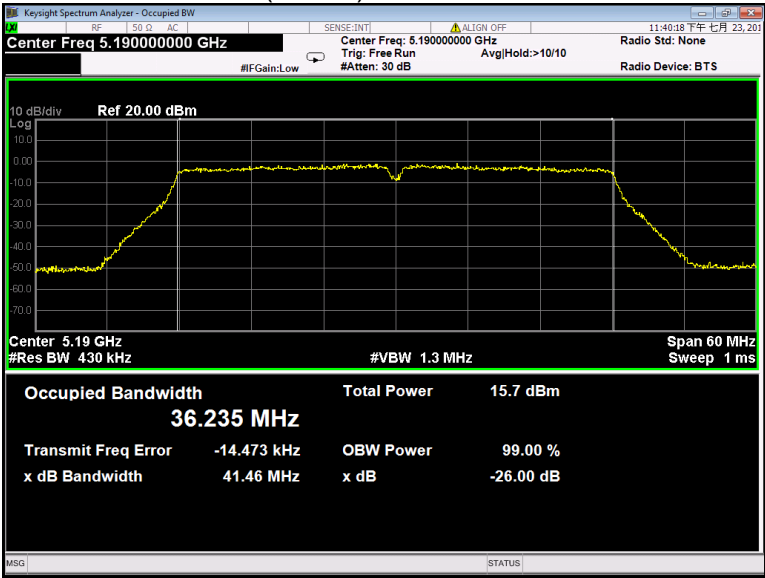


802.11ac(VHT40) U-NII-1 High channel

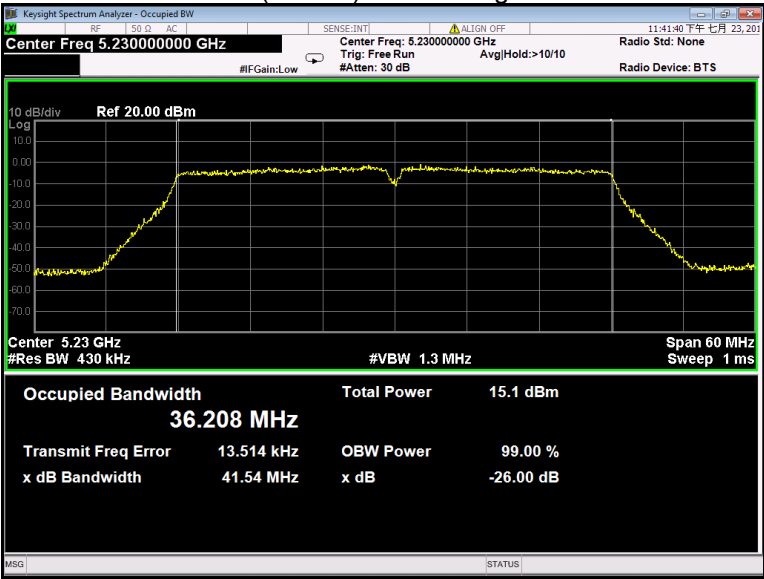


802.11ac(VHT80) U-NII-1 Low channel

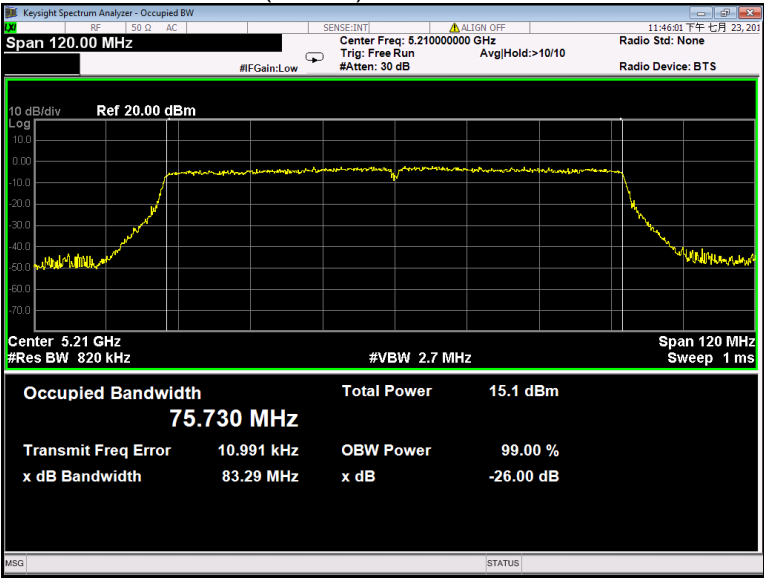


802.11a U-NII-2A Low channel

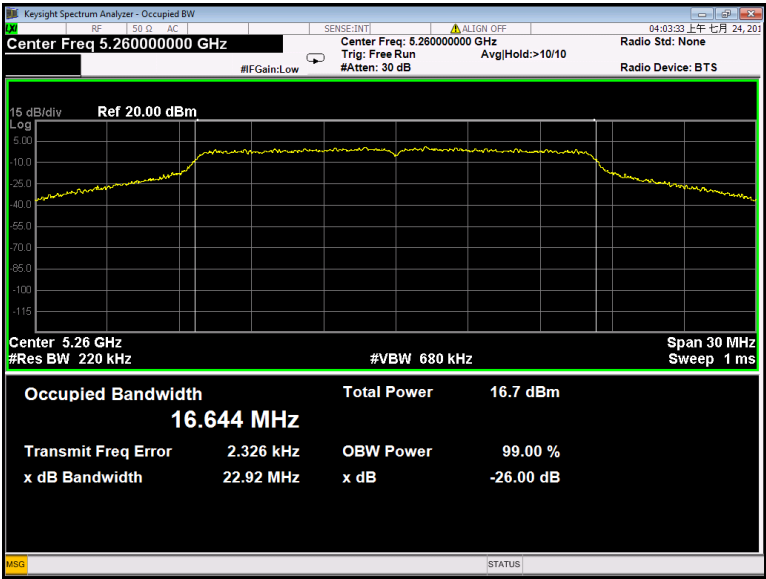


802.11a U-NII-2A Middle channel

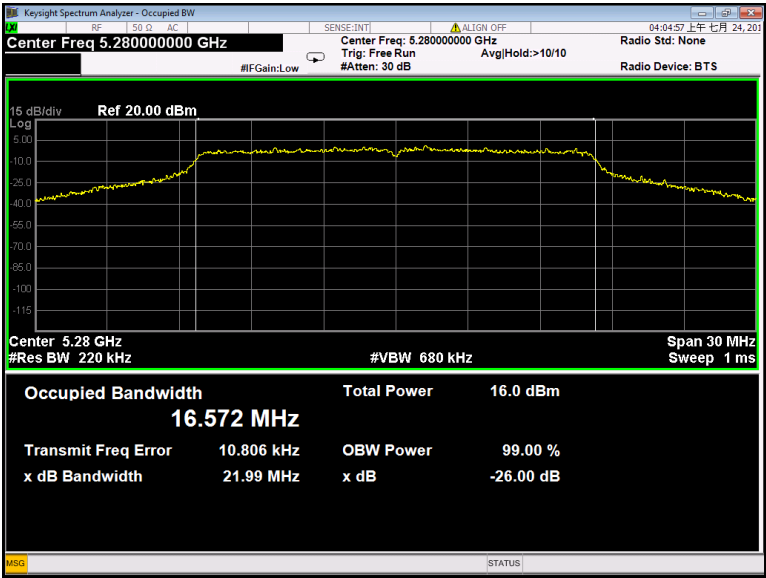


802.11a U-NII-2A High channel

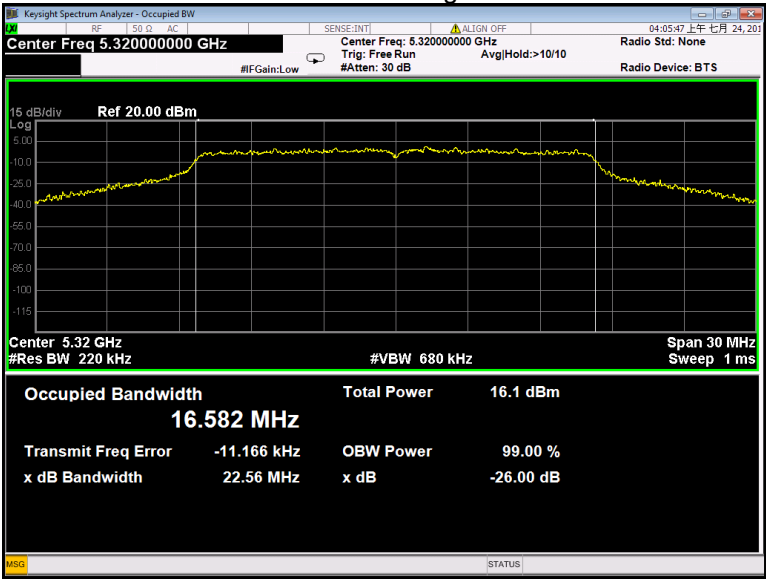


802.11n(HT20) U-NII-2A Low channel

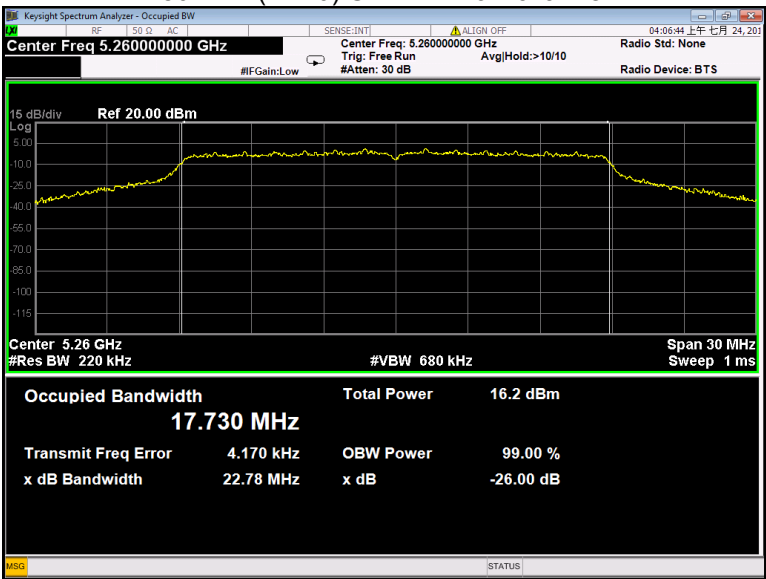


802.11n(HT20) U-NII-2A Middle channel

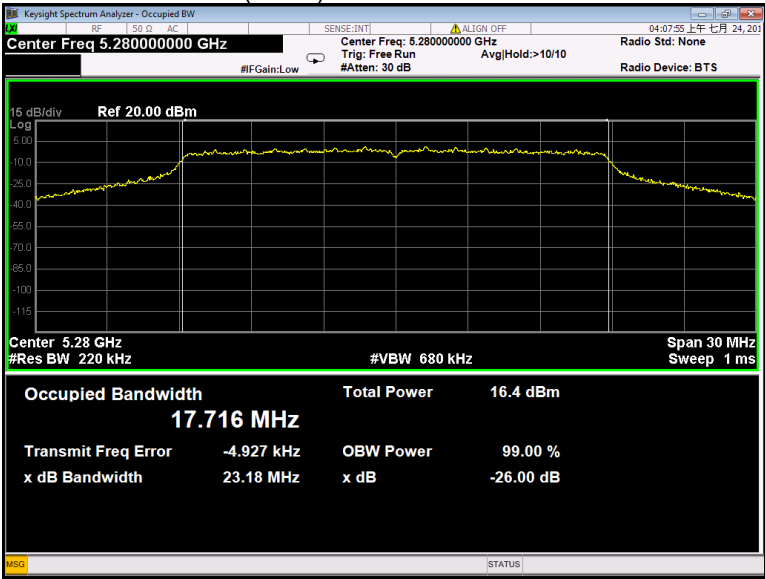


802.11n(HT20) U-NII-2A High channel

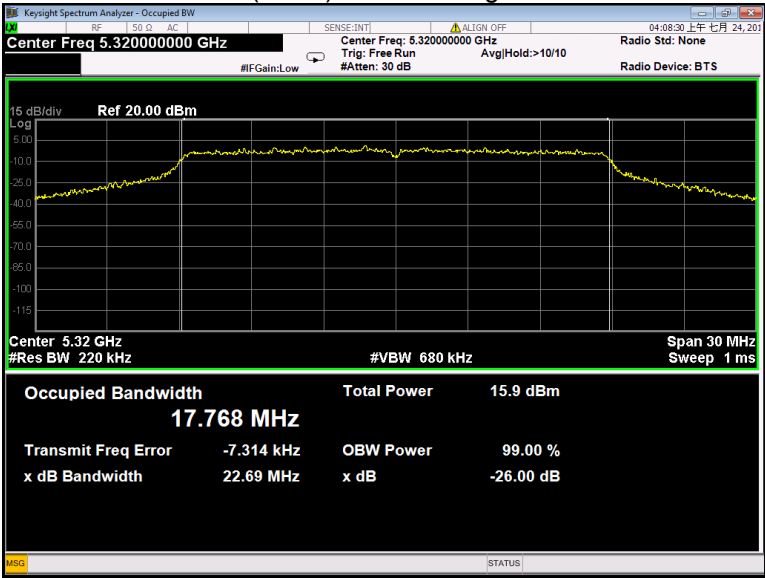


802.11n(HT40) U-NII-2A Low channel

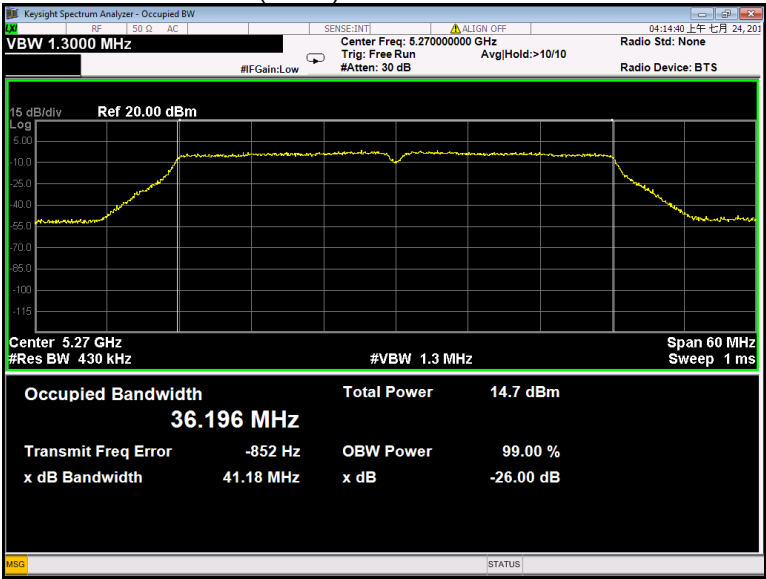


802.11n(HT40) U-NII-2A High channel

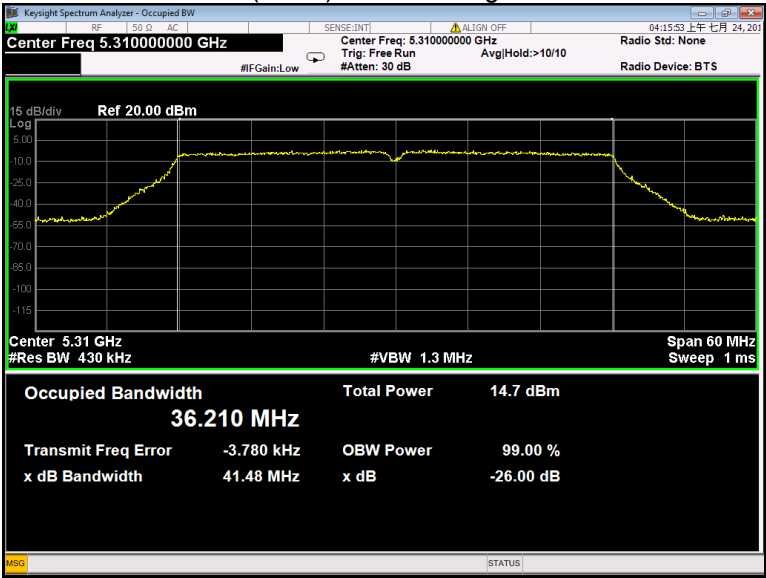


802.11ac(VHT20) U-NII-2A Low channel

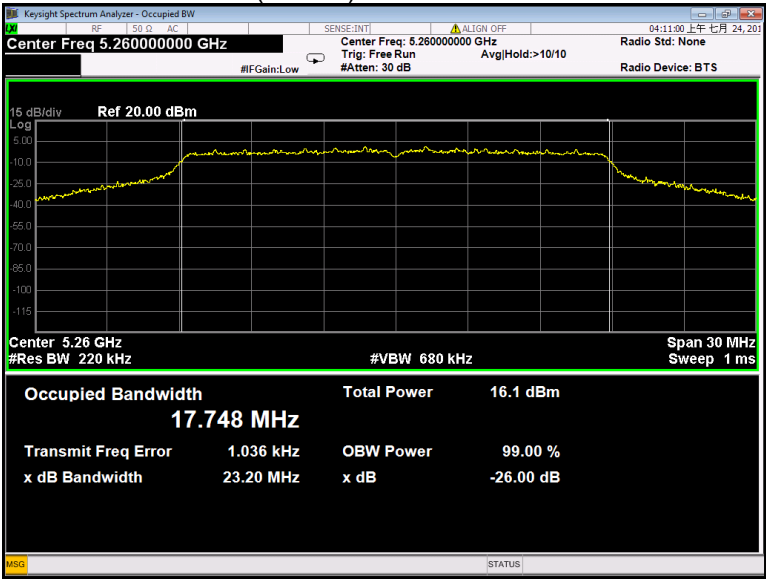


802.11ac(VHT20) U-NII-2A Middle channel

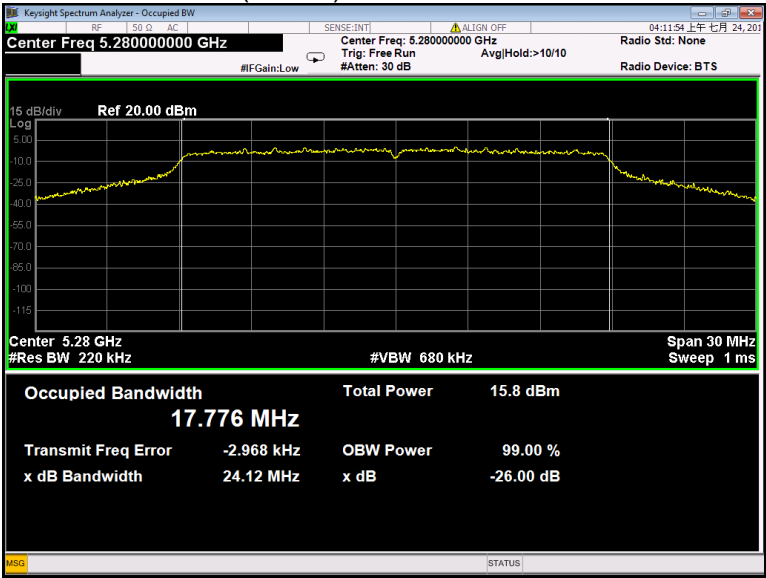


802.11ac(VHT20) U-NII-2A High channel

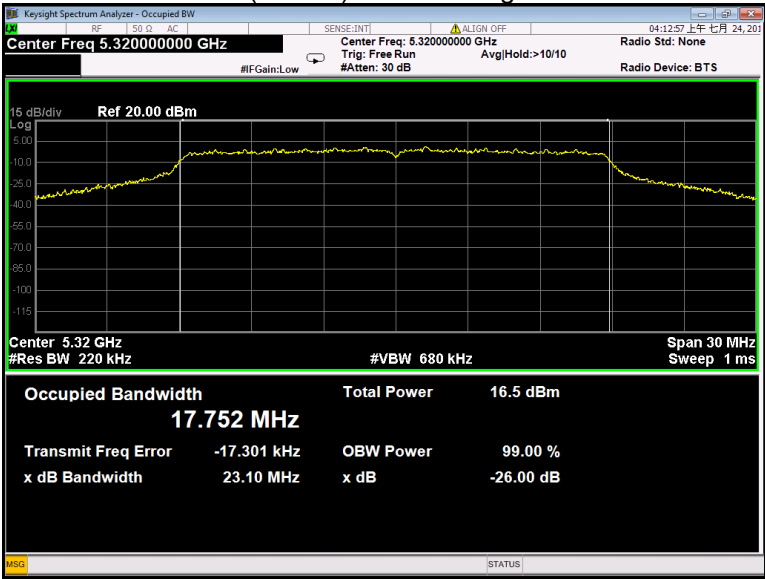


802.11ac(VHT40) U-NII-2A Low channel

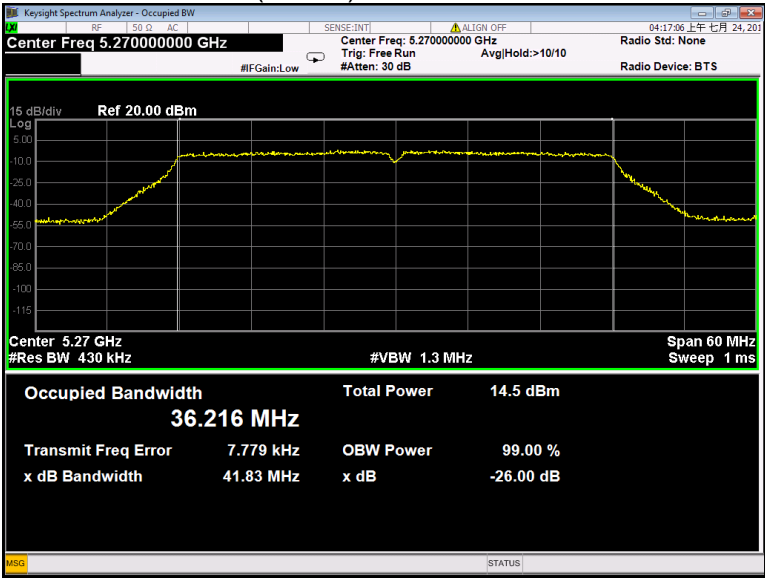


802.11ac(VHT40) U-NII-2A High channel

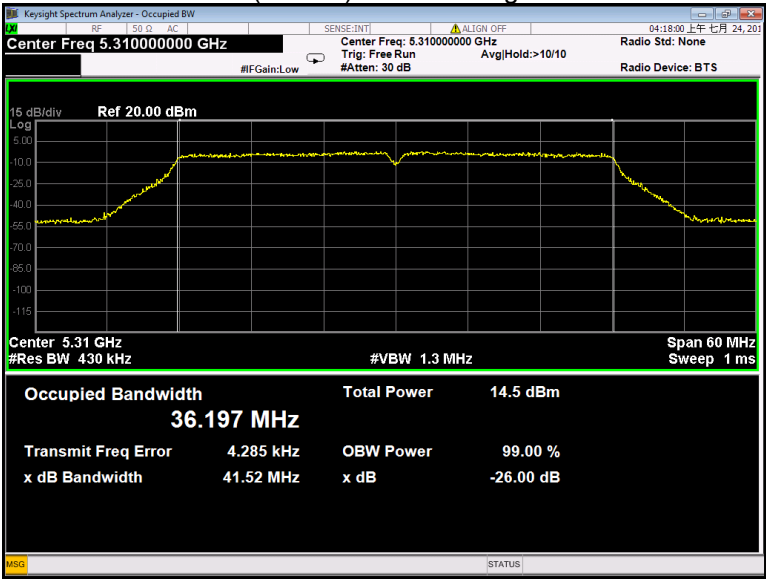


802.11ac(VHT80) U-NII-2A Low channel

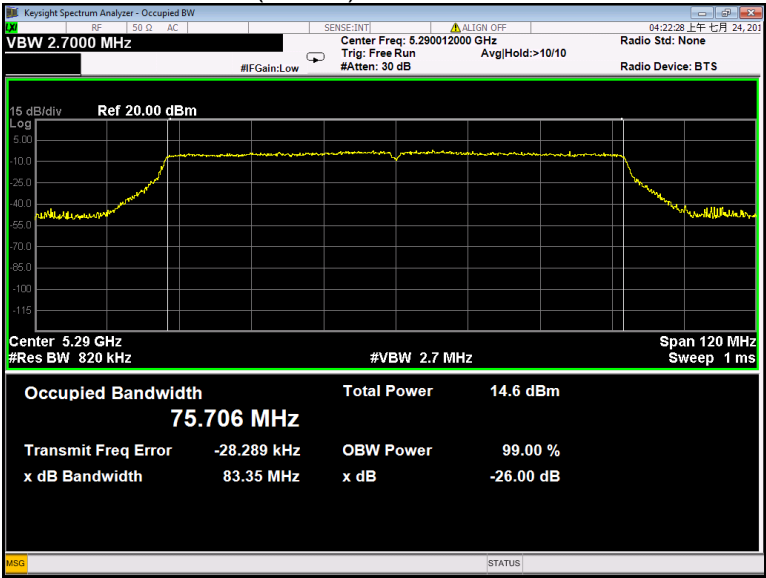


802.11a U-NII-2C Low channel

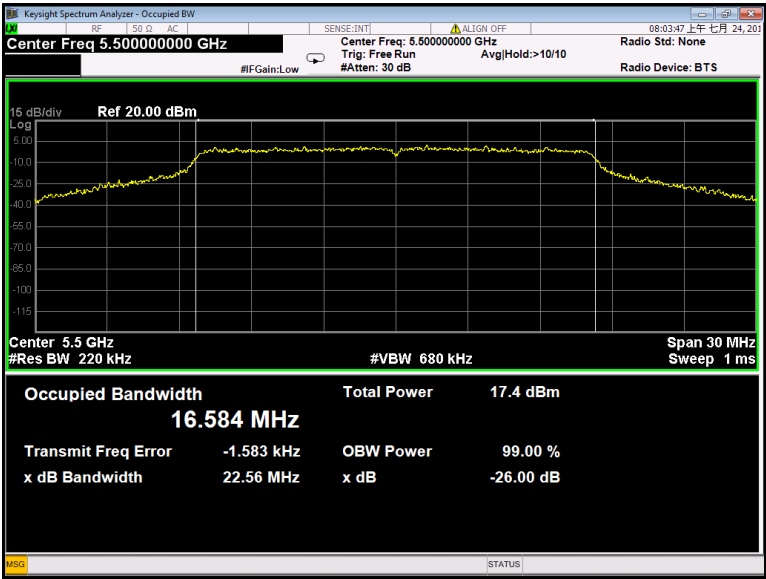


802.11a U-NII-2C Middle channel

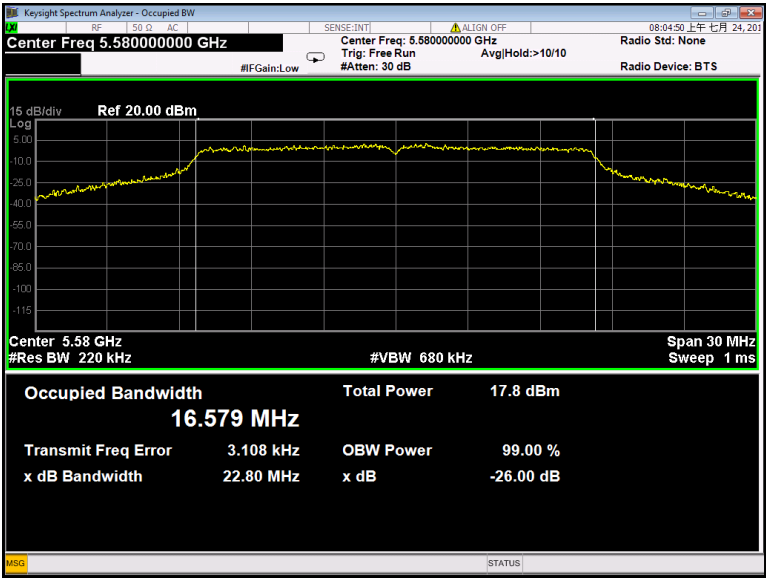


802.11a U-NII-2C High channel

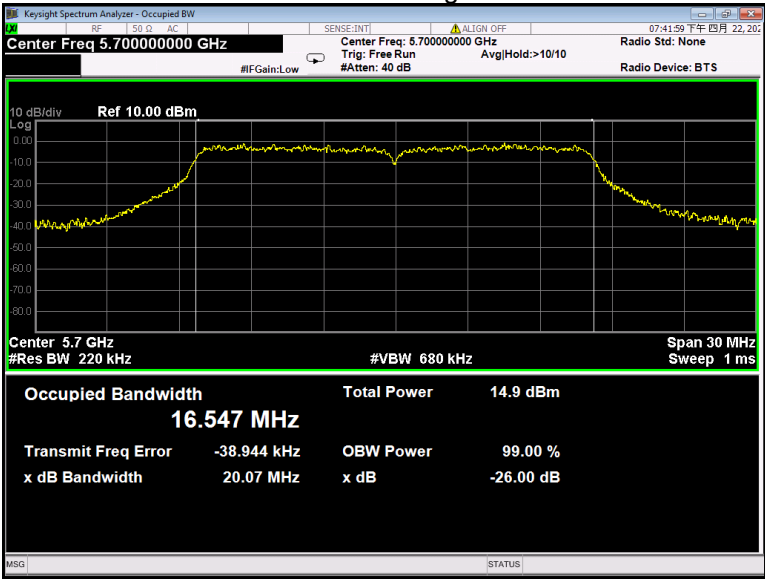


802.11n(HT20) U-NII-2C Low channel

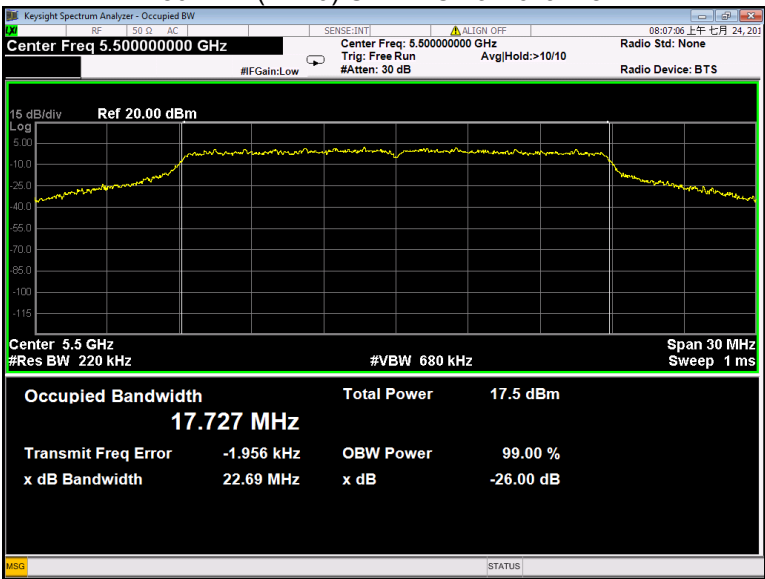


802.11n(HT20) U-NII-2C Middle channel

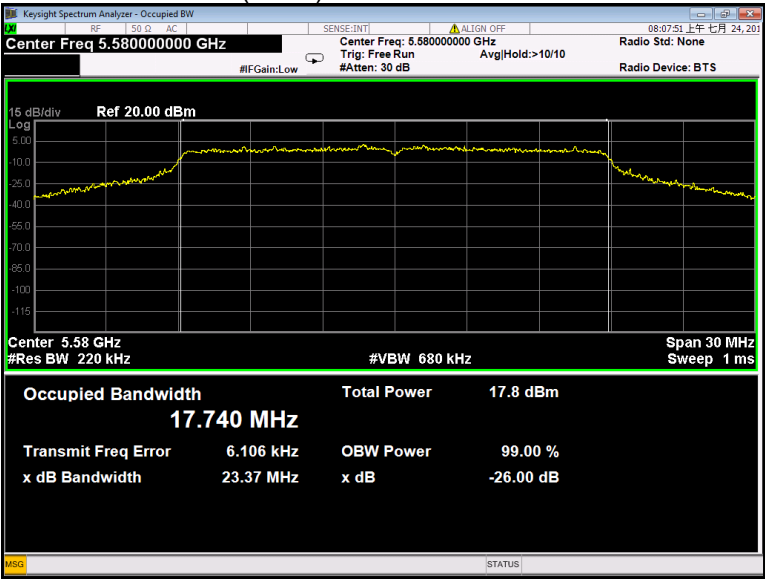


802.11n(HT20) U-NII-2C High channel


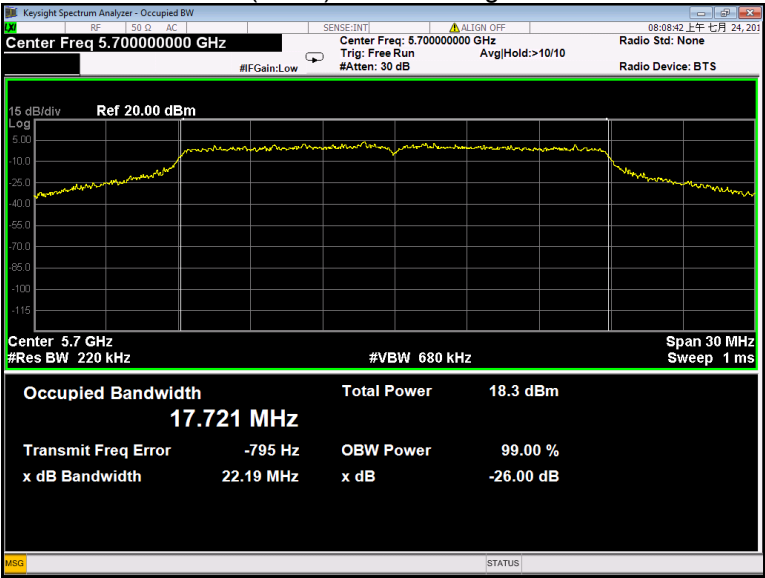


802.11n(HT40) U-NII-2C Low channel

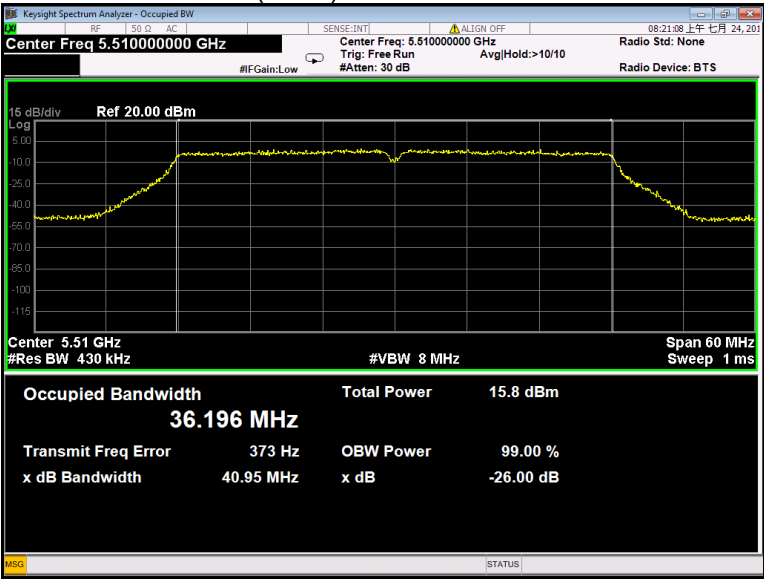


802.11n(HT40) U-NII-2C Middle channel

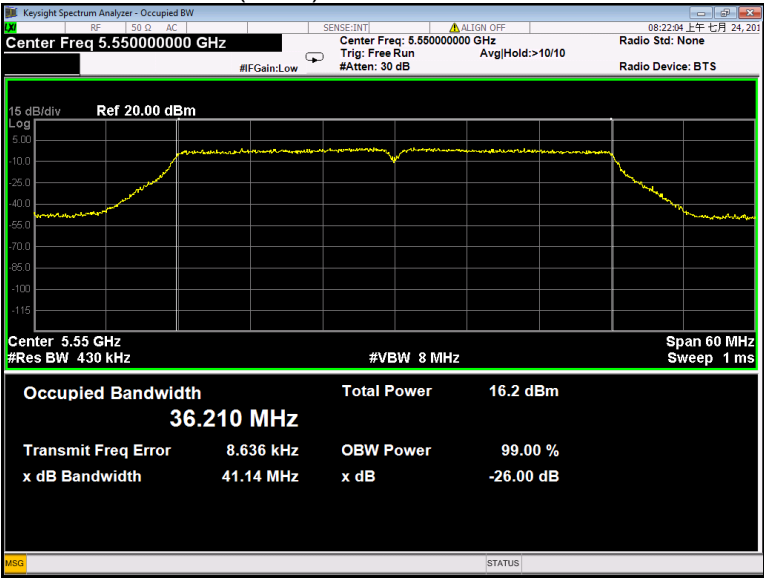

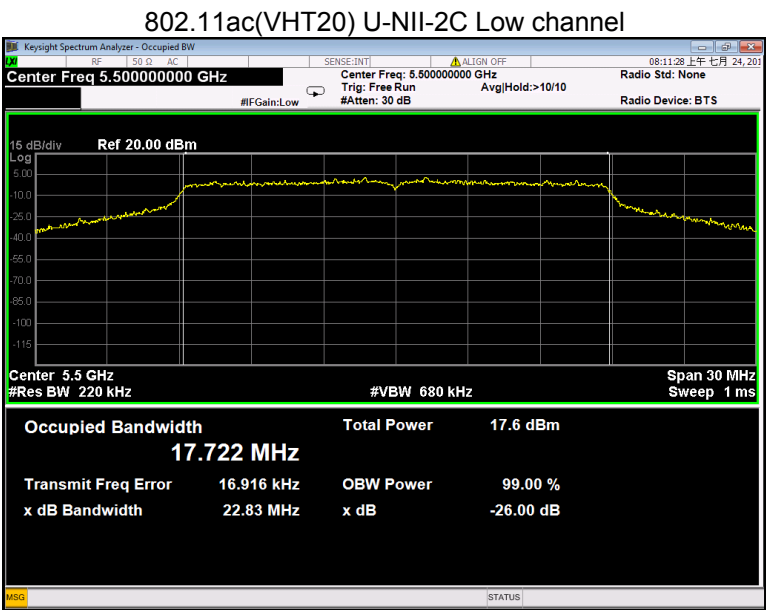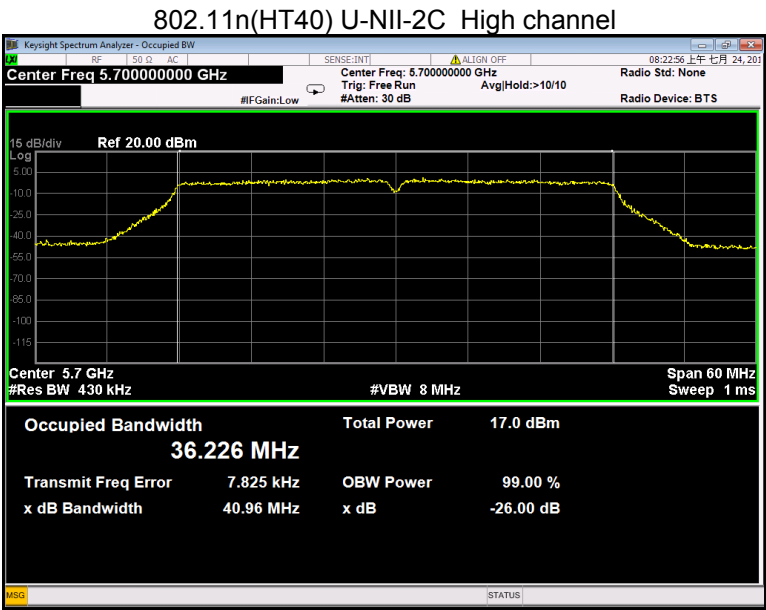

802.11ac(VHT20) U-NII-2C Middle channel

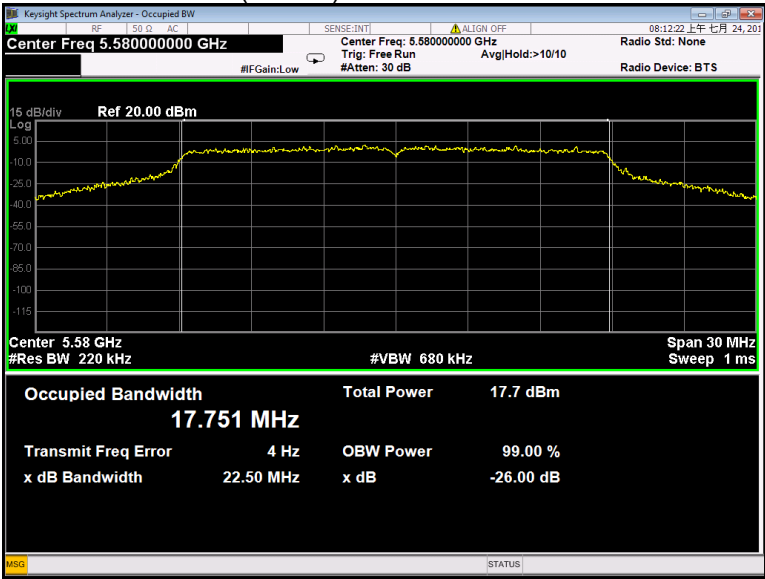

802.11ac(VHT20) U-NII-2C High channel

