



Shenzhen Shuodian Electronic Technology Co.,Ltd

Specification

for

KEWT-IN PCB-2.4G

文件编号 Document No.	
日期 Release Date	2024/09/13
编制 Author	Zeng xiaofeng
复核 Review	Li ming

Shenzhen Shuodian Electronic Technology Co.,Ltd

No. 508 West, Building 64, Majialong Jinlong Industrial City, Nanshan District, Shenzhen

邮箱: sz_shuodian@163.com

电话: 0755-86006322

传真: 0755-86006323



Shenzhen Shuodian Electronic Technology Co.,Ltd

1.Specifications

NO.	ITEMS	DETAILS
1	model	KEWT-IN
2	Frequency band	2400-2500MHz
3	VSWR	≤ 2.0
4	Impedance	50 Ω
5	Antenna type	Monopole
6	Antenna implementation form	PCB



3.Product electricalperformance test data

3.1Testing environment and instrument equipment

testing environment: temperature:: 10℃——+30℃ humidity: ≤80% (+40℃) atmospheric pressure: 750mmkg±30mmkg	Test equipment: etwork analyzer Agilent E8358A ETS anechoic chamber
---	---

3.2 Product electrical performance test data:

S11 picture:

Marker	2400MHz	2450MHz	2500MHz
Returnloss	-9.98	-15.58	-30.17
VSWR	1.93	1.39	1.06




Shenzhen Shuodian Electronic Technology Co.,Ltd

E5071C Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State


▶ Tr1 S11 Log Mag 10.00dB/ Ref 0.000dB [Ro Del]

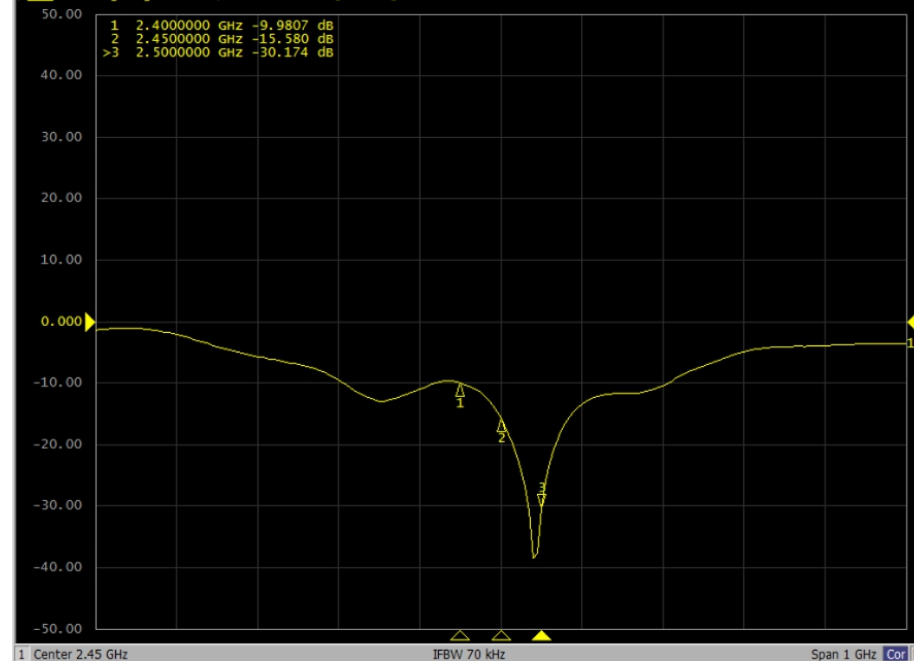

E5071C Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

▶ Tr1 S11 SWR 1.000/ Ref 1.000 [Ro Del]

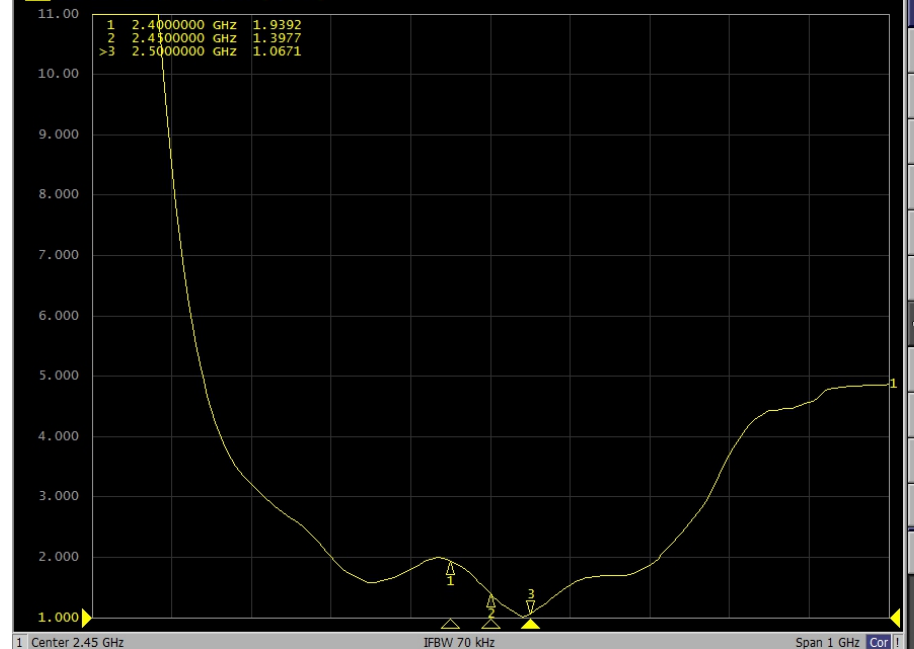



3.3 Gain efficiency and directional pattern of antenna:

频率 (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Gain (dBi)	-1.90	-2.20	-2.64	-2.92	-3.06	-2.93	-2.08	-1.37	-1.37	-1.61	-2.17
Efficiency (%)	21.7	21.1	20.3	19.5	19.5	19.1	18.3	17.9	16.7	16.1	15.6

2450MHz Direction diagram:

