



RADIO TEST REPORT

Applicant	:	AUMOVIO Aftermarket GmbH
Address of Applicant	:	Guerickestrasse 7, Frankfurt am Main, Hessen, D-60488, Germany
Manufacturer	:	Huizhou Foryou General Electronics Co., Ltd.
Address of Manufacturer	:	No. 2 District A, Foryou Industry Park, No. 1 North Shangxia Road, Dongjiang Hi-tech Industry Park, 516005 Huizhou city, Guangdong Province, China(PROC)
Equipment under Test	:	Radio
Model No.	:	CR4512UBA-OR, TR4512UBA-OR, CRD4512UBA-KOM, CR4512UBA/AGC, CRD4512UBA/AGC, CRD4512UBA/KOM, CRD4512UBA/SDF, CRD4612UBA, CR4612UBA, CRD4612UBA/PRI, CRD4612UBA-MANI, CRD4512UBA-OR
FCC ID	:	2AVAW-CRD4512UBA-OR
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, ANSI C63.10:2020
Report No.	:	DDT-RE25121229-2E01
Issue Date	:	2026/08/05
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information.....	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT	9
2.3.	Block diagram of EUT configuration for test.....	9
2.4.	Decision of final test mode	9
2.5.	Deviations of test standard	10
2.6.	Test environment conditions	10
2.7.	Test laboratory	11
2.8.	Measurement uncertainty	11
3.	Equipment Used During Conductive Test	12
4.	20 dB Bandwidth	13
4.1.	Block diagram of test setup	13
4.2.	Limits	13
4.3.	Test procedure	13
4.4.	Test result.....	14
4.5.	Test graphs	15
5.	99% Bandwidth	18
5.1.	Block diagram of test setup	18
5.2.	Limits	18
5.3.	Test procedure	18
5.4.	Test result.....	19
5.5.	Test graphs	20
6.	Maximum Peak Output Power.....	23
6.1.	Block diagram of test setup	23
6.2.	Limits	23
6.3.	Test procedure	23
6.4.	Test result.....	24
6.5.	Test graphs	25
7.	Carrier Frequency Separation	28
7.1.	Block diagram of test setup	28
7.2.	Limits	28
7.3.	Test procedure	28
7.4.	Test result.....	29
7.5.	Test graphs	30
8.	Dwell Time.....	31

8.1.	Block diagram of test setup	31
8.2.	Limits	31
8.3.	Test procedure	31
8.4.	Test result.....	32
8.5.	Test graphs	33
9.	Number of Hopping Channel.....	39
9.1.	Block diagram of test setup	39
9.2.	Limits	39
9.3.	Test procedure	39
9.4.	Test result.....	40
9.5.	Test graphs	41
10.	Band Edge Compliance (Conducted Method).....	42
10.1.	Block diagram of test setup	42
10.2.	Limit.....	42
10.3.	Test procedure	42
10.4.	Test result.....	43
10.5.	Test graphs	44
11.	RF Conducted Spurious Emissions.....	48
11.1.	Block diagram of test setup	48
11.2.	Limits	48
11.3.	Test procedure	48
11.4.	Test result.....	49
11.5.	Test graphs	50
12.	Duty cycle.....	59
12.1.	Block diagram of test setup	59
12.2.	Limit.....	59
12.3.	Test procedure	59
12.4.	Test result.....	60
12.5.	Test graphs	61
13.	Antenna Requirements.....	64
13.1.	Limit.....	64
13.2.	Result	64
14.	Radiated Emission	65
14.1.	Test equipment.....	65
14.2.	Block diagram of test setup	67
14.3.	Limits	68
14.4.	Assistant equipment used for test	70
14.5.	Test procedure	70

14.6.	Test result.....	72
14.7.	Test data	72
15.	Band Edge Compliance.....	96
15.1.	Test equipment.....	96
15.2.	Block diagram of test setup	97
15.3.	Limits	97
15.4.	Assistant equipment used for test	97
15.5.	Test procedure	97
15.6.	Test result.....	97
15.7.	Test data	98
16.	Power Line Conducted Emissions.....	110
16.1.	Test equipment.....	110
16.2.	Block diagram of test setup	110
16.3.	Limits	110
16.4.	Assistant equipment used for test	110
16.5.	Test procedure	111
16.6.	Test result.....	111
17.	Test Setup Photograph	112
18.	Photos of the EUT	118

Test Report Declare

Applicant	:	AUMOVIO Aftermarket GmbH
Address of Applicant	:	Guerickestrasse 7, Frankfurt am Main, Hessen, D-60488, Germany
Equipment under Test	:	Radio
Model No.	:	CR4512UBA-OR, TR4512UBA-OR, CRD4512UBA-KOM, CR4512UBA/AGC, CRD4512UBA/AGC, CRD4512UBA/KOM, CRD4512UBA/SDF, CRD4612UBA, CR4612UBA, CRD4612UBA/PRI, CRD4612UBA-MANI, CRD4512UBA-OR
Manufacturer	:	Huizhou Foryou General Electronics Co., Ltd.
Address of Manufacturer	:	No. 2 District A, Foryou Industry Park, No. 1 North Shangxia Road, Dongjiang Hi-tech Industry Park, 516005 Huizhou city, Guangdong Province, China(PROC)

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C,
ANSI C63.10:2020

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE25121229-2E01		
Date of Receipt:	2025/08/25 2026/07/10	Date of Test:	2025/08/25 - 2025/09/05 2026/07/12

Created: Jacky Huang	Reviewed: Johnson Huang	Approved: Damon Hu
		
2025/12/31	2026/08/04	2026/08/05

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2026/08/05	Damon Hu

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	Maximum Peak Output Power	FCC Part 15: 15.247(b)(1)	/	Pass
2	20 dB Bandwidth	FCC Part 15: 15.247(a)(1)	/	Pass
3	Carrier Frequency Separation	FCC Part 15: 15.247(a)(1)	/	Pass
4	Number of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii)	/	Pass
5	Dwell Time	FCC Part 15: 15.247(a)(1)(iii)	/	Pass
6	RF Conducted Spurious Emissions	FCC Part 15: 15.247(d)	/	Pass
7	Radiated Emission	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d)	/	Pass
8	Band Edge Compliance	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d)	/	Pass
9	Power Line Conducted Emissions	FCC Part 15: 15.207(a)	/	N/A
10	Antenna Requirement	FCC Part 15: 15.203	/	Pass

Note 1: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.

Note 2: This report adds 11 new series models based on the original report. Compared with the original model: CRD4512UBA-OR, These new models compare to original model, have reduced the DAB function, or the screen, or key board (including appearance and PCB board). The color of the panel display also different. The Bluetooth module and antenna are exactly the same. These differences do not affect the RF performance. Based on engineering judgment that only Radiated Emission (below 1 GHz) might affect, and tests were conducted.. Other test data was cited from the original report: DDT-RE25081333-2E01. For specific model differences, please refer to the appendix.

2. General Test Information

2.1. Description of EUT

EUT Name	:	Radio
Model Number	:	CR4512UBA-OR, TR4512UBA-OR, CRD4512UBA-KOM, CR4512UBA/AGC, CRD4512UBA/AGC, CRD4512UBA/KOM, CRD4512UBA/SDF, CRD4612UBA, CR4612UBA, CRD4612UBA/PRI, CRD4612UBA-MANI, CRD4512UBA-OR
Difference of model number	:	Compare with model CRD4512UBA-OR, other models have reduced the DAB function, or the screen, or key board (including appearance and PCB board). The color of the panel display also different. The Bluetooth module and antenna are exactly the same. The main test model is CRD4512UBA-OR. For specific model differences, please refer to the appendix.
EUT Function Description	:	Please reference user manual of this device
Power Supply	:	DC 12V
Antenna Type	:	PCB antenna
Max Antenna Gain (dBi)	:	1.06

Radio Specification	:	Bluetooth BR/EDR
Operation Frequency	:	2402 MHz to 2480 MHz
Modulation	:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Rate	:	1 Mbps, 2 Mbps, 3 Mbps

Bluetooth BR/EDR Channel information

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471


16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454	/	
26	2428	53	2455	/	

Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
/	/	/	/

2.3. Block diagram of EUT configuration for test



2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: Bluetest3.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5 dB (According to the manufacturer's claims)

Tested mode, Tx Power Setting, Channel, and Frequency			
Tested mode	Tx Power Setting	Channel	Frequency (MHz)
GFSK hopping on Tx mode	Default	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	Default	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	Default	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	Default	CH0	2402
	Default	CH39	2441
	Default	CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	Default	CH0	2402
	Default	CH39	2441
	Default	CH78	2480
8DPSK hopping off Tx mode	Default	CH0	2402
	Default	CH39	2441
	Default	CH78	2480

Note: According exploratory test, EUT will have maximum output power in those data rate, worst-case data rates were: GFSK mode: DH5, $\pi/4$ -DQPSK mode: 2DH5, 8DPSK mode: 3DH5

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method)
	5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
	1.66 dB ($8 \text{ GHz} \leq f < 26.5 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date	Cal. Interval
☒ RF Connected Test (RF Measurement System 1#)					
SIGNAL ANALYZER	R&S	FSQ26	101272	2026/03/28	1 Year
Wideband Radio Communication Tester	R&S	CMW500	117491	2026/03/28	1 Year
MXG Vector Signal Generator	KEYSIGHT	N5182B	MY59100192	2026/03/28	1 Year
MXG Vector Signal Generator	Agilent	N5182A	MY19060405	2026/03/28	1 Year
RF Control Unit	Tonscend	JS0806-2	158060010	2026/03/28	1 Year
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2026/03/28	1 Year
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A	N/A

4. 20 dB Bandwidth

4.1. Block diagram of test setup

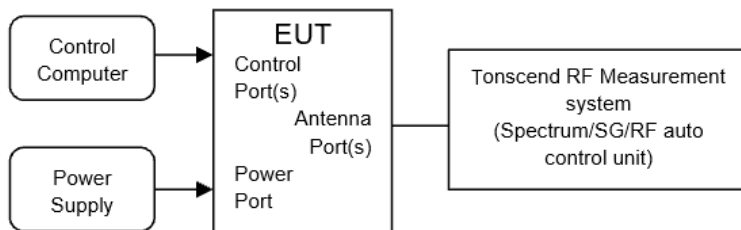

4.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 6.9.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 20 dB bandwidth measurement:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 2 times and 5 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold


- (5) Measure and record the results in the report.


4.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	27.8℃, 39%RH	Test Date:	2025.08.27-2025.09.04
Test Power Supply:	DC 12V	Sample Number:	S25081333-002

Test Mode	Antenna	Frequency [MHz]	20dB EBW [MHz]
DH5	Ant1	2402	0.96
		2441	0.96
		2480	0.98
2DH5	Ant1	2402	1.34
		2441	1.35
		2480	1.34
3DH5	Ant1	2402	1.31
		2441	1.33
		2480	1.31

4.5. Test graphs

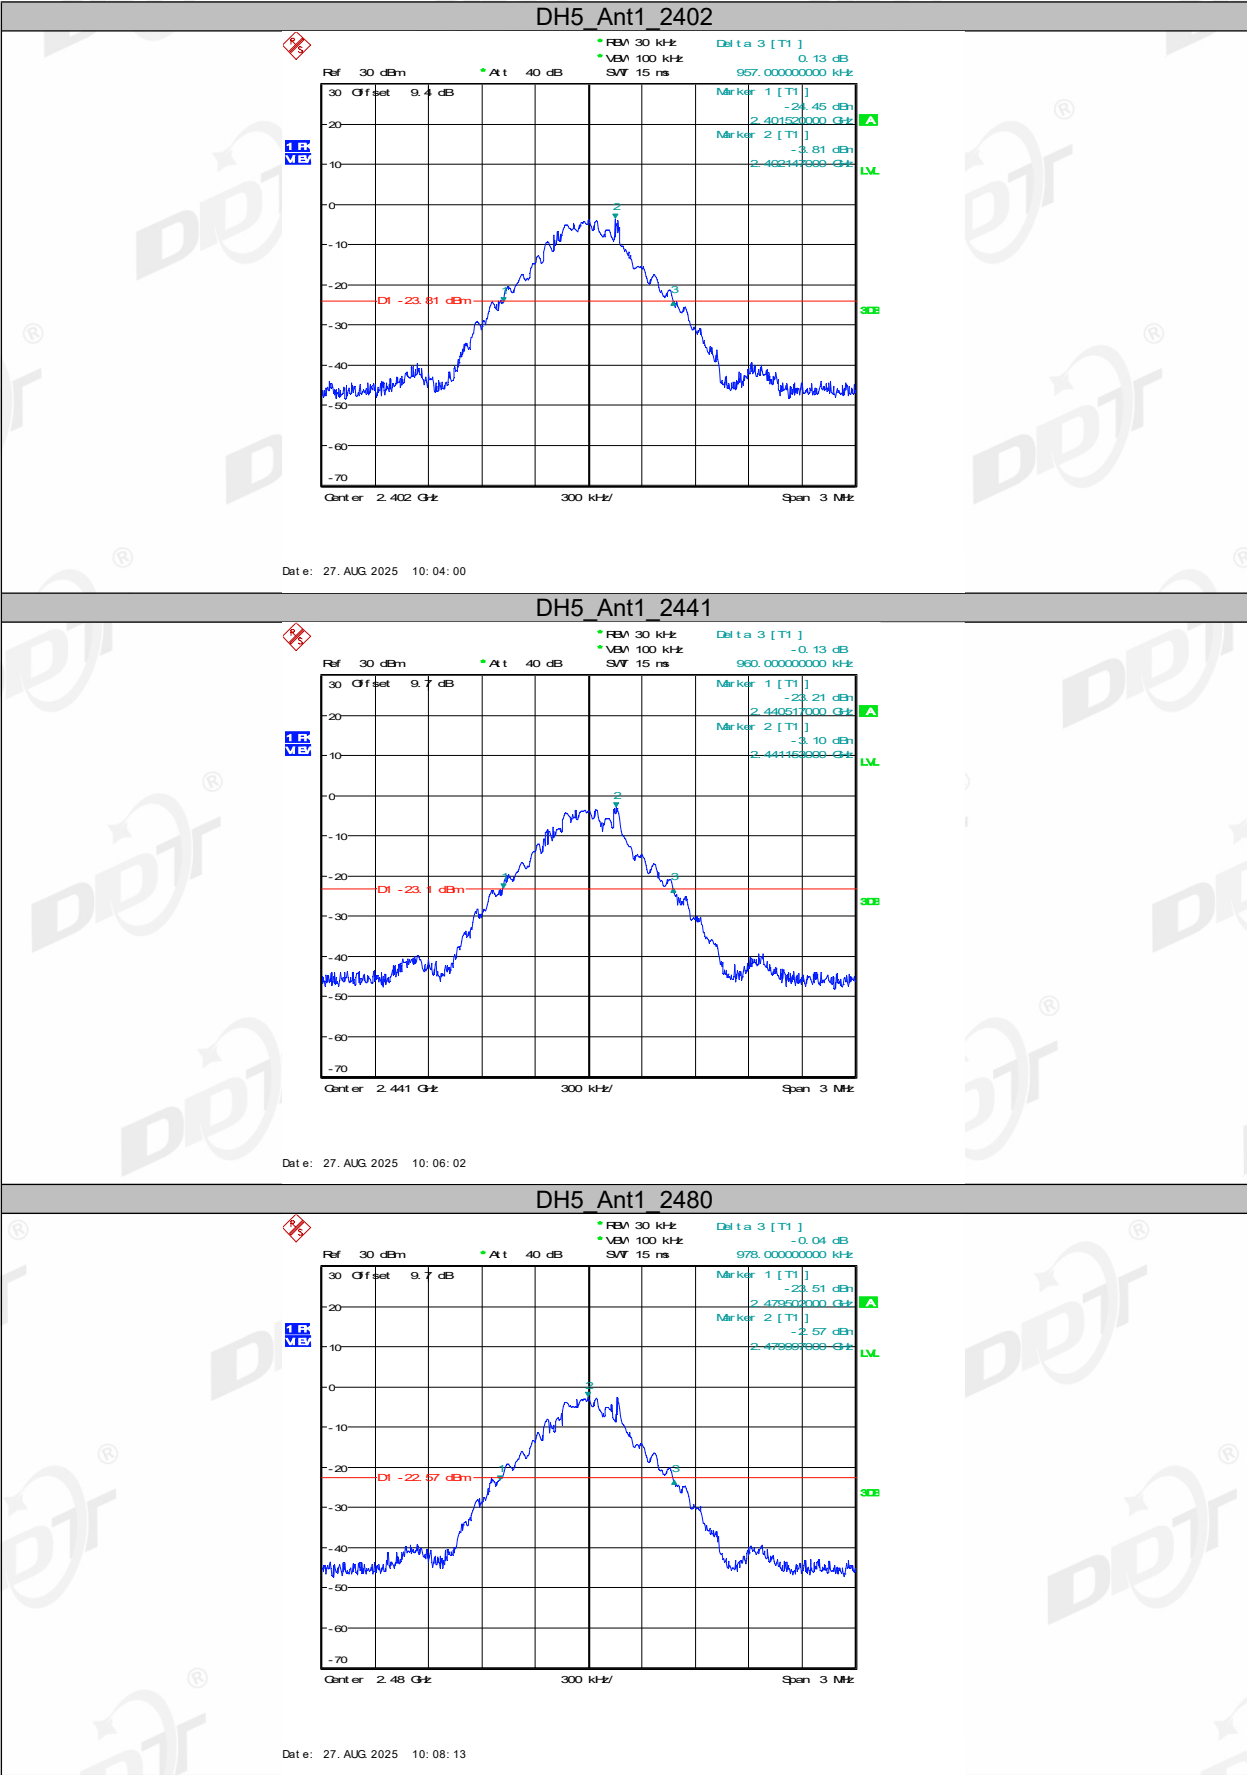

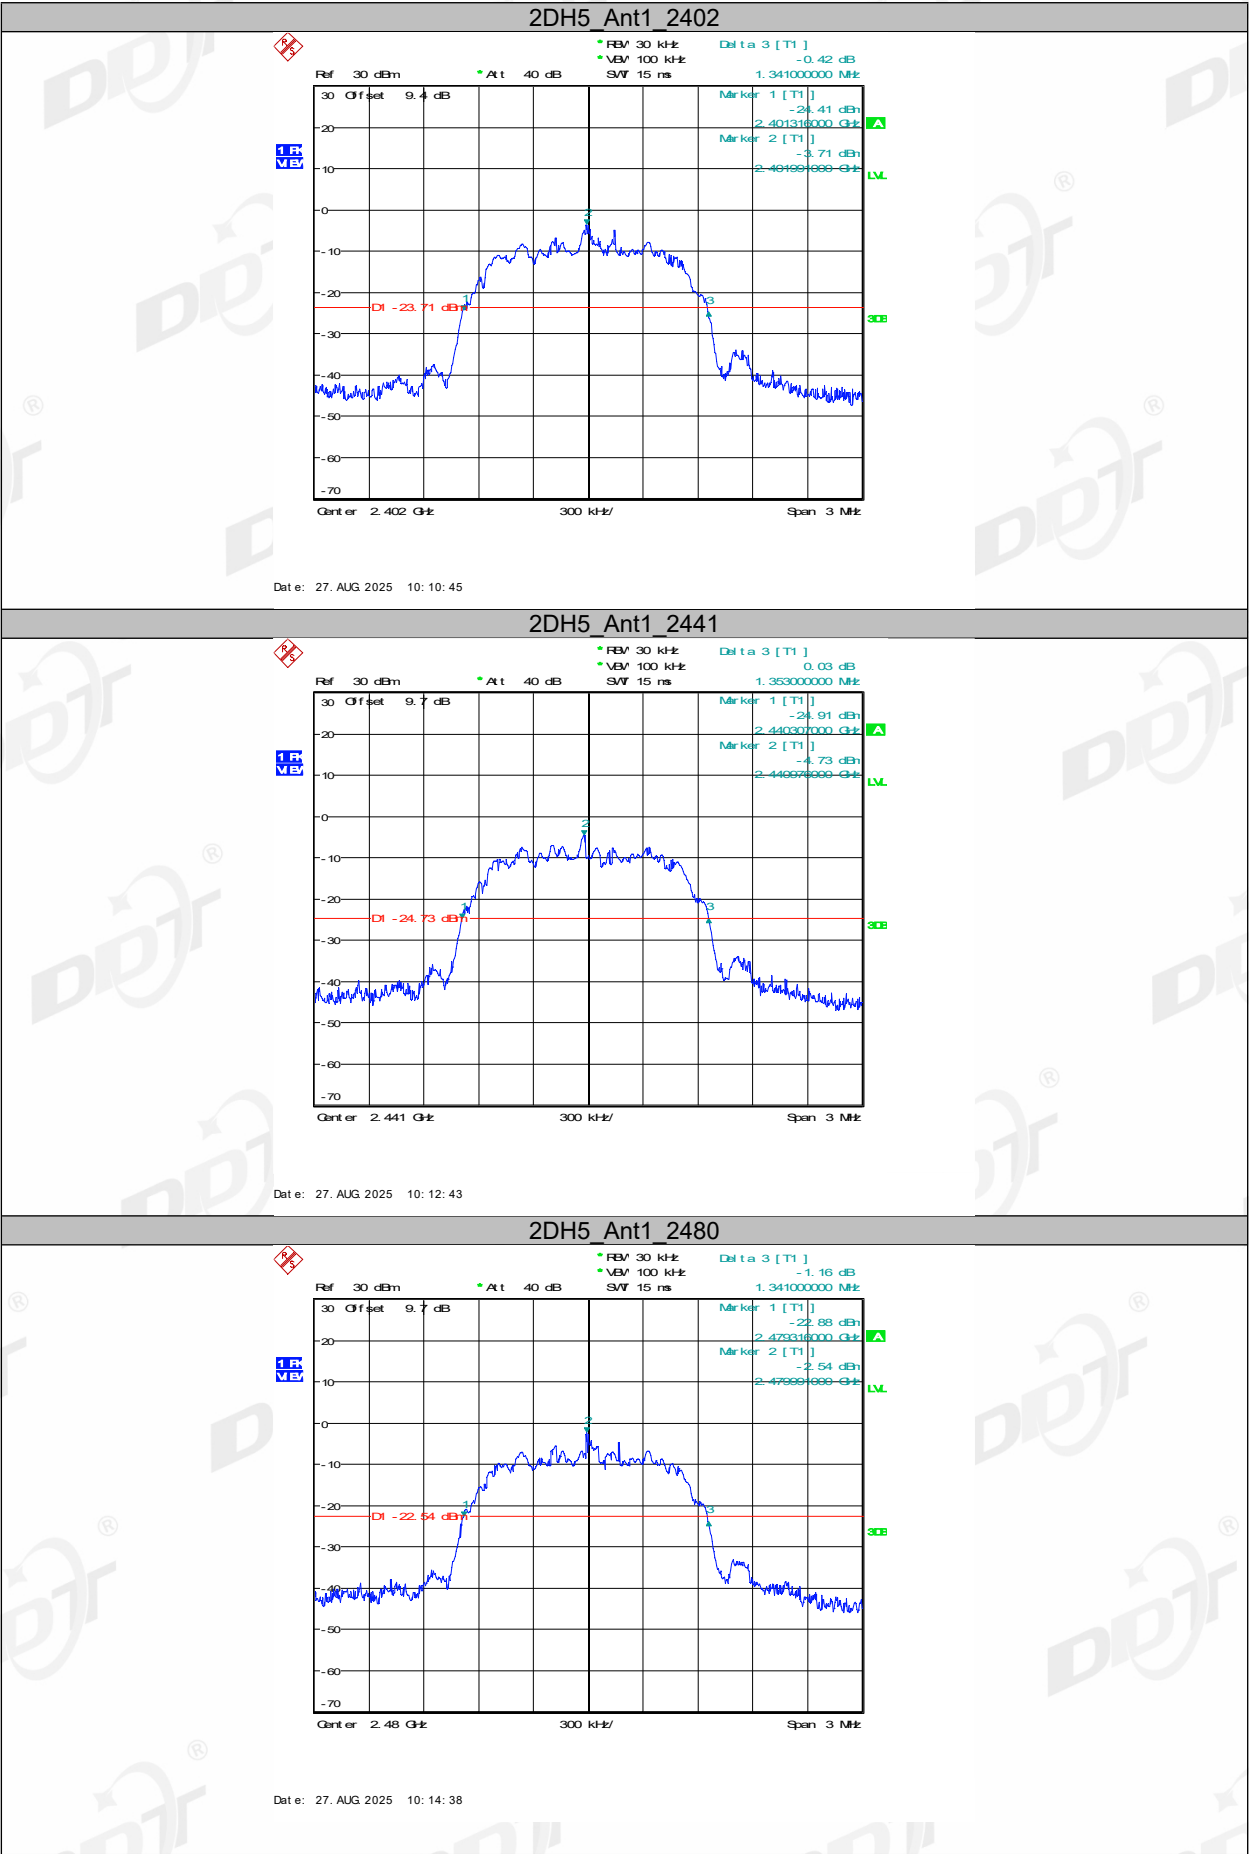

2DH5_Ant1_2441

Ref 30 dBm

Alt 40 dB

RBW 30 kHz

VBW 100 kHz

SMF 15 ns

Delta 3 [T1]

0.03 dB

1.353000000 MHz

Marker 1 [T1]

-24.91 dBm

2.440301000 GHz

Marker 2 [T1]

-4.73 dBm

2.440674666 GHz

DI -24.73 dBm

3dB

1.5

1.5

30

Offset 9.7 dB

20

10

0

-10

-20

-30

-40

-50

-60

-70

Center 2.441 GHz

300 kHz

Span 3 MHz

Date: 27. AUG 2025 10:12:43

2DH5_Ant1_2480

Ref 30 dBm

Alt 40 dB

RBW 30 kHz

VBW 100 kHz

SMF 15 ns

Delta 3 [T1]

-1.16 dB

1.341000000 MHz

Marker 1 [T1]

-22.88 dBm

2.479318000 GHz

Marker 2 [T1]

-2.54 dBm

2.479691666 GHz

DI -22.54 dBm

3dB

1.5

1.5

30

Offset 9.7 dB

20

10

0

-10

-20

-30

-40

-50

-60


-70

Center 2.48 GHz

300 kHz


Span 3 MHz

Date: 27. AUG 2025 10:14:38

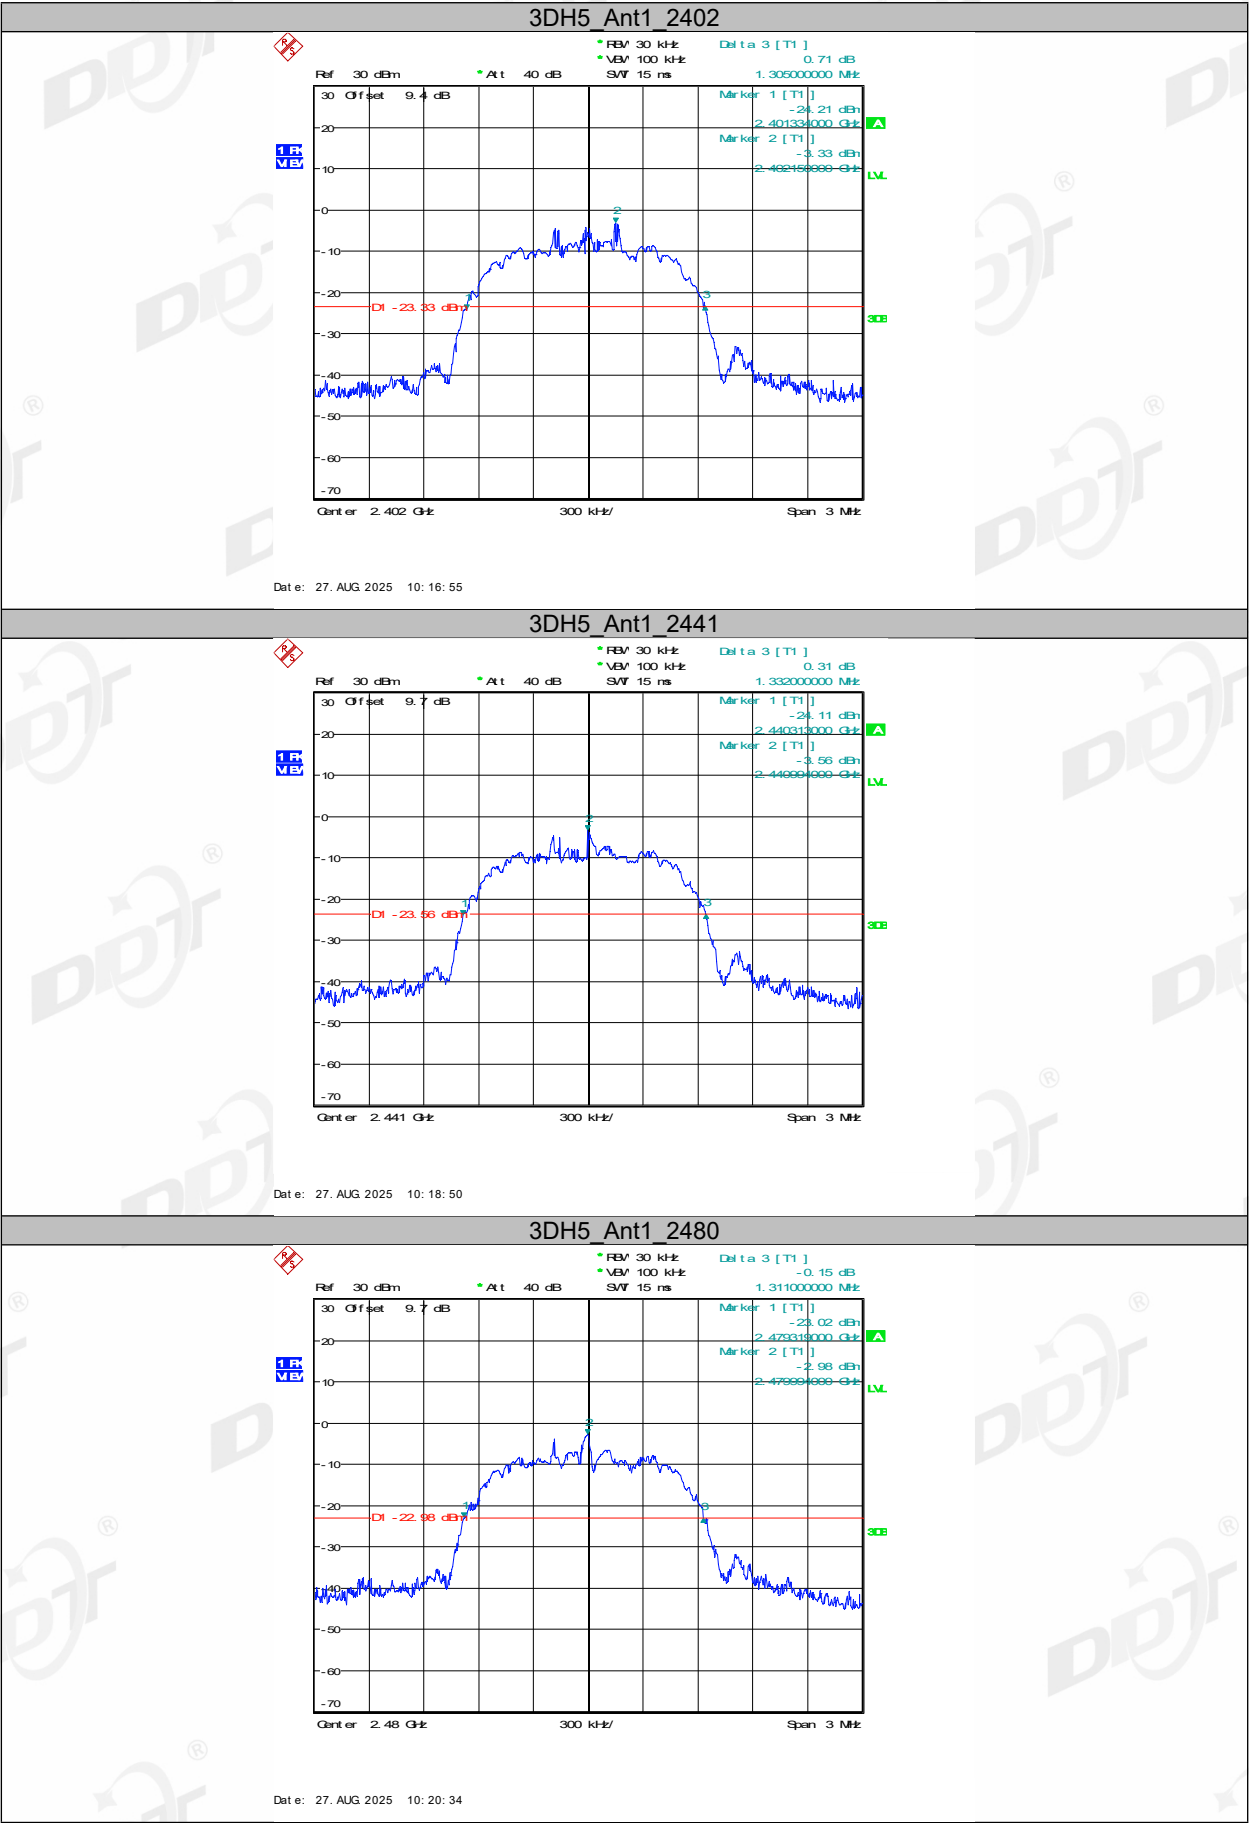

5. 99% Bandwidth

5.1. Block diagram of test setup

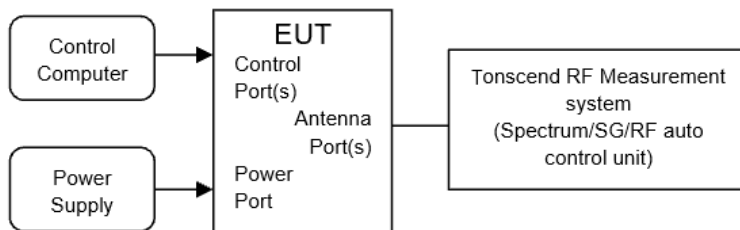

5.2. Limits

Just for Report.

5.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% bandwidth measurement:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold

- (5) Measure and record the results in the report.

5.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	27.8℃, 39%RH	Test Date:	2025.08.27-2025.09.04
Test Power Supply:	DC 12V	Sample Number:	S25081333-002

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]
DH5	Ant1	2402	0.89400	2401.5440	2402.4380
		2441	0.89100	2440.5410	2441.4320
		2480	0.89100	2479.5410	2480.4320
2DH5	Ant1	2402	1.2060	2401.3850	2402.5910
		2441	1.2030	2440.3850	2441.5880
		2480	1.2270	2479.3760	2480.6030
3DH5	Ant1	2402	1.2000	2401.3850	2402.5850
		2441	1.2120	2440.3760	2441.5880
		2480	1.2270	2479.3700	2480.5970

DH5 Ant1_2402

Ref: 30 dBm, Att: 40 dB, S/W: 15 ns, Marker: 1 [T1] -3.76 dB, 2.402150000 GHz

CEV: 30 kHz, VEM: 100 kHz

Temp: 1 [T1] 0.000000000 kHz -21.52 dBm, 2.401540000 GHz

Temp: 2 [T1] 0.000000000 kHz -22.46 dBm, 2.402438000 GHz

Center: 2.402 GHz, Span: 3 MHz

Date: 27. AUG 2025 10:04:08

DH5 Ant1_2441

Ref: 30 dBm, Att: 40 dB, S/W: 15 ns, Marker: 1 [T1] -3.22 dB, 2.441150000 GHz

CEV: 30 kHz, VEM: 100 kHz

Temp: 1 [T1] 0.000000000 kHz -19.06 dBm, 2.440540000 GHz

Temp: 2 [T1] 0.000000000 kHz -20.36 dBm, 2.441432000 GHz

Center: 2.441 GHz, Span: 3 MHz

Date: 27. AUG 2025 10:06:09

DH5 Ant1_2480

Ref: 30 dBm, Att: 40 dB, S/W: 15 ns, Marker: 1 [T1] -2.52 dB, 2.480150000 GHz




CEV: 30 kHz, VEM: 100 kHz


Temp: 1 [T1] 0.000000000 kHz -19.16 dBm, 2.479540000 GHz

Temp: 2 [T1] 0.000000000 kHz -20.36 dBm, 2.480432000 GHz

Center: 2.48 GHz, Span: 3 MHz


Date: 27. AUG 2025 10:08:21

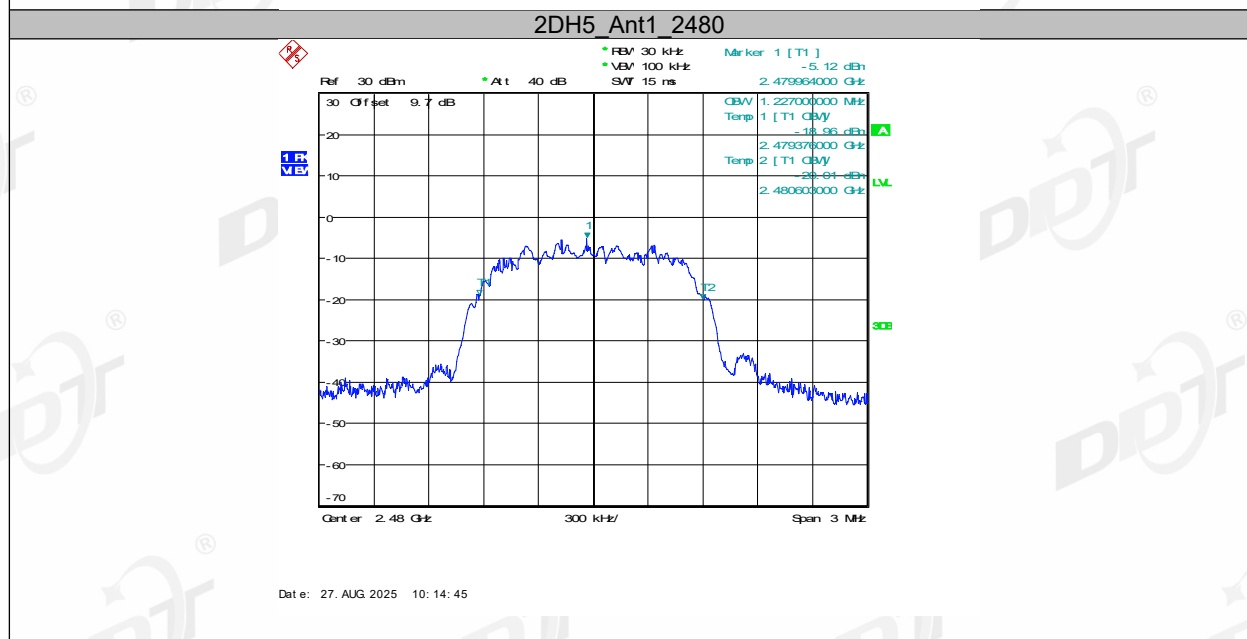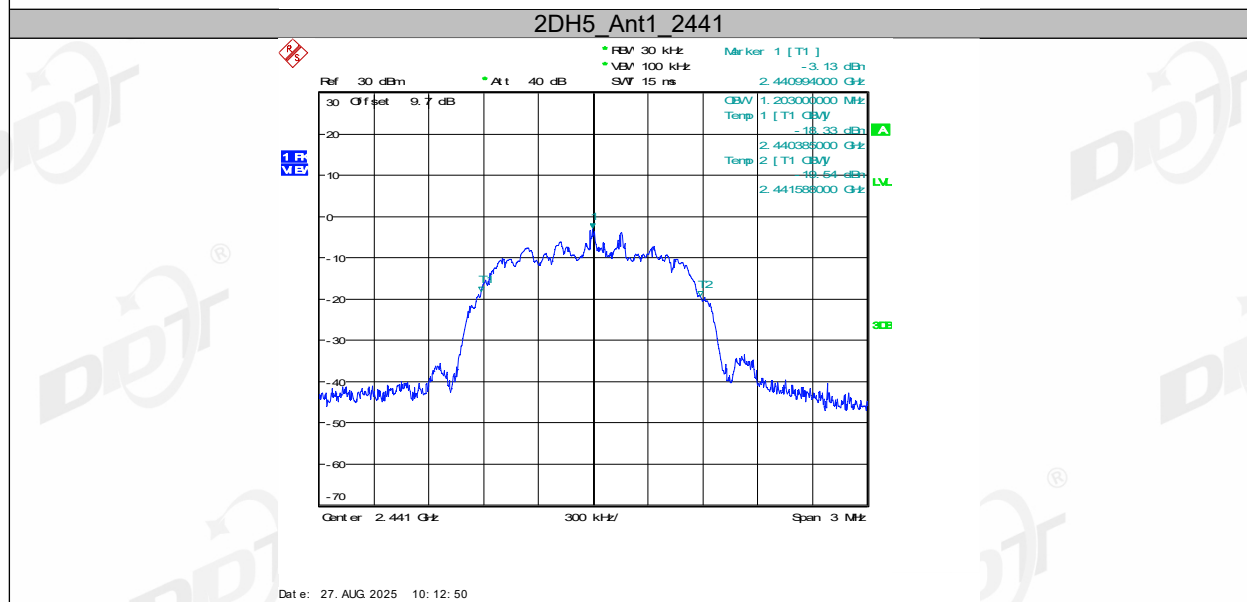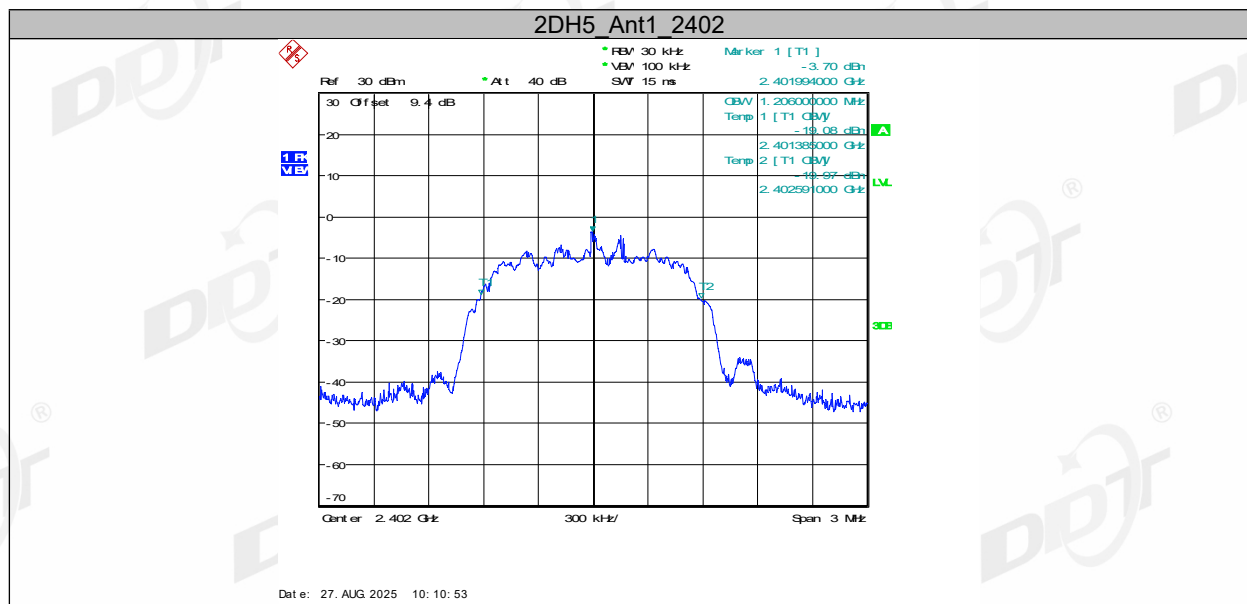

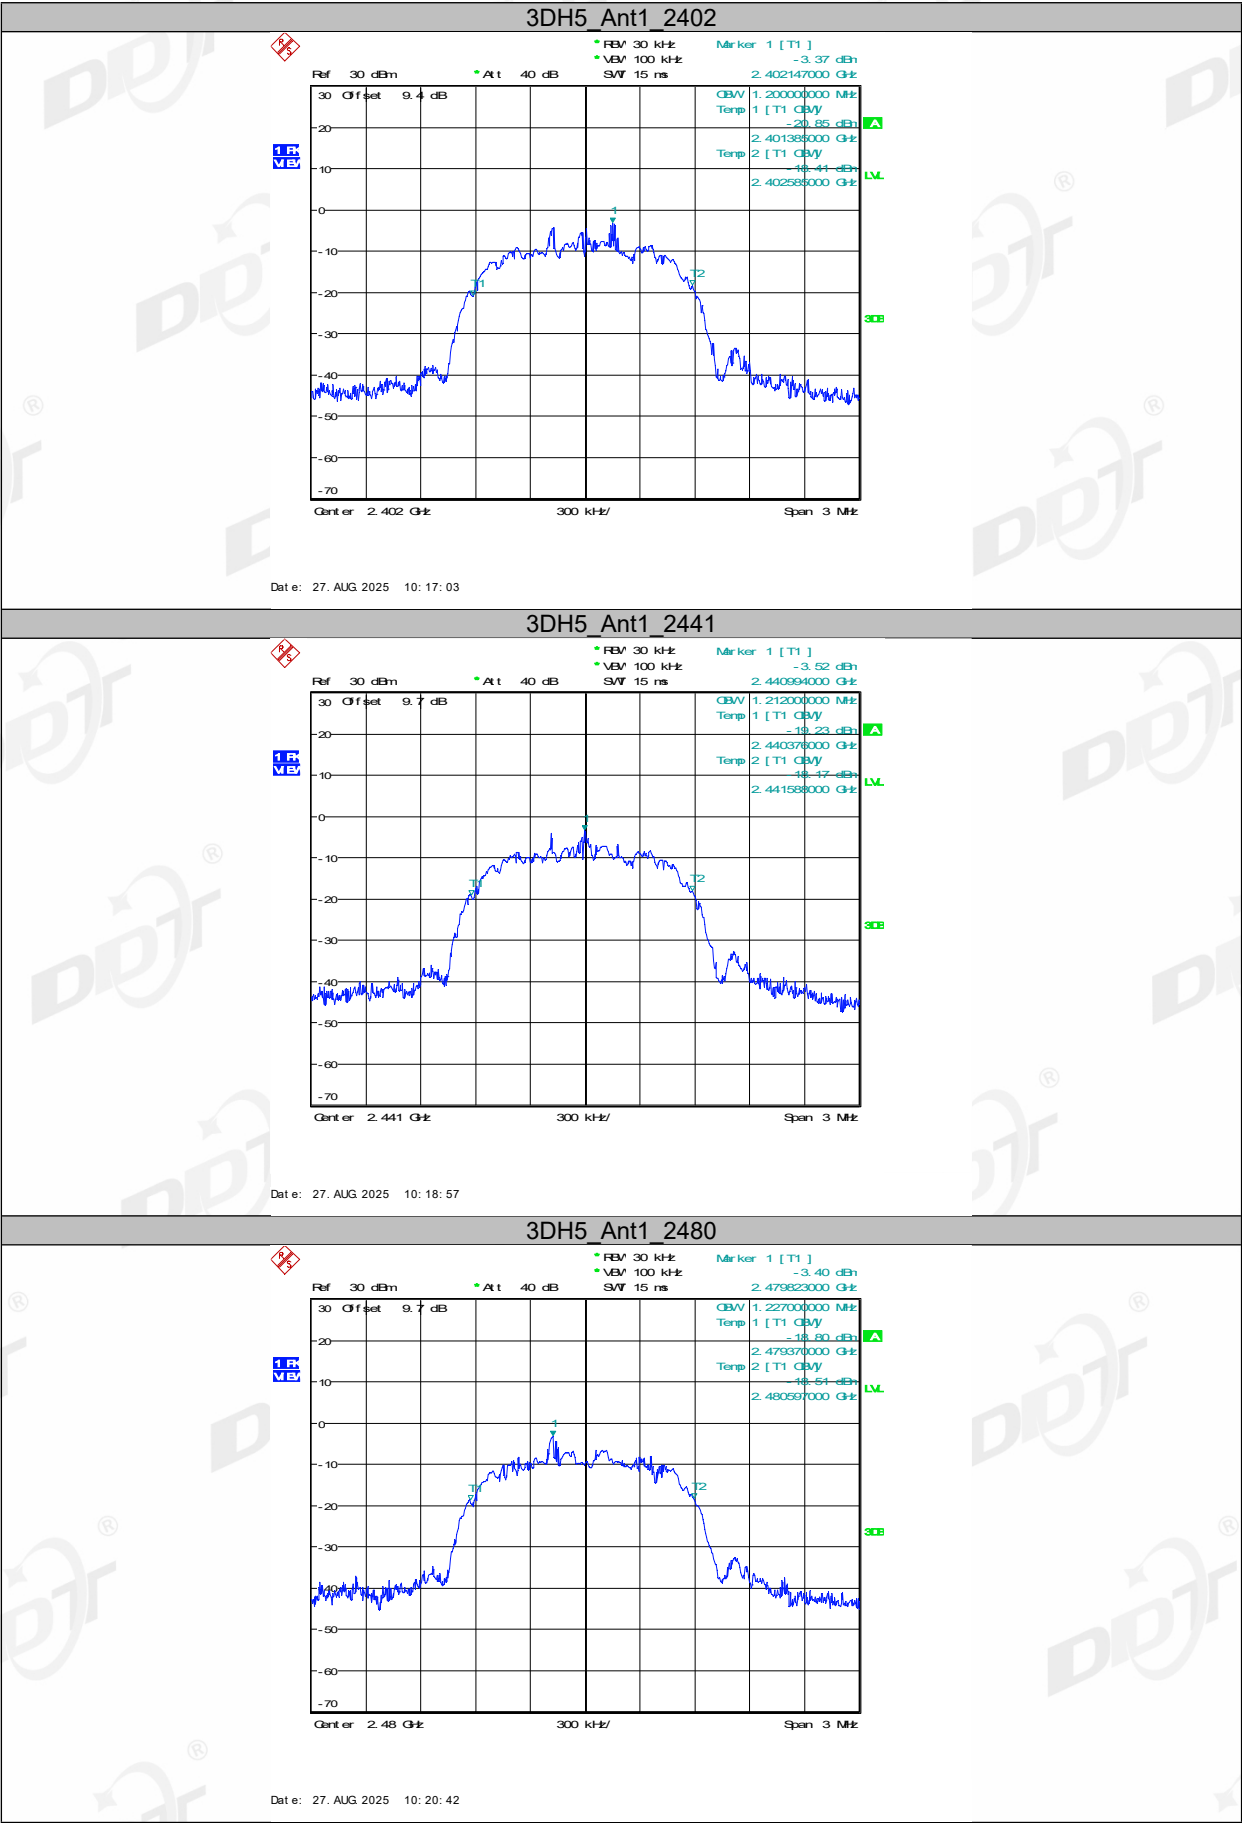

6. Maximum Peak Output Power

6.1. Block diagram of test setup

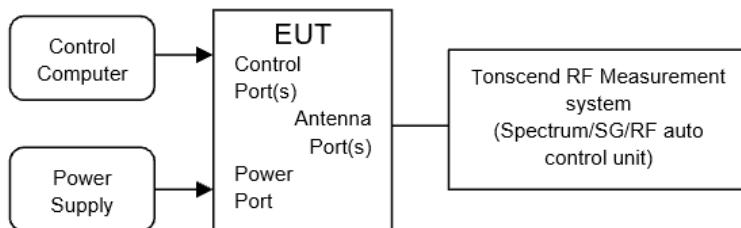

6.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W.

6.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 7.8.5.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:


RBW:	> 20 dB bandwidth of the emission being measured.
VBW:	$VBW \geq RBW$.
Span:	Approximately five times the 20 dB bandwidth, centered on a hopping channel.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Use the marker-to-peak function to set the marker to the peak of the emission and record the results in the report.


6.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	27.8℃, 39%RH	Test Date:	2025.08.27-2025.09.04
Test Power Supply:	DC 12V	Sample Number:	S25081333-002

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
DH5	Ant1	2402	-0.99	≤20.97	0.07	≤30	PASS
		2441	-0.29	≤20.97	0.77	≤30	PASS
		2480	0.32	≤20.97	1.38	≤30	PASS
2DH5	Ant1	2402	1.46	≤20.97	2.52	≤30	PASS
		2441	1.91	≤20.97	2.97	≤30	PASS
		2480	2.53	≤20.97	3.59	≤30	PASS
3DH5	Ant1	2402	1.83	≤20.97	2.89	≤30	PASS
		2441	2.26	≤20.97	3.32	≤30	PASS
		2480	2.68	≤20.97	3.74	≤30	PASS

6.5. Test graphs

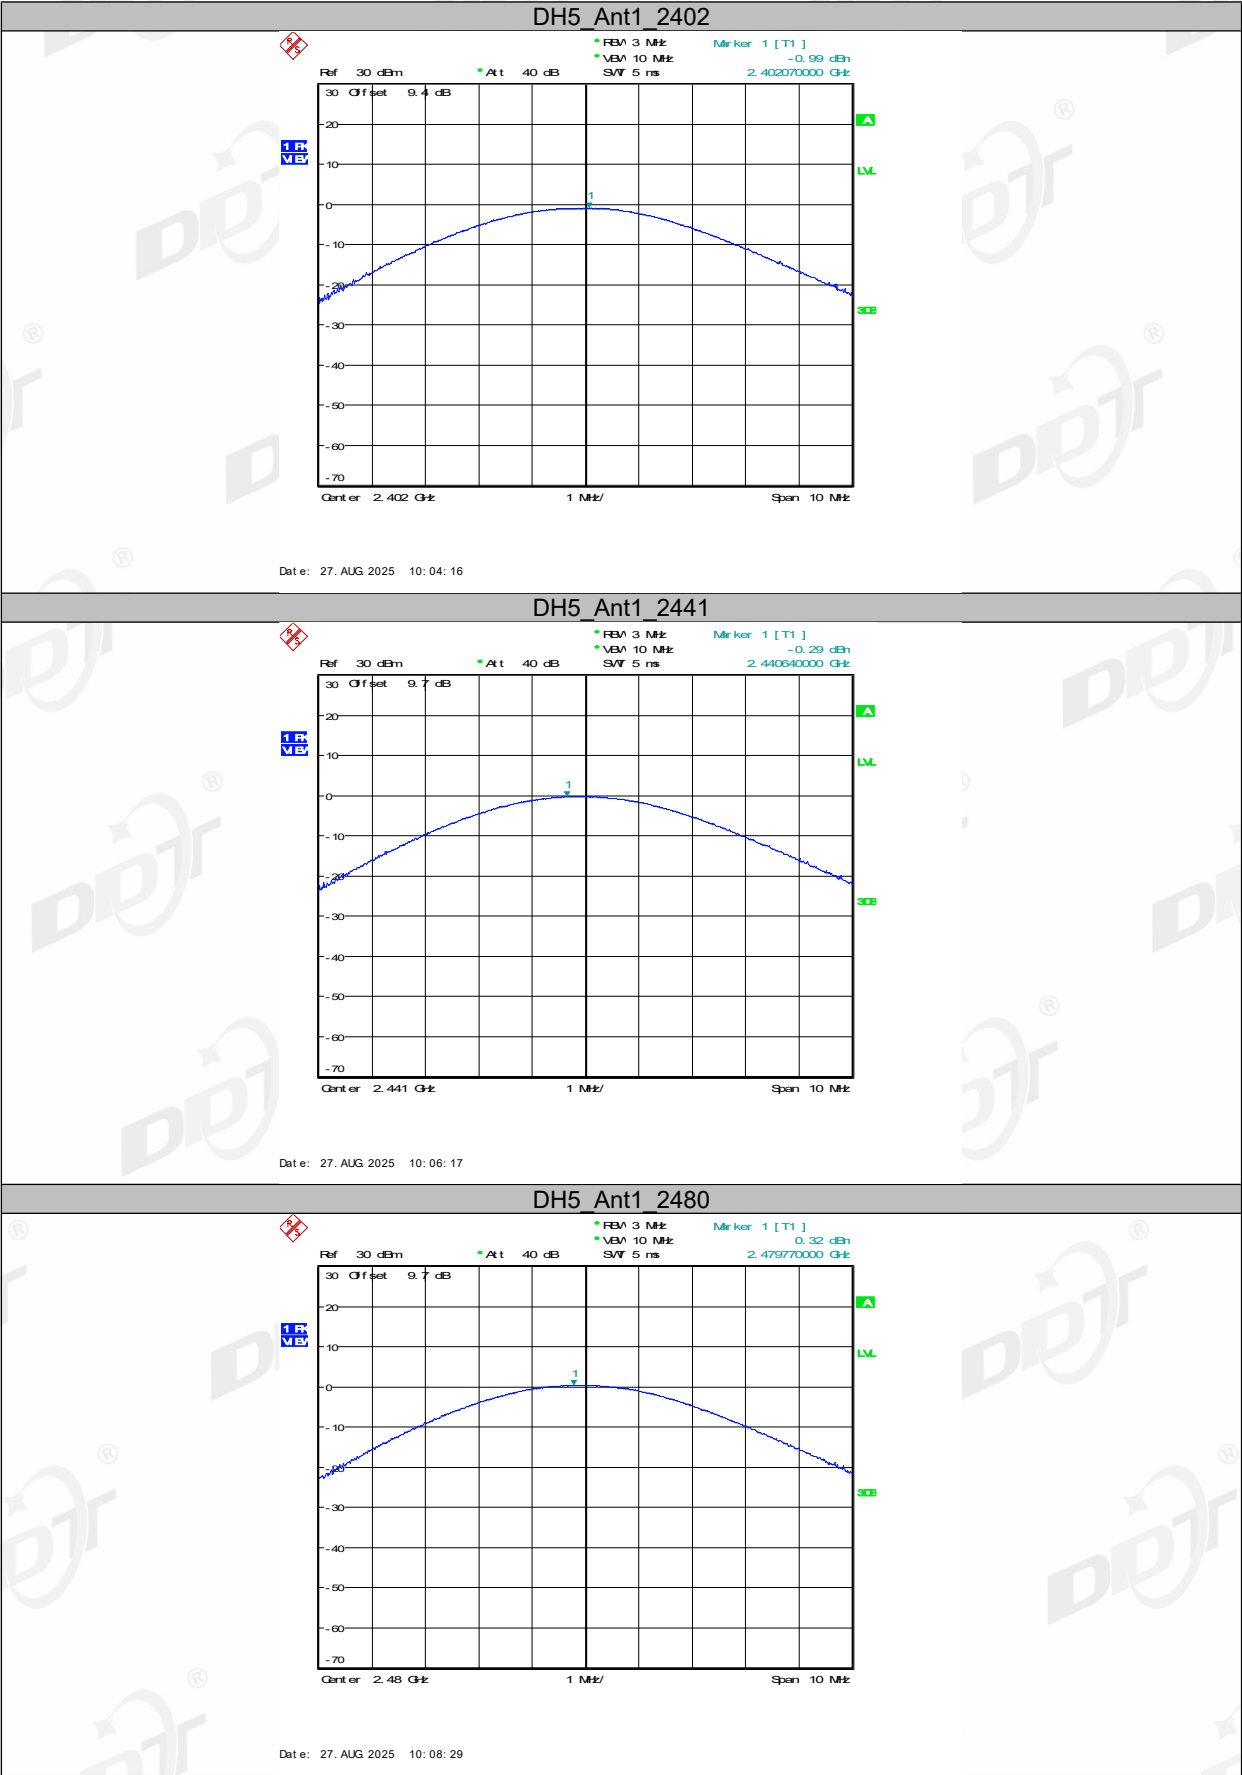


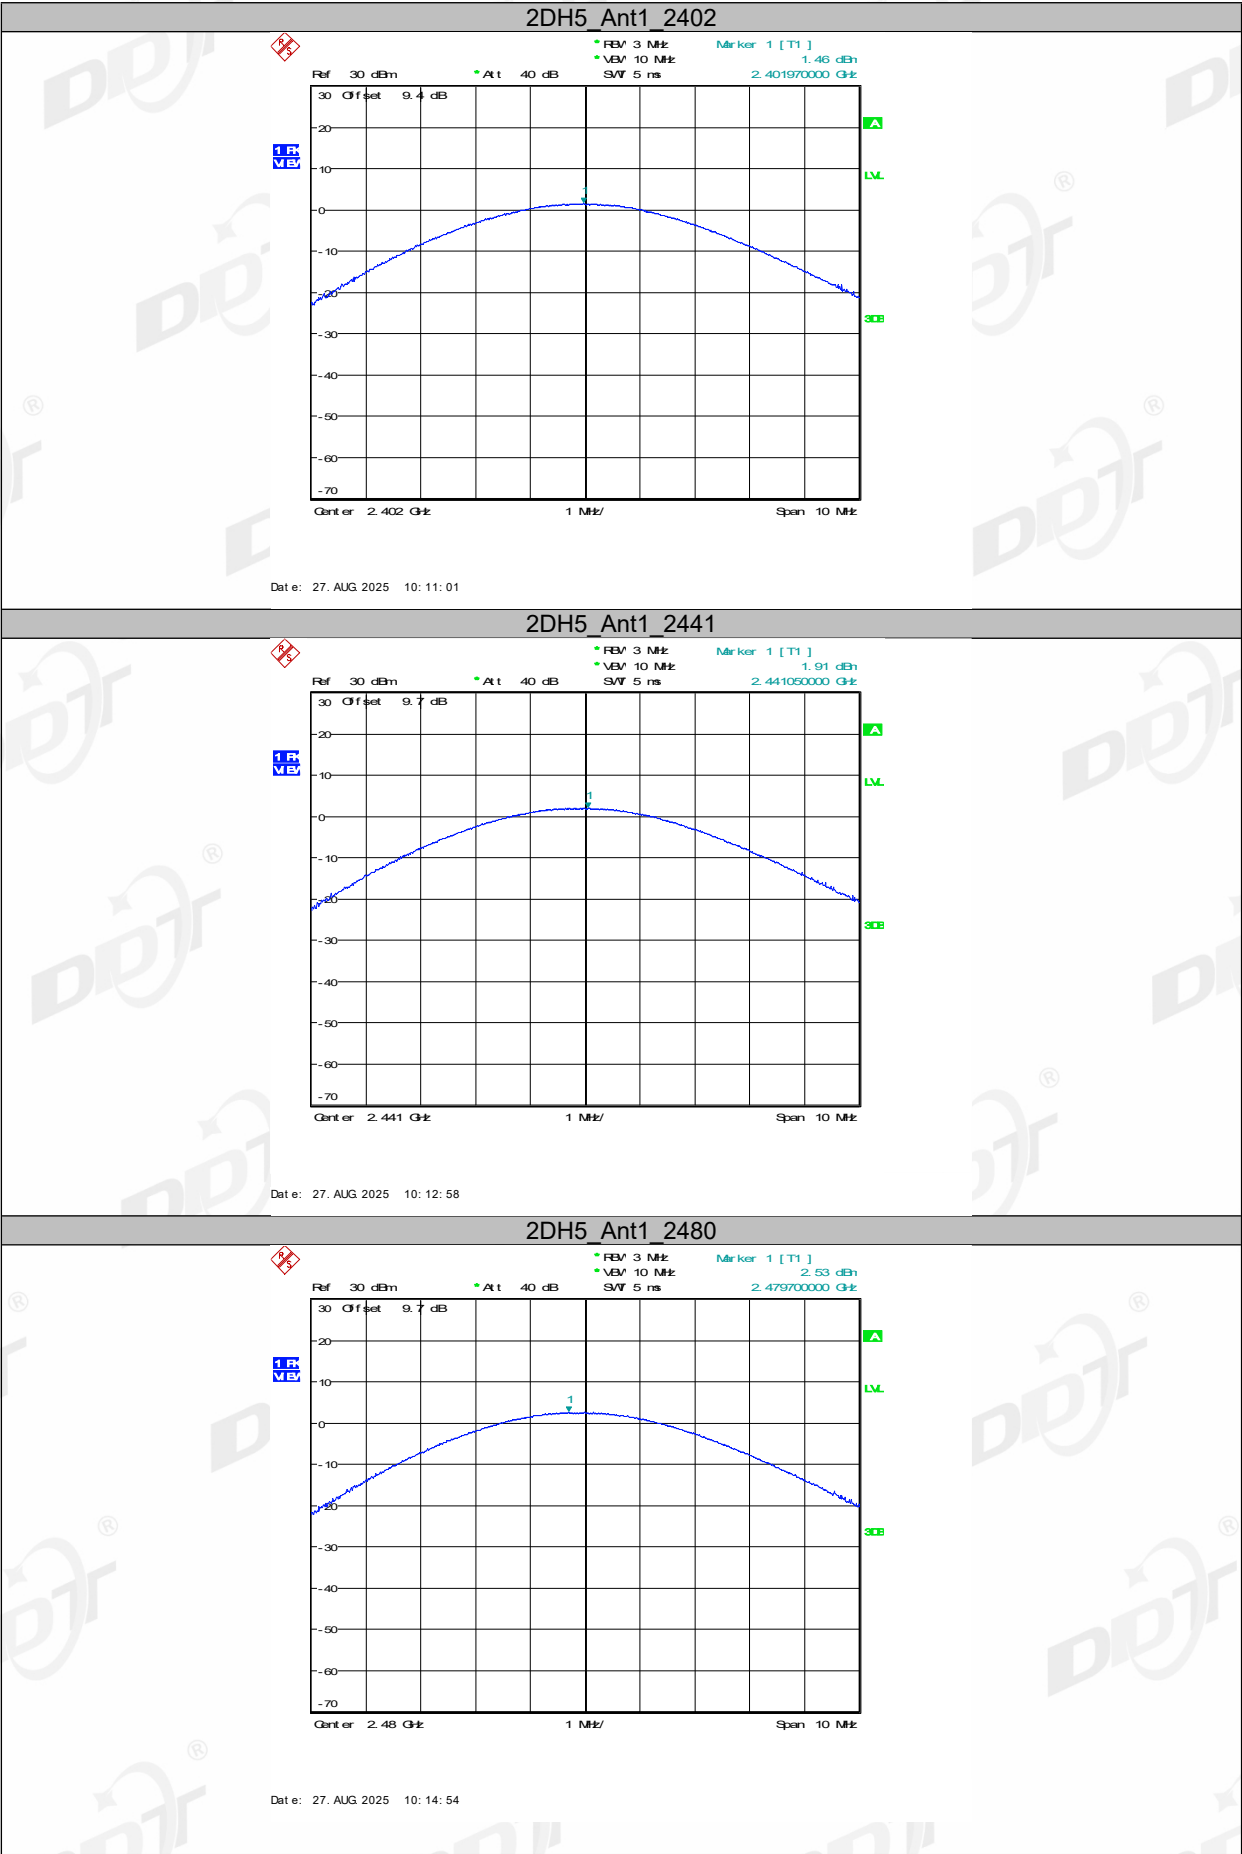



7. Carrier Frequency Separation

7.1. Block diagram of test setup

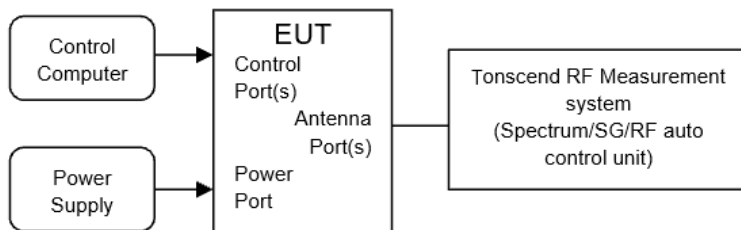

7.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 7.8.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	approximately 30% of the channel spacing
VBW:	$VBW \geq RBW$.
Span:	Wide enough to capture the peaks of two adjacent channels.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold

- (5) Use the marker-delta function to determine the separation between the peaks of the adjacent channels and record the results in the report.

7.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#		
Ambient Condition:	27.8℃, 39%RH	Test Date:	2025.08.27-2025.09.04		
Test Power Supply:	DC 12V	Sample Number:	S25081333-002		


Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Ant1	Hop	1.019	≥0.653	PASS
2DH5	Ant1	Hop	1.054	≥0.900	PASS
3DH5	Ant1	Hop	0.987	≥0.887	PASS

7.5. Test graphs



8. Dwell Time

8.1. Block diagram of test setup

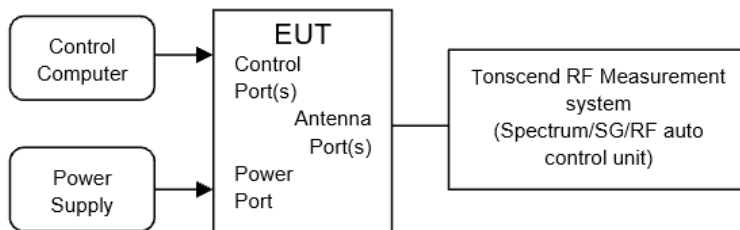

8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 7.8.4.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:


RBW:	≤ channel spacing and where possible RBW should be set $\gg 1/T$
VBW:	$VBW \geq RBW$.
Span:	Zero span, centered on a hopping channel.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Clear Write.
- (5) The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
- (6) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula Dwell time = total hops * pulse's on time.
- (7) Measure and record the results in the report.

8.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	27.8℃, 39%RH	Test Date:	2025.08.27-2025.09.04
Test Power Supply:	DC 12V	Sample Number:	S25081333-002

Test Mode	Antenna	Frequency [MHz]	Burst Width [ms]	Total Hops [Num]	Result [s]	Limit [s]	Verdict
DH1	Ant1	Hop	0.370	320	0.118	≤0.4	PASS
DH3	Ant1	Hop	1.630	160	0.261	≤0.4	PASS
DH5	Ant1	Hop	2.880	107	0.308	≤0.4	PASS
2DH1	Ant1	Hop	0.380	320	0.122	≤0.4	PASS
2DH3	Ant1	Hop	1.630	160	0.261	≤0.4	PASS
2DH5	Ant1	Hop	2.890	107	0.309	≤0.4	PASS
3DH1	Ant1	Hop	0.380	320	0.122	≤0.4	PASS
3DH3	Ant1	Hop	1.630	160	0.261	≤0.4	PASS
3DH5	Ant1	Hop	2.890	107	0.309	≤0.4	PASS

8.5. Test graphs

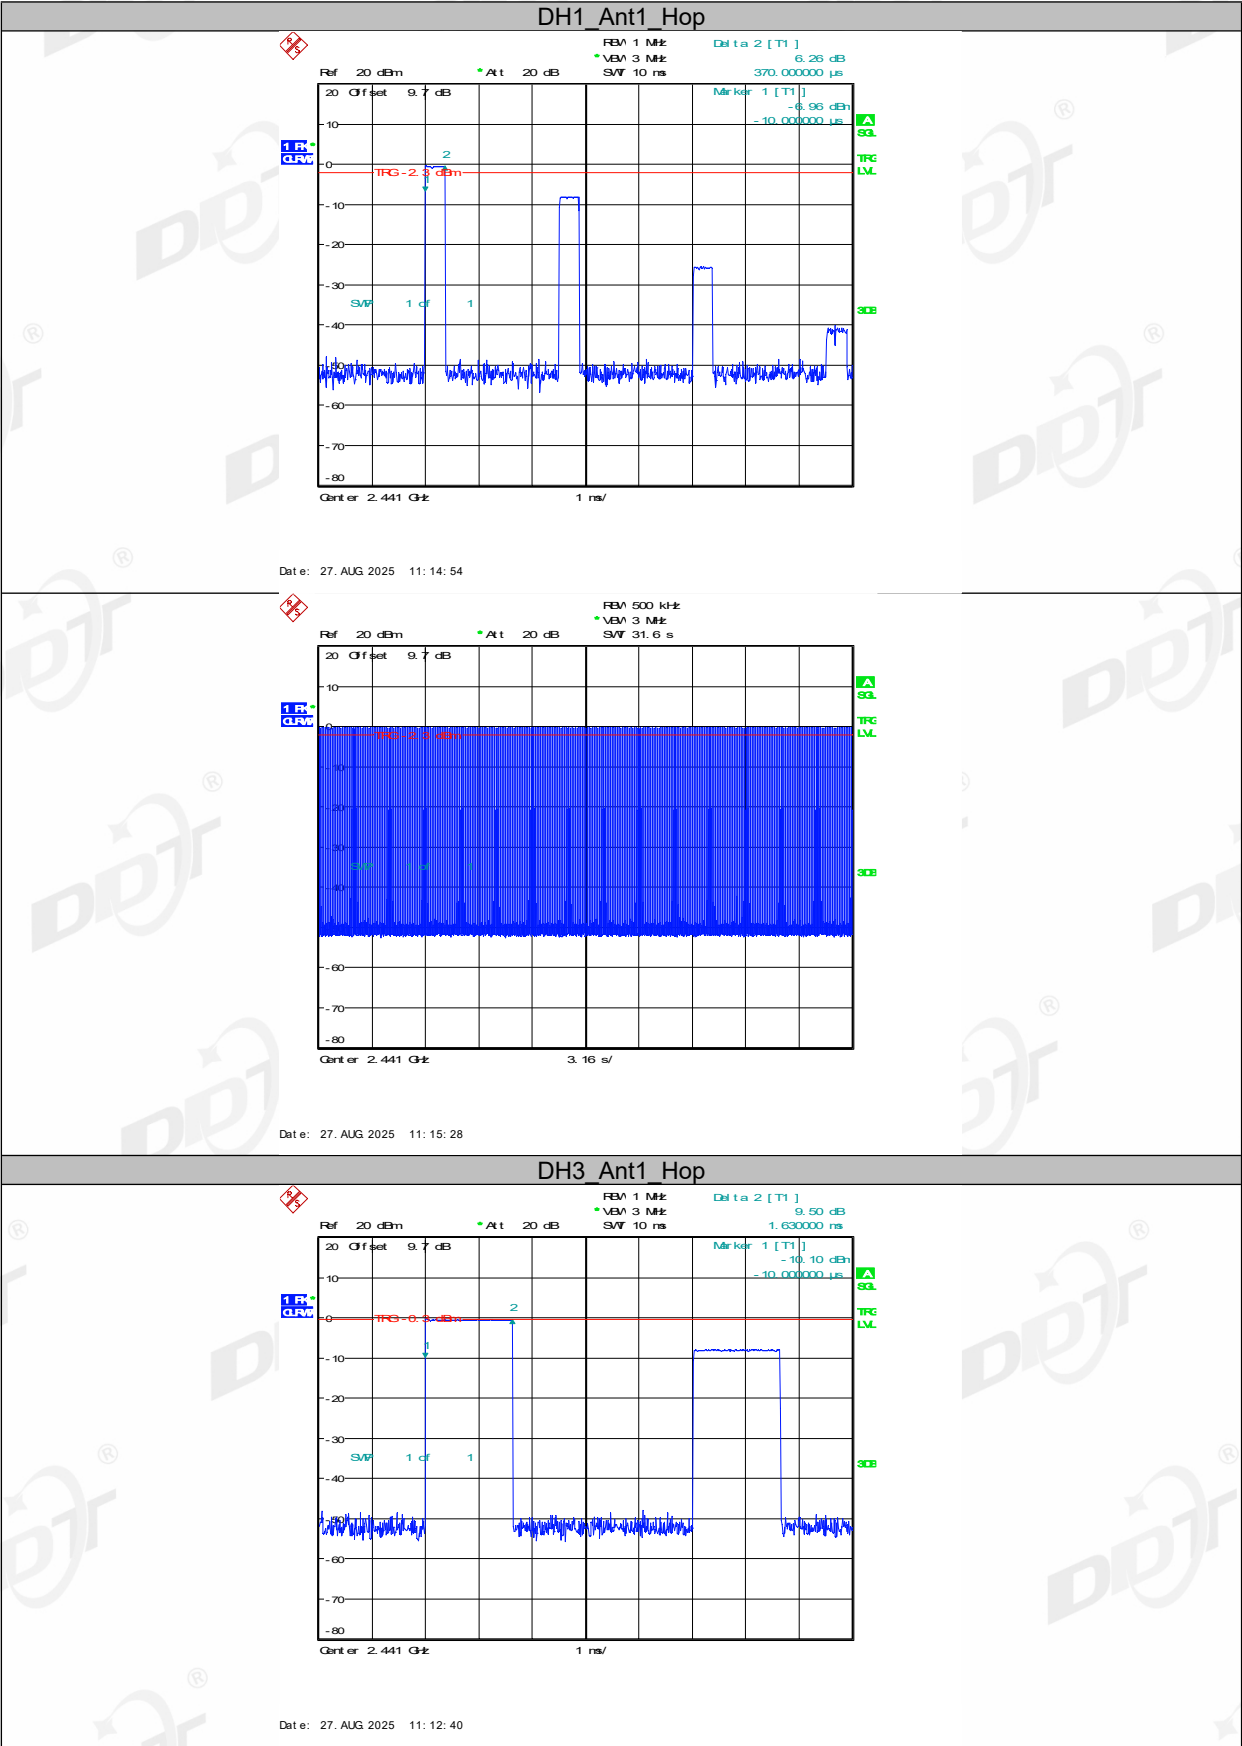

DH3_Ant1_Hop

Ref 20 dBm

Att 20 dB

FBA 1 MHz

VBA 3 MHz

SWF 10 ns

Delta 2 [T1]

9.50 dB

1.630000 ns

20

Offset 9.7 dB

dB

10

0

-10

-20

-30

-40

-50

-60

-70

-80

1 TRG

2

1

1

Marker 1 [T1]

-10.10 dBm

-10.000000 μ s

SA

TRG

LM

3dB




Center 2.441 GHz

1 ns/




Date: 27. AUG 2025 11:12:40





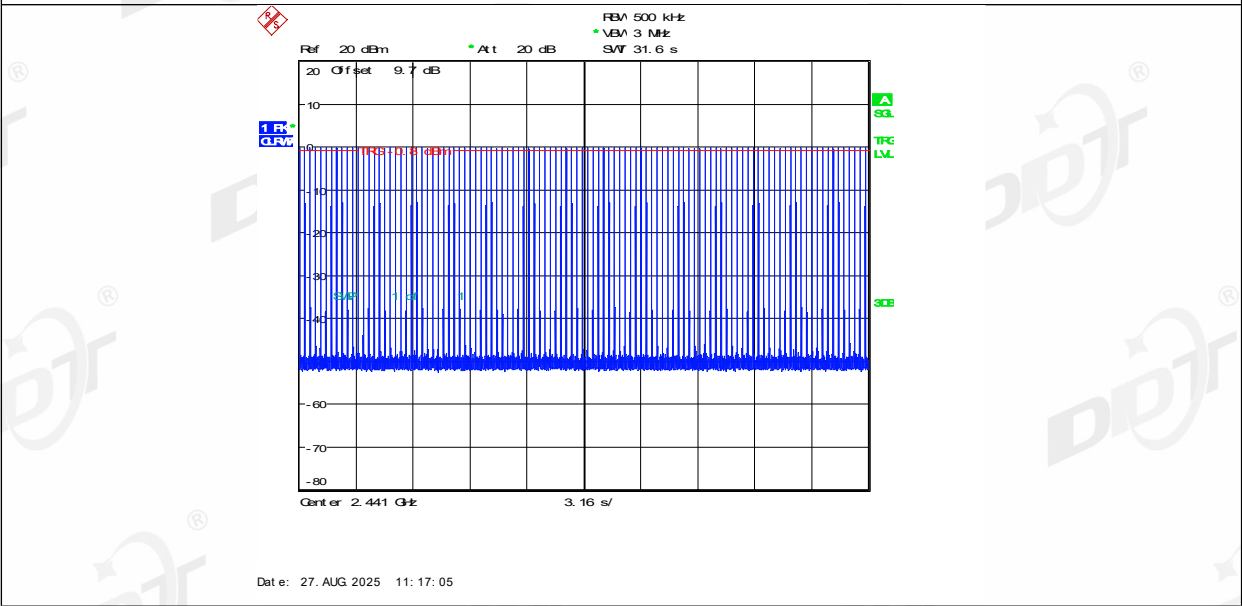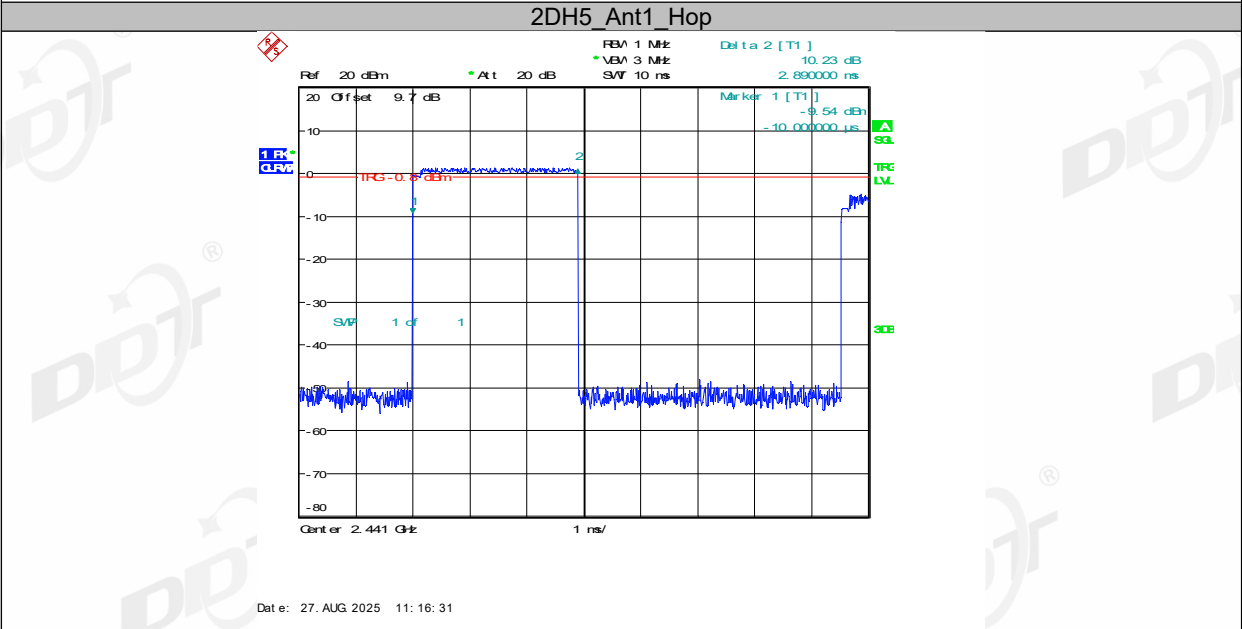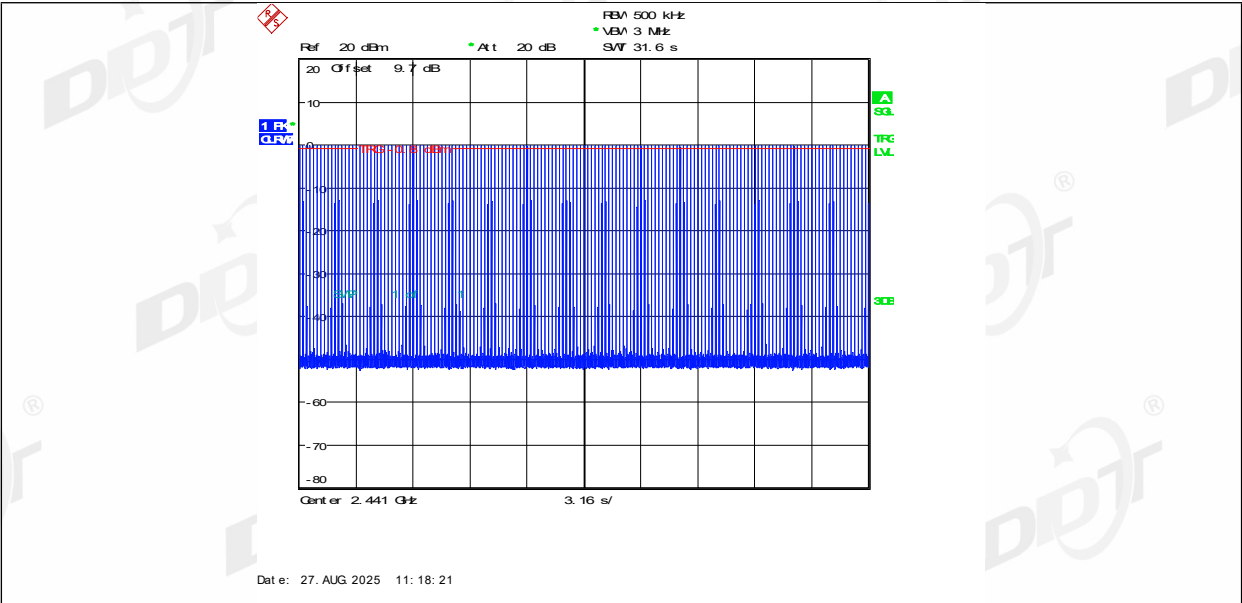




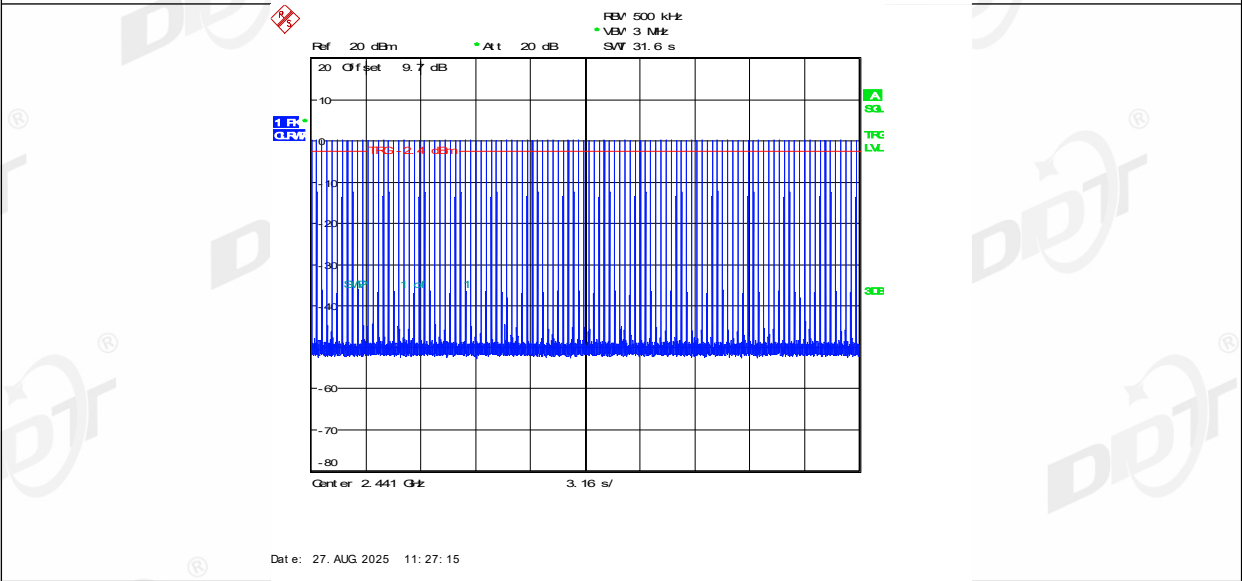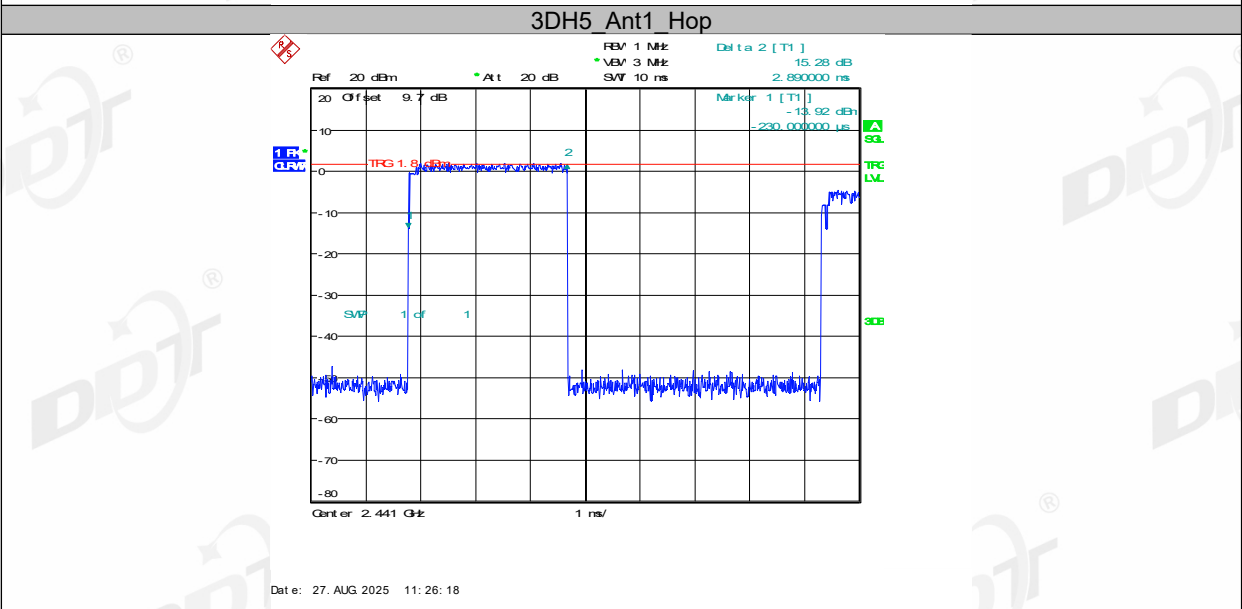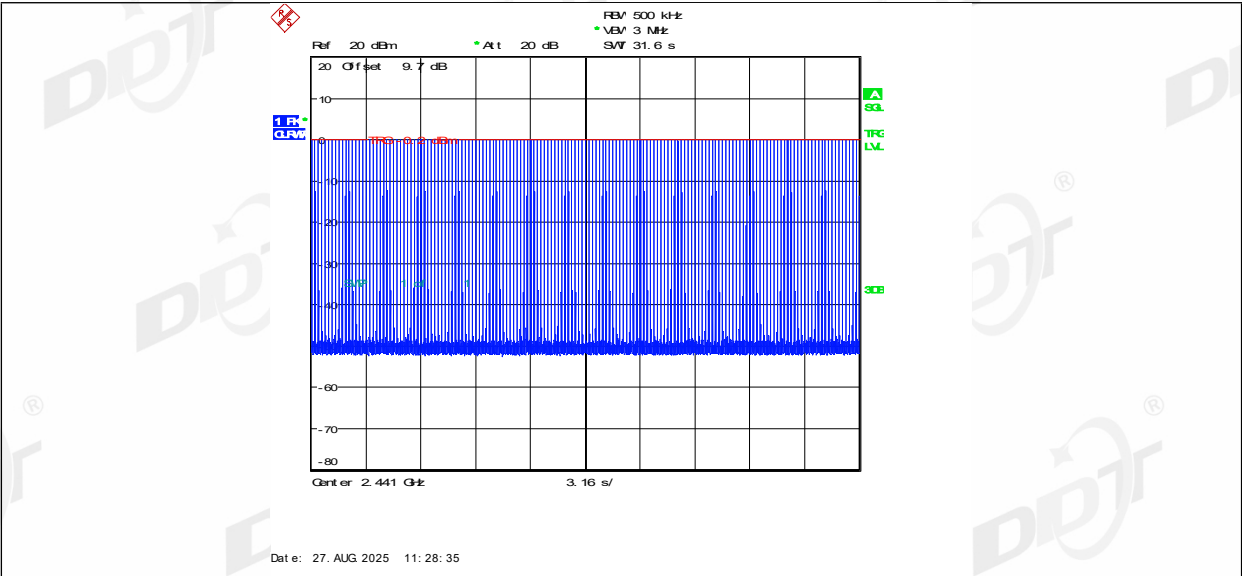

9. Number of Hopping Channel

9.1. Block diagram of test setup

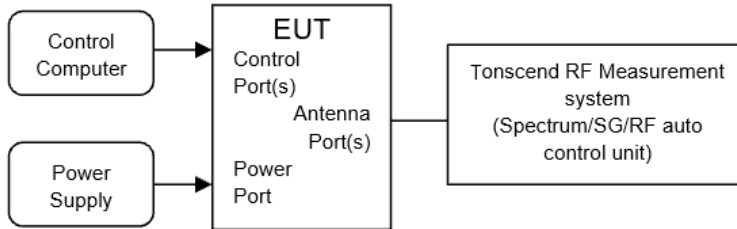

9.2. Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

9.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 7.8.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW:	$VBW \geq RBW$.
Span:	The frequency band of operation
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold

- (5) Measure the hopping number and record the results in the report.
- (6) Measure and record the results in the report.

9.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#		
Ambient Condition:	27.8℃, 39%RH	Test Date:	2025.08.27-2025.09.04		
Test Power Supply:	DC 12V	Sample Number:	S25081333-002		


Test Mode	Antenna	Frequency [MHz]	Result [Num]	Limit [Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

9.5. Test graphs



10. Band Edge Compliance (Conducted Method)

10.1. Block diagram of test setup

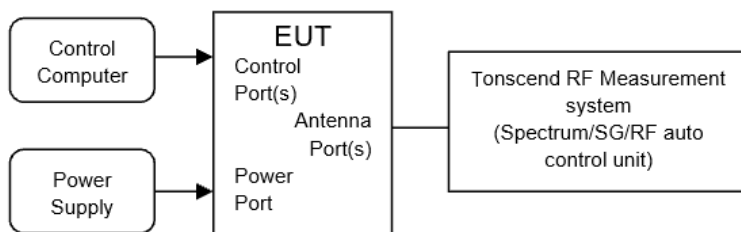

10.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20dB below the fundamental.

10.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

RBW: 100 kHz

VBW: 300 kHz

Span: Encompass frequency range to be measured

Detector Mode: Peak

Sweep time: Auto

Trace mode: Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.


10.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	27.8℃, 39%RH	Test Date:	2025.08.27-2025.09.04
Test Power Supply:	DC 12V	Sample Number:	S25081333-002

Mode	Frequency (MHz)	Verdict
DH5	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
2DH5	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
3DH5	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass

10.5. Test graphs



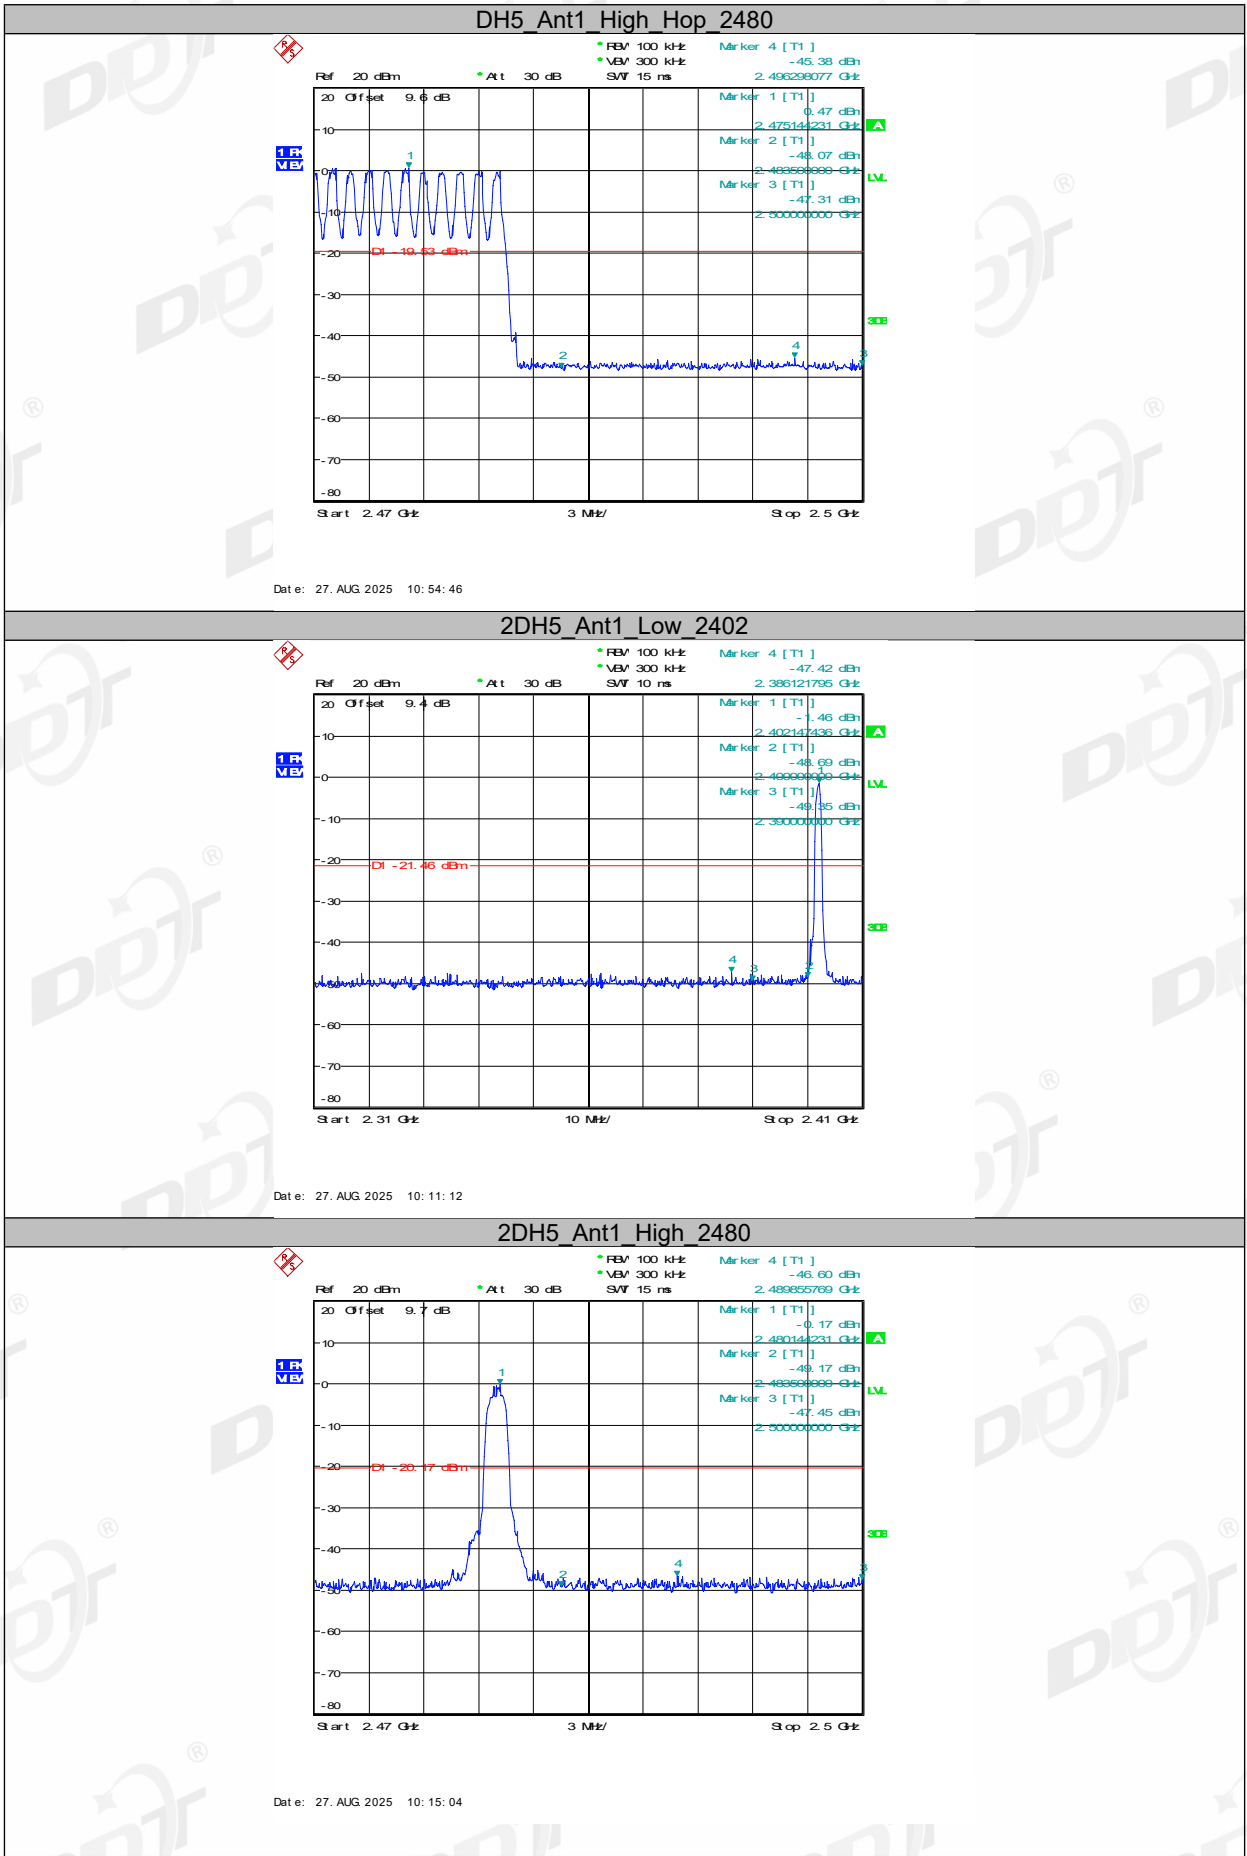

2DH5_Ant1_High_2480

Ref 20 dBm

Offset 9.7 dB

Att 30 dB

RBW 100 kHz

VBW 300 kHz

SMV 15 ns

Marker 4 [T1]

-46.60 dBm

2.489355769 GHz

1

2

3

4

Marker 1 [T1]

-0.17 dBm

2.480144231 GHz

Marker 2 [T1]

-48.17 dBm

2.483699999 GHz

Marker 3 [T1]

-47.45 dBm

2.500000000 GHz


DL -20.77 dBm

Start 2.47 GHz

3 MHz

Stop 2.5 GHz


Date: 27. AUG 2025 10:15:04

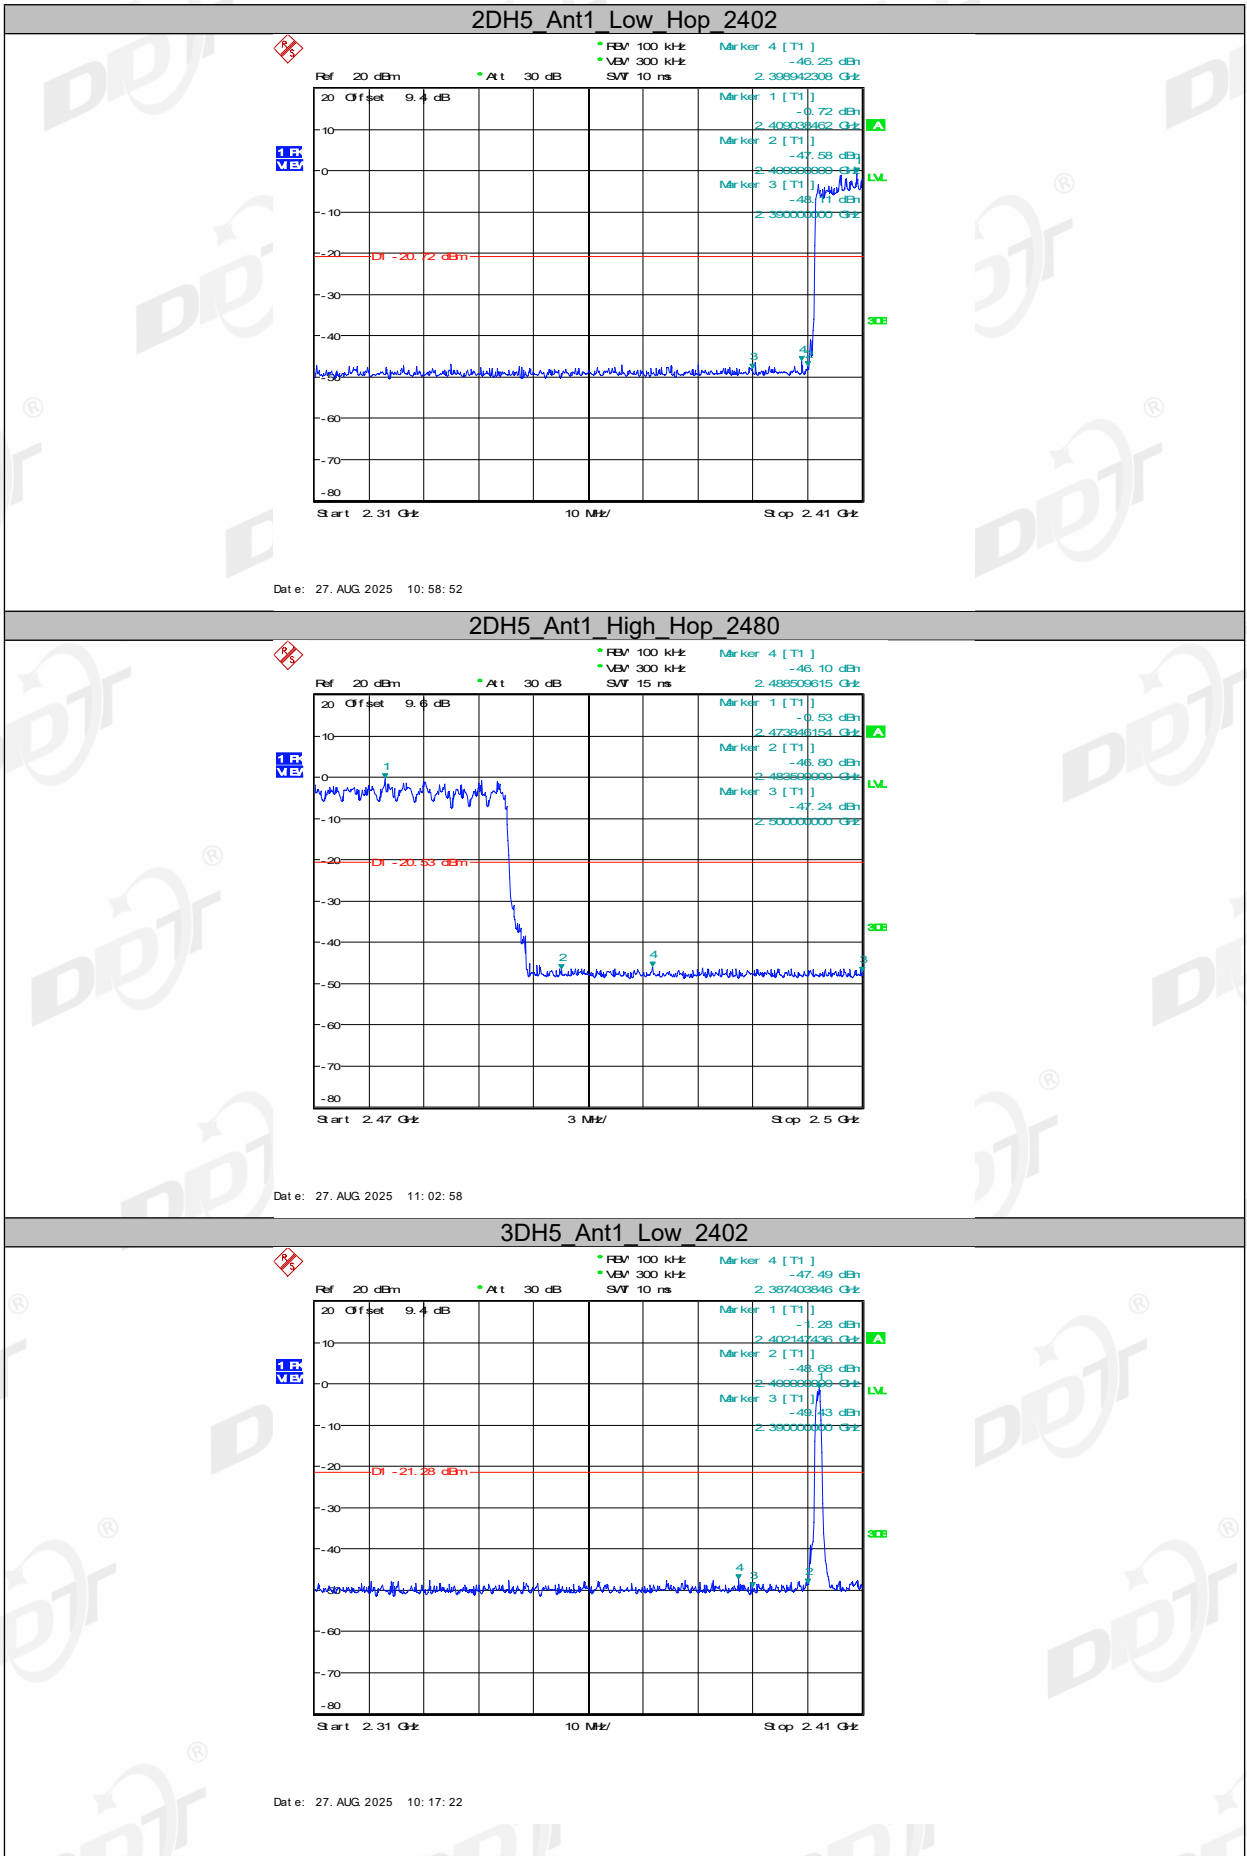



11. RF Conducted Spurious Emissions

11.1. Block diagram of test setup

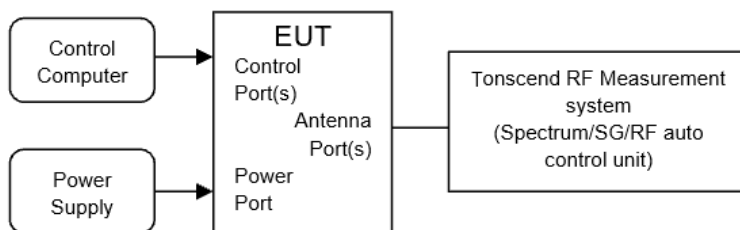

11.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

11.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency:	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span:	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span:	Encompass frequency range to be measured
Number of measurement points:	$\geq \text{Span/RBW}$
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

11.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	27.8℃, 39%RH	Test Date:	2025.08.27-2025.09.04
Test Power Supply:	DC 12V	Sample Number:	S25081333-002

Mode	Frequency (MHz)	Verdict
DH5	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
2DH5	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
3DH5	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass

11.5. Test graphs

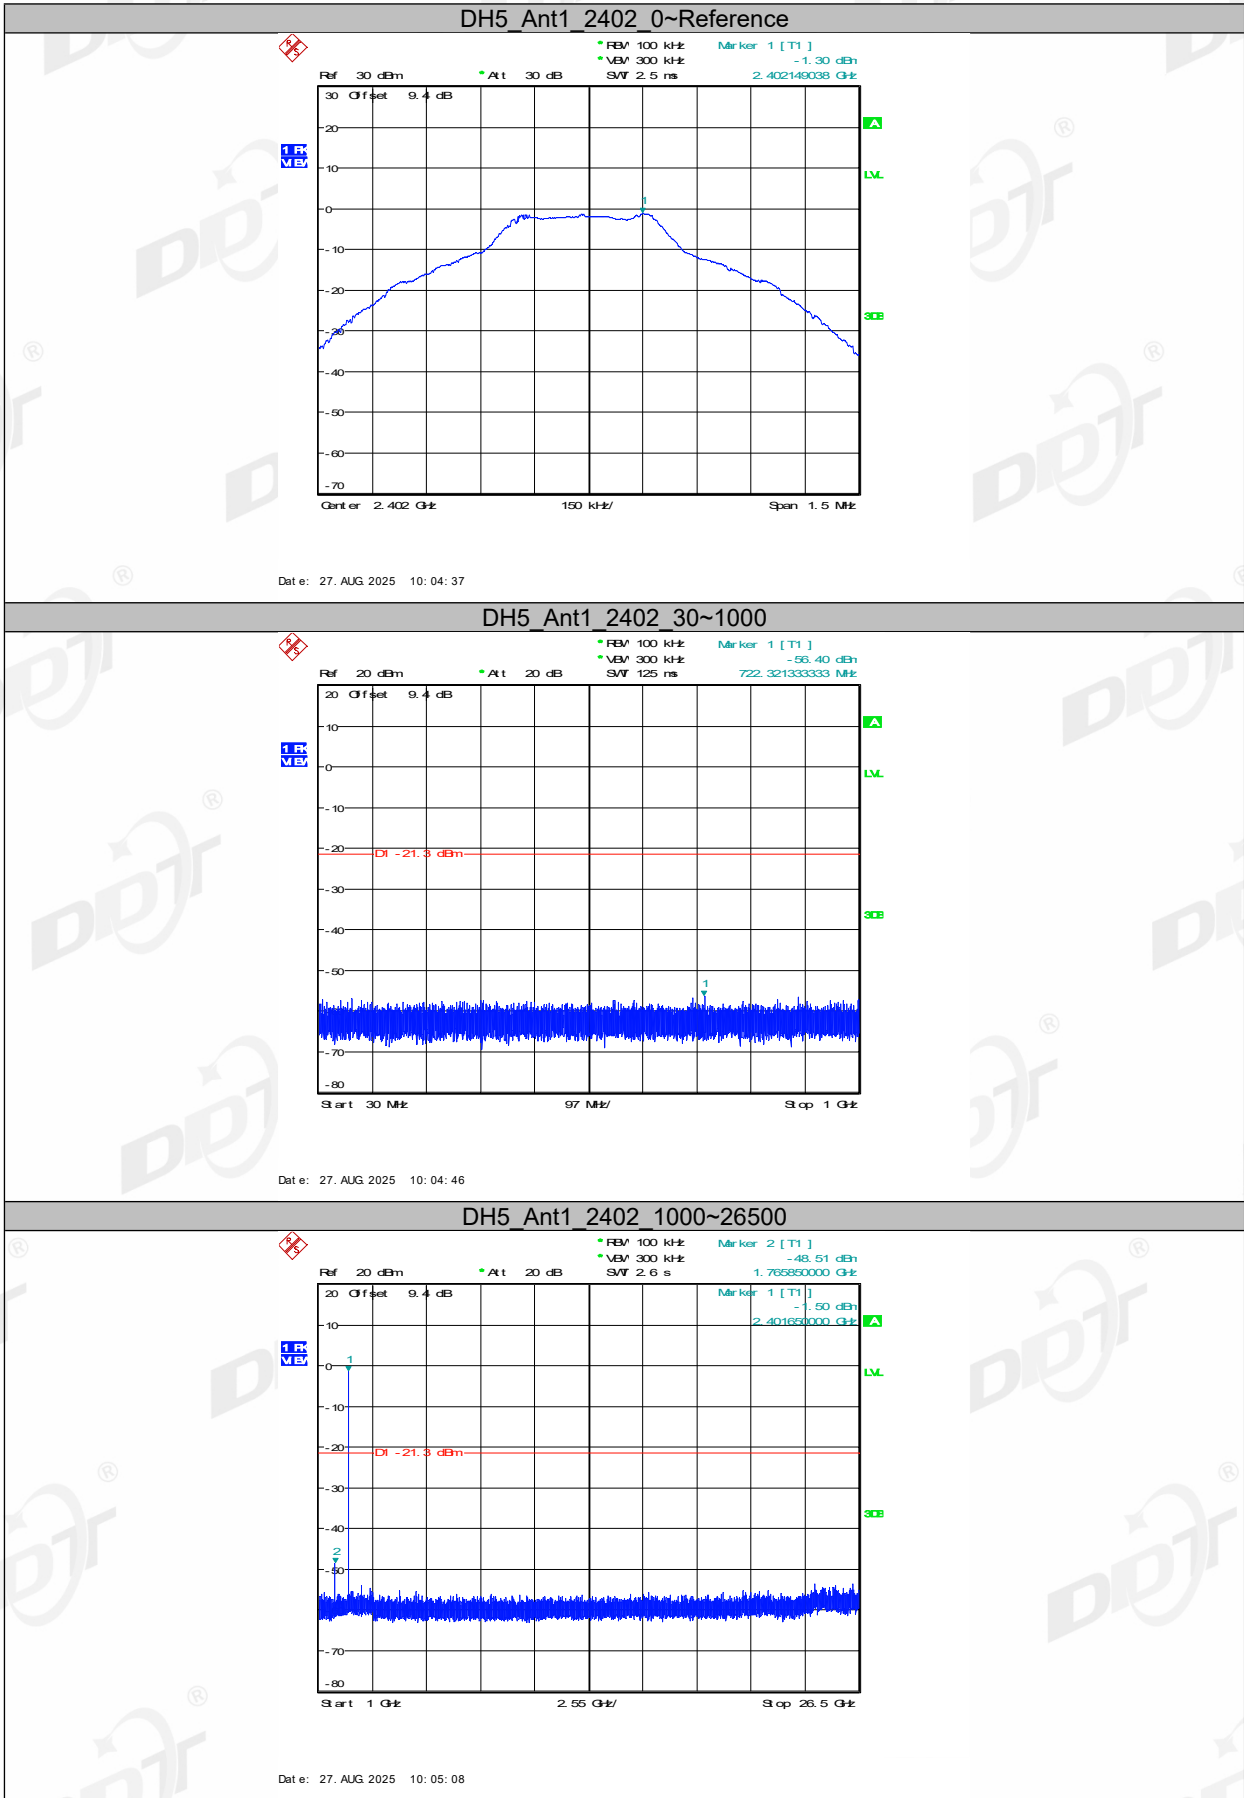



DH5_Ant1_2441_1000~26500

Ref 20 dBm

Offset 9.7 dB

Alt 20 dB

RBW 100 kHz

VBW 300 kHz

SMF 2.6 s

Marker 2 [T1]

-54.13 dBm

24.402200000 GHz

Marker 1 [T1]

-0.78 dBm

2.440250000 GHz

Start 1 GHz

2.55 GHz

Stop 26.5 GHz





2DH5_Ant1_2402_1000~26500

Ref 20 dBm

Offset 9.4 dB

Alt 20 dB

RBW 100 kHz

VBW 300 kHz

SMF 2.6 s

Marker 2 [T1]

-53.43 dBm

24.811900000 GHz

Marker 1 [T1]

-4.59 dBm

2.401650000 GHz



2DH5_Ant1_2441_1000~26500

Ref: 20 dBm

Offset: 9.7 dB

Alt: 20 dB

RBW: 100 kHz

VBW: 300 kHz

SMV: 2.6 s

Marker 2 [T1]

-53.15 dBm

24.87360000 GHz

Marker 1 [T1]

-3.92 dBm

2.440750000 GHz



2DH5_Ant1_2480_1000~26500

Ref 20 dBm

Offset 9.7 dB

Alt 20 dB

RBW 100 kHz

VBW 300 kHz

SMF 2.6 s

Marker 2 [T1]

-53.79 dBm

24.742200000 GHz

Marker 1 [T1]

-3.01 dBm

2.479850000 GHz



3DH5_Ant1_2402_1000~26500

Ref 20 dBm

Offset 9.4 dB

Alt 20 dB

RBW 100 kHz

VBW 300 kHz

SMF 2.6 s

Marker 2 [T1]

-50.79 dBm

5.182850000 GHz

Marker 1 [T1]

-3.98 dBm

2.401650000 GHz





3DH5_Ant1_2480_1000~26500

Ref 20 dBm

Offset 9.7 dB

Alt 20 dB

RBW 100 kHz

VBW 300 kHz

SMF 2.6 s

Marker 2 [T1]

-51.24 dBm

5.174350000 GHz


Marker 1 [T1]

-0.36 dBm

2.479851000 GHz

12. Duty cycle

12.1. Block diagram of test setup

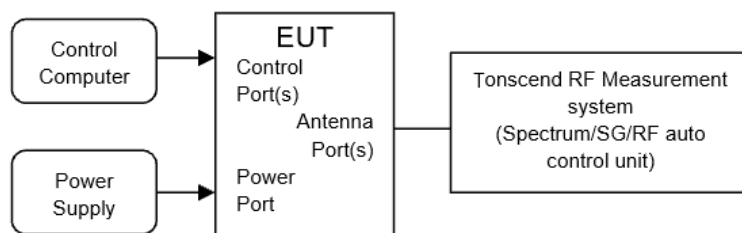

12.2. Limit

Just for Report.

12.3. Test procedure

- (1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset.

set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the middle hopping channel.

Resolution BW: 10 MHz.

Video BW: 10 MHz.

Span: Zero span.

Detector: Peak.

Trace Mode: Clear Write.

Sweep: Video Trigger


- (2) When the trace is complete, measure the sending time of 1 burst and the duty cycle of 1 burst cycle.
- (3) Calculate dwell time follow below formula:
$$\text{Duty cycle} = \text{Pulse's on time} / \text{Burst cycle}$$




12.4. Test result


Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#			
Ambient Condition:	27.8℃, 39%RH	Test Date:	2025.08.27-2025.09.04			
Test Power Supply:	DC 12V	Sample Number:	S25081333-002			

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor [dB]
DH5	Ant1	2402	2.90	3.77	76.92	1.14
		2441	2.91	3.77	77.19	1.12
		2480	2.91	3.77	77.19	1.12
2DH5	Ant1	2402	2.91	3.77	77.19	1.12
		2441	2.91	3.76	77.39	1.11
		2480	2.90	3.77	76.92	1.14
3DH5	Ant1	2402	2.92	3.77	77.45	1.11
		2441	2.91	3.76	77.39	1.11
		2480	2.91	3.76	77.39	1.11

12.5. Test graphs

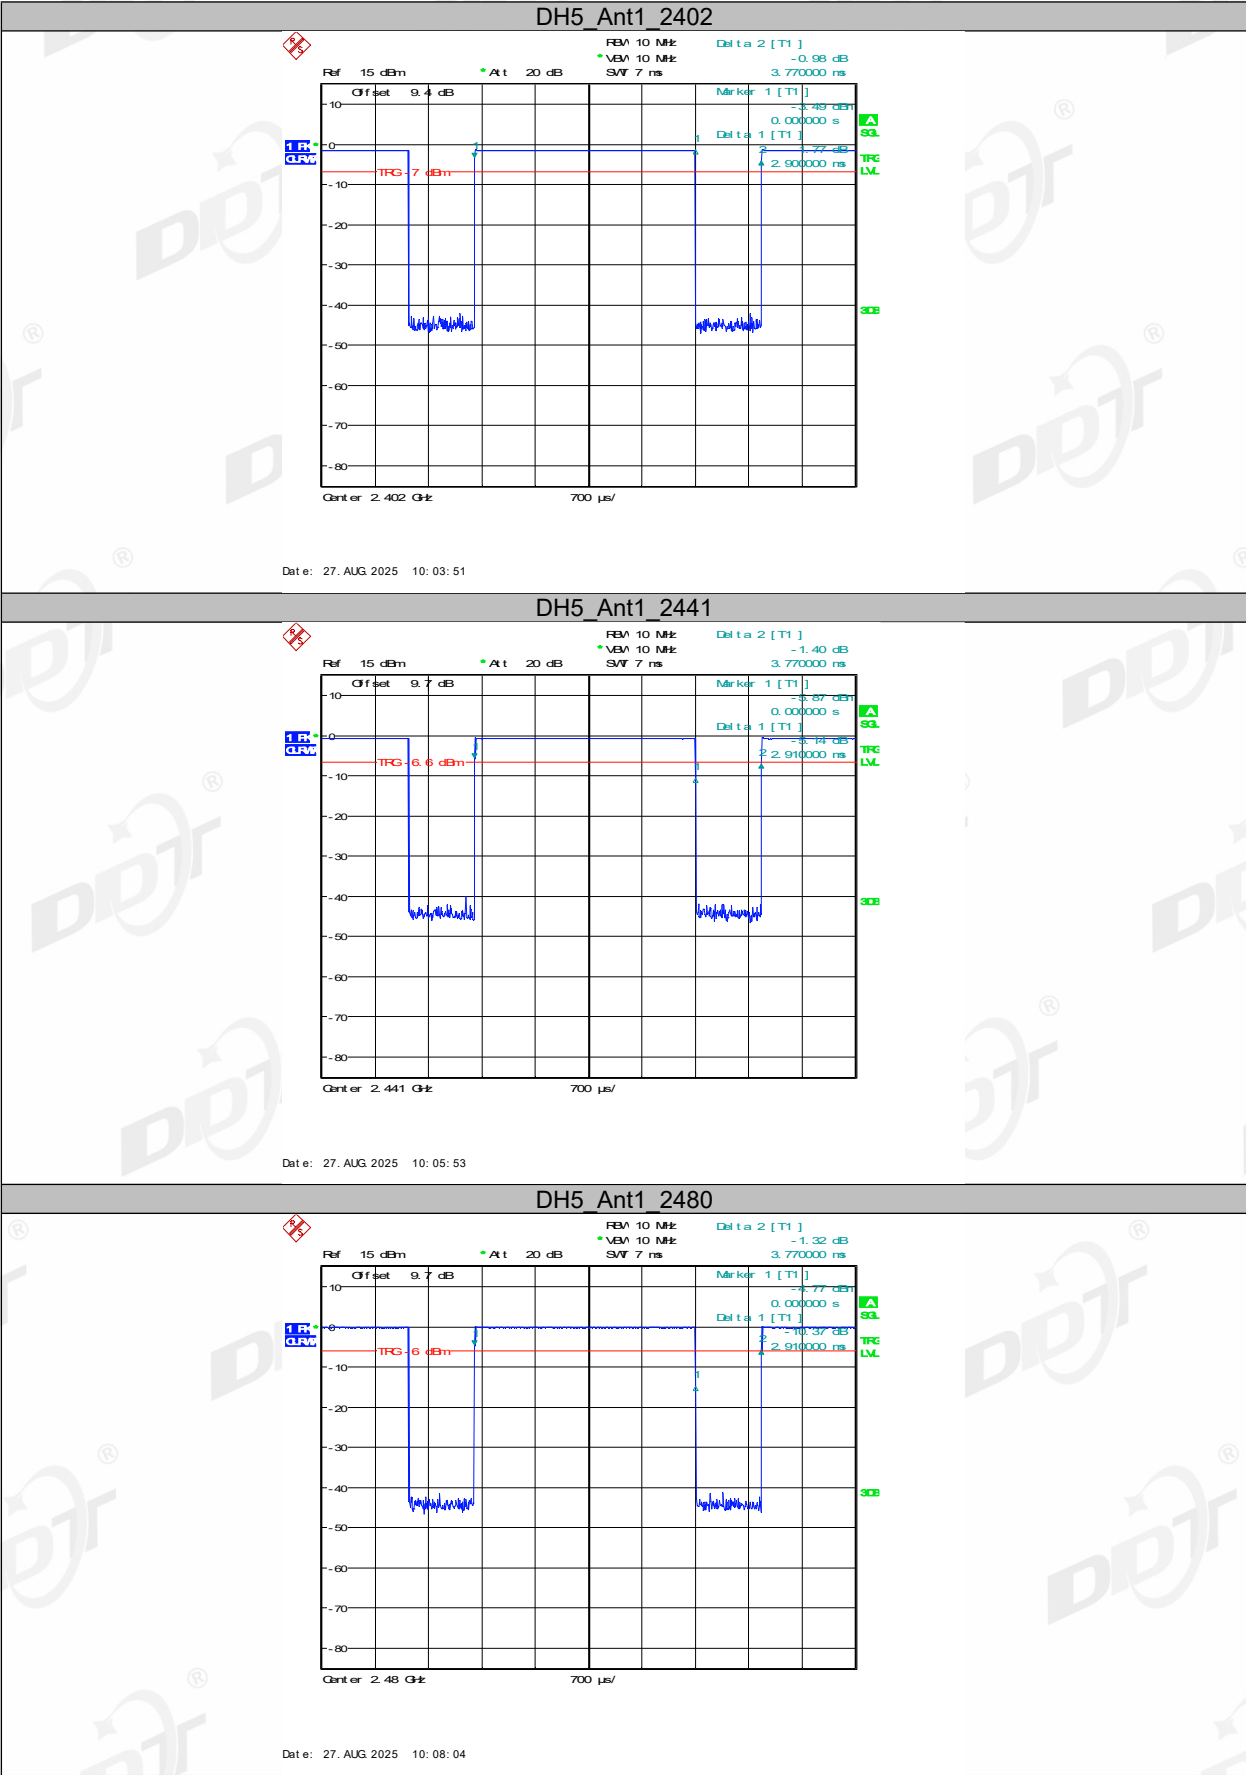



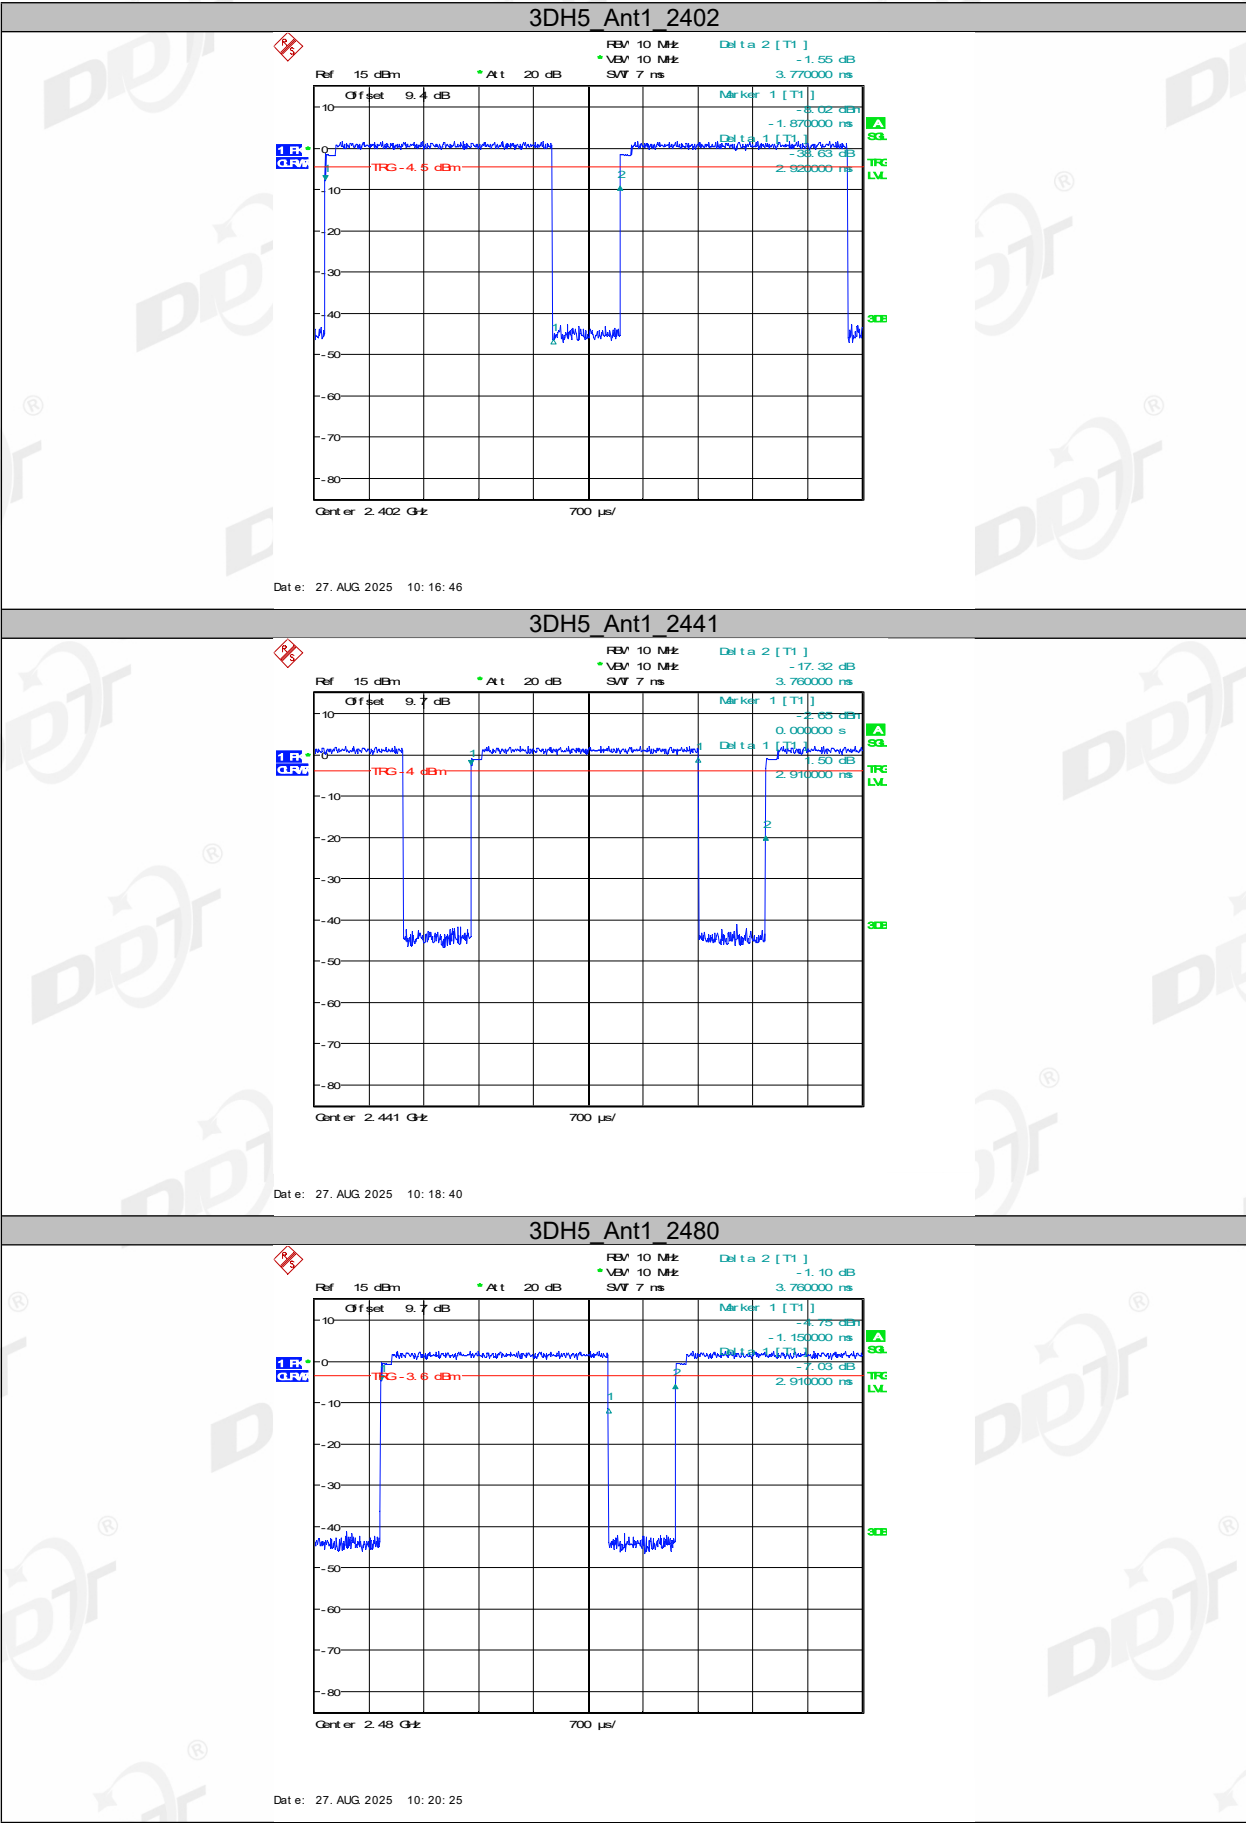

13. Antenna Requirements

13.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2. Result

The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.

14. Radiated Emission

14.1. Test equipment



Original data test equipment


Equipment	Manufacturer	Model No.	Serial No.	Cal Due To	Cal. Interval
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/	/
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2026/03/28	1 Year
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2026/03/28	1 Year
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2026/03/28	1 Year
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2026/03/28	1 Year
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2026/03/28	1 Year
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2026/03/28	1 Year
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2026/08/10	1 Year
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2026/03/28	1 Year
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2026/03/28	1 Year
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2026/03/28	1 Year
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2026/03/28	1 Year
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/	/
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2026/04/01	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2026/07/25	1 Year
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC02129	2025/09/18	1 Year
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11	1 Year
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2026/03/28	1 Year

New data test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To	Cal. Interval
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2027/02/27	1 Year
RF cable	Zhongke Junchuang	Z805UF-NJ-NJ-10M	DDT-ZC05591	2026/10/10	1 Year
RF cable	Zhongke Junchuang	Z805UF-NJ-NJ-3M	DDT-ZC05590	2026/10/10	1 Year
RF cable	Zhongke Junchuang	JCTB510-NJW-NJW-0.6M	DDT-ZC04595	2026/10/10	1 Year
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-1M	DDT-ZC03802	2026/10/10	1 Year
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2026/10/10	1 Year
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-5M	DDT-ZC03800	2026/10/10	1 Year
Radiation disturbance fully automated test software	Tonscend	JS32-RE	DDT-ZC02739	/	/
Pre-amplifier	SONOMA	310N	DDT-ZC01969	2026/07/06	1 Year
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2027/03/05	1 Year
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2026/08/10	1 Year
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2027/02/27	1 Year
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/	/
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2027/02/27	1 Year
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2027/02/27	1 Year
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/	/
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2026/07/25	1 Year
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC02129	2026/08/11	1 Year
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2026/08/18	1 Year
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2027/02/27	1 Year

14.2. Block diagram of test setup

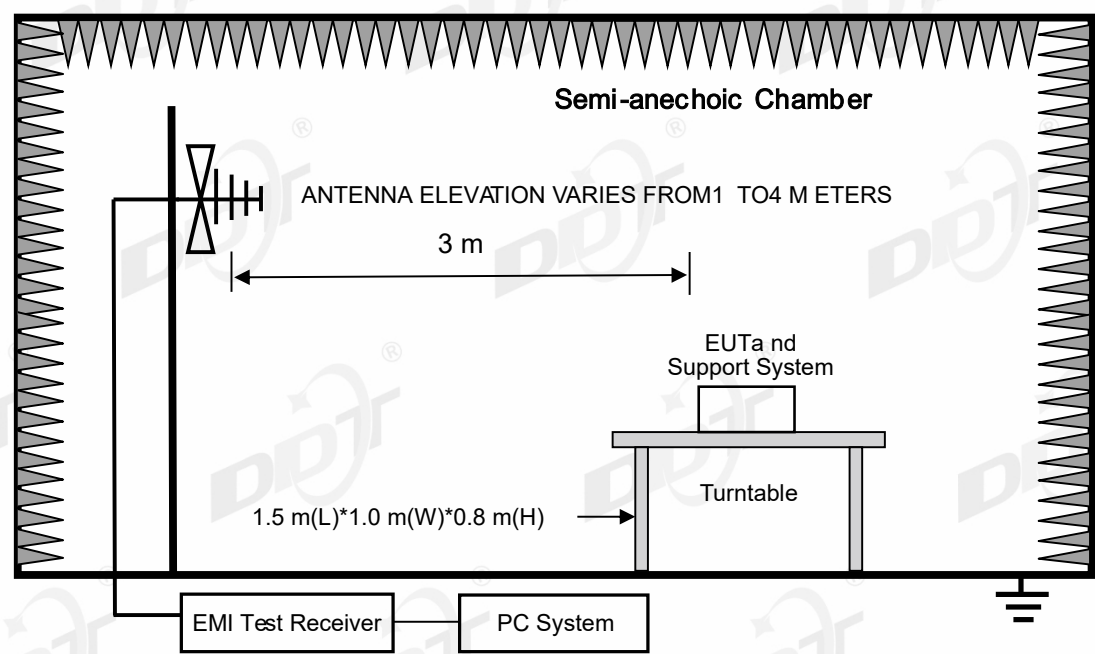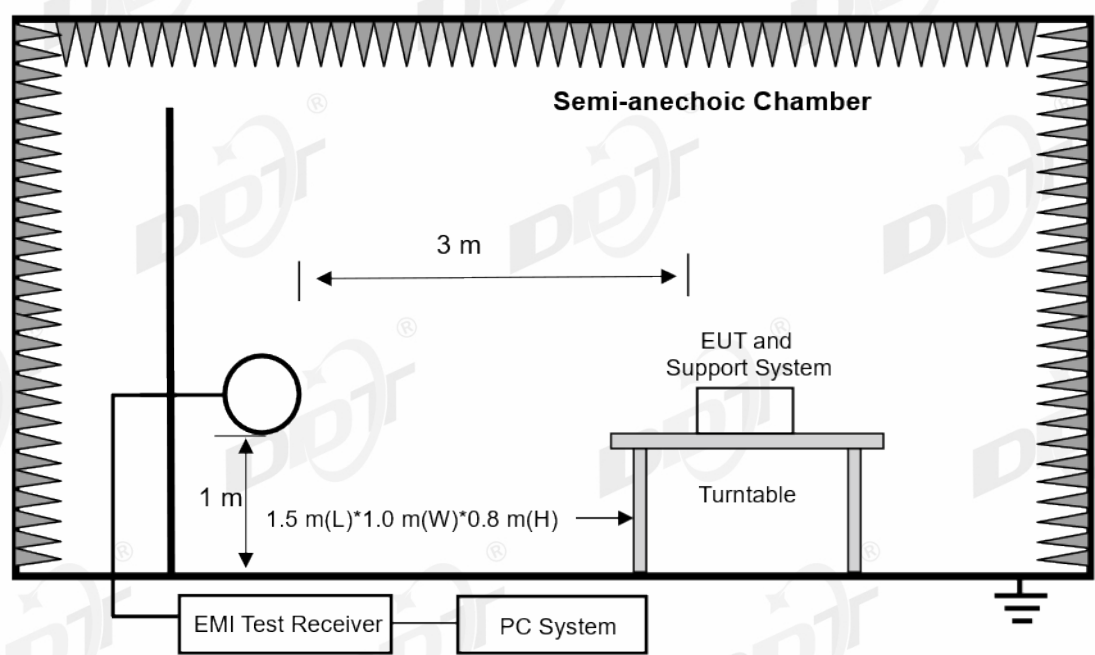

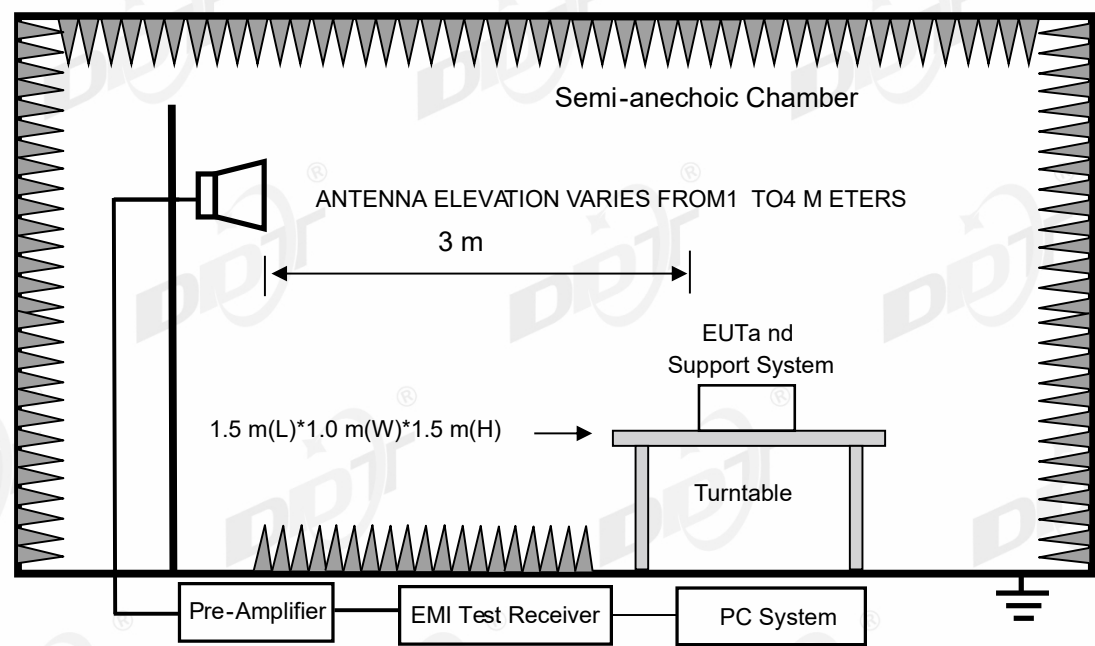

14.3. Limits

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

1Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2Above 38.6

RSS-Gen section 8.10 Restricted frequency bands*

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3.5-4.4
0.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			Above 38.6

* Certain frequency bands listed in table and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(2) FCC 15.209 Limit & RSS-Gen section 8.9 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		uV/m	dBuV/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dBuV/m (Peak) 54.0 dBuV/m (Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dBuV/m}) = \text{Limit}_{30\text{m}}(\text{dBuV/m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

14.5. Test procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.
- (2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz-18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz-40 GHz)	1 m

According ANSI C63.10:2020 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2020 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2020 clause 4.1.4.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

(9) According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

(10) For 30 MHz ~ 25 GHz: (Scan with GFSK, p/4-DQPSK and 8DPSK, the worst case is record and reported)

(11) For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in worst mode.