

BT FPC Antenna (E072-R-V9)

1. Explanation of Product Number

S	2	B	4	B	B	1	F	1	B	1	4	0	0	0
				(1)	(2)	(3)	(4)	(5)						



Product Description:

(1) Product Categories:

B:BT Antenna

(2) Dimensions:

B1: 20.70*8.24*0.15 (mm)

(3) Material:

F: FPC

(4) Working Frequencies:

1B: 2.4G-2.5G

(5) Antenna Series:

01: Serial number

2. Features

Tolerances (Unless otherwise specified) X : ± 1 X.X : ± 0.1 X.XX : ± 0.01 Angle : $\pm$ Hole Dia. : $\pm$		深圳市迎丰天线技术有限公司 SHEN ZHEN YINGFENG ANTENNA TECHNOLOGYCO.,LTD	
Scale :	Unit: mm	THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION	
Drawn By : Andy	Checked By : Simon		
Designed By :Simon	Approved By :Simon		
TITLE: BT FPC Antenna(E072-R-V9)		PART NO.	REV.
		S2B4BB1F1B14000	A
PAGE 1 OF 6			

- *Stable and reliable in performances
- *RoHS compliance
- *Low cost

3. Applications

*BT

4. Description

* YINGFENG FPC antenna series are specially designed for 2.4G-2.5G band application. Based on YINGFENG proprietary designs and processes, this FPC antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.


5. Antenna Electrical Specifications :

Characteristics	Specifications			Unit
Outline Dimensions	20.70*8.24*0.15			mm
Frequency	2400~2500			MHz
Impedance	50			Ω
Polarization	Linear Polarization			
Return Loss Table	Return Loss			
Freq.Band	2.4G Hz	2.45G Hz	2.5G Hz	
dB	-15.55	-27.39	-20.79	
VSWR Table	VSWR			
Freq.Band	2.4G Hz	2.45G Hz	2.5G Hz	
	1.40	1.08	1.20	
GAIN Table	Total Gain = Xpol + Ppol			
Freq.Band	2400MHz	2450MHz	2480MHz	
Peak Gain(dBi)	1.38	1.68	1.52	

6. Dimensions (unit: mm)


blic errand: $\pm 0.2\text{mm}$

Tolerances (Unless otherwise specified) X : ± 1 X.X : ± 0.1 X.XX : ± 0.01 Angle : $\pm$ Hole Dia. : $\pm$		深圳市迎丰天线技术有限公司 SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD		
Scale :	Unit: mm	THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION		
Drawn By : Andy	Checked By : Simon			
Designed By : Simon	Approved By : Simon			
TITLE: BT FPC Antenna(E072-R-V9)		PART NO.	S2B4BB1F1B14000	REV. A
PAGE 2 OF 6				

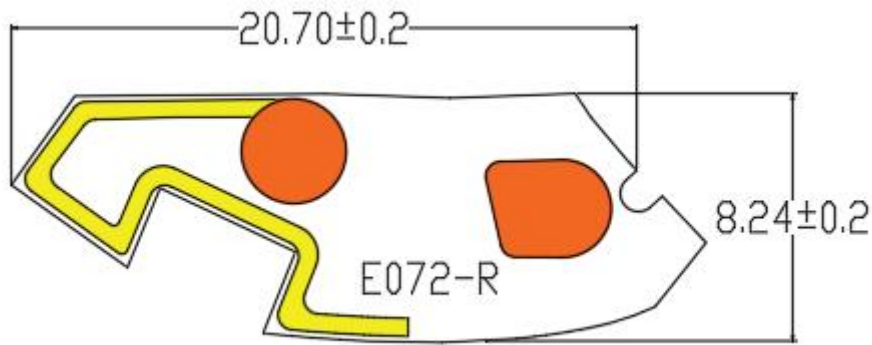


7. Measurement Characteristics:

(1) Return Loss

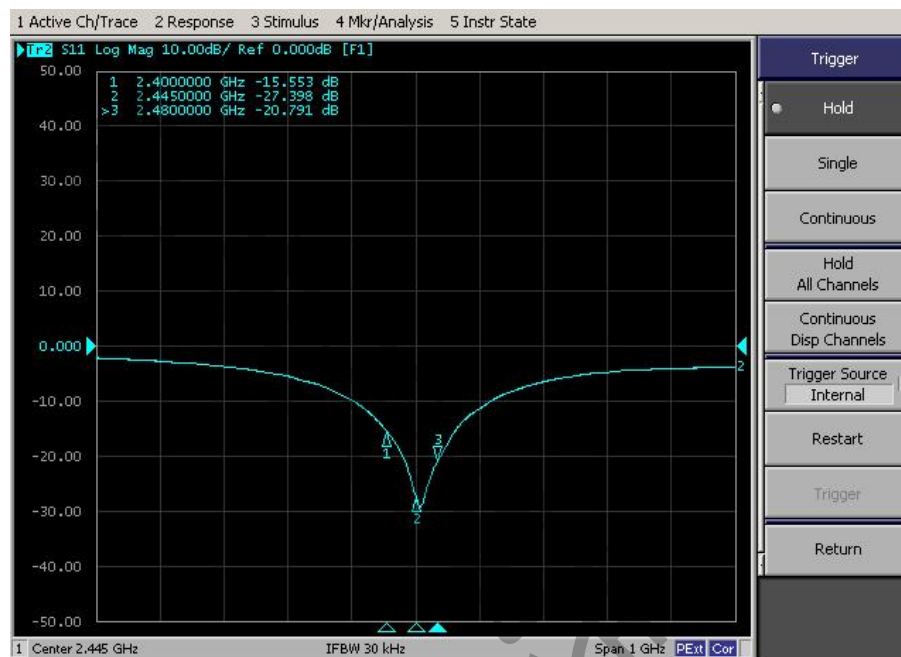


(2) VSWR

Tolerances (Unless otherwise specified) X : ± 1 X.X : ± 0.1 X.XX : ± 0.01 Angle : $\pm$ Hole Dia. : $\pm$		深圳市迎丰天线技术有限公司 SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD	
Scale :	Unit: mm	THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION	
Drawn By : Andy	Checked By : Simon		
Designed By : Simon	Approved By : Simon		
TITLE: BT FPC Antenna(E072-R-V9)		PART NO.	S2B4BB1F1B14000
			REV. A
		PAGE 3 OF 6	

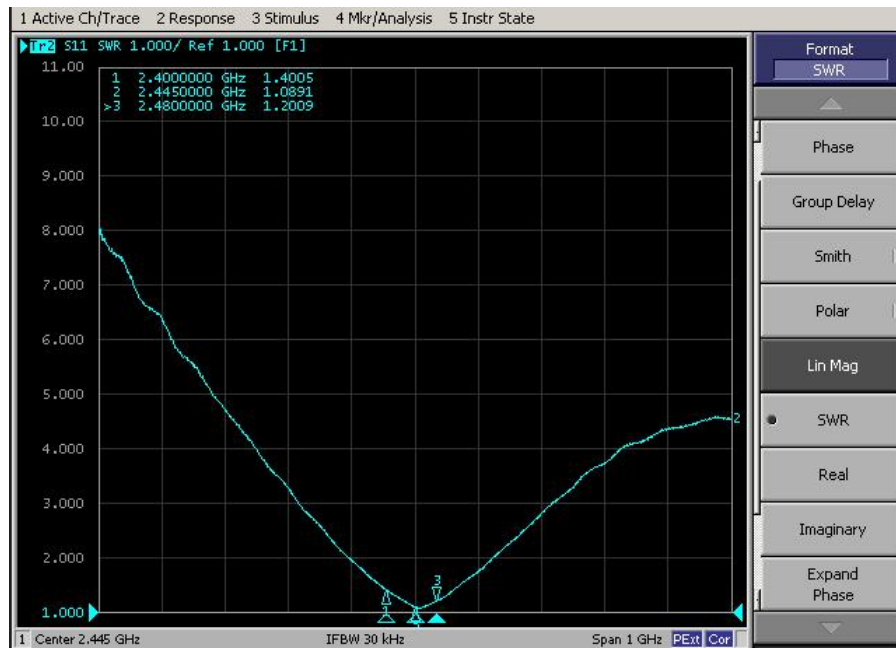



8. Three D Radiation Pattern measurements

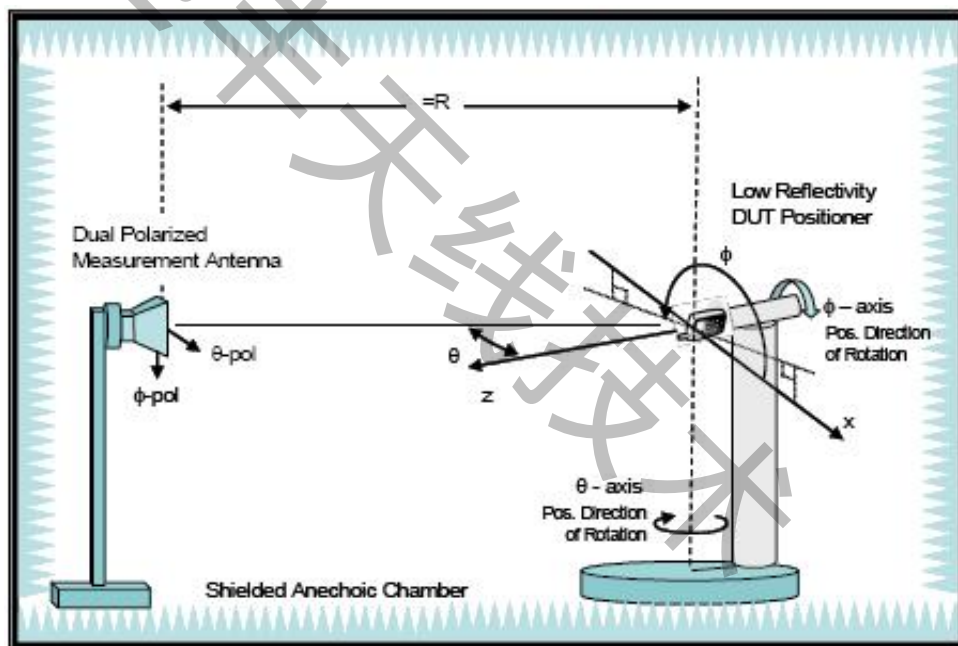

9. Radiation Pattern

Tolerances (Unless otherwise specified) X : ± 1 X.X : ± 0.1 X.XX : ± 0.01 Angle : $\pm$ Hole Dia. : $\pm$		深圳市迎丰天线技术有限公司 SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD	
Scale :	Unit: mm	THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION	
Drawn By : Andy	Checked By : Simon		
Designed By : Simon	Approved By : Simon		
TITLE: BT FPC Antenna(E072-R-V9)		PART NO.	REV.
			S2B4BB1F1B14000 A
		PAGE 4	OF 6

9-1.3D Gain Pattern (Radiation Pattern at 2450 MHz)

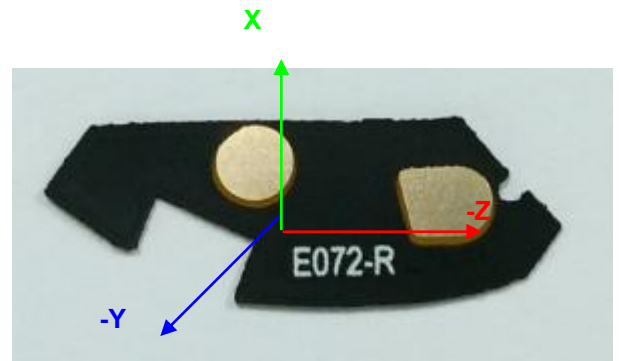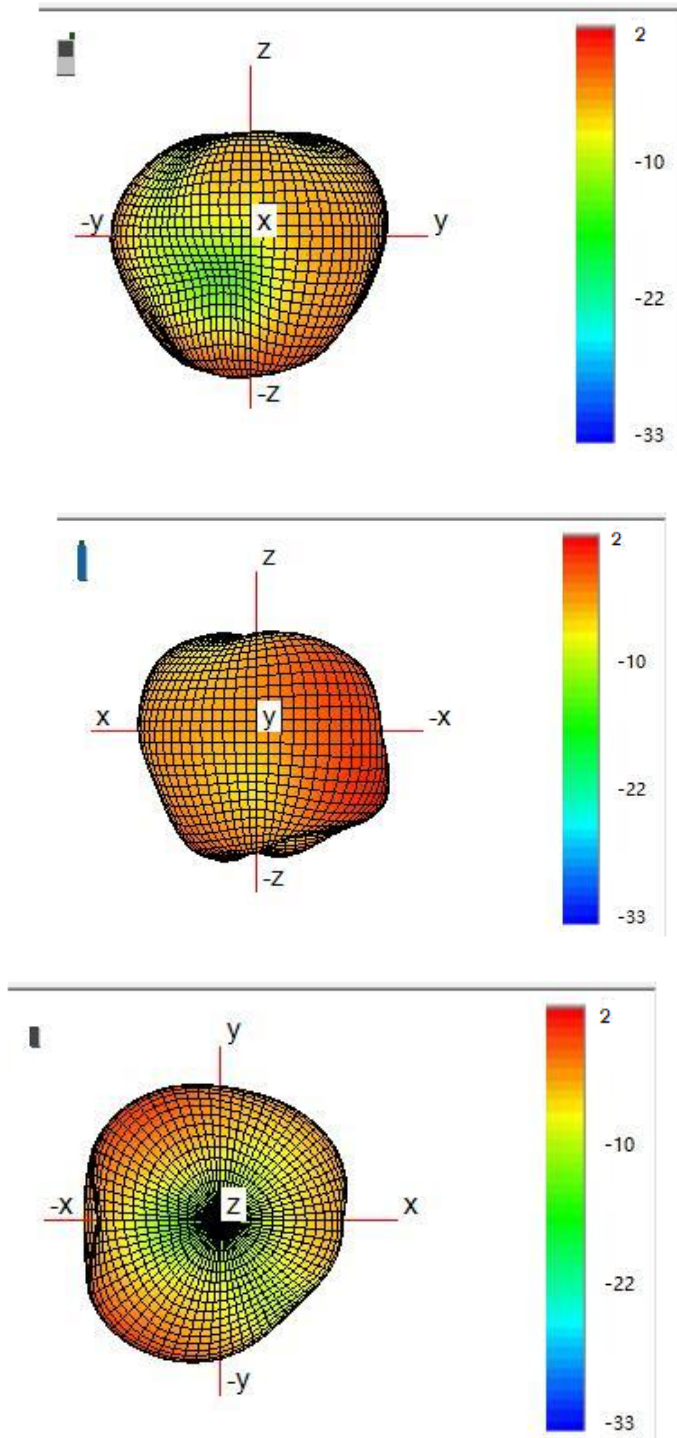



9-2.2D Gain complete machine (Radiation Pattern at 2450 MHz)

Tolerances (Unless otherwise specified) X : ± 1 X.X : ± 0.1 X.XX : ± 0.01 Angle : $\pm$ Hole Dia. : $\pm$		深圳市迎丰天线技术有限公司 SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD	
Scale :	Unit: mm	THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION	
Drawn By : Andy	Checked By : Simon		
Designed By : Simon	Approved By : Simon		
TITLE: BT FPC Antenna(E072-R-V9)		PART NO.	S2B4BB1F1B14000
			REV. A
PAGE 5 OF 6			

9-3.complete machine Efficiency Table

Frequency(MHz)	2400	2450	2480
Efficiency (%)	35.07	38.25	38.00
Gain (dBi)	1.38	1.68	1.52

10-1 产品包装 Product packaging

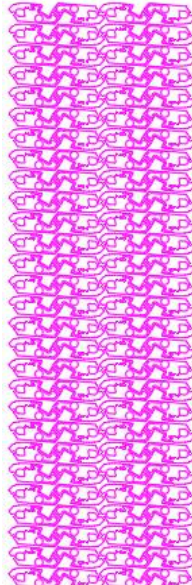版本 edition:: V9.0	页码 Page: 1/1
1.产品排版: 28*4=112PCS	2.离型纸隔层摆放保护天线 Barrier paper protection products
	
3.密封袋封装效果 Sealing bag packaging effect	4.纸箱封箱效果(贴出货标签和 ROHS 标签 Carton sealing effect
	

10-2.Revision Control:

Revision	Date	Content	Remark
A	2025-04-09	New Issued.	N/A

Tolerances (Unless otherwise specified)

X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : $\pm$ Hole Dia. : $\pm$

Scale : Unit: mm

Drawn By : Andy Checked By : Simon

Designed By : Simon Approved By : Simon

深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO.,LTD

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

TITLE: BT FPC Antenna(E072-R-V9)

PART
NO.

S2B4BB1F1B14000

REV.
A