


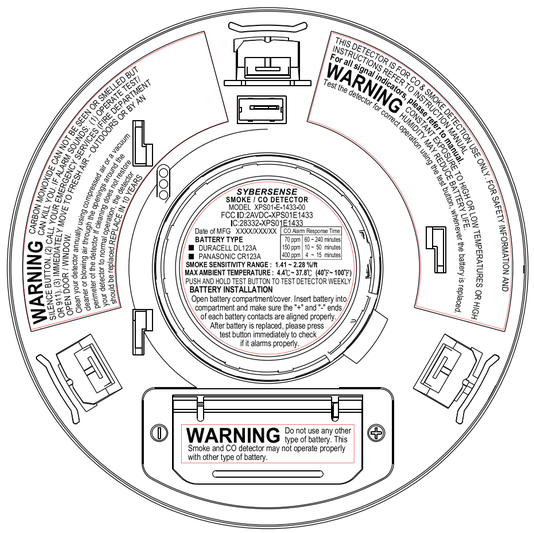


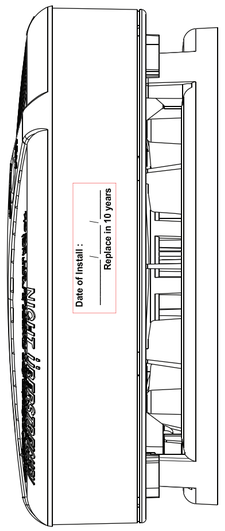


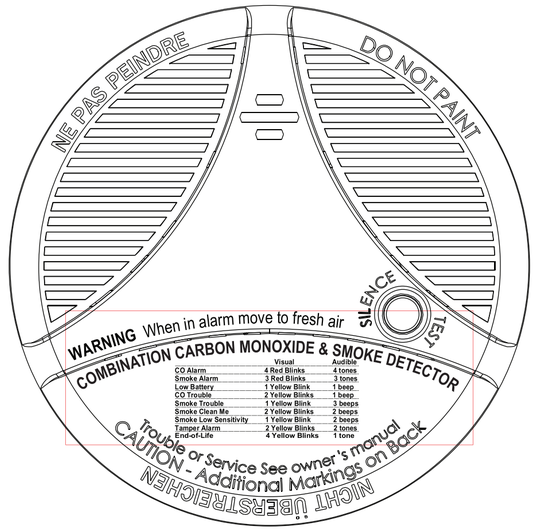


LABEL. a
Laser printing area
Dia 39.75mm



LABEL. b
Laser printing area
R 56.20mm R 32.6mm A 90°

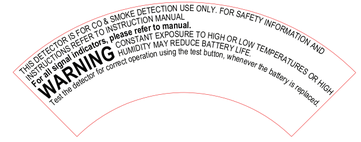


LABEL. c
Laser printing area
R 56.20mm R 32.6mm A 90°

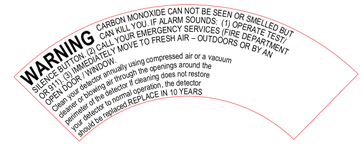

LABEL. d
Laser printing area
H 8.8mm W 39.8mm



LABEL. e
Laser printing area
H 31mm W 94mm

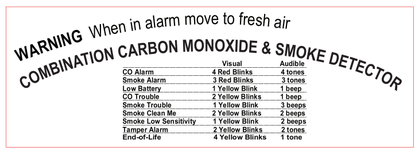

LABEL. f
Self-adhesive label
H 80mm W 110mm

⚠***WARNING!!*** **Actuation of your CO alarm indicates the presence of carbon monoxide (CO) which can kill you. If alarm sounds:**

1. Operate test/reset button
2. Call your emergency services ( ) - [Fire department or 911]
3. Immediately move to fresh air –outdoors or by an open door or window. Do a head count to check that all persons are accounted for. Do not reenter the premises nor move away from the open door/window until the emergency services responders have arrived, the premises have been aired out, and your alarm remains in its normal condition.
4. After following steps 1-3, if your alarm reactivates within a 24 hour period, repeat steps 1-3 and call a qualified appliance technician ( ) - to investigate for sources of CO from fuel burning equipment and appliances, and inspect for proper operation of this equipment. If problems are identified during this inspection have the equipment serviced immediately. Note any combustion equipment not inspected by the technician and consult the manufacturers' instruction, or contact the manufacturers directly, for more information about CO safety and this equipment. Make sure that motor vehicles are not, have not been, operating in an attached garage or adjacent to the residence.

You should write the telephone number of the emergency service provider and the qualified technician in the space provided in the labels. Place one label next to the alarm and the other label near a source of fresh air where you plan to gather after the alarm indicates the presence of carbon monoxide.

⚠***WARNING!!*** **Actuation of your CO alarm indicates the presence of carbon monoxide (CO) which can kill you. If alarm sounds:**

1. Operate test/reset button
2. Call your emergency services ( ) - [Fire department or 911]
3. Immediately move to fresh air –outdoors or by an open door or window. Do a head count to check that all persons are accounted for. Do not reenter the premises nor move away from the open door/window until the emergency services responders have arrived, the premises have been aired out, and your alarm remains in its normal condition.
4. After following steps 1-3, if your alarm reactivates within a 24 hour period, repeat steps 1-3 and call a qualified appliance technician ( ) - to investigate for sources of CO from fuel burning equipment and appliances, and inspect for proper operation of this equipment. If problems are identified during this inspection have the equipment serviced immediately. Note any combustion equipment not inspected by the technician and consult the manufacturers' instruction, or contact the manufacturers directly, for more information about CO safety and this equipment. Make sure that motor vehicles are not, have not been, operating in an attached garage or adjacent to the residence.

LABEL. g
H 21mm W 30mm



NOTES

1. The date of manufacture shall be non-coded and in the format YEAR (in 4 digits), MONTH (in letters), DATE (in 2 digits) located on the outside of the smoke alarm.

PRINTING NOTES

1. Unit : mm / Scale : 1:1 / Undefined tolerance : ± 0.2mm.
2. Label a,b,c,d,e use Laser Printing Process.
3. Label f is a self-adhesive label.

REVISION NOTES

MODEL NAME	MD760CSB1 UL Label	DESIGNER	Enid
DOCUMENT NO.	RD0760-102311	CHECK	Alan
PART NO.		APPR.	Jason
		REVISION	E
		DATE	2022.06.23