


Test Mode:	LTE B7 20850 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

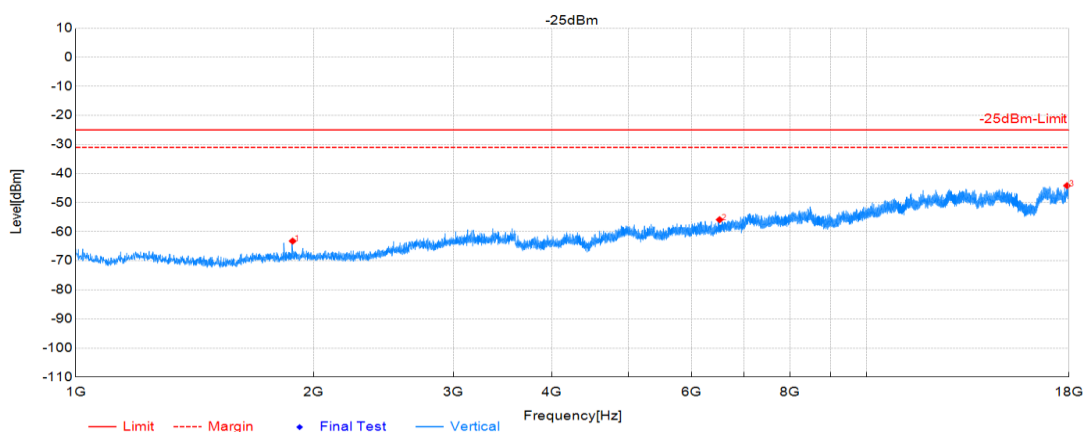

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	1879.794	-50.84	-12.38	-63.22	-25.00	38.22	PK	Vertical	PASS
2	6515.9258	-55.13	-0.75	-55.88	-25.00	30.88	PK	Vertical	PASS
3	17918.3959	-57.99	13.82	-44.17	-25.00	19.17	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B7 21100 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

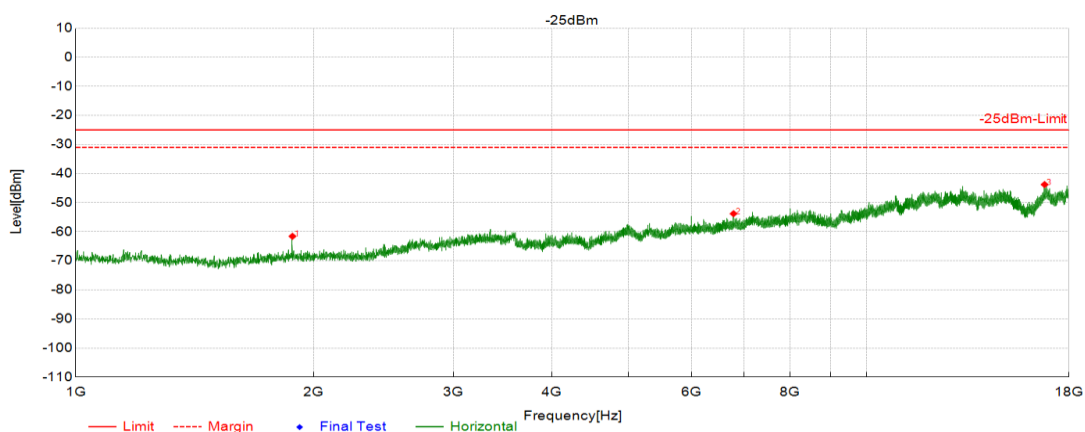

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	1878.9439	-48.78	-12.80	-61.58	-25.00	36.58	PK	Horizontal	PASS
2	6785.3893	-54.17	0.36	-53.81	-25.00	28.81	PK	Horizontal	PASS
3	16782.7391	-54.27	10.48	-43.79	-25.00	18.79	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B7 21100 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

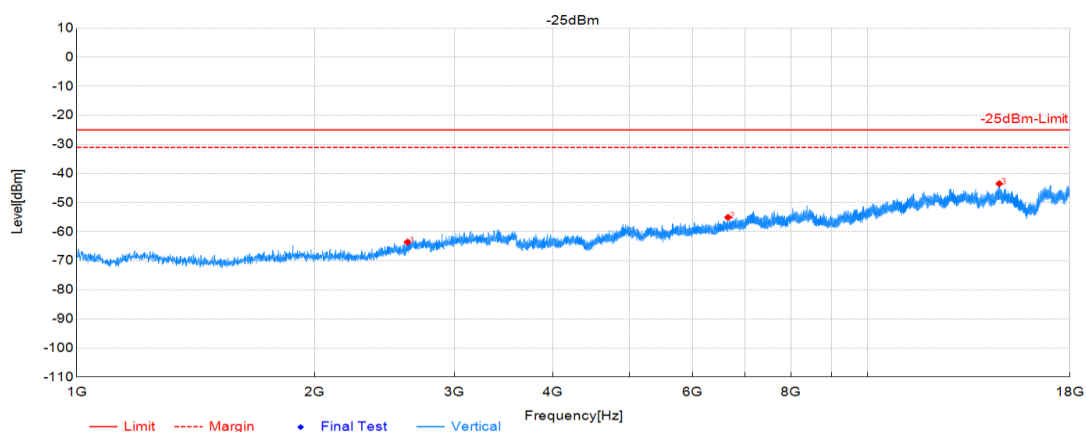

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	2618.4809	-53.12	-10.47	-63.59	-25.00	38.59	PK	Vertical	PASS
2	6657.0329	-54.96	-0.13	-55.09	-25.00	30.09	PK	Vertical	PASS
3	14666.1333	-55.83	12.34	-43.49	-25.00	18.49	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B7 21350 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

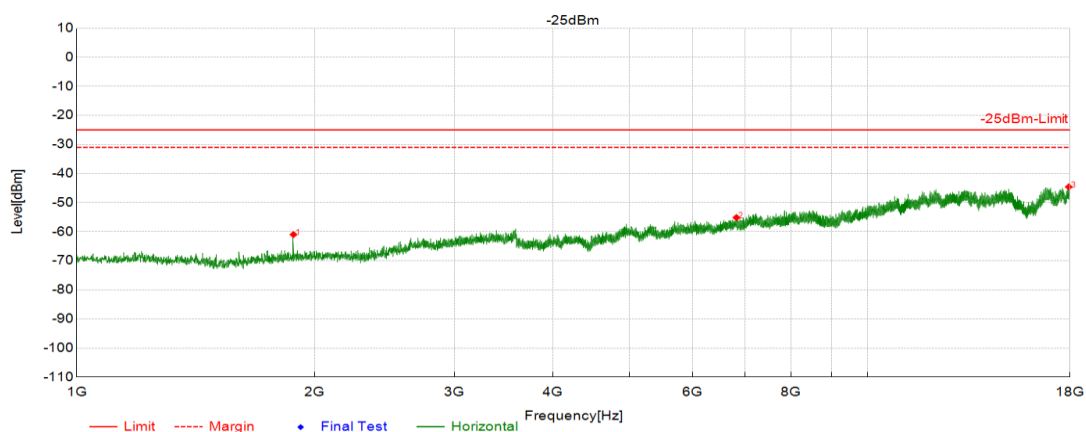

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	1878.9439	-48.19	-12.80	-60.99	-25.00	35.99	PK	Horizontal	PASS
2	6822.7911	-55.49	0.34	-55.15	-25.00	30.15	PK	Horizontal	PASS
3	17955.7978	-58.08	13.48	-44.60	-25.00	19.60	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B7 21350 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

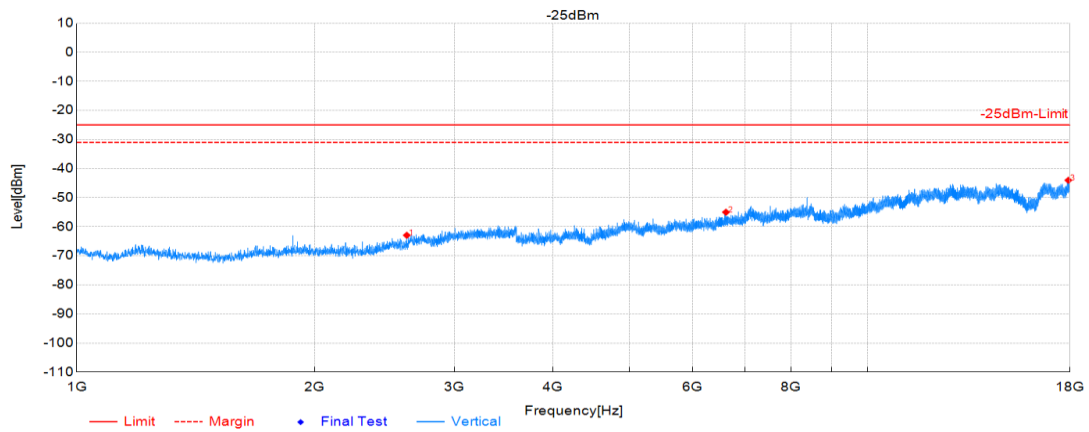

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	2613.3807	-52.41	-10.55	-62.96	-25.00	37.96	PK	Vertical	PASS
2	6617.9309	-54.90	-0.12	-55.02	-25.00	30.02	PK	Vertical	PASS
3	17933.6967	-57.89	13.86	-44.03	-25.00	19.03	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B12 23060 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

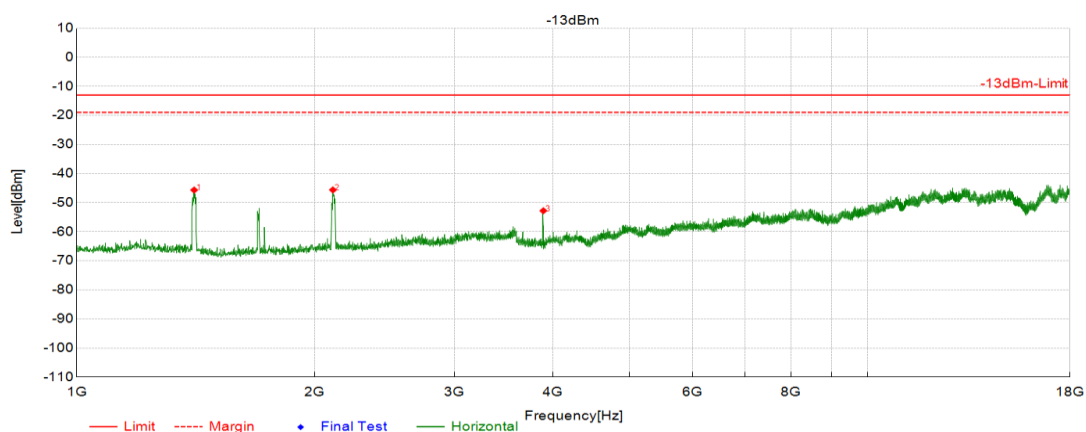

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	1407.1704	-32.37	-13.31	-45.68	-13.00	32.68	PK	Horizontal	PASS
2	2107.6054	-34.33	-11.31	-45.64	-13.00	32.64	PK	Horizontal	PASS
3	3889.2945	-46.34	-6.46	-52.80	-13.00	39.80	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B12 23060 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

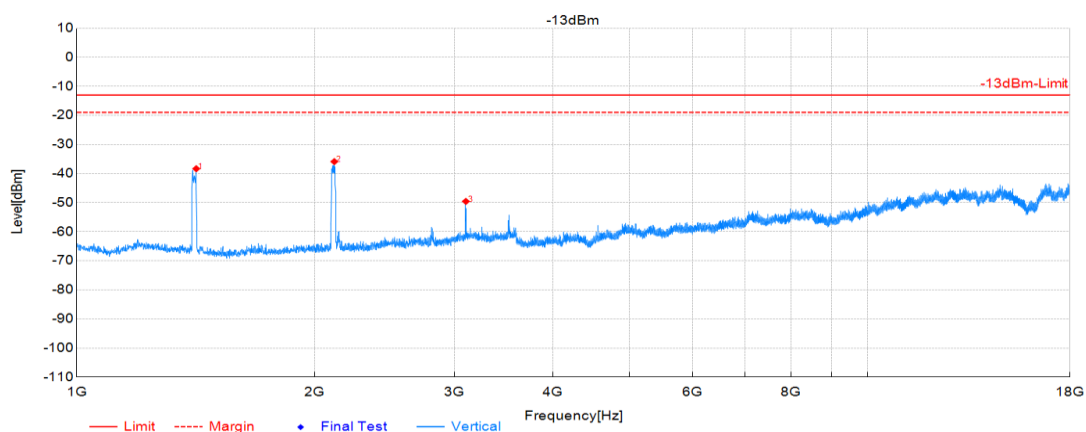

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	1415.6708	-24.54	-13.80	-38.34	-13.00	25.34	PK	Vertical	PASS
2	2116.1058	-24.44	-11.46	-35.90	-13.00	22.90	PK	Vertical	PASS
3	3103.8552	-41.78	-7.80	-49.58	-13.00	36.58	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B12 23095 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

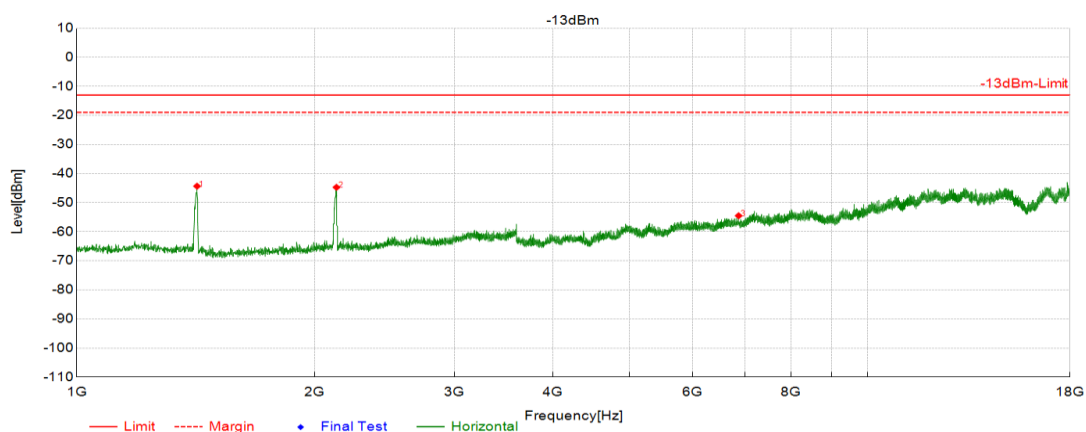

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	1419.071	-30.85	-13.50	-44.35	-13.00	31.35	PK	Horizontal	PASS
2	2129.7065	-33.42	-11.33	-44.75	-13.00	31.75	PK	Horizontal	PASS
3	6866.9934	-54.71	0.18	-54.53	-13.00	41.53	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B12 23095 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

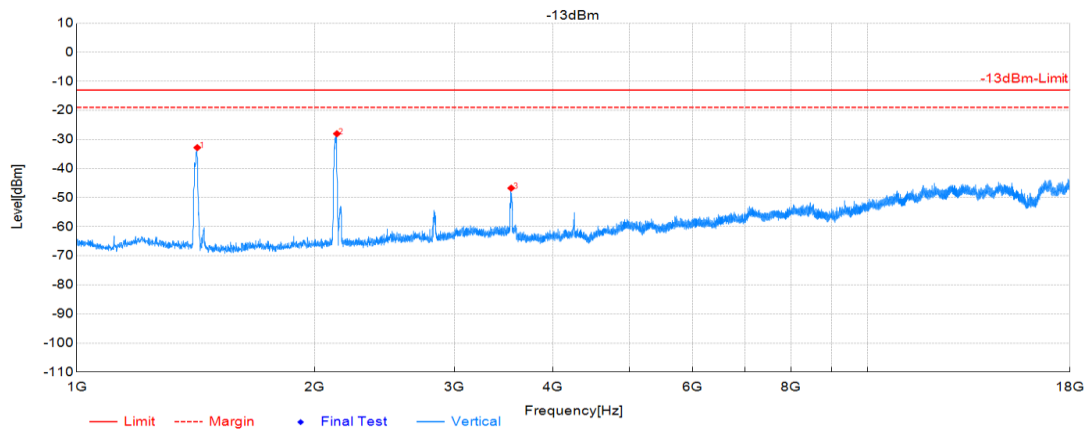

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	1419.921	-18.98	-13.83	-32.81	-13.00	19.81	PK	Vertical	PASS
2	2132.2566	-16.58	-11.46	-28.04	-13.00	15.04	PK	Vertical	PASS
3	3541.6271	-39.52	-7.23	-46.75	-13.00	33.75	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B12 23130 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

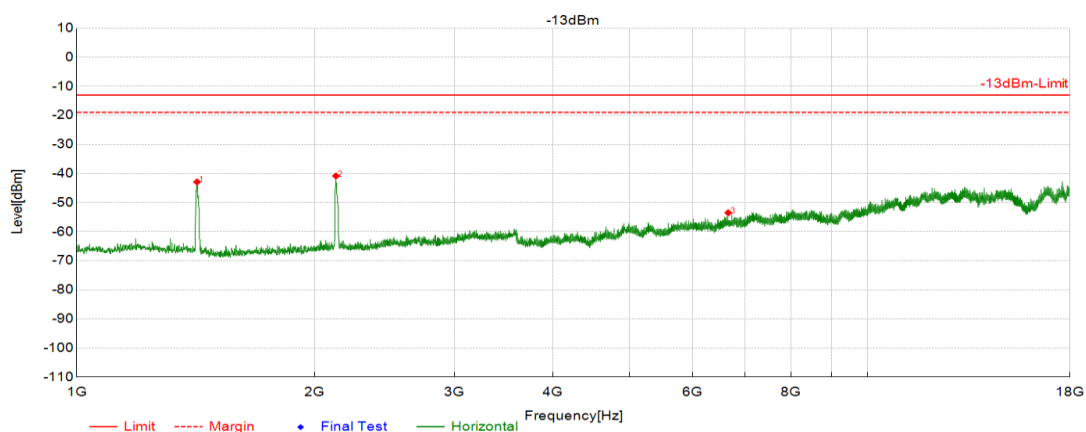

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	1419.071	-29.40	-13.50	-42.90	-13.00	29.90	PK	Horizontal	PASS
2	2126.3063	-29.51	-11.33	-40.84	-13.00	27.84	PK	Horizontal	PASS
3	6662.1331	-53.60	0.11	-53.49	-13.00	40.49	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B12 23130 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

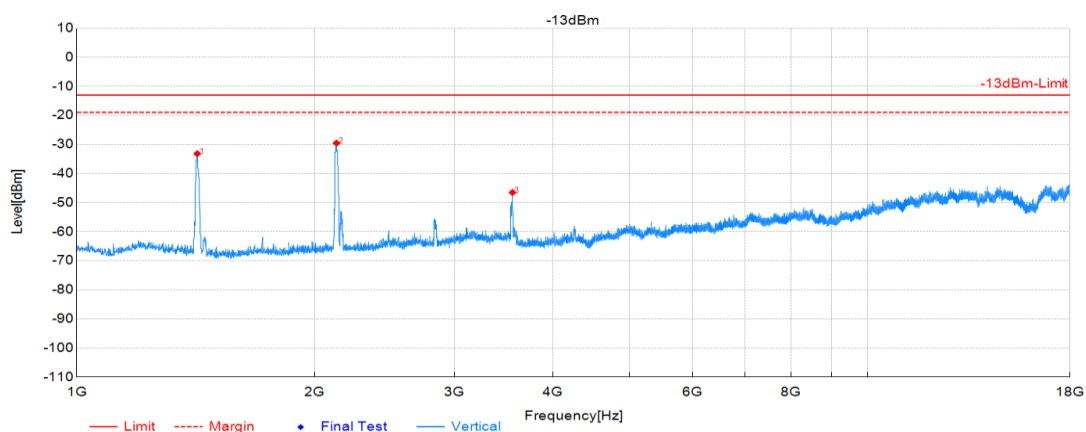

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	1419.921	-19.35	-13.83	-33.18	-13.00	20.18	PK	Vertical	PASS
2	2129.7065	-18.07	-11.47	-29.54	-13.00	16.54	PK	Vertical	PASS
3	3555.2278	-39.54	-6.99	-46.53	-13.00	33.53	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B13 23205 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

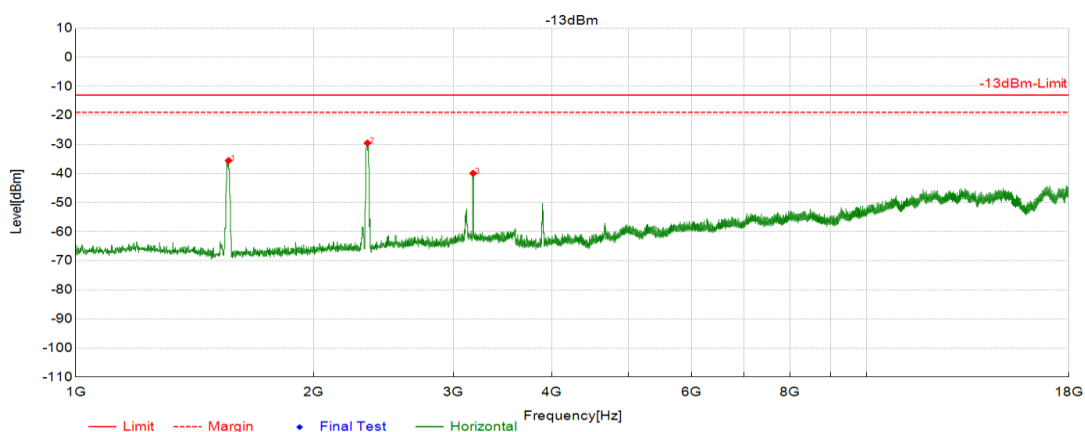

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	1560.178	-21.07	-14.47	-35.54	-13.00	22.54	PK	Horizontal	PASS
2	2337.1169	-17.95	-11.56	-29.51	-13.00	16.51	PK	Horizontal	PASS
3	3179.509	-32.10	-7.82	-39.92	-13.00	26.92	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B13 23205 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

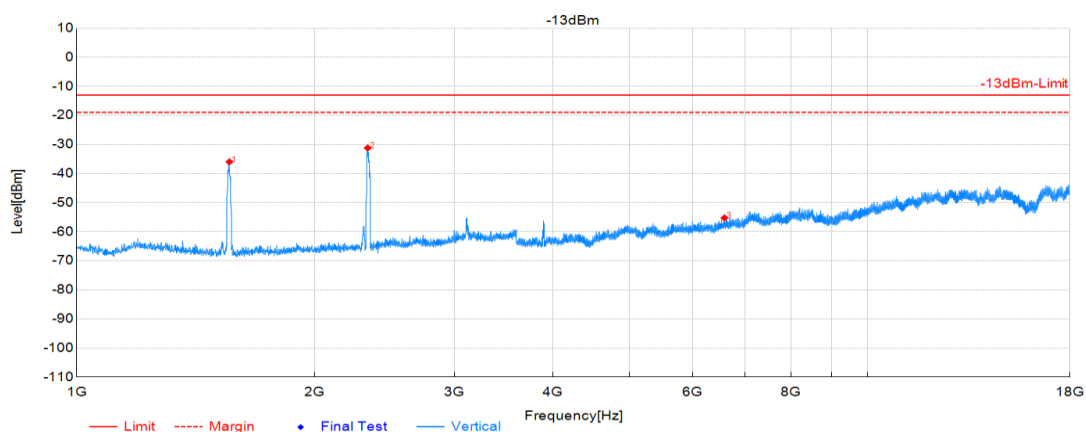

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	1559.328	-21.64	-14.34	-35.98	-13.00	22.98	PK	Vertical	PASS
2	2332.0166	-19.71	-11.50	-31.21	-13.00	18.21	PK	Vertical	PASS
3	6589.0295	-55.06	-0.20	-55.26	-13.00	42.26	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B13 23230 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

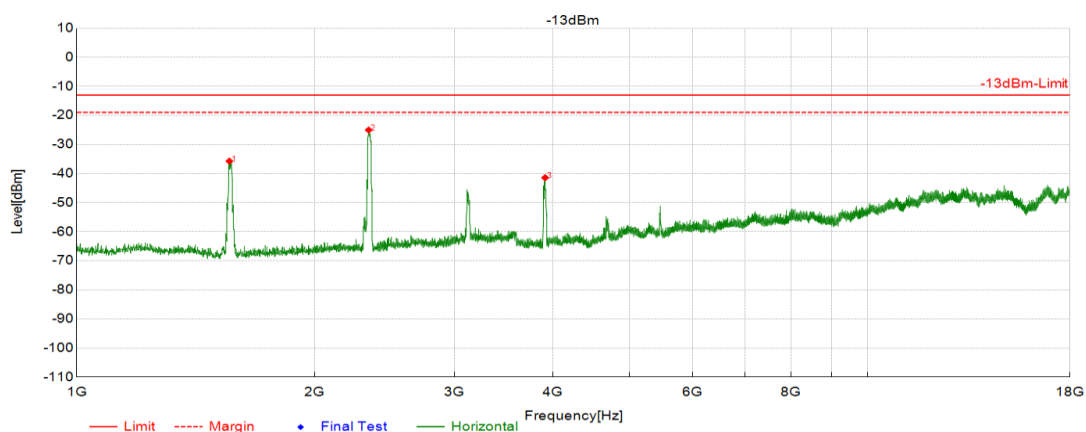

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	1559.328	-21.26	-14.47	-35.73	-13.00	22.73	PK	Horizontal	PASS
2	2338.8169	-13.47	-11.56	-25.03	-13.00	12.03	PK	Horizontal	PASS
3	3908.8454	-34.97	-6.47	-41.44	-13.00	28.44	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B13 23230 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

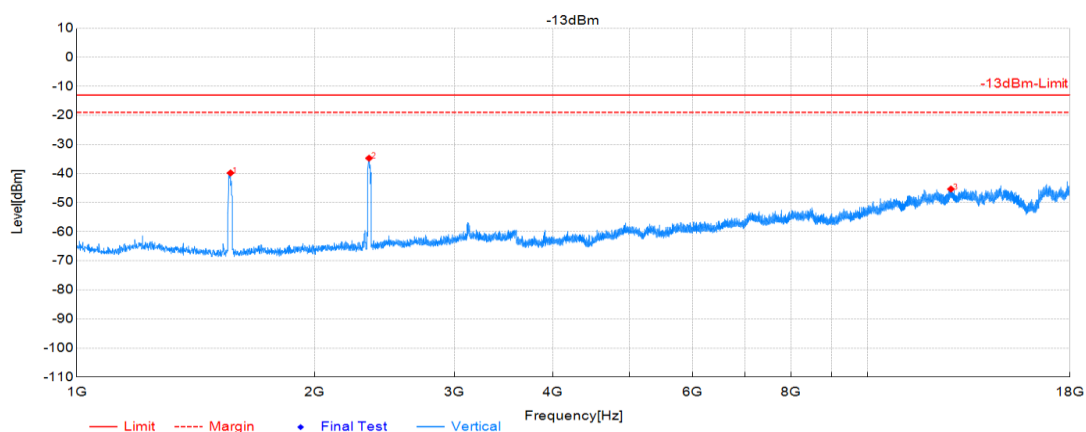

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	1564.4282	-25.47	-14.34	-39.81	-13.00	26.81	PK	Vertical	PASS
2	2341.3671	-23.24	-11.49	-34.73	-13.00	21.73	PK	Vertical	PASS
3	12739.937	-57.09	11.74	-45.35	-13.00	32.35	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B13 23255 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

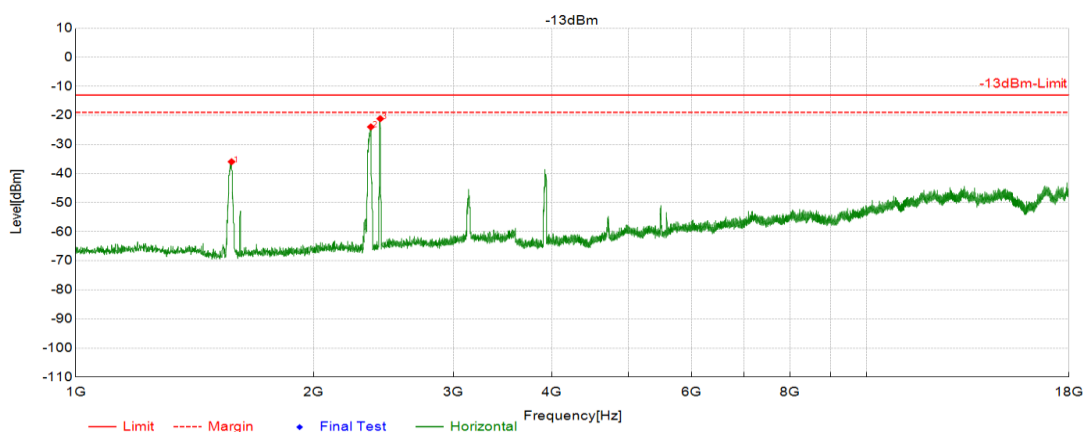

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	1573.7787	-21.55	-14.40	-35.95	-13.00	22.95	PK	Horizontal	PASS
2	2360.918	-12.48	-11.49	-23.97	-13.00	10.97	PK	Horizontal	PASS
3	2426.3713	-10.08	-11.08	-21.16	-13.00	8.16	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B13 23255 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

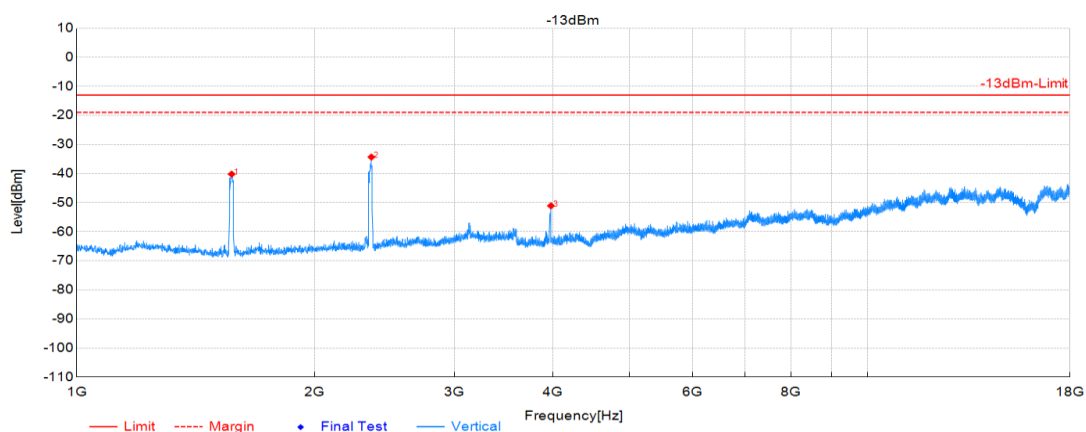

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	1569.5285	-25.86	-14.34	-40.20	-13.00	27.20	PK	Vertical	PASS
2	2357.5179	-22.89	-11.44	-34.33	-13.00	21.33	PK	Vertical	PASS
3	3975.9988	-44.66	-6.44	-51.10	-13.00	38.10	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B38 37850 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

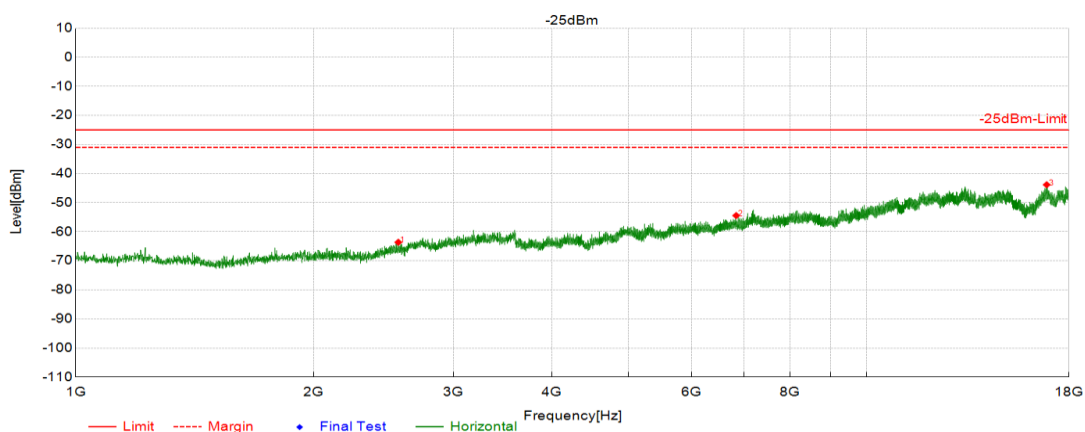

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	2557.2779	-53.19	-10.45	-63.64	-25.00	38.64	PK	Horizontal	PASS
2	6838.0919	-54.73	0.28	-54.45	-25.00	29.45	PK	Horizontal	PASS
3	16884.7442	-55.09	11.23	-43.86	-25.00	18.86	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B38 37850 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

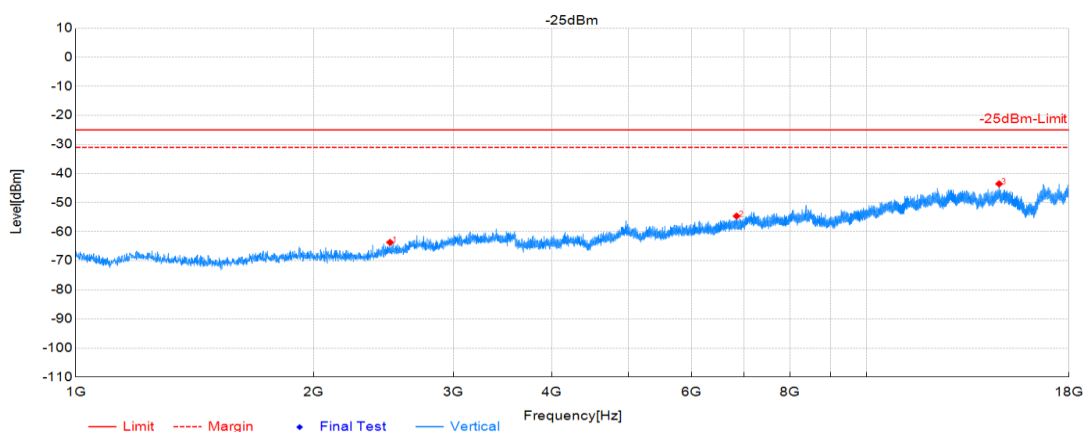

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	2496.0748	-53.54	-10.13	-63.67	-25.00	38.67	PK	Vertical	PASS
2	6845.7423	-54.63	-0.01	-54.64	-25.00	29.64	PK	Vertical	PASS
3	14701.8351	-56.07	12.51	-43.56	-25.00	18.56	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B38 38000 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

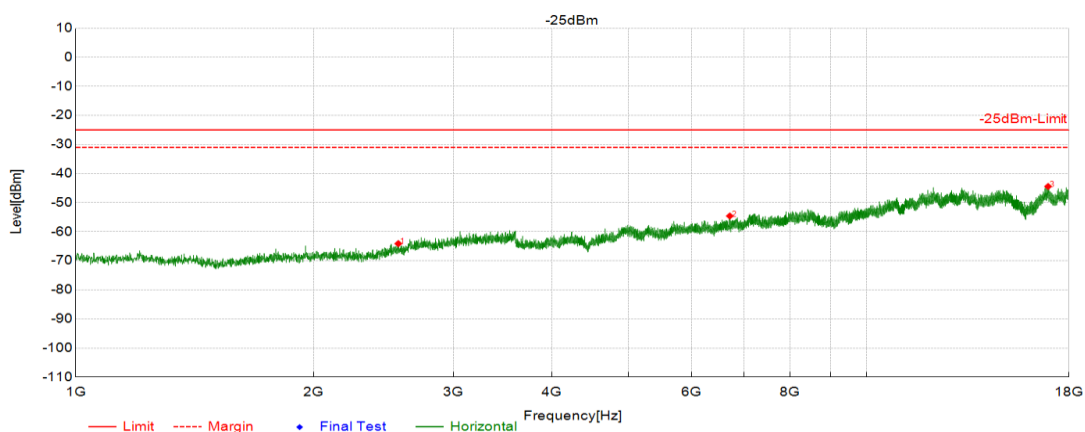

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	2557.2779	-53.66	-10.45	-64.11	-25.00	39.11	PK	Horizontal	PASS
2	6712.2856	-54.72	0.11	-54.61	-25.00	29.61	PK	Horizontal	PASS
3	16954.4477	-55.58	11.13	-44.45	-25.00	19.45	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B38 38000 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

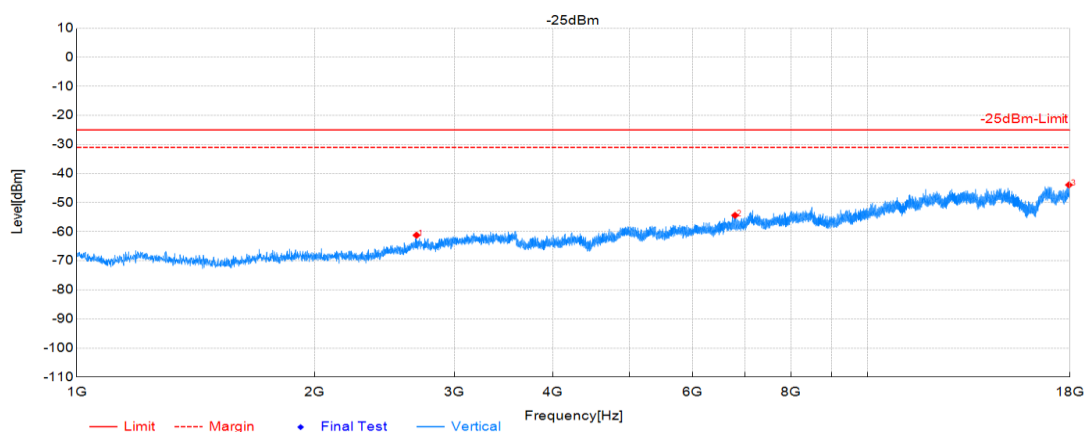

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	2688.1844	-51.66	-9.56	-61.22	-25.00	36.22	PK	Vertical	PASS
2	6795.5898	-54.53	0.14	-54.39	-25.00	29.39	PK	Vertical	PASS
3	17965.9983	-57.86	13.94	-43.92	-25.00	18.92	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B38 38150 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

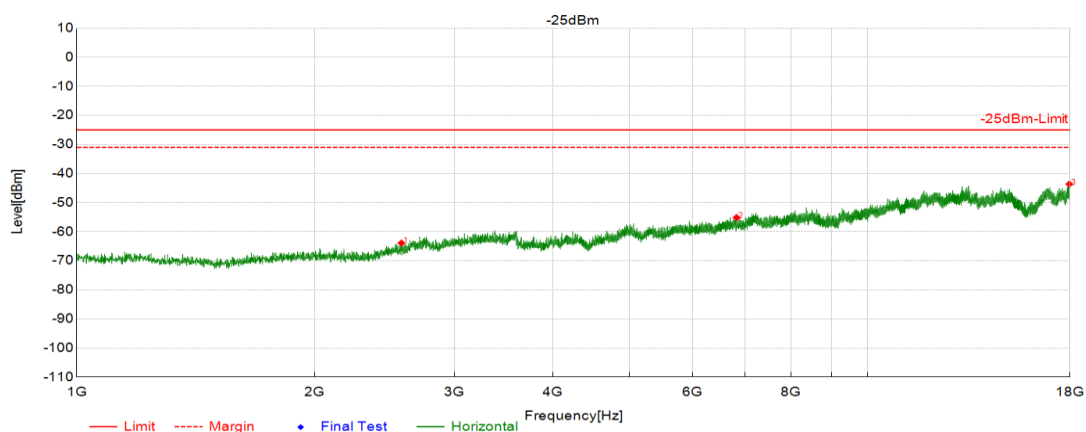

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	2572.5786	-53.44	-10.49	-63.93	-25.00	38.93	PK	Horizontal	PASS
2	6825.3413	-55.49	0.33	-55.16	-25.00	30.16	PK	Horizontal	PASS
3	17983.8492	-57.02	13.38	-43.64	-25.00	18.64	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B38 38150 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

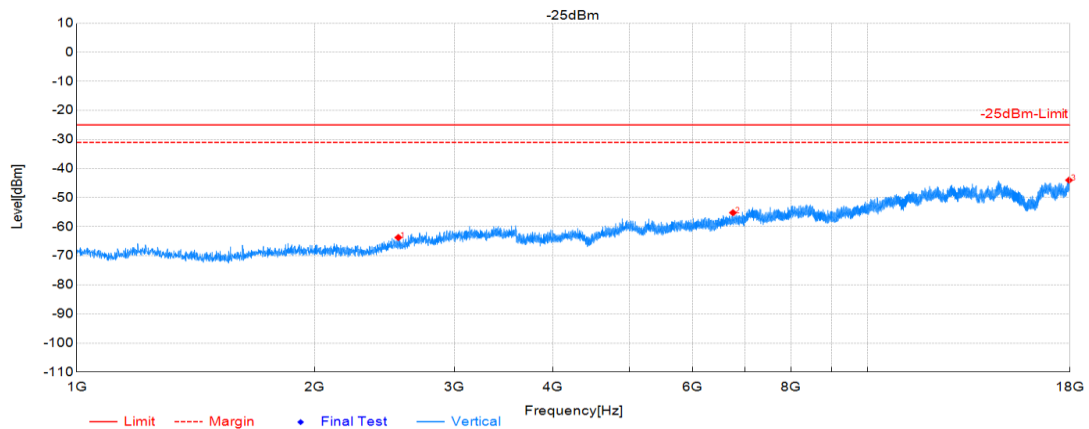

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	2549.6275	-53.33	-10.40	-63.73	-25.00	38.73	PK	Vertical	PASS
2	6754.7877	-55.22	0.02	-55.20	-25.00	30.20	PK	Vertical	PASS
3	17969.3985	-57.95	13.94	-44.01	-25.00	19.01	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B66 132072 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

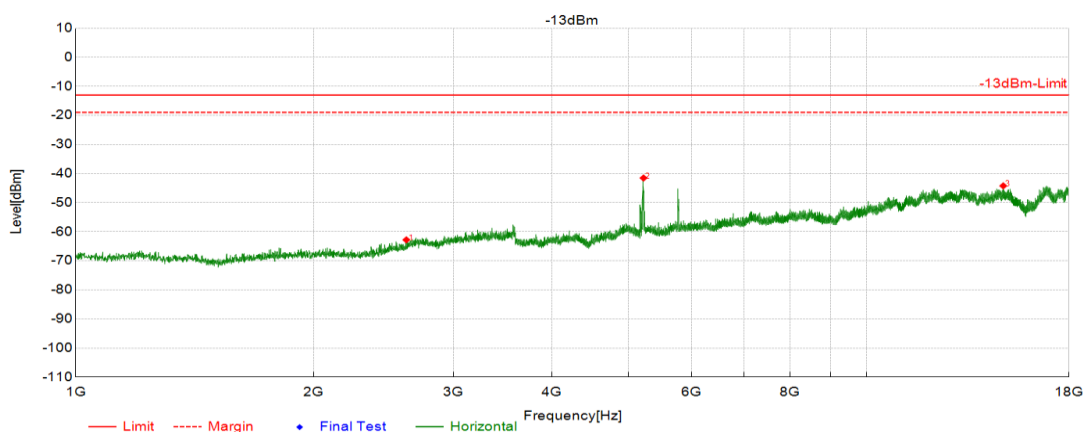

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	2617.6309	-52.45	-10.35	-62.80	-13.00	49.80	PK	Horizontal	PASS
2	5221.3111	-39.31	-2.23	-41.54	-13.00	28.54	PK	Horizontal	PASS
3	14880.344	-55.51	11.27	-44.24	-13.00	31.24	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B66 132072 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

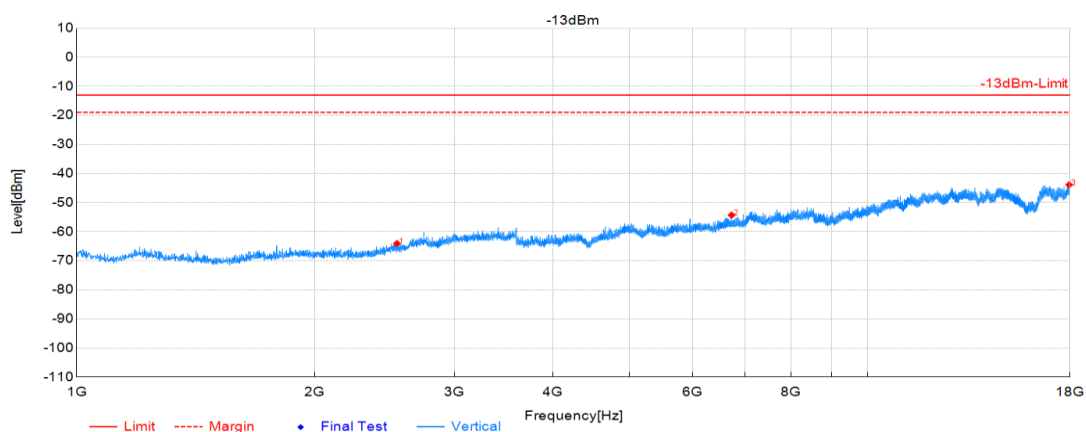

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	2539.427	-53.72	-10.33	-64.05	-13.00	51.05	PK	Vertical	PASS
2	6727.5864	-54.23	-0.07	-54.30	-13.00	41.30	PK	Vertical	PASS
3	17975.3488	-57.82	13.96	-43.86	-13.00	30.86	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B66 132322 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

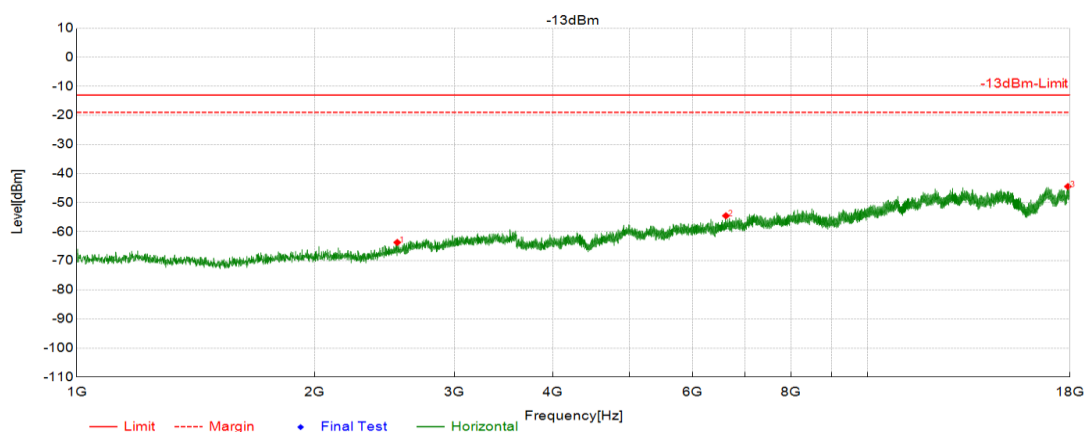

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	2541.9771	-53.28	-10.42	-63.70	-13.00	50.70	PK	Horizontal	PASS
2	6617.0809	-54.69	0.15	-54.54	-13.00	41.54	PK	Horizontal	PASS
3	17909.0455	-58.09	13.63	-44.46	-13.00	31.46	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B66 132322 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

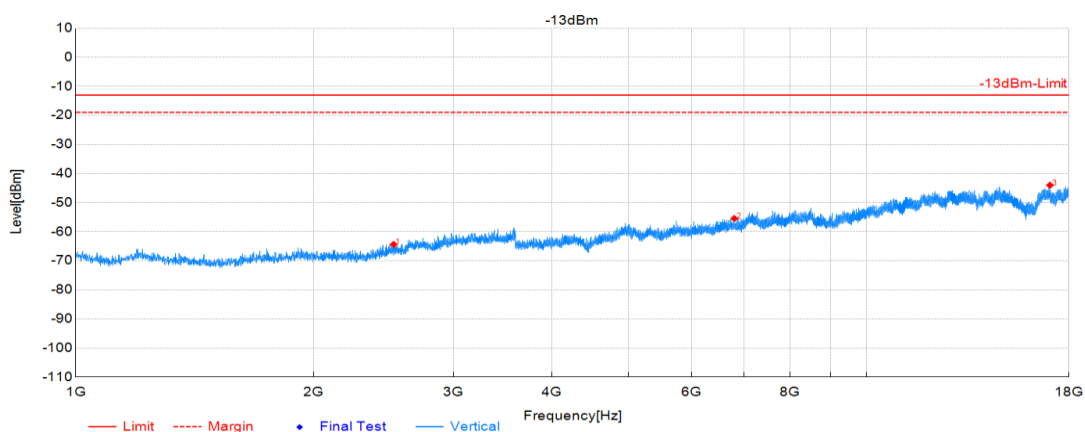

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	2522.4261	-54.15	-10.22	-64.37	-13.00	51.37	PK	Vertical	PASS
2	6800.69	-55.61	0.15	-55.46	-13.00	42.46	PK	Vertical	PASS
3	17047.1024	-55.09	11.07	-44.02	-13.00	31.02	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B66 132572 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

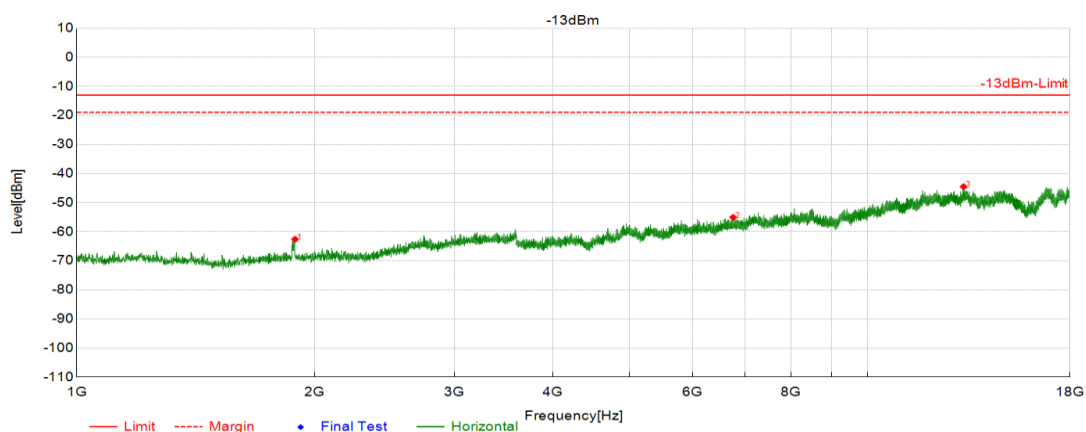

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	1887.4444	-49.83	-12.77	-62.60	-13.00	49.60	PK	Horizontal	PASS
2	6756.4878	-55.35	0.27	-55.08	-13.00	42.08	PK	Horizontal	PASS
3	13218.5109	-56.33	11.80	-44.53	-13.00	31.53	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B66 132572 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

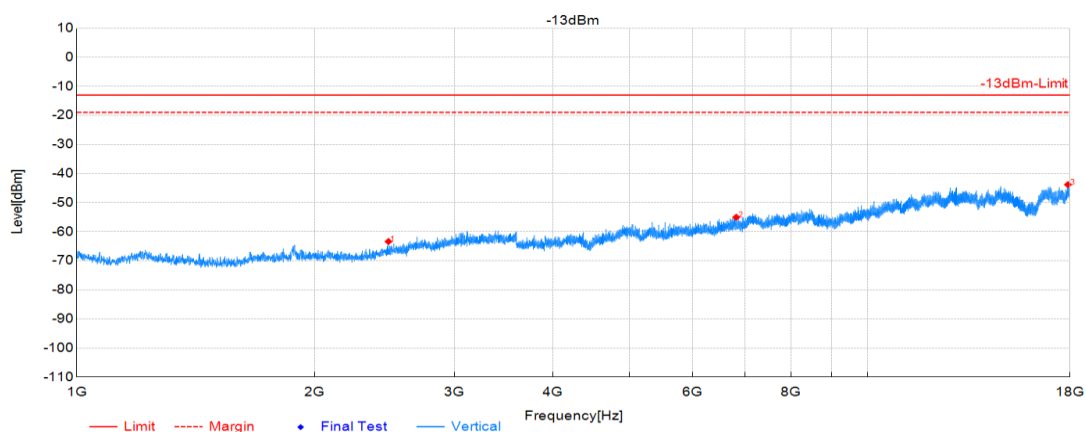

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	2477.3739	-53.02	-10.36	-63.38	-13.00	50.38	PK	Vertical	PASS
2	6818.5409	-55.13	0.09	-55.04	-13.00	42.04	PK	Vertical	PASS
3	17911.5956	-57.62	13.80	-43.82	-13.00	30.82	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B2 18700 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

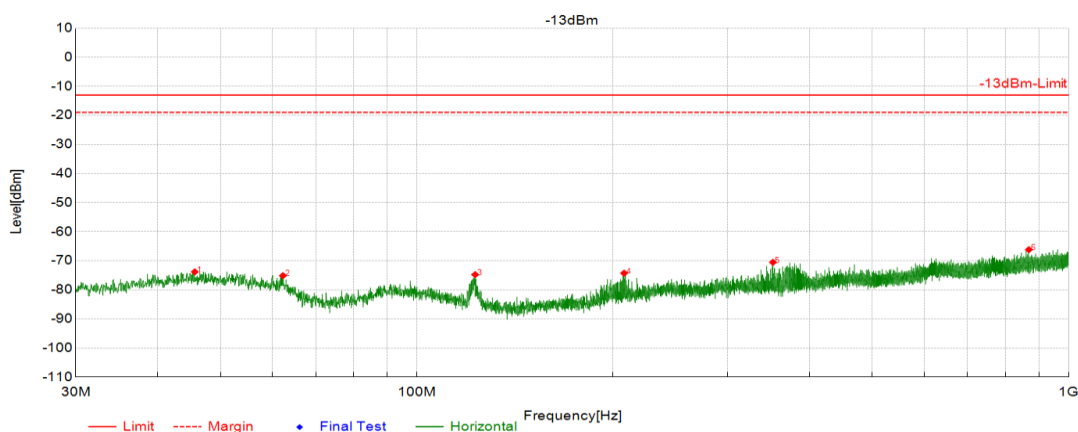

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	45.6655	-66.16	-7.65	-73.81	-13.00	60.81	PK	Horizontal	PASS
2	62.3495	-64.16	-10.95	-75.11	-13.00	62.11	PK	Horizontal	PASS
3	122.926	-59.95	-14.81	-74.76	-13.00	61.76	PK	Horizontal	PASS
4	208.0435	-62.88	-11.39	-74.27	-13.00	61.27	PK	Horizontal	PASS
5	351.8945	-62.84	-7.69	-70.53	-13.00	57.53	PK	Horizontal	PASS
6	868.9045	-67.06	0.87	-66.19	-13.00	53.19	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B2 18700 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

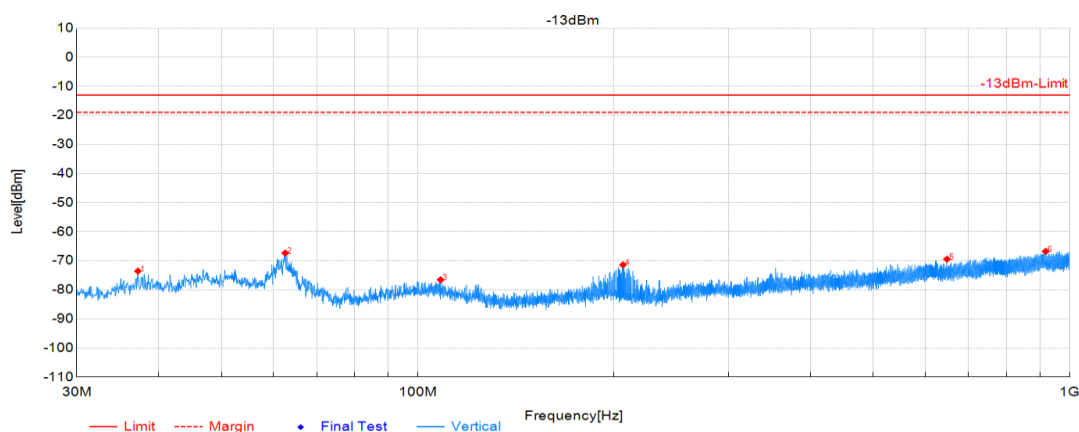

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	37.2265	-62.37	-11.19	-73.56	-13.00	60.56	PK	Vertical	PASS
2	62.6405	-56.44	-10.89	-67.33	-13.00	54.33	PK	Vertical	PASS
3	108.4245	-65.92	-10.61	-76.53	-13.00	63.53	PK	Vertical	PASS
4	206.4915	-60.11	-11.29	-71.40	-13.00	58.40	PK	Vertical	PASS
5	648.4235	-66.99	-2.47	-69.46	-13.00	56.46	PK	Vertical	PASS
6	918.811	-68.69	1.92	-66.77	-13.00	53.77	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B2 18900 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

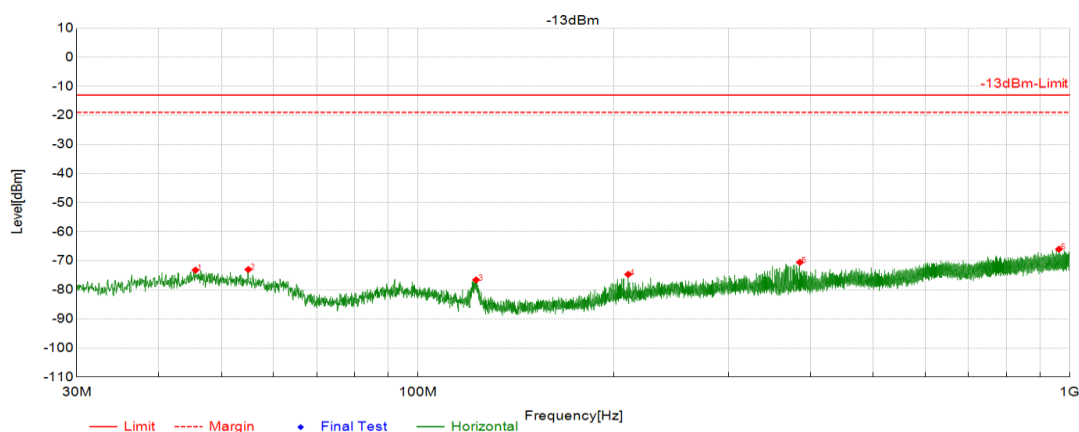

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	45.617	-65.56	-7.66	-73.22	-13.00	60.22	PK	Horizontal	PASS
2	54.9775	-64.55	-8.47	-73.02	-13.00	60.02	PK	Horizontal	PASS
3	122.926	-61.75	-14.81	-76.56	-13.00	63.56	PK	Horizontal	PASS
4	210.323	-63.35	-11.33	-74.68	-13.00	61.68	PK	Horizontal	PASS
5	385.699	-63.32	-7.20	-70.52	-13.00	57.52	PK	Horizontal	PASS
6	962.9945	-67.80	1.78	-66.02	-13.00	53.02	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B2 18900 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

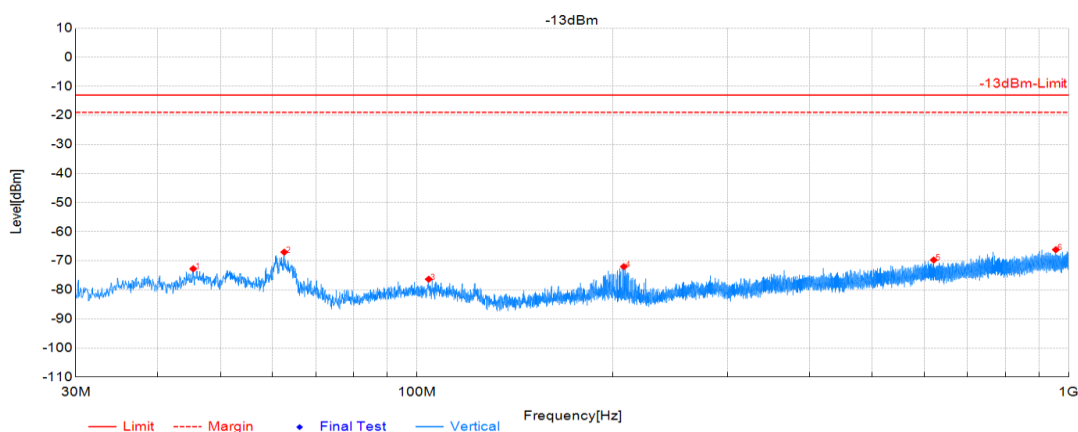

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	45.423	-63.36	-9.39	-72.75	-13.00	59.75	PK	Vertical	PASS
2	62.6405	-56.14	-10.89	-67.03	-13.00	54.03	PK	Vertical	PASS
3	104.3505	-65.80	-10.53	-76.33	-13.00	63.33	PK	Vertical	PASS
4	207.8495	-60.57	-11.45	-72.02	-13.00	59.02	PK	Vertical	PASS
5	620.9725	-67.46	-2.27	-69.73	-13.00	56.73	PK	Vertical	PASS
6	955.8165	-67.67	1.48	-66.19	-13.00	53.19	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B2 19100 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

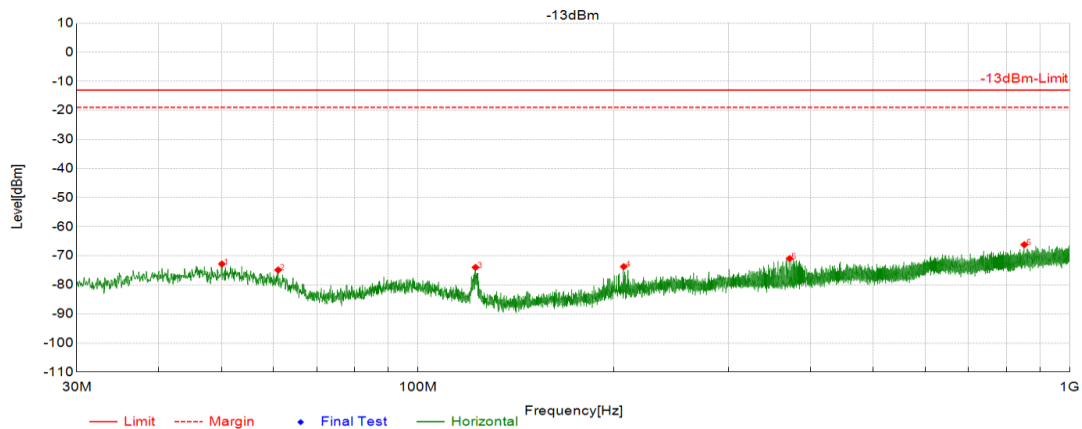

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	50.079	-65.64	-7.19	-72.83	-13.00	59.83	PK	Horizontal	PASS
2	61.0885	-64.54	-10.34	-74.88	-13.00	61.88	PK	Horizontal	PASS
3	122.635	-59.22	-14.77	-73.99	-13.00	60.99	PK	Horizontal	PASS
4	207.025	-62.31	-11.42	-73.73	-13.00	60.73	PK	Horizontal	PASS
5	371.925	-63.35	-7.61	-70.96	-13.00	57.96	PK	Horizontal	PASS
6	852.0265	-66.85	0.67	-66.18	-13.00	53.18	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B2 19100 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

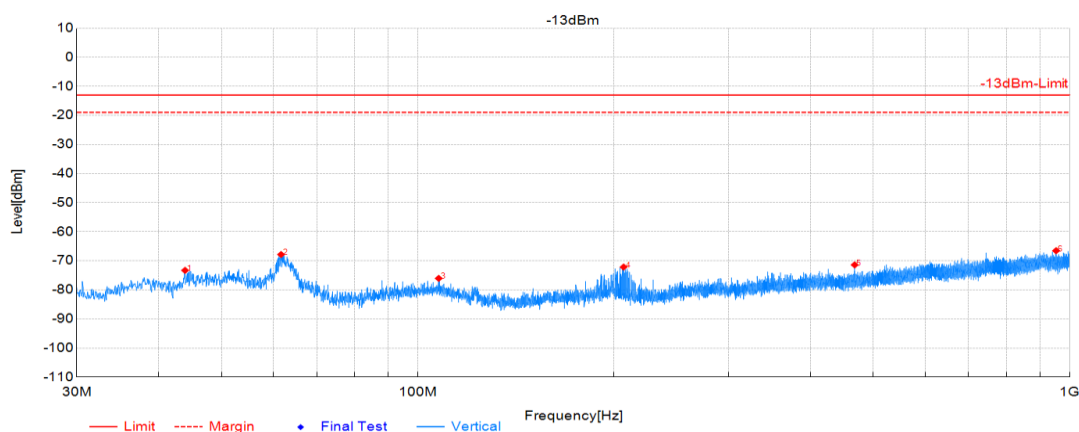

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	43.968	-63.66	-9.65	-73.31	-13.00	60.31	PK	Vertical	PASS
2	61.719	-57.34	-10.50	-67.84	-13.00	54.84	PK	Vertical	PASS
3	107.697	-65.45	-10.60	-76.05	-13.00	63.05	PK	Vertical	PASS
4	206.928	-60.82	-11.34	-72.16	-13.00	59.16	PK	Vertical	PASS
5	467.955	-65.75	-5.66	-71.41	-13.00	58.41	PK	Vertical	PASS
6	953.2945	-68.01	1.46	-66.55	-13.00	53.55	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B4 20050 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

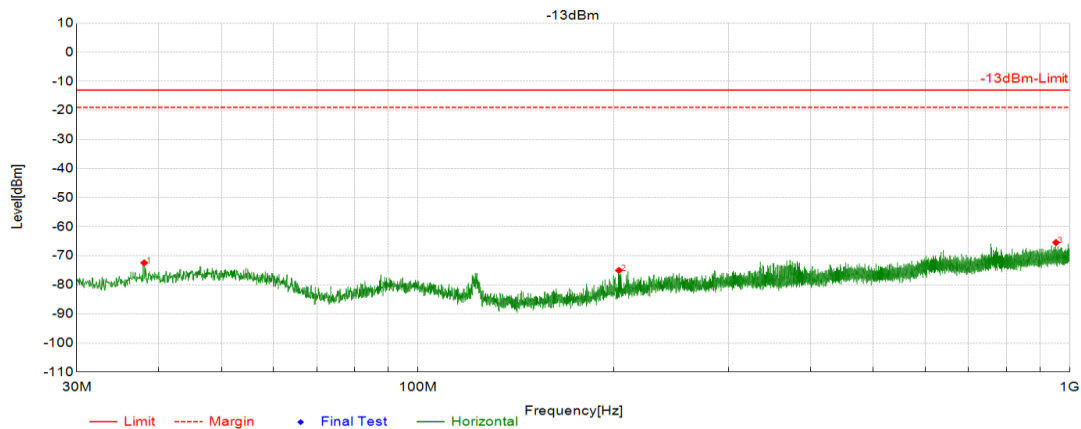

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	38.051	-63.55	-8.88	-72.43	-13.00	59.43	PK	Horizontal	PASS
2	203.5815	-63.51	-11.52	-75.03	-13.00	62.03	PK	Horizontal	PASS
3	953.0035	-67.16	1.73	-65.43	-13.00	52.43	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B4 20050 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

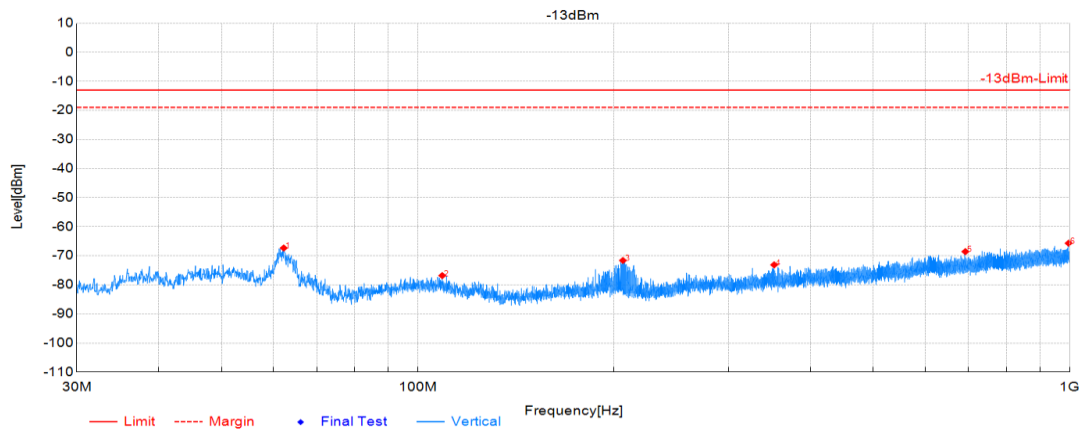

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	62.301	-56.59	-10.74	-67.33	-13.00	54.33	PK	Vertical	PASS
2	109.055	-66.19	-10.63	-76.82	-13.00	63.82	PK	Vertical	PASS
3	206.443	-60.34	-11.28	-71.62	-13.00	58.62	PK	Vertical	PASS
4	352.137	-65.78	-7.35	-73.13	-13.00	60.13	PK	Vertical	PASS
5	691.928	-67.05	-1.53	-68.58	-13.00	55.58	PK	Vertical	PASS
6	996.314	-68.03	2.35	-65.68	-13.00	52.68	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B4 20175 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

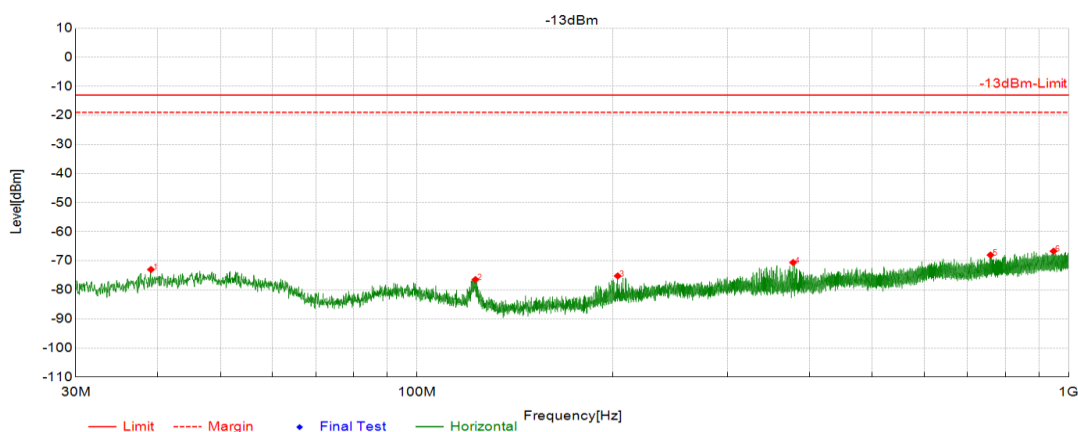

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	39.118	-64.47	-8.55	-73.02	-13.00	60.02	PK	Horizontal	PASS
2	123.0715	-61.64	-14.82	-76.46	-13.00	63.46	PK	Horizontal	PASS
3	203.3875	-63.69	-11.52	-75.21	-13.00	62.21	PK	Horizontal	PASS
4	377.8905	-63.15	-7.46	-70.61	-13.00	57.61	PK	Horizontal	PASS
5	758.858	-67.49	-0.53	-68.02	-13.00	55.02	PK	Horizontal	PASS
6	948.0565	-68.35	1.65	-66.70	-13.00	53.70	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B4 20175 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

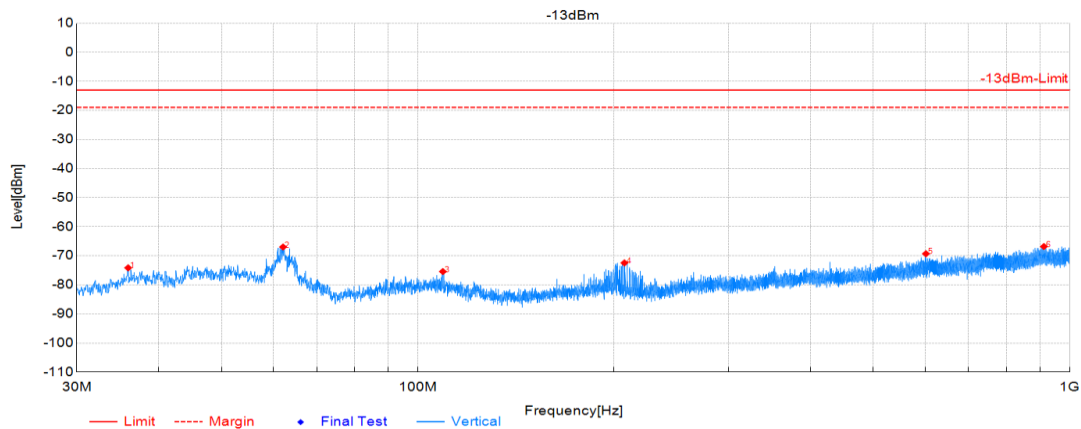

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	35.9655	-62.58	-11.57	-74.15	-13.00	61.15	PK	Vertical	PASS
2	62.1555	-56.31	-10.68	-66.99	-13.00	53.99	PK	Vertical	PASS
3	109.2975	-64.80	-10.63	-75.43	-13.00	62.43	PK	Vertical	PASS
4	207.51	-61.04	-11.42	-72.46	-13.00	59.46	PK	Vertical	PASS
5	601.9605	-67.01	-2.29	-69.30	-13.00	56.30	PK	Vertical	PASS
6	913.0395	-68.70	1.87	-66.83	-13.00	53.83	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B4 20300 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

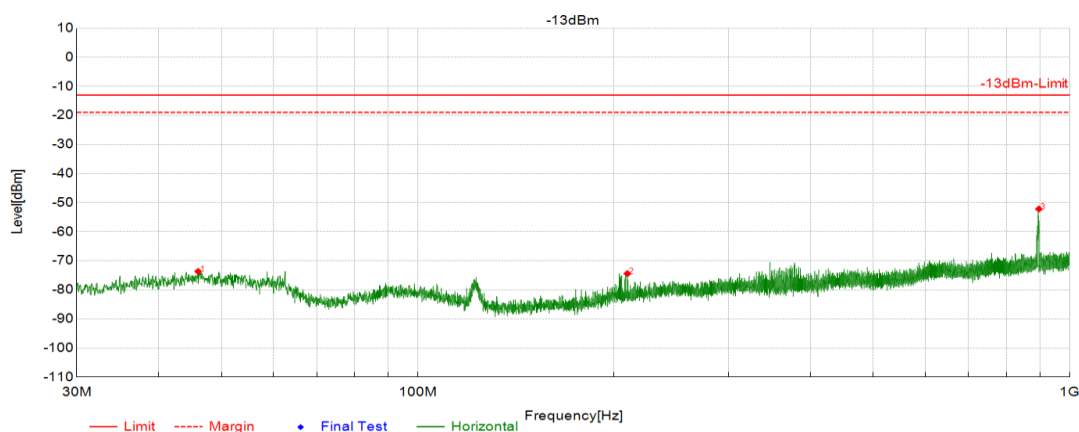

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	46.0535	-66.07	-7.61	-73.68	-13.00	60.68	PK	Horizontal	PASS
2	209.6925	-63.08	-11.35	-74.43	-13.00	61.43	PK	Horizontal	PASS
3	897.1315	-53.28	1.09	-52.19	-13.00	39.19	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B4 20300 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

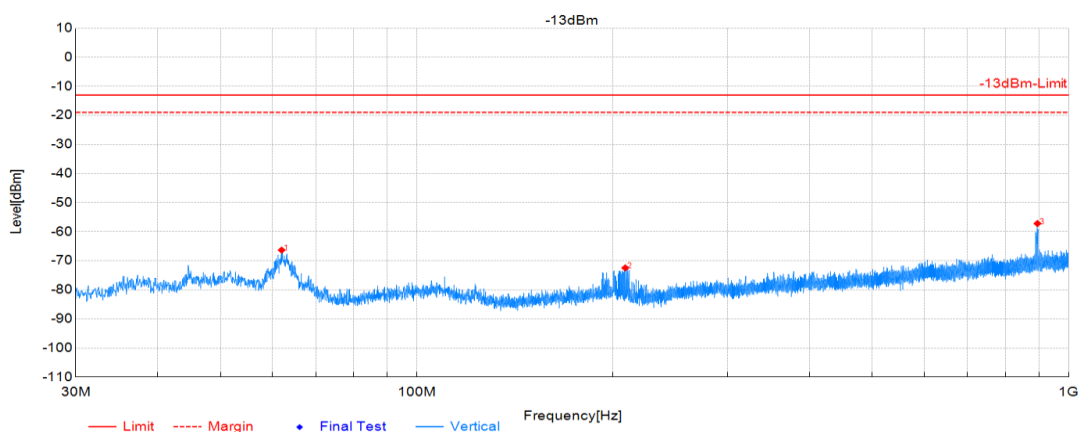

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	62.0585	-55.68	-10.65	-66.33	-13.00	53.33	PK	Vertical	PASS
2	208.868	-60.87	-11.58	-72.45	-13.00	59.45	PK	Vertical	PASS
3	895.8705	-58.46	1.27	-57.19	-13.00	44.19	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B7 20850 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

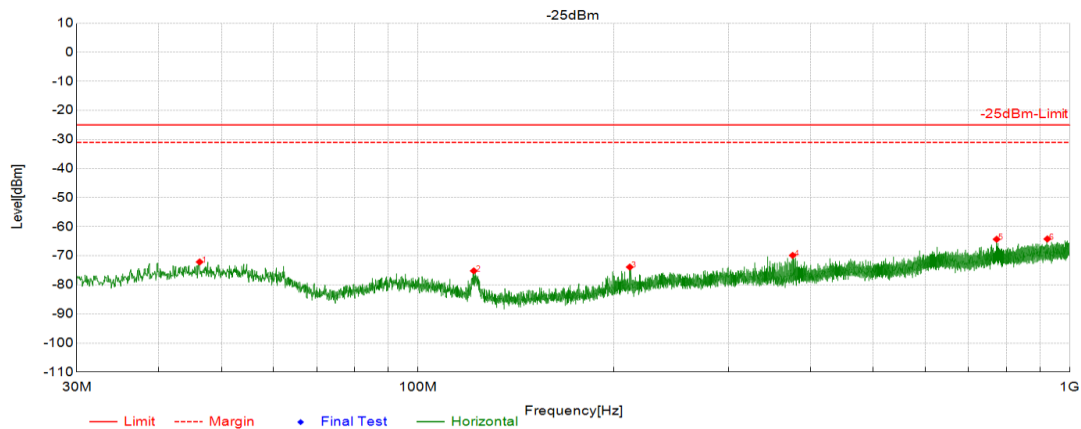

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	46.296	-64.54	-7.58	-72.12	-25.00	47.12	PK	Horizontal	PASS
2	121.9075	-60.50	-14.69	-75.19	-25.00	50.19	PK	Horizontal	PASS
3	211.487	-62.62	-11.27	-73.89	-25.00	48.89	PK	Horizontal	PASS
4	375.999	-62.36	-7.51	-69.87	-25.00	44.87	PK	Horizontal	PASS
5	772.729	-64.08	-0.25	-64.33	-25.00	39.33	PK	Horizontal	PASS
6	924.2915	-65.69	1.47	-64.22	-25.00	39.22	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B7 20850 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

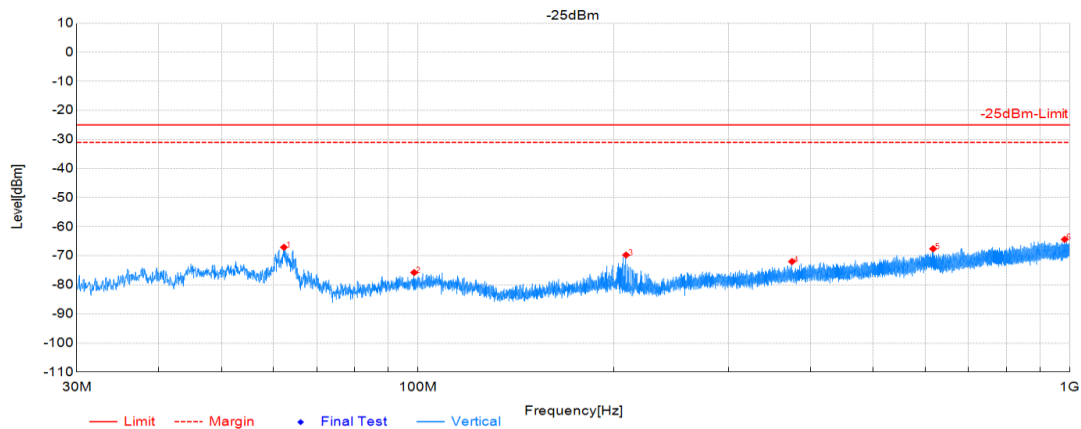

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	62.3495	-56.30	-10.77	-67.07	-25.00	42.07	PK	Vertical	PASS
2	98.773	-65.16	-10.59	-75.75	-25.00	50.75	PK	Vertical	PASS
3	208.7225	-58.18	-11.56	-69.74	-25.00	44.74	PK	Vertical	PASS
4	375.0775	-64.83	-7.15	-71.98	-25.00	46.98	PK	Vertical	PASS
5	617.3835	-65.45	-2.15	-67.60	-25.00	42.60	PK	Vertical	PASS
6	982.637	-66.24	1.87	-64.37	-25.00	39.37	PK	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

