


Test Mode:	LTE B7 21100 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

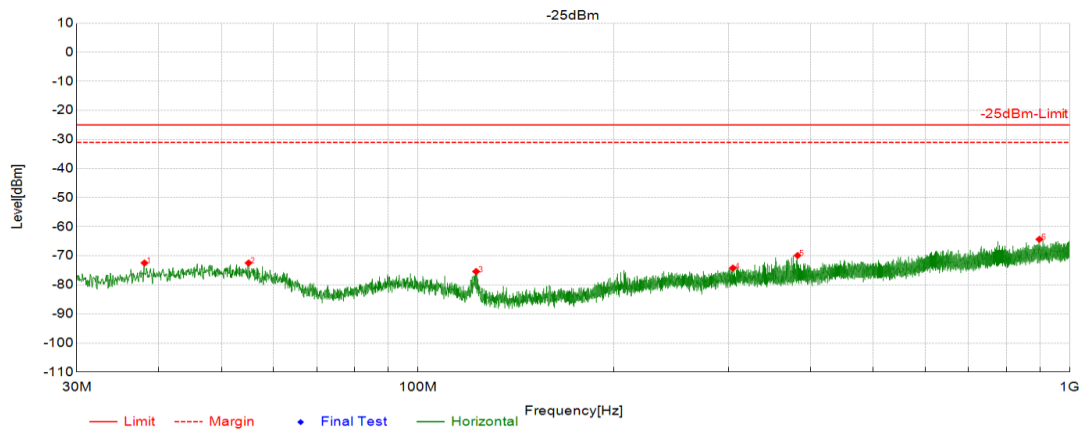

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	38.0995	-63.61	-8.86	-72.47	-25.00	47.47	PK	Horizontal	PASS
2	55.026	-63.99	-8.49	-72.48	-25.00	47.48	PK	Horizontal	PASS
3	122.926	-60.60	-14.81	-75.41	-25.00	50.41	PK	Horizontal	PASS
4	304.413	-66.26	-7.96	-74.22	-25.00	49.22	PK	Horizontal	PASS
5	382.5465	-62.59	-7.31	-69.90	-25.00	44.90	PK	Horizontal	PASS
6	898.538	-65.42	1.07	-64.35	-25.00	39.35	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B7 21100 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

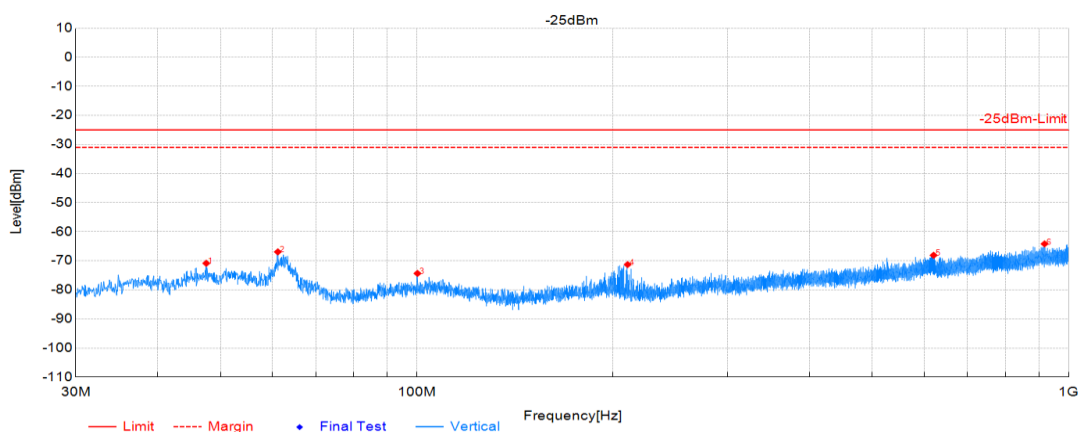

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	47.557	-61.84	-9.02	-70.86	-25.00	45.86	PK	Vertical	PASS
2	61.234	-56.64	-10.29	-66.93	-25.00	41.93	PK	Vertical	PASS
3	100.2765	-63.90	-10.45	-74.35	-25.00	49.35	PK	Vertical	PASS
4	210.614	-59.55	-11.76	-71.31	-25.00	46.31	PK	Vertical	PASS
5	620.6815	-65.86	-2.25	-68.11	-25.00	43.11	PK	Vertical	PASS
6	918.423	-66.11	1.92	-64.19	-25.00	39.19	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B7 21350 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

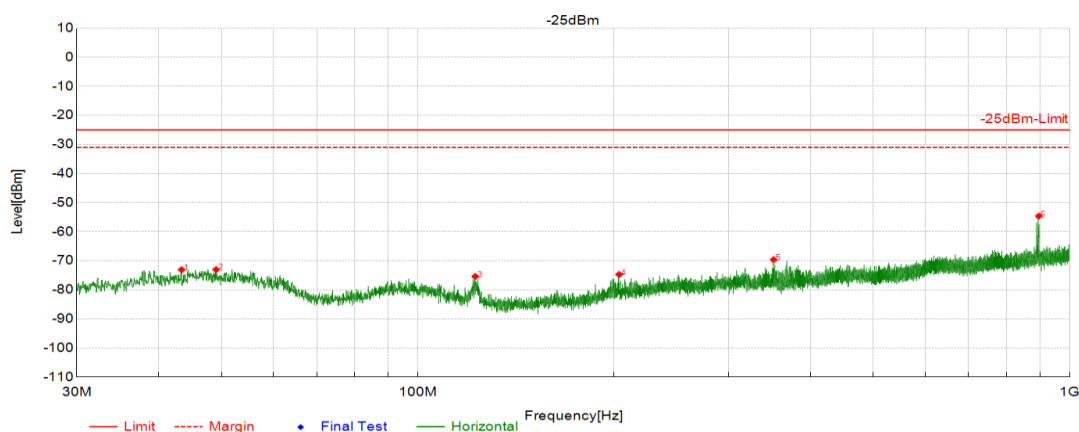

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	43.4345	-65.19	-7.89	-73.08	-25.00	48.08	PK	Horizontal	PASS
2	49.0605	-65.75	-7.27	-73.02	-25.00	48.02	PK	Horizontal	PASS
3	122.538	-60.63	-14.76	-75.39	-25.00	50.39	PK	Horizontal	PASS
4	203.6785	-63.19	-11.51	-74.70	-25.00	49.70	PK	Horizontal	PASS
5	351.458	-61.95	-7.66	-69.61	-25.00	44.61	PK	Horizontal	PASS
6	896.9375	-55.73	1.09	-54.64	-25.00	29.64	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B7 21350 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

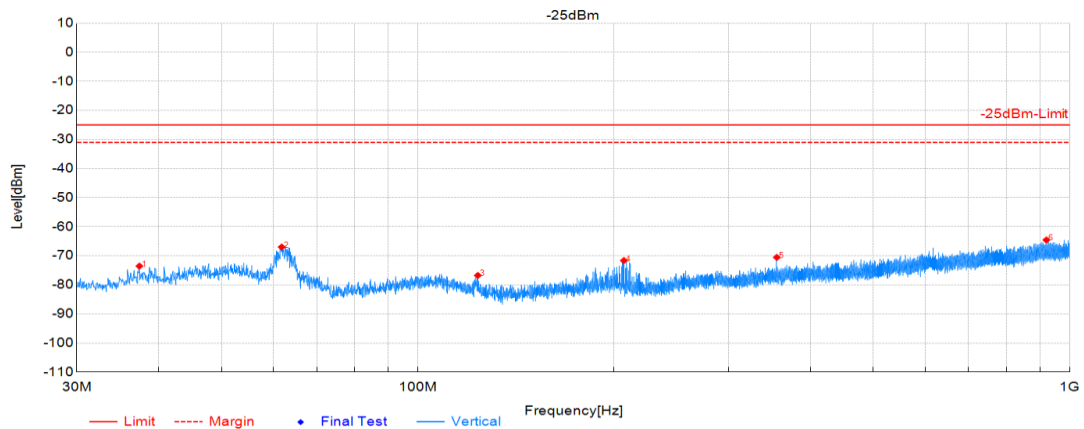

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	37.4205	-62.42	-11.13	-73.55	-25.00	48.55	PK	Vertical	PASS
2	61.8645	-56.44	-10.56	-67.00	-25.00	42.00	PK	Vertical	PASS
3	123.6535	-63.73	-13.03	-76.76	-25.00	51.76	PK	Vertical	PASS
4	207.122	-60.29	-11.36	-71.65	-25.00	46.65	PK	Vertical	PASS
5	355.4835	-63.05	-7.50	-70.55	-25.00	45.55	PK	Vertical	PASS
6	921.042	-66.48	1.91	-64.57	-25.00	39.57	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B5 20450 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

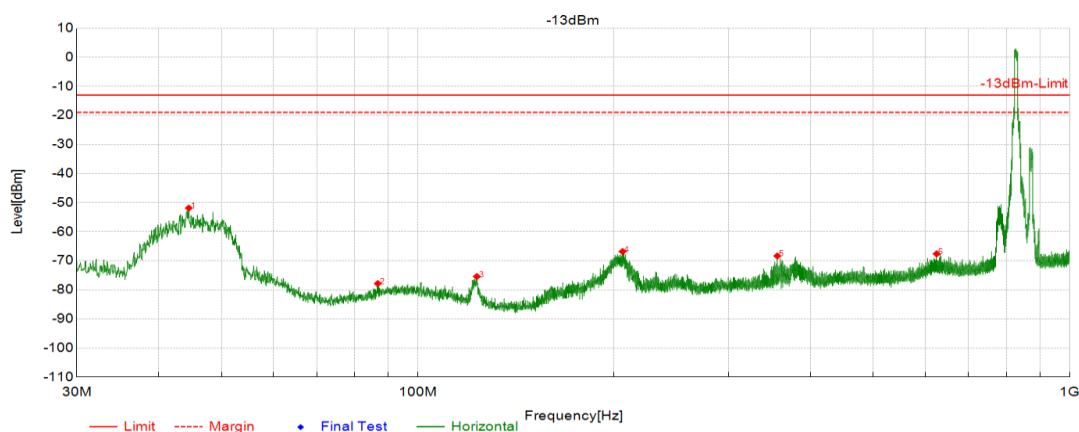

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	44.55	-44.10	-7.77	-51.87	-13.00	38.87	PK	Horizontal	PASS
2	86.842	-66.28	-11.56	-77.84	-13.00	64.84	PK	Horizontal	PASS
3	123.217	-60.57	-14.84	-75.41	-13.00	62.41	PK	Horizontal	PASS
4	206.152	-55.38	-11.44	-66.82	-13.00	53.82	PK	Horizontal	PASS
5	356.114	-60.39	-7.97	-68.36	-13.00	55.36	PK	Horizontal	PASS
6	625.095	-65.87	-1.75	-67.62	-13.00	54.62	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B5 20450 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

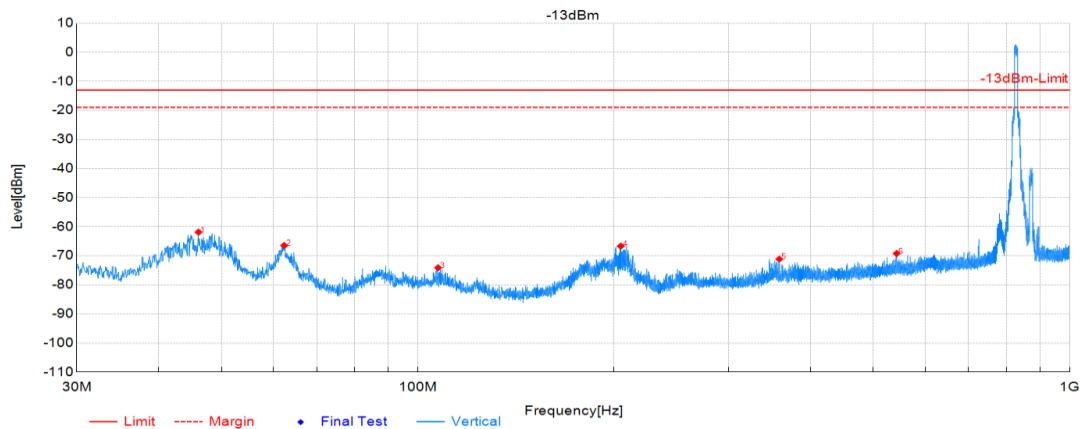

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	46.102	-52.59	-9.28	-61.87	-13.00	48.87	PK	Vertical	PASS
2	62.398	-55.68	-10.79	-66.47	-13.00	53.47	PK	Vertical	PASS
3	107.4545	-63.53	-10.59	-74.12	-13.00	61.12	PK	Vertical	PASS
4	204.8425	-55.61	-11.08	-66.69	-13.00	53.69	PK	Vertical	PASS
5	358.5875	-63.49	-7.65	-71.14	-13.00	58.14	PK	Vertical	PASS
6	542.7905	-65.10	-4.10	-69.20	-13.00	56.20	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B5 20525 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

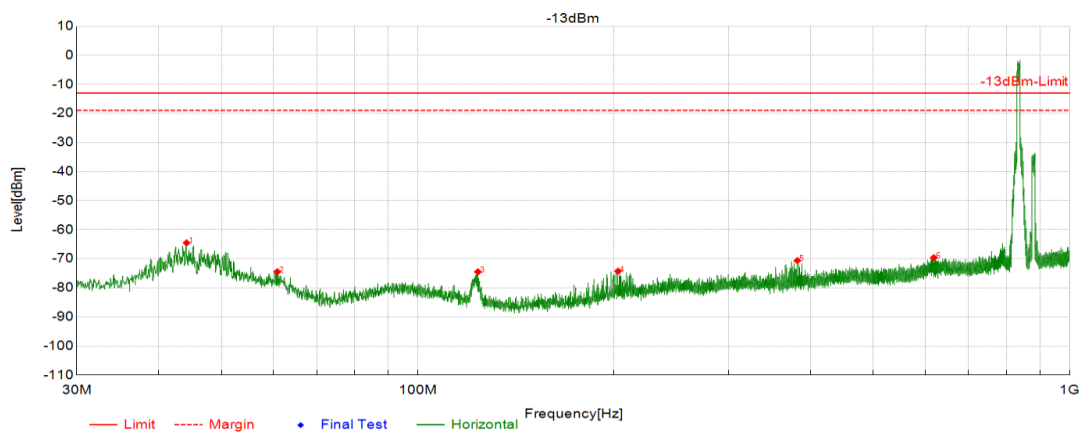

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	44.2105	-56.72	-7.81	-64.53	-13.00	51.53	PK	Horizontal	PASS
2	60.8945	-64.21	-10.24	-74.45	-13.00	61.45	PK	Horizontal	PASS
3	123.702	-59.58	-14.90	-74.48	-13.00	61.48	PK	Horizontal	PASS
4	202.9025	-62.74	-11.53	-74.27	-13.00	61.27	PK	Horizontal	PASS
5	382.1585	-63.31	-7.32	-70.63	-13.00	57.63	PK	Horizontal	PASS
6	618.79	-67.91	-1.75	-69.66	-13.00	56.66	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B5 20525 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

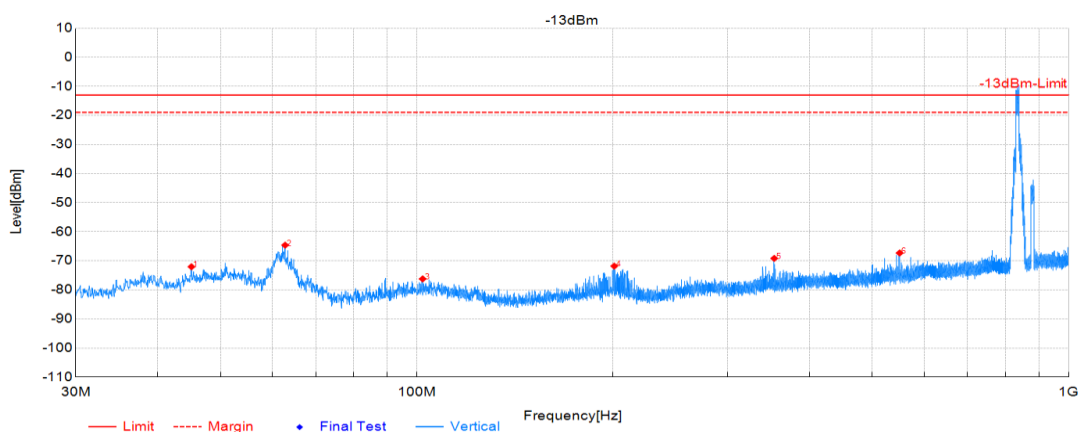

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	45.132	-62.61	-9.45	-72.06	-13.00	59.06	PK	Vertical	PASS
2	62.8345	-53.67	-10.97	-64.64	-13.00	51.64	PK	Vertical	PASS
3	102.1195	-65.74	-10.49	-76.23	-13.00	63.23	PK	Vertical	PASS
4	200.914	-61.25	-10.59	-71.84	-13.00	58.84	PK	Vertical	PASS
5	353.495	-61.77	-7.41	-69.18	-13.00	56.18	PK	Vertical	PASS
6	550.4535	-63.30	-4.02	-67.32	-13.00	54.32	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B5 20600 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

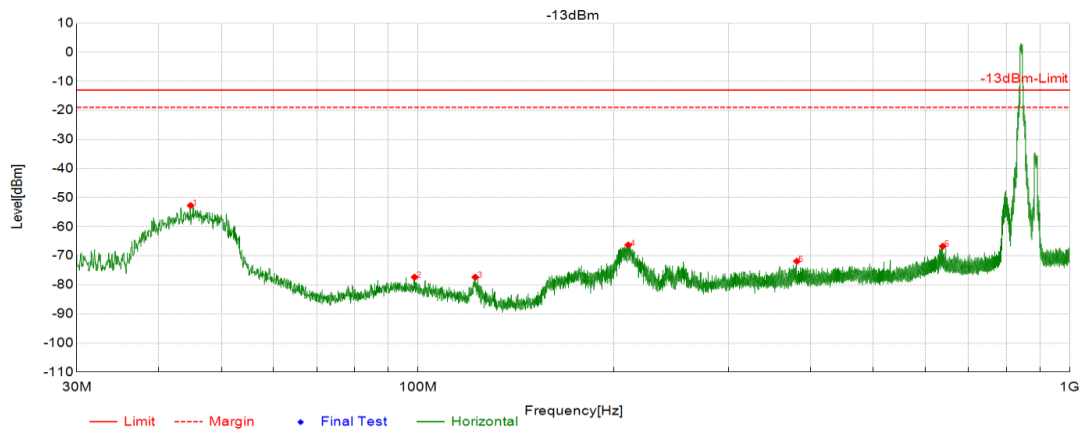

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	44.841	-44.98	-7.73	-52.71	-13.00	39.71	PK	Horizontal	PASS
2	98.9185	-66.26	-11.09	-77.35	-13.00	64.35	PK	Horizontal	PASS
3	122.538	-62.60	-14.76	-77.36	-13.00	64.36	PK	Horizontal	PASS
4	210.3715	-54.98	-11.33	-66.31	-13.00	53.31	PK	Horizontal	PASS
5	381.5765	-64.54	-7.34	-71.88	-13.00	58.88	PK	Horizontal	PASS
6	638.869	-65.26	-1.46	-66.72	-13.00	53.72	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B5 20600 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

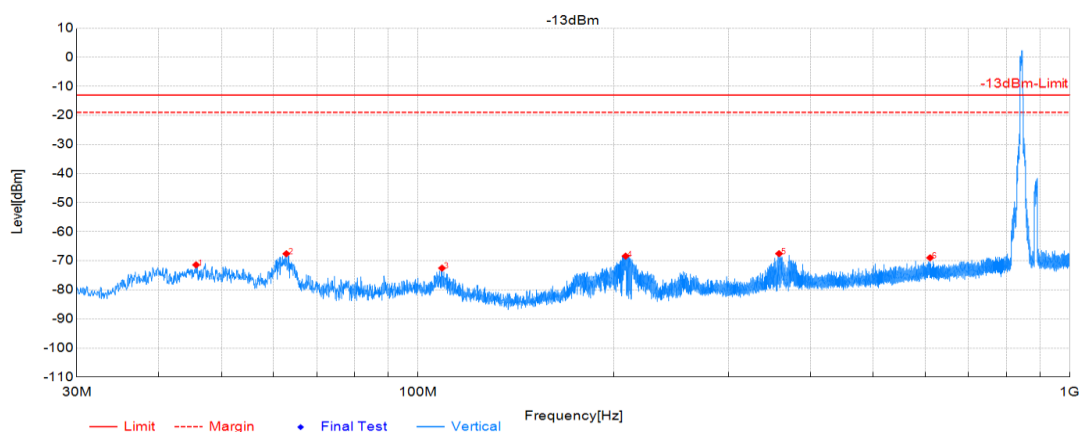

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	45.714	-62.07	-9.34	-71.41	-13.00	58.41	PK	Vertical	PASS
2	62.883	-56.58	-10.99	-67.57	-13.00	54.57	PK	Vertical	PASS
3	108.958	-61.90	-10.63	-72.53	-13.00	59.53	PK	Vertical	PASS
4	208.383	-56.87	-11.53	-68.40	-13.00	55.40	PK	Vertical	PASS
5	358.2965	-59.92	-7.63	-67.55	-13.00	54.55	PK	Vertical	PASS
6	610.8845	-66.96	-2.01	-68.97	-13.00	55.97	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B12 23060 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

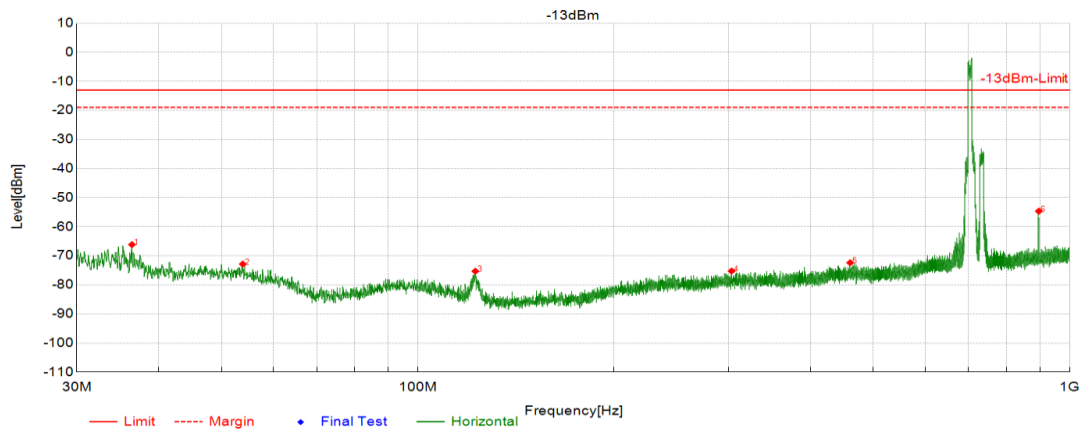

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	36.4505	-56.78	-9.39	-66.17	-13.00	53.17	PK	Horizontal	PASS
2	53.9105	-64.67	-8.19	-72.86	-13.00	59.86	PK	Horizontal	PASS
3	122.5865	-60.53	-14.77	-75.30	-13.00	62.30	PK	Horizontal	PASS
4	303.0065	-67.26	-8.00	-75.26	-13.00	62.26	PK	Horizontal	PASS
5	460.6315	-67.35	-5.04	-72.39	-13.00	59.39	PK	Horizontal	PASS
6	896.8405	-55.76	1.09	-54.67	-13.00	41.67	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B12 23060 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

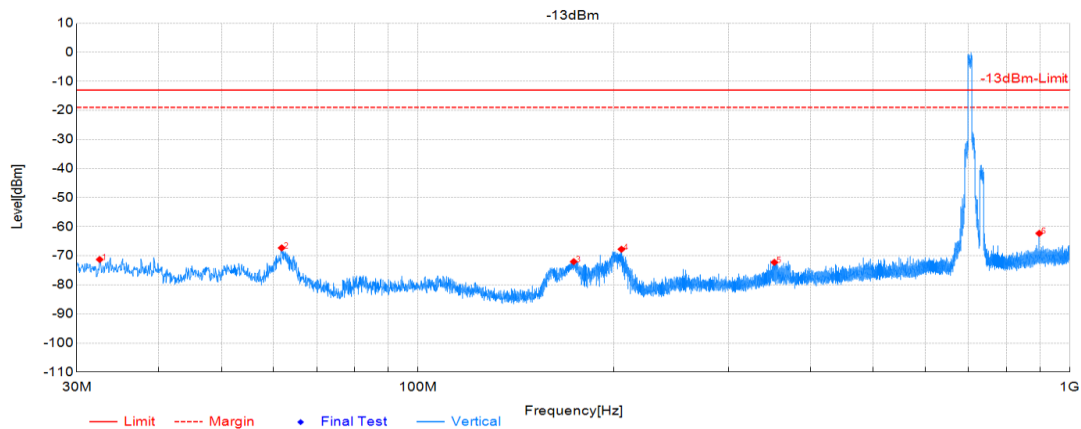

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	32.522	-58.67	-12.61	-71.28	-13.00	58.28	PK	Vertical	PASS
2	61.8645	-56.73	-10.56	-67.29	-13.00	54.29	PK	Vertical	PASS
3	173.5115	-60.03	-11.98	-72.01	-13.00	59.01	PK	Vertical	PASS
4	205.376	-56.62	-11.15	-67.77	-13.00	54.77	PK	Vertical	PASS
5	352.4765	-64.90	-7.36	-72.26	-13.00	59.26	PK	Vertical	PASS
6	898.15	-63.61	1.31	-62.30	-13.00	49.30	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B12 23095 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

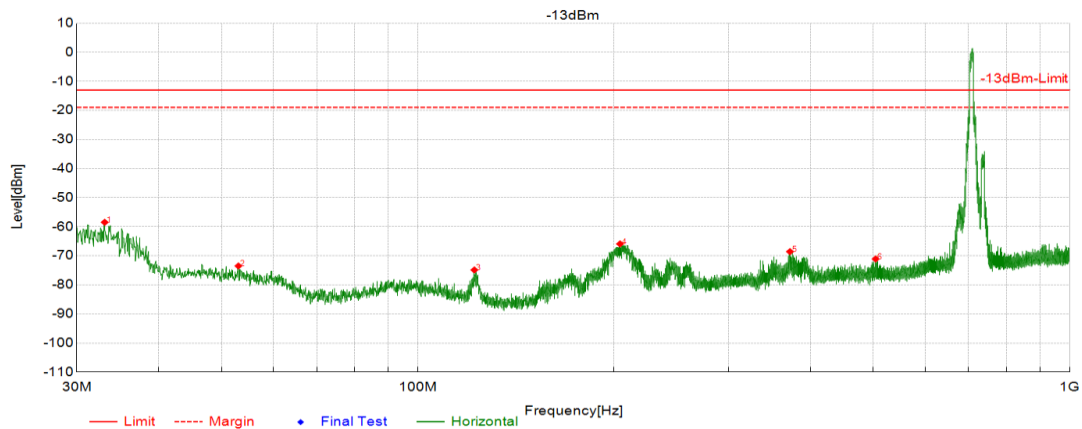

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	33.104	-48.05	-10.43	-58.48	-13.00	45.48	PK	Horizontal	PASS
2	53.086	-65.53	-7.98	-73.51	-13.00	60.51	PK	Horizontal	PASS
3	122.15	-60.16	-14.71	-74.87	-13.00	61.87	PK	Horizontal	PASS
4	204.309	-54.43	-11.49	-65.92	-13.00	52.92	PK	Horizontal	PASS
5	372.3615	-60.98	-7.60	-68.58	-13.00	55.58	PK	Horizontal	PASS
6	503.8935	-65.77	-5.33	-71.10	-13.00	58.10	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B12 23095 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

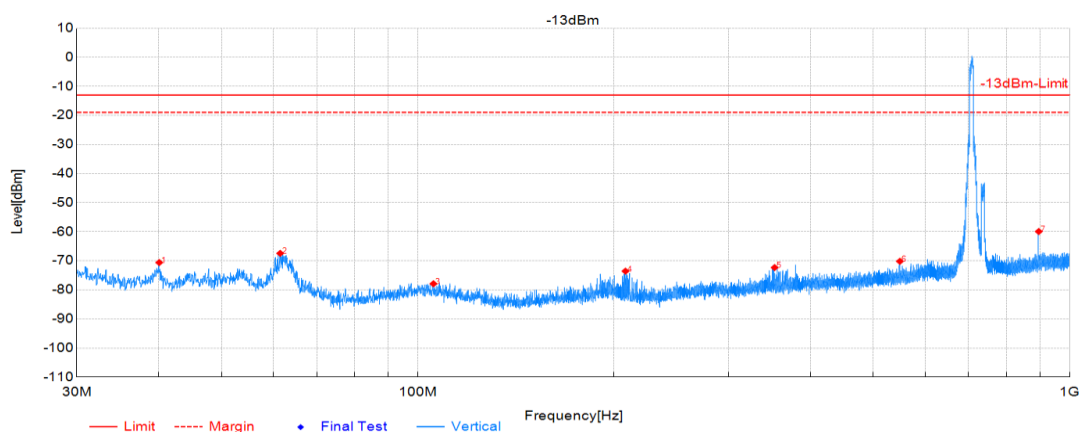

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	40.1365	-60.27	-10.33	-70.60	-13.00	57.60	PK	Vertical	PASS
2	61.525	-57.01	-10.42	-67.43	-13.00	54.43	PK	Vertical	PASS
3	105.7085	-67.34	-10.56	-77.90	-13.00	64.90	PK	Vertical	PASS
4	208.286	-62.06	-11.51	-73.57	-13.00	60.57	PK	Vertical	PASS
5	352.719	-64.95	-7.38	-72.33	-13.00	59.33	PK	Vertical	PASS
6	548.9985	-66.14	-4.04	-70.18	-13.00	57.18	PK	Vertical	PASS
7	896.695	-61.21	1.28	-59.93	-13.00	46.93	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B12 23130 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

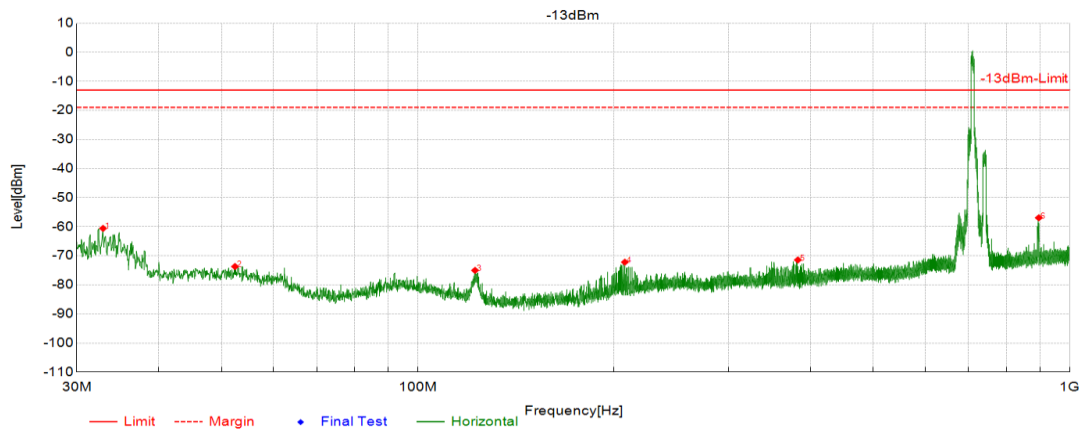

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	32.91	-50.08	-10.50	-60.58	-13.00	47.58	PK	Horizontal	PASS
2	52.4555	-65.89	-7.81	-73.70	-13.00	60.70	PK	Horizontal	PASS
3	122.441	-60.27	-14.75	-75.02	-13.00	62.02	PK	Horizontal	PASS
4	207.8495	-60.79	-11.40	-72.19	-13.00	59.19	PK	Horizontal	PASS
5	382.9345	-64.13	-7.30	-71.43	-13.00	58.43	PK	Horizontal	PASS
6	896.792	-58.04	1.09	-56.95	-13.00	43.95	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B12 23130 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

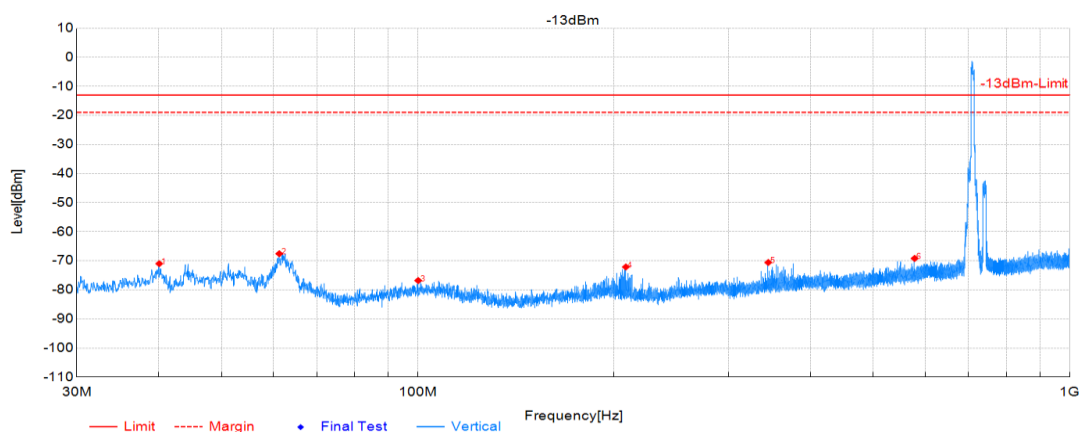

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	40.1365	-60.67	-10.33	-71.00	-13.00	58.00	PK	Vertical	PASS
2	61.331	-57.23	-10.34	-67.57	-13.00	54.57	PK	Vertical	PASS
3	100.1795	-66.36	-10.44	-76.80	-13.00	63.80	PK	Vertical	PASS
4	208.577	-60.58	-11.55	-72.13	-13.00	59.13	PK	Vertical	PASS
5	344.9105	-63.07	-7.51	-70.58	-13.00	57.58	PK	Vertical	PASS
6	578.2925	-65.81	-3.38	-69.19	-13.00	56.19	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B13 23205 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

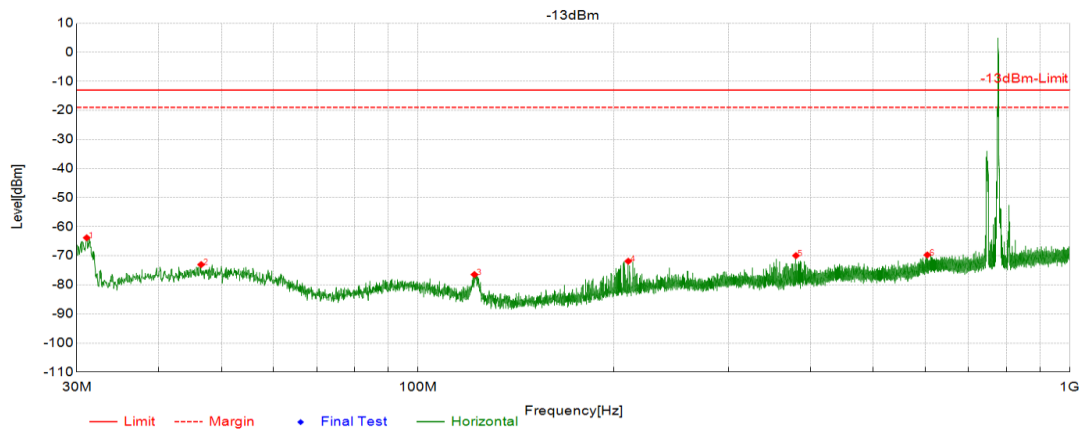

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	31.067	-52.74	-11.08	-63.82	-13.00	50.82	PK	Horizontal	PASS
2	46.5385	-65.49	-7.55	-73.04	-13.00	60.04	PK	Horizontal	PASS
3	122.1985	-61.75	-14.72	-76.47	-13.00	63.47	PK	Horizontal	PASS
4	210.3715	-60.54	-11.33	-71.87	-13.00	58.87	PK	Horizontal	PASS
5	380.364	-62.56	-7.39	-69.95	-13.00	56.95	PK	Horizontal	PASS
6	604.9675	-67.49	-2.23	-69.72	-13.00	56.72	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B13 23205 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

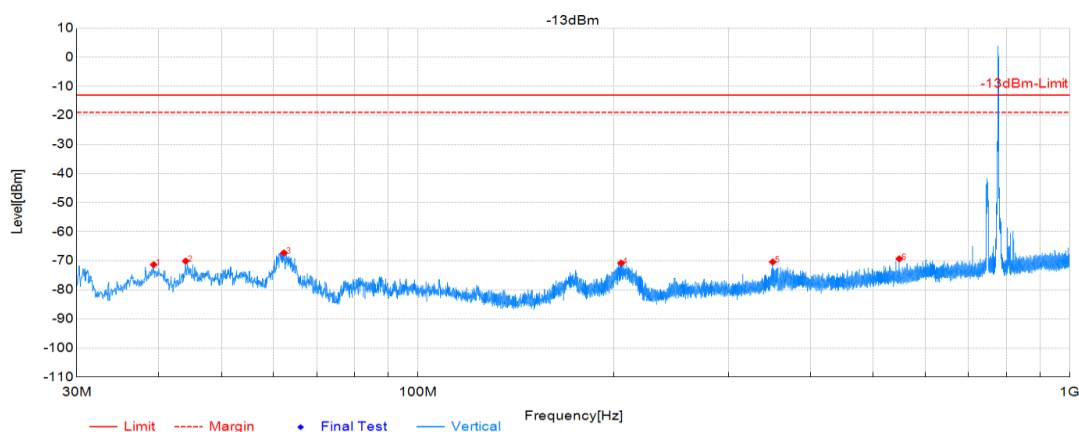

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	39.3605	-60.80	-10.54	-71.34	-13.00	58.34	PK	Vertical	PASS
2	44.065	-60.47	-9.63	-70.10	-13.00	57.10	PK	Vertical	PASS
3	62.3495	-56.52	-10.77	-67.29	-13.00	54.29	PK	Vertical	PASS
4	205.085	-59.66	-11.11	-70.77	-13.00	57.77	PK	Vertical	PASS
5	350.4395	-63.13	-7.27	-70.40	-13.00	57.40	PK	Vertical	PASS
6	547.8345	-65.30	-4.04	-69.34	-13.00	56.34	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B13 23230 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

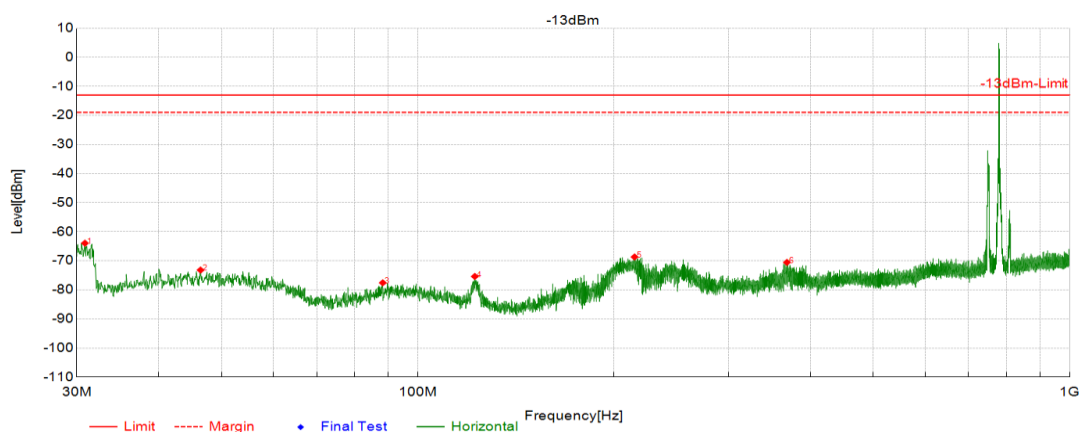

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	30.873	-52.82	-11.14	-63.96	-13.00	50.96	PK	Horizontal	PASS
2	46.4415	-65.64	-7.56	-73.20	-13.00	60.20	PK	Horizontal	PASS
3	88.394	-66.44	-11.13	-77.57	-13.00	64.57	PK	Horizontal	PASS
4	122.344	-60.65	-14.74	-75.39	-13.00	62.39	PK	Horizontal	PASS
5	215.076	-57.58	-11.11	-68.69	-13.00	55.69	PK	Horizontal	PASS
6	368.3845	-62.80	-7.75	-70.55	-13.00	57.55	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B13 23230 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

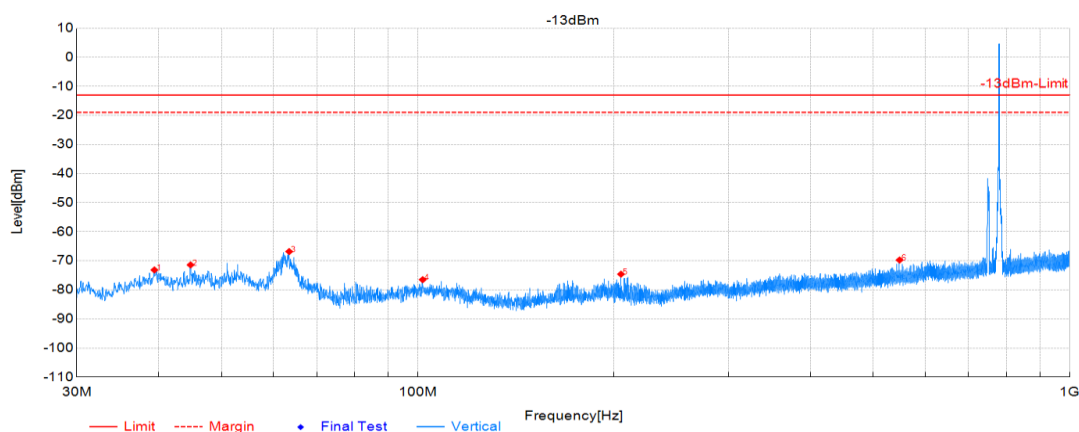

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	39.4575	-62.65	-10.51	-73.16	-13.00	60.16	PK	Vertical	PASS
2	44.841	-61.93	-9.49	-71.42	-13.00	58.42	PK	Vertical	PASS
3	63.5135	-55.57	-11.26	-66.83	-13.00	53.83	PK	Vertical	PASS
4	101.78	-66.02	-10.48	-76.50	-13.00	63.50	PK	Vertical	PASS
5	205.0365	-63.51	-11.10	-74.61	-13.00	61.61	PK	Vertical	PASS
6	548.4165	-65.70	-4.04	-69.74	-13.00	56.74	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B13 23255 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

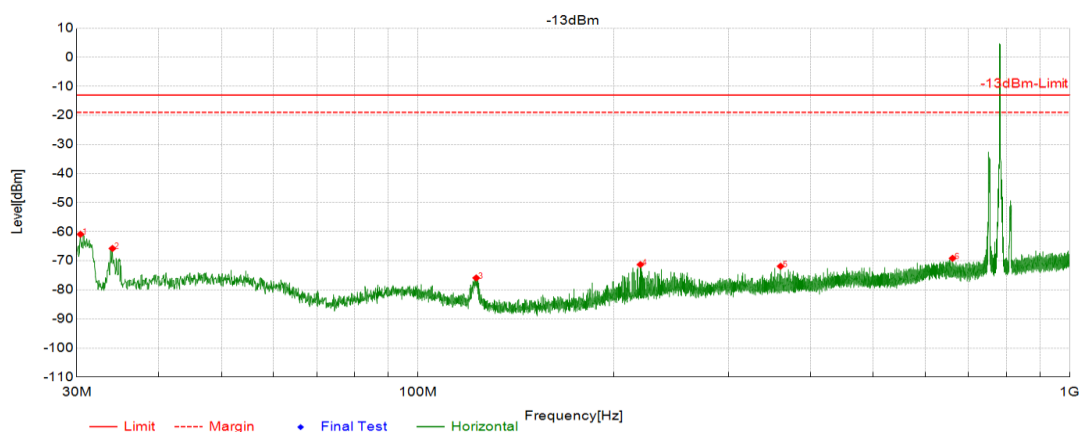

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	30.388	-49.59	-11.29	-60.88	-13.00	47.88	PK	Horizontal	PASS
2	34.0255	-55.63	-10.14	-65.77	-13.00	52.77	PK	Horizontal	PASS
3	122.9745	-61.09	-14.81	-75.90	-13.00	62.90	PK	Horizontal	PASS
4	219.5865	-60.43	-10.88	-71.31	-13.00	58.31	PK	Horizontal	PASS
5	360.285	-63.68	-8.20	-71.88	-13.00	58.88	PK	Horizontal	PASS
6	661.373	-67.45	-1.69	-69.14	-13.00	56.14	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B13 23255 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

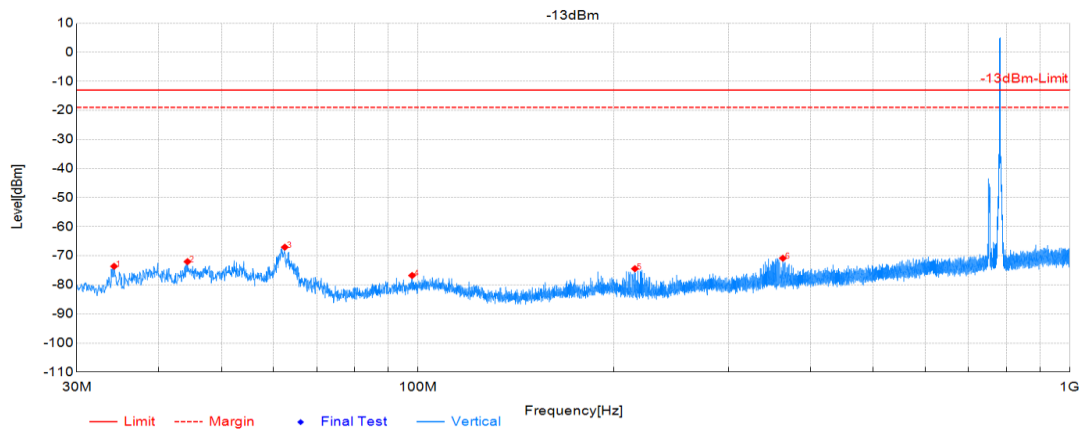

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	34.2195	-61.52	-12.10	-73.62	-13.00	60.62	PK	Vertical	PASS
2	44.356	-62.44	-9.58	-72.02	-13.00	59.02	PK	Vertical	PASS
3	62.5435	-56.19	-10.85	-67.04	-13.00	54.04	PK	Vertical	PASS
4	98.0455	-66.09	-10.69	-76.78	-13.00	63.78	PK	Vertical	PASS
5	215.367	-62.45	-12.00	-74.45	-13.00	61.45	PK	Vertical	PASS
6	363.1465	-63.29	-7.55	-70.84	-13.00	57.84	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B38 37850 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

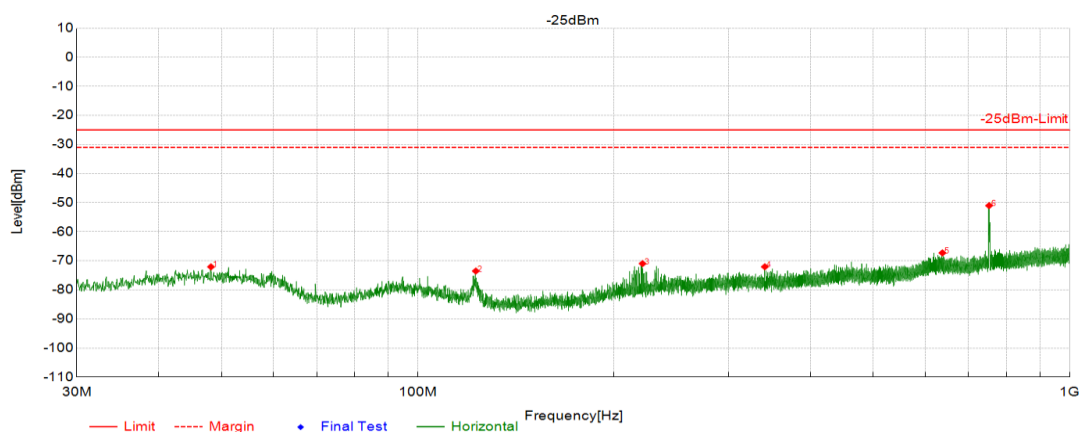

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	48.1875	-64.72	-7.37	-72.09	-25.00	47.09	PK	Horizontal	PASS
2	122.7805	-58.74	-14.79	-73.53	-25.00	48.53	PK	Horizontal	PASS
3	221.2355	-60.23	-10.75	-70.98	-25.00	45.98	PK	Horizontal	PASS
4	340.7395	-64.21	-7.85	-72.06	-25.00	47.06	PK	Horizontal	PASS
5	638.0445	-65.80	-1.49	-67.29	-25.00	42.29	PK	Horizontal	PASS
6	752.4075	-50.27	-0.77	-51.04	-25.00	26.04	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B38 37850 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

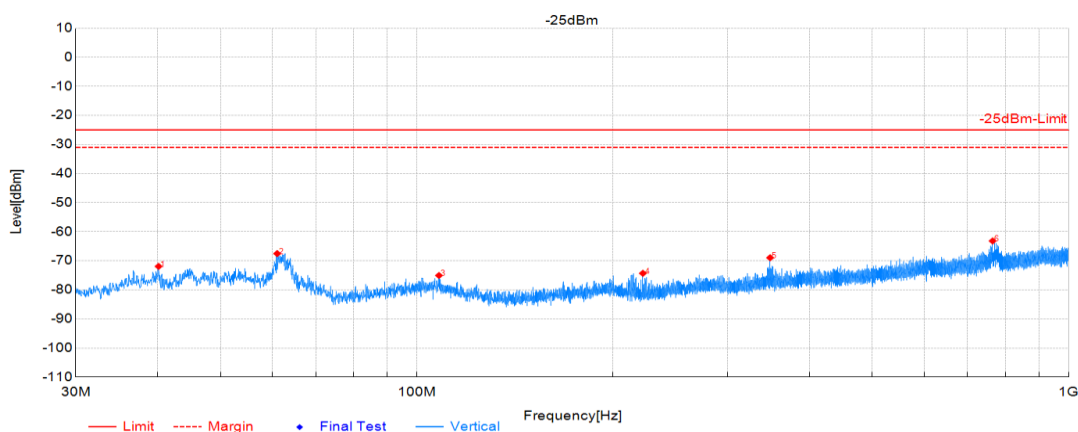

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	40.185	-61.61	-10.32	-71.93	-25.00	46.93	PK	Vertical	PASS
2	61.0885	-57.28	-10.24	-67.52	-25.00	42.52	PK	Vertical	PASS
3	108.182	-64.45	-10.61	-75.06	-25.00	50.06	PK	Vertical	PASS
4	222.3025	-62.16	-12.15	-74.31	-25.00	49.31	PK	Vertical	PASS
5	348.4025	-61.62	-7.33	-68.95	-25.00	43.95	PK	Vertical	PASS
6	764.4355	-62.94	-0.25	-63.19	-25.00	38.19	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B38 38000 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

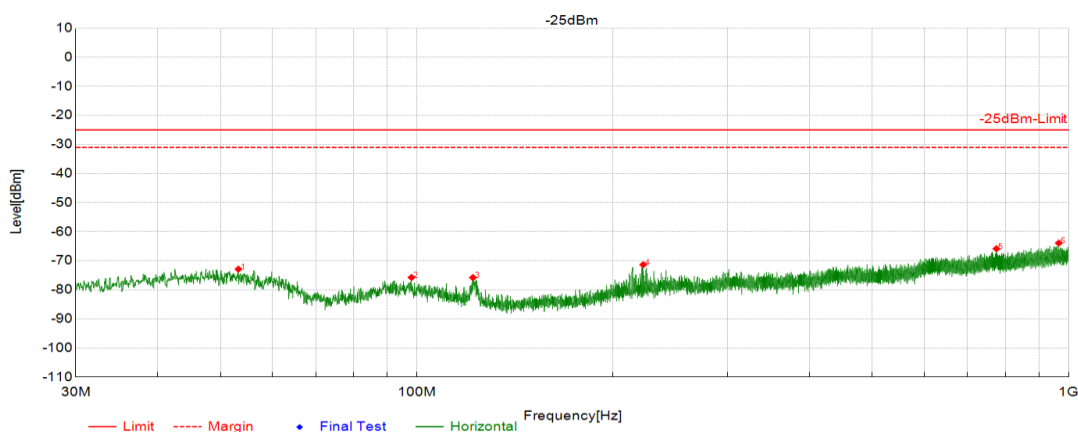

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	53.28	-64.85	-8.03	-72.88	-25.00	47.88	PK	Horizontal	PASS
2	98.191	-64.67	-11.06	-75.73	-25.00	50.73	PK	Horizontal	PASS
3	121.956	-61.08	-14.69	-75.77	-25.00	50.77	PK	Horizontal	PASS
4	222.5935	-60.74	-10.61	-71.35	-25.00	46.35	PK	Horizontal	PASS
5	774.8145	-65.59	-0.26	-65.85	-25.00	40.85	PK	Horizontal	PASS
6	965.759	-65.66	1.73	-63.93	-25.00	38.93	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B38 38000 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

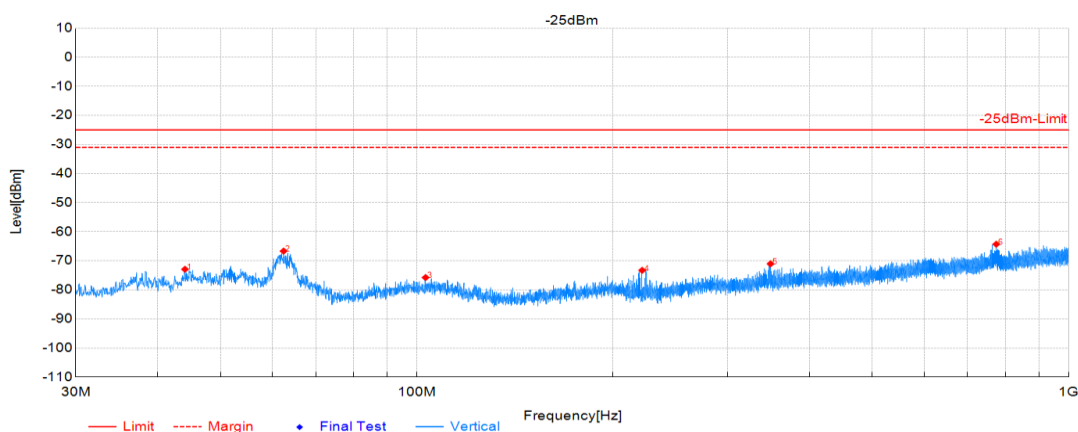

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	44.1135	-63.30	-9.63	-72.93	-25.00	47.93	PK	Vertical	PASS
2	62.495	-55.84	-10.83	-66.67	-25.00	41.67	PK	Vertical	PASS
3	103.1865	-65.26	-10.50	-75.76	-25.00	50.76	PK	Vertical	PASS
4	221.7205	-61.12	-12.17	-73.29	-25.00	48.29	PK	Vertical	PASS
5	348.936	-63.73	-7.31	-71.04	-25.00	46.04	PK	Vertical	PASS
6	774.3295	-63.99	-0.32	-64.31	-25.00	39.31	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B38 38150 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

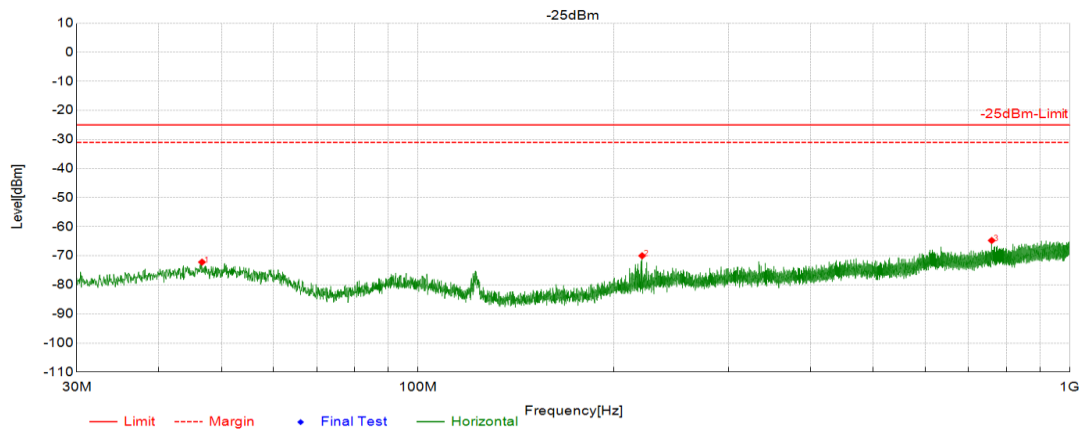

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	46.684	-64.65	-7.53	-72.18	-25.00	47.18	PK	Horizontal	PASS
2	220.896	-59.21	-10.78	-69.99	-25.00	44.99	PK	Horizontal	PASS
3	759.44	-64.25	-0.50	-64.75	-25.00	39.75	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B38 38150 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Test Date:	2026-03-29 22:38:01		
Remark:			

Test Graph

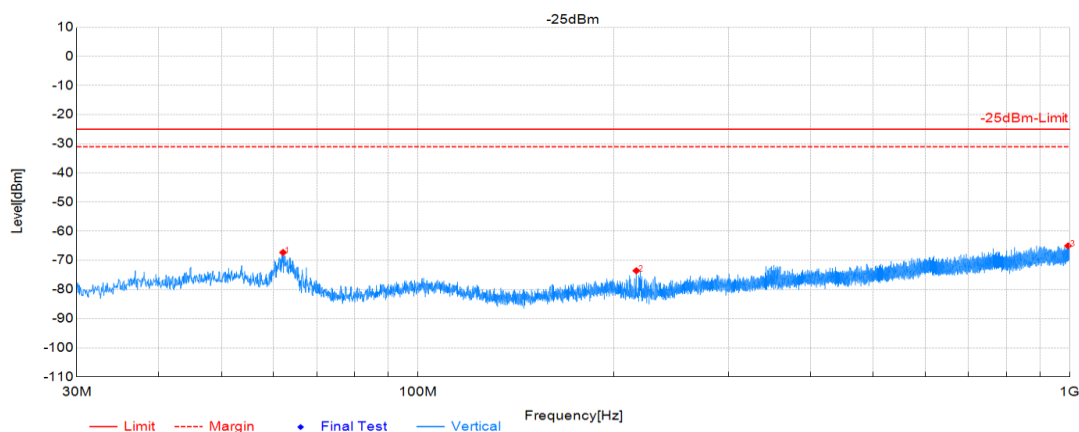

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	62.1555	-56.61	-10.68	-67.29	-25.00	42.29	PK	Vertical	PASS
2	216.434	-61.50	-12.05	-73.55	-25.00	48.55	PK	Vertical	PASS
3	994.6165	-67.32	2.29	-65.03	-25.00	40.03	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B66 132072 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

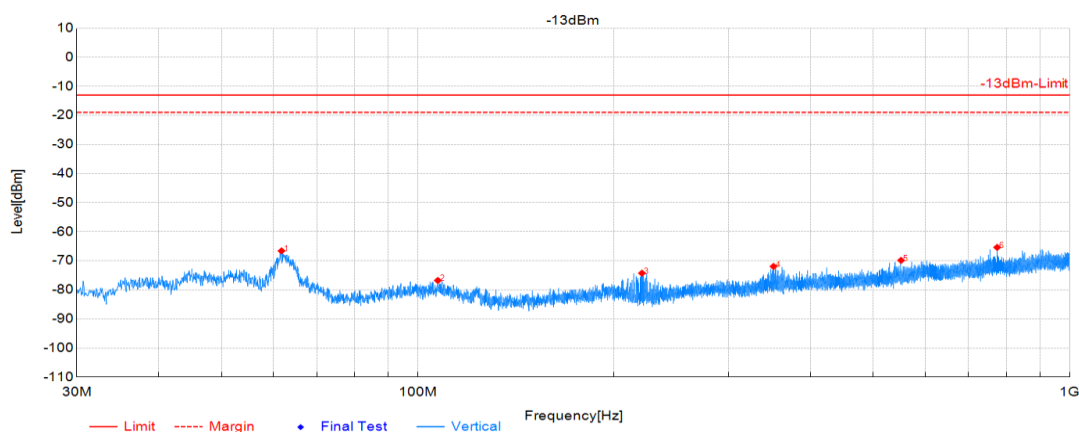

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	61.816	-56.06	-10.54	-66.60	-13.00	53.60	PK	Vertical	PASS
2	107.3575	-66.17	-10.59	-76.76	-13.00	63.76	PK	Vertical	PASS
3	220.799	-62.06	-12.20	-74.26	-13.00	61.26	PK	Vertical	PASS
4	351.361	-64.64	-7.31	-71.95	-13.00	58.95	PK	Vertical	PASS
5	551.3265	-65.85	-4.00	-69.85	-13.00	56.85	PK	Vertical	PASS
6	774.1355	-65.08	-0.32	-65.40	-13.00	52.40	PK	Vertical	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B66 132072 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

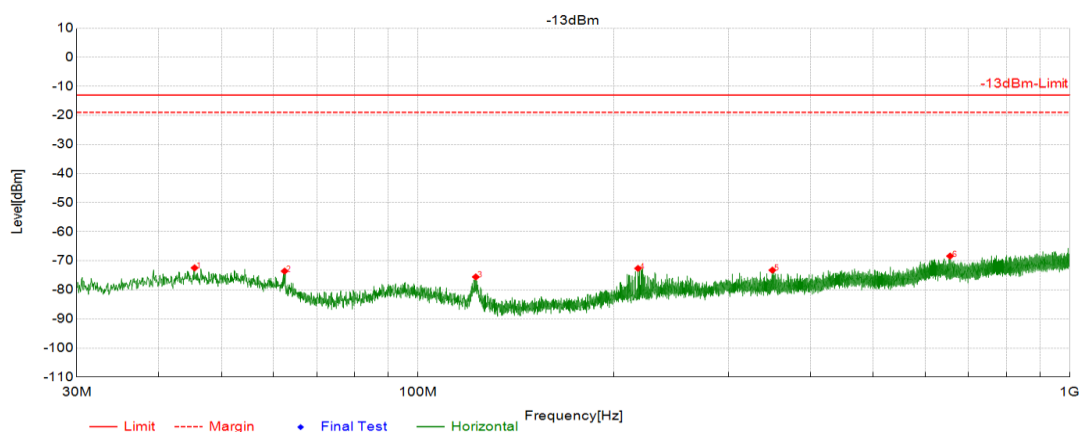


Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	45.4715	-64.77	-7.67	-72.44	-13.00	59.44	PK	Horizontal	PASS
2	62.495	-62.54	-11.02	-73.56	-13.00	60.56	PK	Horizontal	PASS
3	122.7805	-60.77	-14.79	-75.56	-13.00	62.56	PK	Horizontal	PASS
4	217.7435	-61.67	-10.97	-72.64	-13.00	59.64	PK	Horizontal	PASS
5	349.9545	-65.68	-7.57	-73.25	-13.00	60.25	PK	Horizontal	PASS
6	655.5045	-66.72	-1.66	-68.38	-13.00	55.38	PK	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



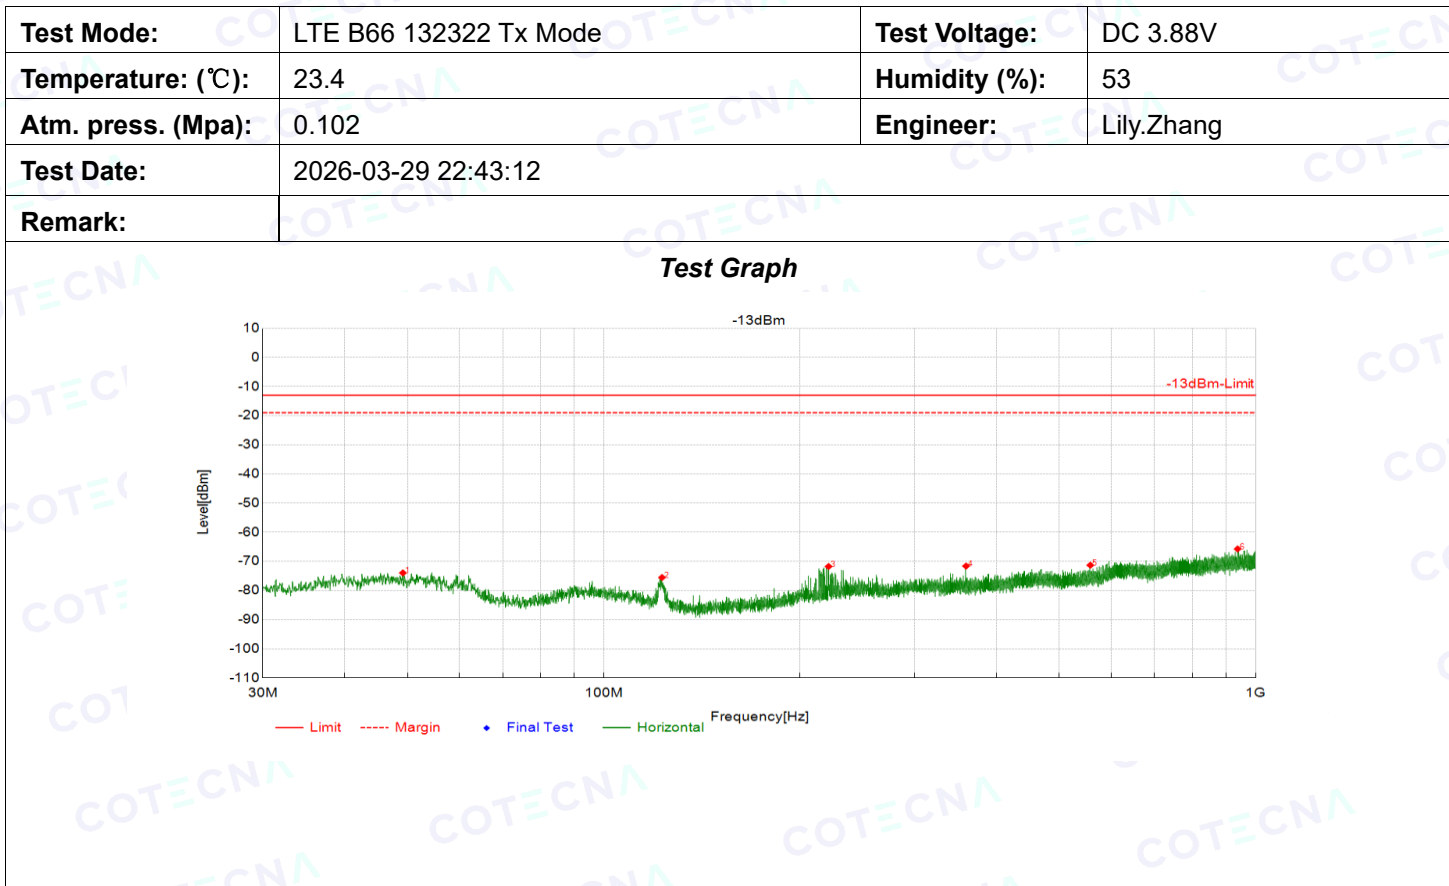

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	49.206	-66.71	-7.26	-73.97	-13.00	60.97	PK	Horizontal	PASS
2	122.8775	-60.74	-14.80	-75.54	-13.00	62.54	PK	Horizontal	PASS
3	221.284	-61.03	-10.74	-71.77	-13.00	58.77	PK	Horizontal	PASS
4	359.5575	-63.43	-8.19	-71.62	-13.00	58.62	PK	Horizontal	PASS
5	557.7285	-66.92	-4.41	-71.33	-13.00	58.33	PK	Horizontal	PASS
6	938.2595	-67.31	1.56	-65.75	-13.00	52.75	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B66 132322 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

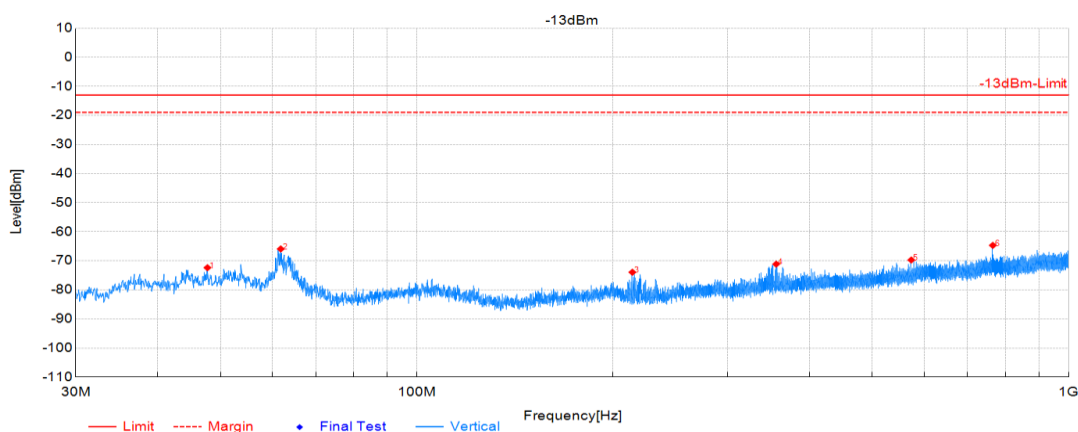

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	47.751	-63.40	-8.99	-72.39	-13.00	59.39	PK	Vertical	PASS
2	61.8645	-55.37	-10.56	-65.93	-13.00	52.93	PK	Vertical	PASS
3	214.203	-62.00	-11.94	-73.94	-13.00	60.94	PK	Vertical	PASS
4	355.9685	-63.63	-7.52	-71.15	-13.00	58.15	PK	Vertical	PASS
5	573.6365	-66.14	-3.58	-69.72	-13.00	56.72	PK	Vertical	PASS
6	765.066	-64.46	-0.25	-64.71	-13.00	51.71	PK	Vertical	PASS

Note:(1) Level=Reading+Factor


(2) Margin=Limit-Level



Project Information

Project No.:	RW-C-202601-0392		
EUT Name:	Tractive DOG 6 mini; Tractive CAT 6 mini	Model No.:	TG7A
Test Mode:	LTE B66 132572 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

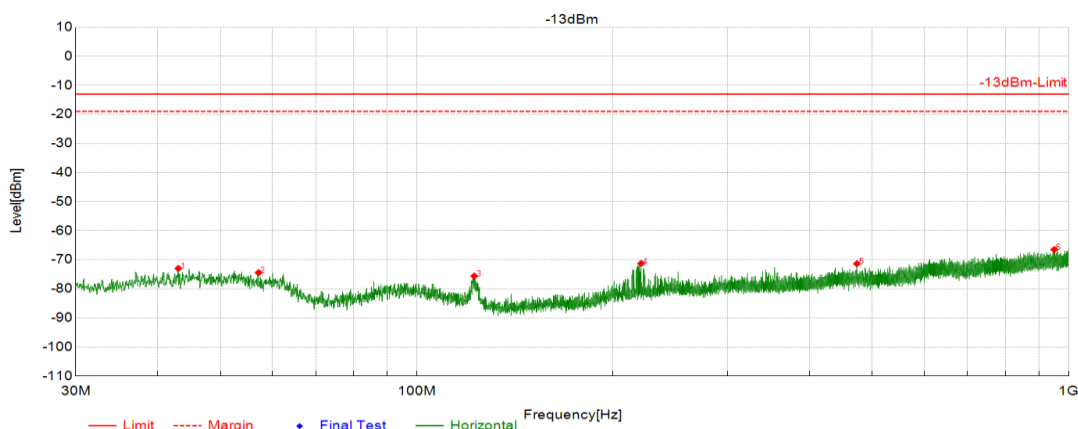

Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	43.095	-65.05	-7.93	-72.98	-13.00	59.98	PK	Horizontal	PASS
2	57.2085	-65.37	-9.06	-74.43	-13.00	61.43	PK	Horizontal	PASS
3	122.538	-60.84	-14.76	-75.60	-13.00	62.60	PK	Horizontal	PASS
4	220.9445	-60.47	-10.78	-71.25	-13.00	58.25	PK	Horizontal	PASS
5	473.4355	-66.32	-5.03	-71.35	-13.00	58.35	PK	Horizontal	PASS
6	950.627	-68.17	1.68	-66.49	-13.00	53.49	PK	Horizontal	PASS


Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level



Test Mode:	LTE B66 132572 Tx Mode	Test Voltage:	DC 3.88V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102	Engineer:	Lily.Zhang
Remark:			

Test Graph

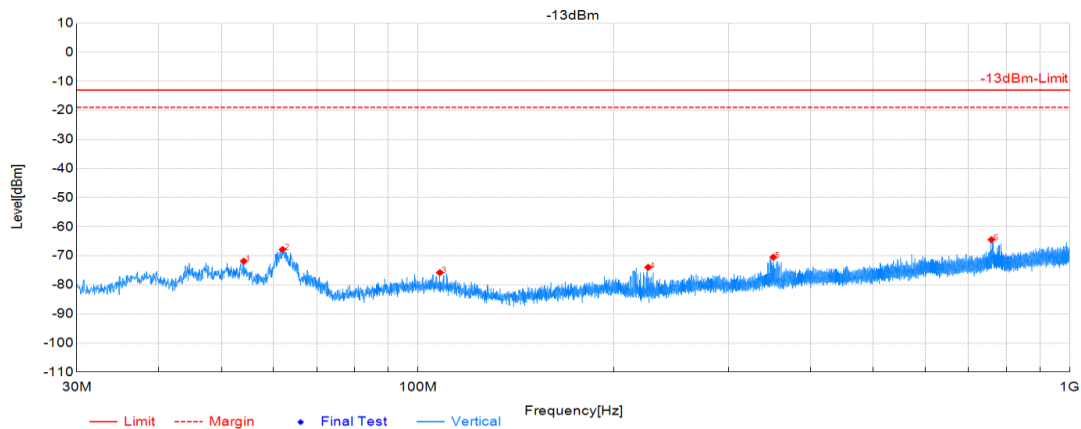

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Verdict
1	54.1045	-62.78	-9.08	-71.86	-13.00	58.86	PK	Vertical	PASS
2	62.0585	-57.16	-10.65	-67.81	-13.00	54.81	PK	Vertical	PASS
3	108.1335	-65.18	-10.61	-75.79	-13.00	62.79	PK	Vertical	PASS
4	225.649	-61.96	-12.02	-73.98	-13.00	60.98	PK	Vertical	PASS
5	351.1185	-63.18	-7.30	-70.48	-13.00	57.48	PK	Vertical	PASS
6	758.761	-64.29	-0.19	-64.48	-13.00	51.48	PK	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

-----End of the Report-----

