FCC Part 22H & 24E
Test Report

FCC ID: 2VAII-TFMS

Product Name:	TKV GPS
Trademark:	TFM
Model Name :	TFM10S TFM7S
Prepared For : Address :	E-Z-GO Canada Ltd.d/b/a TEXTRON FLEET MANAGMENT #1006 - 7495 132nd Street, Surrey, BC, V3W 1J8, Canada
Prepared By : Address :	Shenzhen BCTC Testing Co., Ltd. BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Test Date:	Dec. 09, 2019 – Dec. 19, 2019
Date of Report :	Dec. 19, 2019
Report No.:	BCTC1912000087-6E

TEST RESULT CERTIFICATION

Applicant's name .....:	E-Z-GO Canada Ltd.d/b/a TEXTRON FLEET MANAGMENT
Address .....:	#1006 - 7495 132nd Street, Surrey, BC, V3W 1J8, Canada
Manufacture's Name .....:	SHENZHEN YITOA DIGITAL APPLIANCE CO.,LTD
Address .....:	7F-2 Unit, 2Building, Financial Base, No.8 Kefa Road, Nanshan District, Shenzhen

Product description

Product name .....:	TKV GPS
Trademark.....:	TFM
Model and/or type reference .:	TFM10S TFM7S
Standards .....:	FCC Part 22H & 24E

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer):	Cai Fang Zhong	Cai Fang Zhong
Reviewer(Supervisor):	Eric Yang	Eric Yang
Approved(Manager):	Zero Zhou	Zero Zhou

BCTC APPROVED SHENZHEN BCTC TESTING CO., LTD

Table of Contents page

1. GENERAL INFORMATION 4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 4
1.2 TEST STANDARDS 6
1.3TEST METHODOLOGY 6
1.4TEST FACILITY 6
1.5 EUT SETUP AND TEST MODE 7
1.6 MEASUREMENT UNCERTAINTY 9
1.7 TEST EQUIPMENT LIST AND DETAILS 10
2. SUMMARY OF TEST RESULTS 11
3. RF OUTPUT POWER 12
3.1 STANDARD APPLICABLE 12
3.2TEST PROCEDURE 12
3.3ENVIRONMENTAL CONDITIONS 12
3.4SUMMARY OF TEST RESULTS/PLOTS 13
4. PEAK-TO-AVERAGE RATIO(PAR) OF TRANSMITTER 22
4.1 STANDARD APPLICABLE 22
4.2 TEST PROCEDURE 22
4.3 ENVIRONMENTAL CONDITIONS 22
4.4SUMMARY OF TEST RESULTS 23
5. EMISSION BANDWIDTH 24
5.1 STANDARD APPLICABLE 24
5.2TEST PROCEDURE 24
5.3ENVIRONMENTAL CONDITIONS 24
6.4SUMMARY OF TEST RESULTS/PLOTS 25
6. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL 46
6.1 STANDARD APPLICABLE 46
6.2TEST PROCEDURE 46
6.3ENVIRONMENTAL CONDITIONS 46
6.4SUMMARY OF TEST RESULTS/PLOTS 47
7. SPURIOUS RADIATED EMISSIONS 86
7.1STANDARD APPLICABLE 86
7.2TEST PROCEDURE 86
7.3ENVIRONMENTAL CONDITIONS 86
7.4SUMMARY OF TEST RESULTS/PLOTS 86
8. FREQUENCY STABILITY 91
8.1 STANDARD APPLICABLE 91
8.2TEST PROCEDURE 91
8.3ENVIRONMENTAL CONDITIONS 91
8.4SUMMARY OF TEST RESULTS/PLOTS 92
9. EUT PHOTO 104
10. EUT TEST PHOTO 105

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT:	
Equipment	TKV GPS
Trade Name	TFM
Model Name	TFM10S TFM7S
Model Difference	All the model are the same circuit and RF module, except model names.
Ratings	DC 6.4V from Battery
Connecting I/O Port(s)	Please refer to the User's Manual
hardware version	V1.0
Software version	V1.0
Note: The test data is gathered from a production sampleprovided by the manufacturer.	

Technical Characteristics of EUT:	
2G	
Support Networks:	GSM, GPRS, EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS/EDGE 850: 824~849MHz GSM/GPRS/EDGE 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS/EDGE 850: 869~894MHz GSM/GPRS/EDGE 1900: 1930~1990MHz
MaxRF Output Power:	GSM850: 29.60dBm, GSM1900: 29.49dBm EDGE850: 26.12dBm, EDGE1900: 25.89dBm
Type of Emission:	GSM850: 253KGXW, GSM1900: 250KGXW EDGE850: 253KG7W, EDGE1900: 257KG7W
Type of Modulation:	GMSK, 8PSK
Type of Antenna:	FPCB Antenna
Antenna Gain:	GSM850: 0.03dBi; GSM1900: 1.27dBi
GPRS/EDGE Class:	Class 12
3G	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 2: 22.33dBm, WCDMA Band 5: 22.21dBm
Type of Emission:	WCDMA Band 2: 4M22F9W WCDMA Band 5: 4M22F9W
Type of Modulation:	BPSK
Antenna Type:	FPCB Antenna
Antenna Gain:	WCDMA Band 2: 1.27dBi, WCDMA Band 5: 0.03dBi

1.2 Test Standards

The following report is prepared on behalf of the Michley Electronics Inc.in accordance withFCC Part 2 subpart J, FCC Part 22 subpart H and FCC Part 24 subpart of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 2 subpart J, FCC Part 22 subpart H and FCC Part 24 subpart of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3Test Methodology

All measurements contained in this report were conducted withANSI/TIA-603-D: 2010 andANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.The measurement guide KDB 971168 D01 Power Meas License Digital Systems v02r02 shall be performed also.

1.4Test Facility

FCC Test Firm Registration Number: 712850
IC Registered No.: 23583
Shenzhen BCTC Testing Co., Ltd.
Add. : BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao’an District, Shenzhen, China

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	GSM 850	Low, Middle, High Channels
TM2	GPRS 850	Low, Middle, High Channels
TM3	EDGE 850	Low, Middle, High Channels
TM4	GSM 1900	Low, Middle, High Channels
TM5	GPRS 1900	Low, Middle, High Channels
TM6	EDGE 1900	Low, Middle, High Channels
TM7	WCDMA Band 5	Low, Middle, High Channels
TM8	HSDPA Band 5	Low, Middle, High Channels
TM9	HSUPA Band 5	Low, Middle, High Channels
TM10	WCDMA Band 2	Low, Middle, High Channels
TM11	HSDPA Band 2	Low, Middle, High Channels
TM12	HSUPA Band 2	Low, Middle, High Channels

Testing Configure			
Support Band	Support Standard	Channel Frequency	Channel Number
GSM 850	GSM/GPRS/EDGE	824.2 MHz	128
		836.6 MHz	190
		848.8 MHz	251
PCS 1900	GSM/GPRS/EDGE	1850.2 MHz	512
		1880.0 MHz	661
		1909.8 MHz	810
WCDMA Band 5	WCDMA/HSDPA/HSUPA	826.4 MHz	4132
		836.6 MHz	4183
		846.6 MHz	4233
WCDMA Band 2	WCDMA/HSDPA/HSUPA	1852.4 MHz	9262
		1880.0 MHz	9400
		1907.6 MHz	9538
Note: the transmitter has been tested on the communications mode of GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA compliance test and record the worst case.			

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/
/	/	/	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty

The reported uncertainty of measurement y ± U，where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2，providing a level of confidence of approximately 95 %。

No.	Item	Uncertainty
1	3m camber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
3	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
4	Conducted Adjacent channel power	U=1.38dB
5	Conducted output power uncertainty Above 1G	U=1.576dB
6	Conducted output power uncertainty below 1G	U=1.28dB
7	humidity uncertainty	U=5.3%
8	Temperature uncertainty	U=0.59 ℃

1.7 Test Equipment List and Details

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45109572	Jun. 13, 2019	Jun. 12, 2020
2	Test Receiver (9kHz-7GHz)	R&S	ESR7	101154	Jun. 13, 2019	Jun. 12, 2020
3	Bilog Antenna (30MHz-3GHz)	SCHWARZBECK	VULB9163	VULB9163-942	Jun. 22, 2019	Jun. 21, 2020
4	Horn Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA9120D	1541	Jun. 22, 2019	Jun. 21, 2020
5	Horn Antenna (18GHz-40GHz)	SCHWARZBECK	BBHA9170	822	Jun. 22, 2019	Jun. 21, 2020
6	Amplifier (9KHz-6GHz)	SCHWARZBECK	BBV9744	9744-0037	Jun. 25, 2019	Jun. 24, 2020
7	Amplifier (0.5GHz-18GHz)	SCHWARZBECK	BBV9718	9718-309	Jun. 25, 2019	Jun. 24, 2020
8	Amplifier (18GHz-40GHz)	MITEQ	TTA1840-35-HG	2034381	Jun. 17, 2019	Jun. 16, 2020
9	Loop Antenna (9KHz-30MHz)	SCHWARZBECK	FMZB1519B	014	Jul. 02, 2019	Jul. 01, 2020
10	RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-0008	Jun. 25, 2019	Jun. 24, 2020
11	RF cables2 (30MHz-1GHz)	Huber+Suhnar	30MHz-1GHz	1486150	Jun. 25, 2019	Jun. 24, 2020
12	RF cables3 (1GHz-40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	Jun. 25, 2019	Jun. 24, 2020
13	Power Metter	Keysight	E4419B	\	Jun. 17, 2019	Jun. 16, 2020
14	Power Sensor (AV)	Keysight	E9 300A	\	Jun. 17, 2019	Jun. 16, 2020
15	Signal Analyzer 20kHz-26.5GHz	KEYSIGHT	N9020A	MY49100060	Jun. 13, 2019	Jun. 12, 2020
16	Spectrum Analyzer 9kHz-40GHz	Aglient	FSP40	100363	Jun. 13, 2019	Jun. 12, 2020
17	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
18	Software	Frad	EZ-EMC	FA-03A2 RE	\	\

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESR3	102075	Jun. 13, 2019	Jun. 12, 2020
2	LISN	SCHWARZBECK	NSLK8127	8127739	Jun. 13, 2019	Jun. 12, 2020
3	LISN	R&S	ENV216	101375	Jun. 13, 2019	Jun. 12, 2020
4	RF cables	Huber+Suhnar	9kHz-30MHz	B1702988-0008	Jun. 25, 2019	Jun. 24, 2020
5	Software	Frad	EZ-EMC	EMC-CON 3A1	\	\

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 1.1307, § 2.1091	RF Exposure	Compliant
§ 22.913 (a), § 24.232 (c)	RF Output Power	Compliant
§ 24.51	Peak-to-average Ratio(PAR) of Transmitter	Compliant
§ 22.917 (b), § 24.238 (b)	Emission Bandwidth	Compliant
§ 22.917 (a), § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliant
§ 22.917 (a), § 24.238 (a)	Spurious Radiation Emissions	Compliant
§ 22.917 (a), § 24.238 (a)	Out of Band Emissions	Compliant
§ 22.355, § 24.235	Frequency Stability	Compliant

3. RF Output Power

3.1 Standard Applicable

According to §22.913(a)(2),The ERP of mobileand portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

3.2Test Procedure

Conducted output power test method:



Radiated power test method:

1.The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.

2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.

4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

3.3Environmental Conditions

Temperature:	24 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

3.4Summary of Test Results/Plots

Max. Radiated Power

ERP For GSM Mode GSM850

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	28.63	1.5	0	H	1.5	0	27.13	38.45
824.2	28.23	1.5	0	V	1.5	0	26.73	38.45
Middle Channel								
836.4	27.63	1.5	0	H	1.5	0	26.13	38.45
836.4	26.35	1.5	0	V	1.5	0	24.85	38.45
High Channel								
848.8	26.37	1.5	0	H	1.5	0	24.87	38.45
848.8	26.13	1.5	0	V	1.5	0	24.63	38.45

EIRP For GSM Mode PCS1900

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1850.2	24.51	1.5	0	H	1.9	7.7	30.31	33.00
1850.2	23.32	1.5	0	V	1.9	7.7	29.12	33.00
Middle Channel								
1880.0	24.35	1.5	0	H	1.9	7.7	30.15	33.00
1880.0	21.14	1.5	0	V	1.9	7.7	26.94	33.00
High Channel								
1909.8	22.23	1.5	0	H	1.9	7.7	28.03	33.00
1909.8	22.48	1.5	0	V	1.9	7.7	28.28	33.00

ERP For GPRS Mode GSM850

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	26.35	1.5	0	H	1.5	0	24.85	38.45
824.2	26.45	1.5	0	V	1.5	0	24.95	38.45
Middle Channel								
836.6	25.23	1.5	0	H	1.5	0	23.73	38.45
836.6	26.14	1.5	0	V	1.5	0	24.64	38.45
High Channel								
848.8	24.46	1.5	0	H	1.5	0	22.96	38.45
848.8	23.41	1.5	0	V	1.5	0	21.91	38.45

EIRP For GPRS Mode PCS1900

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1850.2	25.14	1.5	0	H	1.9	7.7	30.94	33.00
1850.2	25.32	1.5	0	V	1.9	7.7	31.12	33.00
Middle Channel								
1880.0	25.35	1.5	0	H	1.9	7.7	31.15	33.00
1880.0	24.18	1.5	0	V	1.9	7.7	29.98	33.00
High Channel								
1909.8	24.55	1.5	0	H	1.9	7.7	30.35	33.00
1909.8	23.64	1.5	0	V	1.9	7.7	29.44	33.00

ERP For EDGE Mode GSM850

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	24.61	1.5	0	H	1.5	0	23.11	38.45
824.2	23.60	1.5	0	V	1.5	0	22.10	38.45
Middle Channel								
836.6	24.95	1.5	0	H	1.5	0	23.45	38.45
836.6	23.93	1.5	0	V	1.5	0	22.43	38.45
High Channel								
848.8	24.98	1.5	0	H	1.5	0	23.48	38.45
848.8	23.99	1.5	0	V	1.5	0	22.49	38.45

EIRP For EDGE Mode PCS1900

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1850.2	15.88	1.5	0	H	1.9	7.7	21.68	33.00
1850.2	17.85	1.5	0	V	1.9	7.7	23.65	33.00
Middle Channel								
1880.0	15.53	1.5	0	H	1.9	7.7	21.33	33.00
1880.0	17.55	1.5	0	V	1.9	7.7	23.35	33.00
High Channel								
1909.8	15.58	1.5	0	H	1.9	7.7	21.38	33.00
1909.8	17.63	1.5	0	V	1.9	7.7	23.43	33.00

ERP For WCDMA Mode Band 5

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	22.02	1.5	0	H	1.5	0	20.52	38.45
826.4	22.88	1.5	0	V	1.5	0	21.38	38.45
Middle Channel								
836.6	21.65	1.5	0	H	1.5	0	20.15	38.45
836.6	23.07	1.5	0	V	1.5	0	21.57	38.45
High Channel								
846.6	21.43	1.5	0	H	1.5	0	19.93	38.45
846.6	22.82	1.5	0	V	1.5	0	21.32	38.45

ERP For HSDPA Mode Band 5

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	21.01	1.5	0	H	1.5	0	19.51	38.45
826.4	21.87	1.5	0	V	1.5	0	20.37	38.45
Middle Channel								
836.6	20.59	1.5	0	H	1.5	0	19.09	38.45
836.6	22.01	1.5	0	V	1.5	0	20.51	38.45
High Channel								
846.6	20.44	1.5	0	H	1.5	0	18.94	38.45
846.6	21.83	1.5	0	V	1.5	0	20.33	38.45

ERP For HSUPA Mode Band 5

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	21.01	1.5	0	H	1.5	0	19.51	38.45
826.4	21.87	1.5	0	V	1.5	0	20.37	38.45
Middle Channel								
836.6	20.65	1.5	0	H	1.5	0	19.15	38.45
836.6	22.07	1.5	0	V	1.5	0	20.57	38.45
High Channel								
846.6	20.46	1.5	0	H	1.5	0	18.96	38.45
846.6	21.85	1.5	0	V	1.5	0	20.35	38.45

EIRP For WCDMA Mode Band 2

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	14.04	1.5	0	H	1.9	7.7	19.84	33
1852.4	15.76	1.5	0	V	1.9	7.7	21.56	33
Middle Channel								
1880.0	13.82	1.5	0	H	1.9	7.7	19.62	33
1880.0	16.03	1.5	0	V	1.9	7.7	21.83	33
High Channel								
1907.6	14.28	1.5	0	H	1.9	7.7	20.08	33
1907.6	16.02	1.5	0	V	1.9	7.7	21.82	33

EIRP For HSDPA Mode Band 2

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	12.96	1.5	0	H	1.9	7.7	18.76	33
1852.4	14.68	1.5	0	V	1.9	7.7	20.48	33
Middle Channel								
1880.0	12.86	1.5	0	H	1.9	7.7	18.66	33
1880.0	15.07	1.5	0	V	1.9	7.7	20.87	33
High Channel								
1907.6	13.33	1.5	0	H	1.9	7.7	19.13	33
1907.6	15.07	1.5	0	V	1.9	7.7	20.87	33

EIRP For HSUPA Mode Band 2

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	12.93	1.5	0	H	1.9	7.7	18.73	33
1852.4	14.65	1.5	0	V	1.9	7.7	20.45	33
Middle Channel								
1880.0	12.86	1.5	0	H	1.9	7.7	18.66	33
1880.0	15.07	1.5	0	V	1.9	7.7	20.87	33
High Channel								
1907.6	13.3	1.5	0	H	1.9	7.7	19.1	33
1907.6	15.04	1.5	0	V	1.9	7.7	20.84	33

Note: Result = Substitude - Cable loss + Antenna Gain

Max. Conducted Output Power

For Cellular Band (GSM850)

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 22.913 Limit (dBm)
GSM	Low Channel	824.2	29.60	38.45
	Middle Channel	836.6	29.39	38.45
	High Channel	848.8	29.19	38.45
GPRS(1 Slot)	Low Channel	824.2	28.63	38.45
	Middle Channel	836.6	28.59	38.45
	High Channel	848.8	28.36	38.45
EDGE(1 Slot)	Low Channel	824.2	25.85	38.45
	Middle Channel	836.6	26.10	38.45
	High Channel	848.8	26.12	38.45

For PCS Band (GSM1900)

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 24.232 Limit (dBm)
GSM	Low Channel	1850.2	29.38	33.0
	Middle Channel	1880.0	29.40	33.0
	High Channel	1909.8	29.49	33.0
GPRS(1 Slot)	Low Channel	1850.2	28.20	33.0
	Middle Channel	1880.0	28.20	33.0
	High Channel	1909.8	28.14	33.0
EDGE(1 Slot)	Low Channel	1850.2	25.89	33.0
	Middle Channel	1880.0	25.70	33.0
	High Channel	1909.8	25.75	33.0

For WCDMA Band 5

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 22.913 Limit (dBm)
WCDMA	Low Channel	826.4	22.24	38.45
	Middle Channel	836.6	22.33	38.45
	High Channel	846.6	22.26	38.45
HSDPA	Low Channel	826.4	21.23	38.45
	Middle Channel	836.6	21.27	38.45
	High Channel	846.6	21.27	38.45
HSUPA	Low Channel	826.4	21.23	38.45
	Middle Channel	836.6	21.33	38.45
	High Channel	846.6	21.29	38.45

For WCDMA Band 2

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 24.232 Limit (dBm)
WCDMA	Low Channel	1852.4	22.08	33.00
	Middle Channel	1880.0	22.17	33.00
	High Channel	1907.6	22.21	33.00
HSDPA	Low Channel	1852.4	21.00	33.00
	Middle Channel	1880.0	21.21	33.00
	High Channel	1907.6	21.26	33.00
HSUPA	Low Channel	1852.4	20.97	33.00
	Middle Channel	1880.0	21.21	33.00
	High Channel	1907.6	21.23	33.00

4. Peak-to-average Ratio(PAR) of Transmitter

4.1 Standard Applicable

According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the peak-to-average ratio (PAR) of the transmission was recorded.Record the maximum PAPR level associated with a probability of 0.1%.

Test Configuration for the emission bandwidth testing:

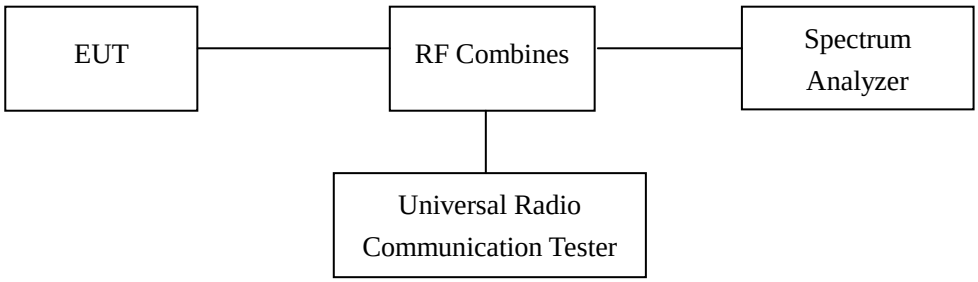

4.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

4.4Summary of Test Results

Only the worst case was selected to record

For PCS Band

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GSM	512	1850.2	9.96	13
GPRS(1 Slot)	512	1850.2	10.00	13
EDGE(1 Slot)	512	1850.2	9.33	13

For WCDMA Band 2

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	9262	1852.4	3.27	13
HSDPA	9400	1880.0	4.46	13
HSUPA	9400	1880.0	4.46	13

GPRS Low Channel:

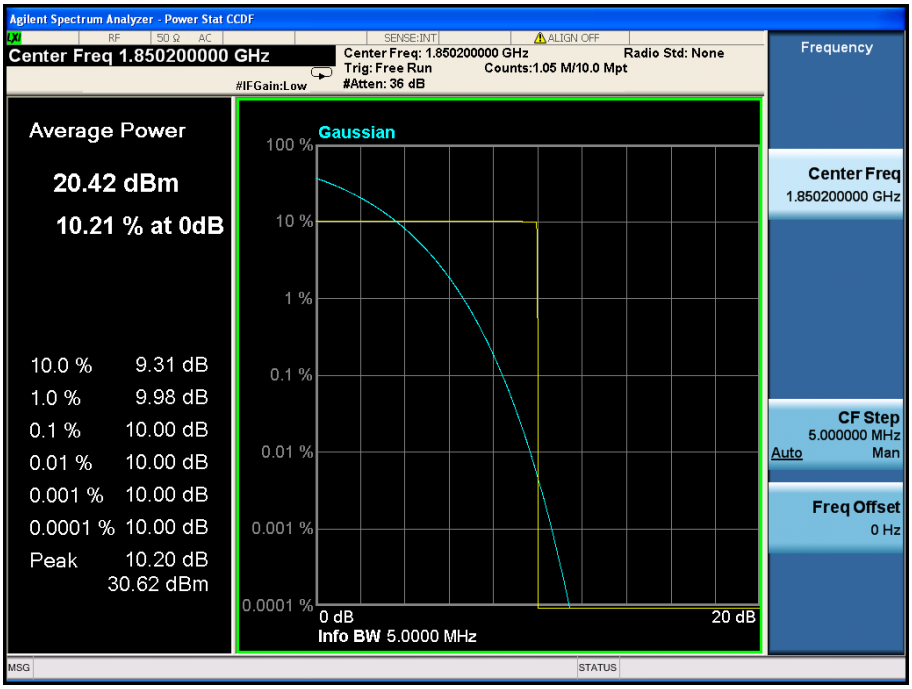

5. Emission Bandwidth

5.1 Standard Applicable

According to §22.917(b),The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.2Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

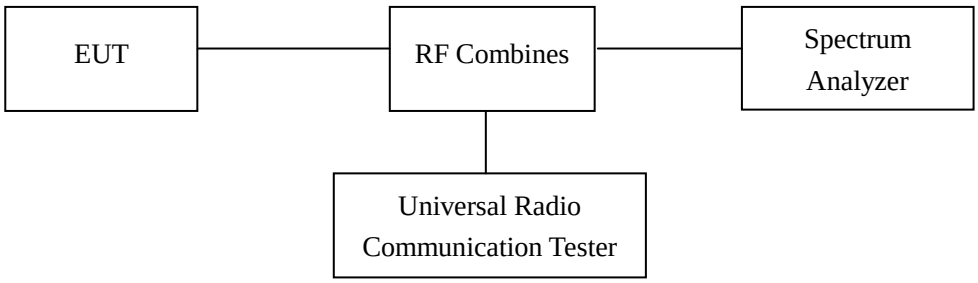

5.3Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

6.4Summary of Test Results/Plots

For Cellular Band

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM	128	824.2	249.41	335.4
	190	836.6	249.23	335.9
	251	848.8	248.57	332.8
GPRS	128	824.2	252.86	339.0
	190	836.6	250.41	333.6
	251	848.8	250.63	334.0
EDGE	128	824.2	251.65	327.2
	190	836.6	252.85	329.3
	251	848.8	243.75	330.0

For PCS Band

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM	512	1850.2	248.37	332.1
	661	1880.0	248.04	332.0
	810	1909.8	245.62	329.2
GPRS	512	1850.2	249.34	333.2
	661	1880.0	249.90	330.7
	810	1909.8	250.10	330.3
EDGE	512	1850.2	256.53	333.8
	661	1880.0	242.98	327.5
	810	1909.8	246.86	319.1

For Band 5

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA	4132	826.4	4.2165	4.858
	4183	836.6	4.2106	4.849
	4233	846.6	4.2022	4.834
HSDPA	4132	826.4	4.2136	4.881
	4183	836.6	4.2239	4.842
	4233	846.6	4.1970	4.816
HSUPA	4132	826.4	4.2102	4.849
	4183	836.6	4.2117	4.837
	4233	846.6	4.2241	4.824

For Band 2

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA	9262	1852.4	4.2214	4.839
	9400	1880.0	4.2022	4.811
	9538	1907.6	4.2101	4.819
HSDPA	9262	1852.4	4.2233	4.822
	9400	1880.0	4.2095	4.847
	9538	1907.6	4.2044	4.827
HSUPA	9262	1852.4	4.2118	4.807
	9400	1880.0	4.2198	4.829
	9538	1907.6	4.2095	4.839

For Cellular Band

GSM Low Channel

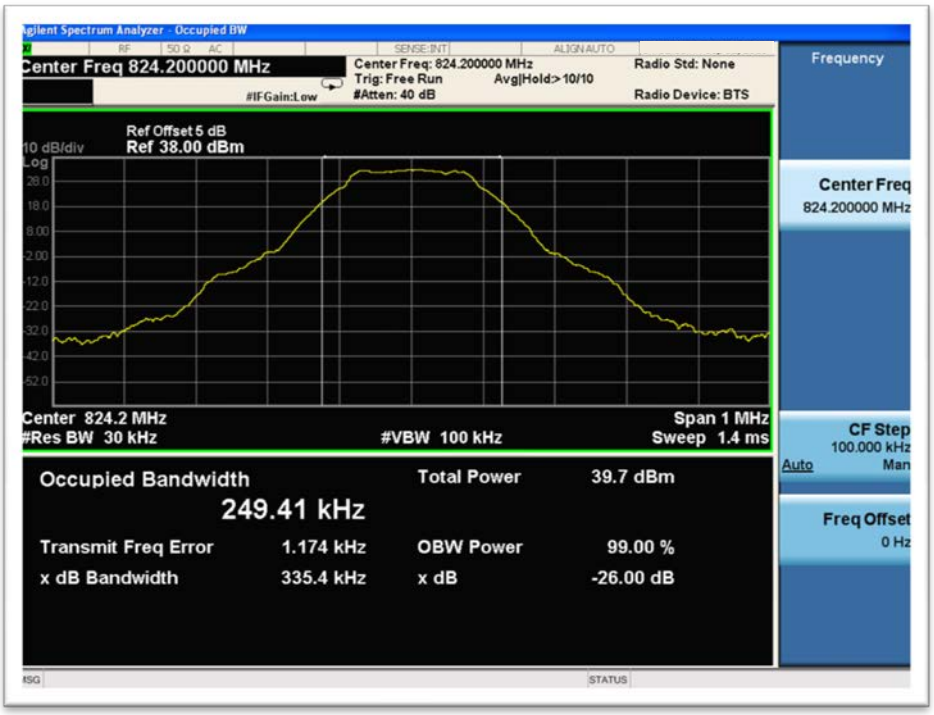

GSM Middle Channel

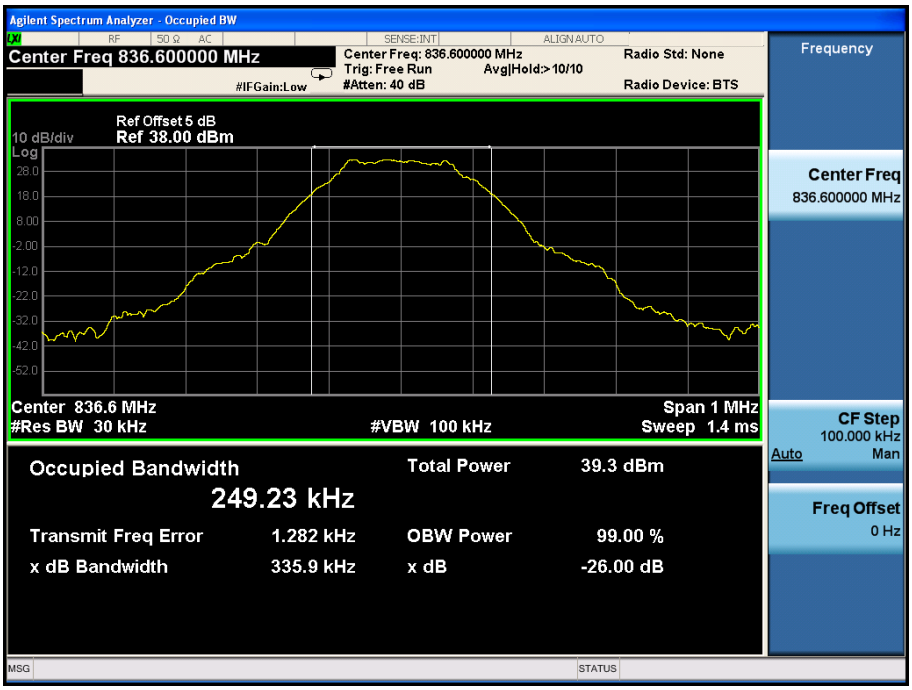

GSM High channel

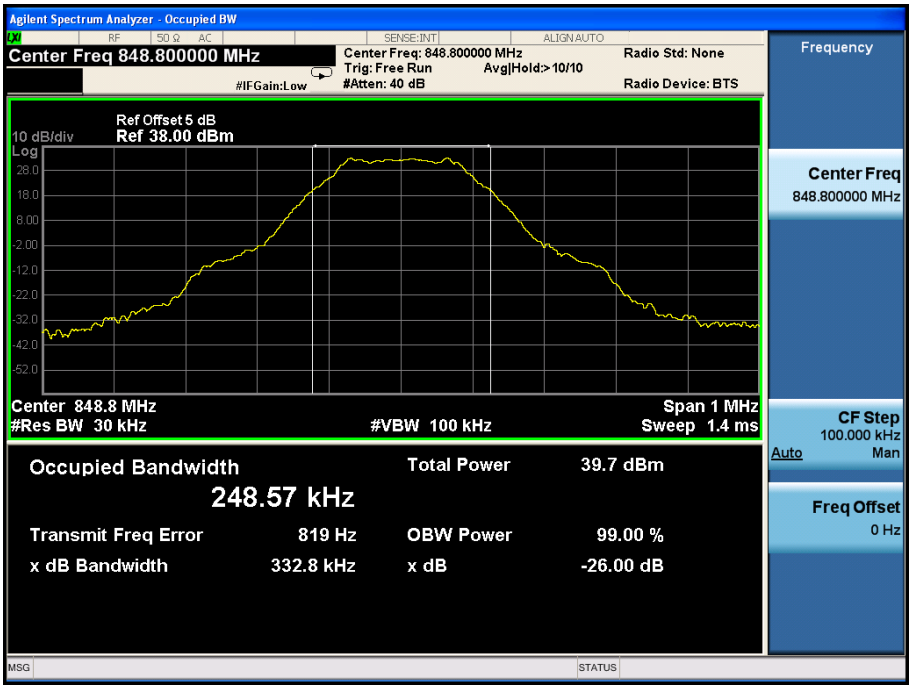

GPRS Low Channel

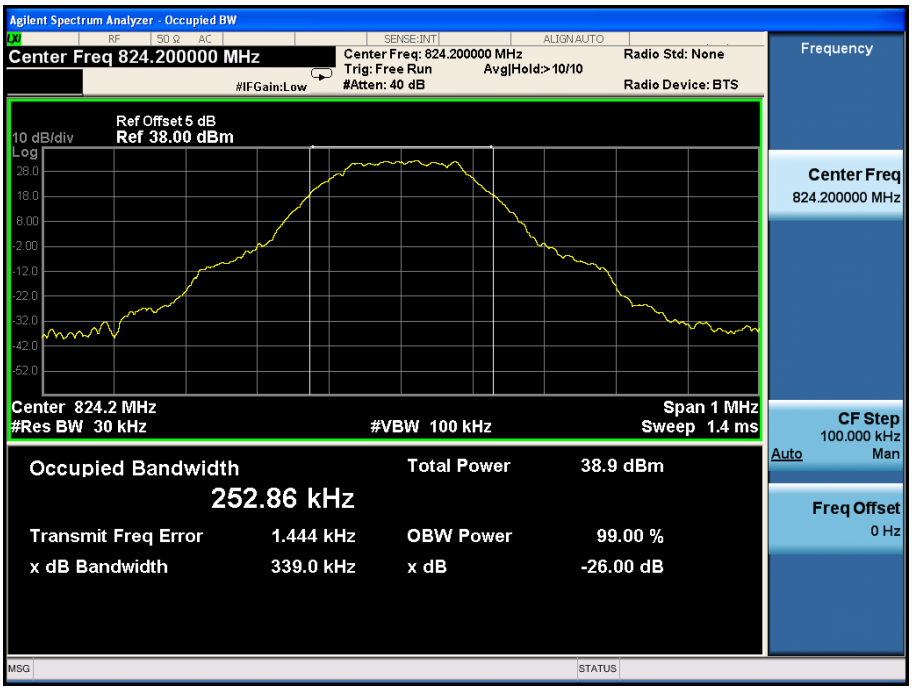

GPRS Middle Channel

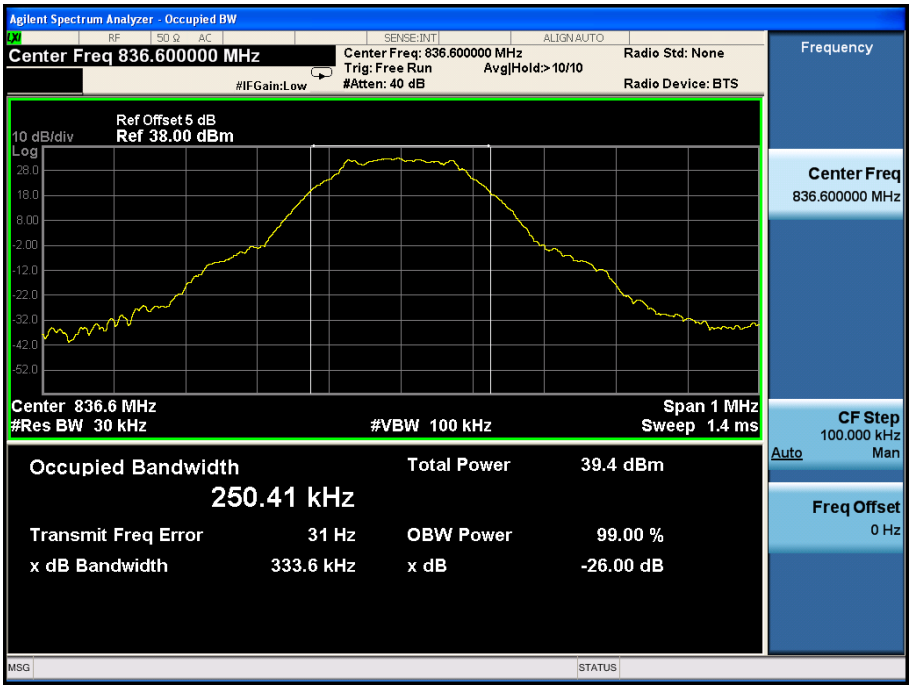

GPRS High Channel

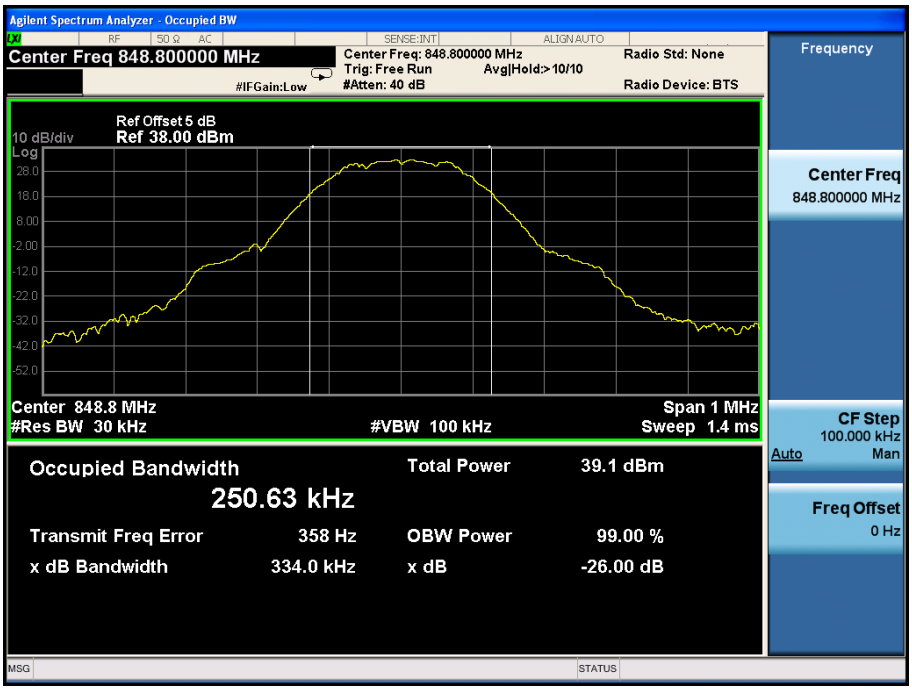

EDGE Low Channel

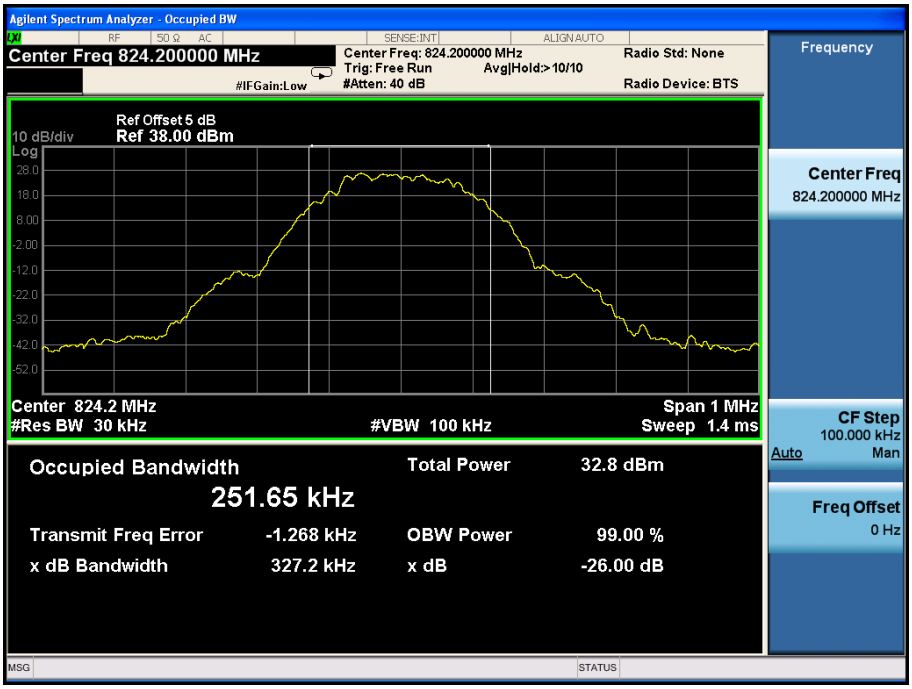

EDGE Middle Channel

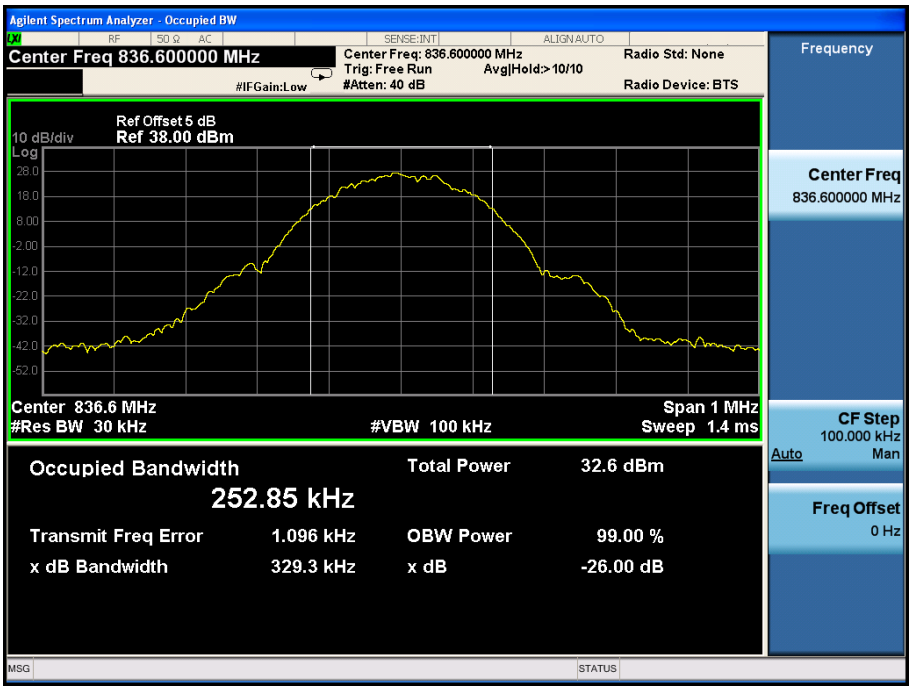

EDGE High Channel

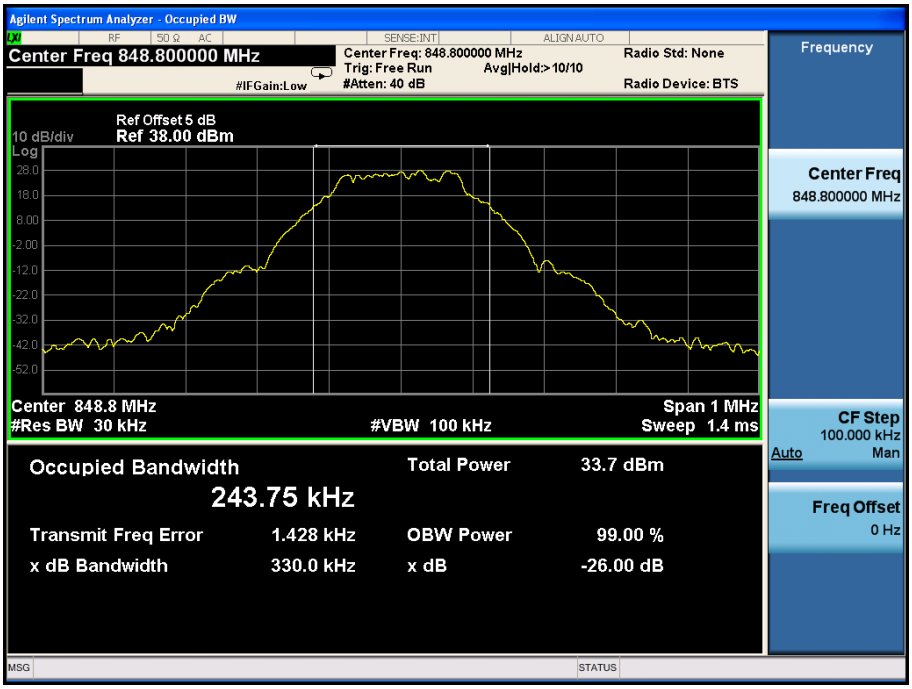

For PCS Band

GSM Low Channel

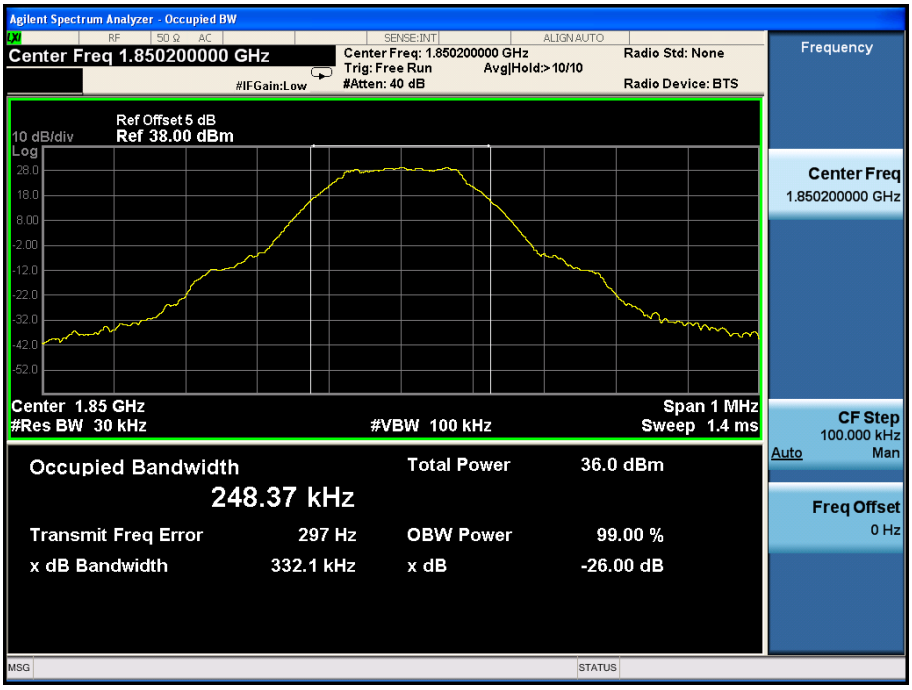

GSM Middle Channel

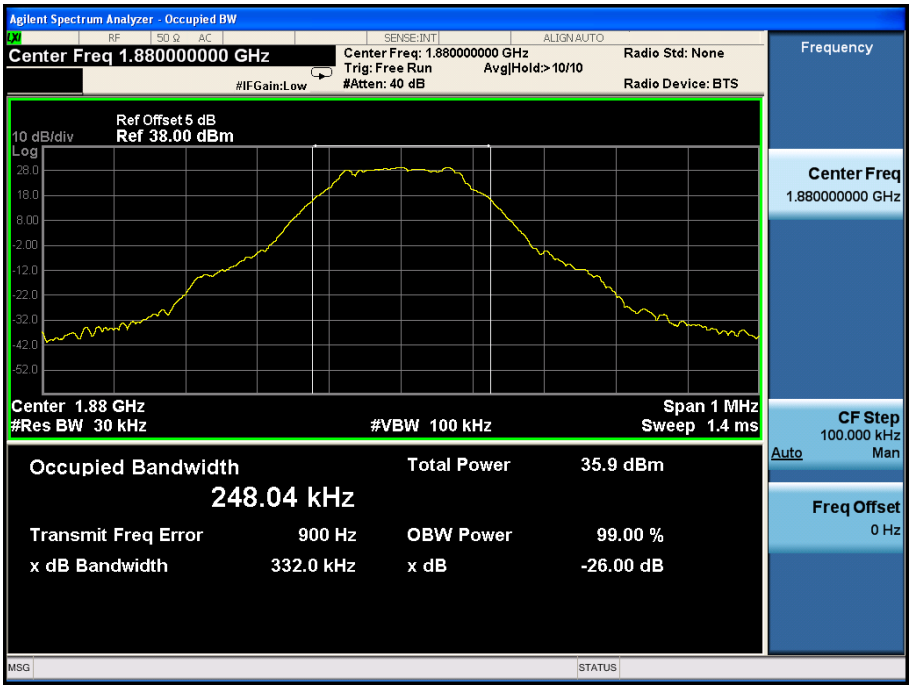

GSM High channel

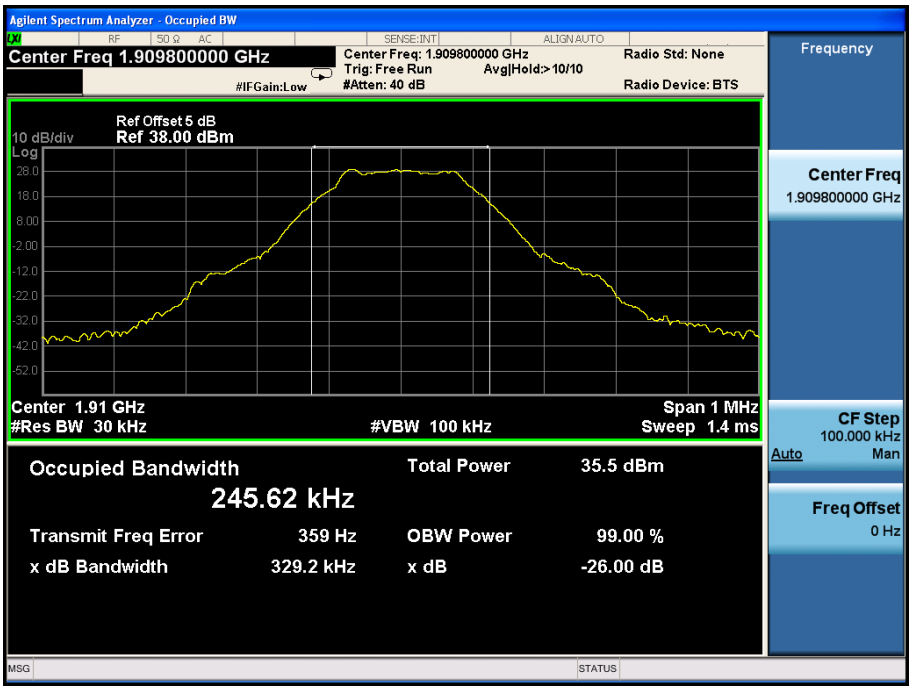

GPRS Low Channel

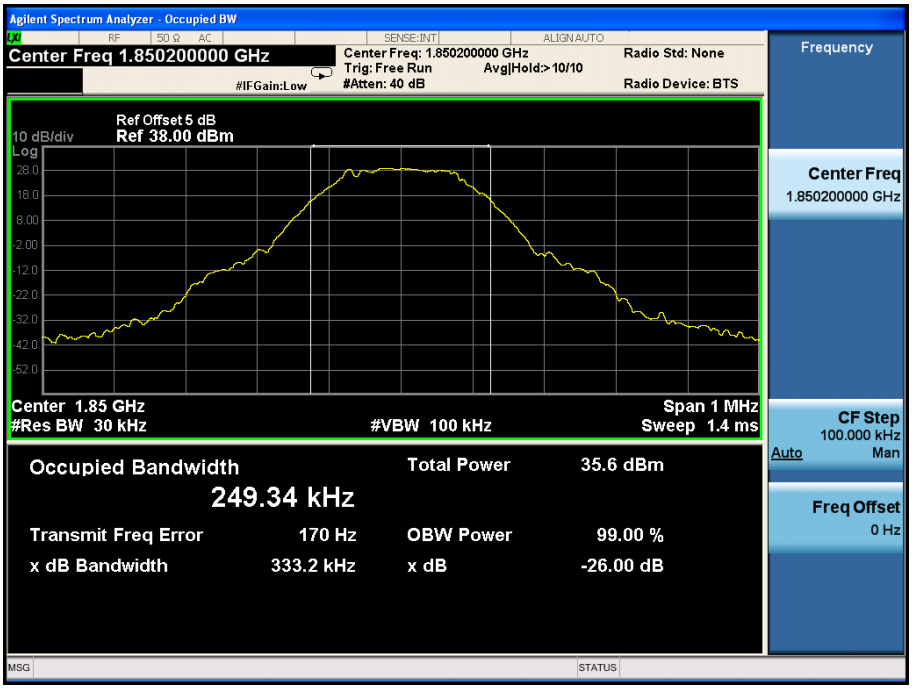

GPRS Middle Channel

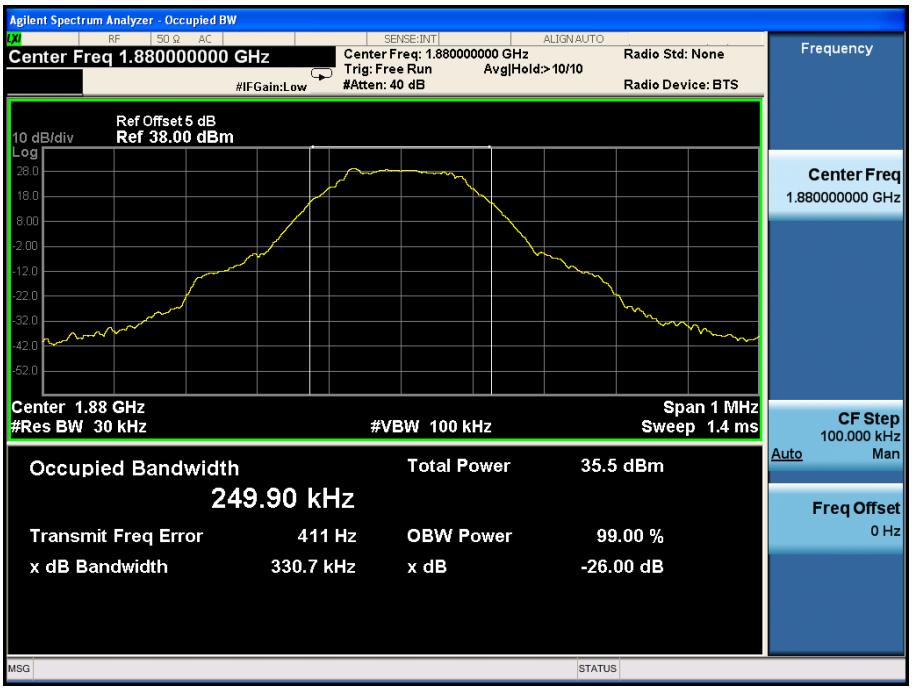

GPRS High Channel

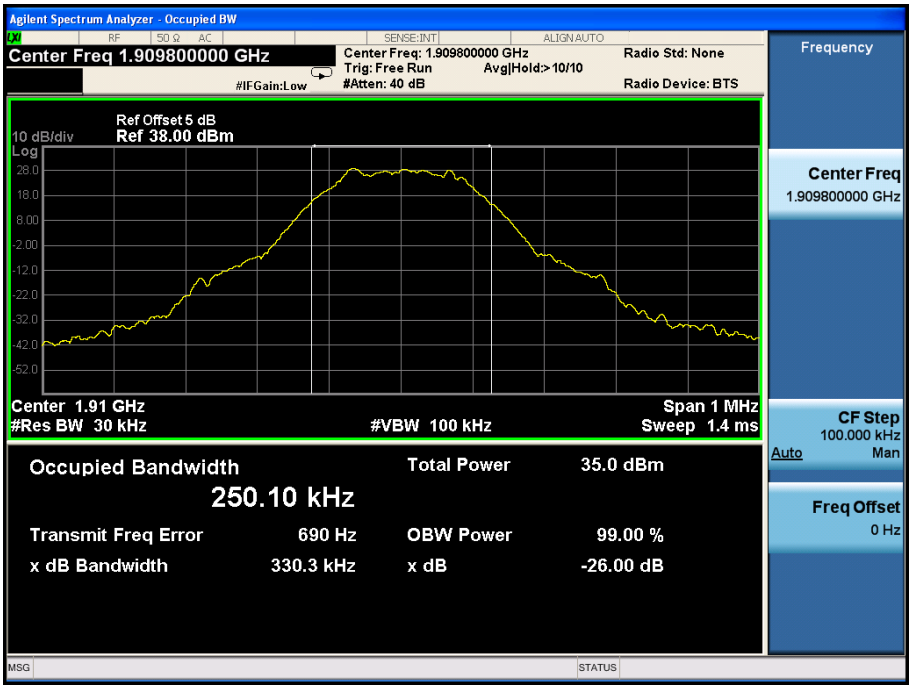

EDGE Low Channel

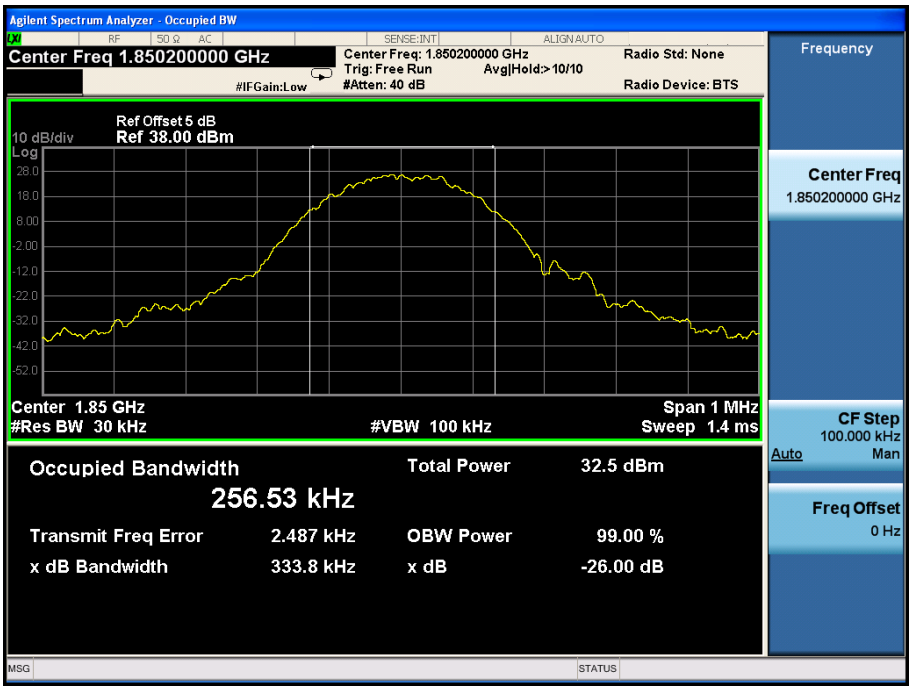

EDGE Middle Channel

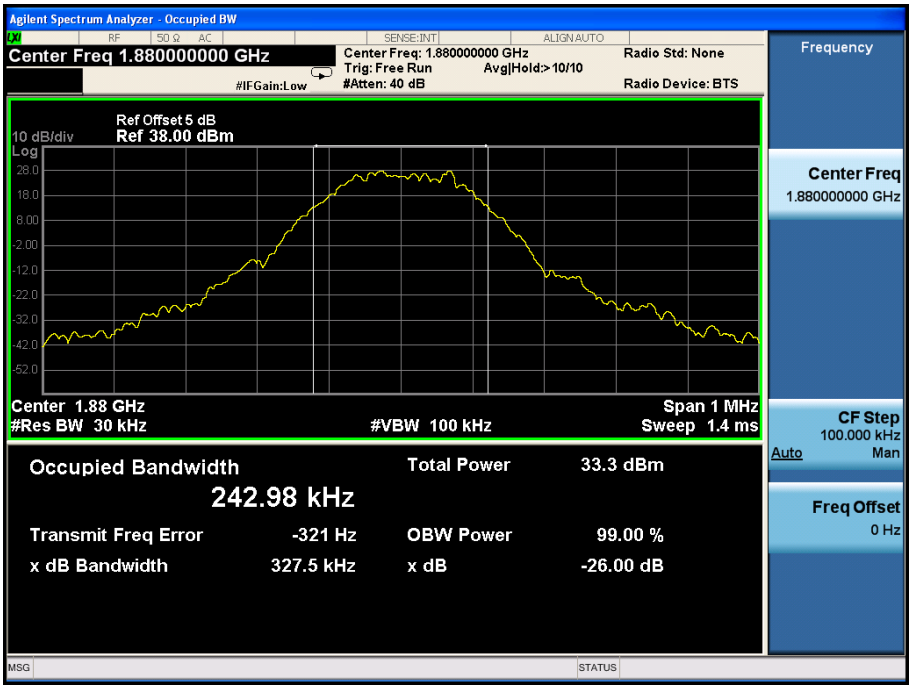

EDGE High Channel

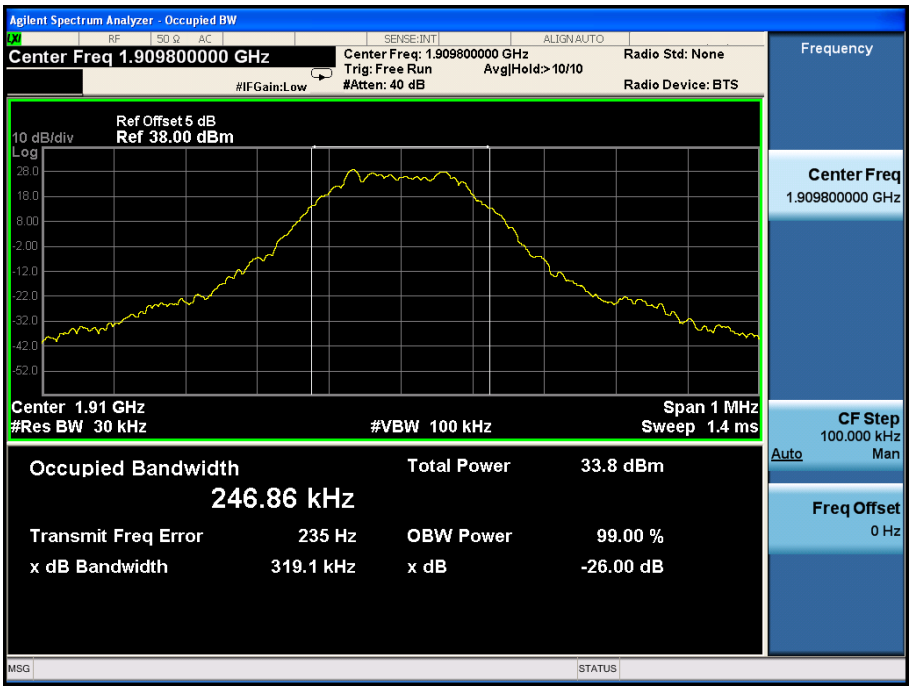

For Band V

WCDMA Low Channel

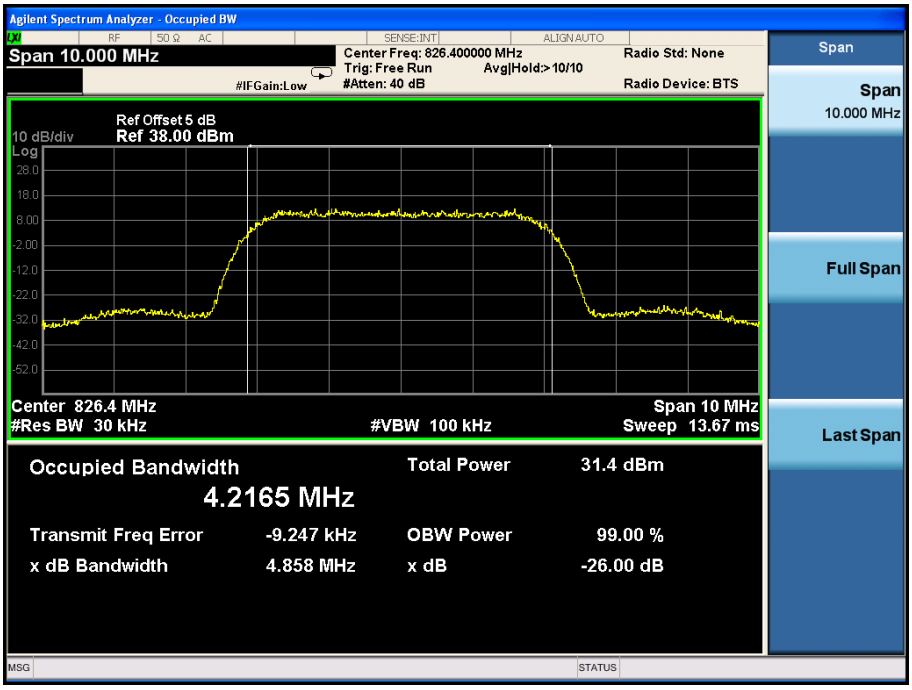

WCDMA Middle Channel

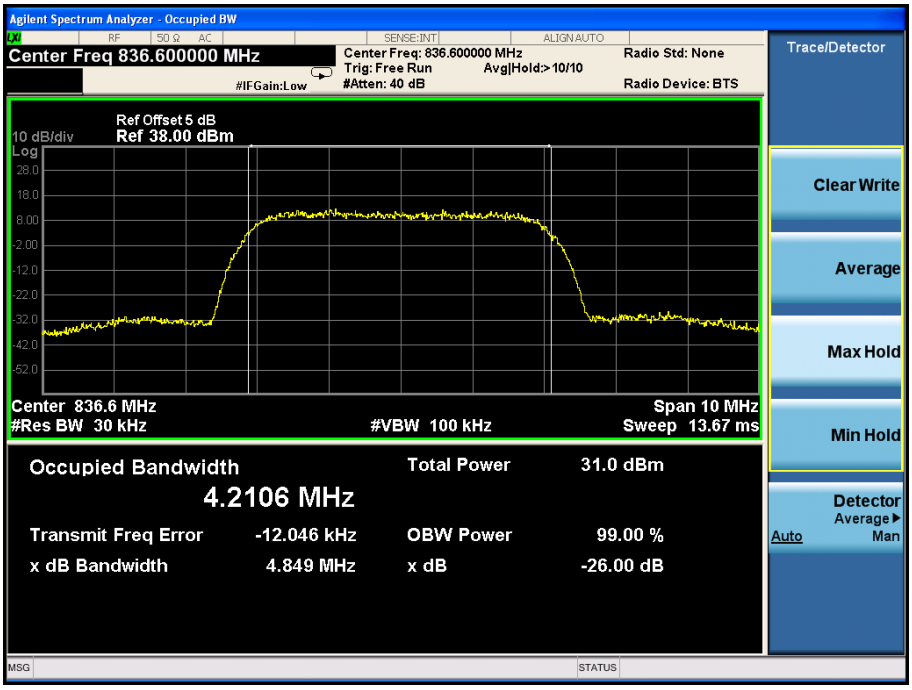

WCDMA High Channel

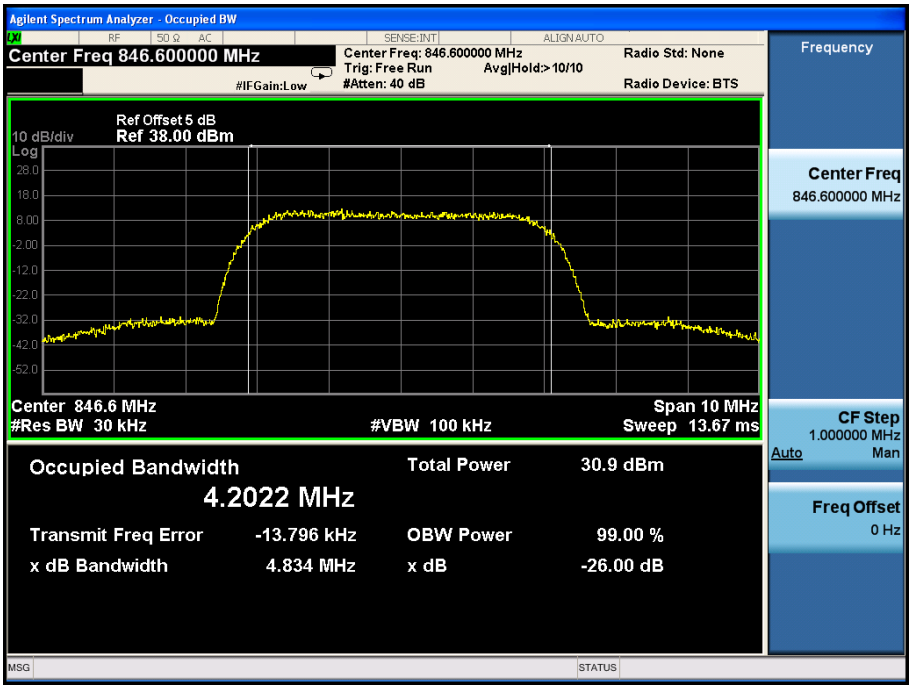

HSDPA Low Channel

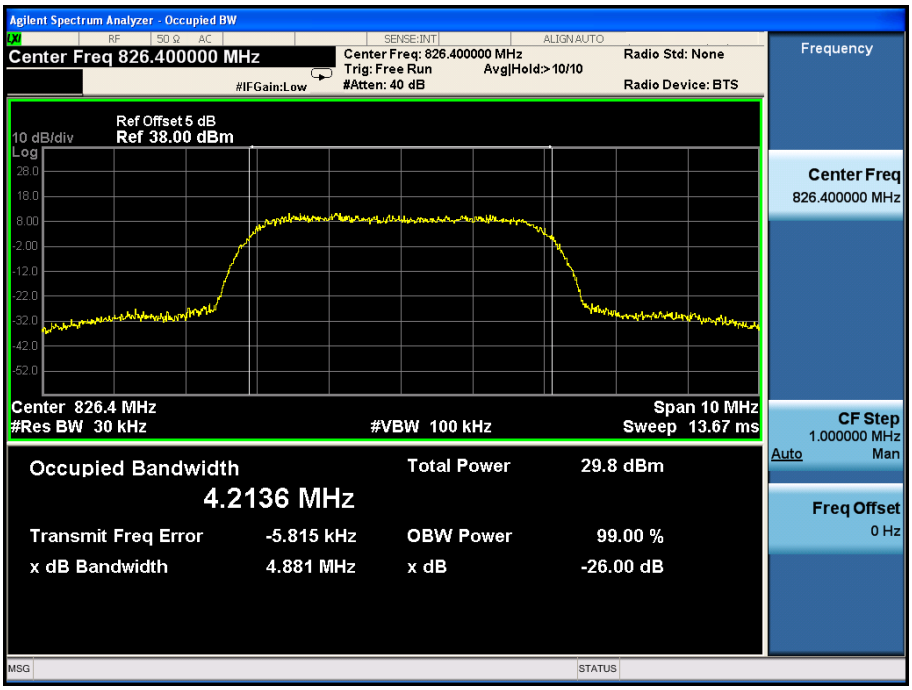

HSDPA Middle Channel

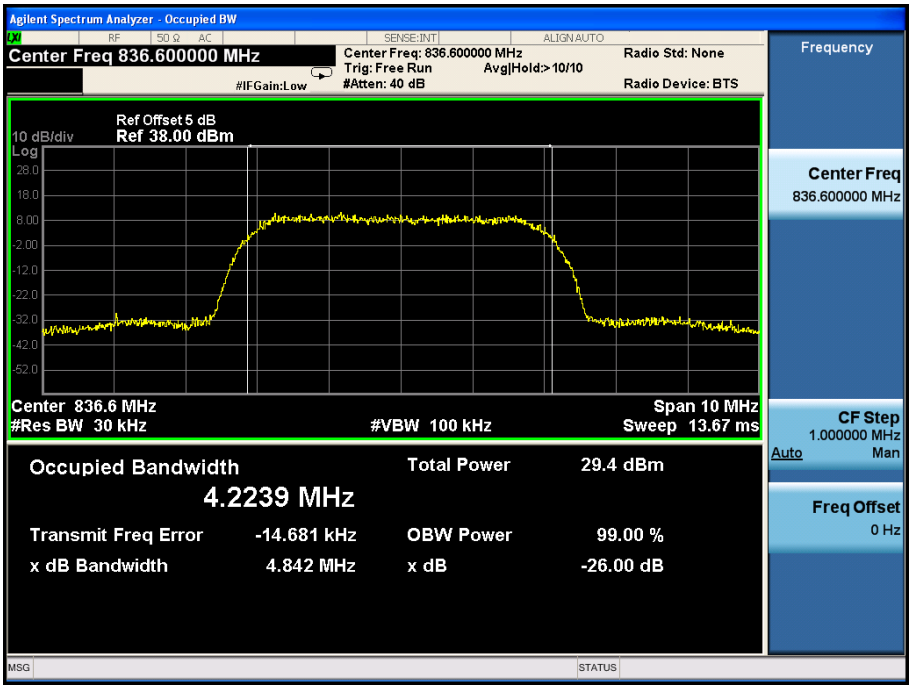

HSDPA High Channel

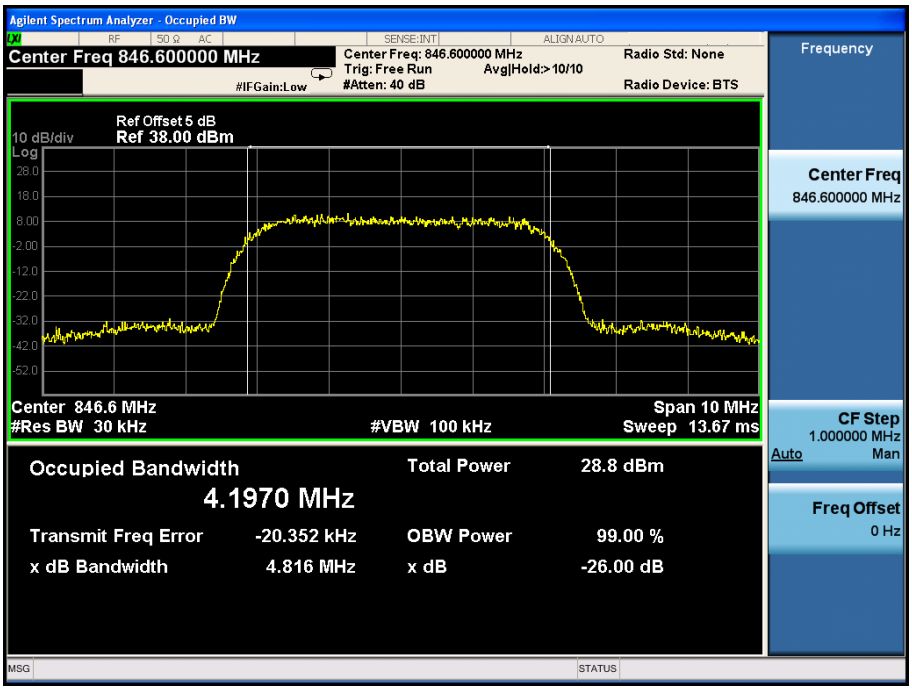

HSUPA Low Channel

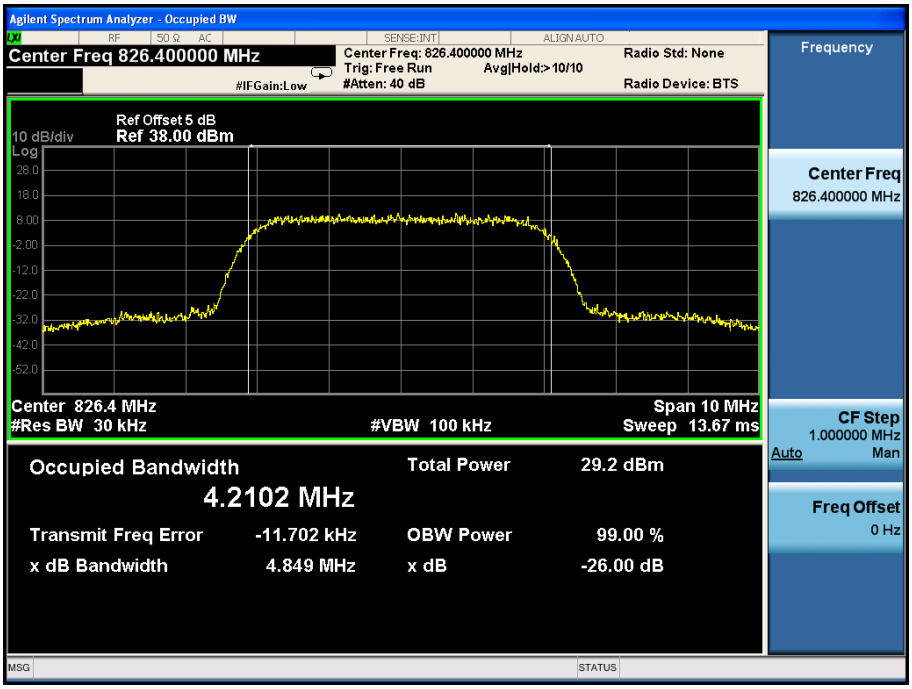

HSUPA Middle Channel

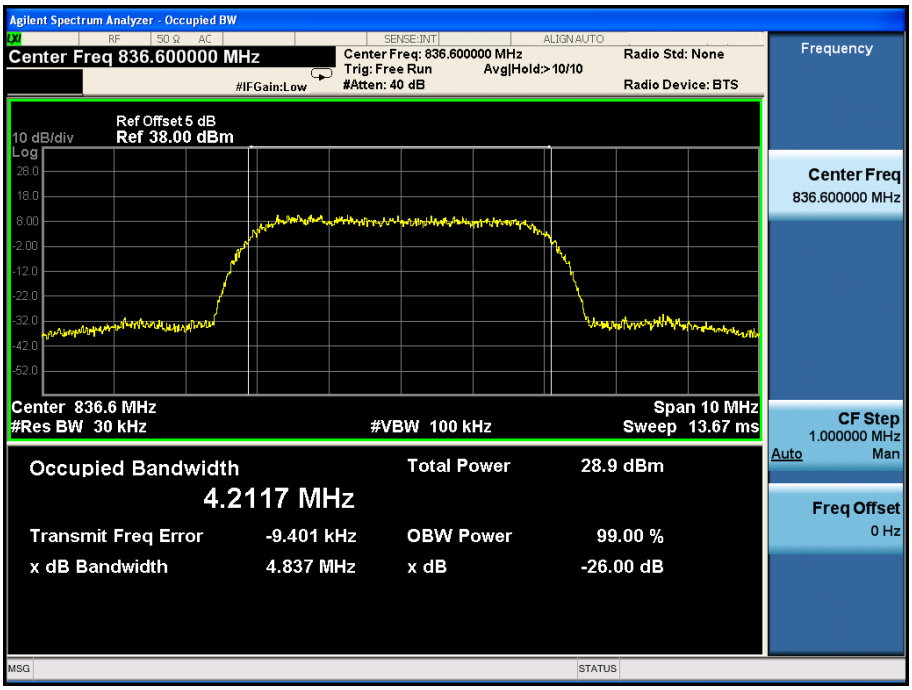

HSUPA High Channel

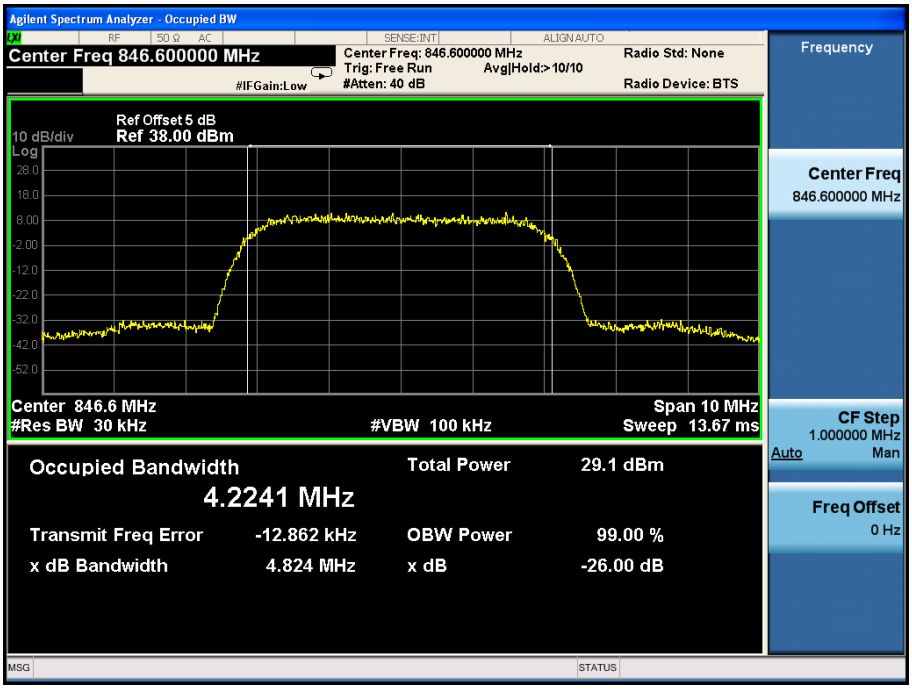

For Band II

WCDMA Low Channel

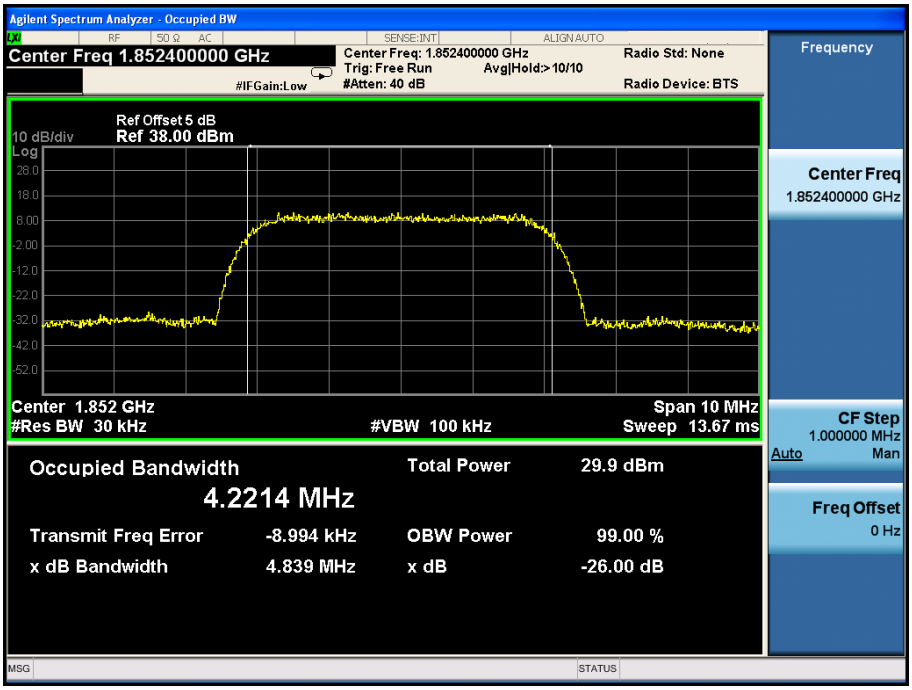

WCDMA Middle Channel

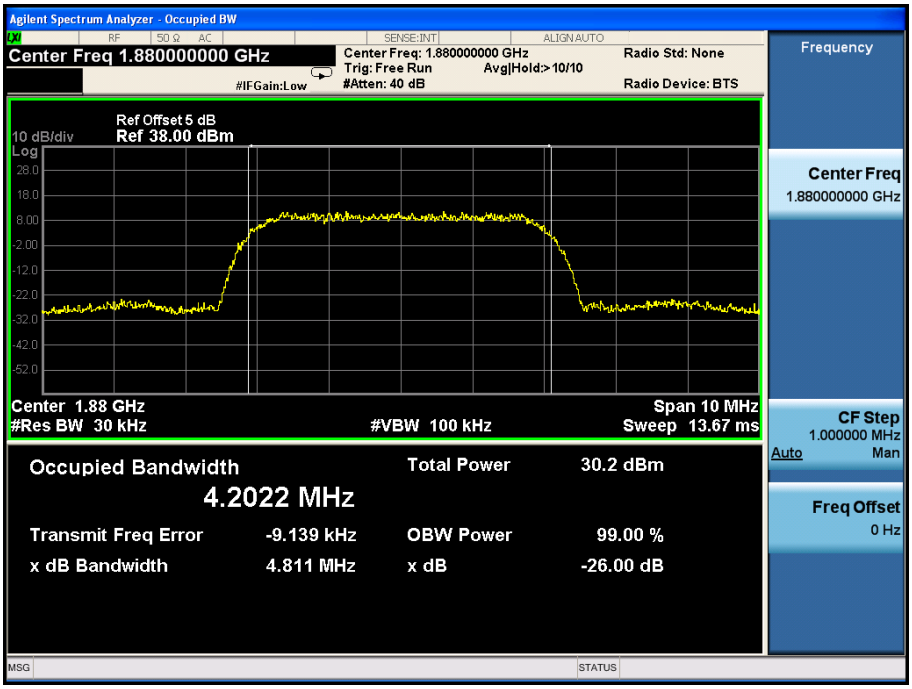

WCDMA High Channel

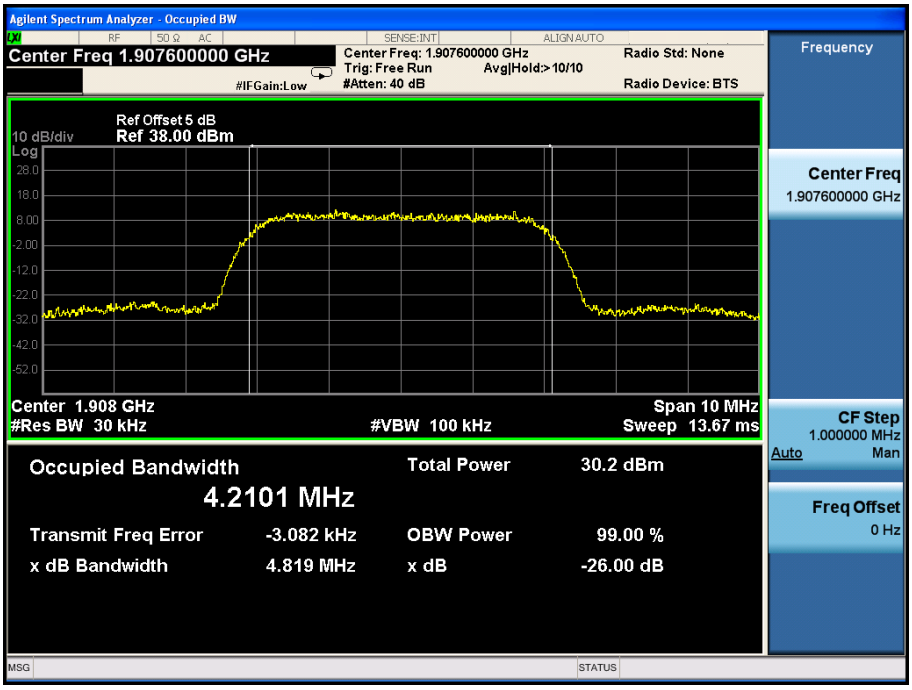

HSDPA Low Channel

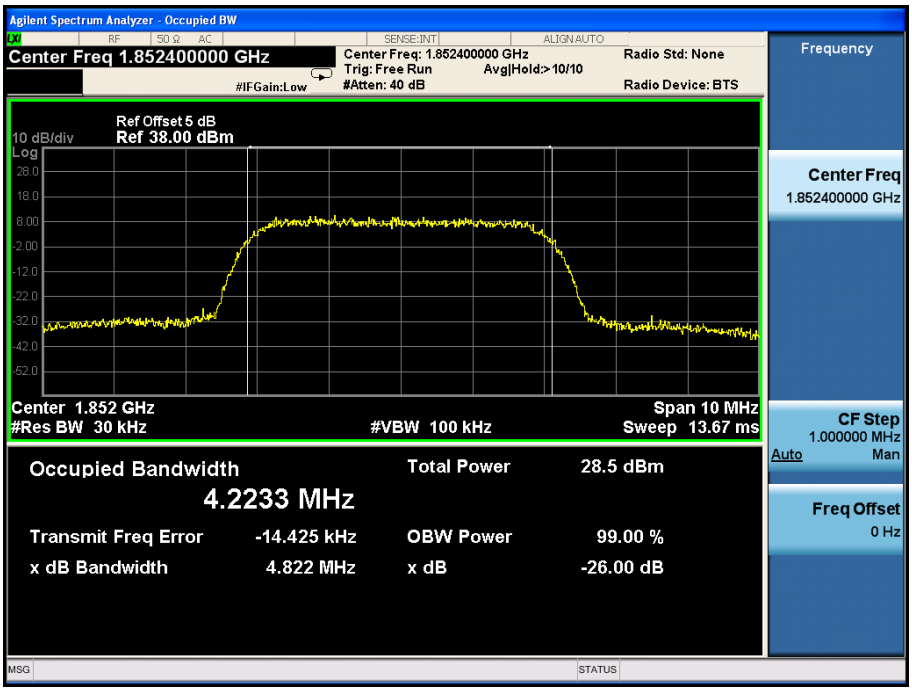

HSDPA Middle Channel

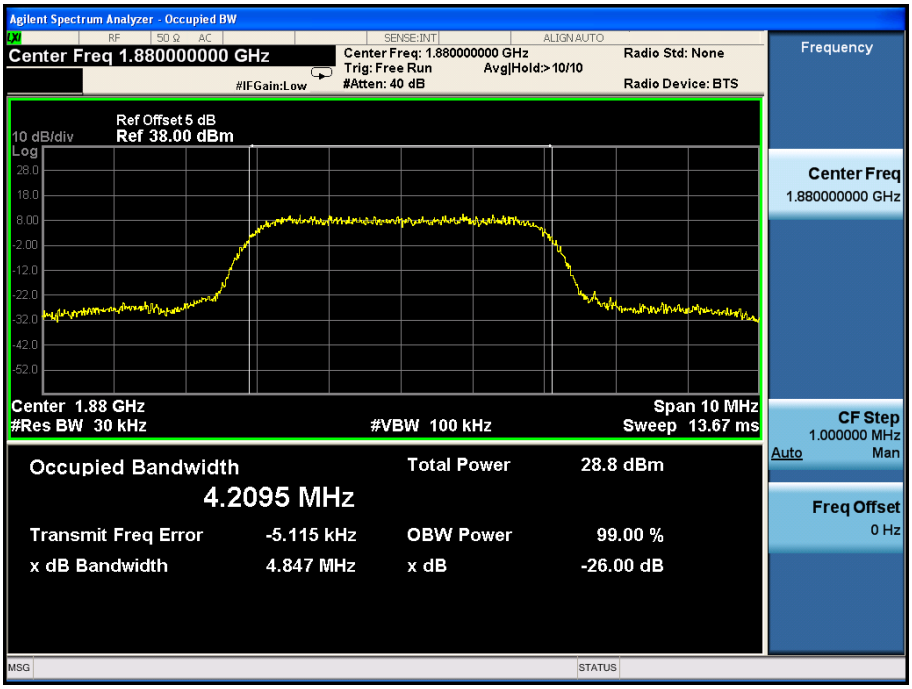

HSDPA High Channel

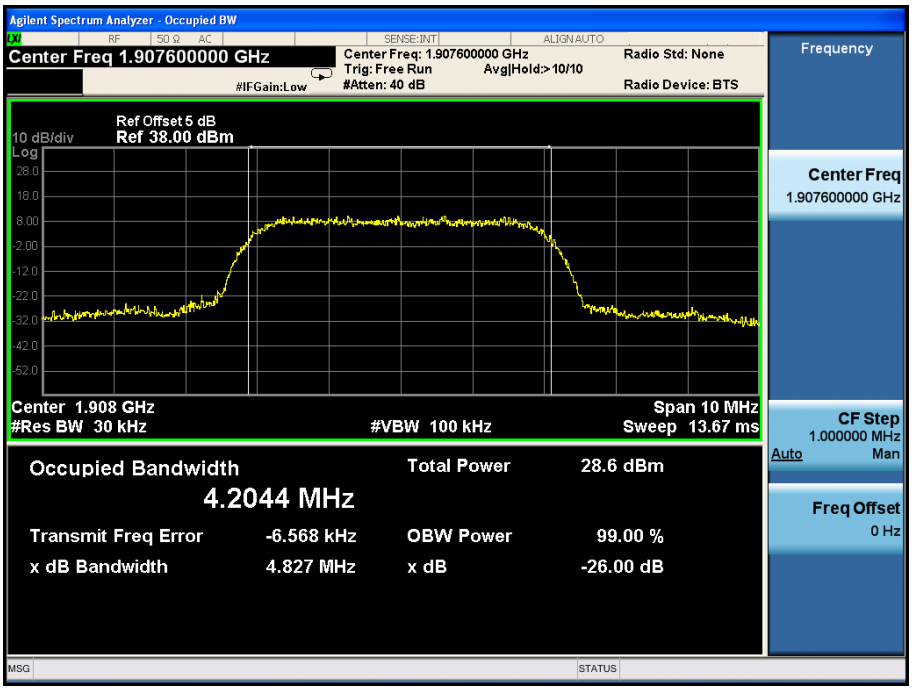

HSUPA Low Channel

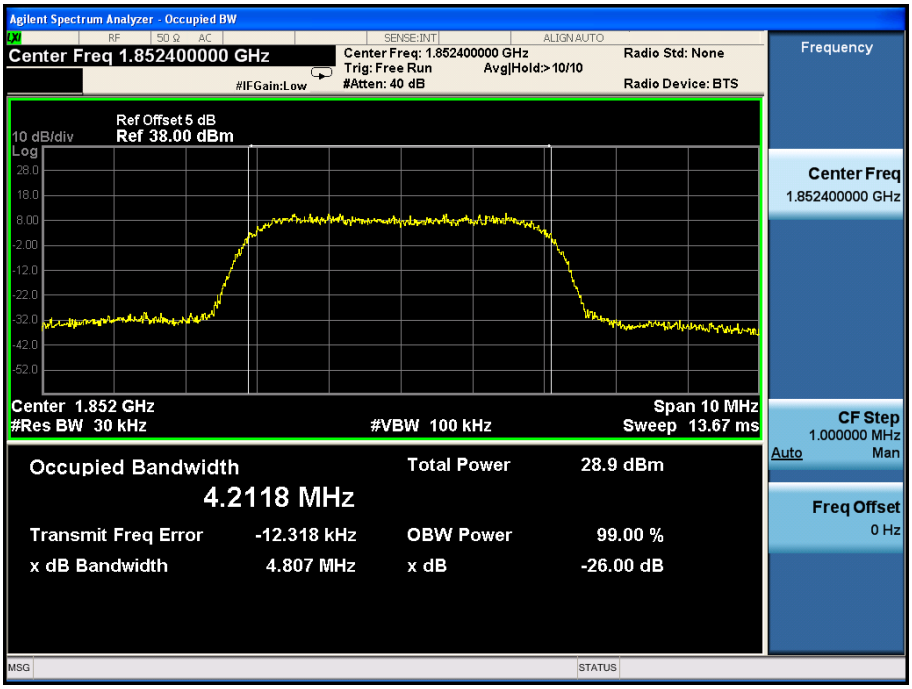

HSUPA Middle Channel

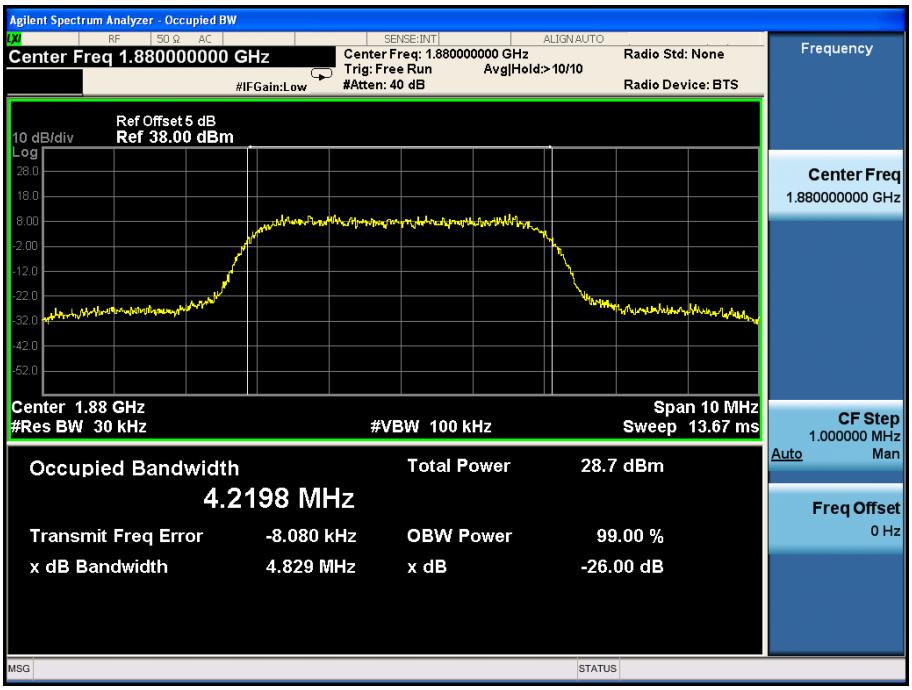

HSUPA High Channel

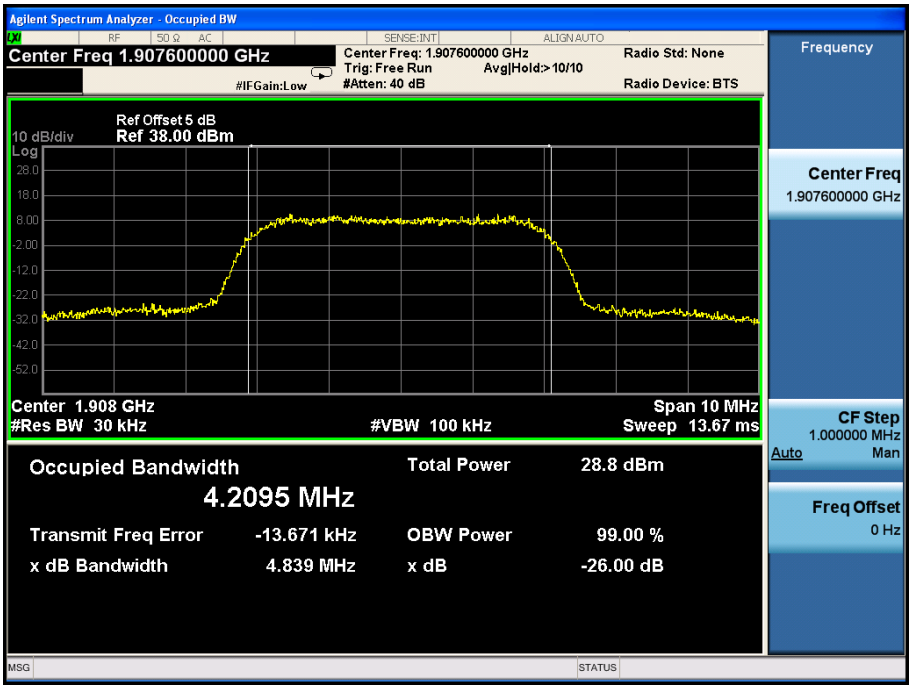

6. Out of Band Emissions at Antenna Terminal

6.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

6.2Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10th harmonic.

Test Configuration for the out of band emissions testing:

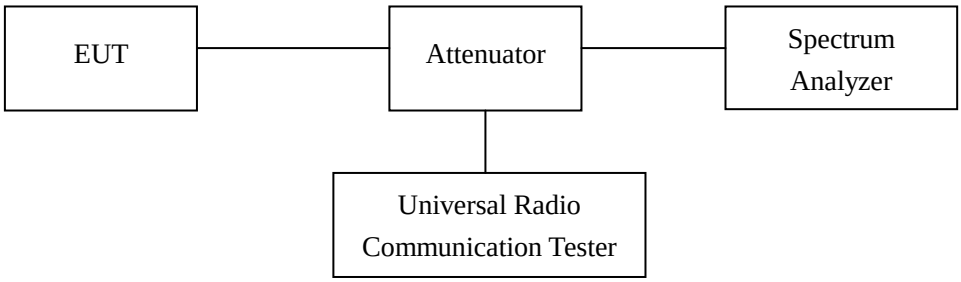

6.3Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.4Summary of Test Results/Plots

*Please refer to the following test plots*For Cellular Band

GSM Low Channel

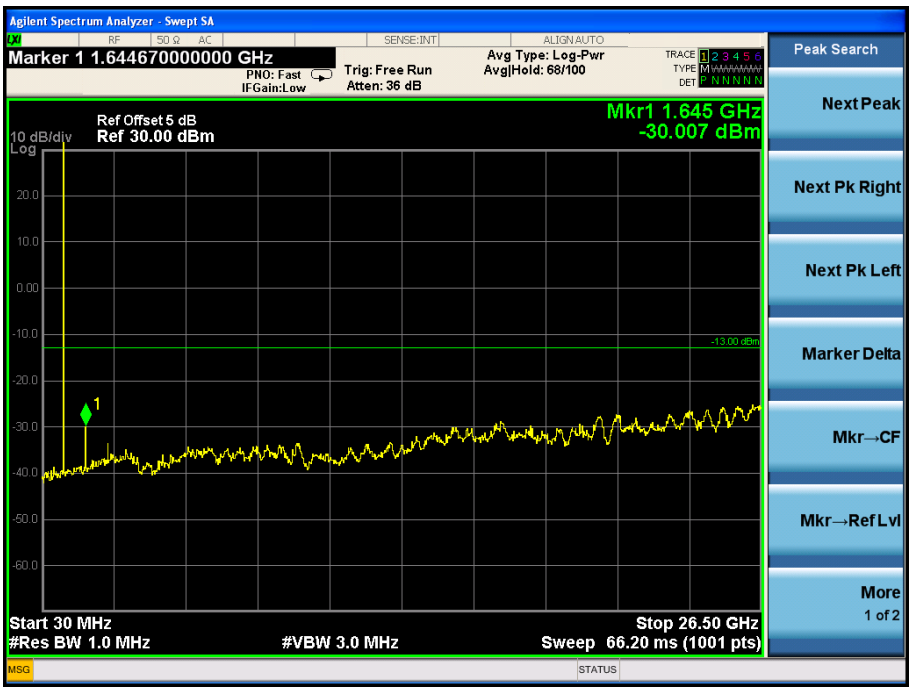

GSM Middle Channel

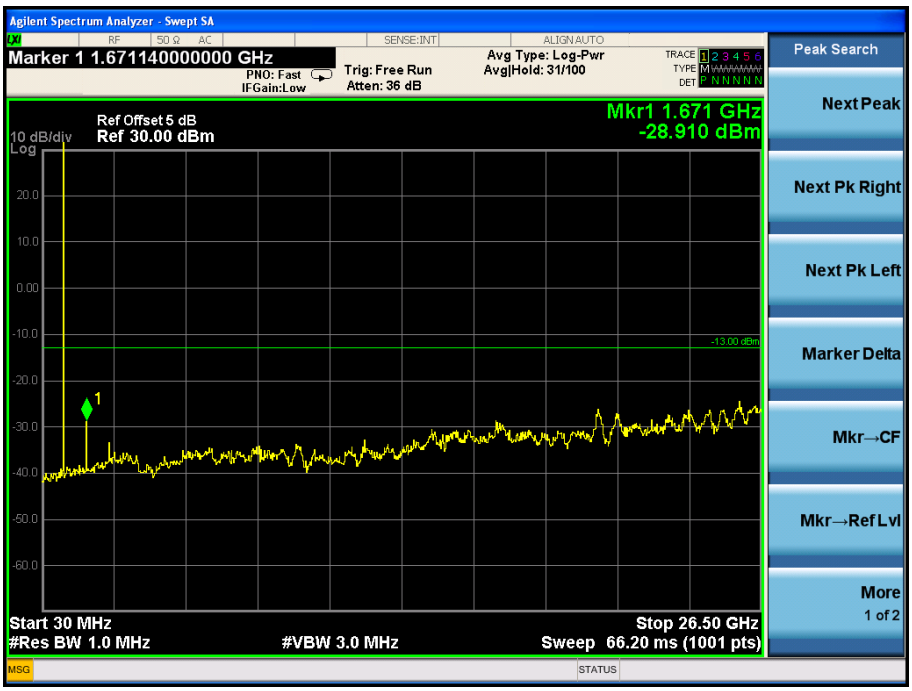

GSM High Channel

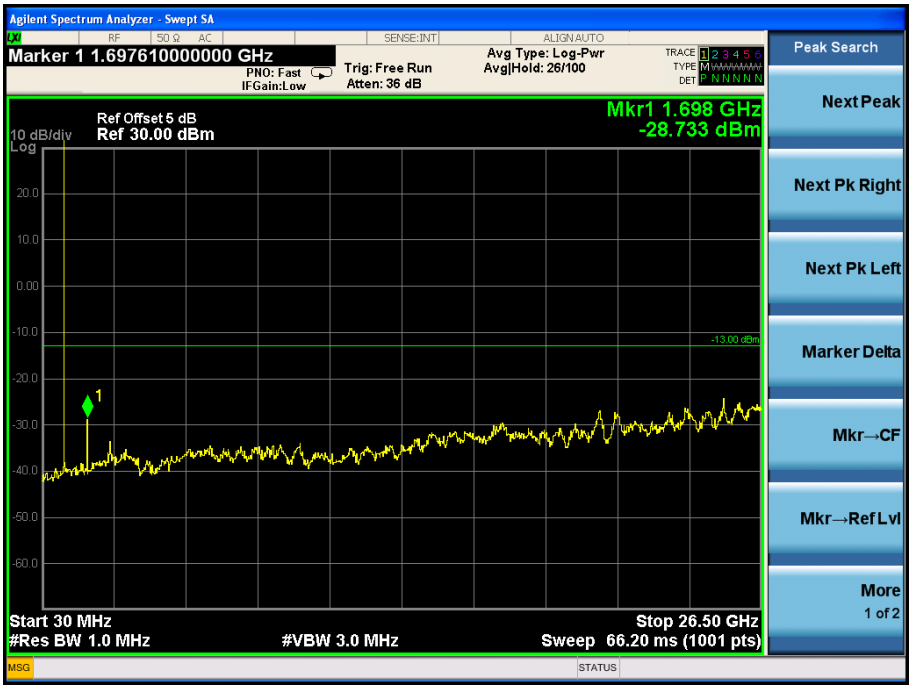

GSM Low Band Emission

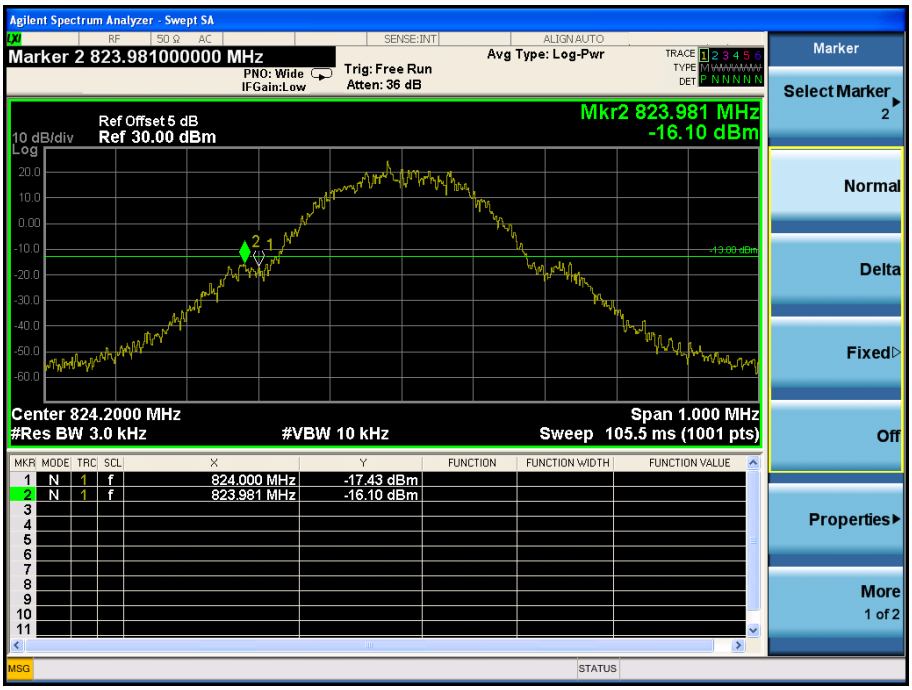

GSM High Band Emission

GPRS Low Channel

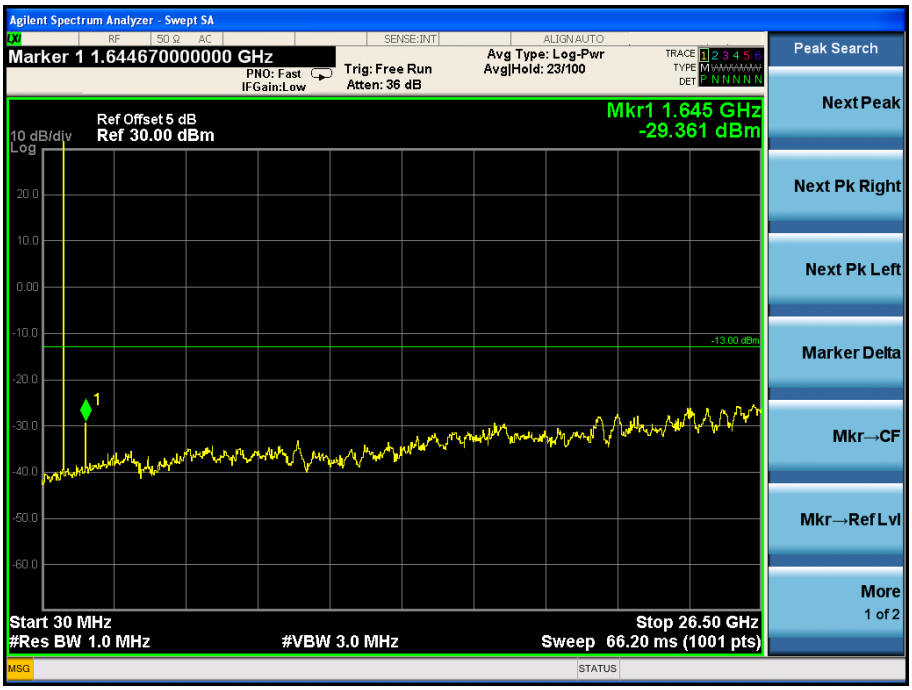

GPRS Middle Channel

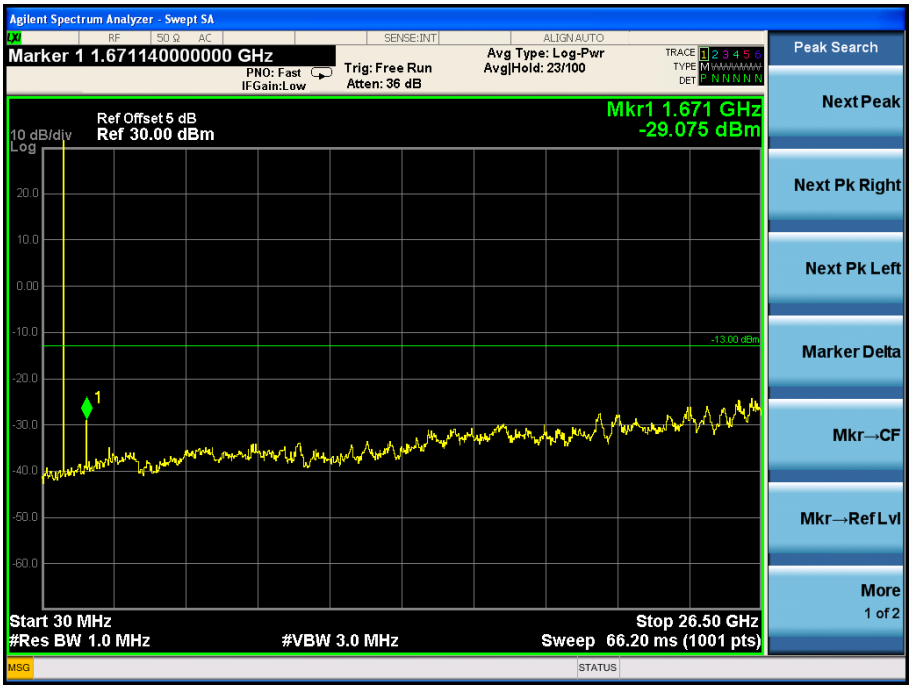
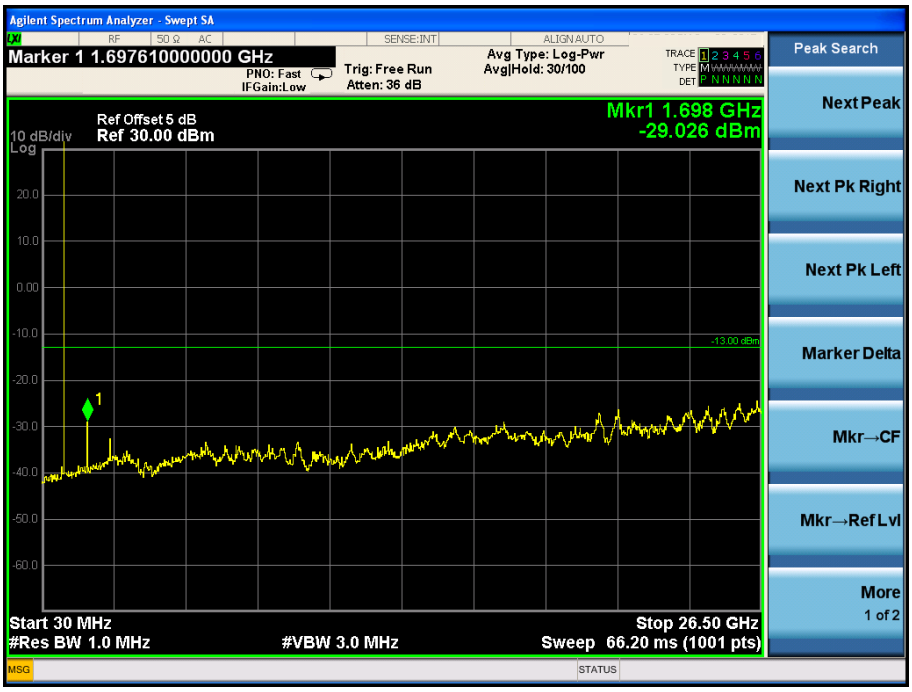
GPRS High Channel