

Nalloy, LLC

TEST REPORT FOR

JU3NF9

Tested to The Following Standards:

FCC Part 15 Subpart C Section(s)

15.207 & 15.209

Report No.: 107516-20

Date of issue: November 21, 2022



Test Certificate # 803.01

This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

This report contains a total of 32 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc.



TABLE OF CONTENTS

Administrative Information	3
Test Report Information	3
Report Authorization	3
Test Facility Information	4
Software Versions	4
Site Registration & Accreditation Information	4
Summary of Results	5
Modifications During Testing	5
Conditions During Testing	5
Equipment Under Test	6
General Product Information	6
FCC Part 15 Subpart C	7
15.215(c) Occupied Bandwidth (20dB BW)	7
15.209 Field Strength of Fundamental	10
15.209 Radiated Emissions	15
15.207 AC Conducted Emissions	20
Supplemental Information	31
Measurement Uncertainty	31
Emissions Test Details	31

ADMINISTRATIVE INFORMATION

Test Report Information

REPORT PREPARED FOR:

Nalloy, LLC
2301 5th Avenue
Seattle, WA 98108

Representative: Naga Suryadevara
Customer Reference Number: 2D-09331917

REPORT PREPARED BY:

Viviana Prado
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

Project Number: 107516

DATE OF EQUIPMENT RECEIPT:


September 15, 2022

DATE(S) OF TESTING:

September 15 and November 17, 2022

Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the equipment provided by the client, tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.

A handwritten signature in black ink, reading "Steve Behm", is positioned above a horizontal line.

Steve Behm
Director of Quality Assurance & Engineering Services
CKC Laboratories, Inc.

Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):
 CKC Laboratories, Inc.
 Canyon Park
 22116 23rd Drive S.E., Suite A
 Bothell, WA 98021

Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.20

Site Registration & Accreditation Information

Location	*NIST CB #	FCC	Canada	Japan
Canyon Park, Bothell, WA	US0103	US1024	3082C	A-0136
Brea, CA	US0103	US1024	3082D	A-0136
Fremont, CA	US0103	US1024	3082B	A-0136
Mariposa, CA	US0103	US1024	3082A	A-0136

*CKC's list of NIST designated countries can be found at: <https://standards.gov/cabs/designations.html>

SUMMARY OF RESULTS

Standard / Specification: FCC Part 15 Subpart C - 15.209

Test Procedure	Description	Modifications*	Results
15.215(c)	Occupied Bandwidth	NA	Pass
15.209	Field Strength of Fundamental	NA	Pass
15.209	Radiated Spurious Emissions	NA	Pass
15.207	AC Conducted Emissions	NA	Pass

NA = Not Applicable

ISO/IEC 17025 Decision Rule

The declaration of pass or fail herein is based upon assessment to the specification(s) listed above, including where applicable, assessment of measurement uncertainties. For performance related tests, equipment was monitored for specified criteria identified in that section of testing.

Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

Summary of Conditions

No modifications were made during testing.

Modifications listed above must be incorporated into all production units.

Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

Summary of Conditions

None

EQUIPMENT UNDER TEST (EUT)

During testing, numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

Configuration 1

Equipment Tested:

Device	Manufacturer	Model #	S/N
None	Nalloy LLC, Amazon retail LLC	JU3NF9	NA

Support Equipment:

Device	Manufacturer	Model #	S/N
AC Adapter	Delta Electronics, Inc.	MDS-090AAS15B	NA
Laptop	HP	14-fq0032od	NA

General Product Information:

Product Information	Manufacturer-Provided Details
Equipment Type:	Stand-Alone Equipment
Modulation Type(s):	RFID
Maximum Duty Cycle:	Tested as 100%
Antenna Type(s) and Gain:	Loop
Antenna Connection Type:	Integral
Nominal Input Voltage:	120VAC/60Hz
Firmware / Software used for Test:	IGT FW Version: 2229 Wisepad – WPS33.01-41027 Baxter - 1.0.62.0 RFideas configuration utility – 6.0.5 Putty – 0.77
The validity of results is dependent on the stated product details, the accuracy of which the manufacturer assumes full responsibility.	

FCC Part 15 Subpart C

15.215(c) Occupied Bandwidth (20dB BW)

Test Setup/Conditions

Test Location:	Bothell Lab C3	Test Engineer:	M. Harrison
Test Method:	ANSI C63.10 (2013)	Test Date(s):	9/15/2022
Configuration:	1		
Test Setup:	The EUT is on a test bench and near field probe is used to measure OBW.		

Environmental Conditions

Temperature (°C)	23	Relative Humidity (%):	53
------------------	----	------------------------	----


Test Equipment

Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
02872	Spectrum Analyzer	Agilent	E4440A	11/29/2021	11/29/2023


Test Data Summary

Frequency	Antenna Port	Modulation	Measured (Hz)	Limit (Hz)	Results
125kHz	NA	RFID	495.884	None	NA
132kHz	NA	RFID	704.451	None	NA

Plot(s)

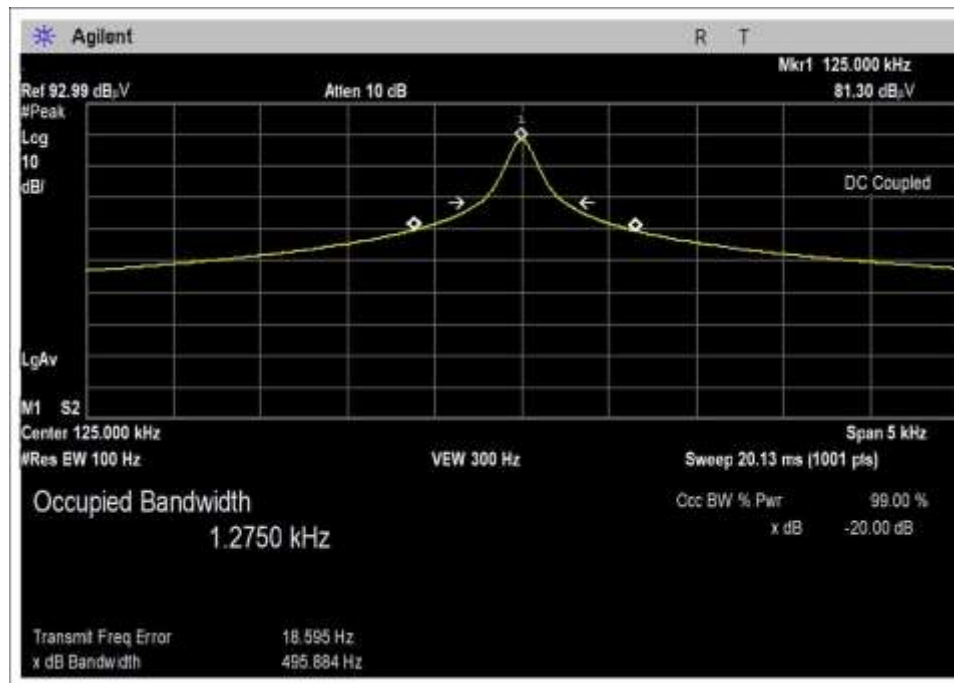

125kHz

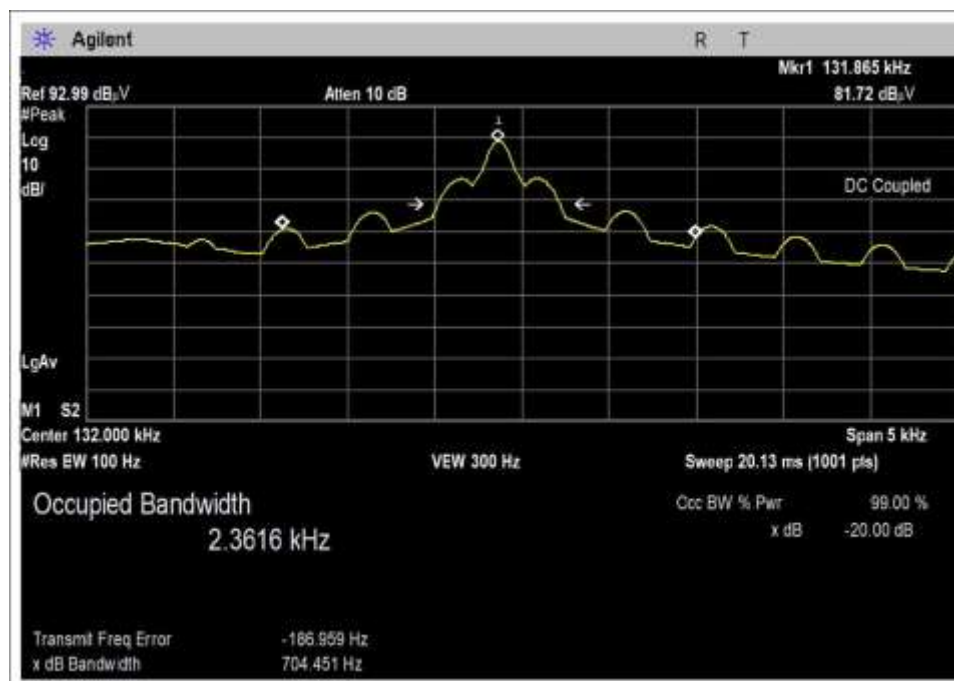

132kHz

Test Setup Photo(s)



Bandwidth Measurements

15.209 Field Strength of Fundamental

Test Data Summary - Voltage Variations

Frequency (MHz)	Modulation	V _{Minimum} (dBμV/m@300m)	V _{Nominal} (dBμV/m@300m)	V _{Maximum} (dBμV/m@300m)	Max Deviation from V _{Nominal} (dB)
125kHz	RFID	-17.3	-17.3	-17.3	0.0
132kHz	RFID	-17.5	-17.5	-17.5	0.0

Test performed using operational mode with the highest output power, representing worst-case.

Parameter Definitions:


Measurements performed at input voltage V_{Nominal} ± 15%.

Parameter	Value
V _{Nominal} :	120 VAC
V _{Minimum} :	102.00 VAC
V _{Maximum} :	138.00 VAC


Test Data Summary – Radiated Field Strength Measurement

Frequency	Modulation	Ant. Type	Measured (dBμV/m @ 300m)	Limit (dBμV/m @ 300m)	Results
125kHz	RFID	Loop	-17.3	≤25.2	Pass
132kHz	RFID	Loop	-17.5	≤25.2	Pass

Plot(s)

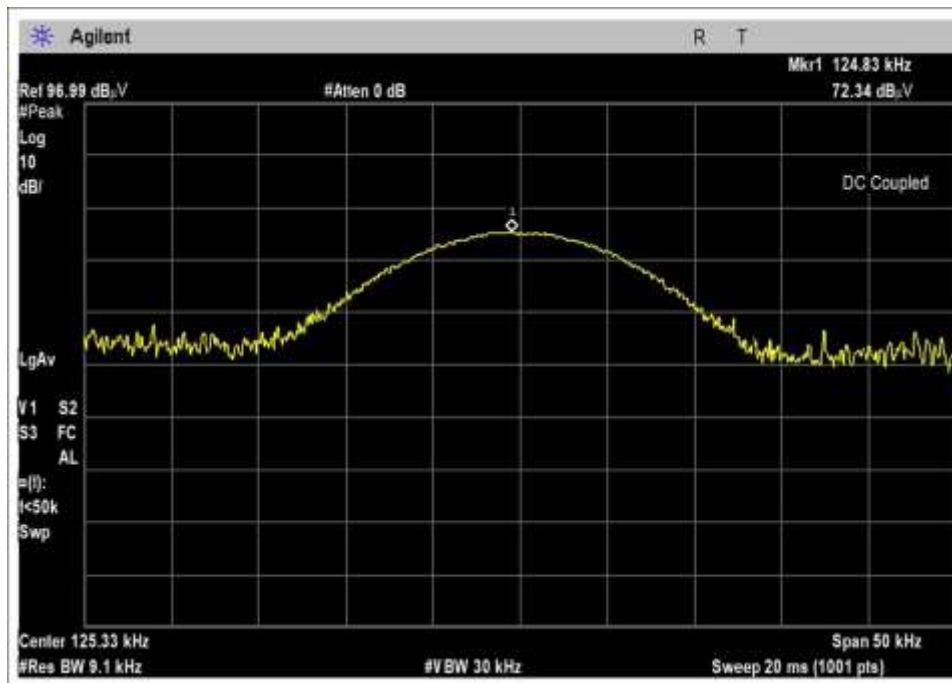

125kHz

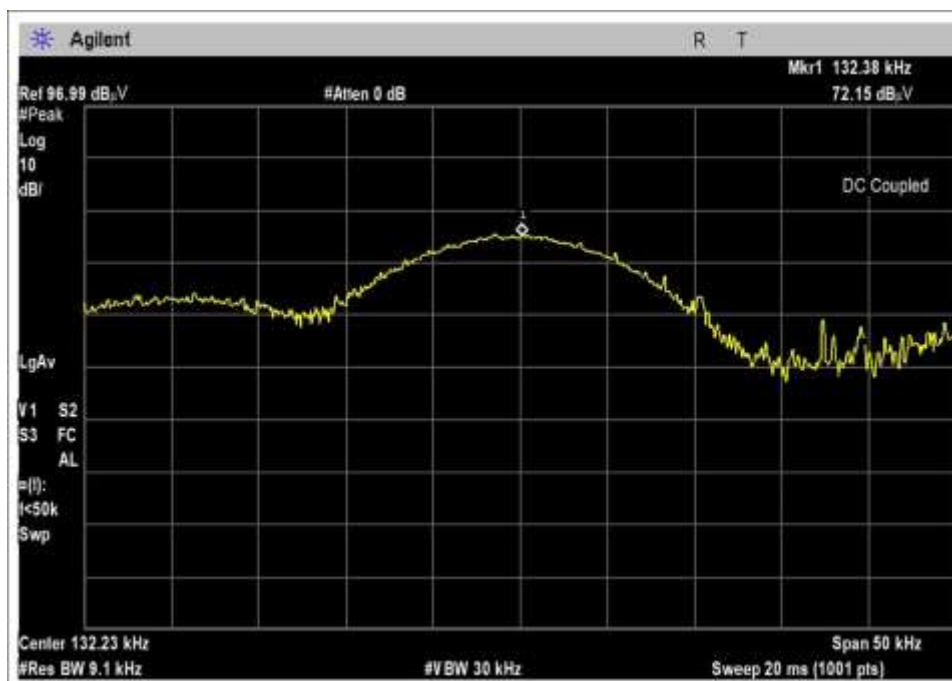

132kHz

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • (425) 402-1717
 Customer: **Nalloy, LLC**
 Specification: **15.209 Radiated Emissions**
 Work Order #: **106997** Date: 11/17/2022
 Test Type: **Radiated Scan** Time: 08:49:26
 Tested By: M. Harrison/M. Atkinson Sequence#: 36
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Test Environment Conditions:
 Temperature: 20°C
 Humidity: 34%
 Pressure: 102.9kPa


 Test Method: ANSI C63.10 (2013)

 Frequency Range: Fund

 Test Setup:
 EUT is setup in a combination of floor-standing and tabletop configuration. It is connected to a power supply, connected to remote laptop via USB to run the 125kHz and 132kHz badge reader. 3 x orthogonal antenna axes investigated, worst-case reported.

 Badge reader software is running a test to enable the 125kHz and 132kHz fundamental.

Nalloy, LLC WO#: 106997 Sequence#: 36 Date: 11/17/2022
15.209 Radiated Emissions Test Distance: 1 Meter Para

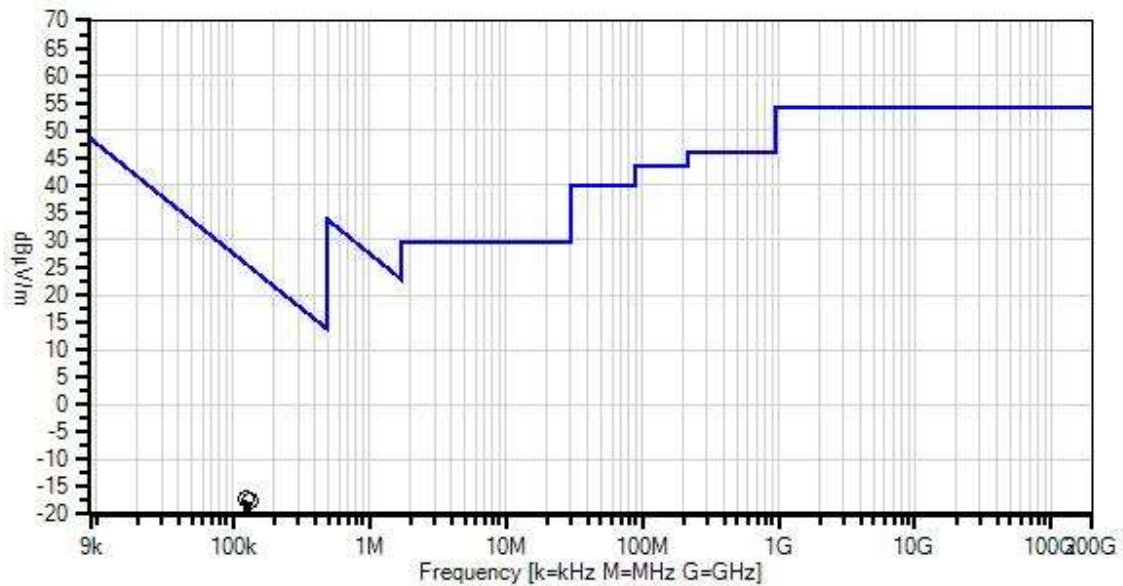

— Readings
* Average Readings
— 1 - 15.209 Radiated Emissions
○ Peak Readings
▼ Ambient
× QP Readings
Software Version: 5.03.20

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP06515	Cable	Heliac	5/23/2022	5/23/2024
T2	ANP06540	Cable	Heliac	1/17/2022	1/17/2024
	AN02872	Spectrum Analyzer	E4440A	11/29/2021	11/29/2023
T3	AN00052	Loop Antenna	6502	5/11/2022	5/11/2024


Measurement Data:

Reading listed by margin.

Test Distance: 1 Meter

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	132.380k	72.2	+0.0	+0.1	+9.3		-99.1	-17.5	25.2	-42.7	Para
2	124.830k	72.3	+0.0	+0.1	+9.4		-99.1	-17.3	25.7	-43.0	Para

Test Setup Photo(s)

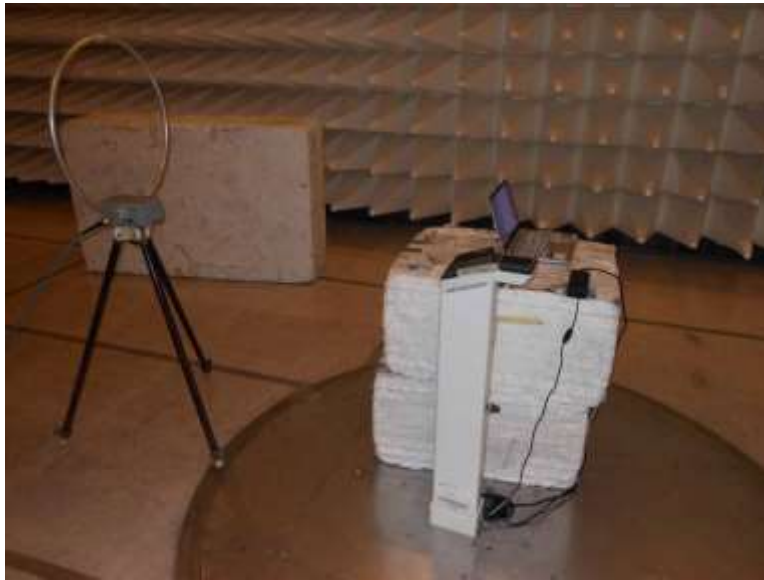

15.209 Radiated Emissions

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • (425) 402-1717
 Customer: **Nalloy, LLC**
 Specification: **15.209 Radiated Emissions**
 Work Order #: **106997** Date: 9/15/2022
 Test Type: **Radiated Scan** Time: 08:32:11
 Tested By: Matt Harrison Sequence#: 38
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Test Environment Conditions:

Temperature: 25°C

Humidity: 45%

Pressure: 101.4kPa

Test Method: ANSI C63.10 (2013)

Frequency Range: 9k-1000MHz

Highest Clock: 3.6GHz


Test Setup:

EUT is setup in a combination of floor-standing and tabletop configuration. It is connected to a power supply, and a remote laptop via USB to run the 125kHz and 132kHz badge reader. 3 x orthogonal antenna axes investigated below 30MHz, horizontal and vertical antenna polarities investigated above 30MHz; worst-case reported.

Badge reader software is running a test to enable the 125kHz and 132kHz fundamental.

Investigated with and without headphones, and the rest of the pedestal fully exercised as much as possible with the badge reader directly connected to support laptop.

Nalloy, LLC WO#: 106997 Sequence#: 38 Date: 9/15/2022
15.209 Radiated Emissions Test Distance: 3 Meters Para

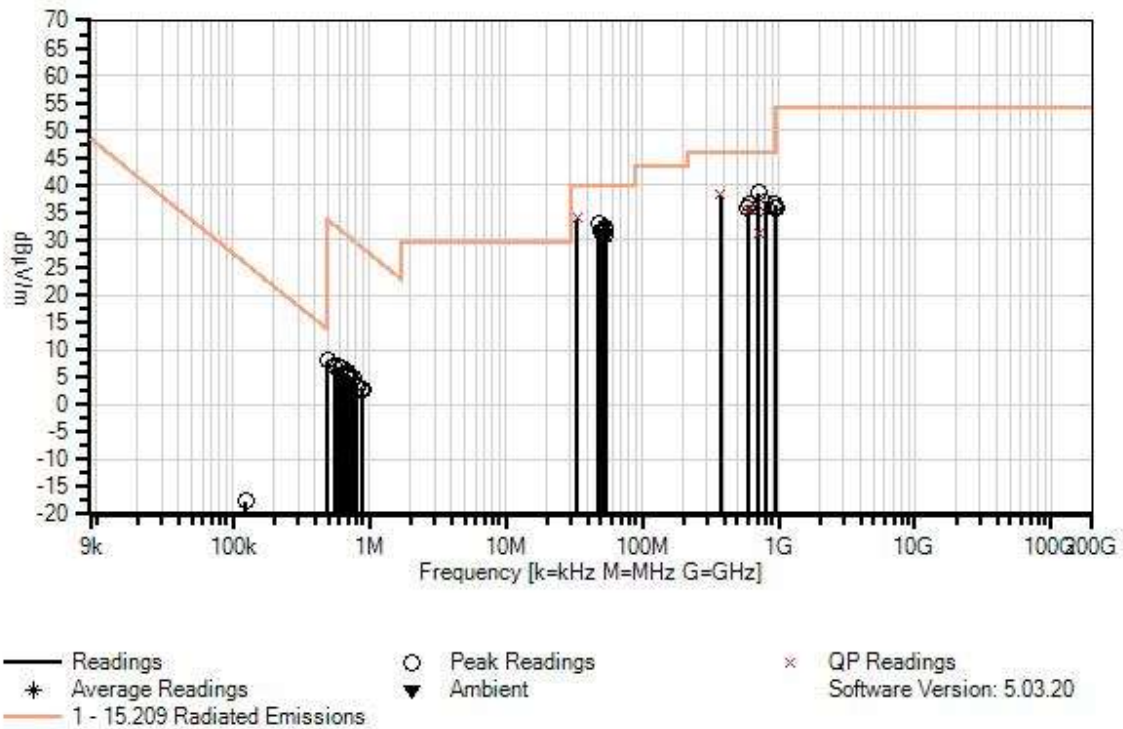

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP06540	Cable	Heliacx	1/17/2022	1/17/2024
	AN02872	Spectrum Analyzer	E4440A	11/29/2021	11/29/2023
T2	AN00052	Loop Antenna	6502	5/11/2022	5/11/2024
T3	ANP05305	Cable	ETSI-50T	9/15/2021	9/15/2023
T4	AN02307	Preamp	8447D	1/6/2022	1/6/2024
T5	AN03628	Biconilog Antenna	3142E	6/3/2021	6/3/2023
T6	ANP05360	Cable	RG214	2/4/2022	2/4/2024

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters


#	Freq MHz	Rdng dBμV	T1 T5 dB	T2 T6 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	33.395M QP	41.5	+0.1 +19.5	+0.0 +0.4	+0.3	-27.8	+0.0	34.0	40.0	-6.0	Vert
^	33.395M	45.1	+0.1 +19.5	+0.0 +0.4	+0.3	-27.8	+0.0	37.6	40.0	-2.4	Vert
3	47.968M	47.1	+0.1 +12.8	+0.0 +0.5	+0.3	-27.8	+0.0	33.0	40.0	-7.0	Vert
4	710.002M	34.4	+0.3 +28.4	+0.0 +2.1	+1.3	-27.9	+0.0	38.6	46.0	-7.4	Vert
5	53.558M	47.0	+0.1 +12.3	+0.0 +0.5	+0.3	-27.8	+0.0	32.4	40.0	-7.6	Vert
6	374.991M QP	41.4	+0.2 +21.7	+0.0 +1.3	+1.0	-27.4	+0.0	38.2	46.0	-7.8	Vert
^	374.991M	43.8	+0.2 +21.7	+0.0 +1.3	+1.0	-27.4	+0.0	40.6	46.0	-5.4	Vert
8	54.024M	46.5	+0.1 +12.3	+0.0 +0.5	+0.3	-27.8	+0.0	31.9	40.0	-8.1	Vert
9	50.431M	46.2	+0.1 +12.4	+0.0 +0.5	+0.3	-27.8	+0.0	31.7	40.0	-8.3	Vert
10	50.098M	46.1	+0.1 +12.4	+0.0 +0.5	+0.3	-27.8	+0.0	31.6	40.0	-8.4	Vert
11	50.896M	46.1	+0.1 +12.3	+0.0 +0.5	+0.3	-27.8	+0.0	31.5	40.0	-8.5	Vert
12	52.094M	45.8	+0.1 +12.3	+0.0 +0.5	+0.3	-27.8	+0.0	31.2	40.0	-8.8	Vert
13	803.695M	31.5	+0.3 +29.2	+0.0 +2.2	+1.4	-27.7	+0.0	36.9	46.0	-9.1	Vert
14	803.095M	31.5	+0.3 +29.2	+0.0 +2.2	+1.4	-27.7	+0.0	36.9	46.0	-9.1	Vert
15	796.248M	31.6	+0.3 +29.1	+0.0 +2.2	+1.4	-27.7	+0.0	36.9	46.0	-9.1	Vert
16	53.026M	45.3	+0.1 +12.3	+0.0 +0.5	+0.3	-27.8	+0.0	30.7	40.0	-9.3	Vert
17	950.976M	28.3	+0.3 +31.1	+0.0 +2.4	+1.5	-27.2	+0.0	36.4	46.0	-9.6	Horiz
18	608.981M	34.2	+0.3 +26.9	+0.0 +1.9	+1.2	-28.1	+0.0	36.4	46.0	-9.6	Horiz
19	952.416M	27.9	+0.3 +31.1	+0.0 +2.4	+1.5	-27.2	+0.0	36.0	46.0	-10.0	Horiz
20	596.969M	34.3	+0.3 +26.4	+0.0 +1.9	+1.2	-28.1	+0.0	36.0	46.0	-10.0	Horiz
21	710.963M	31.7	+0.3 +28.4	+0.0 +2.1	+1.3	-27.9	+0.0	35.9	46.0	-10.1	Horiz
22	711.323M	31.6	+0.3 +28.4	+0.0 +2.1	+1.3	-27.9	+0.0	35.8	46.0	-10.2	Horiz
23	938.954M	27.8	+0.3 +31.1	+0.0 +2.4	+1.5	-27.3	+0.0	35.8	46.0	-10.2	Horiz

24	602.995M QP	33.6	+0.3 +26.6	+0.0 +1.9	+1.2	-28.1	+0.0	35.5	46.0	-10.5	Horiz
^	602.995M	35.7	+0.3 +26.6	+0.0 +1.9	+1.2	-28.1	+0.0	37.6	46.0	-8.4	Horiz
26	711.782M QP	27.2	+0.3 +28.3	+0.0 +2.1	+1.3	-27.9	+0.0	31.3	46.0	-14.7	Vert
^	711.782M	36.2	+0.3 +28.3	+0.0 +2.1	+1.3	-27.9	+0.0	40.3	46.0	-5.7	Vert
28	630.861k	37.2	+0.1 +0.0	+9.4 +0.0	+0.0	+0.0	-40.0	6.7	31.6	-24.9	Para
29	775.119k	35.2	+0.1 +0.0	+9.6 +0.0	+0.0	+0.0	-40.0	4.9	29.8	-24.9	Para
30	689.401k	36.2	+0.1 +0.0	+9.5 +0.0	+0.0	+0.0	-40.0	5.8	30.8	-25.0	Para
31	597.410k	37.5	+0.1 +0.0	+9.4 +0.0	+0.0	+0.0	-40.0	7.0	32.1	-25.1	Para
32	704.036k	35.9	+0.1 +0.0	+9.5 +0.0	+0.0	+0.0	-40.0	5.5	30.6	-25.1	Para
33	714.489k	35.8	+0.1 +0.0	+9.5 +0.0	+0.0	+0.0	-40.0	5.4	30.5	-25.1	Para
34	559.777k	37.7	+0.1 +0.0	+9.4 +0.0	+0.0	+0.0	-40.0	7.2	32.6	-25.4	Para
35	494.965k	38.7	+0.1 +0.0	+9.3 +0.0	+0.0	+0.0	-40.0	8.1	33.7	-25.6	Para
36	798.117k	34.2	+0.1 +0.0	+9.6 +0.0	+0.0	+0.0	-40.0	3.9	29.5	-25.6	Para
37	745.850k	34.8	+0.1 +0.0	+9.5 +0.0	+0.0	+0.0	-40.0	4.4	30.1	-25.7	Para
38	693.582k	35.3	+0.1 +0.0	+9.5 +0.0	+0.0	+0.0	-40.0	4.9	30.8	-25.9	Para
39	791.845k	34.0	+0.1 +0.0	+9.6 +0.0	+0.0	+0.0	-40.0	3.7	29.6	-25.9	Para
40	873.382k	33.1	+0.1 +0.0	+9.6 +0.0	+0.0	+0.0	-40.0	2.8	28.7	-25.9	Para
41	890.108k	32.9	+0.1 +0.0	+9.6 +0.0	+0.0	+0.0	-40.0	2.6	28.6	-26.0	Para
42	808.571k	33.6	+0.1 +0.0	+9.6 +0.0	+0.0	+0.0	-40.0	3.3	29.4	-26.1	Para
43	124.997k	53.0	+0.1 +0.0	+9.3 +0.0	+0.0	+0.0	-80.0	-17.6	25.7	-43.3	Para

Test Setup Photo(s)



Below 1GHz; View 1

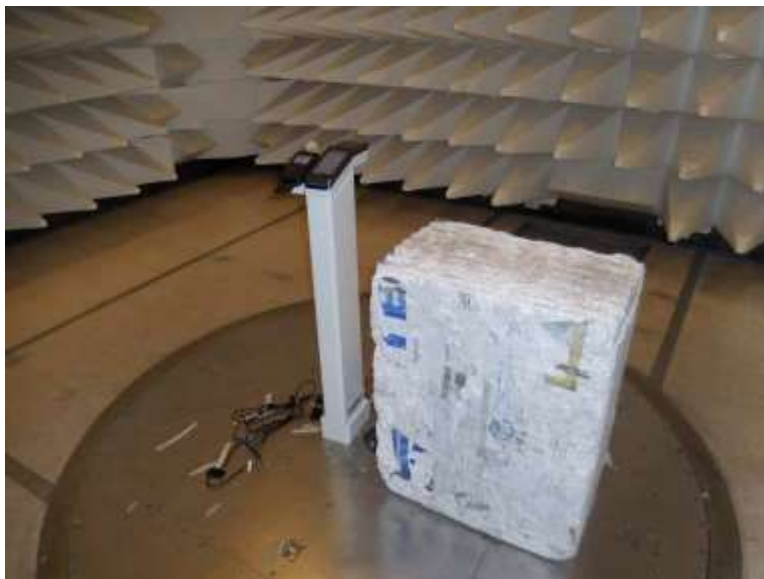

Below 1GHz; View 2

15.207 AC Conducted Emissions

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • (425) 402-1717
 Customer: **Nalloy, LLC**
 Specification: **15.207 AC Mains - Average**
 Work Order #: **106997** Date: 9/15/2022
 Test Type: **Conducted Emissions** Time: 09:07:26
 Tested By: Matt Harrison Sequence#: 39
 Software: EMITest 5.03.20 120V 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Test Environment Conditions:
 Temperature: 25°C
 Humidity: 45%
 Pressure: 101.4kPa

Test Method: ANSI C63.10 (2013)

Frequency Range: 150k-30MHz

Highest Clock: 3.6GHz

Test Setup:
 EUT is setup in a combination of floor-standing and tabletop configuration. It is connected to a power supply, headphones, and a remote laptop via Ethernet Cable.

Mode 1:
 Honecrisp:
 Fuji- CPU DDR MMC Stress
 Audio 1kHz Tone on Headphone at 100% Volume
 Display Max Brightness
 USB to Caramel 480Mbps

Opal: No Stressor

Caramel:
 Ethernet 100Mbps
 USB 2.0 x1 12Mbps to Wisepad
 USB B No Stressor to Baxter

Wisepad:
 Tap Mode at 13.56MHz
 USB 2.0 12Mbps

Baxter:

Ethernet 100Mbps

Prefect- Stressors on CPU DDR MMC

Relay continuously cycling

Tamper sensor enabled

Audio over speaker playing representative tone

Microphone on


USB on Baxter Mass Storage devices no cable

USB A to B from Baxter to Caramel No Stressor

Badge Reader:

On at 13.56MHz, 125kHz, and 132kHz.

Nalloy, LLC WO#: 106997 Sequence#: 39 Date: 9/15/2022
15.207 AC Mains - Average Test Lead: 120V 60Hz Line

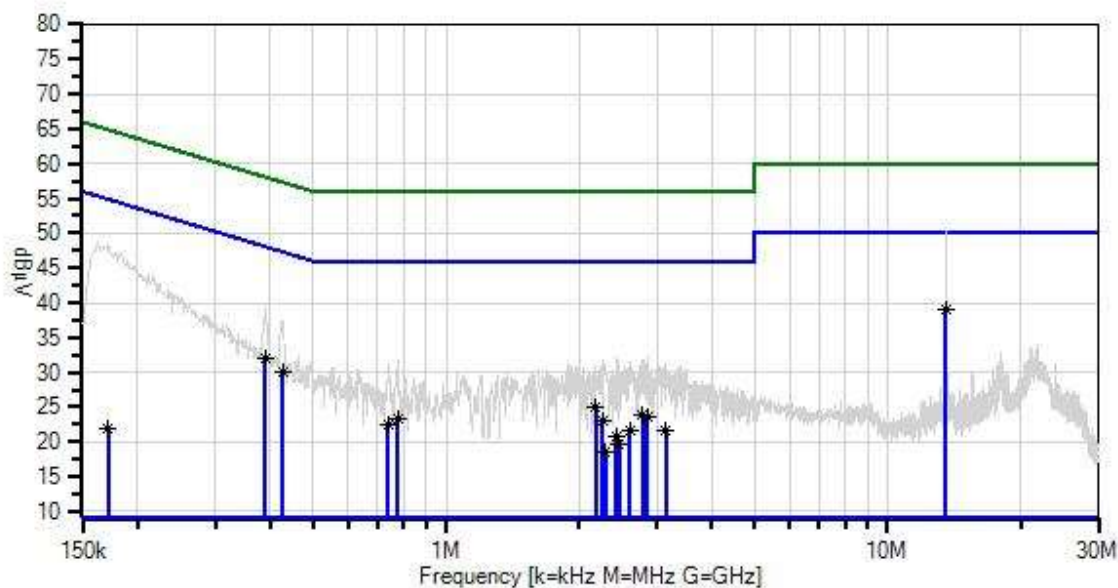

— Sweep Data
× QP Readings
Software Version: 5.03.20
— Readings
* Average Readings
— 1 - 15.207 AC Mains - Average
○ Peak Readings
▼ Ambient
— 2 - 15.207 AC Mains - Quasi-peak

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP06219	Attenuator	768-10	3/23/2022	3/23/2024
T2	ANP05305	Cable	ETSI-50T	9/15/2021	9/15/2023
T3	ANP06515	Cable	Heliac	5/23/2022	5/23/2024
T4	AN01311	50uH LISN-Line1 (L)	3816/2	2/23/2022	2/23/2024
	AN01311	50uH LISN-Line2 (N)	3816/2	2/23/2022	2/23/2024
	AN02872	Spectrum Analyzer	E4440A	11/29/2021	11/29/2023
T5	AN02611	High Pass Filter	HE9615-150K-50-720B	1/5/2022	1/5/2024

Measurement Data:

Reading listed by margin.

Test Lead: Line

#	Freq	Rdng	T1 T5	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dBμV	dB	dB	dB	dB	Table	dBμV	dBμV	dB	Ant
1	13.560M	29.5	+9.1	+0.2	+0.2	+0.1	+0.0	39.1	50.0	-10.9	Line
	Ave		+0.0								
^	13.560M	41.2	+9.1	+0.2	+0.2	+0.1	+0.0	50.8	50.0	+0.8	Line
			+0.0								
3	389.978k	22.7	+9.1	+0.0	+0.0	+0.1	+0.0	32.0	48.1	-16.1	Line
	Ave		+0.1								
^	389.977k	30.1	+9.1	+0.0	+0.0	+0.1	+0.0	39.4	48.1	-8.7	Line
			+0.1								
5	425.611k	20.8	+9.1	+0.0	+0.0	+0.1	+0.0	30.1	47.3	-17.2	Line
	Ave		+0.1								
^	425.611k	28.2	+9.1	+0.0	+0.0	+0.1	+0.0	37.5	47.3	-9.8	Line
			+0.1								
7	2.183M	15.4	+9.1	+0.1	+0.1	+0.1	+0.0	24.9	46.0	-21.1	Line
	Ave		+0.1								
^	2.183M	21.6	+9.1	+0.1	+0.1	+0.1	+0.0	31.1	46.0	-14.9	Line
			+0.1								
9	2.782M	14.4	+9.1	+0.1	+0.1	+0.1	+0.0	23.8	46.0	-22.2	Line
	Ave		+0.0								
^	2.782M	22.5	+9.1	+0.1	+0.1	+0.1	+0.0	31.9	46.0	-14.1	Line
			+0.0								
11	2.855M	14.2	+9.1	+0.1	+0.1	+0.1	+0.0	23.6	46.0	-22.4	Line
	Ave		+0.0								
^	2.855M	23.0	+9.1	+0.1	+0.1	+0.1	+0.0	32.4	46.0	-13.6	Line
			+0.0								
13	776.852k	13.9	+9.1	+0.0	+0.0	+0.1	+0.0	23.2	46.0	-22.8	Line
	Ave		+0.1								
^	776.851k	22.4	+9.1	+0.0	+0.0	+0.1	+0.0	31.7	46.0	-14.3	Line
			+0.1								
15	2.259M	13.5	+9.1	+0.1	+0.1	+0.1	+0.0	23.0	46.0	-23.0	Line
	Ave		+0.1								
^	2.259M	22.3	+9.1	+0.1	+0.1	+0.1	+0.0	31.8	46.0	-14.2	Line
			+0.1								
17	739.764k	13.3	+9.1	+0.0	+0.0	+0.1	+0.0	22.6	46.0	-23.4	Line
	Ave		+0.1								
^	739.764k	22.0	+9.1	+0.0	+0.0	+0.1	+0.0	31.3	46.0	-14.7	Line
			+0.1								
19	3.140M	12.3	+9.1	+0.1	+0.1	+0.1	+0.0	21.7	46.0	-24.3	Line
	Ave		+0.0								
^	3.140M	21.7	+9.1	+0.1	+0.1	+0.1	+0.0	31.1	46.0	-14.9	Line
			+0.0								
21	2.612M	12.2	+9.1	+0.1	+0.1	+0.1	+0.0	21.6	46.0	-24.4	Line
	Ave		+0.0								
^	2.612M	22.1	+9.1	+0.1	+0.1	+0.1	+0.0	31.5	46.0	-14.5	Line
			+0.0								

23	2.425M	11.3	+9.1	+0.1	+0.1	+0.1	+0.0	20.7	46.0	-25.3	Line
Ave			+0.0								
^	2.425M	22.7	+9.1	+0.1	+0.1	+0.1	+0.0	32.1	46.0	-13.9	Line
			+0.0								
25	2.459M	10.3	+9.1	+0.1	+0.1	+0.1	+0.0	19.7	46.0	-26.3	Line
Ave			+0.0								
^	2.459M	22.3	+9.1	+0.1	+0.1	+0.1	+0.0	31.7	46.0	-14.3	Line
			+0.0								
27	2.298M	9.1	+9.1	+0.1	+0.1	+0.1	+0.0	18.6	46.0	-27.4	Line
Ave			+0.1								
^	2.298M	21.9	+9.1	+0.1	+0.1	+0.1	+0.0	31.4	46.0	-14.6	Line
			+0.1								
29	171.816k	12.3	+9.1	+0.0	+0.0	+0.1	+0.0	21.8	54.9	-33.1	Line
Ave			+0.3								
^	171.816k	38.8	+9.1	+0.0	+0.0	+0.1	+0.0	48.3	54.9	-6.6	Line
			+0.3								



Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • (425) 402-1717
 Customer: **Nalloy, LLC**
 Specification: **15.207 AC Mains - Average**
 Work Order #: **106997** Date: 9/15/2022
 Test Type: **Conducted Emissions** Time: 09:25:08
 Tested By: Matt Harrison Sequence#: 40
 Software: EMITest 5.03.20 120V 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			


Test Conditions / Notes:

Test Environment Conditions: Temperature: 25°C Humidity: 45% Pressure: 101.4kPa Test Method: ANSI C63.10 (2013) Frequency Range: 150k-30MHz Highest Clock: 3.6GHz Test Setup: EUT is setup in a combination of floor-standing and tabletop configuration. It is connected to a power supply, headphones, and a remote laptop via Ethernet Cable. Mode 1: Honecrisp: Fuji- CPU DDR MMC Stress Audio 1kHz Tone on Headphone at 100% Volume Display Max Brightness USB to Caramel 480Mbps Opal: No Stressor Caramel: Ethernet 100Mbps USB 2.0 x1 12Mbps to Wisepad USB B No Stressor to Baxter Wisepad: Tap Mode at 13.56MHz USB 2.0 12Mbps Baxter: Ethernet 100Mbps Prefect- Stressors on CPU DDR MMC Relay continuously cycling
--

Tamper sensor enabled
Audio over speaker playing representative tone
Microphone on
USB on Baxter Mass Storage devices no cable
USB A to B from Baxter to Caramel No Stressor

Badge Reader:
On at 13.56MHz, 125kHz, and 132kHz.

Nalloy, LLC WO#: 106997 Sequence#: 40 Date: 9/15/2022
15.207 AC Mains - Average Test Lead: 120V 60Hz Neutral

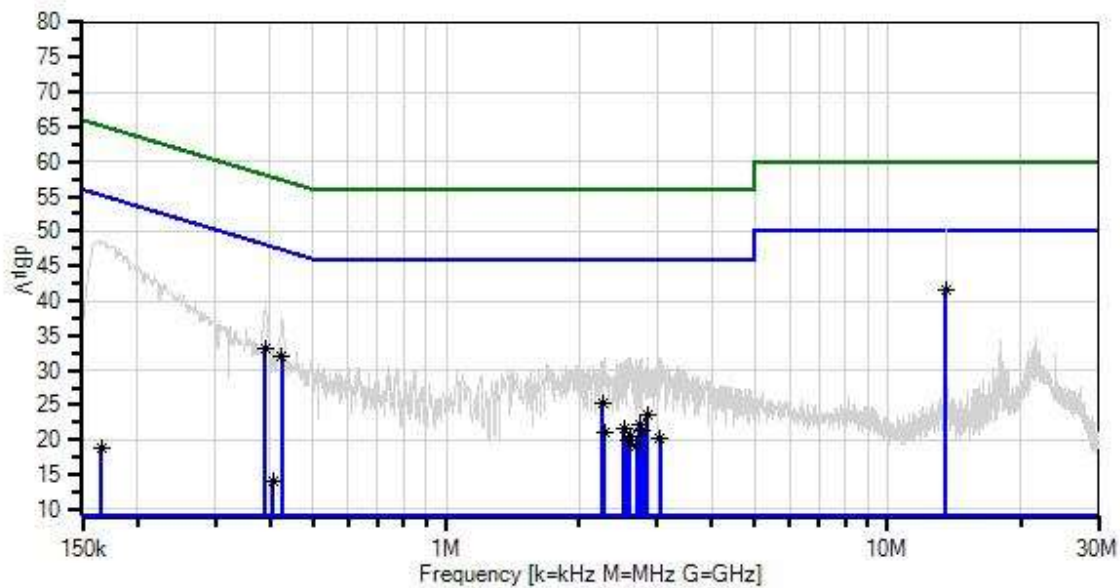

— Sweep Data
× QP Readings
Software Version: 5.03.20
— Readings
* Average Readings
— 1 - 15.207 AC Mains - Average
○ Peak Readings
▼ Ambient
— 2 - 15.207 AC Mains - Quasi-peak

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP06219	Attenuator	768-10	3/23/2022	3/23/2024
T2	ANP05305	Cable	ETSI-50T	9/15/2021	9/15/2023
T3	ANP06515	Cable	Heliac	5/23/2022	5/23/2024
T4	AN01311	50uH LISN-Line1 (L)	3816/2	2/23/2022	2/23/2024
	AN01311	50uH LISN-Line2 (N)	3816/2	2/23/2022	2/23/2024
	AN02872	Spectrum Analyzer	E4440A	11/29/2021	11/29/2023
T5	AN02611	High Pass Filter	HE9615-150K-50-720B	1/5/2022	1/5/2024

Measurement Data:

Reading listed by margin.

Test Lead: Neutral

#	Freq	Rdng	T1 T5	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dBμV	dB	dB	dB	dB	Table	dBμV	dBμV	dB	Ant
1	13.560M	32.0	+9.1	+0.2	+0.2	+0.0	+0.0	41.5	50.0	-8.5	Neutr
	Ave		+0.0								
^	13.560M	41.1	+9.1	+0.2	+0.2	+0.0	+0.0	50.6	50.0	+0.6	Neutr
			+0.0								
3	389.250k	23.7	+9.1	+0.0	+0.0	+0.1	+0.0	33.0	48.1	-15.1	Neutr
	Ave		+0.1								
^	389.249k	29.8	+9.1	+0.0	+0.0	+0.1	+0.0	39.1	48.1	-9.0	Neutr
			+0.1								
5	424.156k	22.7	+9.1	+0.0	+0.0	+0.1	+0.0	32.0	47.4	-15.4	Neutr
	Ave		+0.1								
^	424.155k	28.2	+9.1	+0.0	+0.0	+0.1	+0.0	37.5	47.4	-9.9	Neutr
			+0.1								
7	2.255M	15.9	+9.1	+0.1	+0.1	+0.1	+0.0	25.4	46.0	-20.6	Neutr
	Ave		+0.1								
^	2.255M	21.7	+9.1	+0.1	+0.1	+0.1	+0.0	31.2	46.0	-14.8	Neutr
			+0.1								
9	2.855M	14.1	+9.1	+0.1	+0.1	+0.1	+0.0	23.5	46.0	-22.5	Neutr
	Ave		+0.0								
^	2.855M	22.3	+9.1	+0.1	+0.1	+0.1	+0.0	31.7	46.0	-14.3	Neutr
			+0.0								
11	2.744M	12.8	+9.1	+0.1	+0.1	+0.1	+0.0	22.2	46.0	-23.8	Neutr
	Ave		+0.0								
^	2.744M	22.1	+9.1	+0.1	+0.1	+0.1	+0.0	31.5	46.0	-14.5	Neutr
			+0.0								
13	2.532M	12.3	+9.1	+0.1	+0.1	+0.1	+0.0	21.7	46.0	-24.3	Neutr
	Ave		+0.0								
^	2.532M	21.8	+9.1	+0.1	+0.1	+0.1	+0.0	31.2	46.0	-14.8	Neutr
			+0.0								
15	2.778M	12.0	+9.1	+0.1	+0.1	+0.1	+0.0	21.4	46.0	-24.6	Neutr
	Ave		+0.0								
^	2.778M	22.3	+9.1	+0.1	+0.1	+0.1	+0.0	31.7	46.0	-14.3	Neutr
			+0.0								
17	2.285M	11.5	+9.1	+0.1	+0.1	+0.1	+0.0	21.0	46.0	-25.0	Neutr
	Ave		+0.1								
^	2.285M	22.3	+9.1	+0.1	+0.1	+0.1	+0.0	31.8	46.0	-14.2	Neutr
			+0.1								
19	2.612M	11.2	+9.1	+0.1	+0.1	+0.1	+0.0	20.6	46.0	-25.4	Neutr
	Ave		+0.0								
^	2.612M	22.3	+9.1	+0.1	+0.1	+0.1	+0.0	31.7	46.0	-14.3	Neutr
			+0.0								
21	3.059M	10.9	+9.1	+0.1	+0.1	+0.1	+0.0	20.3	46.0	-25.7	Neutr
	Ave		+0.0								
^	3.059M	22.4	+9.1	+0.1	+0.1	+0.1	+0.0	31.8	46.0	-14.2	Neutr
			+0.0								

23	2.578M	10.5	+9.1	+0.1	+0.1	+0.1	+0.0	19.9	46.0	-26.1	Neutr
Ave			+0.0								
^	2.578M	22.3	+9.1	+0.1	+0.1	+0.1	+0.0	31.7	46.0	-14.3	Neutr
			+0.0								
25	2.706M	9.6	+9.1	+0.1	+0.1	+0.1	+0.0	19.0	46.0	-27.0	Neutr
Ave			+0.0								
^	2.706M	22.2	+9.1	+0.1	+0.1	+0.1	+0.0	31.6	46.0	-14.4	Neutr
			+0.0								
27	404.521k	4.7	+9.1	+0.0	+0.0	+0.1	+0.0	14.0	47.8	-33.8	Neutr
Ave			+0.1								
^	404.521k	23.7	+9.1	+0.0	+0.0	+0.1	+0.0	33.0	47.8	-14.8	Neutr
			+0.1								
29	165.270k	9.3	+9.1	+0.0	+0.0	+0.1	+0.0	18.9	55.2	-36.3	Neutr
Ave			+0.4								
^	165.270k	39.0	+9.1	+0.0	+0.0	+0.1	+0.0	48.6	55.2	-6.6	Neutr
			+0.4								

Test Setup Photo(s)



SUPPLEMENTAL INFORMATION

Measurement Uncertainty

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

Uncertainties reported are worst case for all CKC Laboratories' sites and represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Compliance is deemed to occur provided measurements are below the specified limits.

Emissions Test Details

TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in $\text{dB}\mu\text{V}/\text{m}$, the spectrum analyzer reading in $\text{dB}\mu\text{V}$ was corrected by using the following formula. This reading was then compared to the applicable specification limit. Individual measurements were compared with the displayed limit value in the margin column. The margin was calculated based on subtracting the limit value from the corrected measurement value; a positive margin represents a measurement exceeding the limit, while a negative margin represents a measurement less than the limit.

SAMPLE CALCULATIONS		
	Meter reading	($\text{dB}\mu\text{V}$)
+	Antenna Factor	(dB/m)
+	Cable Loss	(dB)
-	Distance Correction	(dB)
-	Preamplifier Gain	(dB)
=	Corrected Reading	($\text{dB}\mu\text{V}/\text{m}$)

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or caret ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point, the measuring device is set into the linear mode and the scan time is reduced.