

TEST REPORT

Application No.: SZCR2512005578AT
Applicant: Nacon (HK) Limited
Address of Applicant: 17/F., 148 Electric Road North Point, Hong Kong
Manufacturer: NACON
Address of Manufacturer: 396-466 Rue de la Voyette, CRT2 59273, Fretin, France
Equipment Under Test (EUT):
EUT Name: Gaming Headset
Model No.: R8 PRO
Trade Mark: 
FCC ID: 2AVPR-R8
Standard(s) : 47 CFR Part 15, Subpart C 15.249
Date of Receipt: 2025-12-17
Date of Test: 2025-12-19 to 2025-12-28
Date of Issue: 2026-02-02

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

Kenx. Xu

Kenx Xu
EMC Laboratory Manager



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (EMC Laboratory)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200557804

Page: 2 of 47

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2026-02-02		Original

Authorized for issue by:				
				
		Bill Chen/Project Engineer		
				
		Eric Fu/Reviewer		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Inspection Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.249	N/A	47 CFR Part 15, Subpart C 15.203	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2020) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Field Strength of the Fundamental Signal (15.249(a))		ANSI C63.10 (2020) Section 6.5&6.6	47 CFR Part 15, Subpart C 15.249(a)	Pass
Restricted Band Around Fundamental Frequency		ANSI C63.10 (2020) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.249(d) & 15.209	Pass
Radiated Emissions Below 1GHz		ANSI C63.10 (2020) Section 6.4&6.5	47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)	Pass
Radiated Emissions Above 1GHz		ANSI C63.10 (2020) Section 6.6	47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)	Pass
20dB Bandwidth		ANSI C63.10 (2020) Section 6.9	47 CFR Part 15, Subpart C 15.215	Pass



3 Contents

	Page
1 Cover Page	1
2 Test Summary.....	3
3 Contents	4
4 General Information.....	6
4.1 Details of E.U.T.....	6
4.2 Description of Support Units.....	6
4.3 Measurement Uncertainty	6
4.4 Test Location	8
4.5 Test Facility.....	8
4.6 Deviation from Standards.....	8
4.7 Abnormalities from Standard Conditions.....	8
5 Equipment List	9
6 Radio Spectrum Technical Requirement.....	12
6.1 Antenna Requirement	12
6.1.1 Test Requirement:	12
6.1.2 Conclusion	12
7 Radio Spectrum Matter Test Results.....	13
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	13
7.1.1 E.U.T. Operation	13
7.1.2 Test Mode Description	13
7.1.3 Test Setup Diagram	14
7.1.4 Measurement Procedure and Data.....	14
7.2 Field Strength of the Fundamental Signal (15.249(a))	17
7.2.1 E.U.T. Operation	17
7.2.2 Test Mode Description	17
7.2.3 Test Setup Diagram	18
7.2.4 Measurement Procedure and Data.....	18
7.3 Restricted Band Around Fundamental Frequency.....	23
7.3.1 E.U.T. Operation	23
7.3.2 Test Mode Description	23
7.3.3 Test Setup Diagram	24
7.3.4 Measurement Procedure and Data.....	24
7.4 Radiated Emissions Below 1GHz	28
7.4.1 E.U.T. Operation	28
7.4.2 Test Mode Description	28
7.4.3 Test Setup Diagram	28
7.4.4 Measurement Procedure and Data.....	29
7.5 Radiated Emissions Above 1GHz.....	36
7.5.1 E.U.T. Operation	36



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200557804

Page: 5 of 47

7.5.2	Test Mode Description	36
7.5.3	Test Setup Diagram	36
7.5.4	Measurement Procedure and Data	37
7.6	20dB Bandwidth	43
7.6.1	E.U.T. Operation	43
7.6.2	Test Mode Description	43
7.6.3	Test Setup Diagram	43
7.6.4	Measurement Procedure and Data	43
8	Test Setup Photo	47
9	EUT Constructional Details (EUT Photos)	47



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4 General Information

4.1 Details of E.U.T.

Power Supply:	Charging base: Model: DSR8 Input: DC 5V 500mA Output: DC 5V 500mA Rechargeable battery DC 3.7V 1100mAh (Charging by Type C port) Dongle: DC Input 5V
Cable(s):	Type C cable:120cm shielded
RF cable(Provided by the customer):	0.5dB
Operation Frequency:	2406MHz to 2480MHz
Modulation Type:	GFSK
Number of Channels:	75
Channel Spacing:	1MHz
Antenna Type:	Antenna 1:Chip Antenna Antenna 2: PCB Antenna
Antenna Gain:	Antenna 1: 3.49dBi Antenna 2: 2.64dBi

Remark:The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

Remark: Two Antenna can not transmit at the simultaneously.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Adapter	Apple	A1443	REF. No.SEA05D11D

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	± 3.2dB
Field Strength of the Fundamental Signal (15.249(a))	± 6.0dB (Below 1GHz);± 4.6dB (Above 1GHz)
Restricted Band Around Fundamental Frequency	± 6.0dB (Below 1GHz);± 4.6dB (Above 1GHz)
Radiated Emissions Below 1GHz	± 6.0dB for 3m; ± 5.0dB for 10m
Radiated Emissions Above 1GHz	± 4.6dB (1GHz-18GHz);± 4.8dB (18MHz-40GHz)
20dB Bandwidth	± 0.3%



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200557804

Page: 7 of 47

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{CISPR/ETSI}$ (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200557804

Page: 8 of 47

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

• Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2025-05-07	2028-05-06
EMI Test Receiver	Rohde&Schwarz	ESR	SZ-WRG-M-047	2025-12-15	2026-12-14
Measurement Software	AUDIX	e3 V8.2014-6-27a	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2025-07-05	2026-07-04
LISN	Rohde&Schwarz	ENV216	SEM007-01	2025-07-25	2026-07-24
LISN	ETS-LINDGREN	3816/2	SEM007-02	2025-03-03	2026-03-02

Field Strength of the Fundamental Signal (15.249(a))					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
3m Fully-Anechoic Chamber	AUDIX	N/A	SEM001-02	2025-05-07	2028-05-06
Signal Analyzer	Rohde & Schwarz	FSV40	SEM008-04	2025-03-04	2026-03-03
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2025-07-22	2026-07-21
Microwave system amplifier	Agilent	83017A	SEM005-25	2025-09-10	2026-09-09
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2025-07-05	2026-07-04

Restricted Band Around Fundamental Frequency					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
3m Fully-Anechoic Chamber	AUDIX	N/A	SEM001-02	2025-05-07	2028-05-06
Signal Analyzer	Rohde & Schwarz	FSV40	SEM008-04	2025-03-04	2026-03-03
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2025-07-22	2026-07-21
Microwave system amplifier	Agilent	83017A	SEM005-25	2025-09-10	2026-09-09
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2025-07-05	2026-07-04
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2025-07-22	2027-07-21
Pre-Amplifier	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2025-03-21	2026-03-20



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing and Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200557804

Page: 10 of 47

Radiated Emissions (9kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2025-03-21	2026-03-20
MXE EMI receiver	KEYSIGHT	N9038A	SEM004-16	2025-07-25	2026-07-24
Trilog-Broadband Antenna	Schwarzbeck	VULB9168	SEM003-18	2025-08-29	2027-08-28
Pre-amplifier	Sonoma Instrument Co	310N	SEM005-04	2025-03-04	2026-03-03
Loop Antenna	ETS-Lindgren	6502	SEM003-08	2025-11-17	2027-11-16
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM029-01	2025-07-05	2026-07-04

Radiated Emissions Below 1GHz					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Loop Antenna	ETS-Lindgren	6502	SEM003-08	2025-11-17	2027-11-16
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2023-06-19	2026-06-18
MXE EMI Receiver	Agilent Technologies	N9038A	SEM004-15	2025-07-25	2026-07-24
BiConiLog Antenna	ETS-LINDGREN	3142C	SEM003-01	2025-08-29	2027-08-28
Pre-Amplifier	Agilent Technologies	8447D	SEM005-01	2025-03-04	2026-03-03
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2025-07-05	2026-07-04

Radiated Emissions Above 1GHz					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
3m Fully-Anechoic Chamber	AUDIX	N/A	SEM001-02	2025-05-07	2028-05-06
Signal Analyzer	Rohde & Schwarz	FSV40	SEM008-04	2025-03-04	2026-03-03
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2025-07-22	2026-07-21
Microwave system amplifier	Agilent	83017A	SEM005-25	2025-09-10	2026-09-09
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2025-07-05	2026-07-04

RF Conducted Test					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2025-07-24	2026-07-23



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200557804

Page: 11 of 47

MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2025-03-04	2026-03-03
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2025-07-05	2026-07-04
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2025-03-03	2026-03-02
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2025-02-26	2026-02-25

General used equipment

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	deli	8838	SEM002-32	2025-07-23	2026-07-22
Humidity/ Temperature Indicator	deli	8838	SEM002-33	2025-07-23	2026-07-22
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2025-03-03	2026-03-02



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is Antenna 1: 3.49dBi Antenna 2: 2.64dBi.

Antenna location: Refer to Internal photos



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207
 Test Method: ANSI C63.10 (2020) Section 6.2
 Test Engineer: Mason Wu

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 E.U.T. Operation

Operating Environment:


Temperature: 23.4 °C Humidity: 42.5 % RH Atmospheric Pressure: 1020 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	Charge + TX mode(2.4G Wireless)_Keep the EUT in charging and transmitting with modulation mode.



7.1.3 Test Setup Diagram

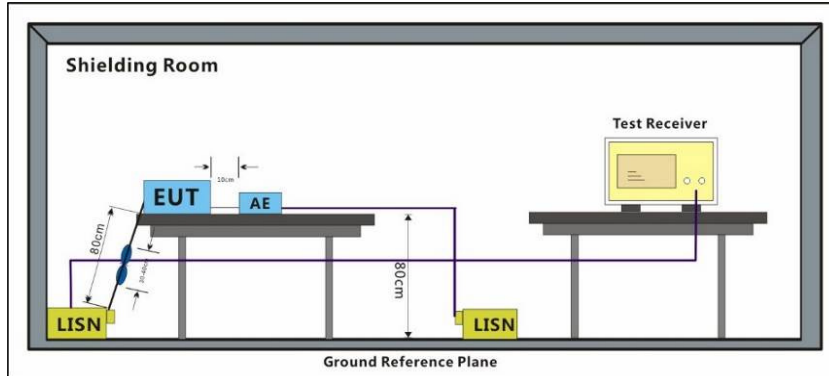

7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark : Level=Read Level+ Cable Loss+ LISN Factor




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200557804

Page: 15 of 47

Test Mode: 06; Line: Live line

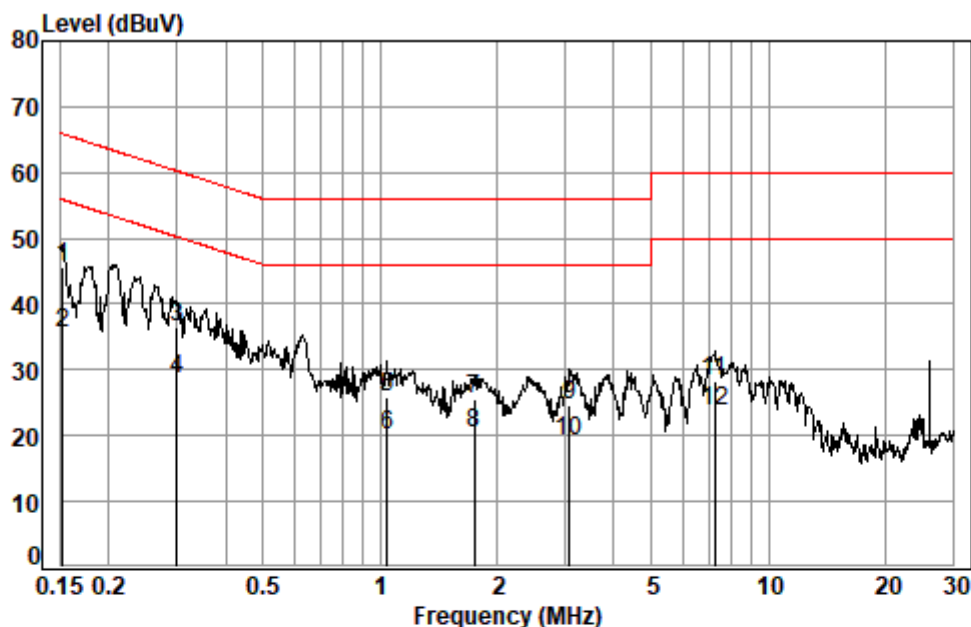

Site : Shielding Room
Condition: Line
Job No. : 05578AT/05580AT
Test mode: 06

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1 *	0.1524	0.06	10.19	35.41	45.66	65.87	-20.21	QP
2 *	0.1524	0.06	10.19	25.48	35.73	55.87	-20.14	Average
3	0.3003	0.08	9.85	26.46	36.39	60.24	-23.85	QP
4	0.3003	0.08	9.85	18.77	28.70	50.24	-21.54	Average
5	1.0430	0.11	9.58	16.13	25.82	56.00	-30.18	QP
6	1.0430	0.11	9.58	10.33	20.02	46.00	-25.98	Average
7	1.7529	0.12	9.58	15.83	25.53	56.00	-30.47	QP
8	1.7529	0.12	9.58	10.55	20.25	46.00	-25.75	Average
9	3.0738	0.13	9.65	14.81	24.59	56.00	-31.41	QP
10	3.0738	0.13	9.65	9.51	19.29	46.00	-26.71	Average
11	7.2903	0.15	9.68	18.55	28.38	60.00	-31.62	QP
12	7.2903	0.15	9.68	13.97	23.80	50.00	-26.20	Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200557804

Page: 16 of 47

Test Mode: 06; Line: Neutral Line

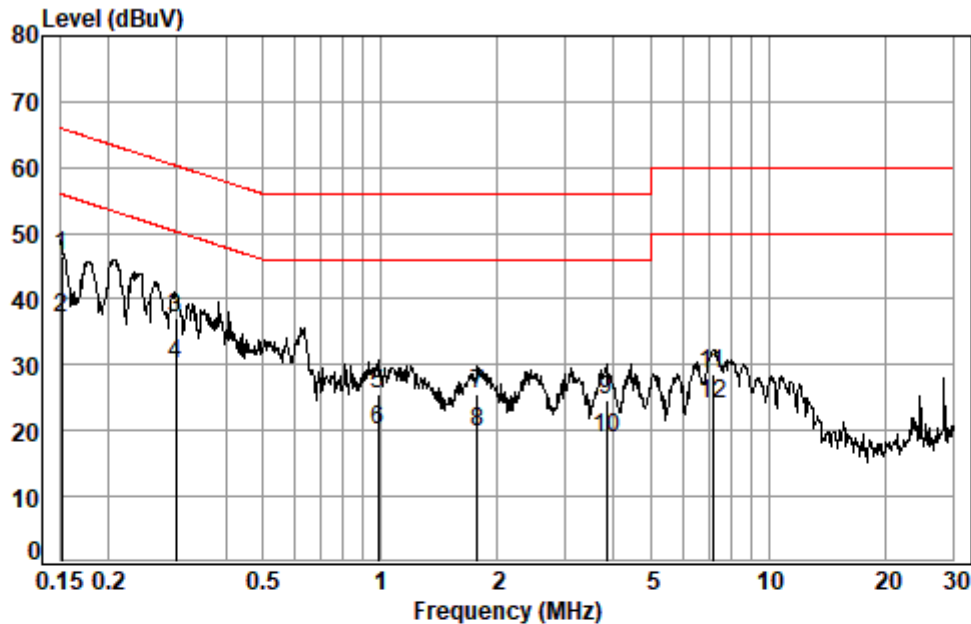

Site : Shielding Room
Condition: Neutral
Job No. : 05578AT/05580AT
Test mode: 06

		Cable	LISN	Read	Limit	Over	
	Freq	Loss	Factor	Level	Level	Line	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB
1 *	0.1516	0.06	10.15	36.48	46.69	65.91	-19.22 QP
2 *	0.1516	0.06	10.15	27.04	37.25	55.91	-18.66 Average
3	0.2987	0.08	9.77	27.28	37.13	60.28	-23.15 QP
4	0.2987	0.08	9.77	20.28	30.13	50.28	-20.15 Average
5	0.9891	0.11	9.54	15.84	25.49	56.00	-30.51 QP
6	0.9891	0.11	9.54	10.41	20.06	46.00	-25.94 Average
7	1.7810	0.12	9.55	15.75	25.42	56.00	-30.58 QP
8	1.7810	0.12	9.55	10.24	19.91	46.00	-26.09 Average
9	3.8196	0.13	9.55	14.94	24.62	56.00	-31.38 QP
10	3.8196	0.13	9.55	9.12	18.80	46.00	-27.20 Average
11	7.1754	0.15	9.65	18.94	28.74	60.00	-31.26 QP
12	7.1754	0.15	9.65	14.19	23.99	50.00	-26.01 Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200557804

Page: 17 of 47

7.2 Field Strength of the Fundamental Signal (15.249(a))

Test Requirement 47 CFR Part 15, Subpart C 15.249(a)
 Test Method: ANSI C63.10 (2020) Section 6.5&6.6
 Measurement Distance: 3m
 Test Engineer: Logic Wang

Limit:

Fundamental frequency(MHz)	Field strength of fundamental(millivolts/meter)	Field strength of harmonics(microvolts/meter)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500
24000-24250	250	2500

Remark: The frequencies above 1000MHz are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

For fundamental frequency in "902-928MHz", the field strength of fundamental is based on Quasi-Peak.

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C Humidity: 56.3 % RH Atmospheric Pressure: 1020 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode(2.4G Wireless)_Keep the EUT in transmitting with modulation mode.
Pre-scan	06	Charge + TX mode(2.4G Wireless)_Keep the EUT in charging and transmitting with modulation mode.




SGS-CSTC Standards Technical Services Co., Ltd.
 Shenzhen Branch Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.2.3 Test Setup Diagram

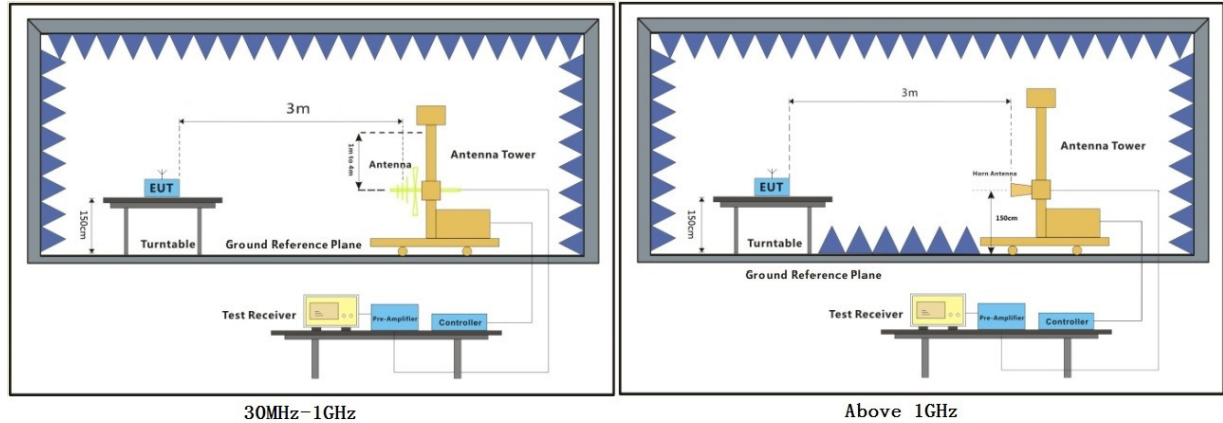

7.2.4 Measurement Procedure and Data


- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
 - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 - If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
 - Test the EUT in the lowest channel, the middle channel, the Highest channel.
 - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
 - Repeat above procedures until all frequencies measured was complete.
- Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Average value:

Calculate Formula:	Average value=Peak value + PDCF
	PDCF=20 log(Duty cycle)
	Duty cycle= T on time / T period
Test data:	Ton time =0.1957ms
	T period =2.5435ms
	PDCF value= -22.28dB

Spectrum

Ref Level -10.00 dBm RBW 1 MHz
Att 10 dB SWT 15 ms VBW 3 MHz
SGL

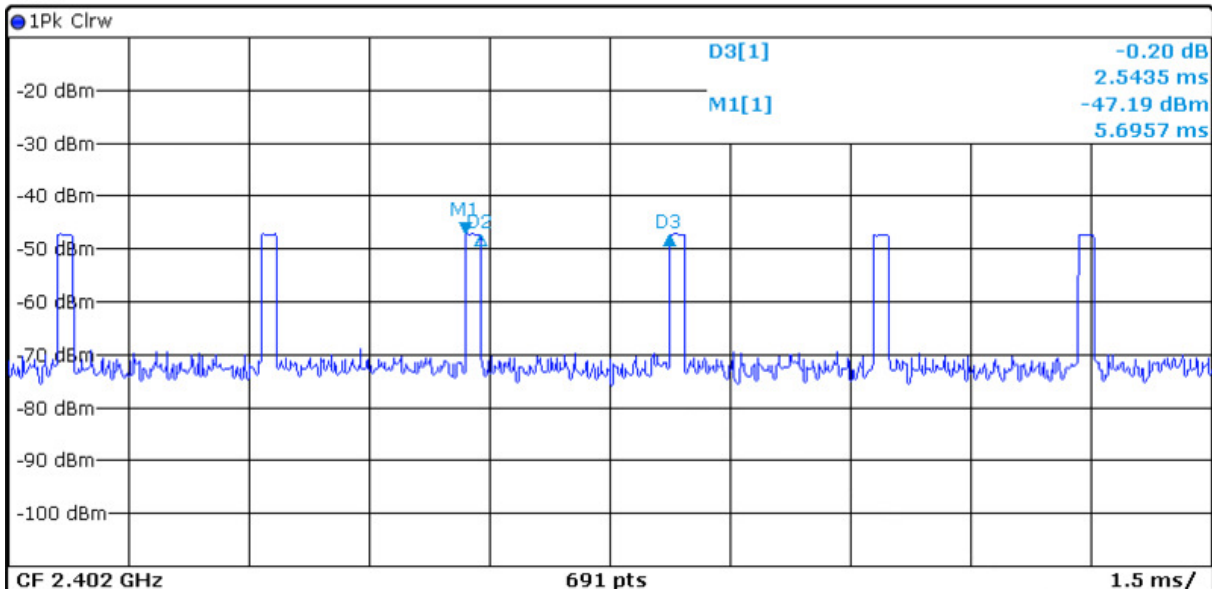

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	5.6957 ms	-47.19 dBm		
D2	M1	1	195.7 μs	-0.04 dB		
D3	M1	1	2.5435 ms	-0.20 dB		

Antenna 1:




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


Headset 2.4G SRD_TX_CH_L_Horizontal

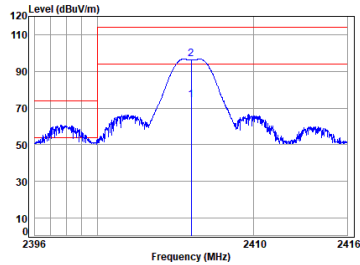

Site : chamber
Condition: 3m HORIZONTAL
Job No : 05578AT\05580AT
Mode : 2406 Field strength

Field strength	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
Freq	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q	2406.000	16.16	29.08	32.77	61.77	74.24	94.00	-19.76	Average
2 p	2406.000	16.16	29.08	32.77	84.05	96.52	114.00	-17.48	Peak


Headset 2.4G SRD_TX_CH_L_Vertical

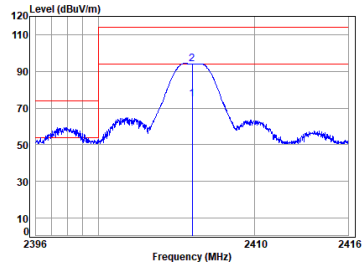

Site : chamber
Condition: 3m VERTICAL
Job No : 05578AT\05580AT
Mode : 2406 Field strength

Field strength	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
Freq	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q	2406.000	16.16	29.08	32.77	62.21	74.68	94.00	-19.32	Average
2 p	2406.000	16.16	29.08	32.77	81.49	93.96	114.00	-20.04	Peak


Headset 2.4G SRD_TX_CH_M_Horizontal

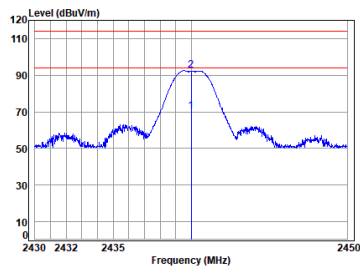

Site : chamber
Condition: 3m HORIZONTAL
Job No : 05578AT\05580AT
Mode : 2440 Field strength

Field strength	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
Freq	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q	2440.000	16.21	28.94	32.75	57.80	70.20	94.00	-23.80	Average
2 p	2440.000	16.21	28.94	32.75	80.08	92.48	114.00	-21.52	Peak

Headset 2.4G SRD_TX_CH_M_Vertical

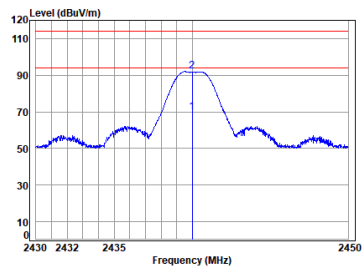


Site : chamber
Condition: 3m VERTICAL
Job No : 05578AT\05580AT
Mode : 2440 Field strength

Field strength	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
Freq	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q	2440.000	16.21	28.94	32.75	57.30	69.70	94.00	-24.30	Average
2 p	2440.000	16.21	28.94	32.75	79.58	91.98	114.00	-22.02	Peak




Headset 2.4G SRD_TX_CH_H_Horizontal

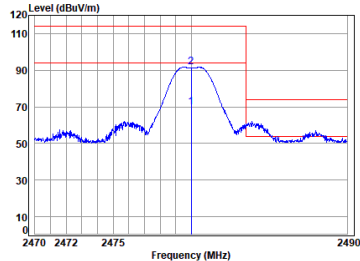

Site : chamber
Condition: 3m HORIZONTAL
Job No : 05578AT\05580AT
Mode : 2480 Field strength

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 2480.000	16.27	28.90	32.73	57.15	69.59	94.00	-24.41	Average
2 p 2480.000	16.27	28.90	32.73	79.43	91.87	114.00	-22.13	Peak

Headset 2.4G SRD_TX_CH_H_Vertical

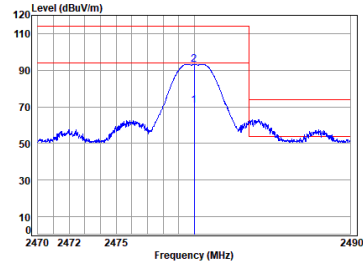


Site : chamber
Condition: 3m VERTICAL
Job No : 05578AT\05580AT
Mode : 2480 Field strength

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 2480.000	16.27	28.90	32.73	58.50	70.94	94.00	-23.06	Average
2 p 2480.000	16.27	28.90	32.73	80.78	93.22	114.00	-20.78	Peak

Antenna 2:


Headset 2.4G SRD_TX_CH_L_Horizontal

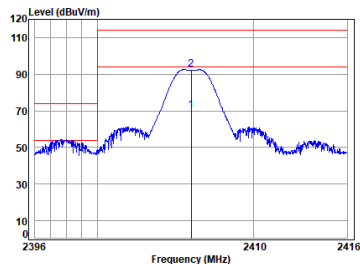

Site : chamber
Condition: 3m HORIZONTAL
Job No : 05578AT\05580AT
Mode : 2480 Field strength

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q 2480.000	16.16	29.08	32.77	57.81	70.28	94.00	-23.72	Average	0.00
2 p 2480.000	16.16	29.08	32.77	80.09	92.56	114.00	-21.44	Peak	0.00

Headset 2.4G SRD_TX_CH_L_Vertical

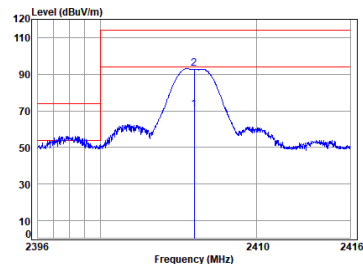


Site : chamber
Condition: 3m VERTICAL
Job No : 05578AT\05580AT
Mode : 2480 Field strength

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q 2480.000	16.16	29.08	32.77	58.30	70.77	94.00	-23.23	Average	0.00
2 p 2480.000	16.16	29.08	32.77	80.58	93.05	114.00	-20.95	Peak	0.00




Headset 2.4G SRD_TX_CH_M_Horizontal

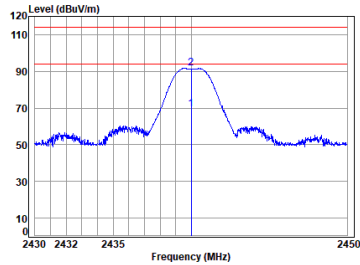

Site : chamber
Condition: 3m HORIZONTAL
Job No : 05578AT\05580AT
Mode : 2440 Field strength

Freq	Loss	Factor	Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q 2440.000	16.21	28.94	32.75	57.00	69.40	94.00	-24.60	Average	0.00
2 p 2440.000	16.21	28.94	32.75	79.28	91.68	114.00	-22.32	Peak	0.00


Headset 2.4G SRD_TX_CH_M_Vertical

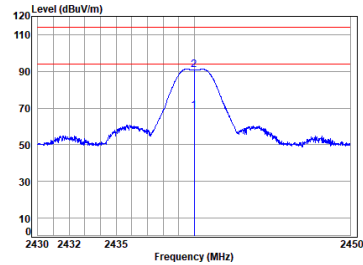

Site : chamber
Condition: 3m VERTICAL
Job No : 05578AT\05580AT
Mode : 2440 Field strength

Freq	Loss	Factor	Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q 2440.000	16.21	28.94	32.75	56.25	68.65	94.00	-25.35	Average	0.00
2 p 2440.000	16.21	28.94	32.75	78.53	90.93	114.00	-23.07	Peak	0.00


Headset 2.4G SRD_TX_CH_H_Horizontal

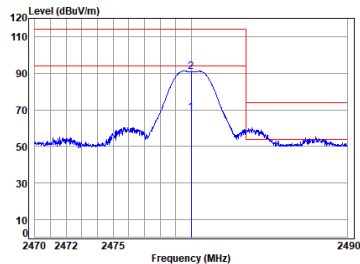

Site : chamber
Condition: 3m HORIZONTAL
Job No : 05578AT\05580AT
Mode : 2480 Field strength

Freq	Loss	Factor	Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q 2480.000	16.27	28.90	32.73	56.17	68.61	94.00	-25.39	Average	0.00
2 p 2480.000	16.27	28.90	32.73	78.45	90.89	114.00	-23.11	Peak	0.00

Headset 2.4G SRD_TX_CH_H_Vertical

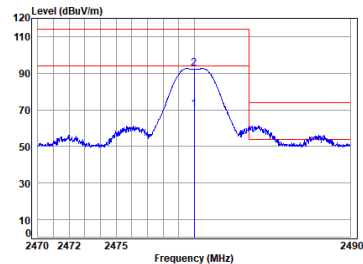

Site : chamber
Condition: 3m VERTICAL
Job No : 05578AT\05580AT
Mode : 2480 Field strength

Freq	Loss	Factor	Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q 2480.000	16.27	28.90	32.73	57.88	70.32	94.00	-23.68	Average	0.00
2 p 2480.000	16.27	28.90	32.73	80.16	92.60	114.00	-21.40	Peak	0.00



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200557804

Page: 23 of 47

7.3 Restricted Band Around Fundamental Frequency

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.249(d) & 15.209
 Test Method: ANSI C63.10 (2020) Section 6.10.5
 Measurement Distance: 3m
 Test Engineer: Logic Wang

Limit:

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.0	Quasi-peak Value
88MHz-216MHz	43.5	Quasi-peak Value
216MHz-960MHz	46.0	Quasi-peak Value
960MHz-1GHz	54.0	Quasi-peak Value
Above 1GHz	54.0	Average Value
Above 1GHz	74.0	Peak Value

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

7.3.1 E.U.T. Operation

Operating Environment:
 Temperature: 23.5 °C Humidity: 56.3 % RH Atmospheric Pressure: 1020 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode(2.4G Wireless)_Keep the EUT in transmitting with modulation mode.
Pre-scan	06	Charge + TX mode(2.4G Wireless)_Keep the EUT in charging and transmitting with modulation mode.




SGS-CSTC Standards Technical Services Co., Ltd.
 Shenzhen Branch Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
 Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.3.3 Test Setup Diagram

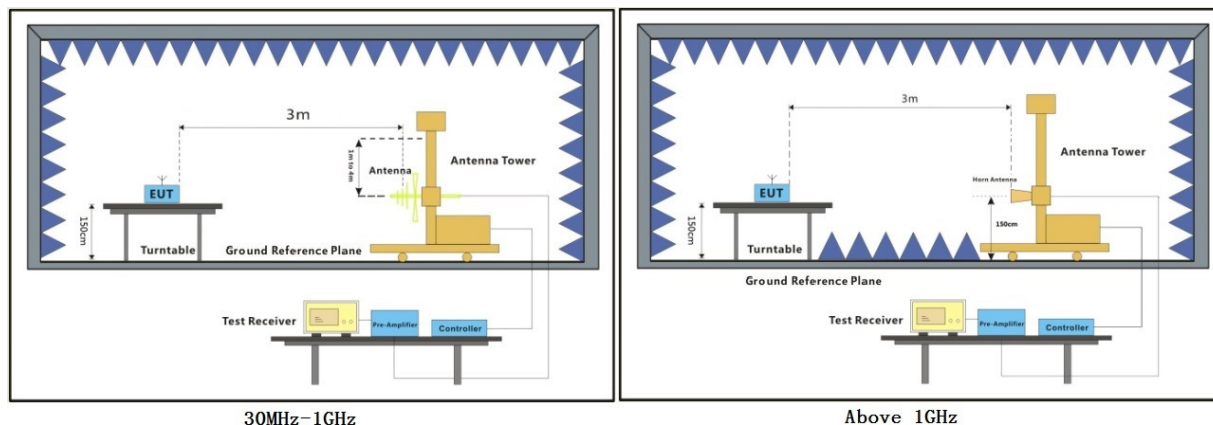

7.3.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200557804


Page: 25 of 47

Average value:

Calculate Formula:	Average value=Peak value + PDCF
	PDCF=20 log(Duty cycle)
	Duty cycle= T on time / T period
Test data:	Ton time =0.1957ms
	T period =2.5435ms
	PDCF value= -22.28dB

Spectrum

Ref Level -10.00 dBm RBW 1 MHz
Att 10 dB SWT 15 ms VBW 3 MHz
SGL

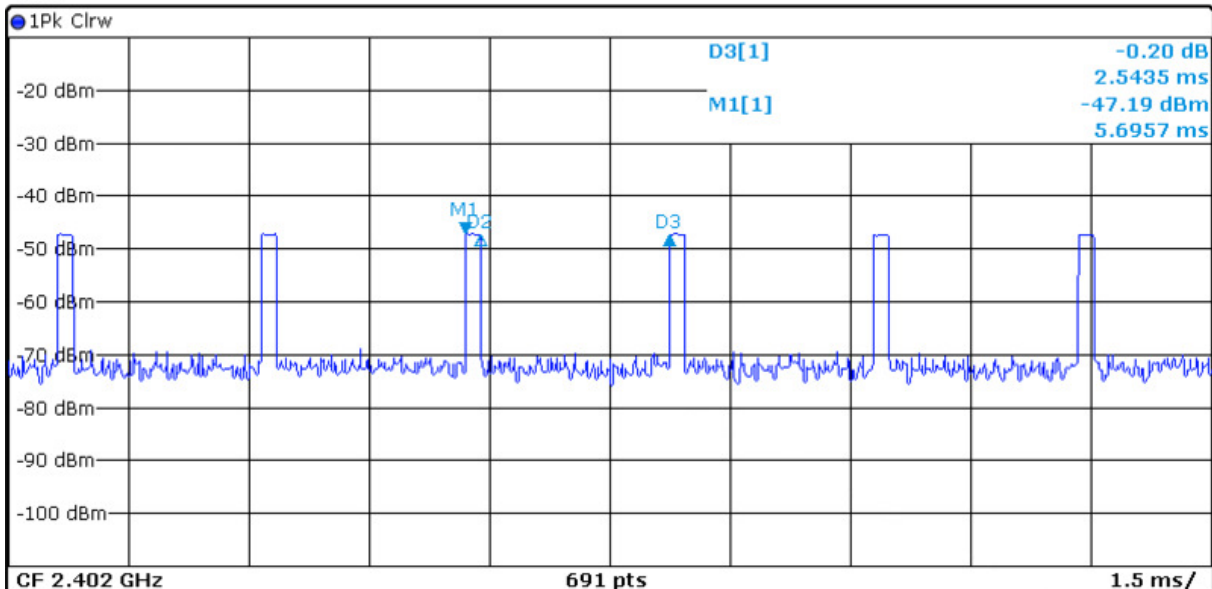

Marker


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	5.6957 ms	-47.19 dBm		
D2	M1	1	195.7 μs	-0.04 dB		
D3	M1	1	2.5435 ms	-0.20 dB		

Antenna 1:



Antenna 2:


Headset 2.4G SRD_TX_CH_L_Horizontal

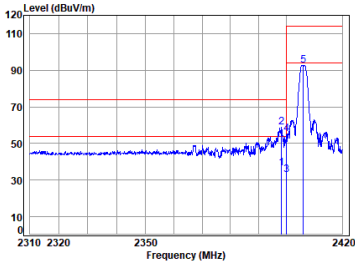

Site : chamber
Condition: 3m HORIZONTAL
Job No : 05578AT05580AT
Mode : 2406 Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q	2398.258	16.15	29.10	32.78	24.11	36.58	54.00	-17.42	Average	0.00
2 p	2398.258	16.15	29.10	32.78	46.39	58.86	74.00	-15.14	Peak	0.00
3	2400.000	16.15	29.10	32.78	20.42	32.89	54.00	-21.11	Average	0.00
4	2400.000	16.15	29.10	32.78	42.70	55.17	74.00	-18.83	Peak	0.00
5	2406.000	16.16	29.08	32.77	80.09	92.56	114.00	-21.44	Peak	0.00


Headset 2.4G SRD_TX_CH_L_Vertical

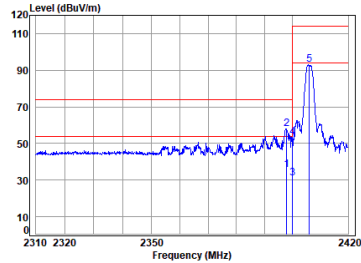

Site : chamber
Condition: 3m VERTICAL
Job No : 05578AT05580AT
Mode : 2406 Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q	2397.923	16.15	29.10	32.78	23.22	35.69	54.00	-18.31	Average	0.00
2 p	2397.923	16.15	29.10	32.78	45.50	57.97	74.00	-16.03	Peak	0.00
3	2400.000	16.15	29.10	32.78	18.45	30.92	54.00	-23.08	Average	0.00
4	2400.000	16.15	29.10	32.78	40.73	53.20	74.00	-20.80	Peak	0.00
5	2406.000	16.16	29.08	32.77	80.58	93.05	114.00	-20.95	Peak	0.00


Headset 2.4G SRD_TX_CH_H_Horizontal

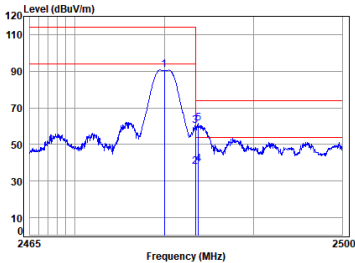

Site : chamber
Condition: 3m HORIZONTAL
Job No : 05578AT05580AT
Mode : 2480 Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2480.000	16.27	28.90	32.73	78.45	90.89	114.00	-23.11	Peak	0.00
2	2483.500	16.28	28.90	32.73	25.28	37.73	54.00	-16.27	Average	0.00
3	2483.500	16.28	28.90	32.73	47.56	60.01	74.00	-13.99	Peak	0.00
4 q	2483.804	16.28	28.90	32.73	26.69	39.14	54.00	-14.86	Average	0.00
5 p	2483.804	16.28	28.90	32.73	48.97	61.42	74.00	-12.58	Peak	0.00

Headset 2.4G SRD_TX_CH_H_Vertical

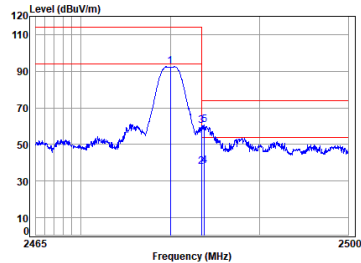

Site : chamber
Condition: 3m VERTICAL
Job No : 05578AT05580AT
Mode : 2480 Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2480.000	16.27	28.90	32.73	80.16	92.60	114.00	-21.40	Peak	0.00
2	2483.500	16.28	28.90	32.73	25.58	38.03	54.00	-15.97	Average	0.00
3	2483.500	16.28	28.90	32.73	47.86	60.31	74.00	-13.69	Peak	0.00
4 q	2483.804	16.28	28.90	32.73	25.75	38.20	54.00	-15.80	Average	0.00
5 p	2483.804	16.28	28.90	32.73	48.03	60.48	74.00	-13.52	Peak	0.00



7.4 Radiated Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)
 Test Method: ANSI C63.10 (2020) Section 6.4&6.5
 Measurement Distance: 3m
 Test Engineer: Mason Wu

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 23.3 °C


Humidity: 45.6 % RH

Atmospheric Pressure: 1020 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	05	TX mode(2.4G Wireless)_Keep the EUT in transmitting with modulation mode.
Final test	06	Charge + TX mode(2.4G Wireless)_Keep the EUT in charging and transmitting with modulation mode.

7.4.3 Test Setup Diagram

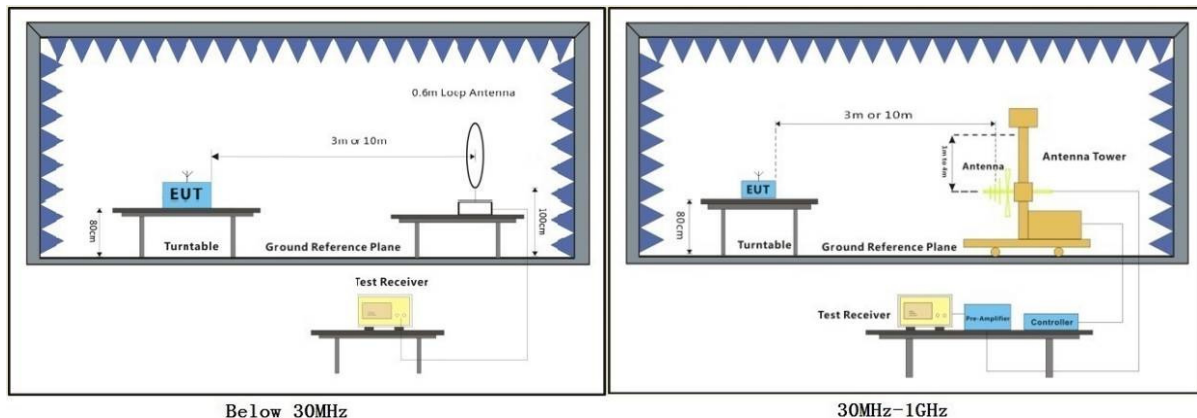

7.4.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200557804

Page: 30 of 47

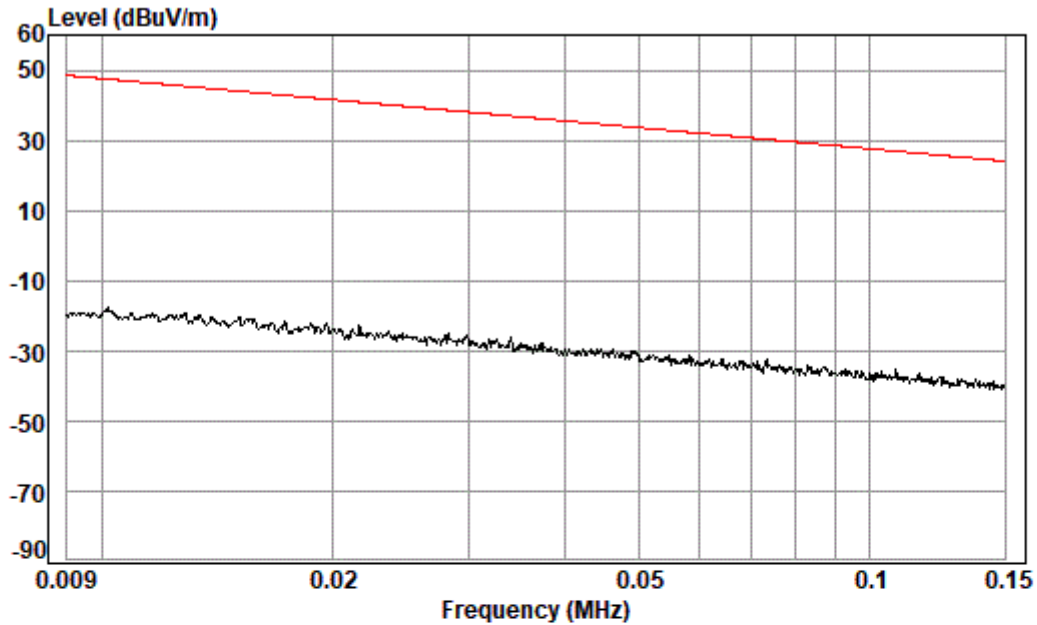

Condition: 3m
Job No. : 05578AT
Test Mode: 06
: coaxial




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

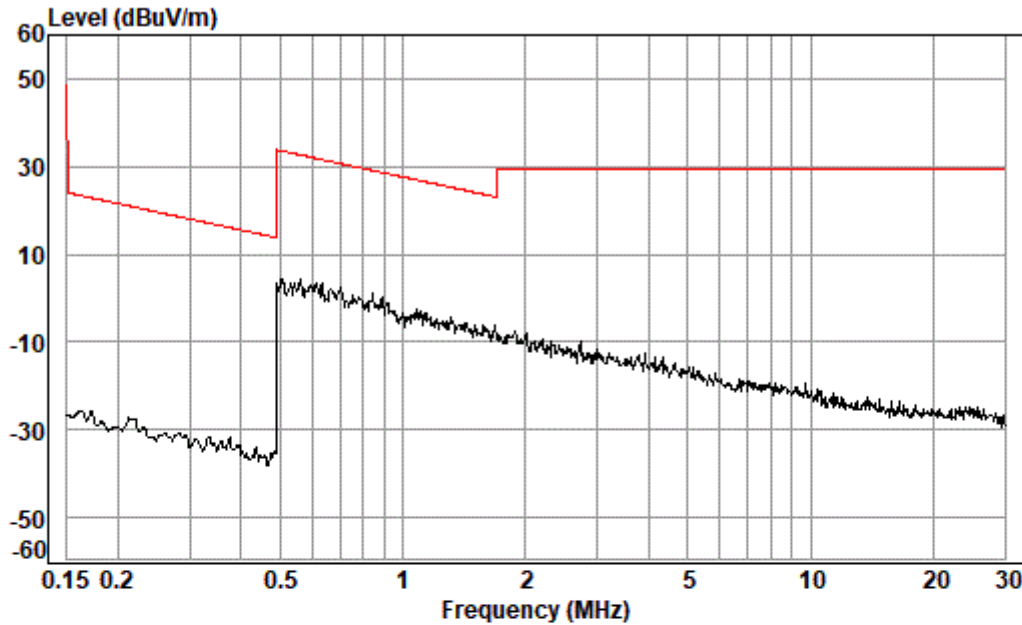


Condition: 3m
Job No. : 05578AT
Test Mode: 06
: coaxial



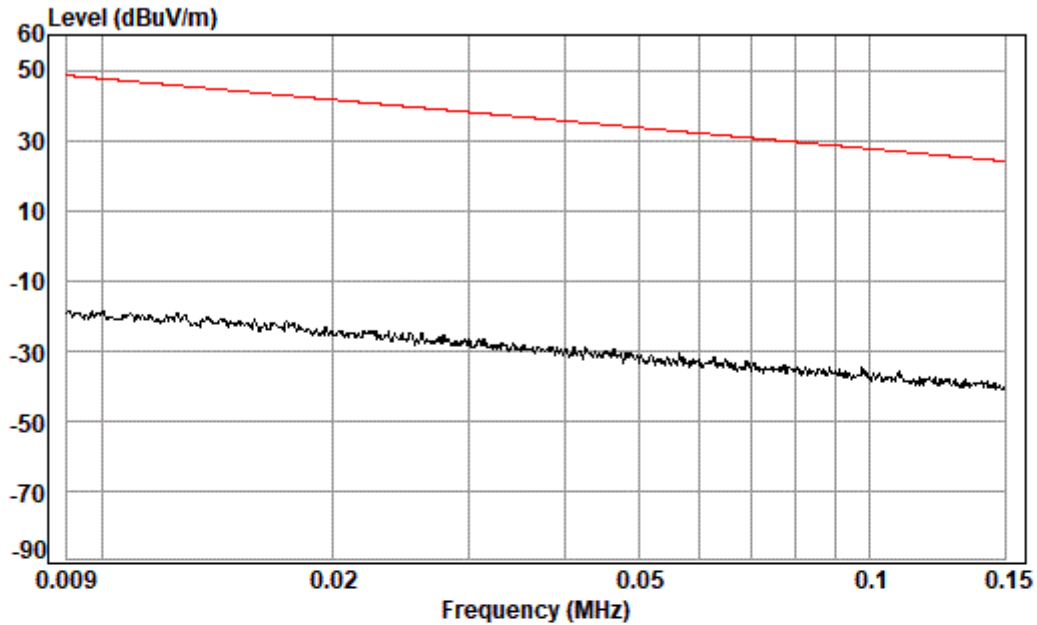

Condition: 3m
 Job No. : 05578AT
 Test Mode: 06
 : coplanar



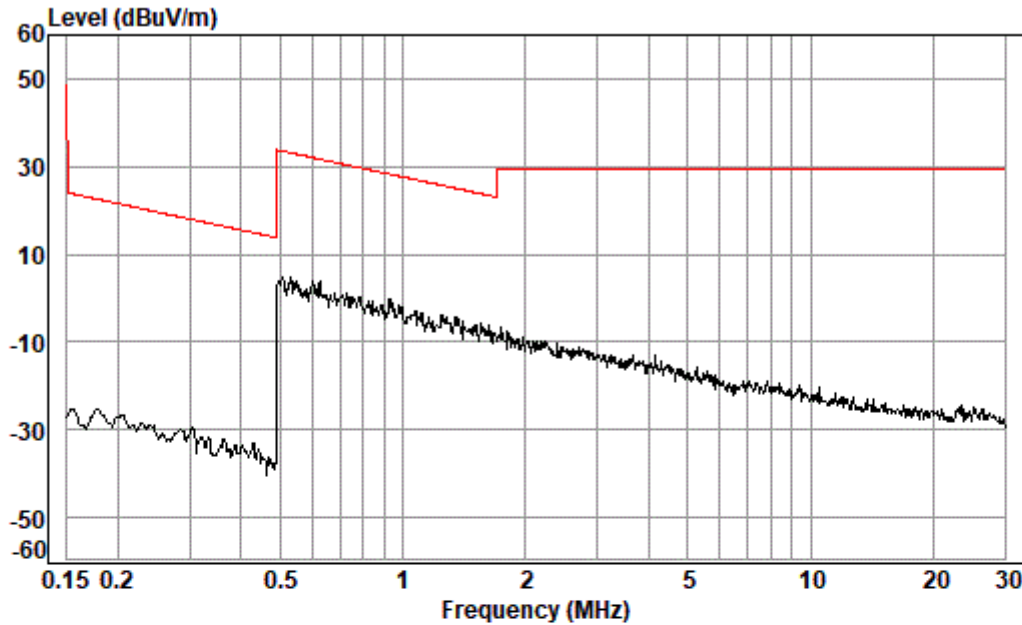

Condition: 3m
Job No. : 05578AT
Test Mode: 06
: coplanar



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200557804

Page: 34 of 47

Test Mode: 06; Polarity: Horizontal

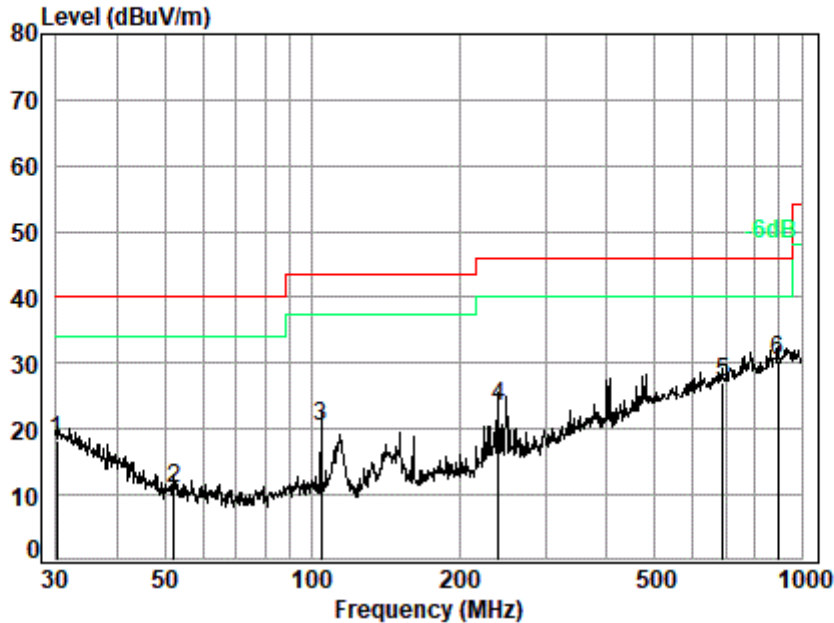

Site : chamber
Condition: 3m HORIZONTAL
Job No. : 05578AT/05580AT
Test Mode: 06

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Over Line	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.105	21.15	0.74	27.65	24.01	18.25	40.00 -21.75 QP
2	52.208	12.42	0.90	27.63	25.26	10.95	40.00 -29.05 QP
3	104.170	12.22	1.25	27.61	34.56	20.42	43.50 -23.08 QP
4	239.987	17.07	1.88	27.67	32.21	23.49	46.00 -22.51 QP
5	689.565	25.69	3.38	27.86	25.90	27.11	46.00 -18.89 QP
6 q	893.857	28.02	3.96	27.00	25.50	30.48	46.00 -15.52 QP



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200557804

Page: 35 of 47

Test Mode: 06; Polarity: Vertical

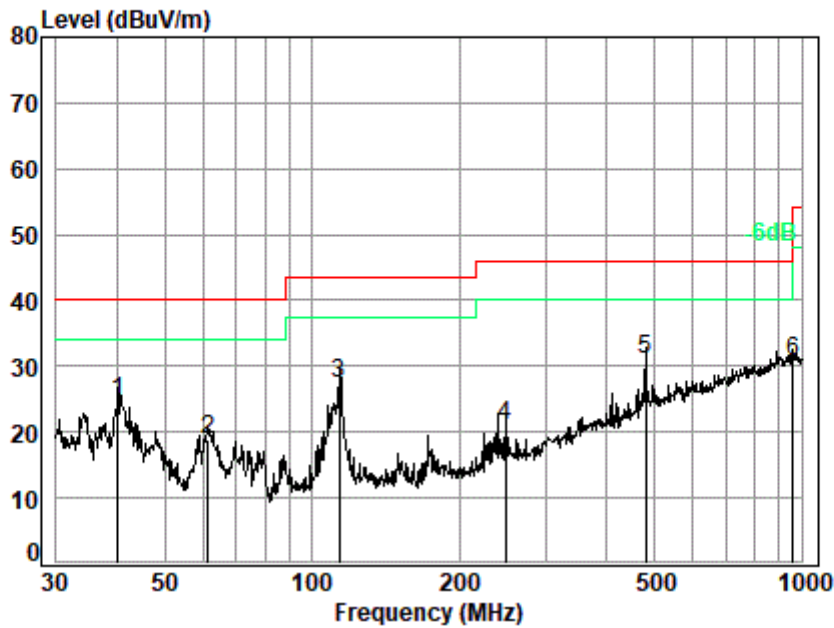

Site : chamber
Condition: 3m VERTICAL
Job No. : 05578AT/05580AT
Test Mode: 06

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1	40.135	16.35	0.82	27.64	35.10	24.63	40.00	-15.37 QP
2	61.346	11.34	0.93	27.62	34.15	18.80	40.00	-21.20 QP
3	113.714	11.54	1.31	27.64	42.23	27.44	43.50	-16.06 QP
4	248.552	17.20	1.92	27.64	29.44	20.92	46.00	-25.08 QP
5 q	480.528	22.75	2.75	27.91	33.40	30.99	46.00	-15.01 QP
6	958.794	28.10	4.09	26.63	25.05	30.61	46.00	-15.39 QP



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.5 Radiated Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)
 Test Method: ANSI C63.10 (2020) Section 6.6
 Measurement Distance: 3m
 Test Engineer: Logic Wang

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.5.1 E.U.T. Operation


Operating Environment:

Temperature: 23.5 °C Humidity: 56.3 % RH Atmospheric Pressure: 1020 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode(2.4G Wireless)_Keep the EUT in transmitting with modulation mode.
Pre-scan	06	Charge + TX mode(2.4G Wireless)_Keep the EUT in charging and transmitting with modulation mode.

7.5.3 Test Setup Diagram

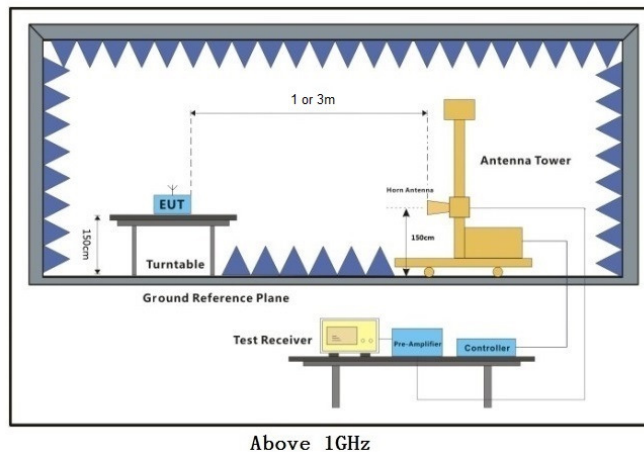

7.5.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200557804


Page: 38 of 47

Average value:

Calculate Formula:	Average value=Peak value + PDCF
	PDCF=20 log(Duty cycle)
	Duty cycle= T on time / T period
Test data:	Ton time =0.1957ms
	T period =2.5435ms
	PDCF value= -22.28dB

Spectrum

Ref Level -10.00 dBm RBW 1 MHz
Att 10 dB SWT 15 ms VBW 3 MHz
SGL

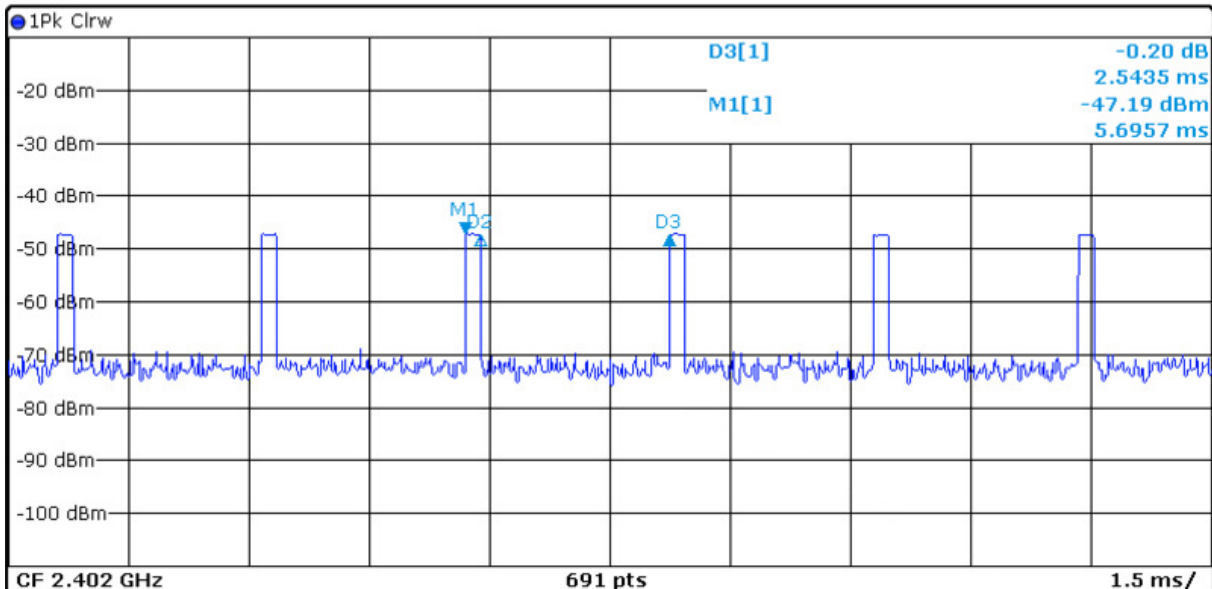

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	5.6957 ms	-47.19 dBm		
D2	M1	1	195.7 μs	-0.04 dB		
D3	M1	1	2.5435 ms	-0.20 dB		



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Antenna 1:


Headset 2.4G SRD_TX_CH_L_Horizontal

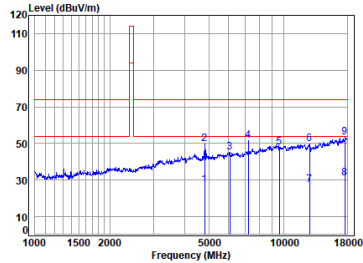

Site : chamber
Condition: 3m HORIZONTAL
Job No : 05578AT\05580AT
Mode : 2406 TX RSE

Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Remark
MHz	Loss	Factor	Factor	Level	dBuV	dBuV/m	Limit	dB
	dB			dB				
1	4812.000	7.42	34.35	54.22	40.00	27.55	54.00	-26.45 Average
2	4812.000	7.42	34.35	54.22	62.28	49.83	74.00	-24.17 Peak
3	6071.417	8.92	35.04	53.11	54.30	45.15	74.00	-28.85 Peak
4	7218.000	8.49	35.70	53.18	60.58	51.59	74.00	-22.41 Peak
5	9624.000	10.73	37.45	53.35	52.87	47.70	74.00	-26.30 Peak
6	12687.750	11.23	38.08	53.20	53.44	49.55	74.00	-24.45 Peak
7	12687.750	11.23	38.08	53.20	31.16	27.27	54.00	-26.73 Average
8	q17639.470	11.28	43.68	52.58	28.57	30.95	54.00	-23.05 Average
9	p17639.470	11.28	43.68	52.58	50.85	53.23	74.00	-20.77 Peak


Headset 2.4G SRD_TX_CH_L_Vertical

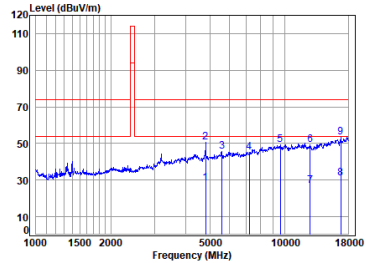

Site : chamber
Condition: 3m VERTICAL
Job No : 05578AT\05580AT
Mode : 2406 TX RSE

Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Remark
MHz	Loss	Factor	Factor	Level	dBuV	dBuV/m	Limit	dB
	dB			dB				
1	4812.000	7.42	34.35	54.22	40.73	28.28	54.00	-25.72 Average
2	4812.000	7.42	34.35	54.22	63.01	50.56	74.00	-23.44 Peak
3	5599.412	8.32	34.70	53.52	56.01	45.51	74.00	-28.49 Peak
4	7218.000	8.49	35.70	53.18	54.38	45.39	74.00	-28.61 Peak
5	9624.000	10.73	37.45	53.35	54.65	49.48	74.00	-24.52 Peak
6	12651.130	11.30	38.00	53.20	53.24	49.34	74.00	-24.66 Peak
7	12651.130	11.30	38.00	53.20	30.96	27.06	54.00	-26.94 Average
8	q16842.290	10.99	43.03	52.73	29.59	30.88	54.00	-23.12 Average
9	p16842.290	10.99	43.03	52.73	51.87	53.16	74.00	-20.84 Peak


Headset 2.4G SRD_TX_CH_M_Horizontal

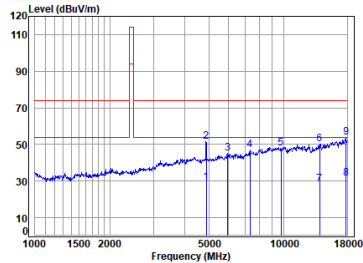

Site : chamber
Condition: 3m HORIZONTAL
Job No : 05578AT\05580AT
Mode : 2440 TX RSE

Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Remark
MHz	Loss	Factor	Factor	Level	dBuV	dBuV/m	Limit	dB
	dB			dB				
1	4880.000	7.47	34.62	54.21	41.37	29.25	54.00	-24.75 Average
2	4880.000	7.47	34.62	54.21	63.65	51.53	74.00	-22.47 Peak
3	5967.033	8.88	34.77	53.13	54.84	45.36	74.00	-28.64 Peak
4	7320.000	8.46	35.70	53.17	55.96	46.95	74.00	-27.05 Peak
5	9760.000	10.69	37.38	53.29	52.99	47.77	74.00	-26.23 Peak
6	13957.530	10.97	39.62	52.91	52.73	50.41	74.00	-23.59 Peak
7	13957.530	10.97	39.62	52.91	30.45	28.13	54.00	-25.87 Average
8	q17793.090	11.38	43.89	52.50	28.62	31.39	54.00	-22.61 Average
9	p17793.090	11.38	43.89	52.50	50.90	53.67	74.00	-20.33 Peak

Headset 2.4G SRD_TX_CH_M_Vertical

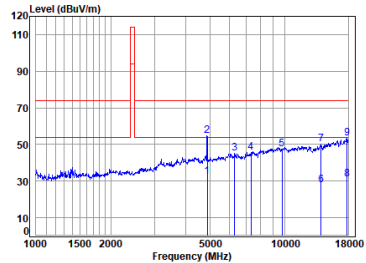


Site : chamber
Condition: 3m VERTICAL
Job No : 05578AT\05580AT
Mode : 2440 TX RSE

Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Remark
MHz	Loss	Factor	Factor	Level	dBuV	dBuV/m	Limit	dB
	dB			dB				
1	q 4880.000	7.47	34.62	54.21	44.59	32.47	54.00	-21.53 Average
2	p 4880.000	7.47	34.62	54.21	66.87	54.75	74.00	-19.25 Peak
3	6303.890	8.90	34.99	53.13	54.25	45.01	74.00	-28.99 Peak
4	7320.000	8.46	35.70	53.17	54.77	45.76	74.00	-28.24 Peak
5	9760.000	10.69	37.38	53.29	52.74	47.52	74.00	-26.48 Peak
6	13997.930	10.98	39.70	52.90	52.30	50.08	74.00	-23.92 Peak
7	13997.930	10.98	39.70	52.90	30.93	28.10	54.00	-23.07 Average
8	17844.590	11.41	43.90	52.48	28.10	30.93	54.00	-23.07 Average
9	17844.590	11.41	43.90	52.48	50.38	53.21	74.00	-20.79 Peak




Headset 2.4G SRD_TX_CH_H_Horizontal



Site : chamber
Condition: 3m HORIZONTAL
Job No : 05578AT\05580AT
Mode : 2480 TX RSE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 4960.000	7.53	34.56	54.20	42.57	30.46	54.00	-23.54	Average
2 4960.000	7.53	34.56	54.20	64.85	52.74	74.00	-21.26	Peak
3 5967.033	8.88	34.77	53.13	55.10	45.62	74.00	-28.38	Peak
4 7440.000	8.43	35.96	53.15	55.33	46.57	74.00	-27.43	Peak
5 9920.000	10.64	37.30	53.23	52.36	47.07	74.00	-26.93	Peak
6 13957.530	10.97	39.62	52.91	30.02	27.70	54.00	-26.30	Average
7 13957.530	10.97	39.62	52.91	52.30	49.98	74.00	-24.02	Peak
8 q17793.090	11.38	43.89	52.50	27.97	30.74	54.00	-23.26	Average
9 p17793.090	11.38	43.89	52.50	50.25	53.02	74.00	-20.98	Peak


Headset 2.4G SRD_TX_CH_H_Vertical



Site : chamber
Condition: 3m VERTICAL
Job No : 05578AT\05580AT
Mode : 2480 TX RSE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 4960.000	7.53	34.56	54.20	44.13	32.02	54.00	-21.98	Average
2 p 4960.000	7.53	34.56	54.20	66.41	54.30	74.00	-19.70	Peak
3 6470.026	8.88	35.54	53.15	54.43	45.70	74.00	-28.30	Peak
4 7440.000	8.43	35.96	53.15	54.96	46.20	74.00	-27.80	Peak
5 9920.000	10.64	37.30	53.23	52.84	47.55	74.00	-26.45	Peak
6 13957.530	10.97	39.62	52.91	30.26	27.94	54.00	-26.06	Average
7 13957.530	10.97	39.62	52.91	52.54	50.22	74.00	-23.78	Peak
8 17690.530	11.32	43.78	52.55	29.21	31.76	54.00	-22.24	Average
9 17690.530	11.32	43.78	52.55	51.49	54.04	74.00	-19.96	Peak


TX_CH_39_Horizontal



Site : chamber
Condition: 3m HORIZONTAL
Job No : 05578AT\05580AT
Mode : 2480 TX RSE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 p23735.510	6.77	38.88	50.35	52.53	38.29	74.00	-35.71	Peak	-9.54


TX_CH_39_Vertical




Site : chamber
Condition: 3m VERTICAL
Job No : 05578AT\05580AT
Mode : 2480 TX RSE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 p23425.660	6.76	38.60	50.98	53.06	37.90	74.00	-36.10	Peak	-9.54

Antenna 2:

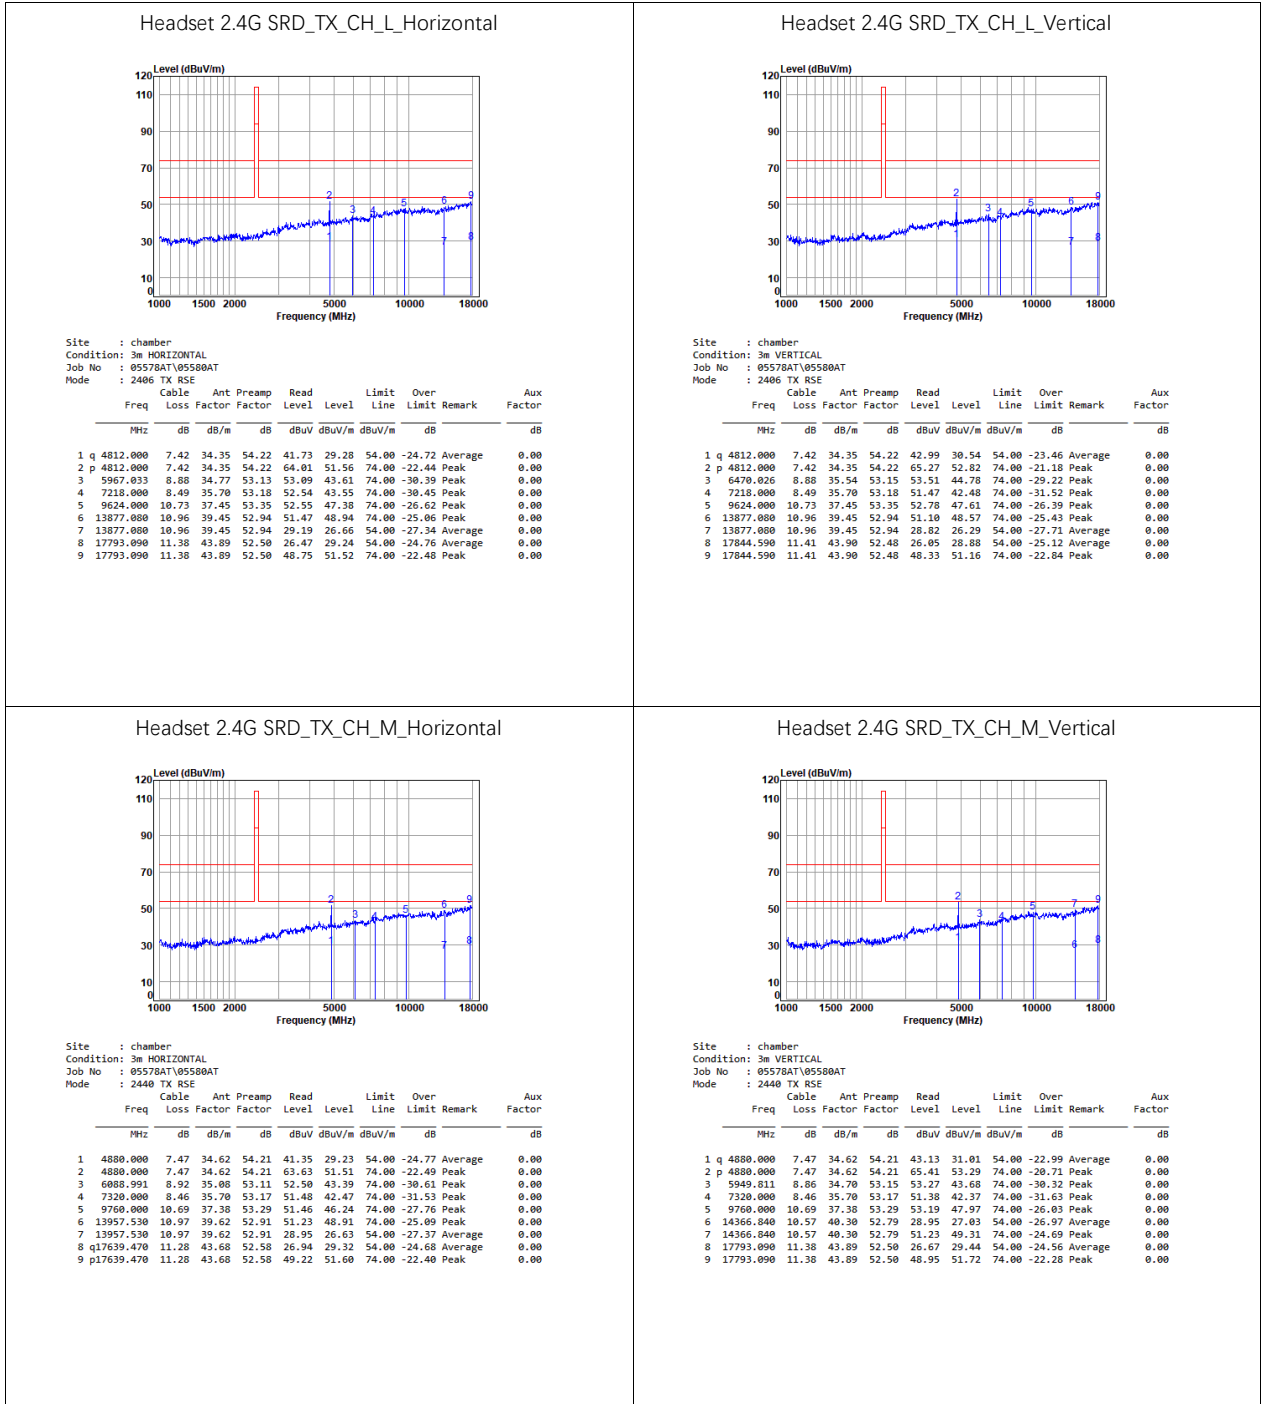


Headset 2.4G_SRD_TX_CH_H_Horizontal



Site : chamber
Condition: 3m HORIZONTAL
Job No : 05578AT05580AT
Mode : 2400 TX RSE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q 4960.000	7.53	34.56	54.20	42.21	30.10	54.00	-23.90	Average	0.00
2 p 4960.000	7.53	34.56	54.20	64.49	52.38	74.00	-21.62	Peak	0.00
3 6071.417	8.92	35.04	53.11	52.83	43.68	74.00	-30.32	Peak	0.00
4 7440.000	8.43	35.96	53.15	53.83	45.07	74.00	-28.93	Peak	0.00
5 9920.000	10.64	37.30	53.23	50.69	45.40	74.00	-28.60	Peak	0.00
6 13957.530	10.97	39.62	52.91	50.02	47.70	74.00	-26.30	Peak	0.00
7 17793.000	11.30	43.09	52.50	27.29	30.06	54.00	-23.94	Average	0.00
8 17793.090	11.38	43.89	52.50	49.57	52.34	74.00	-21.66	Peak	0.00


Headset 2.4G_SRD_TX_CH_H_Vertical



Site : chamber
Condition: 3m VERTICAL
Job No : 05578AT05580AT
Mode : 2400 TX RSE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q 4960.000	7.53	34.56	54.20	44.87	32.76	54.00	-21.24	Average	0.00
2 p 4960.000	7.53	34.56	54.20	67.15	55.04	74.00	-18.96	Peak	0.00
3 6213.441	8.91	34.75	53.12	53.36	43.90	74.00	-30.10	Peak	0.00
4 7440.000	8.43	35.96	53.15	54.90	46.14	74.00	-27.86	Peak	0.00
5 9920.000	10.64	37.30	53.23	51.67	46.38	74.00	-27.62	Peak	0.00
6 13957.530	10.97	39.62	52.91	28.54	26.22	54.00	-27.78	Average	0.00
7 13957.530	10.97	39.62	52.91	50.82	48.50	74.00	-25.50	Peak	0.00
8 17741.740	11.35	43.84	52.53	27.40	30.06	54.00	-23.94	Average	0.00
9 17741.740	11.35	43.84	52.53	49.68	52.34	74.00	-21.66	Peak	0.00


Headset 2.4G_SRD_TX_CH_M_Horizontal



Site : chamber
Condition: 3m HORIZONTAL
Job No : 05578AT05580AT
Mode : 2440 TX RSE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 p24303.600	6.80	39.02	51.13	51.00	36.95	74.00	-37.05	Peak	-9.54

Headset 2.4G_SRD_TX_CH_M_Vertical



Site : chamber
Condition: 3m VERTICAL
Job No : 05578AT05580AT
Mode : 2440 TX RSE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 p23986.340	6.78	38.99	50.40	50.97	36.80	74.00	-37.20	Peak	-9.54

7.6 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.215
Test Method: ANSI C63.10 (2020) Section 6.9
Test Engineer: Linvo Ding


7.6.1 E.U.T. Operation

Operating Environment:
Temperature: 27.2 °C Humidity: 54.4 % RH Atmospheric Pressure: 1020 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode(2.4G Wireless)_Keep the EUT in transmitting with modulation mode.
Pre-scan	06	Charge + TX mode(2.4G Wireless)_Keep the EUT in charging and transmitting with modulation mode.

7.6.3 Test Setup Diagram

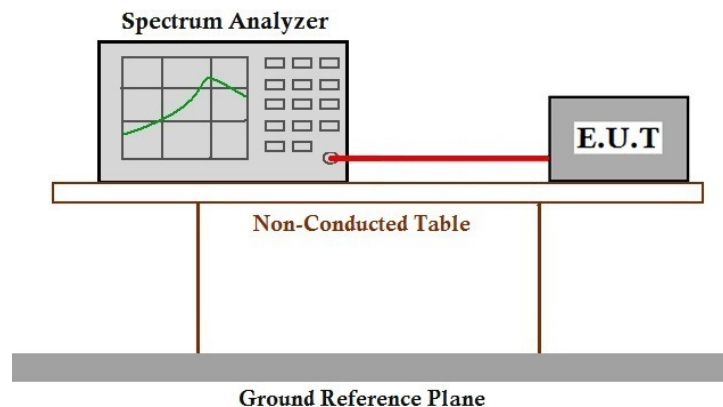

7.6.4 Measurement Procedure and Data


Antenna 1:


Test channel	20dB bandwidth (MHz)	Results
Lowest	2.187	Pass
Middle	2.181	Pass
Highest	2.187	Pass

Antenna 2:

Test channel	20dB bandwidth (MHz)	Results
Lowest	2.183	Pass
Middle	2.18	Pass
Highest	2.177	Pass


Antenna 1:

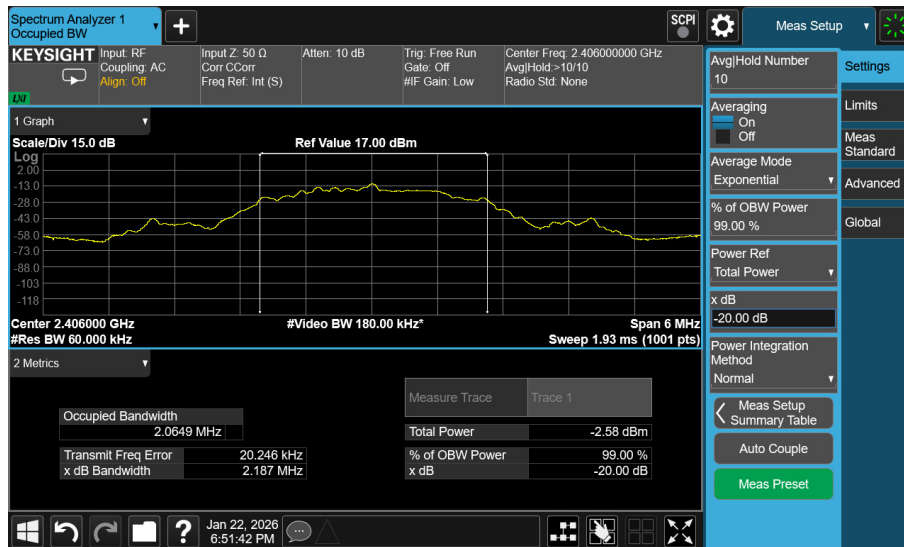

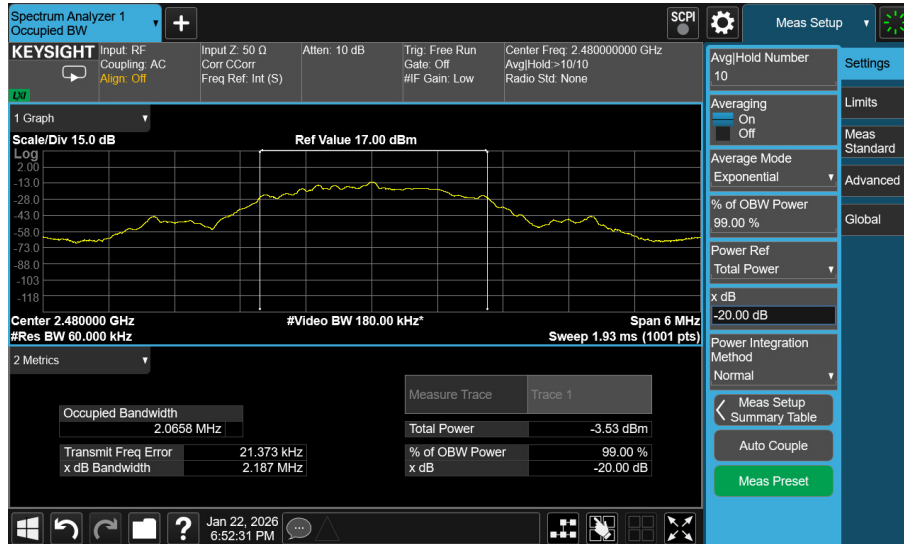

Antenna 2:



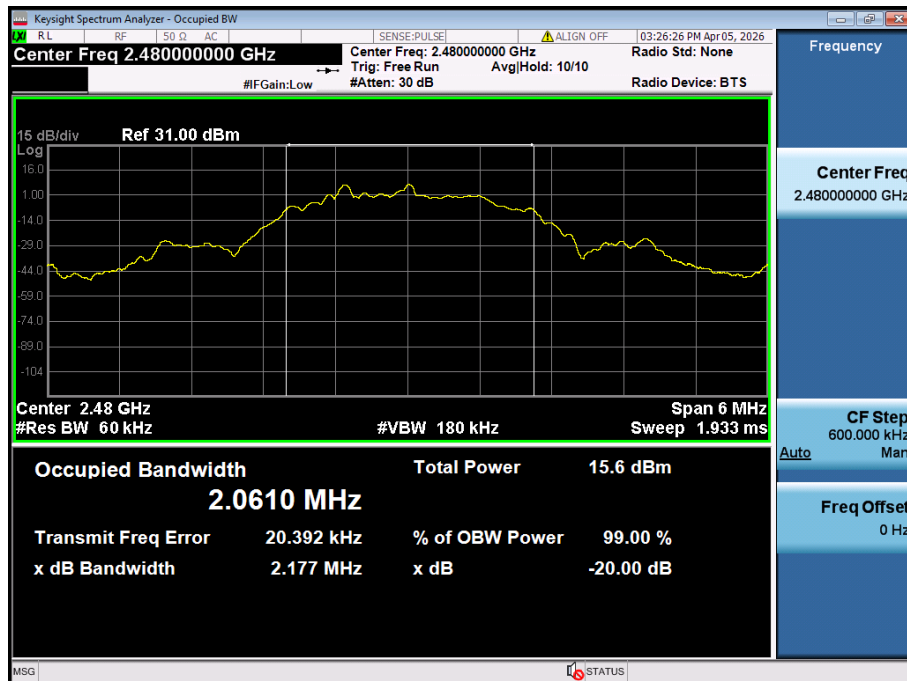

8 Test Setup Photo

Refer to Appendix – Test Setup Photos 2.4G Proprietary for SZCR2512005578AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix – External and Internal Photos for SZCR2512005578AT

- End of the Report -

