



RADIO TEST REPORT

Test Report No.: 14407265H-A-R1

Customer	DAIHATSU MOTOR CO., LTD.
Description of EUT	Keyfree system
Model Number of EUT	DH19C-2
FCC ID	2AVSADH19C-2
Test Regulation	FCC Part 15 Subpart C
Test Result	Complied (Refer to SECTION 3)
Issue Date	September 7, 2022
Remarks	-

Representative Test Engineer

Kiyoshiro Okazaki
Engineer

Approved By

Tsubasa Takayama
Leader



CERTIFICATE 5107.02

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
- ☒ There is no testing item of "Non-accreditation".

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested.
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided from the Customer for this report is identified in Section 1.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No.: 14407265H-A

This report is a revised version of 14407265H-A. 14407265H-A is replaced with this report.

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	14407265H-A	September 2, 2022	-
1	14407265H-A-R1	September 7, 2022	Correction of the X-axis and Z-axis photos for Immobilizer

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

CONTENTS	PAGE
SECTION 1: Customer Information	5
SECTION 2: Equipment Under Test (EUT).....	5
SECTION 3: Test specification, procedures & results.....	7
SECTION 4: Operation of EUT during testing	9
SECTION 5: Radiated emission (Fundamental and Spurious Emission)	11
SECTION 6: -20 dB Bandwidth.....	13
SECTION 7: 99 % emission bandwidth.....	13
APPENDIX 1: Test data	14
Radiated Emission (Fundamental and Spurious Emission).....	14
-20 dB Bandwidth / 99 % emission bandwidth	23
APPENDIX 2: Test instruments	27
APPENDIX 3: Photographs of test setup	28
Radiated Emission.....	28
Worst Case Position	29

SECTION 1: Customer Information

Company Name	DAIHATSU MOTOR CO., LTD.*
Address	2-1-1, Momozono, Ikeda-shi, Osaka, 563-8651, Japan
Telephone Number	+81-72-754-5619
Contact Person	Kouji Ozawa

***Remarks:**

DAIHATSU MOTOR CO., LTD. designates DENSO CORPORATION and TOKAI RIKA CO., LTD. as manufacturer of the product (Keyfree system).

The information provided from the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	Keyfree system
Model Number	DH19C-2
Serial Number	Refer to SECTION 4.2
Condition	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	August 1, 2022
Test Date	August 3 to 18, 2022

2.2 Product Description

General Specification

Rating	System: DC 12.0 V Internal: DC 12.0 V (Transmitter) / DC 5.0 V (Receiver)
--------	--

Radio Specification

[Transmitter part]

Radio Type	LF Transmitter	
Frequency of Operation	125 kHz	
Modulation	ASK (A1D)	
Antenna type	LF Antenna (Outside D) LF Antenna (Outside P) LF Antenna (Outside B) LF Antenna (Inside Fr) LF Antenna (Inside Mi) LF Antenna (Inside Rr) Immobilizer Antenna	
Antenna Specification	LF antenna:	Ferrite antenna coil
	Immobilizer antenna:	Loop antenna coil

[Receiver part]

Frequency of Operation	433.92 MHz	
Intermediate frequency	525 kHz	
Modulation	FSK (F1D)	
Type of receiving system	Super-heterodyne	
Antenna Specification	Internal antenna (Inverted F antenna)	

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification	FCC Part 15 Subpart C The latest version on the first day of the testing period
Title	FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.209 Radiated emission limits; general requirements.

*Also the EUT complies with FCC Part 15 Subpart B.

3.2 Procedures and results

Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
Conducted Emission	<FCC> ANSI C63.10:2013 6 Standard test methods <ISED> RSS-Gen 8.8	<FCC> Section 15.207 <ISED> RSS-Gen 8.8	-	N/A	N/A	N/A *1)
Electric Field Strength of Fundamental Emission	<FCC> ANSI C63.10:2013 6 Standard test methods <ISED> RSS-Gen 6.5, 6.12	<FCC> Section 15.209 <ISED> RSS-210 7.2 RSS-Gen 8.9	Radiated	N/A	2.8 dB 125 kHz, 0 deg. Peak with Duty factor <Mode 5>	Complied a)
Electric Field Strength of Spurious Emission	<FCC> ANSI C63.10:2013 6 Standard test methods <ISED> RSS-Gen 6.5, 6.6, 6.13	<FCC> Section 15.209 <ISED> RSS-210 7.3 RSS-Gen 8.9	Radiated	N/A	4.6 dB 31.236 MHz, Vertical, QP <Mode 6>	Complied a)
-20 dB Bandwidth	<FCC> ANSI C63.10:2013 6 Standard test methods <ISED> -	<FCC> Reference data <ISED> -	Radiated	N/A	N/A	Complied b)

Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593.

*1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.

a) Refer to APPENDIX 1 (data of Radiated emission)

b) Refer to APPENDIX 1 (data of -20 dB Bandwidth / 99 % emission bandwidth)

FCC Part 15.31 (e)

The battery voltage (DC 12V) is provided to the EUT. Input voltage to RF part does not go through the regulator. So the test was performed with the supply voltage varied between 85 % and 115% of the nominal rated supply voltage (DC 12 V) and the variation of the input power does not affect the test result, therefore the EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the vehicle. Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to standard

Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
99 % emission bandwidth	RSS-Gen 6.7	-	Radiated	N/A	N/A	-

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement.

Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.

Test Item		Frequency range		Uncertainty (+/-)
Radiated emission	3 m	9 kHz to 30 MHz		3.2 dB
	10 m			3.0 dB
	3 m	30 MHz to 200 MHz	Horizontal	4.8 dB
			Vertical	5.0 dB
		200 MHz to 1000 MHz	Horizontal	5.1 dB
			Vertical	6.2 dB
	10 m	30 MHz to 200 MHz	Horizontal	4.8 dB
			Vertical	4.8 dB
		200 MHz to 1000 MHz	Horizontal	5.0 dB
			Vertical	5.0 dB
-20 dB Bandwidth / 99 % emission bandwidth		-		0.96 %

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

*A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 Japan

Telephone: +81-596-24-8999

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.10 shielded room	3.8 x 2.8 x 2.8	3.8 x 2.8	-	-
No.11 measurement room	4.0 x 3.4 x 2.5	N/A	-	-
No.12 measurement room	2.6 x 3.4 x 2.5	N/A	-	-
Large Chamber	16.9 x 22.1 x 10.17	16.9 x 22.1	-	10 m
Small Chamber	5.3 x 6.69 x 3.59	5.3 x 6.69	-	-

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing

4.1. Operating Mode(s)

Test mode	Remarks *1)
1) Tx 125 kHz LF Antenna (Outside D)	Section 2 of Timing of transmission
2) Tx 125 kHz LF Antenna (Outside P)	Section 2 of Timing of transmission
3) Tx 125 kHz LF Antenna (Outside B)	Section 2 of Timing of transmission
4) Tx 125 kHz LF Antenna (Inside Fr)	Section 2 of Timing of transmission
5) Tx 125 kHz LF Antenna (Inside Rr)	Section 2 of Timing of transmission
6) Tx 125 kHz LF Antenna (Inside Mi)	Section 2 of Timing of transmission
7) Tx 125 kHz Immobilizer Antenna	Section 3 of Timing of transmission
8) Tx 125 kHz LF Antenna (Outside D+P)	Section 1 of Timing of transmission

*Power of the EUT was set by the software as follows;

Software: 200213_RadioTest_TypeA.s

(Date: 2020.02 13, Storage location: EUT memory)


*This setting of software is the worst case.

Any conditions under the normal use do not exceed the condition of setting.

In addition, end users cannot change the settings of the output power of the product.

*1) Refer to Timing of transmission in “Theory of Operation” for details.

4.2. Configuration and peripherals

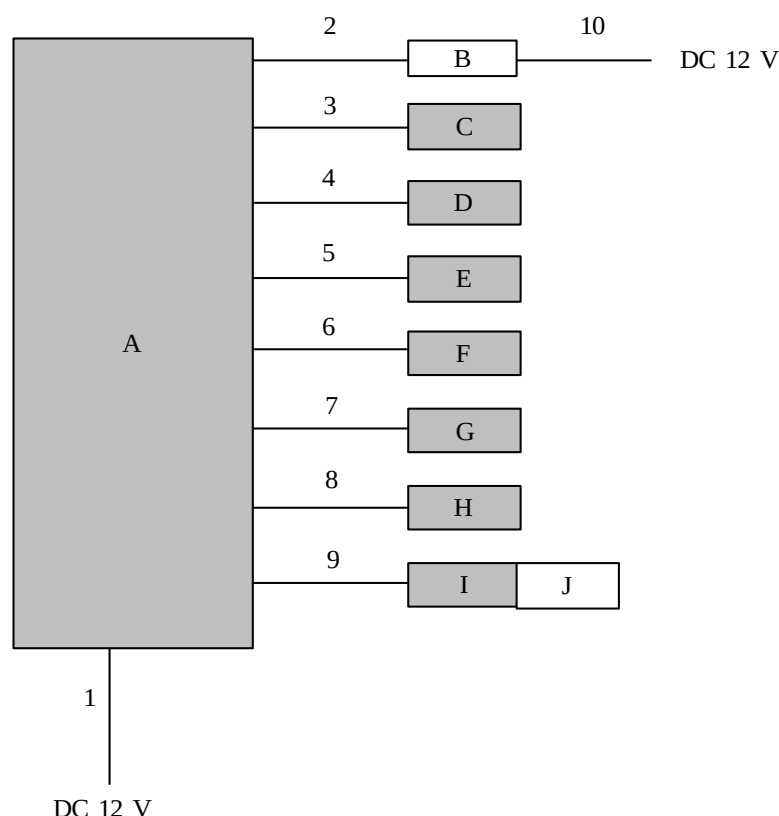

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

** The input voltage (DC 12 V) passes through Item No. A without affecting it and is supplied to the antennas (Item No. I) without any drop in voltage.

For the antenna (Item No. C to H), a fixed voltage is supplied through the regulator.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Body ECU	DH19C-2	No.385	DENSO CORPORATION	EUT
B	Evaluation Bench	-	No.32	DENSO CORPORATION	-
C	LF Antenna (Outside D)	DH19C-2	No.385-1	TOKAI RIKA CO., LTD.	EUT
D	LF Antenna (Outside P)	DH19C-2	No.385-2	TOKAI RIKA CO., LTD.	EUT
E	LF Antenna (Outside B)	DH19C-2	No.385-3	TOKAI RIKA CO., LTD.	EUT
F	LF Antenna (Inside Fr)	DH19C-2	No.385-4	TOKAI RIKA CO., LTD.	EUT
G	LF Antenna (Inside Mi)	DH19C-2	No.385-5	TOKAI RIKA CO., LTD.	EUT
H	LF Antenna (Inside Rr)	DH19C-2	No.385-6	TOKAI RIKA CO., LTD.	EUT
I	Immobilizer Antenna	DH19C-2	No.385	TOKAI RIKA CO., LTD.	EUT
J	Smart Key	-	No.385-1	DENSO CORPORATION	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC Cable	2.5	Unshielded	Unshielded	-
2	Signal cable	2.9	Unshielded	Unshielded	-
3	Antenna Cable	3.0	Unshielded	Unshielded	-
4	Antenna Cable	3.0	Unshielded	Unshielded	-
5	Antenna Cable	3.0	Unshielded	Unshielded	-
6	Antenna Cable	3.0	Unshielded	Unshielded	-
7	Antenna Cable	3.0	Unshielded	Unshielded	-
8	Antenna Cable	3.0	Unshielded	Unshielded	-
9	Antenna Cable	3.0	Unshielded	Unshielded	-
10	DC Cable	2.5	Unshielded	Unshielded	-

SECTION 5: Radiated emission (Fundamental and Spurious Emission)

Test Procedure

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[Limit conversion]

The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to $45.5 - 51.5 = -6.0$ dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

[Frequency: From 9 kHz to 30 MHz]

The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for vertical polarization (antenna angle: 0 deg., 45 deg., 90 deg., and 135 deg.) and horizontal polarization.

*Refer to Figure 2 about Direction of the Loop Antenna.

Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open field test site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

These tests were performed in semi anechoic chamber. Therefore, the measured level of emissions may be higher than if measurements were made without a ground plane. However, test results were confirmed to pass against standard limit.

[Frequency: From 30 MHz to 1 GHz]

The measuring antenna height varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

[Test instruments and test settings]

Frequency	Below 30 MHz	30 MHz to 200 MHz	200 MHz to 1 GHz
Antenna Type	Loop	Biconical	Logperiodic

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Frequency	From 9 kHz to 90 kHz and From 110 kHz to 150 kHz	From 90 kHz to 110 kHz	From 150 kHz to 490 kHz	From 490 kHz to 30 MHz	From 30 MHz to 1 GHz
Instrument used	Test Receiver				
Detector	PK / AV	QP	PK / AV	QP	QP
IF Bandwidth	200 Hz	200 Hz	9 kHz	9 kHz	120 kHz
Test Distance	3 m *1)	3 m *1)	3 m *1)	3 m *2)	3 m

*1) Distance Factor: $40 \times \log (3 \text{ m} / 300 \text{ m}) = -80 \text{ dB}$

*2) Distance Factor: $40 \times \log (3 \text{ m} / 30 \text{ m}) = -40 \text{ dB}$

Figure 1: Test Setup



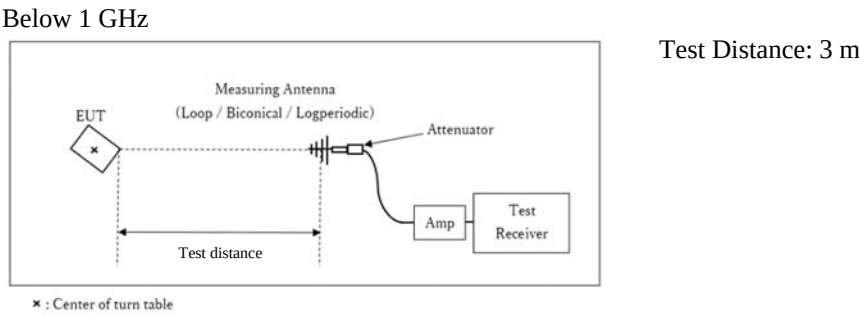


Figure 2: Direction of the Loop Antenna

Side View (Vertical)

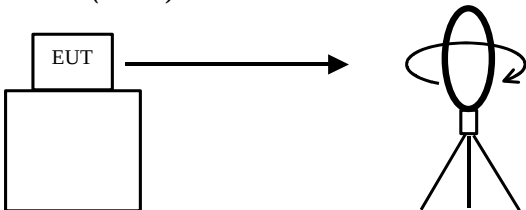


Top View (Horizontal)



Antenna was not rotated.

Top View (Vertical)

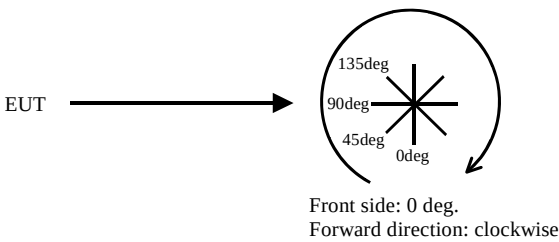

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

This EUT has two modes which transponder key is attached or not. The worst case was confirmed with and without transponder key attached, as a result, the test with transponder key attached was the worst case. Therefore the test with transponder key attached was performed only.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range

Test data

Test result

: 9 kHz to 1 GHz

: APPENDIX

: Pass

SECTION 6: -20 dB Bandwidth

Test Procedure

The test was measured with a spectrum analyzer.

Test	Span	RBW	VBW	Sweep	Detector	Trace	Instrument used
-20 dB Bandwidth	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer

Test data : APPENDIX
Test result : Pass

SECTION 7: 99 % emission bandwidth

Test Procedure

The test was measured with a spectrum analyzer.

Test	Span	RBW	VBW	Sweep	Detector	Trace	Instrument used
99 % emission bandwidth	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Peak hold was applied as Worst-case measurement.							

Test data : APPENDIX
Test result : Pass

APPENDIX 1: Test data**Radiated Emission (Fundamental and Spurious Emission)**

Test place	Ise EMC Lab.	No.1
Semi Anechoic Chamber	No.1	No.1
Date	August 3, 2022	August 4, 2022
Temperature / Humidity	22 deg. C / 55 % RH	22 deg. C / 50 % RH
Engineer	Kiyoshiro Okazaki	Hiroyuki Furutaka
Remarks	(Below 30 MHz)	(Above 30 MHz)
Mode	Mode 1	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.1	19.1	-74.0	32.3	-	21.9	45.6	23.7	Fundamental(DC 12.0 V)
0deg	0.12500	PK	109.0	19.1	-74.0	32.3	-	21.8	45.6	23.8	Fundamental(DC 10.2 V)
0deg	0.12500	PK	108.9	19.1	-74.0	32.3	-	21.7	45.6	23.9	Fundamental(DC 13.8 V)
0deg	0.25000	PK	56.7	19.1	-64.2	32.3	-	-20.7	39.6	60.3	
0deg	0.37500	PK	43.5	19.0	-64.3	32.2	-	-34.0	36.1	70.1	
0deg	0.50000	QP	28.7	19.0	-24.3	32.2	-	-8.8	33.6	42.4	
0deg	0.62500	QP	26.4	19.0	-24.2	32.2	-	-11.0	31.7	42.7	
0deg	0.75000	QP	24.2	19.1	-24.2	32.2	-	-13.1	30.1	43.2	
0deg	0.87500	QP	23.9	19.1	-24.2	32.2	-	-13.4	28.7	42.1	
0deg	1.00000	QP	23.5	19.0	-24.2	32.2	-	-13.9	27.6	41.5	Floor Noise
0deg	1.12500	QP	24.5	19.0	-24.2	32.2	-	-12.9	26.5	39.4	Floor Noise
0deg	1.25000	QP	23.5	19.1	-24.2	32.2	-	-13.8	25.6	39.4	Floor Noise
Hori.	63.578	QP	38.4	9.0	7.9	32.2	-	23.1	40.0	16.9	
Hori.	101.615	QP	38.3	9.8	8.4	32.1	-	24.4	43.5	19.1	
Hori.	133.961	QP	33.8	11.6	8.8	32.1	-	22.1	43.5	21.4	
Hori.	178.031	QP	33.1	13.4	9.3	32.1	-	23.7	43.5	19.8	
Hori.	246.397	QP	34.6	12.8	10.0	32.0	-	25.4	46.0	20.6	
Hori.	334.792	QP	34.8	15.8	10.7	32.0	-	29.3	46.0	16.7	
Vert.	31.677	QP	44.4	13.2	7.3	32.2	-	32.7	40.0	7.3	
Vert.	32.724	QP	32.8	12.9	7.3	32.2	-	20.8	40.0	19.2	
Vert.	72.587	QP	41.2	9.0	8.0	32.2	-	26.0	40.0	14.0	
Vert.	108.626	QP	40.2	10.1	8.5	32.1	-	26.7	43.5	16.8	
Vert.	141.475	QP	39.1	12.0	8.9	32.1	-	27.9	43.5	15.6	
Vert.	187.293	QP	35.0	13.9	9.4	32.1	-	26.2	43.5	17.3	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor + Filter) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.1	19.1	-74.0	32.3	0.0	21.9	25.6	3.7	Fundamental(DC 12.0 V)
0deg	0.12500	PK	109.0	19.1	-74.0	32.3	0.0	21.8	25.6	3.8	Fundamental(DC 10.2 V)
0deg	0.12500	PK	108.9	19.1	-74.0	32.3	0.0	21.7	25.6	3.9	Fundamental(DC 13.8 V)
0deg	0.25000	PK	56.7	19.1	-64.2	32.3	0.0	-20.7	19.6	40.3	
0deg	0.37500	PK	43.5	19.0	-64.3	32.2	0.0	-34.0	16.1	50.1	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor + Filter) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.1	19.1	6.0	32.3	-	101.9	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated.

Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.1
Semi Anechoic Chamber	No.1	No.1
Date	August 3, 2022	August 4, 2022
Temperature / Humidity	22 deg. C / 55 % RH	22 deg. C / 50 % RH
Engineer	Kiyoshiro Okazaki	Hiroyuki Furutaka
Remarks	(Below 30 MHz)	(Above 30 MHz)
Mode	Mode 2	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.2	19.1	-74.0	32.3	-	22.0	45.6	23.6	Fundamental(DC 12.0 V)
0deg	0.12500	PK	109.0	19.1	-74.0	32.3	-	21.8	45.6	23.8	Fundamental(DC 10.2 V)
0deg	0.12500	PK	109.1	19.1	-74.0	32.3	-	21.9	45.6	23.7	Fundamental(DC 13.8 V)
0deg	0.25000	PK	56.1	19.1	-64.2	32.3	-	-21.3	39.6	60.9	
0deg	0.37500	PK	44.2	19.0	-64.3	32.2	-	-33.3	36.1	69.4	
0deg	0.50000	QP	27.9	19.0	-24.3	32.2	-	-9.6	33.6	43.2	
0deg	0.62500	QP	26.2	19.0	-24.2	32.2	-	-11.2	31.7	42.9	
0deg	0.75000	QP	24.1	19.1	-24.2	32.2	-	-13.2	30.1	43.3	
0deg	0.87500	QP	23.8	19.1	-24.2	32.2	-	-13.5	28.7	42.2	
0deg	1.00000	QP	23.8	19.0	-24.2	32.2	-	-13.6	27.6	41.2	Floor Noise
0deg	1.12500	QP	23.8	19.0	-24.2	32.2	-	-13.6	26.5	40.1	Floor Noise
0deg	1.25000	QP	23.3	19.1	-24.2	32.2	-	-14.0	25.6	39.6	Floor Noise
Hori.	66.965	QP	36.0	9.0	7.9	32.2	-	20.7	40.0	19.3	
Hori.	101.110	QP	36.4	9.8	8.4	32.1	-	22.5	43.5	21.0	
Hori.	136.701	QP	35.8	11.8	8.8	32.1	-	24.3	43.5	19.2	
Hori.	169.992	QP	32.6	12.9	9.2	32.1	-	22.6	43.5	20.9	
Hori.	246.628	QP	33.6	12.8	10.0	32.0	-	24.4	46.0	21.6	
Hori.	334.491	QP	33.4	15.8	10.7	32.0	-	27.9	46.0	18.1	
Vert.	31.792	QP	37.9	13.2	7.3	32.2	-	26.2	40.0	13.8	
Vert.	32.785	QP	35.3	12.9	7.3	32.2	-	23.3	40.0	16.7	
Vert.	76.103	QP	42.3	9.1	8.1	32.2	-	27.3	40.0	12.7	
Vert.	101.118	QP	39.1	9.8	8.4	32.1	-	25.2	43.5	18.3	
Vert.	122.927	QP	41.4	10.9	8.7	32.1	-	28.9	43.5	14.6	
Vert.	138.951	QP	41.6	11.8	8.9	32.1	-	30.2	43.5	13.3	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor + Filter) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.2	19.1	-74.0	32.3	0.0	22.0	25.6	3.6	Fundamental(DC 12.0 V)
0deg	0.12500	PK	109.0	19.1	-74.0	32.3	0.0	21.8	25.6	3.8	Fundamental(DC 10.2 V)
0deg	0.12500	PK	109.1	19.1	-74.0	32.3	0.0	21.9	25.6	3.7	Fundamental(DC 13.8 V)
0deg	0.25000	PK	56.1	19.1	-64.2	32.3	0.0	-21.3	19.6	40.9	
0deg	0.37500	PK	44.2	19.0	-64.3	32.2	0.0	-33.3	16.1	49.4	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor + Filter) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.2	19.1	6.0	32.3	-	102.0	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated.
Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.1
Semi Anechoic Chamber	No.1	No.1
Date	August 3, 2022	August 4, 2022
Temperature / Humidity	22 deg. C / 55 % RH	22 deg. C / 50 % RH
Engineer	Kiyoshiro Okazaki	Hiroyuki Furutaka
Remarks	(Below 30 MHz)	(Above 30 MHz)
Mode	Mode 3	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.7	19.1	-74.0	32.3	-	22.5	45.6	23.1	Fundamental(DC 12.0 V)
0deg	0.12500	PK	109.6	19.1	-74.0	32.3	-	22.4	45.6	23.2	Fundamental(DC 10.2 V)
0deg	0.12500	PK	109.6	19.1	-74.0	32.3	-	22.4	45.6	23.2	Fundamental(DC 13.8 V)
0deg	0.25000	PK	55.2	19.1	-64.2	32.3	-	-22.2	39.6	61.8	
0deg	0.37500	PK	45.1	19.0	-64.3	32.2	-	-32.4	36.1	68.5	
0deg	0.50000	QP	25.6	19.0	-24.3	32.2	-	-11.9	33.6	45.5	
0deg	0.62500	QP	24.6	19.0	-24.2	32.2	-	-12.8	31.7	44.5	
0deg	0.75000	QP	24.9	19.1	-24.2	32.2	-	-12.4	30.1	42.5	
0deg	0.87500	QP	23.5	19.1	-24.2	32.2	-	-13.8	28.7	42.5	
0deg	1.00000	QP	23.3	19.0	-24.2	32.2	-	-14.1	27.6	41.7	Floor Noise
0deg	1.12500	QP	23.0	19.0	-24.2	32.2	-	-14.4	26.5	40.9	Floor Noise
0deg	1.25000	QP	23.0	19.1	-24.2	32.2	-	-14.3	25.6	39.9	Floor Noise
Hori.	65.725	QP	35.8	9.0	7.9	32.2	-	20.5	40.0	19.5	
Hori.	108.623	QP	38.4	10.1	8.5	32.1	-	24.9	43.5	18.6	
Hori.	136.938	QP	36.3	11.8	8.8	32.1	-	24.8	43.5	18.7	
Hori.	182.767	QP	31.3	13.6	9.3	32.1	-	22.1	43.5	21.4	
Hori.	246.598	QP	32.0	12.8	10.0	32.0	-	22.8	46.0	23.2	
Hori.	334.485	QP	34.2	15.8	10.7	32.0	-	28.7	46.0	17.3	
Vert.	32.816	QP	33.4	12.9	7.3	32.2	-	21.4	40.0	18.6	
Vert.	44.544	QP	39.0	10.7	7.5	32.2	-	25.0	40.0	15.0	
Vert.	75.359	QP	41.1	9.1	8.1	32.2	-	26.1	40.0	13.9	
Vert.	99.605	QP	42.1	9.7	8.4	32.1	-	28.1	43.5	15.4	
Vert.	137.690	QP	42.9	11.8	8.9	32.1	-	31.5	43.5	12.0	
Vert.	189.510	QP	36.3	14.0	9.4	32.1	-	27.6	43.5	15.9	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor + Filter) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.7	19.1	-74.0	32.3	0.0	22.5	25.6	3.1	Fundamental(DC 12.0 V)
0deg	0.12500	PK	109.6	19.1	-74.0	32.3	0.0	22.4	25.6	3.2	Fundamental(DC 10.2 V)
0deg	0.12500	PK	109.6	19.1	-74.0	32.3	0.0	22.4	25.6	3.2	Fundamental(DC 13.8 V)
0deg	0.25000	PK	55.2	19.1	-64.2	32.3	0.0	-22.2	19.6	41.8	
0deg	0.37500	PK	45.1	19.0	-64.3	32.2	0.0	-32.4	16.1	48.5	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor + Filter) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.7	19.1	6.0	32.3	-	102.5	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated.
Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.1
Semi Anechoic Chamber	No.1	No.1
Date	August 3, 2022	August 4, 2022
Temperature / Humidity	22 deg. C / 55 % RH	22 deg. C / 50 % RH
Engineer	Kiyoshiro Okazaki	Hiroyuki Furutaka
Remarks	(Below 30 MHz)	(Above 30 MHz)
Mode	Mode 4	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.1	19.1	-74.0	32.3	-	21.9	45.6	23.7	Fundamental(DC 12.0 V)
0deg	0.12500	PK	109.0	19.1	-74.0	32.3	-	21.8	45.6	23.8	Fundamental(DC 10.2 V)
0deg	0.12500	PK	109.0	19.1	-74.0	32.3	-	21.8	45.6	23.8	Fundamental(DC 13.8 V)
0deg	0.25000	PK	57.5	19.1	-64.2	32.3	-	-19.9	39.6	59.5	
0deg	0.37500	PK	44.3	19.0	-64.3	32.2	-	-33.2	36.1	69.3	
0deg	0.50000	QP	28.9	19.0	-24.3	32.2	-	-8.6	33.6	42.2	
0deg	0.62500	QP	26.2	19.0	-24.2	32.2	-	-11.2	31.7	42.9	
0deg	0.75000	QP	24.0	19.1	-24.2	32.2	-	-13.3	30.1	43.4	
0deg	0.87500	QP	23.4	19.1	-24.2	32.2	-	-13.9	28.7	42.6	
0deg	1.00000	QP	23.0	19.0	-24.2	32.2	-	-14.4	27.6	42.0	Floor Noise
0deg	1.12500	QP	22.7	19.0	-24.2	32.2	-	-14.7	26.5	41.2	Floor Noise
0deg	1.25000	QP	22.7	19.1	-24.2	32.2	-	-14.6	25.6	40.2	Floor Noise
Hori.	101.612	QP	35.3	9.8	8.4	32.1	-	21.4	43.5	22.1	
Hori.	109.616	QP	37.7	10.1	8.5	32.1	-	24.2	43.5	19.3	
Hori.	121.456	QP	37.5	10.9	8.7	32.1	-	25.0	43.5	18.5	
Hori.	126.457	QP	37.7	11.2	8.7	32.1	-	25.5	43.5	18.0	
Hori.	254.890	QP	33.0	12.7	10.0	32.0	-	23.7	46.0	22.3	
Hori.	324.755	QP	34.1	15.5	10.6	32.0	-	28.2	46.0	17.8	
Vert.	30.040	QP	32.4	13.6	7.2	32.2	-	21.0	40.0	19.0	
Vert.	72.103	QP	42.9	9.0	8.0	32.2	-	27.7	40.0	12.3	
Vert.	95.600	QP	40.7	9.6	8.3	32.1	-	26.5	43.5	17.0	
Vert.	121.682	QP	42.6	10.9	8.7	32.1	-	30.1	43.5	13.4	
Vert.	196.560	QP	36.4	14.4	9.5	32.1	-	28.2	43.5	15.3	
Vert.	331.550	QP	33.4	15.7	10.7	32.0	-	27.8	46.0	18.2	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor + Filter) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.1	19.1	-74.0	32.3	0.0	21.9	25.6	3.7	Fundamental(DC 12.0 V)
0deg	0.12500	PK	109.0	19.1	-74.0	32.3	0.0	21.8	25.6	3.8	Fundamental(DC 10.2 V)
0deg	0.12500	PK	109.0	19.1	-74.0	32.3	0.0	21.8	25.6	3.8	Fundamental(DC 13.8 V)
0deg	0.25000	PK	57.5	19.1	-64.2	32.3	0.0	-19.9	19.6	39.5	
0deg	0.37500	PK	44.3	19.0	-64.3	32.2	0.0	-33.2	16.1	49.3	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor + Filter) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.1	19.1	6.0	32.3	-	101.9	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated.

Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.1
Semi Anechoic Chamber	No.1	No.1
Date	August 3, 2022	August 4, 2022
Temperature / Humidity	22 deg. C / 55 % RH	22 deg. C / 50 % RH
Engineer	Kiyoshiro Okazaki	Hiroyuki Furutaka
Remarks	(Below 30 MHz)	(Above 30 MHz)
Mode	Mode 5	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	110.0	19.1	-74.0	32.3	-	22.8	45.6	22.8	Fundamental(DC 12.0 V)
0deg	0.12500	PK	109.8	19.1	-74.0	32.3	-	22.6	45.6	23.0	Fundamental(DC 10.2 V)
0deg	0.12500	PK	109.8	19.1	-74.0	32.3	-	22.6	45.6	23.0	Fundamental(DC 13.8 V)
0deg	0.25000	PK	55.1	19.1	-64.2	32.3	-	-22.3	39.6	61.9	
0deg	0.37500	PK	45.2	19.0	-64.3	32.2	-	-32.3	36.1	68.4	
0deg	0.50000	QP	25.4	19.0	-24.3	32.2	-	-12.1	33.6	45.7	
0deg	0.62500	QP	25.1	19.0	-24.2	32.2	-	-12.3	31.7	44.0	
0deg	0.75000	QP	24.6	19.1	-24.2	32.2	-	-12.7	30.1	42.8	
0deg	0.87500	QP	23.3	19.1	-24.2	32.2	-	-14.0	28.7	42.7	
0deg	1.00000	QP	23.1	19.0	-24.2	32.2	-	-14.3	27.6	41.9	Floor Noise
0deg	1.12500	QP	22.9	19.0	-24.2	32.2	-	-14.5	26.5	41.0	Floor Noise
0deg	1.25000	QP	22.7	19.1	-24.2	32.2	-	-14.6	25.6	40.2	Floor Noise
Hori.	32.127	QP	33.8	13.1	7.3	32.2	-	22.0	40.0	18.0	
Hori.	55.222	QP	33.8	9.4	7.7	32.2	-	18.7	40.0	21.3	
Hori.	65.571	QP	37.1	9.0	7.9	32.2	-	21.8	40.0	18.2	
Hori.	72.600	QP	36.4	9.0	8.0	32.2	-	21.2	40.0	18.8	
Hori.	125.940	QP	36.2	11.2	8.7	32.1	-	24.0	43.5	19.5	
Hori.	324.973	QP	33.4	15.5	10.6	32.0	-	27.5	46.0	18.5	
Vert.	30.252	QP	45.2	13.5	7.2	32.2	-	33.7	40.0	6.3	
Vert.	32.126	QP	45.3	13.1	7.3	32.2	-	33.5	40.0	6.5	
Vert.	55.204	QP	43.7	9.4	7.7	32.2	-	28.6	40.0	11.4	
Vert.	72.324	QP	42.2	9.0	8.0	32.2	-	27.0	40.0	13.0	
Vert.	121.657	QP	43.3	10.9	8.7	32.1	-	30.8	43.5	12.7	
Vert.	195.776	QP	34.3	14.4	9.5	32.1	-	26.1	43.5	17.4	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor + Filter) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	110.0	19.1	-74.0	32.3	0.0	22.8	25.6	2.8	Fundamental(DC 12.0 V)
0deg	0.12500	PK	109.8	19.1	-74.0	32.3	0.0	22.6	25.6	3.0	Fundamental(DC 10.2 V)
0deg	0.12500	PK	109.8	19.1	-74.0	32.3	0.0	22.6	25.6	3.0	Fundamental(DC 13.8 V)
0deg	0.25000	PK	55.1	19.1	-64.2	32.3	0.0	-22.3	19.6	41.9	
0deg	0.37500	PK	45.2	19.0	-64.3	32.2	0.0	-32.3	16.1	48.4	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor + Filter) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	110.0	19.1	6.0	32.3	-	102.8	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated.

Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.1
Semi Anechoic Chamber	No.1	No.1
Date	August 3, 2022	August 4, 2022
Temperature / Humidity	22 deg. C / 55 % RH	22 deg. C / 50 % RH
Engineer	Kiyoshiro Okazaki	Hiroyuki Furutaka
Remarks	(Below 30 MHz)	(Above 30 MHz)
Mode	Mode 6	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.2	19.1	-74.0	32.3	-	22.0	45.6	23.6	Fundamental(DC 12.0 V)
0deg	0.12500	PK	109.1	19.1	-74.0	32.3	-	21.9	45.6	23.7	Fundamental(DC 10.2 V)
0deg	0.12500	PK	109.1	19.1	-74.0	32.3	-	21.9	45.6	23.7	Fundamental(DC 13.8 V)
0deg	0.25000	PK	55.1	19.1	-64.2	32.3	-	-22.3	39.6	61.9	
0deg	0.37500	PK	44.9	19.0	-64.3	32.2	-	-32.6	36.1	68.7	
0deg	0.50000	QP	25.4	19.0	-24.3	32.2	-	-12.1	33.6	45.7	
0deg	0.62500	QP	24.7	19.0	-24.2	32.2	-	-12.7	31.7	44.4	
0deg	0.75000	QP	25.1	19.1	-24.2	32.2	-	-12.2	30.1	42.3	
0deg	0.87500	QP	23.5	19.1	-24.2	32.2	-	-13.8	28.7	42.5	
0deg	1.00000	QP	23.3	19.0	-24.2	32.2	-	-14.1	27.6	41.7	Floor Noise
0deg	1.12500	QP	23.1	19.0	-24.2	32.2	-	-14.3	26.5	40.8	Floor Noise
0deg	1.25000	QP	22.8	19.1	-24.2	32.2	-	-14.5	25.6	40.1	Floor Noise
Hori.	31.183	QP	34.0	13.3	7.3	32.2	-	22.4	40.0	17.6	
Hori.	34.614	QP	35.9	12.5	7.3	32.2	-	23.5	40.0	16.5	
Hori.	62.018	QP	38.6	9.0	7.8	32.2	-	23.2	40.0	16.8	
Hori.	108.612	QP	38.0	10.1	8.5	32.1	-	24.5	43.5	19.0	
Hori.	208.332	QP	34.1	12.4	9.6	32.1	-	24.0	43.5	19.5	
Hori.	340.977	QP	33.3	15.8	10.7	32.0	-	27.8	46.0	18.2	
Vert.	31.236	QP	47.0	13.3	7.3	32.2	-	35.4	40.0	4.6	
Vert.	32.969	QP	38.2	12.9	7.3	32.2	-	26.2	40.0	13.8	
Vert.	78.577	QP	40.6	9.1	8.1	32.2	-	25.6	40.0	14.4	
Vert.	145.710	QP	41.7	12.1	9.0	32.1	-	30.7	43.5	12.8	
Vert.	188.017	QP	33.3	14.0	9.4	32.1	-	24.6	43.5	18.9	
Vert.	253.573	QP	36.3	12.6	10.0	32.0	-	26.9	46.0	19.1	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor + Filter) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.2	19.1	-74.0	32.3	0.0	22.0	25.6	3.6	Fundamental(DC 12.0 V)
0deg	0.12500	PK	109.1	19.1	-74.0	32.3	0.0	21.9	25.6	3.7	Fundamental(DC 10.2 V)
0deg	0.12500	PK	109.1	19.1	-74.0	32.3	0.0	21.9	25.6	3.7	Fundamental(DC 13.8 V)
0deg	0.25000	PK	55.1	19.1	-64.2	32.3	0.0	-22.3	19.6	41.9	
0deg	0.37500	PK	44.9	19.0	-64.3	32.2	0.0	-32.6	16.1	48.7	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor + Filter) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.2	19.1	6.0	32.3	-	102.0	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated.
Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.1
Semi Anechoic Chamber	No.1	No.1
Date	August 3, 2022	August 4, 2022
Temperature / Humidity	22 deg. C / 55 % RH	22 deg. C / 50 % RH
Engineer	Kiyoshiro Okazaki	Hiroyuki Furutaka
Remarks	(Below 30 MHz)	(Above 30 MHz)
Mode	Mode 7	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	92.9	19.1	-74.0	32.3	-	5.7	45.6	39.9	Fundamental(DC 12.0 V)
0deg	0.12500	PK	92.6	19.1	-74.0	32.3	-	5.4	45.6	40.2	Fundamental(DC 10.2 V)
0deg	0.12500	PK	92.6	19.1	-74.0	32.3	-	5.4	45.6	40.2	Fundamental(DC 13.8 V)
0deg	0.25000	PK	35.3	19.1	-64.2	32.3	-	-42.1	39.6	81.7	
0deg	0.37500	PK	46.0	19.0	-64.3	32.2	-	-31.5	36.1	67.6	
0deg	0.50000	QP	24.3	19.0	-24.3	32.2	-	-13.2	33.6	46.8	
0deg	0.62500	QP	35.5	19.0	-24.2	32.2	-	-1.9	31.7	33.6	
0deg	0.75000	QP	23.2	19.1	-24.2	32.2	-	-14.1	30.1	44.2	
0deg	0.87500	QP	30.6	19.1	-24.2	32.2	-	-6.7	28.7	35.4	
0deg	1.00000	QP	22.8	19.0	-24.2	32.2	-	-14.6	27.6	42.2	Floor Noise
0deg	1.12500	QP	27.7	19.0	-24.2	32.2	-	-9.7	26.5	36.2	Floor Noise
0deg	1.25000	QP	22.7	19.1	-24.2	32.2	-	-14.6	25.6	40.2	Floor Noise
Hori.	32.050	QP	24.5	13.1	7.3	32.2	-	12.7	40.0	27.3	
Hori.	36.050	QP	24.1	12.2	7.4	32.2	-	11.5	40.0	28.5	
Hori.	144.164	QP	25.9	12.1	8.9	32.1	-	14.8	43.5	28.7	
Hori.	160.171	QP	25.0	12.6	9.1	32.1	-	14.6	43.5	28.9	
Hori.	168.225	QP	23.6	12.9	9.2	32.1	-	13.6	43.5	29.9	
Hori.	187.957	QP	22.9	14.0	9.4	32.1	-	14.2	43.5	29.3	
Vert.	32.050	QP	32.2	13.1	7.3	32.2	-	20.4	40.0	19.6	
Vert.	36.050	QP	31.5	12.2	7.4	32.2	-	18.9	40.0	21.1	
Vert.	144.164	QP	31.1	12.1	8.9	32.1	-	20.0	43.5	23.5	
Vert.	160.171	QP	28.0	12.6	9.1	32.1	-	17.6	43.5	25.9	
Vert.	168.140	QP	27.5	12.9	9.2	32.1	-	17.5	43.5	26.0	
Vert.	187.957	QP	26.8	14.0	9.4	32.1	-	18.1	43.5	25.4	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor + Filter) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	92.9	19.1	-74.0	32.3	0.0	5.7	25.6	19.9	Fundamental(DC 12.0 V)
0deg	0.12500	PK	92.6	19.1	-74.0	32.3	0.0	5.4	25.6	20.2	Fundamental(DC 10.2 V)
0deg	0.12500	PK	92.6	19.1	-74.0	32.3	0.0	5.4	25.6	20.2	Fundamental(DC 13.8 V)
0deg	0.25000	PK	35.3	19.1	-64.2	32.3	0.0	-42.1	19.6	61.7	
0deg	0.37500	PK	46.0	19.0	-64.3	32.2	0.0	-31.5	16.1	47.6	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor + Filter) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	92.9	19.1	6.0	32.3	-	85.7	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated.

Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.1
Semi Anechoic Chamber	No.1	No.1
Date	August 3, 2022	August 4, 2022
Temperature / Humidity	22 deg. C / 55 % RH	22 deg. C / 50 % RH
Engineer	Kiyoshiro Okazaki	Hiroyuki Furutaka
Remarks	(Below 30 MHz)	(Above 30 MHz)
Mode	Mode 8	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	102.0	19.1	-74.0	32.3	-	14.8	45.6	30.8	Fundamental(DC 12.0 V)
0deg	0.12500	PK	101.8	19.1	-74.0	32.3	-	14.6	45.6	31.0	Fundamental(DC 10.2 V)
0deg	0.12500	PK	101.8	19.1	-74.0	32.3	-	14.6	45.6	31.0	Fundamental(DC 13.8 V)
0deg	0.25000	PK	48.9	19.1	-64.2	32.3	-	-28.5	39.6	68.1	
0deg	0.37500	PK	63.2	19.0	-64.3	32.2	-	-14.3	36.1	50.4	
0deg	0.50000	QP	26.7	19.0	-24.3	32.2	-	-10.8	33.6	44.4	
0deg	0.62500	QP	46.1	19.0	-24.2	32.2	-	8.7	31.7	23.0	
0deg	0.75000	QP	24.5	19.1	-24.2	32.2	-	-12.8	30.1	42.9	
0deg	0.87500	QP	39.8	19.1	-24.2	32.2	-	2.5	28.7	26.2	
0deg	1.00000	QP	23.2	19.0	-24.2	32.2	-	-14.2	27.6	41.8	Floor Noise
0deg	1.12500	QP	36.3	19.0	-24.2	32.2	-	-1.1	26.5	27.6	Floor Noise
0deg	1.25000	QP	22.8	19.1	-24.2	32.2	-	-14.5	25.6	40.1	Floor Noise
Hori.	97.210	QP	29.7	9.6	8.4	32.1	-	15.6	43.5	27.9	
Hori.	103.113	QP	31.5	9.8	8.4	32.1	-	17.6	43.5	25.9	
Hori.	114.548	QP	30.2	10.4	8.6	32.1	-	17.1	43.5	26.4	
Hori.	128.024	QP	31.7	11.2	8.7	32.1	-	19.5	43.5	24.0	
Hori.	170.675	QP	27.2	12.9	9.2	32.1	-	17.2	43.5	26.3	
Hori.	404.905	QP	27.4	16.7	11.2	32.0	-	23.3	46.0	22.7	
Vert.	31.970	QP	37.9	13.1	7.3	32.2	-	26.1	40.0	13.9	
Vert.	33.907	QP	38.0	12.7	7.3	32.2	-	25.8	40.0	14.2	
Vert.	45.500	QP	33.3	10.6	7.5	32.2	-	19.2	40.0	20.8	
Vert.	87.584	QP	34.8	9.5	8.2	32.2	-	20.3	40.0	19.7	
Vert.	101.620	QP	36.4	9.8	8.4	32.1	-	22.5	43.5	21.0	
Vert.	404.905	QP	22.7	16.7	11.2	32.0	-	18.6	46.0	27.4	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor + Filter) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	102.0	19.1	-74.0	32.3	0.0	14.8	25.6	10.8	Fundamental(DC 12.0 V)
0deg	0.12500	PK	101.8	19.1	-74.0	32.3	0.0	14.6	25.6	11.0	Fundamental(DC 10.2 V)
0deg	0.12500	PK	101.8	19.1	-74.0	32.3	0.0	14.6	25.6	11.0	Fundamental(DC 13.8 V)
0deg	0.25000	PK	48.9	19.1	-64.2	32.3	0.0	-28.5	19.6	48.1	
0deg	0.37500	PK	63.2	19.0	-64.3	32.2	0.0	-14.3	16.1	30.4	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor + Filter) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	102.0	19.1	6.0	32.3	-	94.8	-	-	Fundamental


Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated.

Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Radiated Spurious Emission

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Remarks
Mode

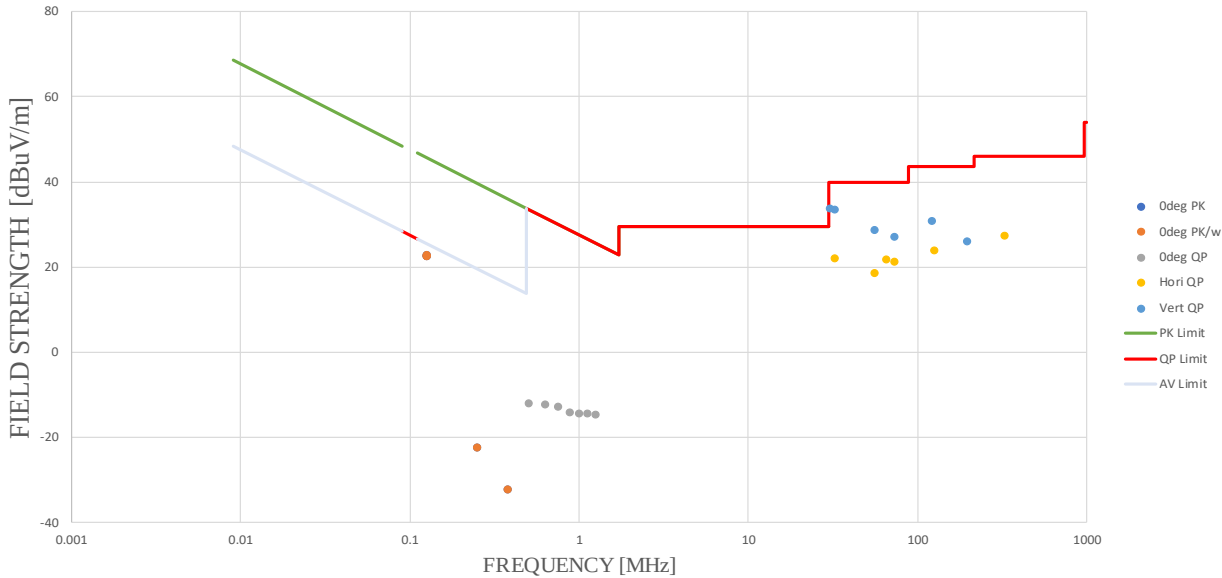


-20 dB Bandwidth / 99 % emission bandwidth

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.1
Date	August 18, 2022
Temperature / Humidity	22 deg. C / 58 % RH
Engineer	Tetsuro Yoshida
Mode	Mode 1 to 8

Mode	-20 dB Bandwidth [kHz]	99 % Occupied Bandwidth [kHz]
1) Outside Antenna D	10.497	22.3879
2) Outside Antenna P	10.143	20.2199
3) Outside Antenna B	9.814	16.8765
4) Inside Antenna Fr	16.886	18.7292
5) Inside Antenna Rr	9.924	16.8497
6) Inside Antenna Mi	9.698	16.8571
7) Immobilizer Antenna (With transponder key attached)	17.721	37.1231
Immobilizer Antenna (Without transponder key attached)	10.259	21.8916
8) Outside Antenna D+P	24.242	33.0187


-20 dB Bandwidth / 99 % emission bandwidth

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.1
Date	August 18, 2022
Temperature / Humidity	22 deg. C / 58 % RH
Engineer	Tetsuro Yoshida
Mode	Mode 1 to 6

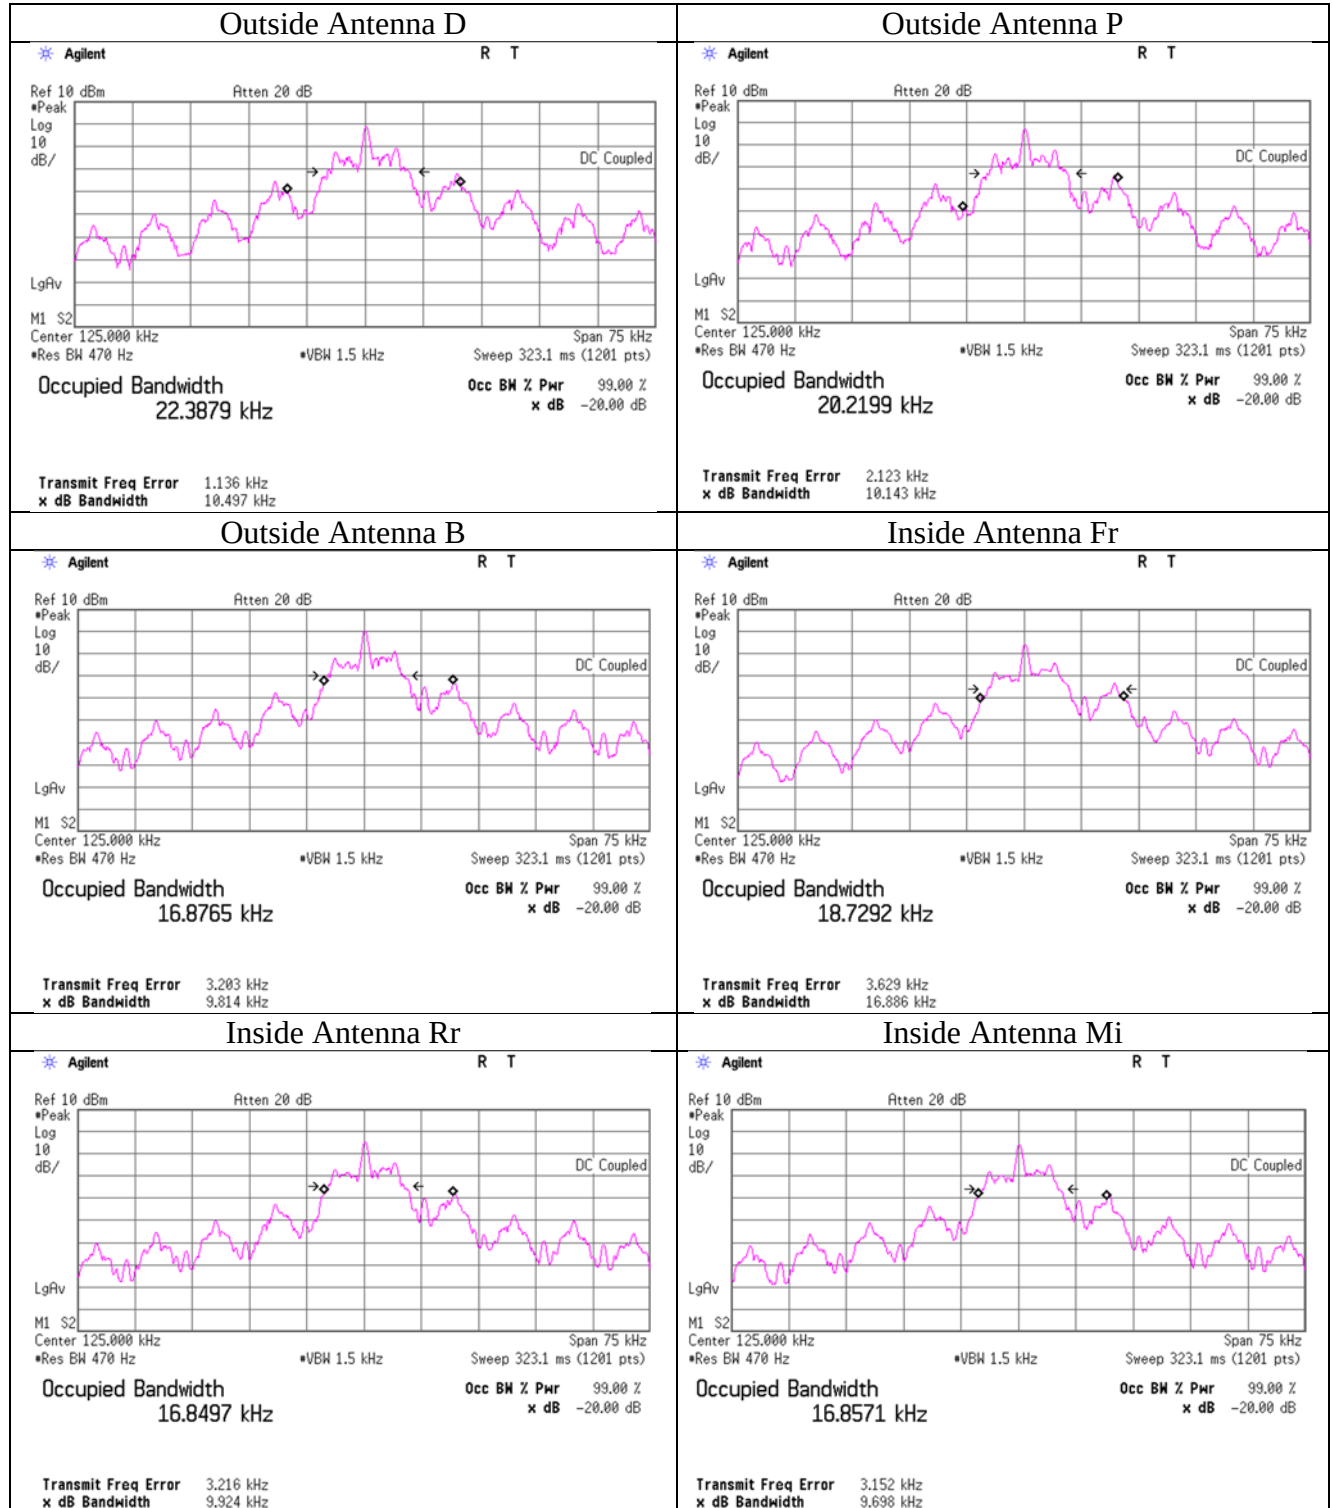


-20 dB Bandwidth / 99 % emission bandwidth

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.1
Date	August 18, 2022
Temperature / Humidity	22 deg. C / 58 % RH
Engineer	Tetsuro Yoshida
Mode	Mode 7

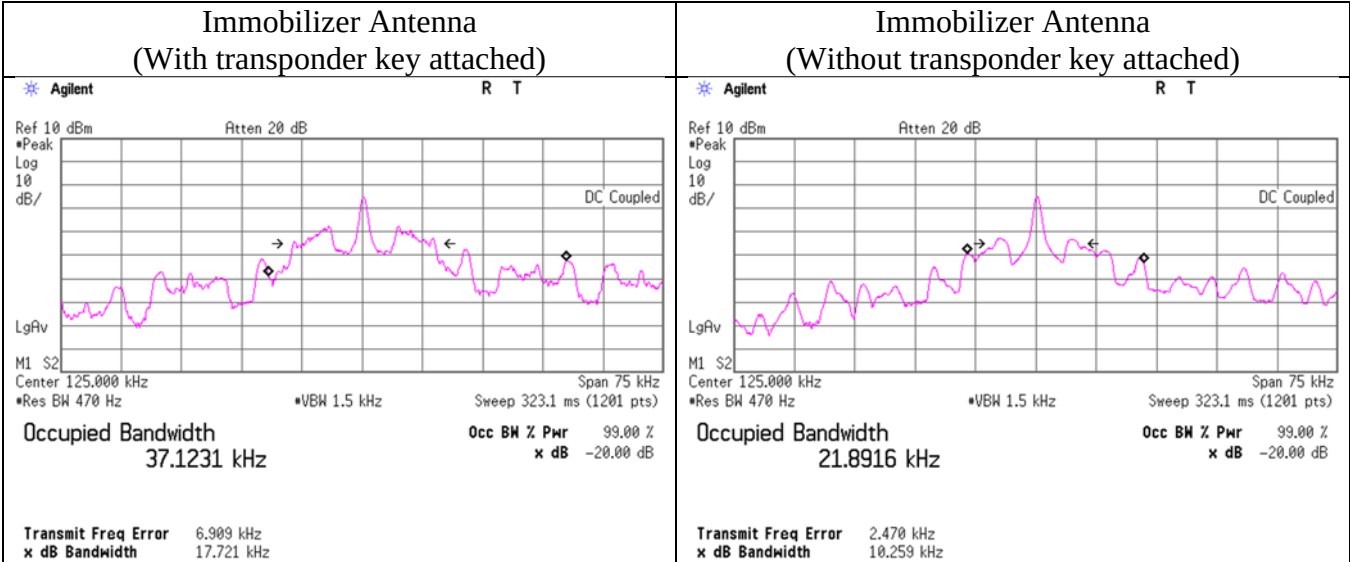

-20 dB Bandwidth / 99 % emission bandwidth

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.1
Date	August 18, 2022
Temperature / Humidity	22 deg. C / 58 % RH
Engineer	Tetsuro Yoshida
Mode	Mode 8

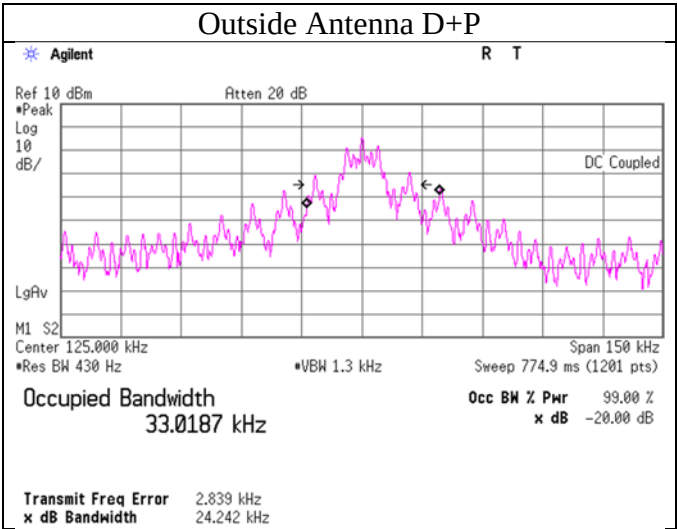

APPENDIX 2: Test instruments

Test equipment

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	COTS-MEMI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	MAEC-01	141998	AC1_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 10m	DA-06881	06/28/2022	24
RE	MAT-08	141213	Attenuator(6dB)	Weinschel Corp	2	BK7971	11/09/2021	12
RE	MCC-02	141350	Coaxial Cable	Suhner/storm/Agilent/TSJ	-	-	03/08/2022	12
RE	MCC-03	141215	Coaxial Cable	Fujikura/Suhner/TSJ	5D-2W/3D-2W/ RG400u/ RFM-E421(SW)	-/01068 (Switcher)	06/11/2022	12
RE	MCC-255	207745	Coaxial Cable	UL Japan	-	-	05/17/2022	12
RE	MHF-24	141295	High Pass Filter 0.15-30MHz	Rohde & Schwarz	EZ-25/3	100041	02/24/2022	12
RE	MJM-25	142226	Measure	KOMELON	KMC-36	-	-	-
RE	MLA-20	141264	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	189	05/14/2022	12
RE	MLPA-01	141254	Loop Antenna	Rohde & Schwarz	HFH2-Z2	100017	05/31/2022	12
RE	MMM-03	141530	Digital Tester	Fluke Corporation	FLUKE 26-3	78030621	08/10/2021	12
RE	MOS-27	141566	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	A08Q26	01/10/2022	12
RE	MPA-13	141582	Pre Amplifier	SONOMA INSTRUMENT	310	260834	02/25/2022	12
RE	MSA-13	141900	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46185823	09/30/2021	12
RE	MTR-09	141950	EMI Test Receiver	Rohde & Schwarz	ESU26	100412	10/14/2021	12
RE	YBA-03	197990	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHBB 9124 + BBA 9106	01365	11/13/2021	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item: RE: Radiated Emission