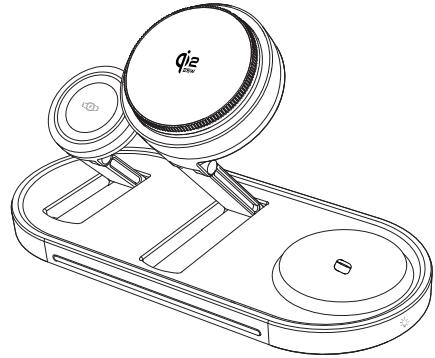

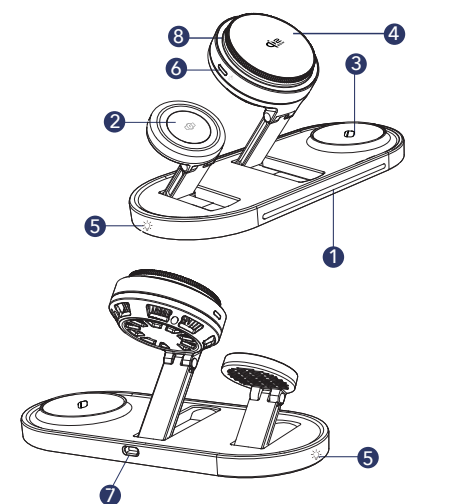
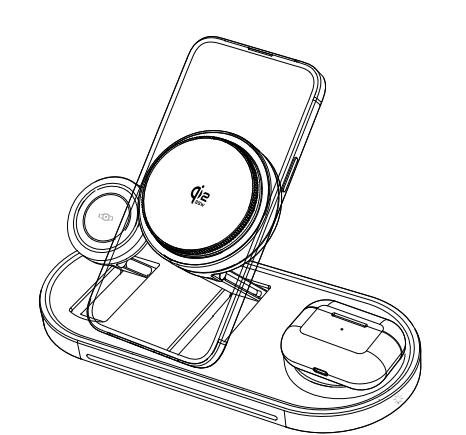


SC-Q10 25W 产品说明书

尺寸：480*100mm （单页尺寸：68*100mm)

材质：80g书写纸，单面印刷

User Manual 3 IN 1 Magnetic Wireless Charger  Model:SC-Q10 Manufacturer:Shenzhen Mgctech Co.,Ltd. Address: No. 12, Fusheng Road, Pinghu Fuchengao Street, Longgang District, Shenzhen, China. FCC ID:2AVSB-SC-Q10	Product Usage Guide 1.Please connect the product through the Type-C quick charging cable to the QC or PD above power adapter,to ensure that it supports fast wireless charging. 2. Angle Adjustment Function: The initial state of the phone/watch charging area is horizontal. The Shaft connecting rods can all be adjusted to any angle from 0° to 90°. The watch charging area with the shaft connecting rod can be adjusted from 0° to 160°, and the phone charging area with the shaft connecting rod can be adjusted from 0 ° to 250°, to be compatible with different sizes of Qi-enabled smartphones. 3. Watch charging part 2.5W output, supporting Apple and Samsung watches. Earphone charging part 2.5W output. There is no charging indicator light when the headphones or watch are charging. (Please make sure the earphones face up.) 4. Ambient Light Touch Button (Part ⑤): First touch left/right button: 100% cool white constant light; second touch left/right button: 100% warm white constant light; third touch left/right button: 50% cool white constant light; one more touch to turn off the light. Cycle repeats. 5. Fan & Semiconductor Chilling Plate Working Logic: They will start together with the wireless charging function. During wireless charging, the cooling system and fan can be turned on /off by touching button ⑥. When removing the phone, the cooling system will stop, and the fan will stop after 20 seconds to cool the product down.  Connecting rod can adjust from 0° to 90°  the phone charging area with the shaft connecting rod can adjust from 0 ° to 250°	Product Parts Description  ① Ambient Light area ② Charging area for watch ③ Charging area for earphone ④ Charging area for phone ⑤ Ambient light touch button ⑥ Fan On/ off button ⑦ Type-C input port ⑧ Wireless charging light	Specifications Input: 15V/3.2A Output: 25W Max Product Standard: Qi2.2 Earphone Output: 2.5W Watch Output: 2.5W Charging Distance: ≤ 3mm Charging Efficiency: ≤70% Product Dimension: 208.8*43*90.4mm Product Material: ABS+Tempered Glass Input interface: Type-C port  Fast Wireless Charging requires PD45W or above adapter.	Indicators and Protection 1. Standby mode: The ice blue keeps and then turns off after 20 seconds, starts the standby mode. 2. Charging mode: The ice blue light breathes for about 20 seconds and then turns off. Once the phone is removed, the ice blue light turns on again for 20 seconds and turns off. 3. FOD function: when put metal or magnet objects on the charger, the ice blue LED light will flash 10 times and stops charging. 4. Perfect protective function based on over-voltage, over-current, over-temperature and short-circuit protection. Attention 1.Please do not vigorously extrude or collide. 2.Please do not dismantle or put it into fire or water when the product is power on,to avoid short circuit or leakage. 3.Please do not use it in severely high temperature,high humidity or corrosive environment,to avoid damage to the circuit leakage. 4.Please do not put the magnetic strip or chip card (Such as ID card, bankcard etc.)on the charging pad to avoid to cause magneticcard lose efficacy. 5.Please do not put the metal (Such as coin etc.) on the chargingpad when charging,to avoid damage from heating.	FCC Warning This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: - Reorient or relocate the receiving antenna. - Increase the separation between the equipment and receiver. - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. - Consult the dealer or an experienced radio/TV technician for help. FCC RF exposure statement: The equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance between 20cm the radiator your body.	Warning This device in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. All essential radio test suites have been carried out. This device will be applied to all Member States of European Union. - The device complies with RF specifications when the device used at 20cm form your body. Declaration of Conformity Hereby, Shenzhen Mgctech Co.,Ltd. declares that the product type SC-Q10 is in compliance with Directives 2014/53/EU & 2011/65/EU. The full text of the EU declaration of conformity is available at the following internet address: http://www.gomgctech.com/ This device was tested for uncontrolled environment operations. To comply with RF exposure requirements, a minimum separation distance of 20cm must be maintained between the user's body and the product. (Non-portable TX/RX Frequency Range and Max Radiated H-Field(Only for EU and UK): 110-148kHz: -24.33 (dBuA/m)@10m 360kHz: -19.4 (dBuA/m)@10m)
--	--	---	--	---	--	--