

TEST REPORT

FCC Rules Part 15.247

Report Reference No.....: MTEB23080128-R

FCC ID.....: 2AVTD-T1

Compiled by

(position+printed name+signature)..: File administrators Alisa Luo



Supervised by

(position+printed name+signature)..: Test Engineer Sunny Deng



Approved by

(position+printed name+signature)..: Manager Yvette Zhou



Date of issue.....: **Aug.09,2023**

Representative Laboratory Name.: Shenzhen Most Technology Service Co., Ltd.

Address.....: No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park,
Nanshan, Shenzhen, Guangdong, China.

Applicant's name.....: Shenzhen Tantio Technology Co.,LTD

Address.....: 806, A block, Taojindi Building, Tenlong Road, Longhua district,
Shenzhen, China

Test specification/ Standard.....: FCC Rules Part 15.247

TRF Originator.....: Shenzhen Most Technology Service Co., Ltd.

Shenzhen Most Technology Service Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Most Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Most Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: TWS

Trade Mark.....: eleror

Model/Type reference.....: eleror T1

Listed Models: N/A

Modulation Type.....: GFSK, $\pi/4$ DQPSK, 8DPSK

Operation Frequency.....: From 2402MHz to 2480MHz

Hardware Version.....: B3.1

Software Version.....: /

Rating.....: DC3.7V(by Battery)
DC5V(by USB)

Result.....: PASS

TEST REPORT

Equipment under Test : TWS

Model /Type : eleror T1

Listed Models N/A

Remark N/A

Applicant : Shenzhen Tantio Technology Co.,LTD

Address : 806, A block, Taojindi Building, Tenlong Road, Longhua district, Shenzhen, China

Manufacturer : Shenzhen Tantio Technology Co.,LTD

Address : 806, A block, Taojindi Building, Tenlong Road, Longhua district, Shenzhen, China

Test Result:	PASS
--------------	------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

1	REVISION HISTORY	4
2	TEST STANDARDS	5
3	SUMMARY	6
3.1	General Remarks	6
3.2	Product Description	6
3.3	Equipment Under Test	6
3.4	Short description of the Equipment under Test (EUT)	6
3.5	EUT operation mode	7
3.6	Block Diagram of Test Setup	7
3.7	Test Item (Equipment Under Test) Description*	7
3.8	Auxiliary Equipment (AE) Description	7
3.9	Antenna Information*	7
3.10	Related Submittal(s) / Grant (s)	8
3.11	Modifications	8
3.12	EUT configuration	8
4	TEST ENVIRONMENT	9
4.1	Address of the test laboratory	9
4.2	Environmental conditions	9
4.3	Summary of measurement results	10
4.4	Statement of the measurement uncertainty	10
4.5	Equipments Used during the Test	11
5	TEST CONDITIONS AND RESULTS	12
5.1	AC Power Conducted Emission	12
5.2	Radiated Emission	15
5.3	Band Edge Compliance of RF Emission	22
5.4	Maximum Peak Output Power	35
5.5	20dB Bandwidth	36
5.6	Frequency Separation	37
5.7	Number of hopping frequency	38
5.8	Time of Occupancy (Dwell Time)	39
5.9	Spurious RF Conducted Emission	40
5.10	Pseudorandom Frequency Hopping Sequence	41
5.11	Antenna Requirement	42
6	TEST SETUP PHOTOS OF THE EUT	43
7	PHOTOS OF THE EUT	44
	APPENDIX I. Conducted Peak Output Power	45
	APPENDIX II. 99% Bandwidth	46
	APPENDIX III. 20dB Bandwidth	48
	APPENDIX IV. Carrier Frequencies Separation	50
	APPENDIX V. Conducted Out Of Band Emission	52
	APPENDIX VI. Duty Cycle	60
	APPENDIX VII. Dwell Time	65
	APPENDIX VIII. Number Of Hopping Channel	69

1 Revision History

Revision	Issue Date	Revisions	Revised By
00	2023.08.09	Initial Issue	Alisa Luo

2 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

3 SUMMARY

3.1 General Remarks

Date of receipt of test sample	:	2023.08.04
Testing commenced on	:	2023.08.05
Testing concluded on	:	2023.08.09

3.2 Product Description

Product Name:	TWS
Model/Type reference:	eleror T1
Power Supply:	DC3.7V(by Battery) DC5V(by USB)
Testing sample ID:	MTYP02475
Bluetooth :	
Supported Type:	Bluetooth BR/EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	Chip antenna
Antenna gain:	-0.5dBi

3.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC3.7V(by Battery)
DC5V(by USB)

3.4 Short description of the Equipment under Test (EUT)

This is a BT SPEAKER For more details, refer to the user's manual of the EUT.


3.5 EUT operation mode

The Applicant provides communication tools software(FCC Assist) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT and Channel 00/39/78 were selected to test.

Operation Frequency:

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
38	2440
39	2441
40	2442
⋮	⋮
77	2479
78	2480

3.6 Block Diagram of Test Setup

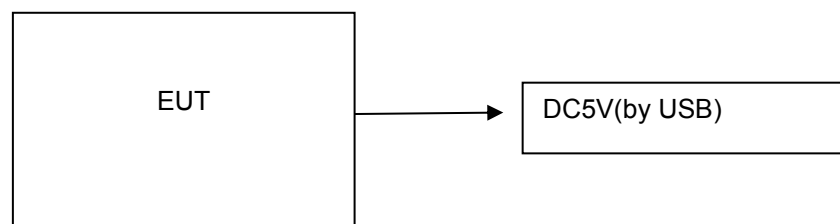

3.7 Test Item (Equipment Under Test) Description*

Short designation	EUT Name	EUT Description	Serial number	Hardware status	Software status
EUT A					
EUT B					

*: declared by the applicant. According to customers information EUTs A and B are the same devices.

3.8 Auxiliary Equipment (AE) Description

AE short designation	EUT Name (if available)	EUT Description	Serial number (if available)	Software (if used)
AE 1	Adapter	UP0512		
AE 2	-			

3.9 Antenna Information*

Short designation	Antenna Name	Antenna Type	Frequency Range	Serial number	Antenna Peak Gain
Antenna 1	---	Chip antenna	2.4 – 2.5 GHz	---	-0.5dBi
Antenna 2					

*: declared by the applicant.

3.10 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

3.11 Modifications

No modifications were implemented to meet testing criteria.

3.12 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

○ - supplied by the manufacturer

● - Supplied by the lab

●	ADAPTER	M/N:	UP0512
		Manufacturer:	Salcomp (Shenzhen) Co., Ltd.

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

Shenzhen Most Technology Service Co., Ltd.

No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China.
The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 0031192610

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

A2LA-Lab Cert. No.: 6343.01

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

Temperature:	23 ° C
Humidity:	48 %
Atmospheric pressure:	950-1050mbar

AC Main Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

4.3 Summary of measurement results

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Test result
§15.247(a)(1)	Carrier Frequency separation	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Middle	Compliant
§15.247(a)(1)	Number of Hopping channels	GFSK Π/4DQPSK 8DPSK	☒ Full	GFSK 8DPSK	☒ Full	Compliant
§15.247(a)(1)	Time of Occupancy (dwell time)	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Middle	Compliant
§15.247(a)(1)	Spectrum bandwidth of aFHSS system 20dB bandwidth	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	Compliant
§15.247(b)(1)	Maximum output power	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	Compliant
§15.247(d)	Band edge compliance conducted	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Highest	Compliant
§15.205	Band edge compliance radiated	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Highest	Compliant
§15.247(d)	TX spurious emissions conducted	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	Compliant
§15.247(d)	TX spurious emissions radiated	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Lowest ☒ Middle ☒ Highest	Compliant
§15.209(a)	TX spurious Emissions radiated Below 1GHz	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Middle	Compliant
§15.107(a) §15.207	Conducted Emissions 9KHz-30 MHz	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Middle	N/A

Remark:

1. The measurement uncertainty is not included in the test result.
2. We tested all test mode and recorded worst case in report

4.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Most Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Most Technology Service Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)
6dB Bandwidth & 99% Bandwidth	/	5%	(1)
Maximum Conducted Output Power	/	0.80dB	(1)
Spurious RF Conducted Emission	/	1.6dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.5 Equipments Used during the Test


Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware versions	Last Cal.	Cal. Interval
1.	L.I.S.N.	R&S	ENV216	100093	/	2023/03/17	1 Year
2	Three-phase artificial power network	Schwarzback Mess	NNLK8129	8129178	/	2023/03/17	1 Year
3.	Receiver	R&S	ESCI	100492	V3.0-10-2	2023/03/17	1 Year
4	Receiver	R&S	ESPI	101202	V3.0-10-2	2023/03/17	1 Year
5	Spectrum analyzer	Agilent	9020A	MT-E306	A14.16	2023/03/17	1 Year
6	Bilong Antenna	Sunol Sciences	JB3	A121206	/	2023/03/17	1 Year
7	Horn antenna	HF Antenna	HF Antenna	MT-E158	/	2023/03/17	1 Year
8	Loop antenna	Beijing Daze	ZN30900B	/	/	2023/03/17	1 Year
9	Horn antenna	R&S	OBH100400	26999002	/	2023/03/17	1 Year
10	Wireless Communication Test Set	R&S	CMW500	/	CMW-BASE-3.7.21	2023/03/17	1 Year
11	Spectrum analyzer	R&S	FSP	100019	V4.40 SP2	2023/03/17	1 Year
12	High gain antenna	Schwarzbeck	LB-180400KF	MT-E389	/	2023/03/17	1 Year
13	Preamplifier	Schwarzbeck	BBV 9743	MT-E390	/	2023/03/17	1 Year
14	Pre-amplifier	EMCI	EMC051845S E	MT-E391	/	2023/03/17	1 Year
15	Pre-amplifier	Agilent	83051A	MT-E392	/	2023/03/17	1 Year
16	High pass filter unit	Tonscend	JS0806-F	MT-E393	/	2023/03/17	1 Year
17	RF Cable(below1GHz)	Times	9kHz-1GHz	MT-E394	/	2023/03/17	1 Year
18	RF Cable(above 1GHz)	Times	1-40G	MT-E395	/	2023/03/17	1 Year
19	RF Cable (9KHz-40GHz)	Tonscend	170660	N/A	/	2023/03/17	1 Year

Note: The Cal.Interval was one year.

5 TEST CONDITIONS AND RESULTS

5.1 AC Power Conducted Emission

TEST CONFIGURATION

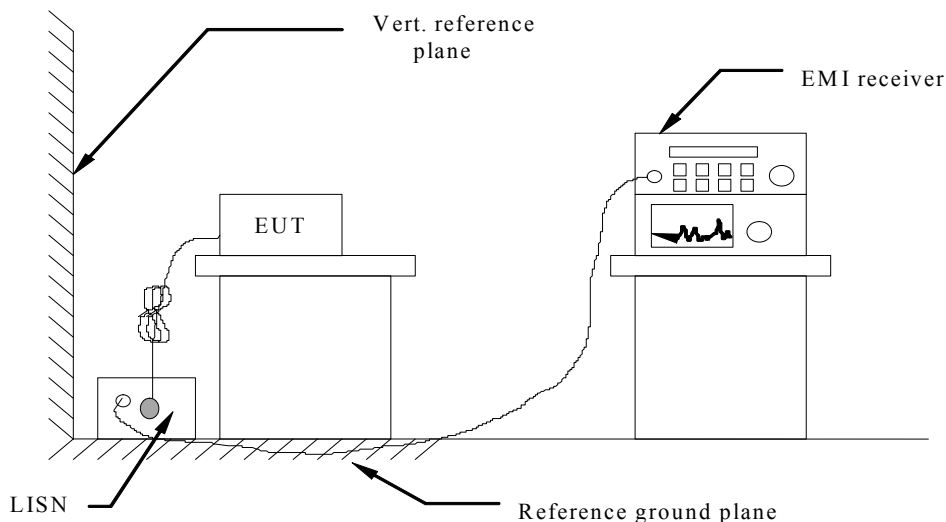

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 12V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :


Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


* Decreases with the logarithm of the frequency.

TEST RESULTS

Remark:

1. All modes were test at Low, Middle, and High channel; only the worst result of Middle Channel($\pi/4$ DQPSK) was reported as below:
2. Remark: Result=Reading value+Factor,and Margin=Limit- Result

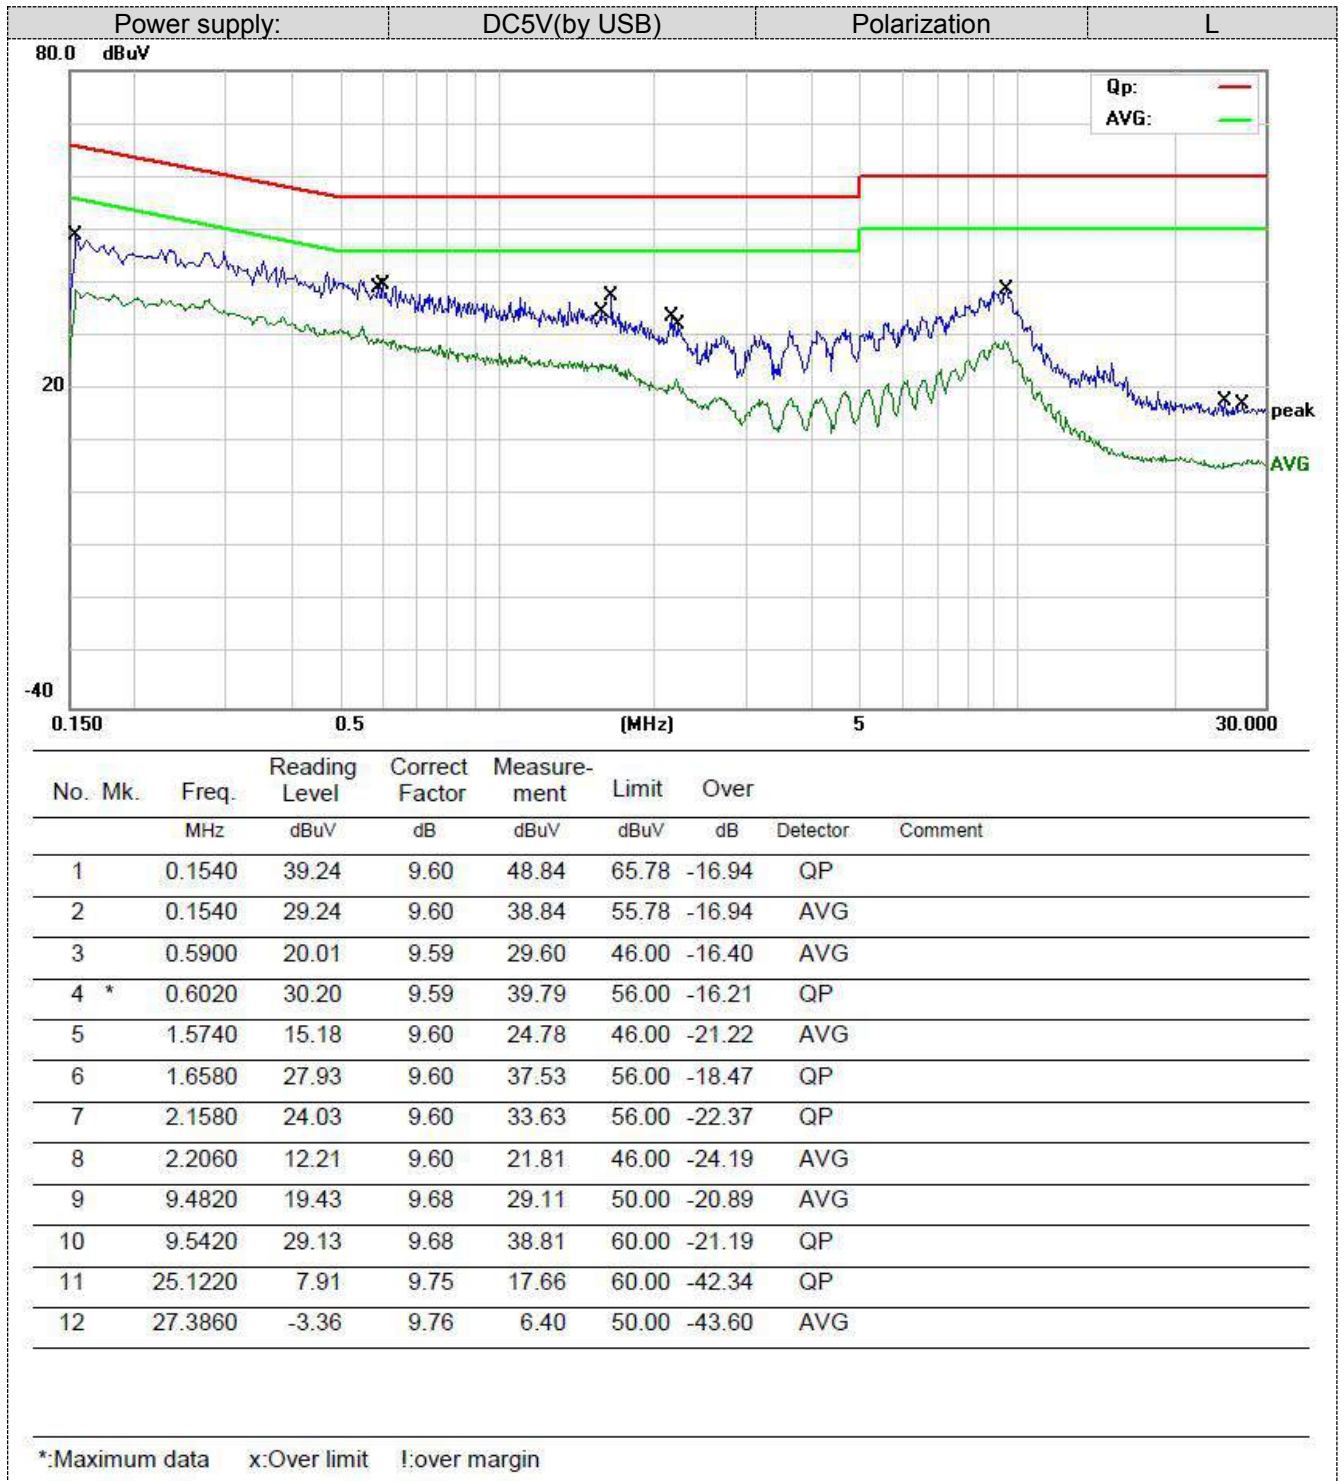


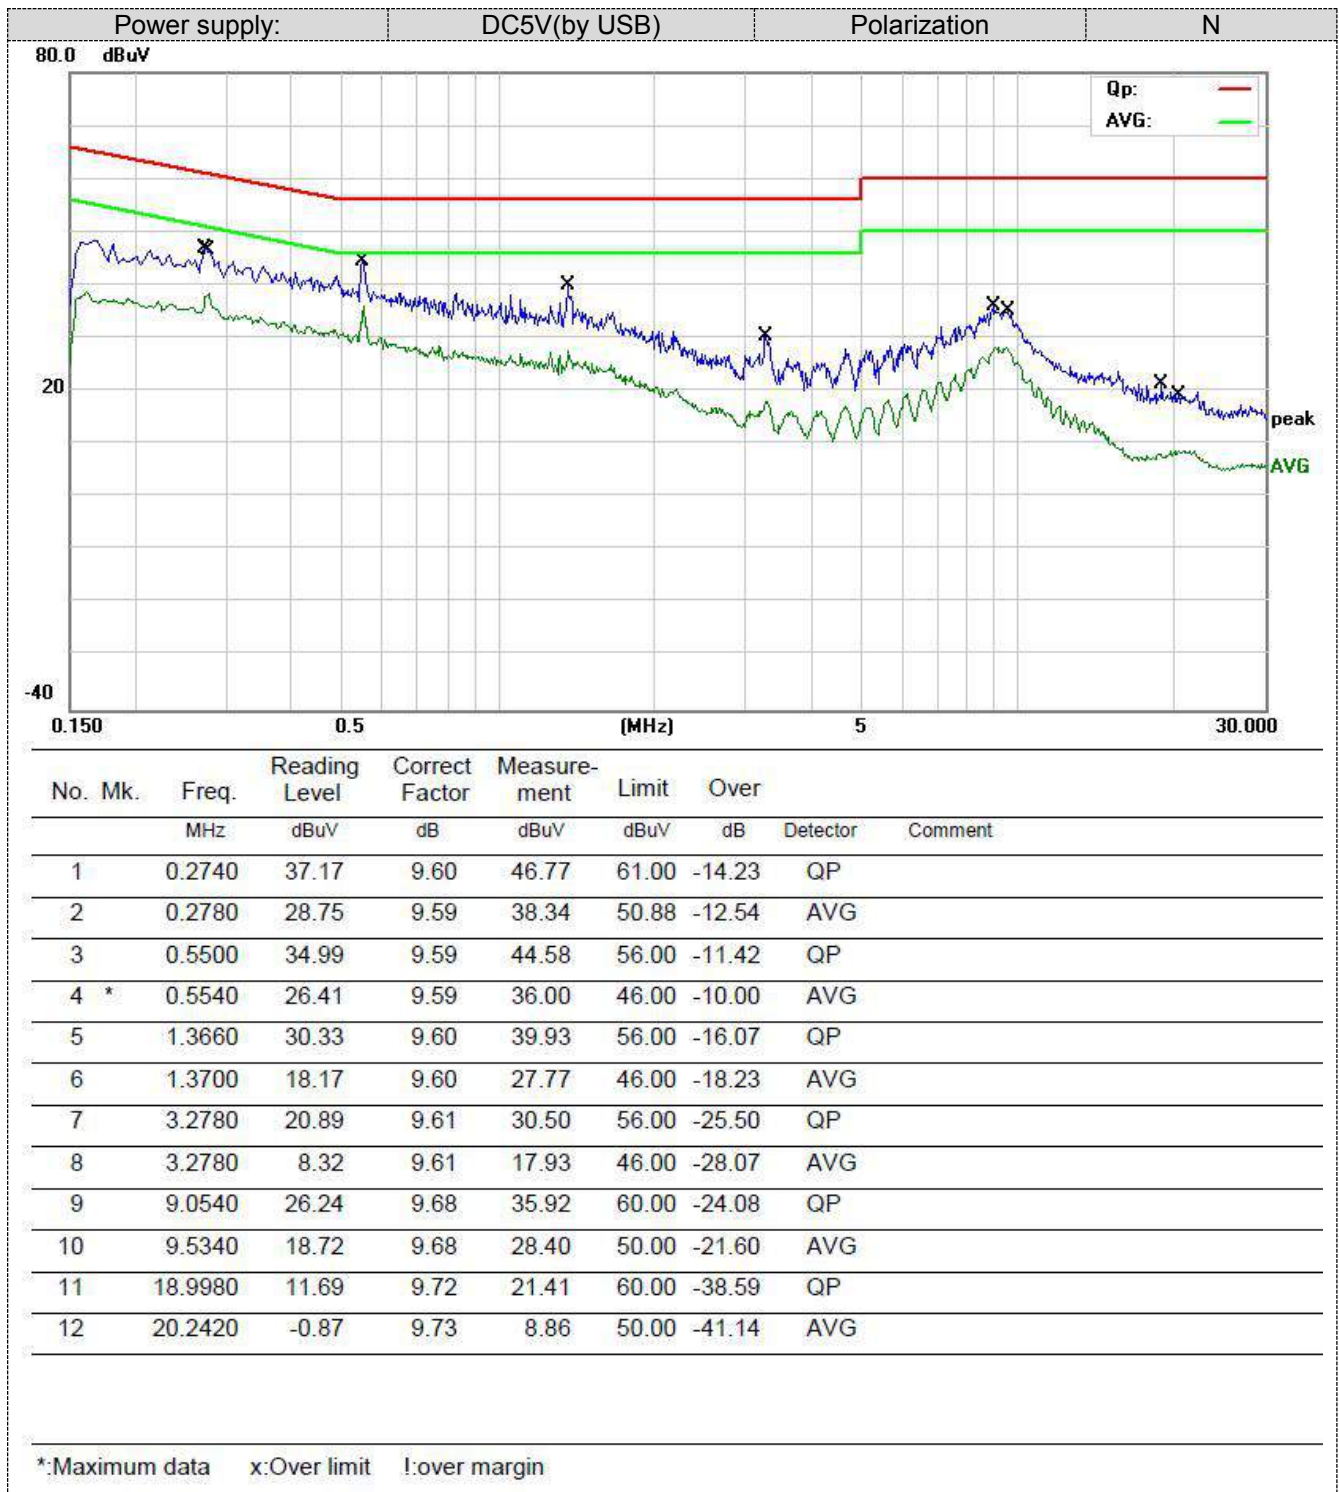


5.2 Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

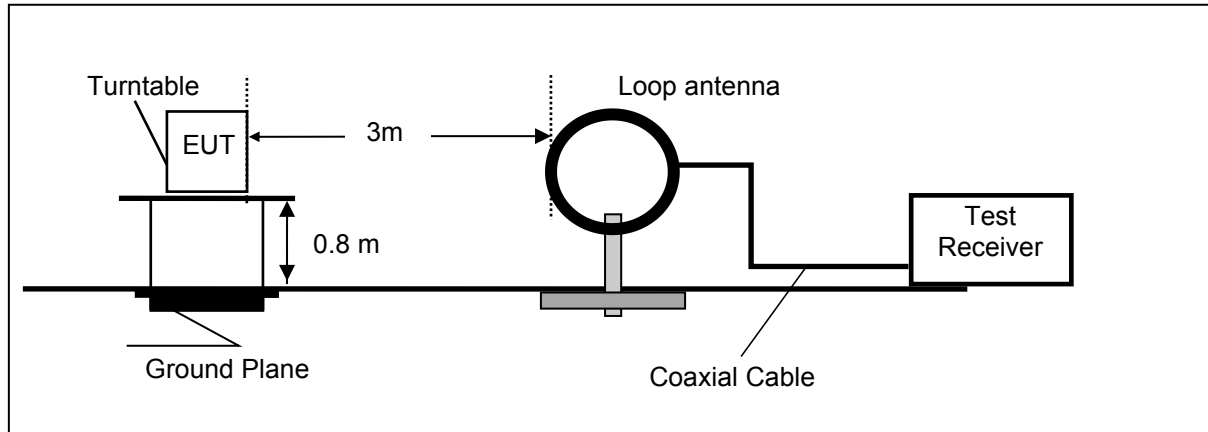

Frequency range 30MHz – 1000MHz

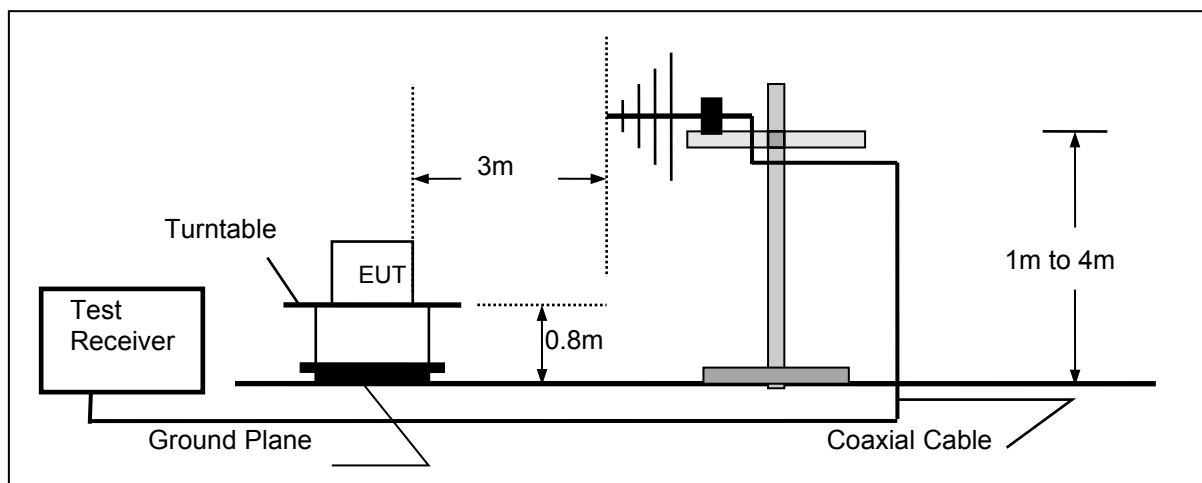

Frequency range above 1GHz-25GHz

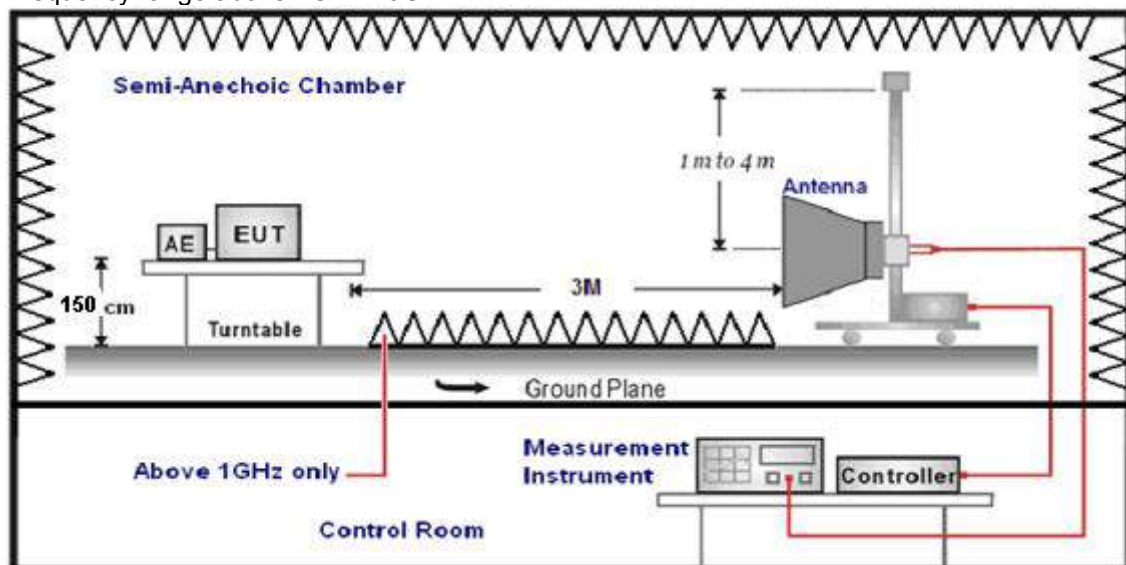

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

$$Transd=AF +CL-AG$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500


TEST RESULTS

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. We measured Radiated Emission at GFSK, $\pi/4$ DQPSK, 8DPSK mode from 9 KHz to 25GHz and recorded worst case at $\pi/4$ DQPSK 2DH5 mode.
3. For below 1GHz testing recorded worst at 8DPSK 3DH5 middle channel.
4. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
5. Remark: Result=Reading value+Factor

For 30MHz-1GHz

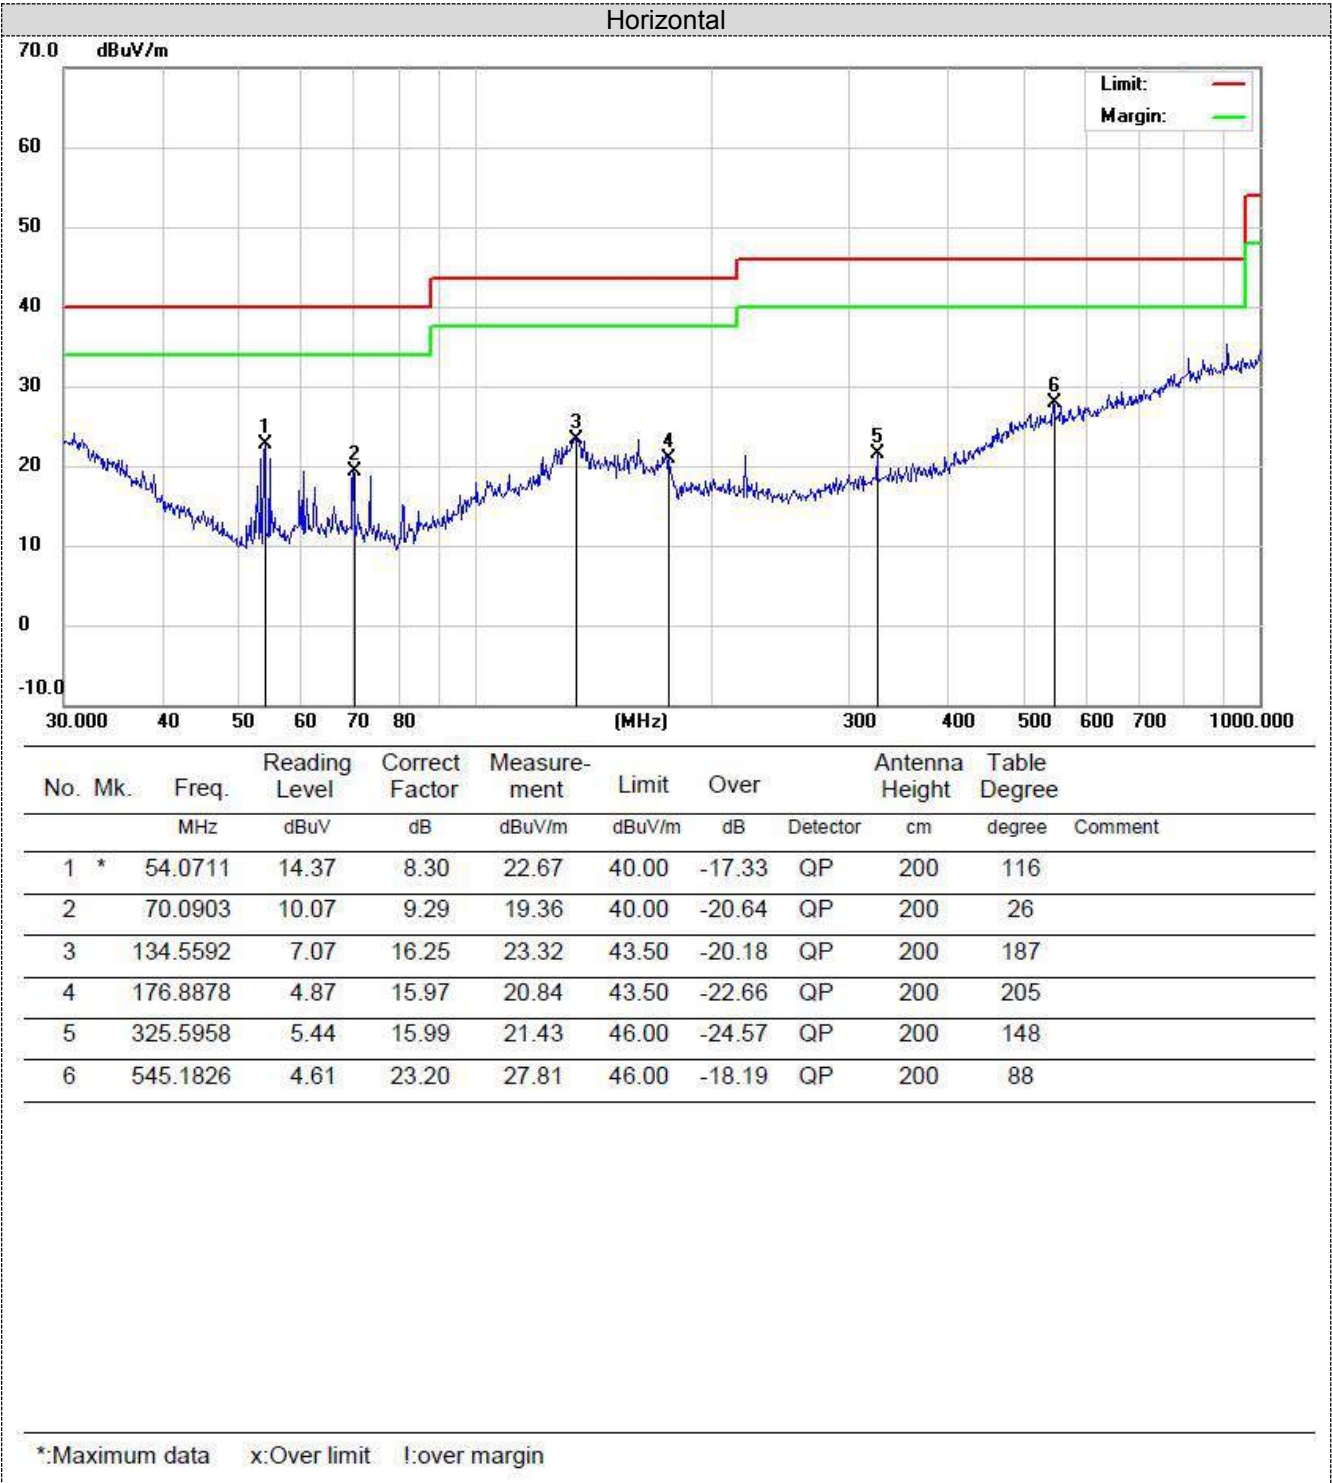

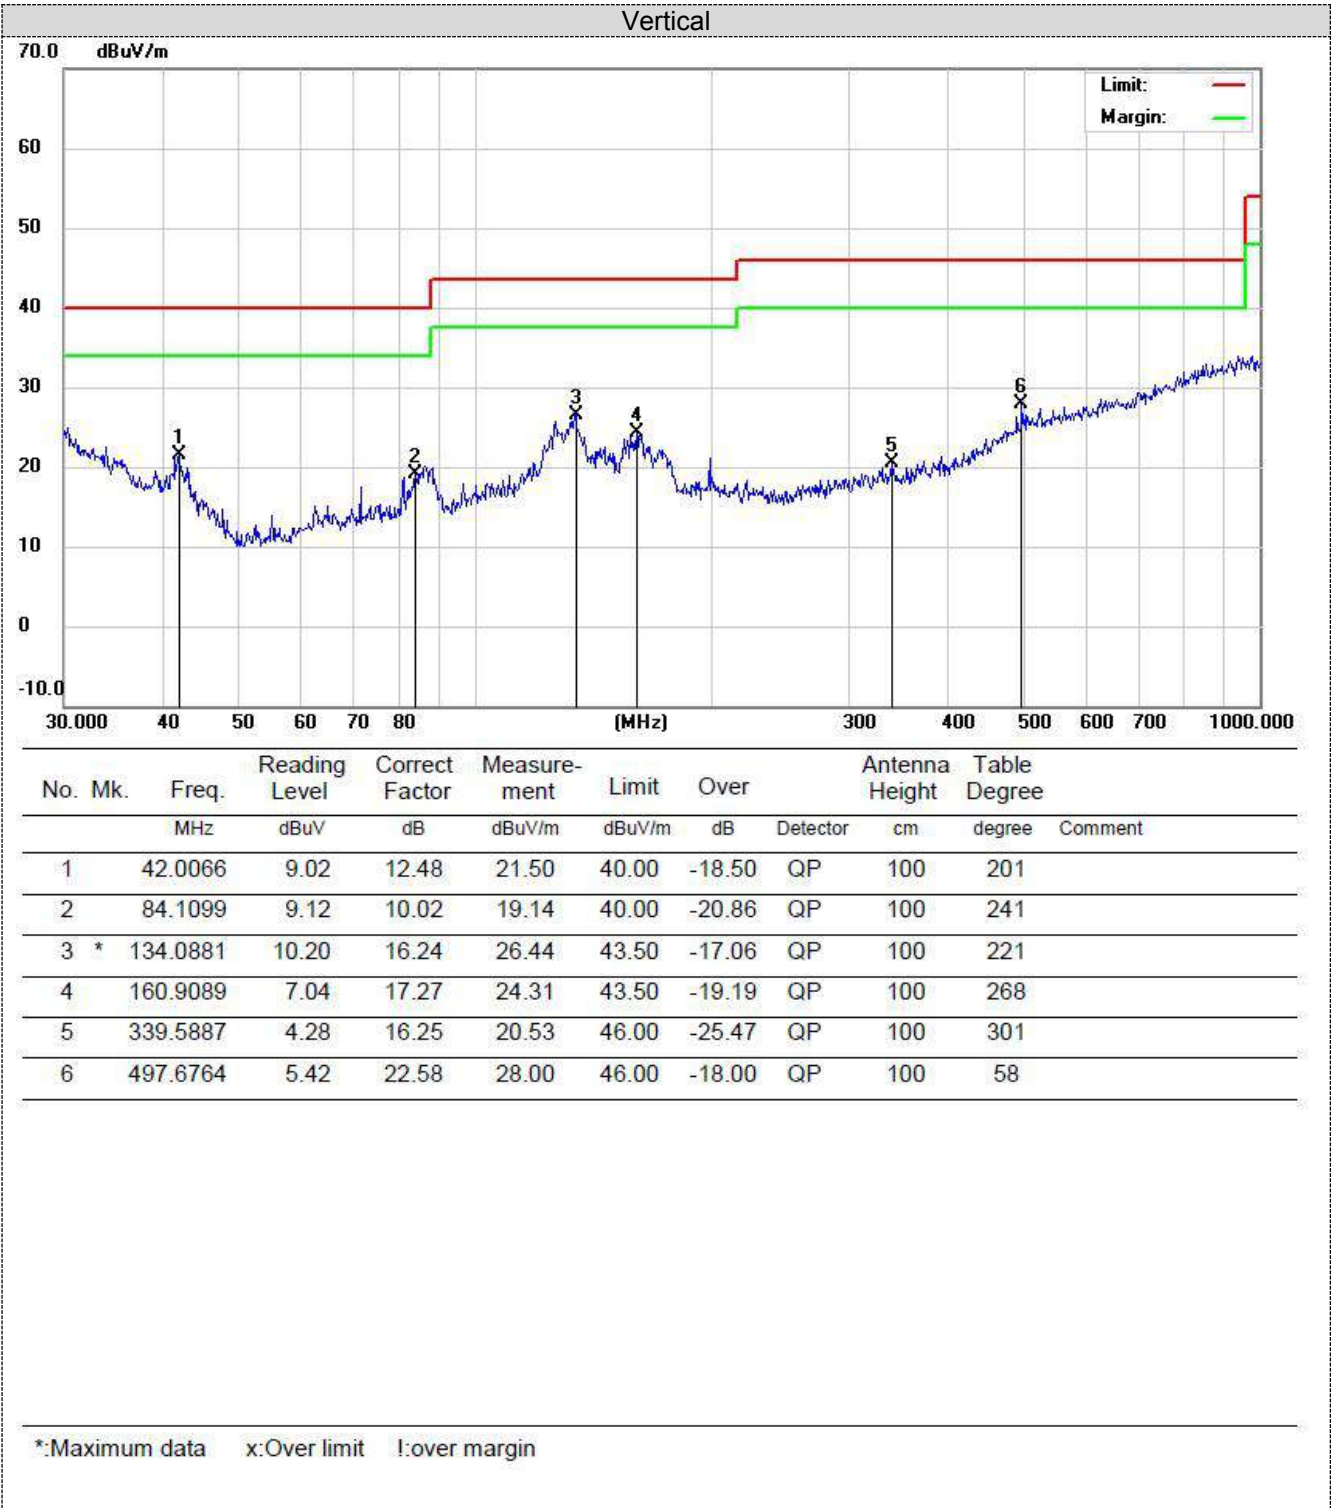

For 1GHz to 25GHz

Note: GFSK, $\pi/4$ DQPSK, 8DPSK all have been tested, only worse case GFSK is reported.

GFSK (above 1GHz)

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804	55.53	PK	74	18.47	53.63	31.42	6.98	36.5	1.9
4804	44.94	AV	54	9.06	43.04	31.42	6.98	36.5	1.9
7206	52.58	PK	74	21.42	41.98	37.03	8.87	35.3	10.6
7206	42.28	AV	54	11.72	31.68	37.03	8.87	35.3	10.6

Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804	54.97	PK	74	19.03	53.07	31.42	6.98	36.5	1.9
4804	45.29	AV	54	8.71	43.39	31.42	6.98	36.5	1.9
7206	55.01	PK	74	18.99	44.41	37.03	8.87	35.3	10.6
7206	42.17	AV	54	11.83	31.57	37.03	8.87	35.3	10.6

Frequency(MHz):			2441		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882	56.08	PK	74	17.92	54.02	30.98	7.58	36.5	2.06
4882	43.29	AV	54	10.71	41.23	30.98	7.58	36.5	2.06
7323	51.97	PK	74	22.03	41.05	37.66	8.56	35.3	10.92
7323	41.17	AV	54	12.83	30.25	37.66	8.56	35.3	10.92

Frequency(MHz):			2441		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882	56.31	PK	74	17.69	54.25	30.98	7.58	36.5	2.06
4882	46.71	AV	54	7.29	44.65	30.98	7.58	36.5	2.06
7323	54.11	PK	74	19.89	43.19	37.66	8.56	35.3	10.92
7323	42.05	AV	54	11.95	31.13	37.66	8.56	35.3	10.92

Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960	55.25	PK	74	18.75	52.18	31.47	7.8	36.2	3.07
4960	47.42	AV	54	6.58	44.35	31.47	7.8	36.2	3.07
7440	52.45	PK	74	21.55	40.71	38.32	8.72	35.3	11.74
7440	44	PK	54	10	32.26	38.32	8.72	35.3	11.74

Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960	58.54	PK	74	15.46	55.47	31.47	7.8	36.2	3.07
4960	45.54	AV	54	8.46	42.47	31.47	7.8	36.2	3.07
7440	53.4	PK	74	20.6	41.66	38.32	8.72	35.3	11.74
7440	43.54	PK	54	10.46	31.8	38.32	8.72	35.3	11.74

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

5.3 Band Edge Compliance of RF Emission

TEST REQUIREMENT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

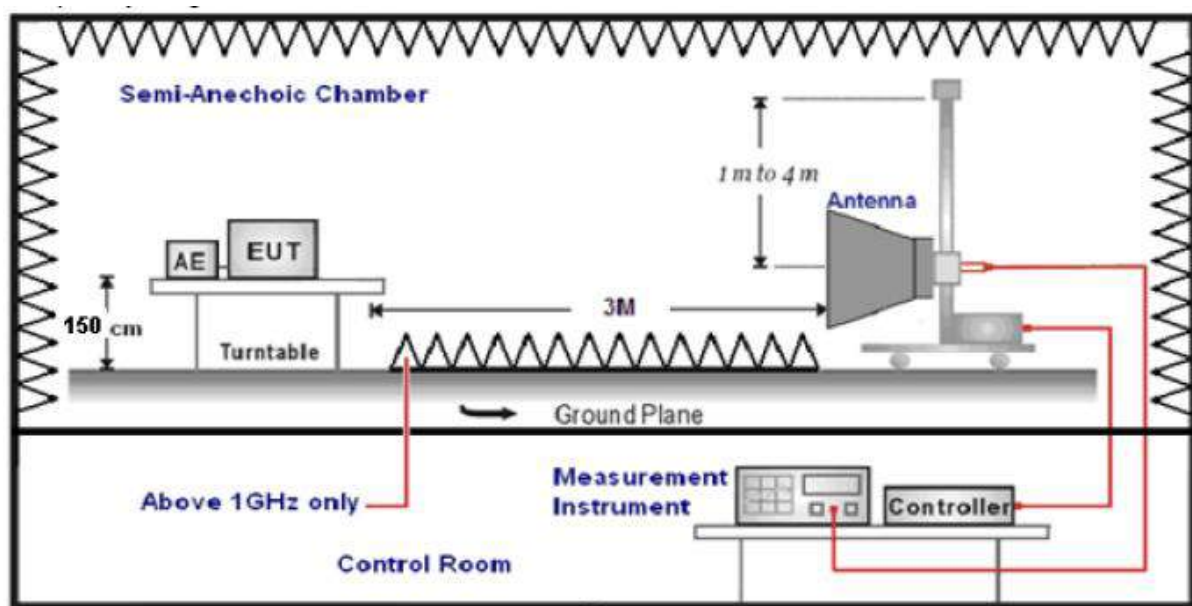

TEST PROCEDURE

1. The EUT was placed on a turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed..
5. The distance between test antenna and EUT was 3 meter:
6. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak


LIMIT


Below -20dB of the highest emission level in operating band.


Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

Results of Band Edges Test (Radiated)


GFSK

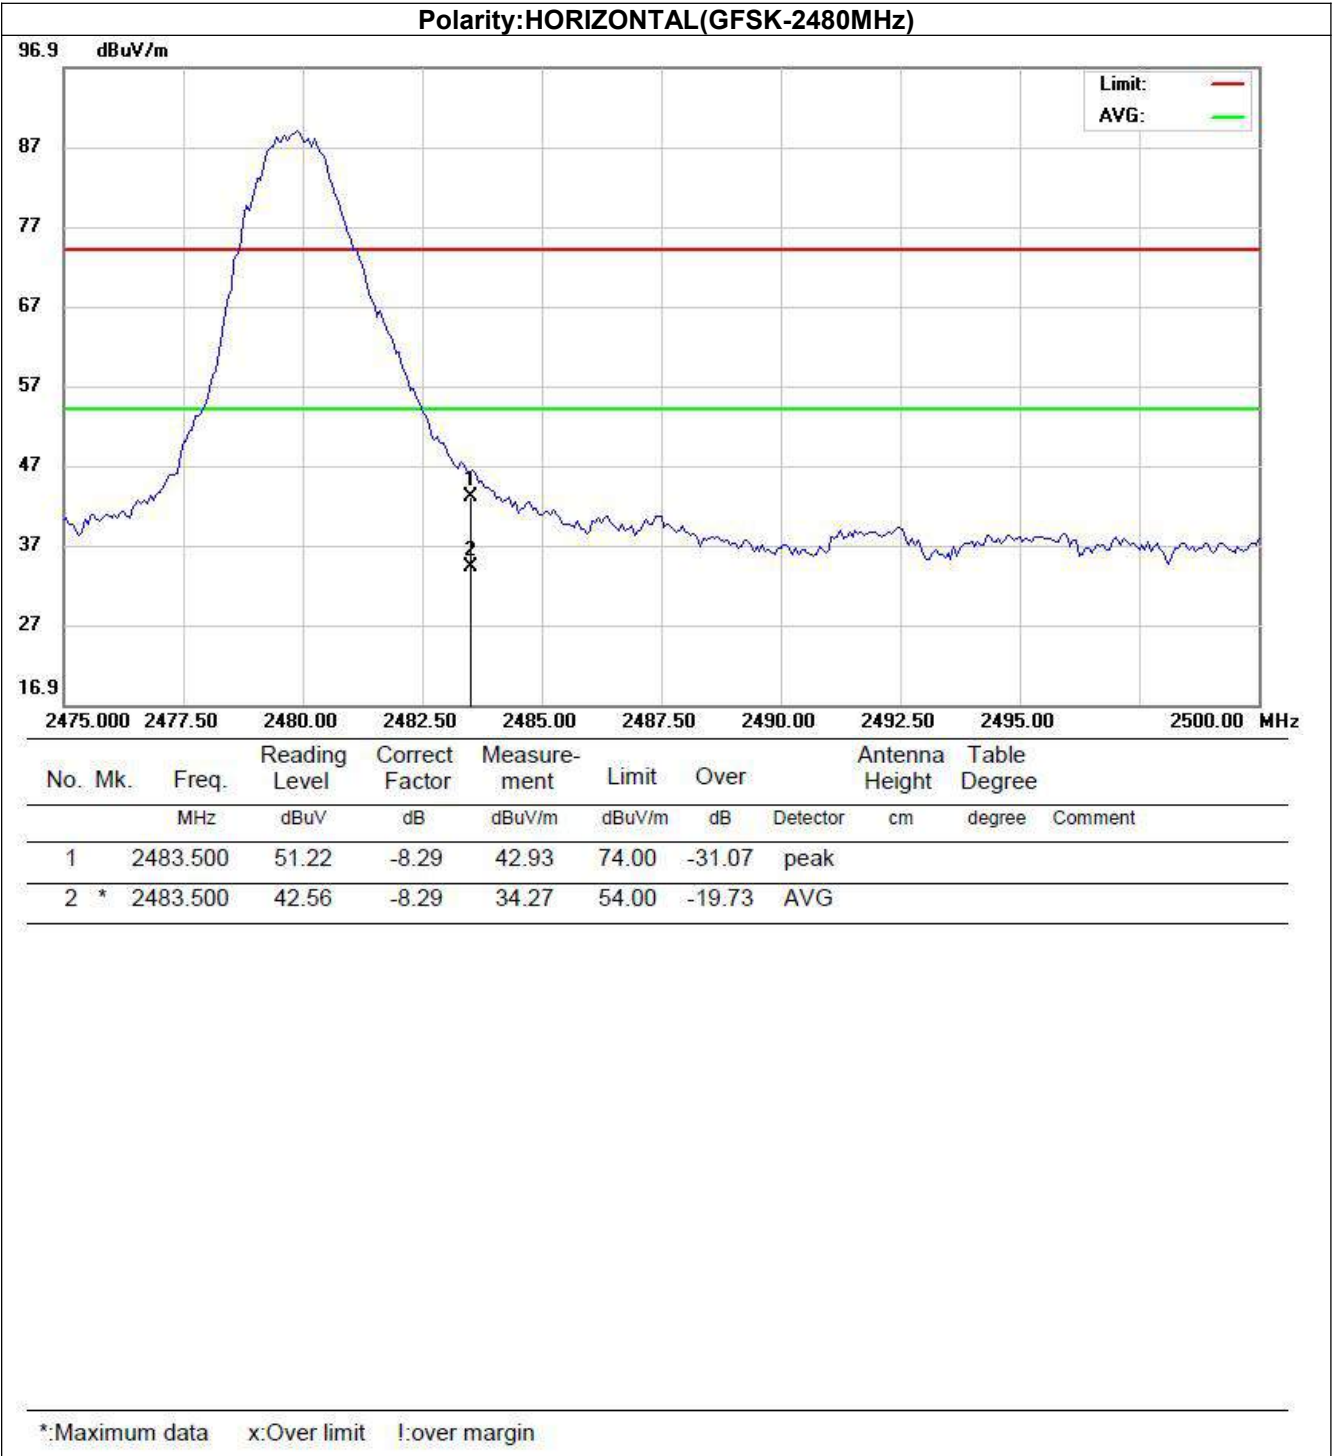

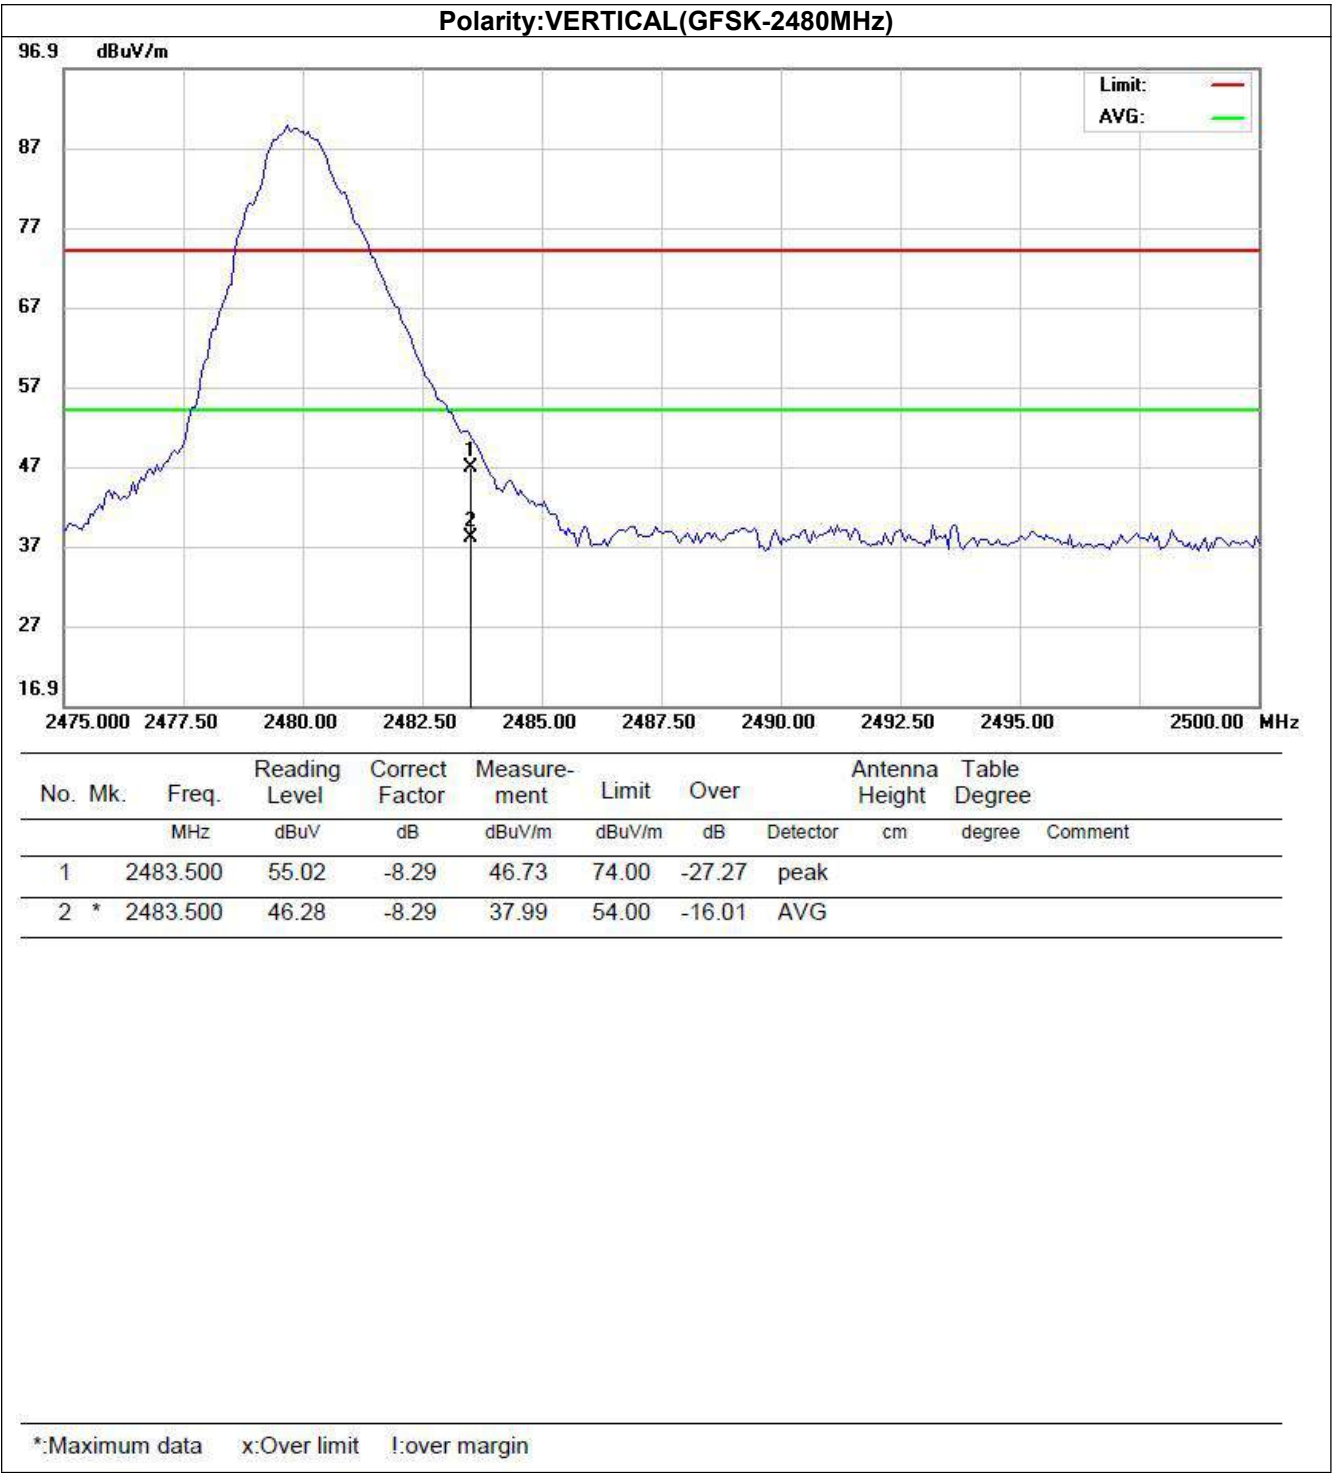


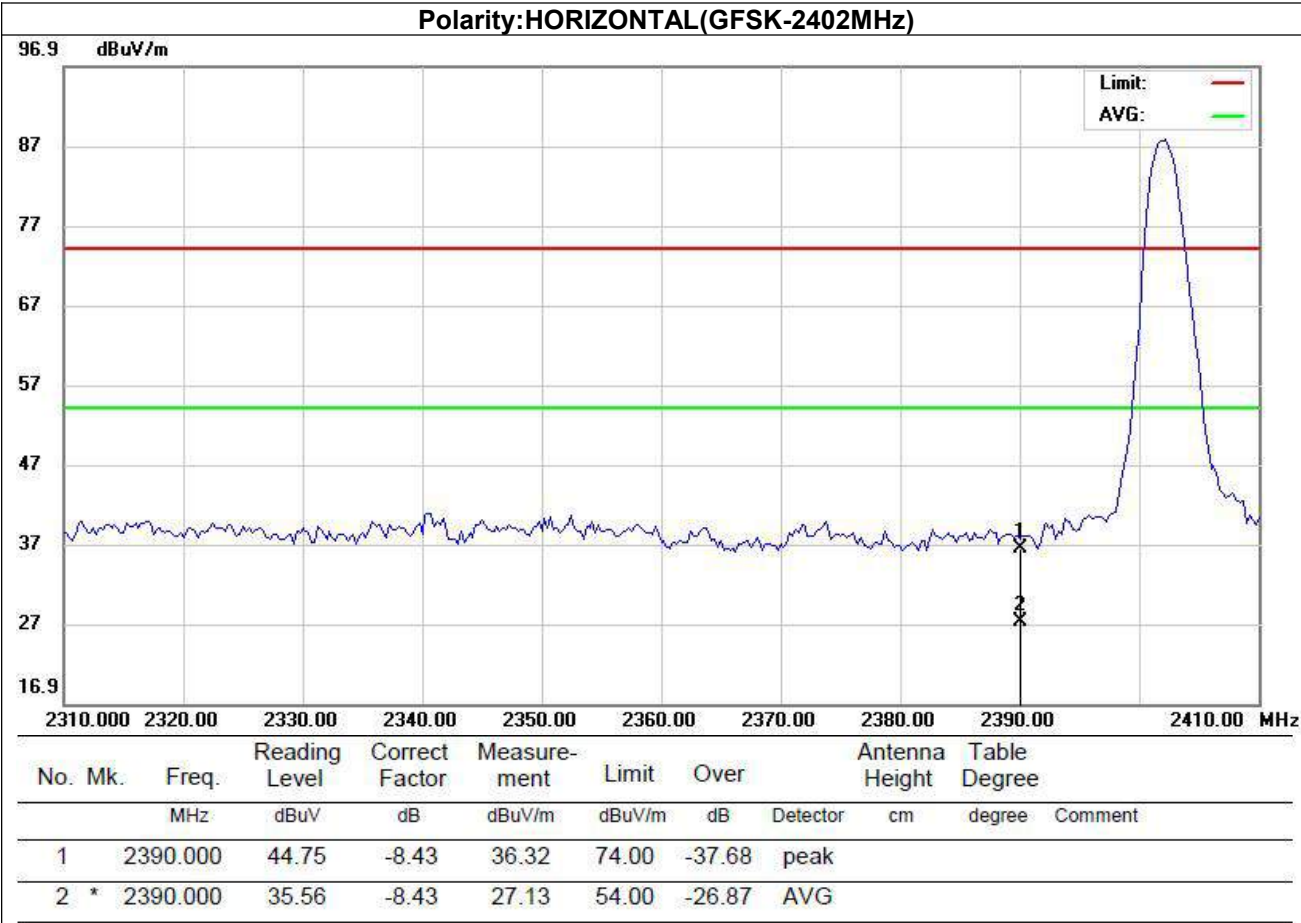

*:Maximum data x:Over limit l:over margin

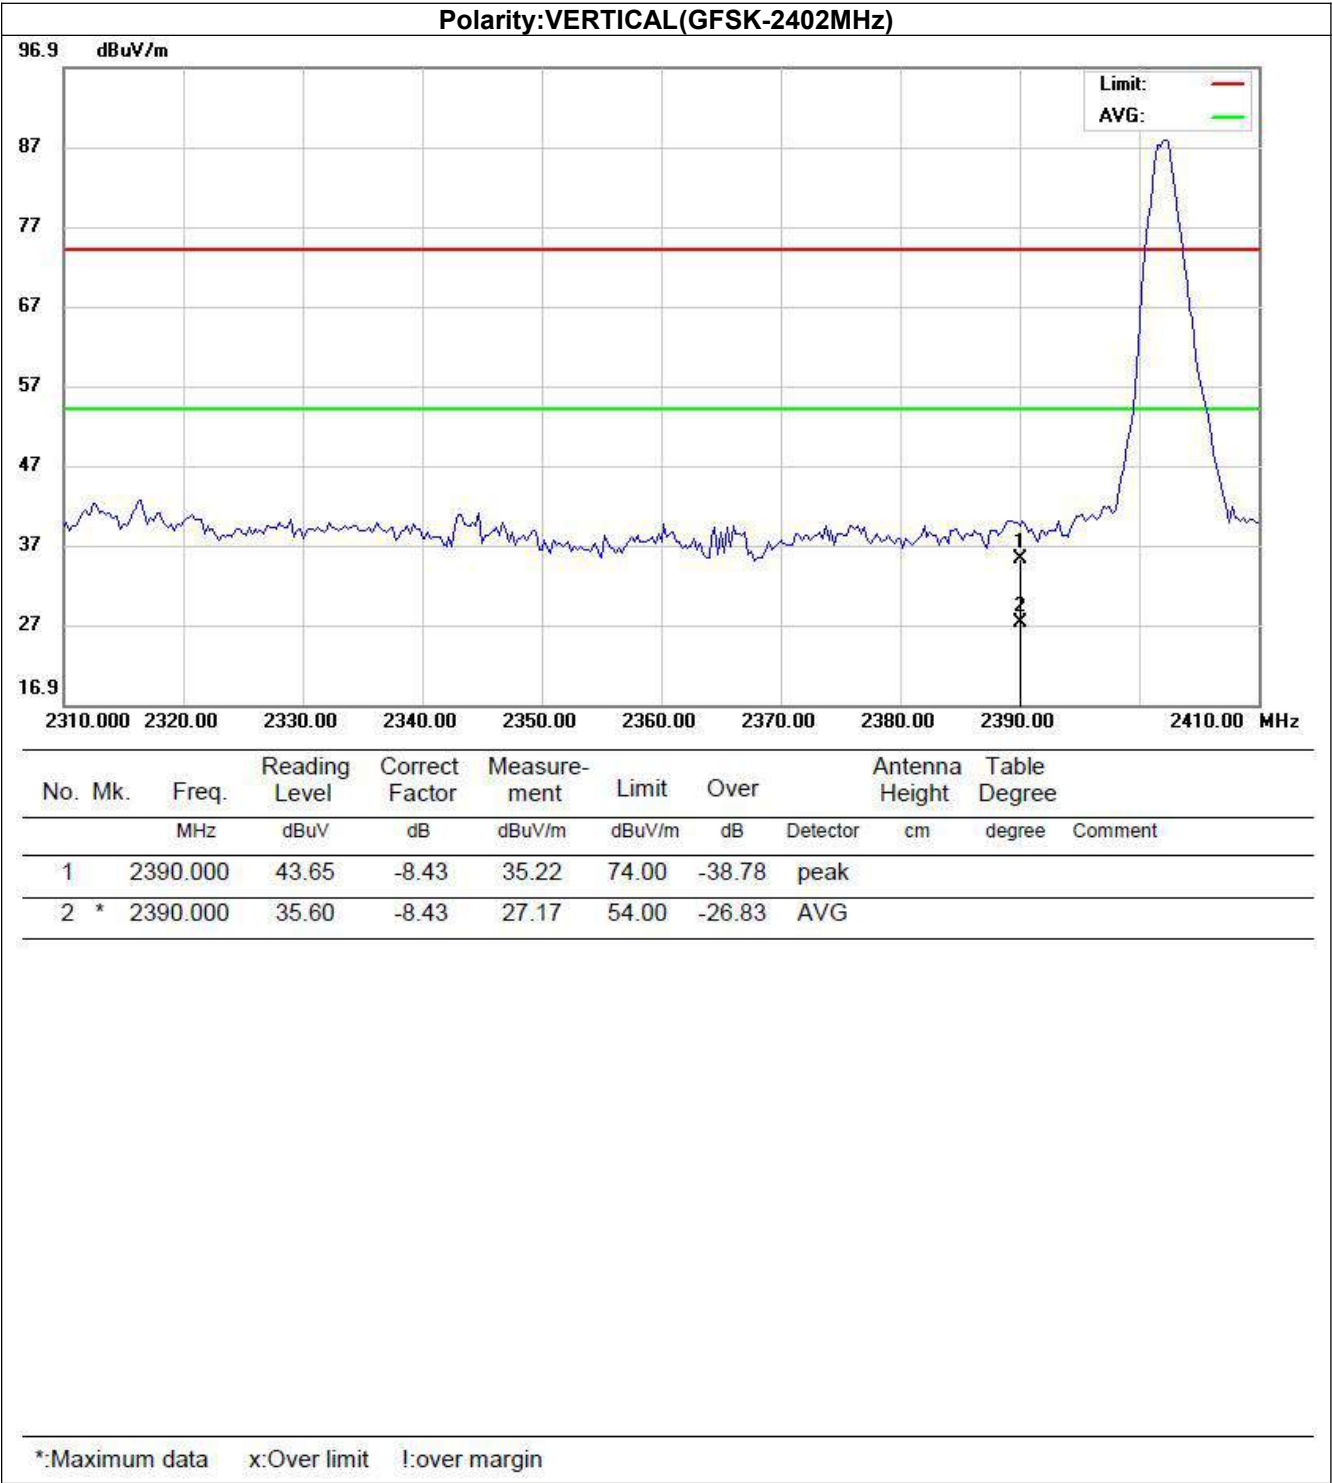


$\pi/4$ DQPSK

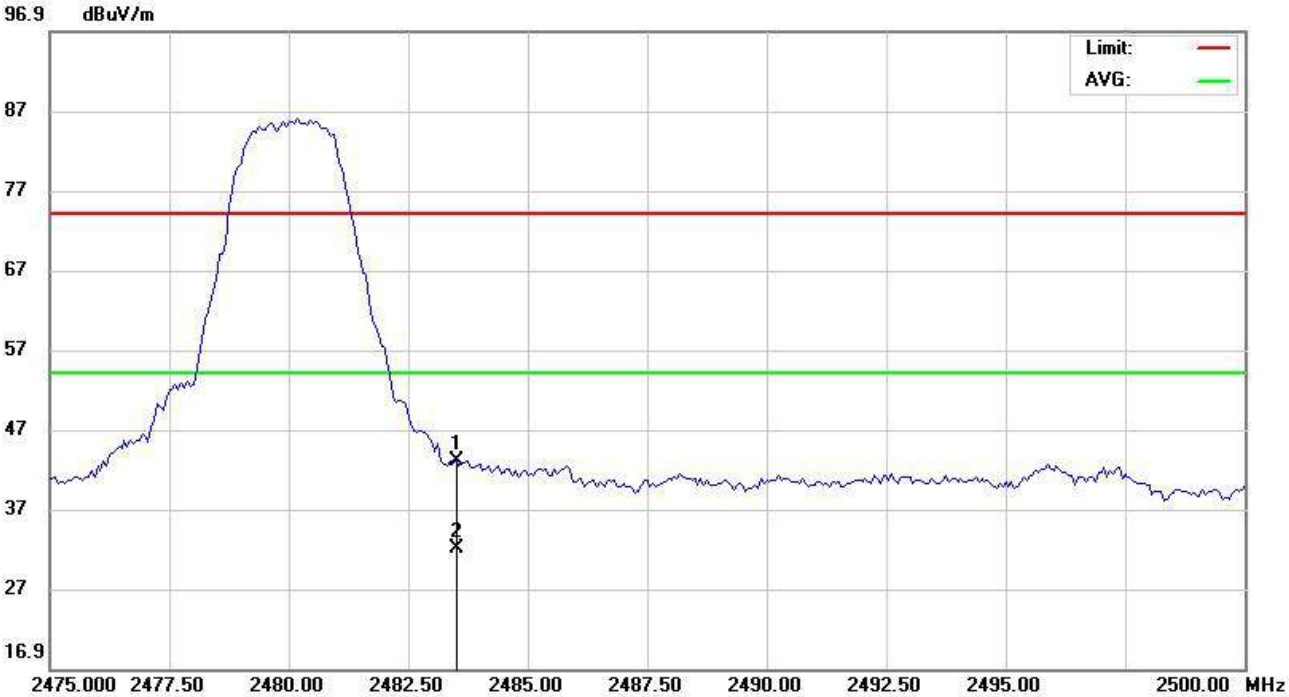


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2483.500	51.38	-8.29	43.09	74.00	-30.91	peak		
2	*	2483.500	40.21	-8.29	31.92	54.00	-22.08	AVG		


*:Maximum data x:Over limit !:over margin

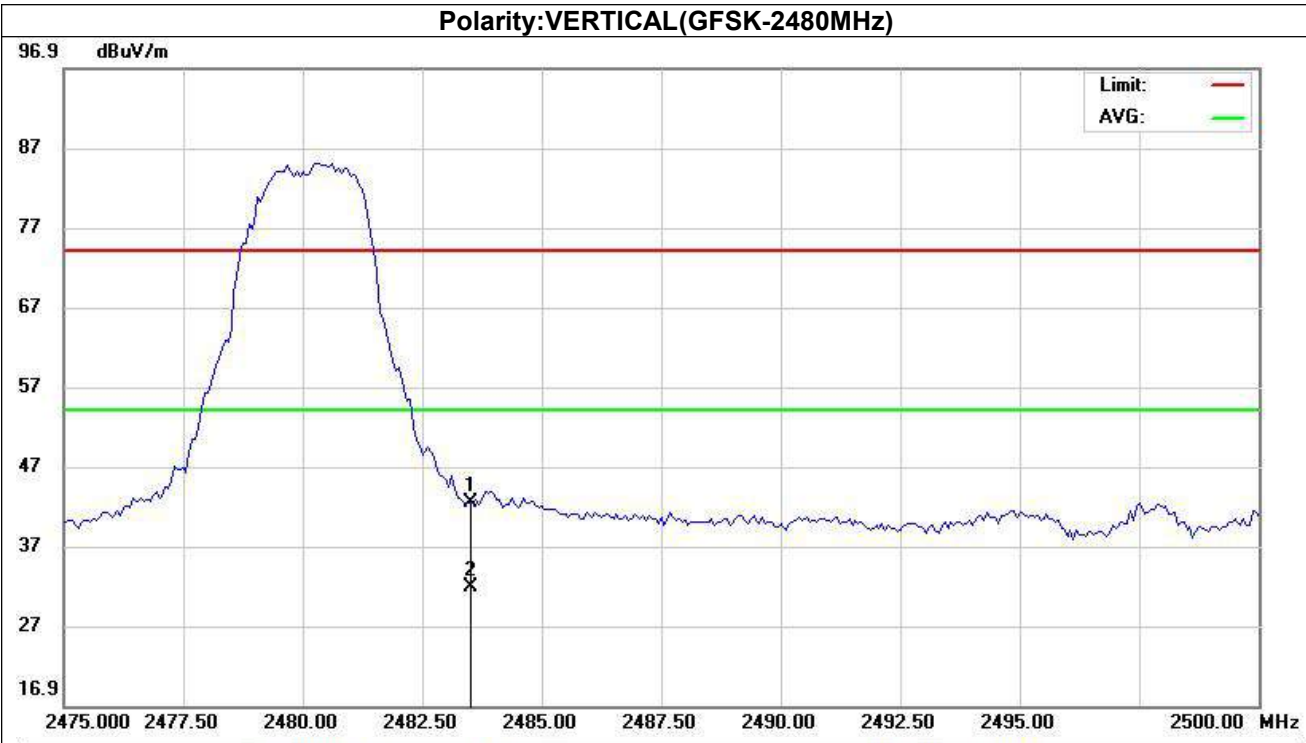

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	50.64	-8.29	42.35	74.00	-31.65			peak
2	*	2483.500	40.03	-8.29	31.74	54.00	-22.26			AVG

*:Maximum data x:Over limit !:over margin

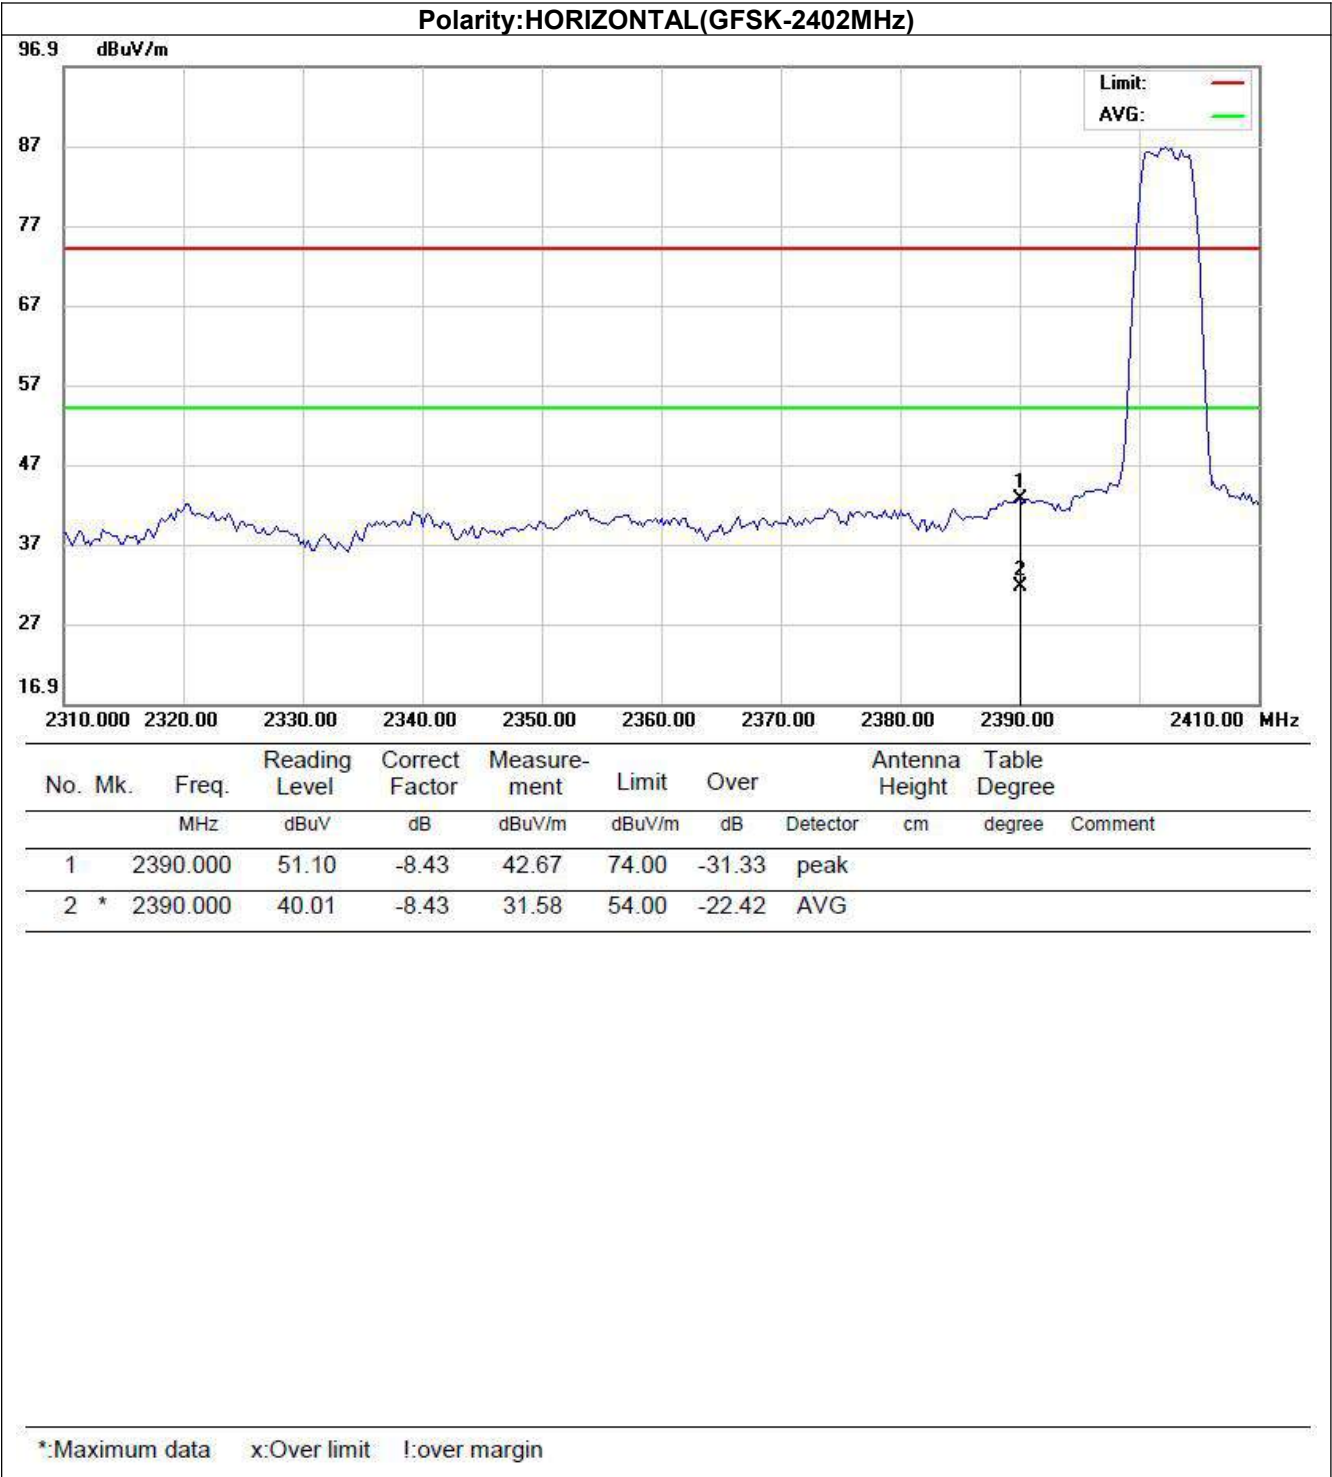

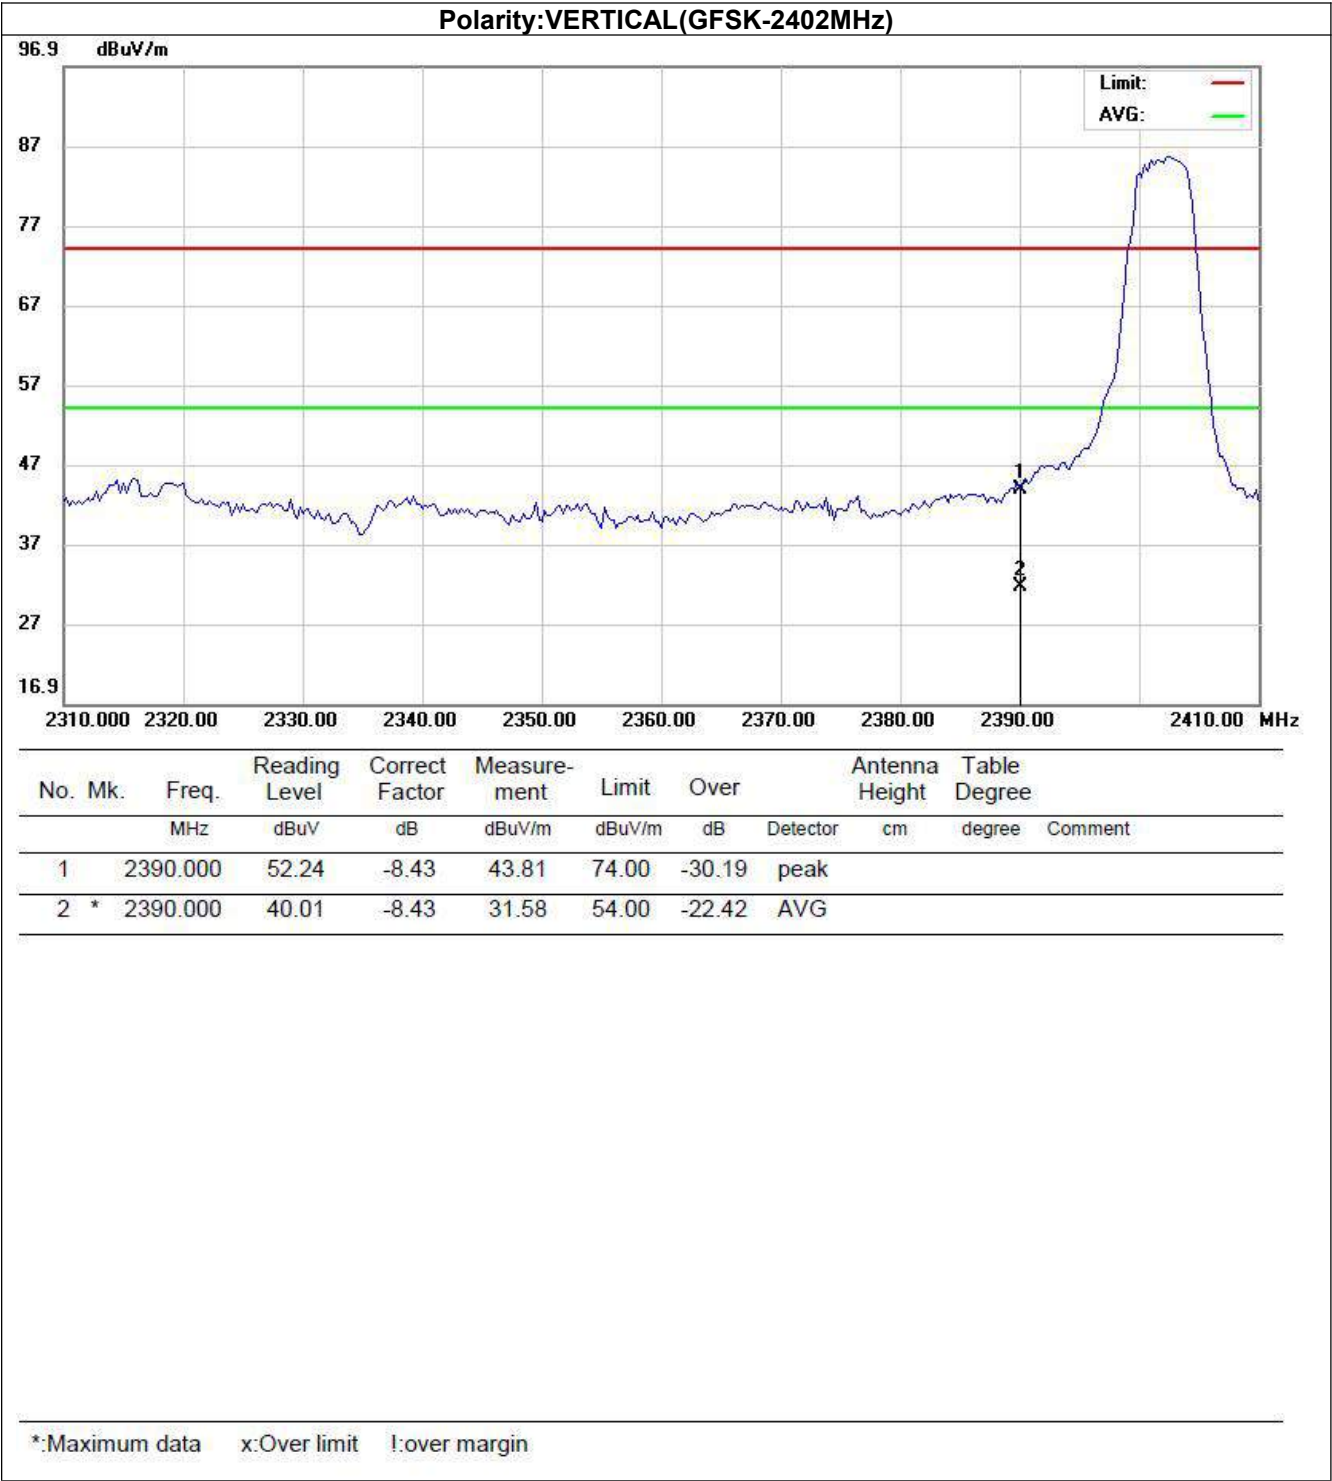



8DPSK




No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2483.500	51.88	-8.29	43.59	74.00	-30.41	peak		
2	*	2483.500	40.20	-8.29	31.91	54.00	-22.09	AVG		

*:Maximum data x:Over limit l:over margin

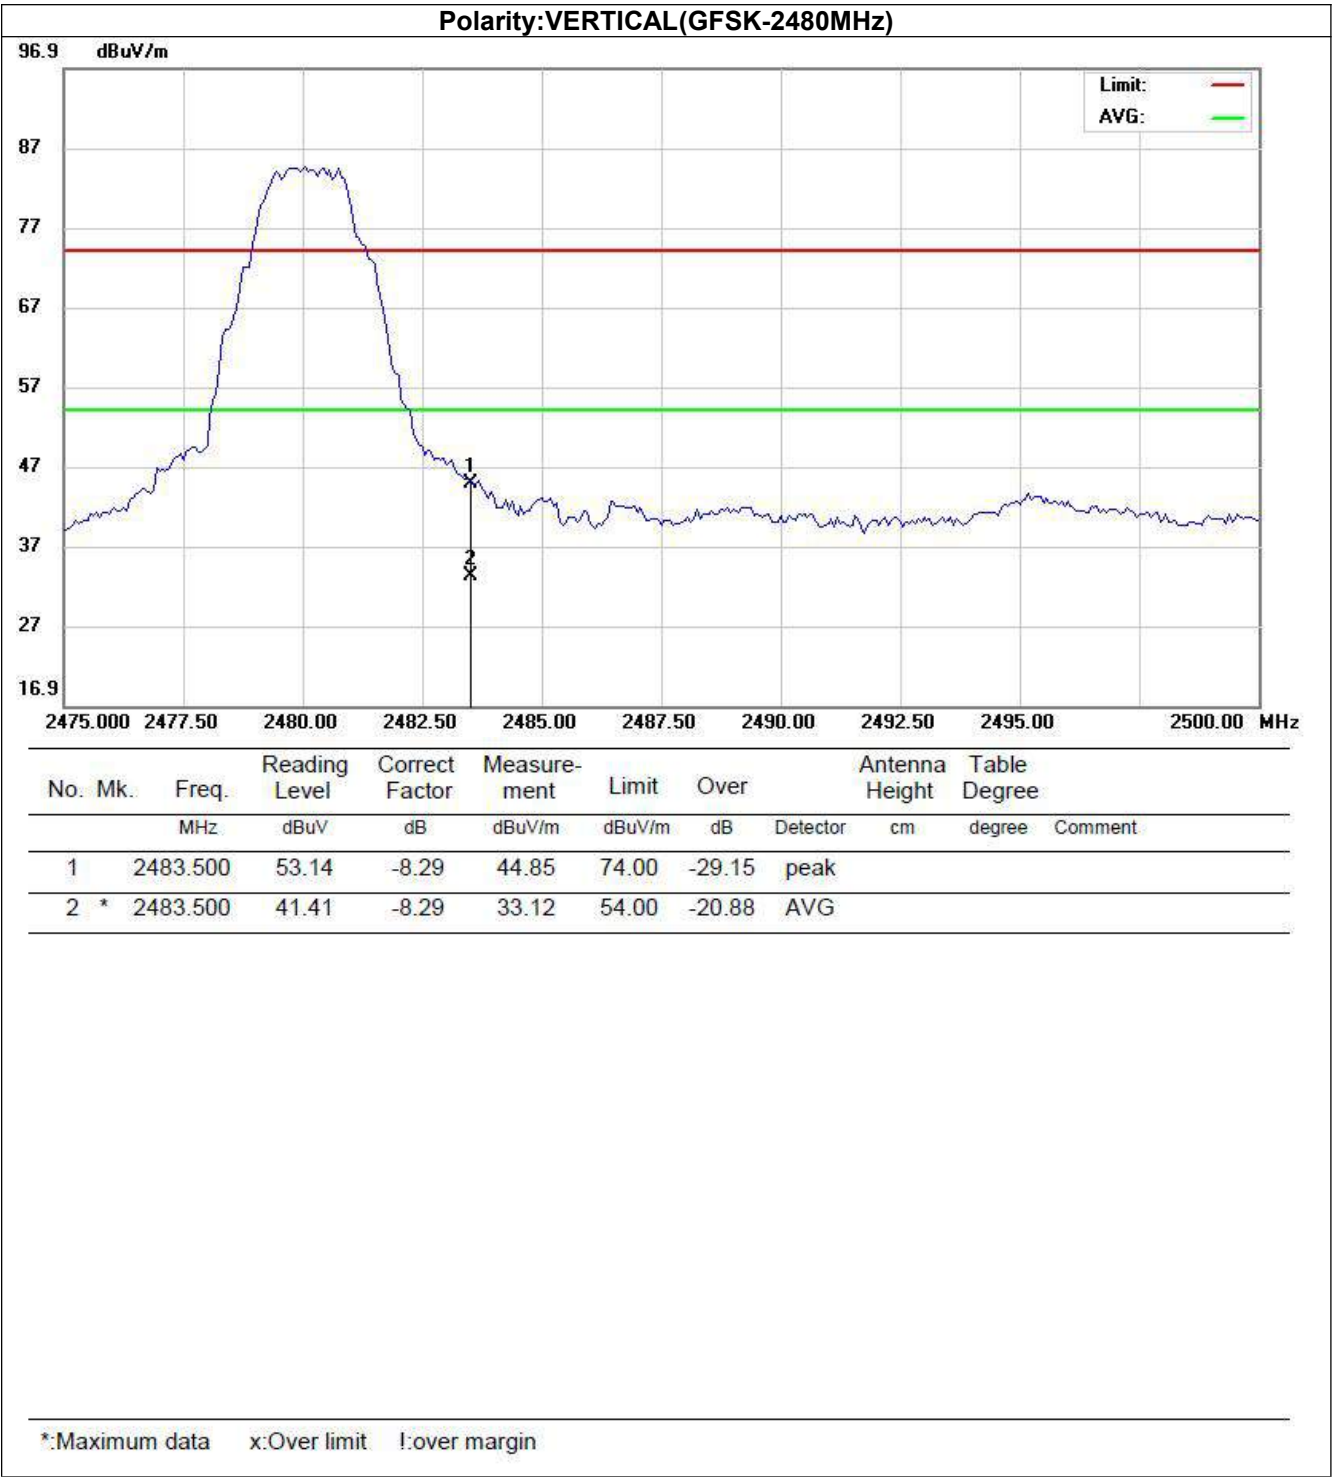

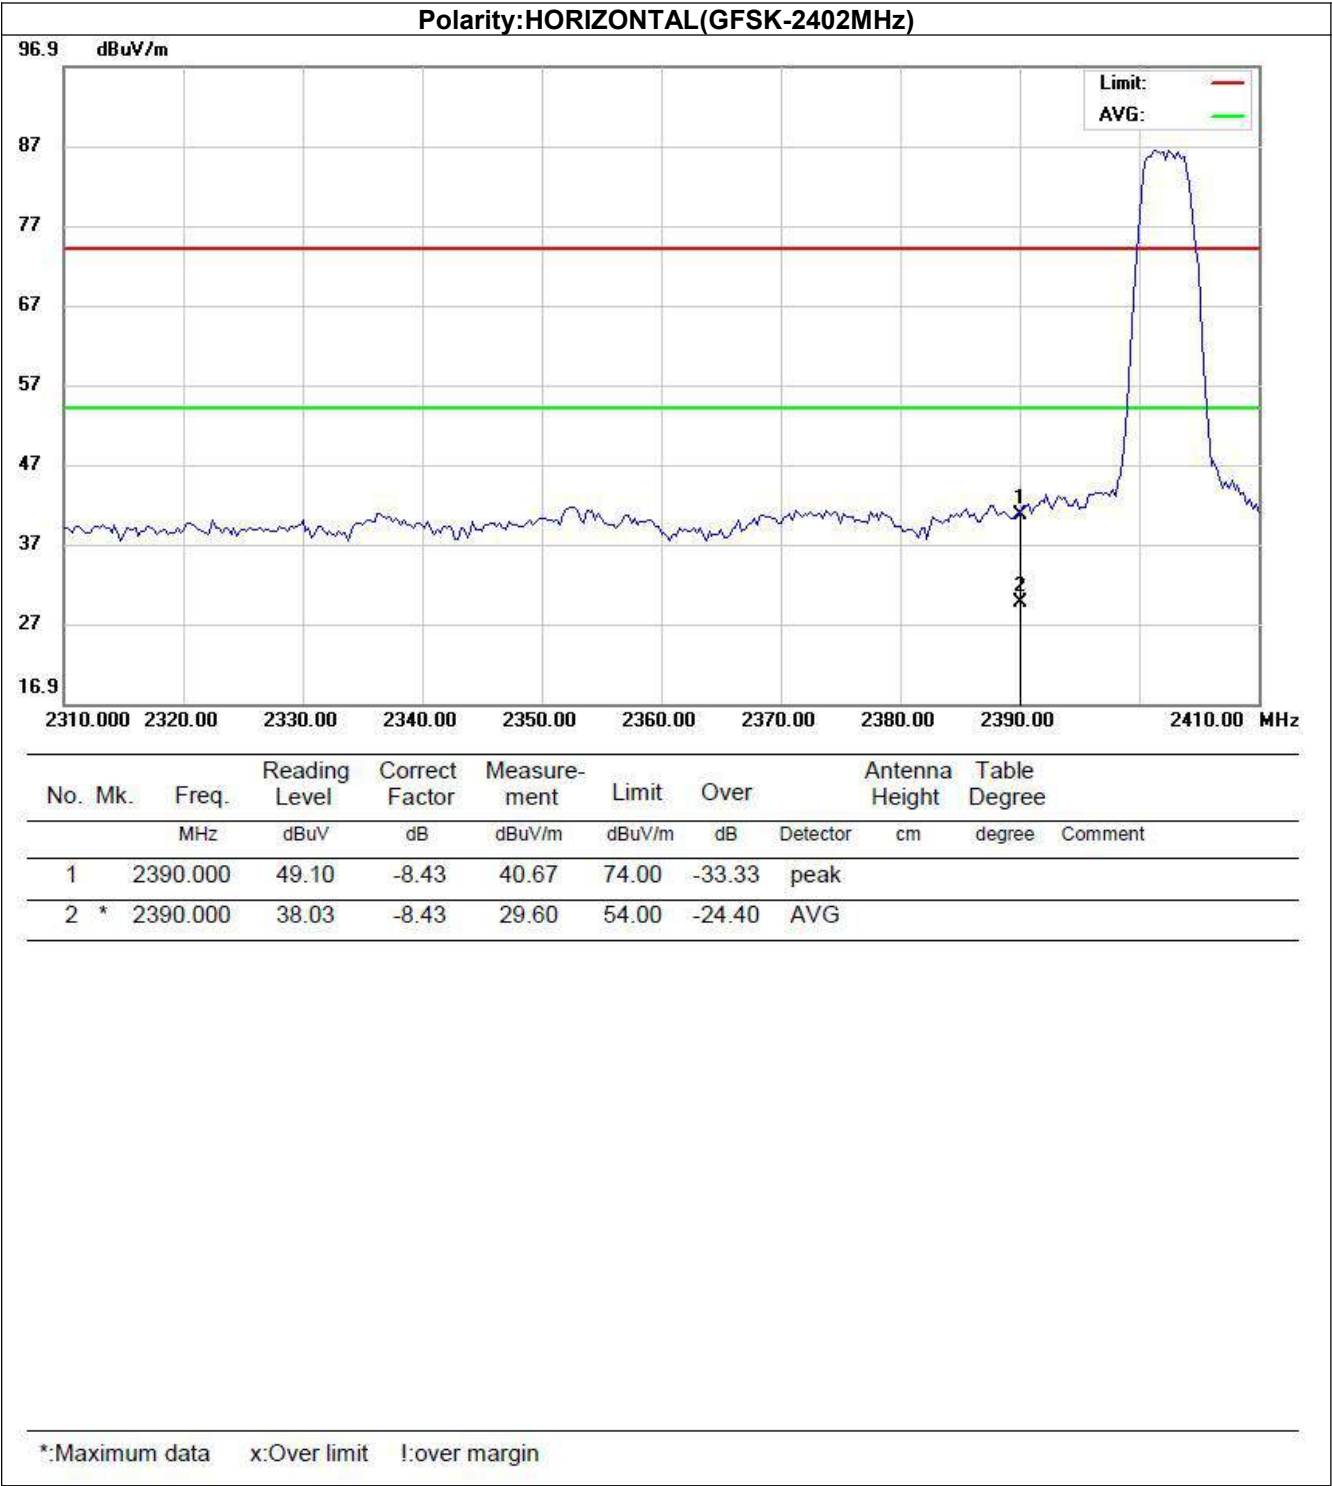

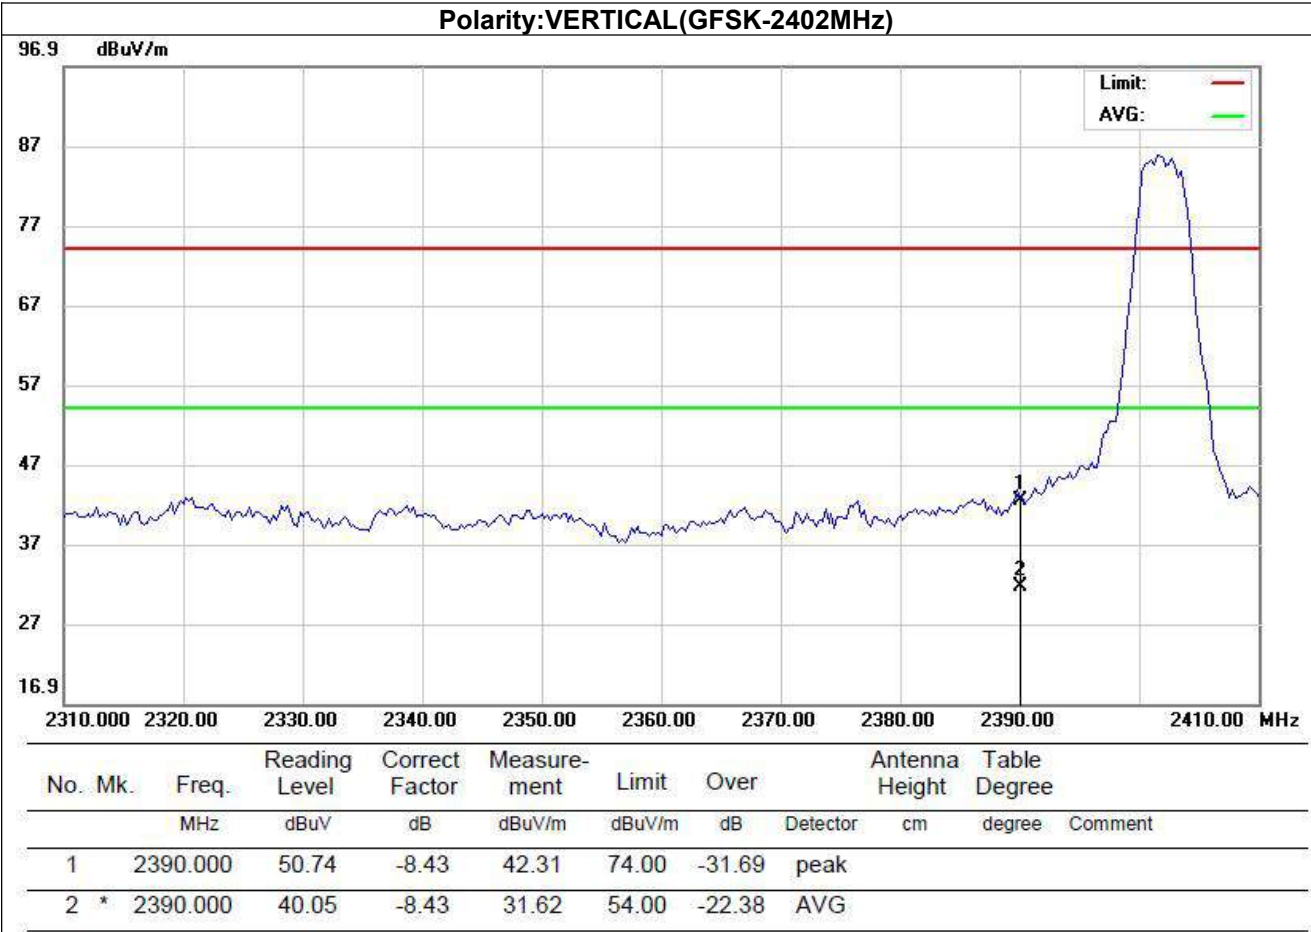

*:Maximum data x:Over limit !:over margin

5.4 Maximum Peak Output Power


Limit

The Maximum Peak Output Power Measurement is 125mW (20.97).

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the powersensor.

Test Configuration



Test Results

See Appendix I

5.5 20dB Bandwidth

Limit

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Test Configuration



Test Results

See Appendix III

5.6 Frequency Separation

LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the $2/3 \times 20\text{dB}$ bandwidth of the hopping channel, whichever is greater.

TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW.

TEST CONFIGURATION



TEST RESULTS

See Appendix IV

5.7 Number of hopping frequency

Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 100 KHz RBW and 300 KHz VBW.

Test Configuration



Test Results

See Appendix VIII

5.8 Time of Occupancy (Dwell Time)

Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 1MHz VBW, Span 0Hz.

Test Configuration



Test Results

See Appendix VII

5.9 Spurious RF Conducted Emission

TEST CONFIGURATION



TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and measure frequency range from 9KHz to 25GHz.

LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

Test Results

See Appendix V

5.10 Pseudorandom Frequency Hopping Sequence

TEST APPLICABLE


For 47 CFR Part 15C section 15.247 (a) (1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

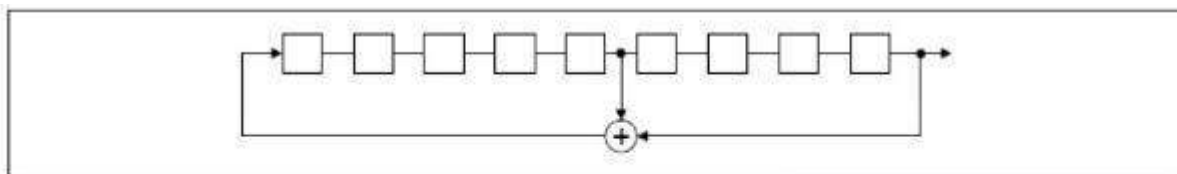

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

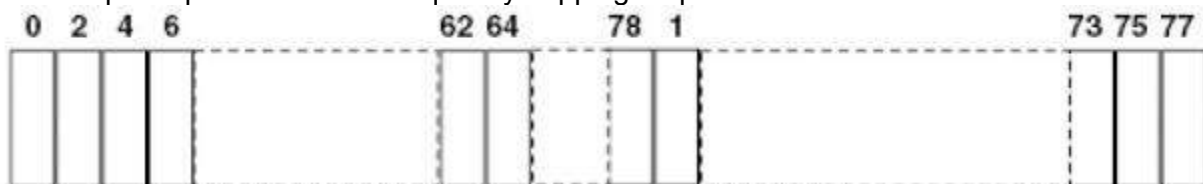

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

5.11 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The directional gains of antenna used for transmitting is -0.5dBi, and the antenna is a Chip antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

Results: Compliance.

6 Test Setup Photos of the EUT

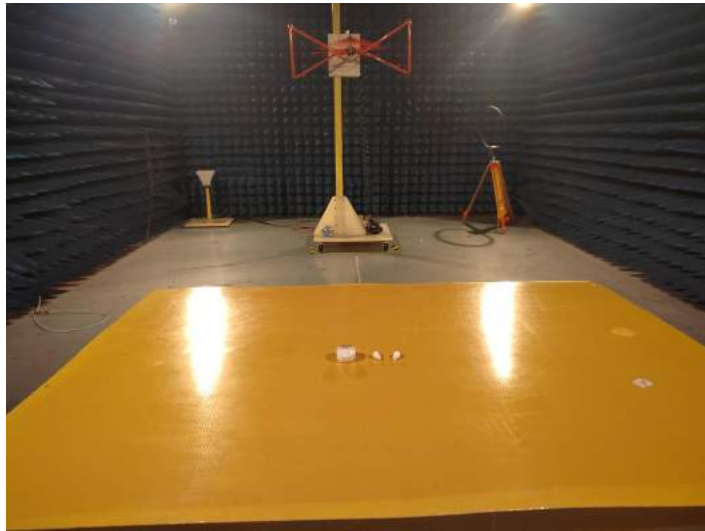

7 Photos of the EUT

See photo report

APPENDIX I. Conducted Peak Output Power

Test Result


Modulation	Packet Type	Channel	Peak Output Power (dBm)	Peak Output Power (mW)	Max. Avg. Power (dBm)	Limit (dBm)	Result
GFSK	DH5	0	2.749	1.883	None	30	PASS
		39	0.581	1.143	None		PASS
		78	-3.849	0.412	None		PASS
$\pi/4$ DQPSK	2-DH5	0	1.871	1.539	None	20.97	PASS
		39	0.013	1.003	None		PASS
		78	-5.892	0.258	None		PASS
8DPSK	3-DH5	0	1.438	1.393	None		PASS
		39	-1.290	0.743	None		PASS
		78	-6.759	0.211	None		PASS

APPENDIX II. 99% Bandwidth

Test Result

Modulation	Channel	99% BW (MHz)
GFSK	0	0.85770
	39	0.86346
	78	0.91126
π /4DQPSK	0	1.0480
	39	1.0525
	78	1.0169
8DPSK	0	1.0286
	39	1.0276
	78	1.0352

Test Graphs

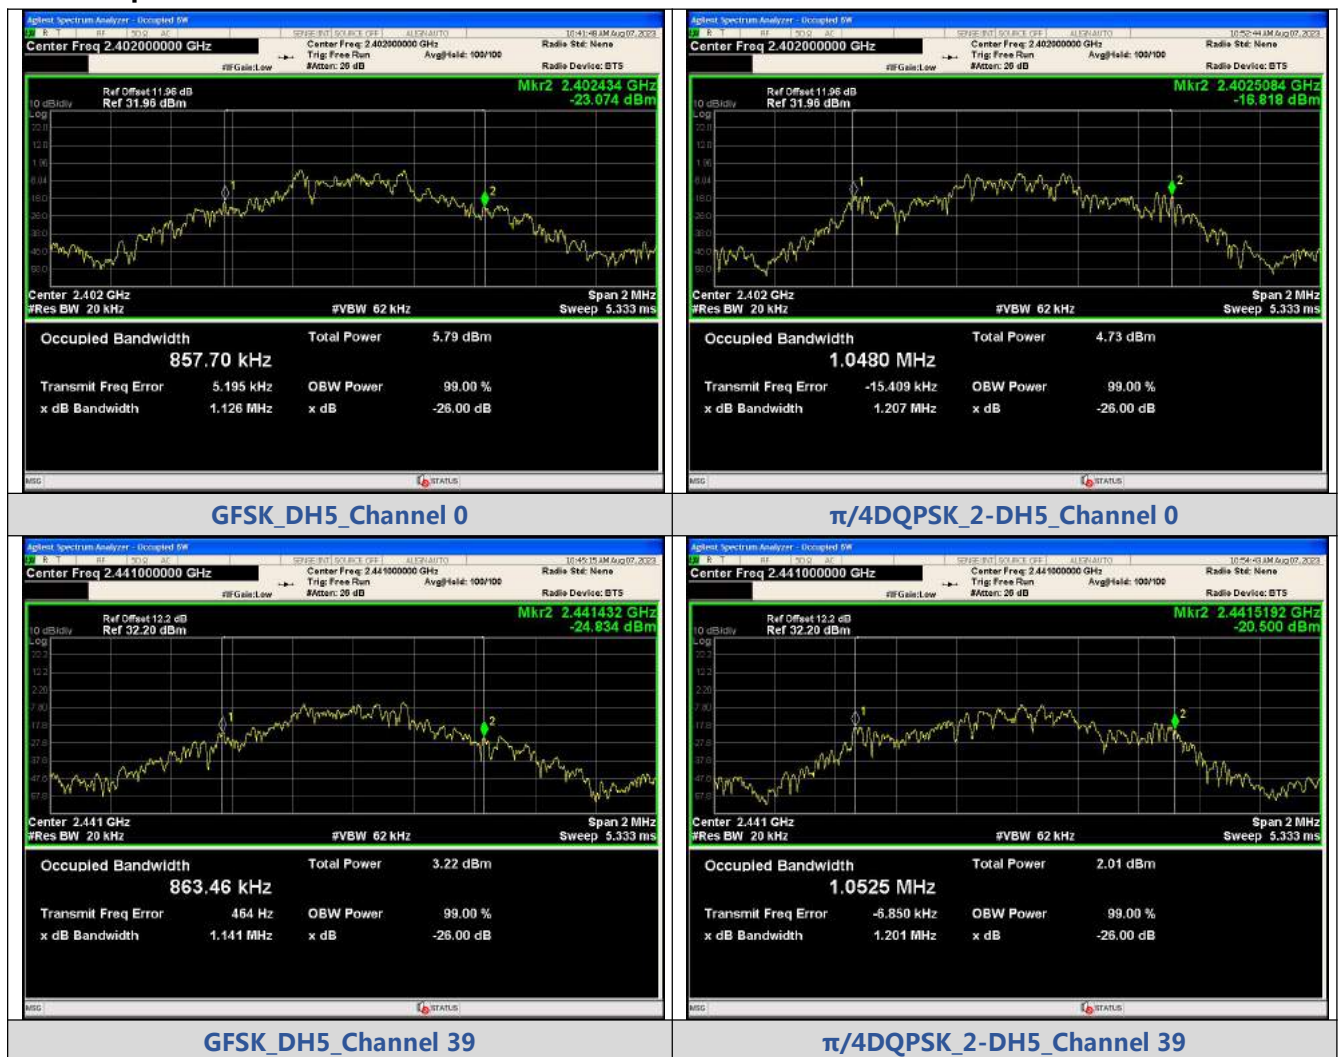



GFSK_DH5_Channel 78



$\pi/4$ DQPSK_2-DH5_Channel 78



8DPSK_3-DH5_Channel 0



8DPSK_3-DH5_Channel 39



8DPSK_3-DH5_Channel 78


Void

APPENDIX III. 20dB Bandwidth

Test Result

Modulation	Channel	Center Frequency (MHz)	20 dB Bandwidth (MHz)
GFSK	0	2402 MHz	0.9164
	39	2441 MHz	0.9484
	78	2480 MHz	0.9619
$\pi/4$ DQPSK	0	2402 MHz	1.122
	39	2441 MHz	1.100
	78	2480 MHz	1.110
8DPSK	0	2402 MHz	1.125
	39	2441 MHz	1.128
	78	2480 MHz	1.122

Test Graphs

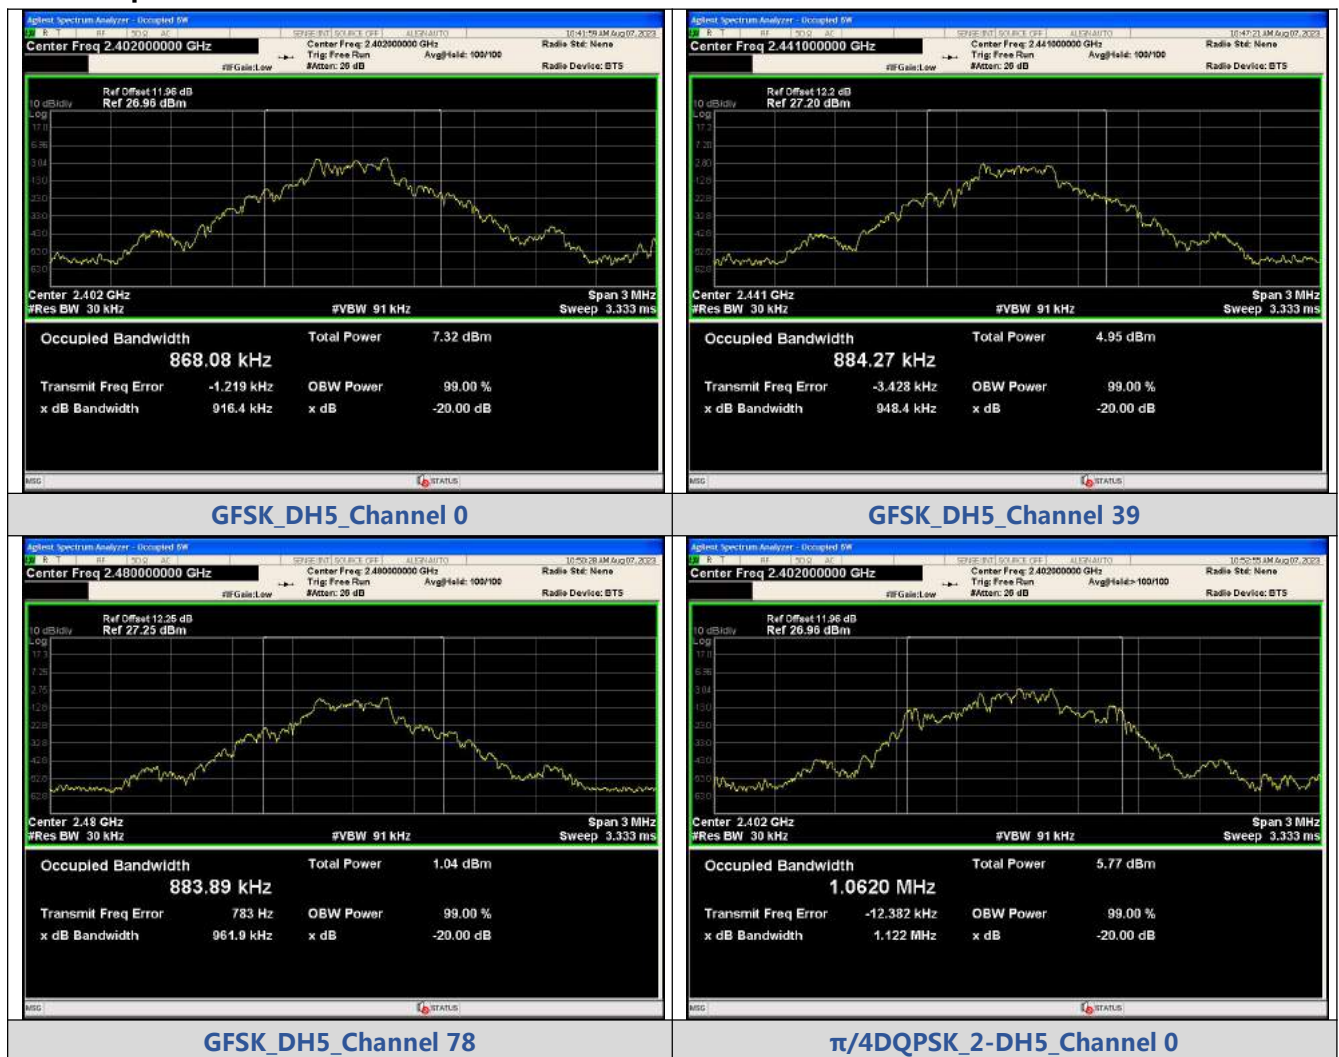




Void

APPENDIX IV. Carrier Frequencies Separation

Test Result

Modulation	Packet	Left Center frequency (MHz)	Right Center frequency (MHz)	Hopping Frequency Separation (MHz)	Limit (MHz)	Result
GFSK	DH5	2439.844	2440.8371	0.9931	0.611	PASS
GFSK	DH5	2440.1602	2440.9844	0.8242	0.632	PASS
GFSK	DH5	2439.8377	2440.8446	1.0069	0.641	PASS
$\pi/4$ DQPSK	2-DH5	2440.1389	2441.1413	1.0024	0.748	PASS
$\pi/4$ DQPSK	2-DH5	2440.1623	2441.1482	0.9859	0.733	PASS
$\pi/4$ DQPSK	2-DH5	2439.9997	2441.165	1.1653	0.74	PASS
8DPSK	3-DH5	2439.8389	2441.1692	1.3303	0.75	PASS
8DPSK	3-DH5	2440.0042	2441.1698	1.1656	0.752	PASS
8DPSK	3-DH5	2439.8293	2441.1656	1.3363	0.748	PASS

Test Graphs

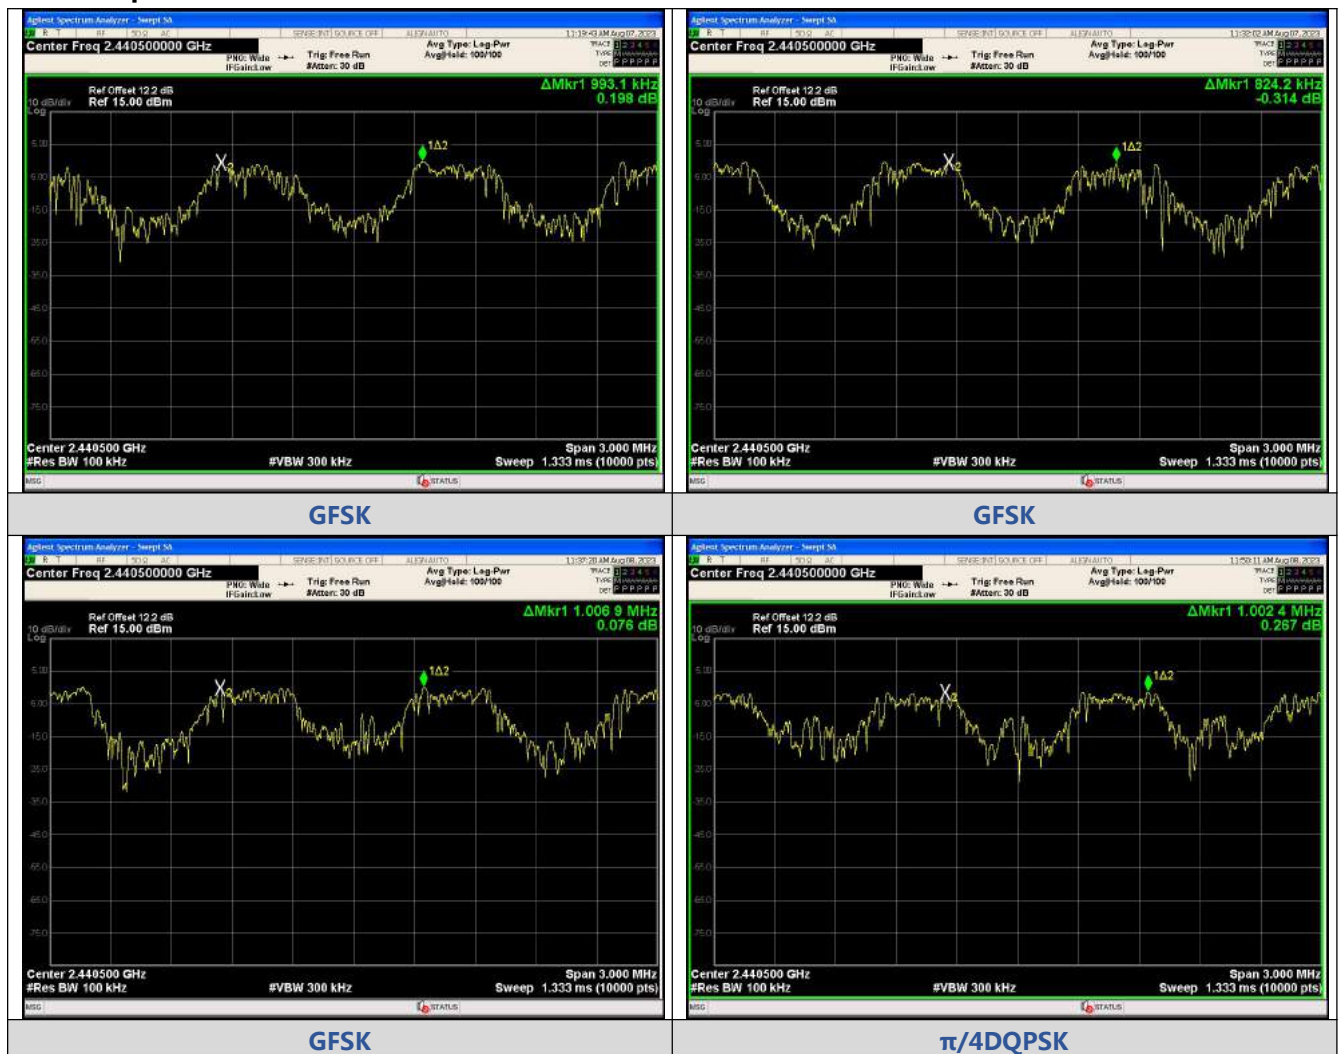



$\pi/4$ DQPSK



$\pi/4$ DQPSK



8DPSK



8DPSK



8DPSK

Void

APPENDIX V. Conducted Out Of Band Emission

Test Result

Non-Hopping

Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
GFSK	DH5	0	2400.00	-52.605	-17.83	-34.775	PASS
			2397.73	-50.636	-17.83	-32.806	PASS
			4804.40	-62.748	-17.83	-44.918	PASS
			7206.60	-61.003	-17.83	-43.173	PASS
			9608.10	-63.172	-17.83	-45.342	PASS
			24884.5	-46.159	-17.83	-28.329	PASS
		39	4882.42	-60.279	-19.86	-40.419	PASS
			7323.30	-63.559	-19.86	-43.699	PASS
			9764.17	-62.852	-19.86	-42.992	PASS
			24847.7	-45.571	-19.86	-25.711	PASS
		78	2483.50	-52.235	-24.07	-28	PASS
			4960.45	-70.449	-24.07	-46.379	PASS
			7440.66	-70.030	-24.07	-45.960	PASS
			9920.86	-68.702	-24.07	-44.632	PASS
			24945.7	-51.554	-24.07	-27.484	PASS
$\pi/4$ DQPSK	2-DH5	0	2400.00	-52.663	-18.55	-34.113	PASS
			2397.35	-51.066	-18.55	-32.516	PASS
			4804.40	-58.572	-18.55	-40.022	PASS
			7205.30	-62.905	-18.55	-44.355	PASS
			9608.70	-63.499	-18.55	-44.949	PASS
			24893.3	-45.362	-18.55	-26.812	PASS
		39	4881.79	-59.352	-21.34	-38.012	PASS
			7322.05	-63.919	-21.34	-42.579	PASS
			9764.17	-62.267	-21.34	-40.927	PASS
			24908.2	-45.046	-21.34	-23.706	PASS
		78	2483.50	-51.810	-26.44	-25	PASS
			4959.83	-69.007	-26.44	-42.567	PASS
			7440.66	-69.315	-26.44	-42.875	PASS
			9920.86	-68.998	-26.44	-42.558	PASS
			24935.1	-51.727	-26.44	-25.287	PASS
8DPSK	3-DH5	0	2400.00	-52.357	-18.97	-33.387	PASS
			2397.46	-50.756	-18.97	-31.786	PASS
			4803.10	-63.616	-18.97	-44.646	PASS
			7206.60	-62.488	-18.97	-43.518	PASS
			9608.10	-61.442	-18.97	-42.472	PASS

			24968.8	-45.080	-18.97	-26.110	PASS
			4881.17	-63.647	-23.02	-40.627	PASS
		39	7323.30	-62.622	-23.02	-39.602	PASS
			9763.55	-62.539	-23.02	-39.519	PASS
			24952.6	-45.907	-23.02	-22.887	PASS
			2483.50	-51.711	-27.05	-25	PASS
		78	4959.20	-61.301	-27.05	-34.251	PASS
			7440.66	-63.367	-27.05	-36.317	PASS
			9919.62	-62.168	-27.05	-35.118	PASS
			24994.4	-45.246	-27.05	-18.196	PASS

Hopping

Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
GFSK	DH5	Hopping	2395.52	-49.658	-16.53	-33.128	PASS
			2400.00	-51.671	-16.53	-35.141	PASS
			2483.50	-50.261	-25.2	-25.061	PASS
			2395.30	-49.022	-16.45	-32.572	PASS
			2400.00	-51.890	-16.45	-35.440	PASS
			2483.50	-50.319	-25.08	-25.239	PASS
			2395.24	-49.699	-16.33	-33.369	PASS
			2400.00	-51.505	-16.33	-35.175	PASS
			2483.50	-50.957	-25.49	-25.467	PASS
π/4DQPSK	2-DH5		2395.24	-49.591	-17.14	-32.451	PASS
			2400.00	-50.564	-17.14	-33.424	PASS
			2483.50	-51.190	-25.83	-25.360	PASS
			2397.71	-49.769	-17.87	-31.899	PASS
			2400.00	-51.789	-17.87	-33.919	PASS
			2483.50	-49.844	-25.11	-24.734	PASS
			2398.62	-49.377	-17.41	-31.967	PASS
			2400.00	-50.746	-17.41	-33.336	PASS
			2483.50	-51.533	-25.3	-26.233	PASS
8DPSK	3-DH5		2398.39	-48.920	-17.72	-31.200	PASS
			2400.00	-51.637	-17.72	-33.917	PASS
			2483.50	-49.696	-24.88	-24.816	PASS
			2397.73	-49.956	-17.37	-32.586	PASS
			2400.00	-51.944	-17.37	-34.574	PASS
			2483.50	-50.446	-24.81	-25.636	PASS
			2398.19	-38.764	-17.55	-21.214	PASS
			2400.00	-49.326	-17.55	-31.776	PASS
			2483.50	-51.029	-24.96	-26.069	PASS


Test Graphs




Out Of Band Emission
GFSK_DH5_Channel 0



Out Of Band Emission
 $\pi/4$ DQPSK_2-DH5_Channel 0

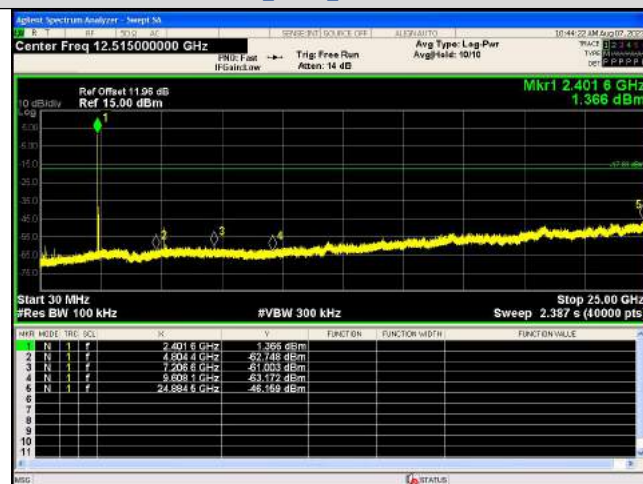

Spurious Emission
GFSK_DH5_Channel 0

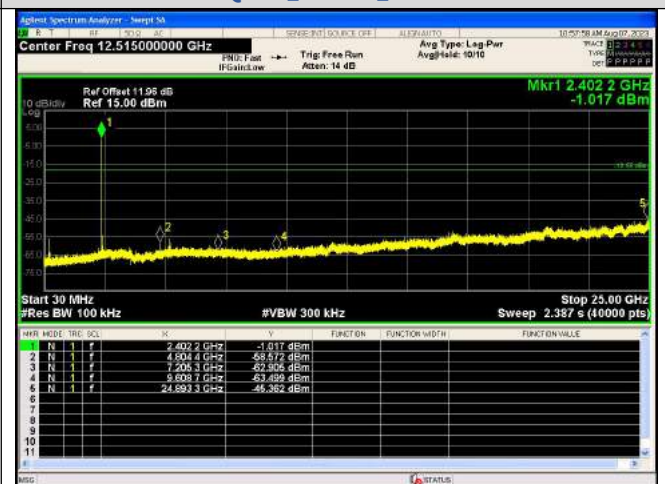


Spurious Emission
 $\pi/4$ DQPSK_2-DH5_Channel 0




Out Of Band Emission
GFSK_DH5_Channel 39




Out Of Band Emission
 $\pi/4$ DQPSK_2-DH5_Channel 39

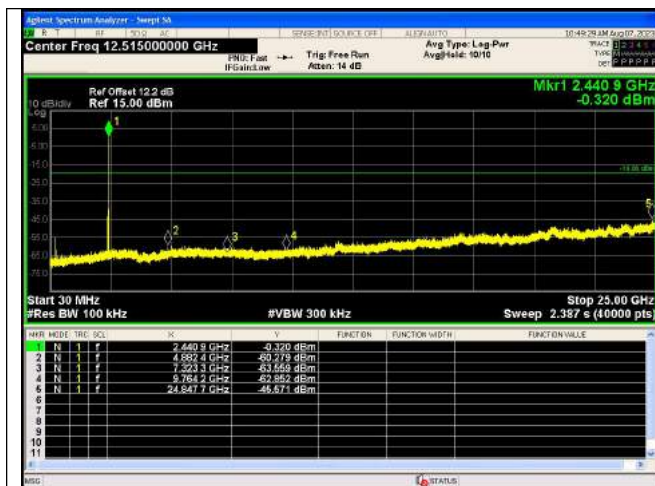

Spurious Emissions
GFSK_DH5_Channel 39

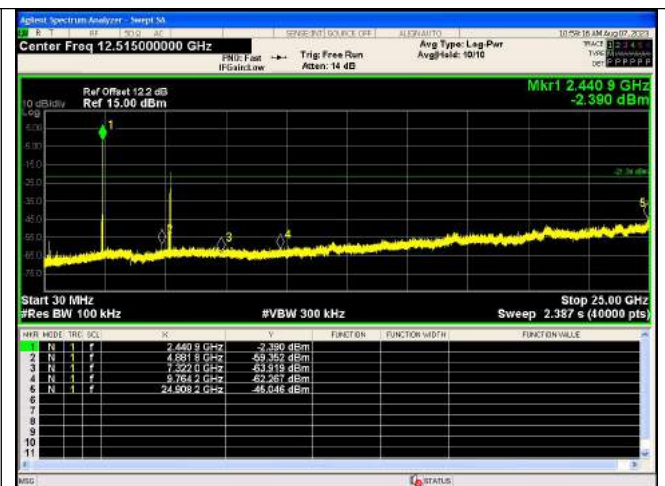


Spurious Emissions
 $\pi/4$ DQPSK_2-DH5_Channel 39

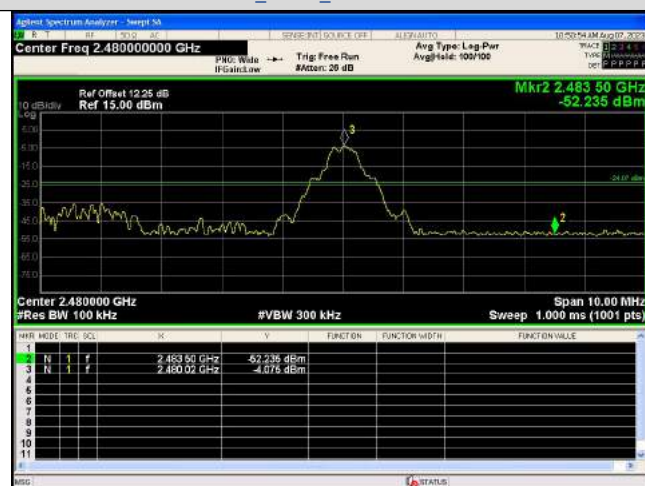


Out Of Band Emission
GFSK_DH5_Channel 78



Out Of Band Emission
 $\pi/4$ DQPSK_2-DH5_Channel 78

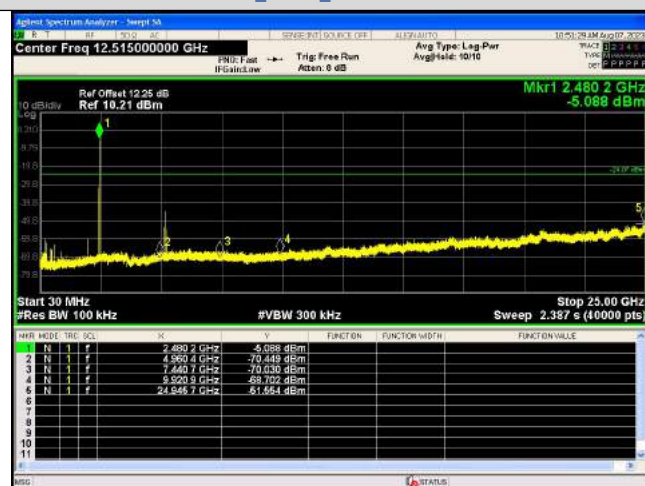


Spurious Emission
GFSK_DH5_Channel 78

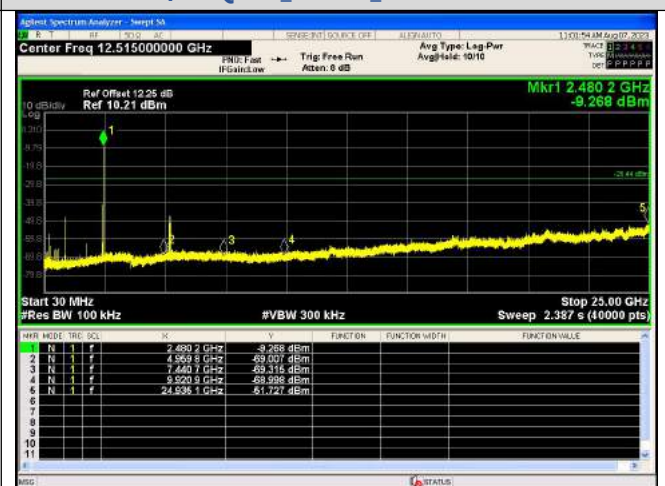


Spurious Emission
 $\pi/4$ DQPSK_2-DH5_Channel 78




Out Of Band Emission
8DPSK_3-DH5_Channel 0

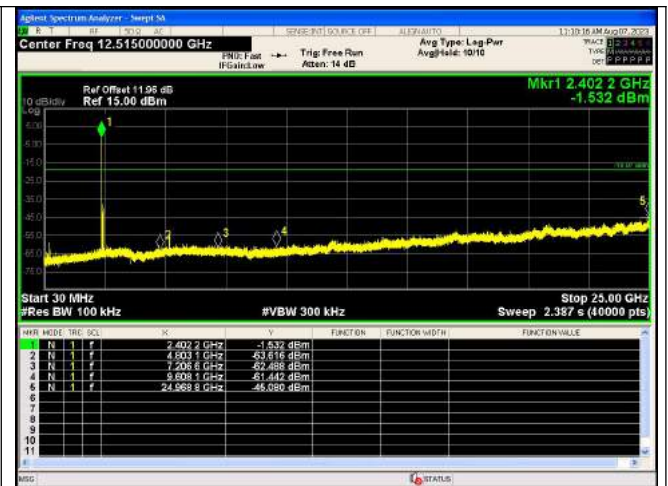

Spurious Emission
8DPSK_3-DH5_Channel 0

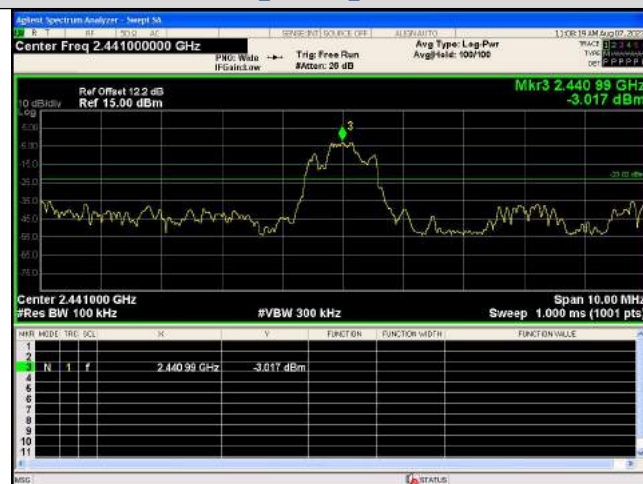


Out Of Band Emission
8DPSK_3-DH5_Channel 39

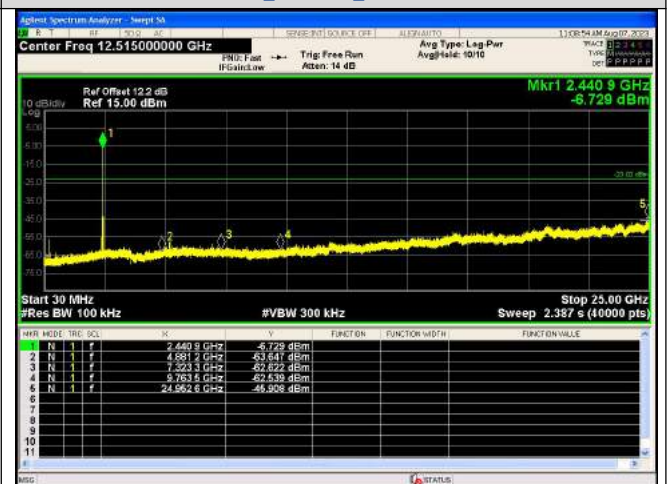

Spurious Emissions
8DPSK_3-DH5_Channel 39



Out Of Band Emission
8DPSK_3-DH5_Channel 78

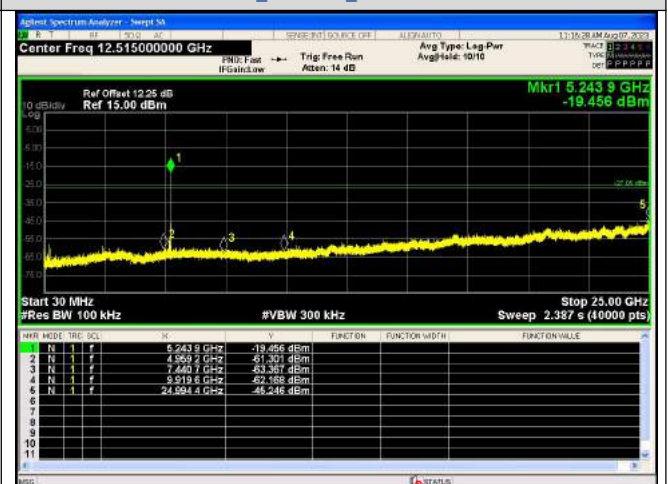

Spurious Emission
8DPSK_3-DH5_Channel 78



Out Of Band Emission(Left)
GFSK_DH5_Channel Hopping



Out Of Band Emission(Left)
 $\pi/4$ DQPSK_2-DH5_Channel Hopping



Out Of Band Emission(Right)
GFSK_DH5_Channel Hopping



Out Of Band Emission(Right)
 $\pi/4$ DQPSK_2-DH5_Channel Hopping



Out Of Band Emission(Left)
GFSK_DH5_Channel Hopping



Out Of Band Emission(Left)
 $\pi/4$ DQPSK_2-DH5_Channel Hopping



Out Of Band Emission(Right)
GFSK_DH5_Channel Hopping



Out Of Band Emission(Right)
 $\pi/4$ DQPSK_2-DH5_Channel Hopping



Out Of Band Emission(Left)
GFSK_DH5_Channel Hopping



Out Of Band Emission(Left)
 $\pi/4$ DQPSK_2-DH5_Channel Hopping



Out Of Band Emission(Right)
GFSK_DH5_Channel Hopping



Out Of Band Emission(Right)
 $\pi/4$ DQPSK_2-DH5_Channel Hopping



Out Of Band Emission(Left)
8DPSK_3-DH5_Channel Hopping



Out Of Band Emission(Right)
8DPSK_3-DH5_Channel Hopping




Out Of Band Emission(Left)
8DPSK_3-DH5_Channel Hopping



Out Of Band Emission(Right)
8DPSK_3-DH5_Channel Hopping



Out Of Band Emission(Left)
8DPSK_3-DH5_Channel Hopping

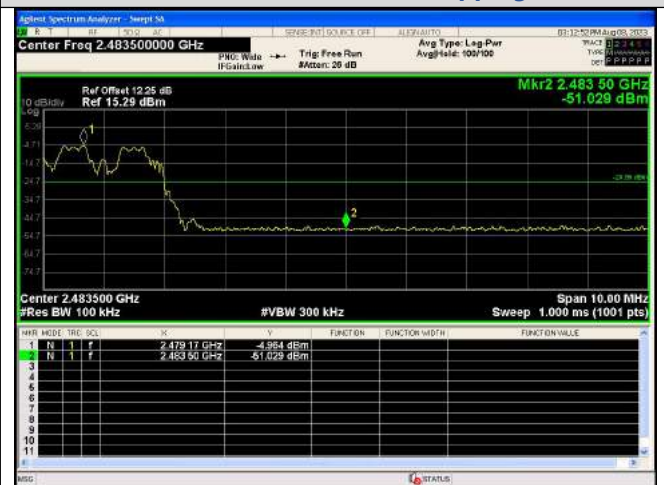


Out Of Band Emission(Right)
8DPSK_3-DH5_Channel Hopping


APPENDIX VI. Duty Cycle

Test Result


Modulation	Packets	Channel	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle (linear)	Duty Cycle Factor (dB)
GFSK	DH5	0	0.171	3.745	4.57	0.0457	13.4008
		39	0.171	3.745	4.57	0.0457	13.4008
		78	0.161	3.735	4.31	0.0431	13.6552
$\pi/4$ DQPSK	2-DH5	0	0.171	3.745	4.57	0.0457	13.4008
		39	0.171	3.745	4.57	0.0457	13.4008
		78	0.574	3.745	15.32	0.1532	8.1474
8DPSK	3-DH5	0	0.161	3.745	4.30	0.0430	13.6653
		39	0.161	3.735	4.31	0.0431	13.6552
		78	0.161	3.745	4.30	0.0430	13.6653

Test Graphs

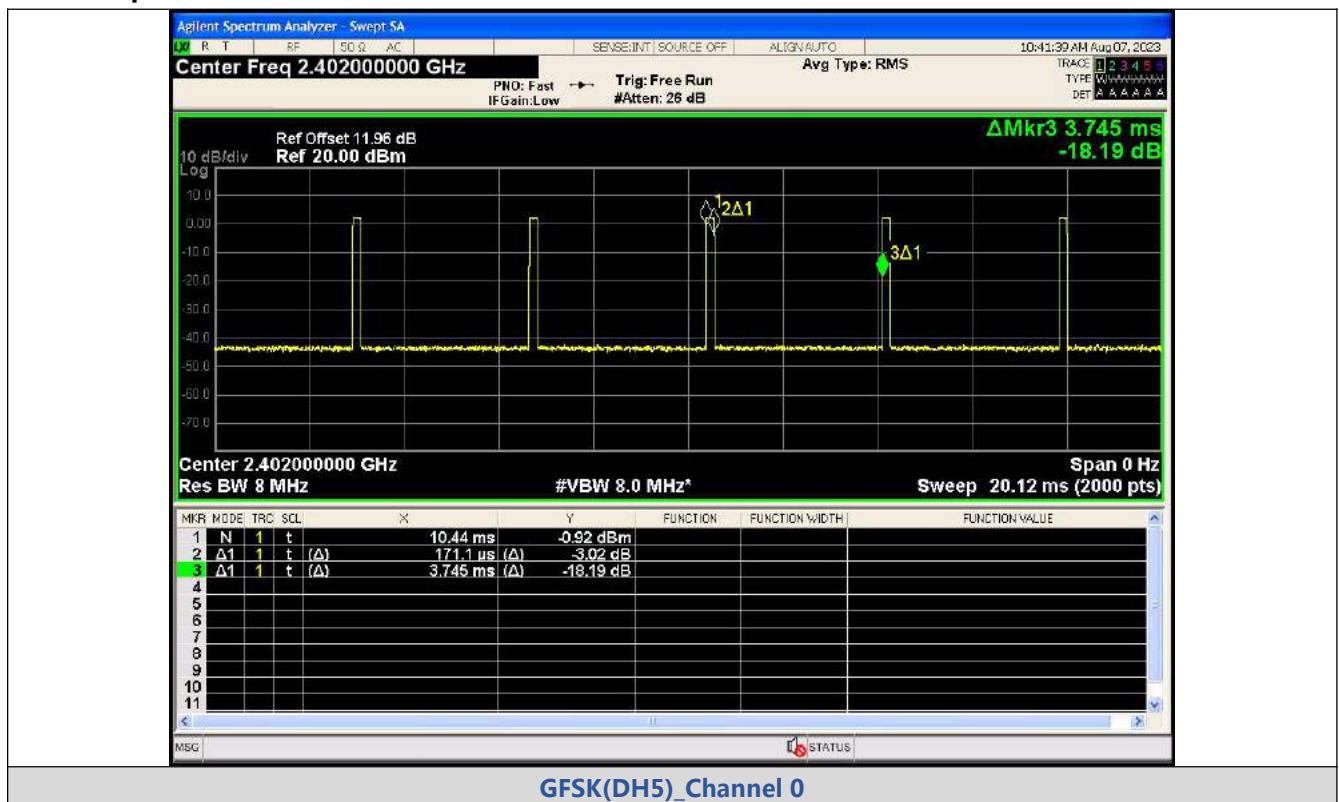


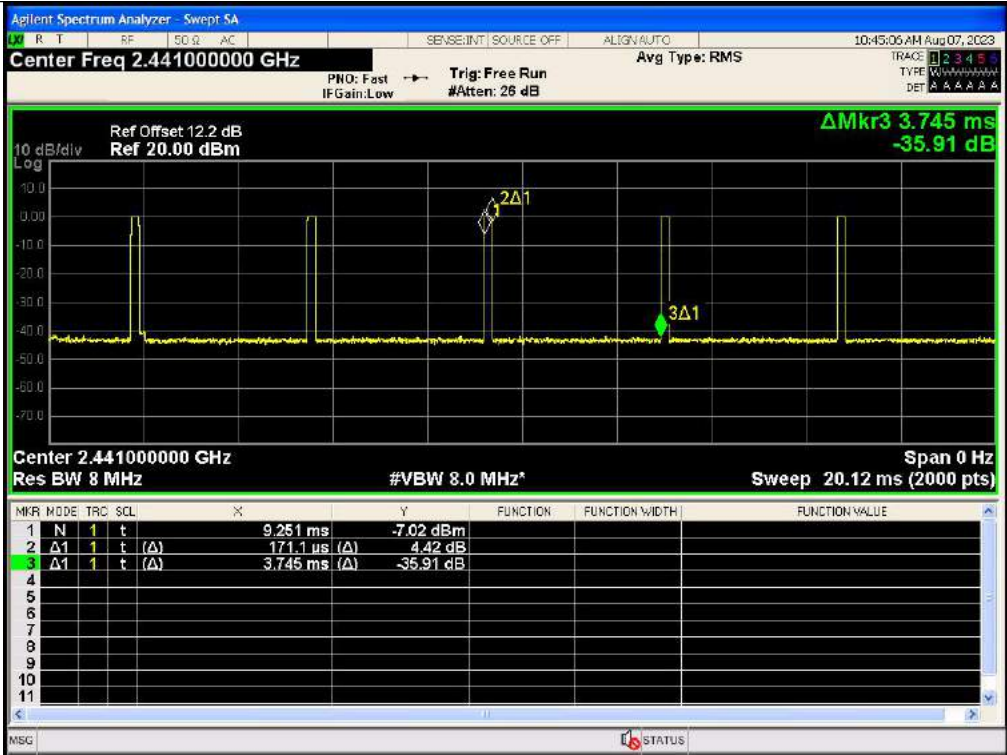


GFSK(DH5)_Channel 39

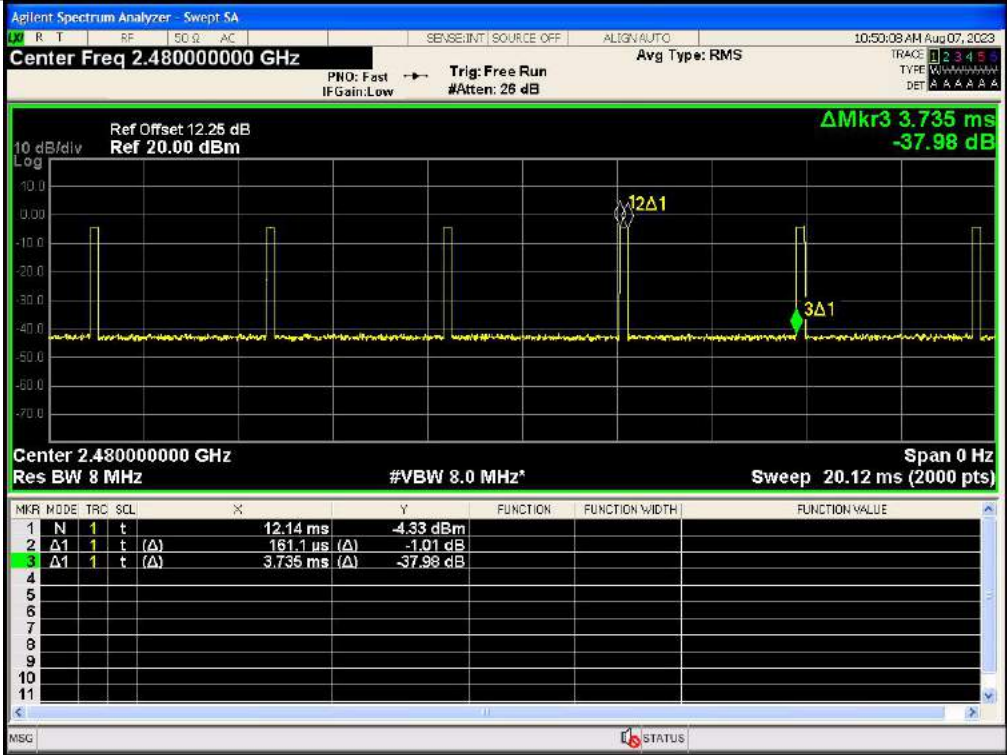


GFSK(DH5)_Channel 78

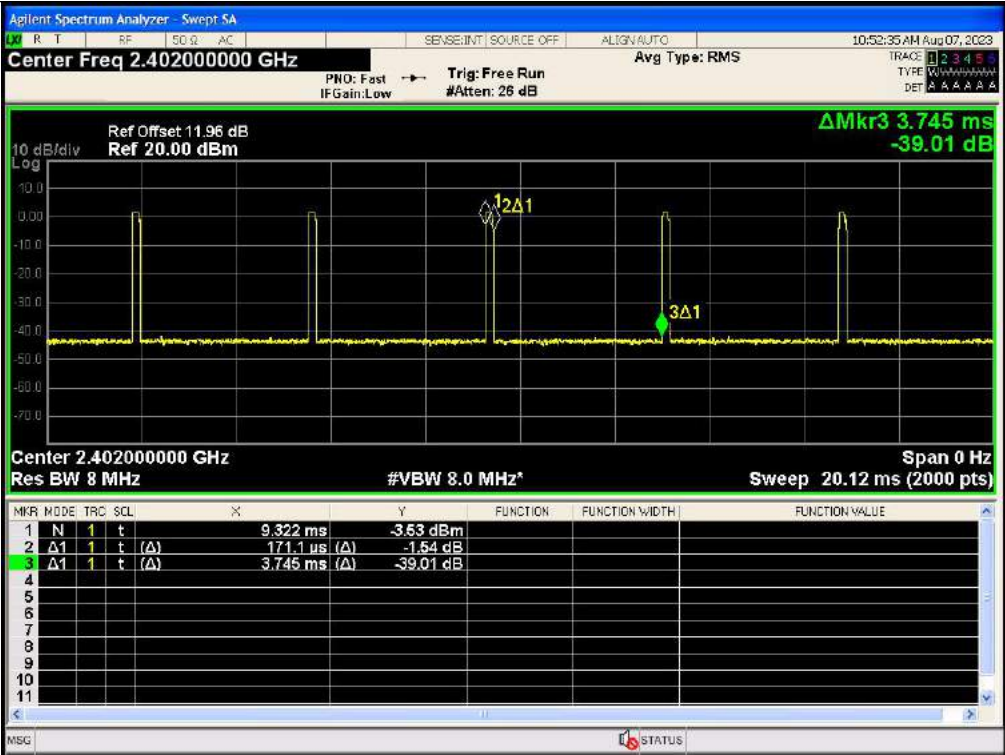


π/4DQPSK(2-DH5)_Channel 0

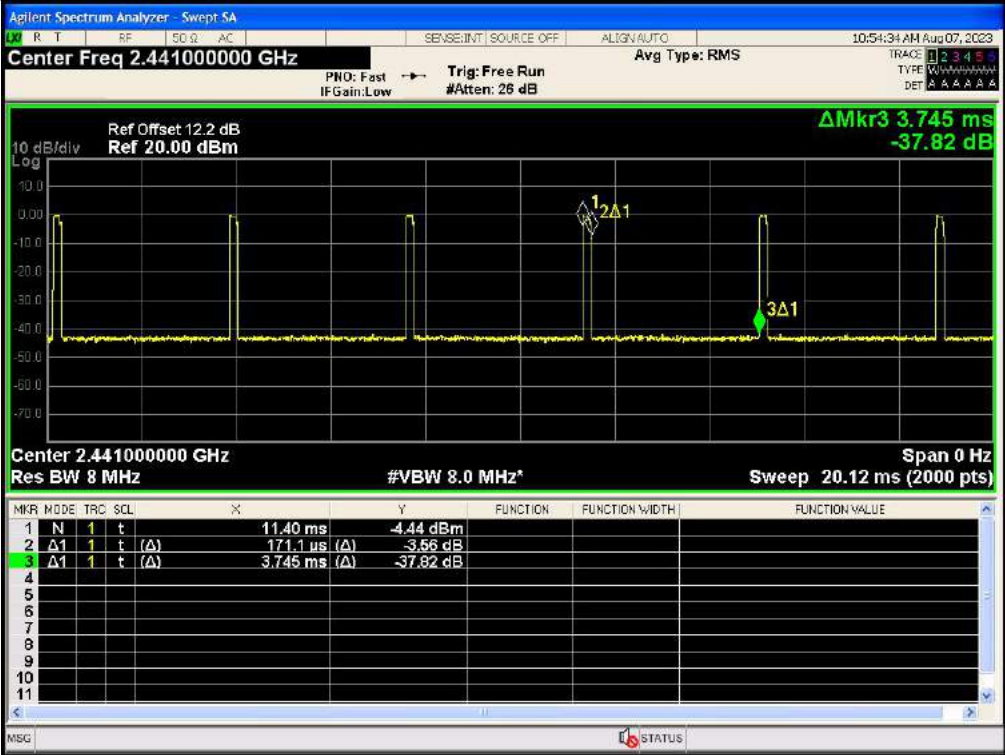


π/4DQPSK(2-DH5)_Channel 39

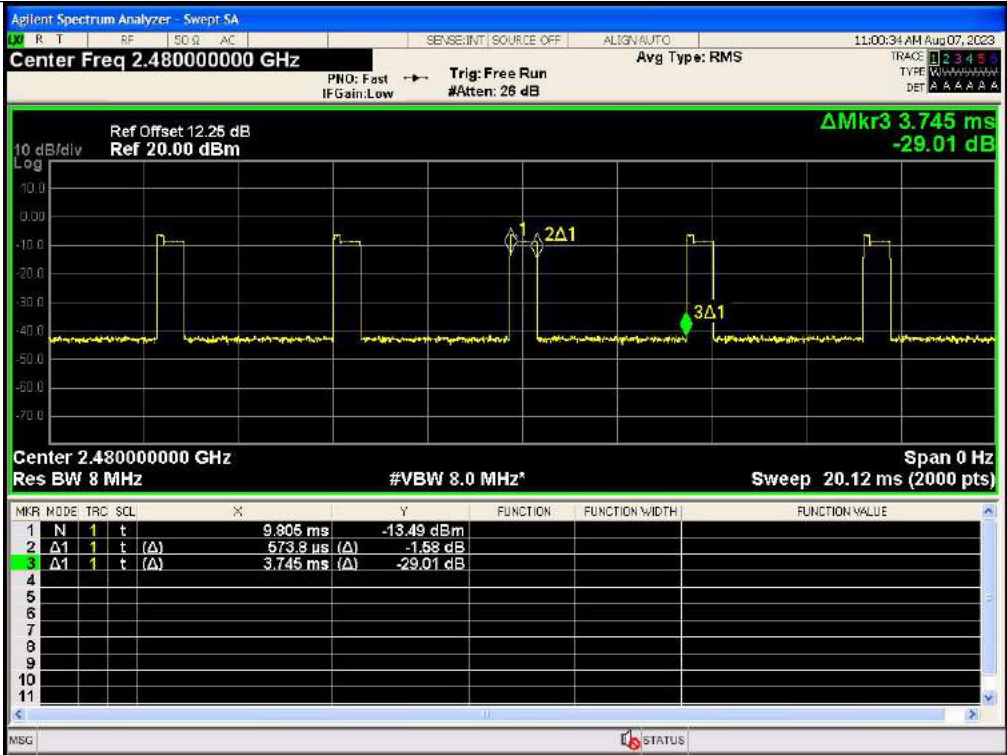


π/4DQPSK(2-DH5)_Channel 78

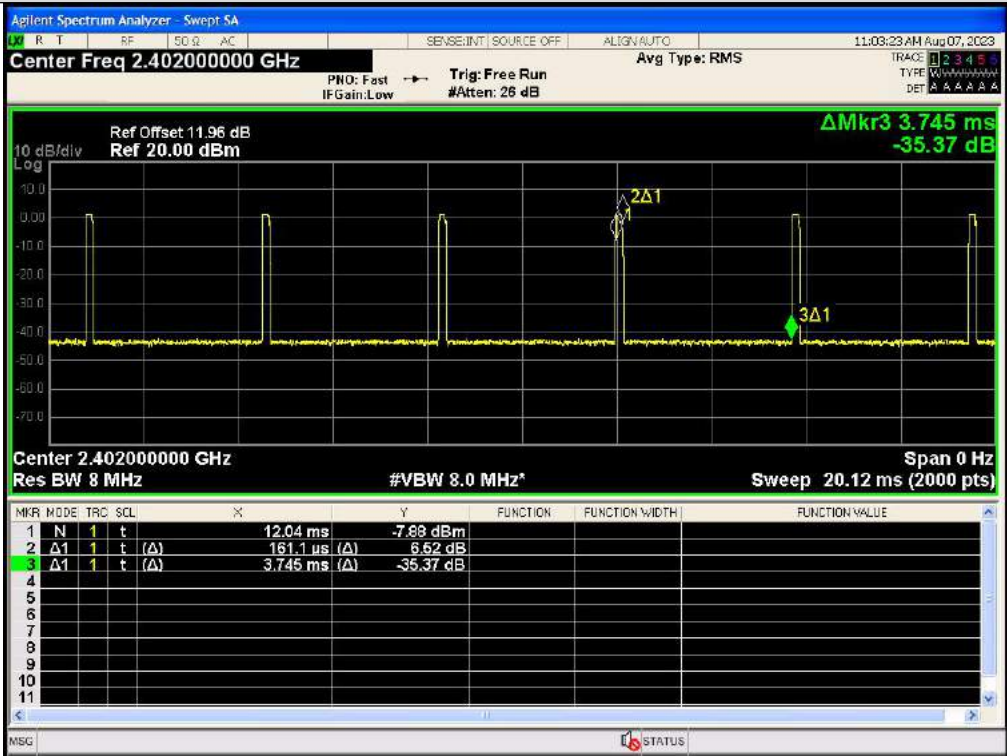

8DPSK(3-DH5)_Channel 0

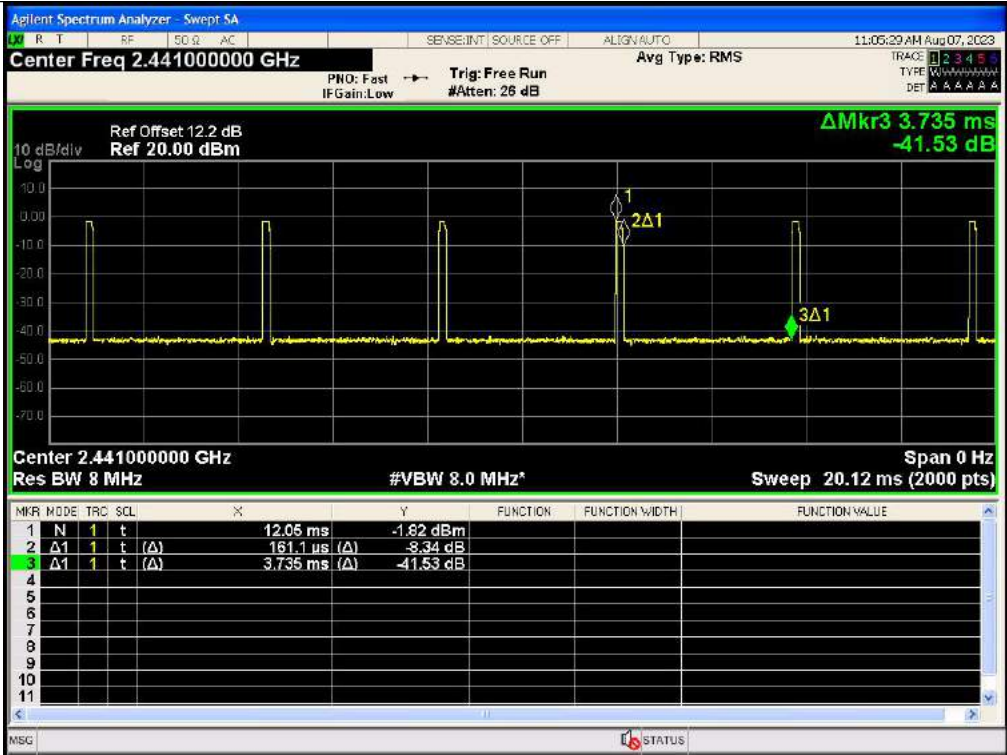

8DPSK(3-DH5)_Channel 39

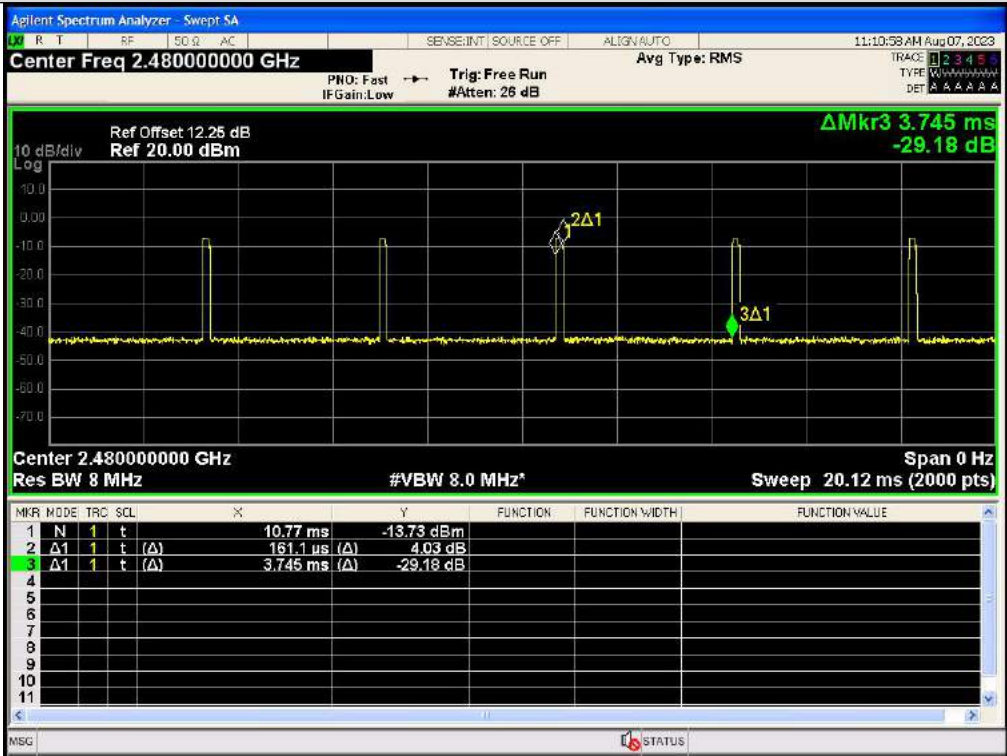


8DPSK(3-DH5)_Channel 78

APPENDIX VII. Dwell Time


Test Result

Modulation	Packet	Channel	Pulse Width (ms)	Number of Pulses in 31.6 seconds	Dwell Time (ms)	Limit (ms)	Result
GFSK	DH1	CH39 (2441MHz)	0.3756	313	117.56	< 400	PASS
	DH3		1.632	168	274.18		PASS
	DH5		2.880	115	331.2		PASS
$\pi/4$ DQPSK	2-DH1		0.3888	314	122.08		PASS
	2-DH3		1.632	164	267.65		PASS
	2-DH5		2.896	116	335.94		PASS
8DPSK	3-DH1		0.3888	306	118.97		PASS
	3-DH3		1.656	165	273.24		PASS
	3-DH5		2.896	99	286.7		PASS

Test Graphs

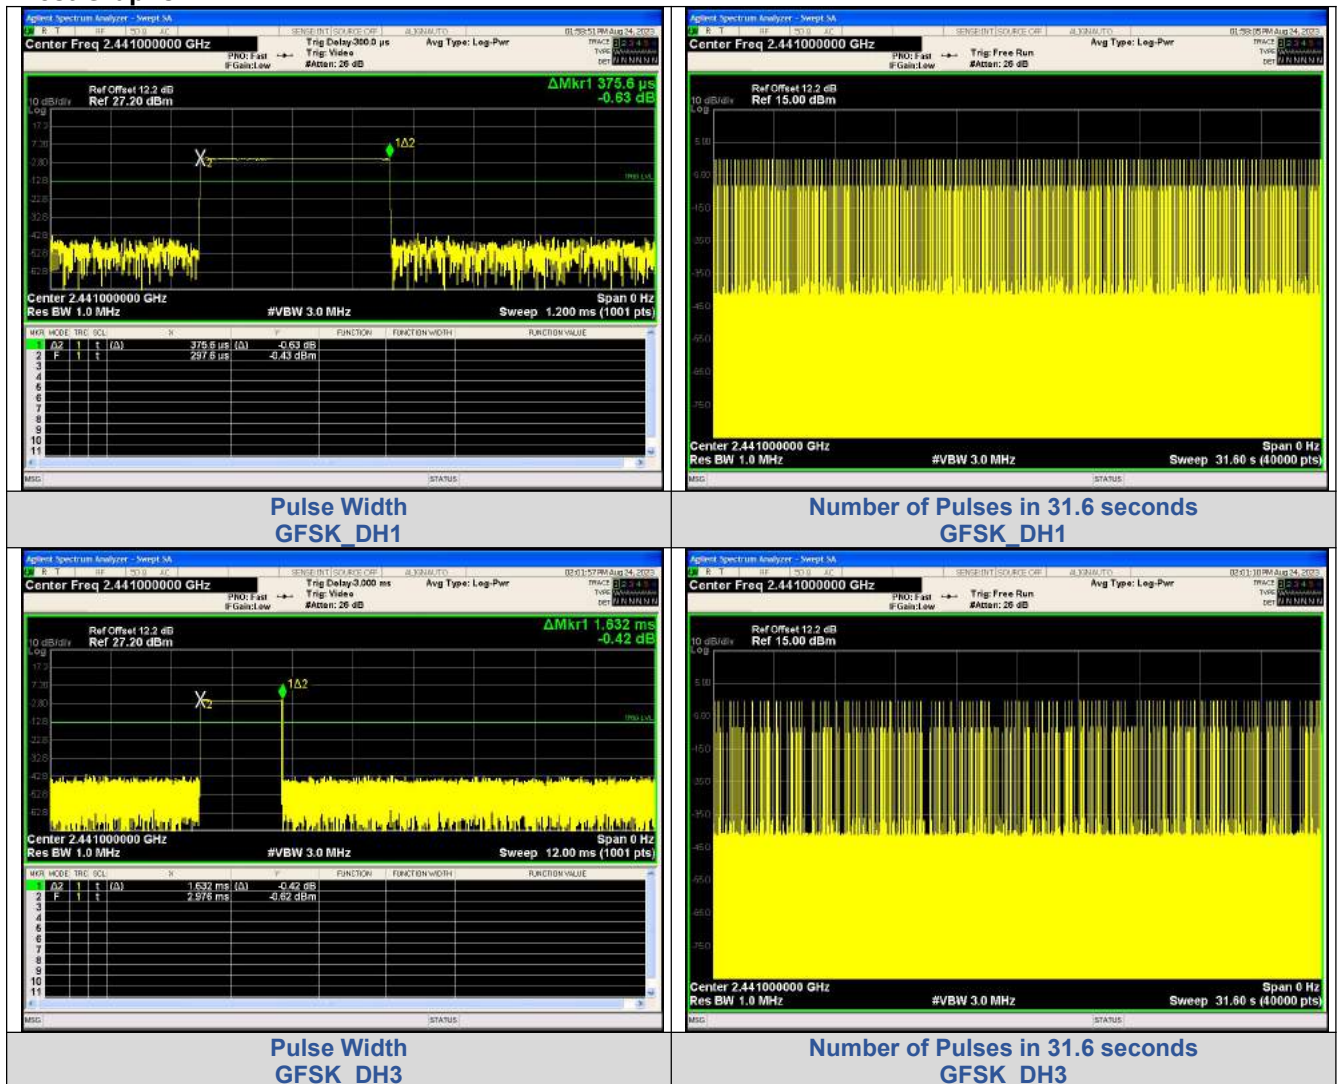




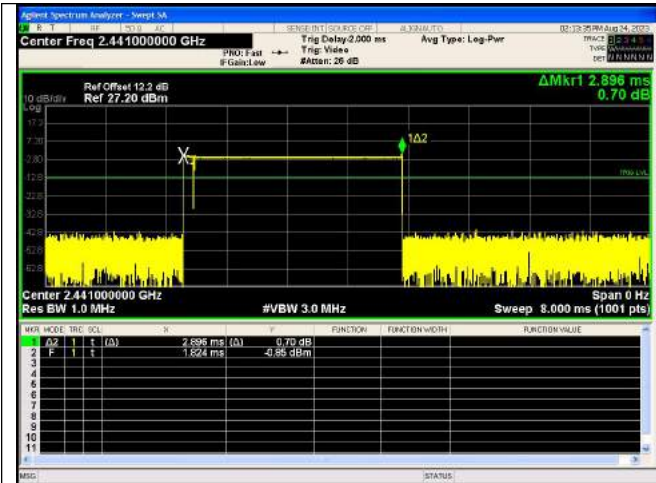


Pulse Width
 $\pi/4$ DQPSK 2-DH5




Number of Pulses in 31.6 seconds
 $\pi/4$ DQPSK 2-DH5

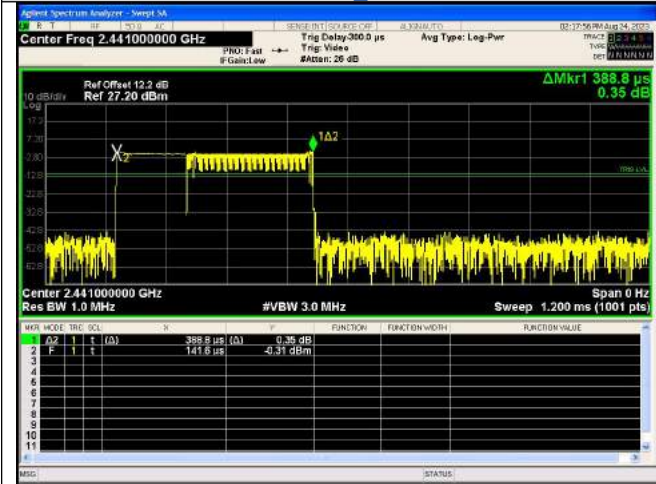


Pulse Width
8DPSK 3-DH3

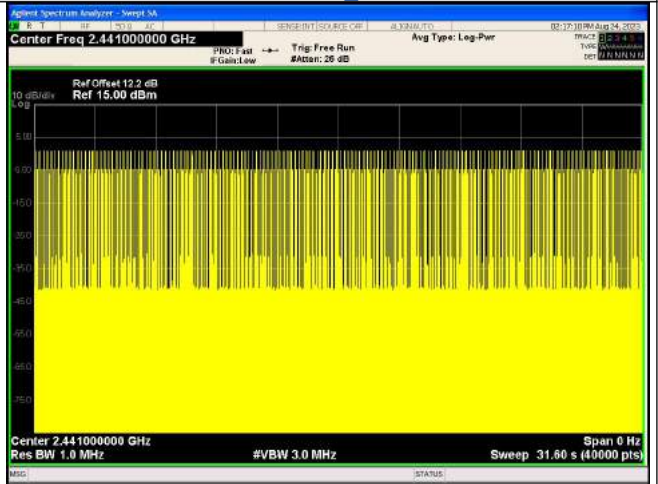


Number of Pulses in 31.6 seconds
8DPSK 3-DH3

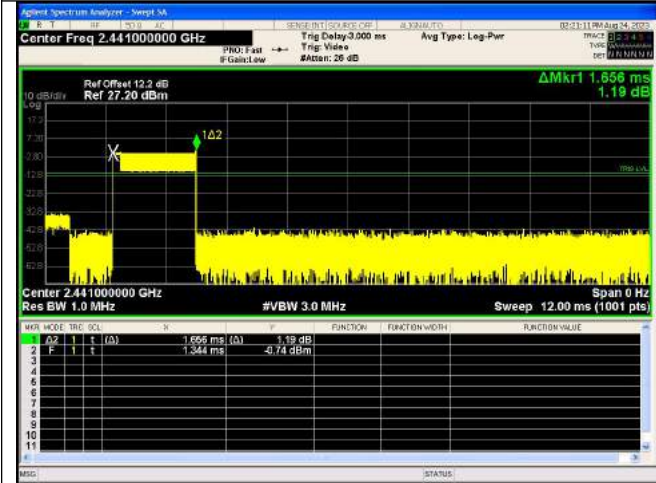


Pulse Width
8DPSK 3-DH3

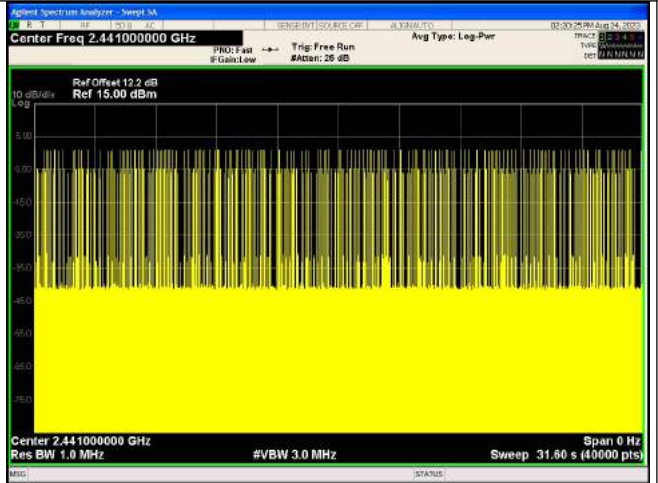

Number of Pulses in 31.6 seconds
8DPSK 3-DH3

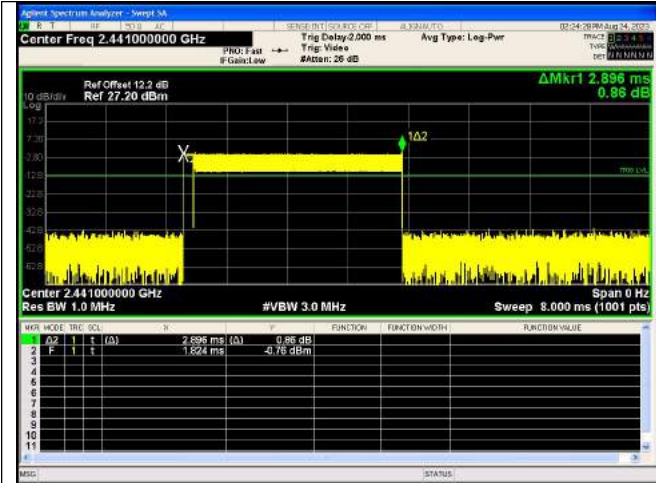

Pulse Width
8DPSK_3-DH5

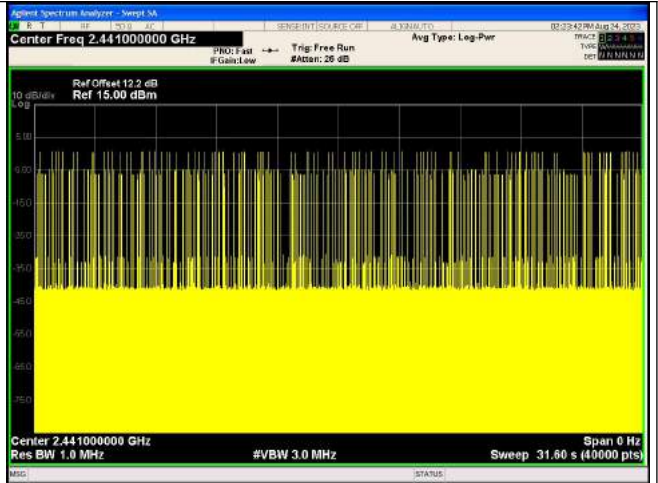


Number of Pulses in 31.6 seconds
8DPSK_3-DH5

APPENDIX VIII. Number Of Hopping Channel

Test Result

Modulation	Packet	Number of Hopping Channel	Limit	Result
GFSK	DH5	79	15	PASS
GFSK	DH5	79	15	PASS
GFSK	DH5	79	15	PASS
$\pi/4$ DQPSK	2-DH5	79	15	PASS
$\pi/4$ DQPSK	2-DH5	79	15	PASS
$\pi/4$ DQPSK	2-DH5	79	15	PASS
8DPSK	3-DH5	79	15	PASS
8DPSK	3-DH5	79	15	PASS
8DPSK	3-DH5	79	15	PASS

Test Graphs

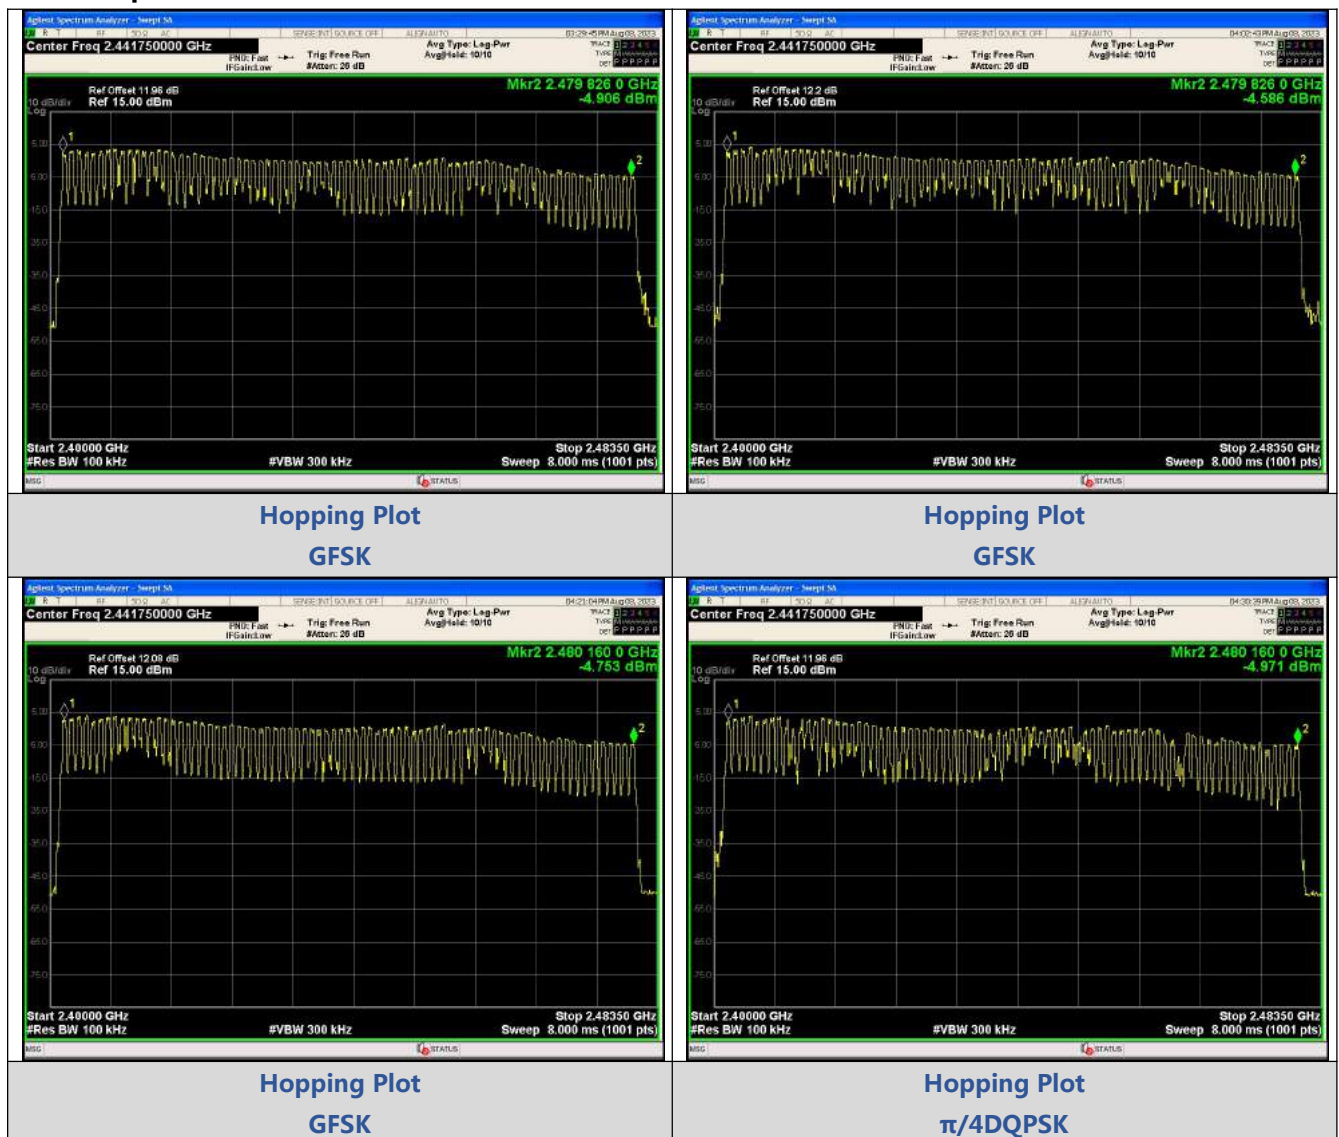



Hopping Plot
 $\pi/4$ DQPSK



Hopping Plot
 $\pi/4$ DQPSK



Hopping Plot
8DPSK



Hopping Plot
8DPSK



Hopping Plot
8DPSK

Void