



Appendix B

Detailed Test Results

1. WIFI
WIFI 2.4GHz for Body
WIFI 5.2GHz for Body
WIFI 5.3GHz for Body
WIFI 5.5GHz for Body
WIFI 5.8GHz for Body





Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 1CH Rear side 0mm

DUT: Tablet ; Type: 10WB4 ; Serial: A250627108-1

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1.009

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.835$ S/m; $\epsilon_r = 39.457$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.43, 7.43, 7.43); Calibrated: 2025/2/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (10x15x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.953 W/kg



Configuration/Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.53 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.614 W/kg; SAR(10 g) = 0.313 W/kg

Maximum value of SAR (measured) = 0.924 W/kg

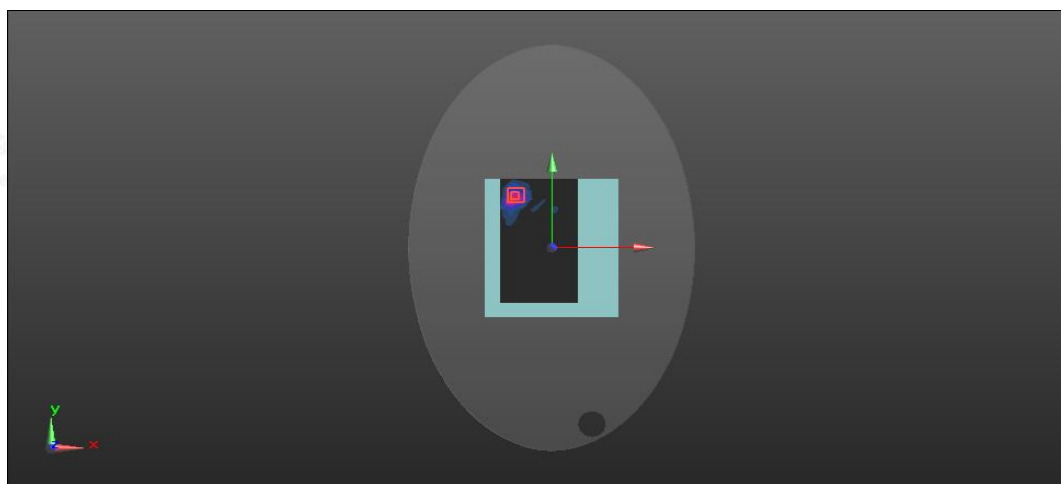



Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11a 36CH Body Rear side 0mm

DUT: Tablet ; Type: 10WB4 ; Serial: A250627108-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5180 MHz; Duty Cycle: 1:1.057

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.722 \text{ S/m}$; $\epsilon_r = 36.253$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.36, 5.36, 5.36); Calibrated: 2025/2/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (12x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.786 W/kg


Configuration/Unnamed procedure/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 13.73 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.964 W/kg

SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.248 W/kg

Maximum value of SAR (measured) = 0.767 W/kg

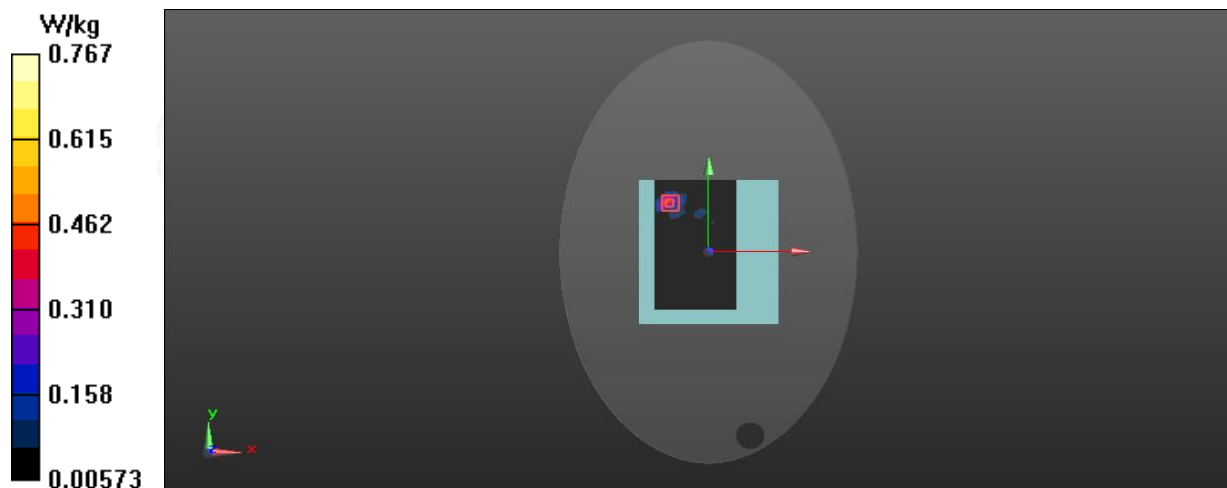



Test Laboratory: LCS-SAR Lab

WIFI 5.3G 802.11a 64CH Body Rear side 0mm

DUT: Tablet ; Type: 10WB4 ; Serial: A250627108-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5320 MHz; Duty Cycle: 1:1.057

Medium parameters used: $f = 5320$ MHz; $\sigma = 4.732$ S/m; $\epsilon_r = 36.263$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.36, 5.36, 5.36); Calibrated: 2025/2/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (12x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.759 W/kg



Configuration/Unnamed procedure/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 12.68 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.895 W/kg

SAR(1 g) = 0.426 W/kg; SAR(10 g) = 0.224 W/kg

Maximum value of SAR (measured) = 0.732 W/kg

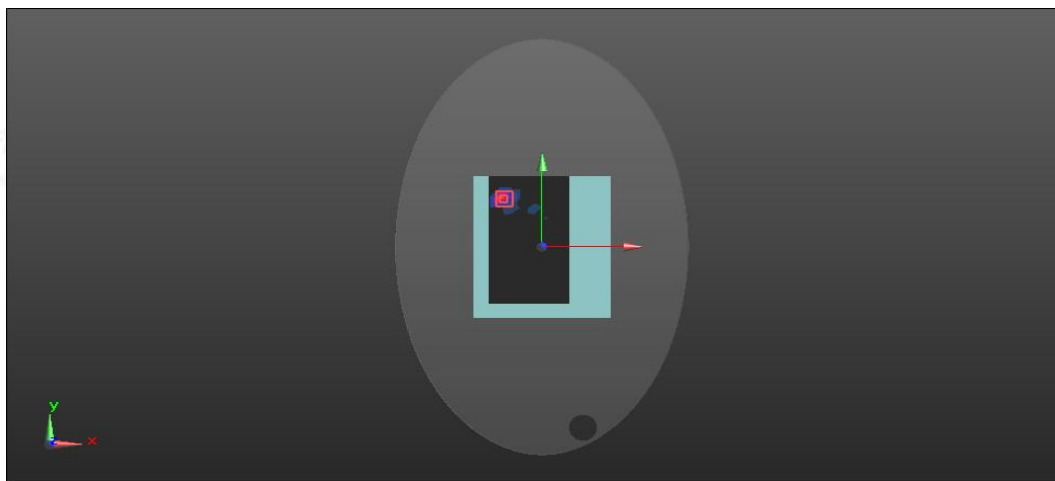



Test Laboratory: LCS-SAR Lab

WIFI 5.5G 802.11a 140CH Body Rear side 0mm

DUT: Tablet ; Type: 10WB4 ; Serial: A250627108-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5700 MHz; Duty Cycle: 1:1.058

Medium parameters used: $f = 5700$ MHz; $\sigma = 5.157$ S/m; $\epsilon_r = 35.762$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.74, 4.74, 4.74); Calibrated: 2025/2/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (12x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.746 W/kg



Configuration/Unnamed procedure/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 12.47 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.862 W/kg

SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 0.711 W/kg

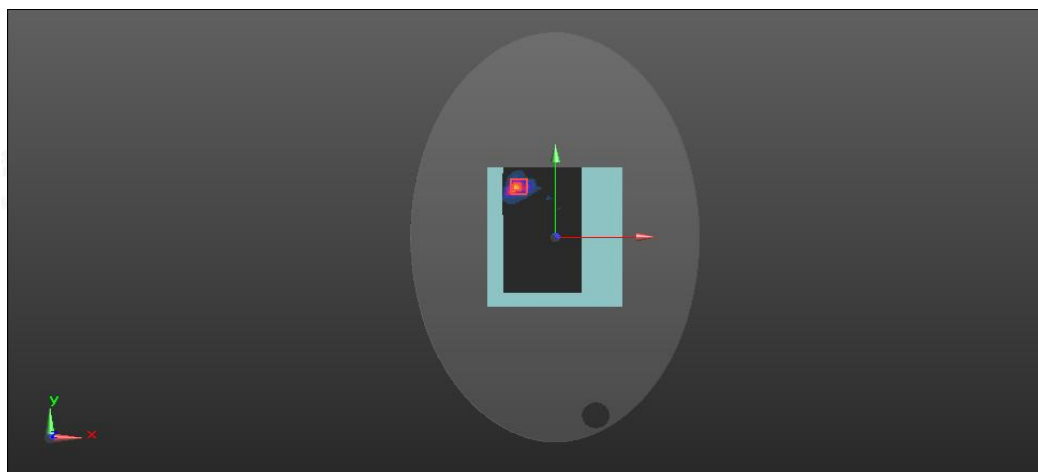



Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11a 149CH Body Rear side 0mm

DUT: Tablet ; Type: 10WB4 ; Serial: A250627108-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5745MHz;Duty Cycle: 1:1.057

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.221 \text{ S/m}$; $\epsilon_r = 35.223$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.86, 4.86, 4.86); Calibrated: 2025/2/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (12x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.743 W/kg

Configuration/Unnamed procedure/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 12.39 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.886 W/kg

SAR(1 g) = 0.432 W/kg; SAR(10 g) = 0.241 W/kg

Maximum value of SAR (measured) = 0.772 W/kg

