



Appendix B

Detailed Test Results

1. WIFI
WIFI 2.4GHz for Body
WIFI 5.2GHz for Body
WIFI 5.8GHz for Body
2. Bluetooth
BLE for Body



Date: 2026/9/1

Test Laboratory: LCS-SAR Lab
WIFI 2.4G 802.11ax20 11CH Rear side 0mm

DUT: Tablet ; Type: 10WC1 ; Serial: A260714039-1

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462$ MHz; $\sigma = 1.819$ S/m; $\epsilon_r = 38.542$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.38, 7.38, 7.38); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.935 W/kg

Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.469 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 1.22 W/kg
SAR(1 g) = 0.564 W/kg; SAR(10 g) = 0.293 W/kg

Maximum value of SAR (measured) = 0.897 W/kg

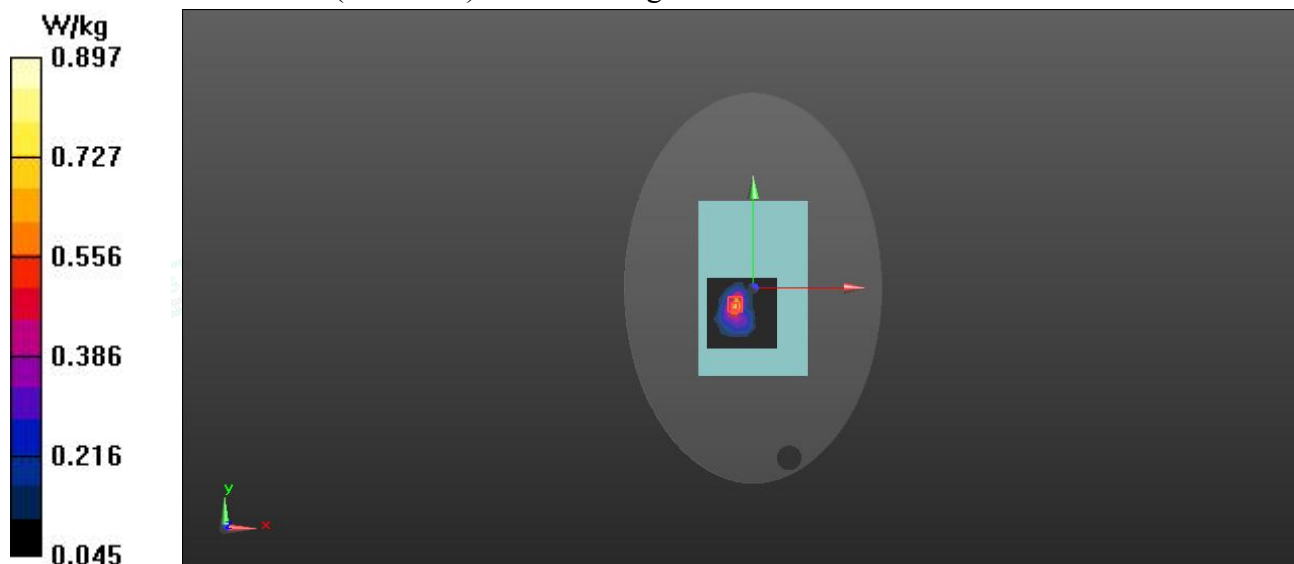

Date: 2026/9/3

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11a 48CH Rear side 0mm**DUT: Tablet ; Type: 10WC1 ; Serial: A260714039-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.691 \text{ S/m}$; $\epsilon_r = 36.058$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.35, 5.35, 5.35); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.873 W/kg


Configuration/ Body /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 7.394 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.537 W/kg; SAR(10 g) = 0.269 W/kg.

Maximum value of SAR (measured) = 0.816 W/kg

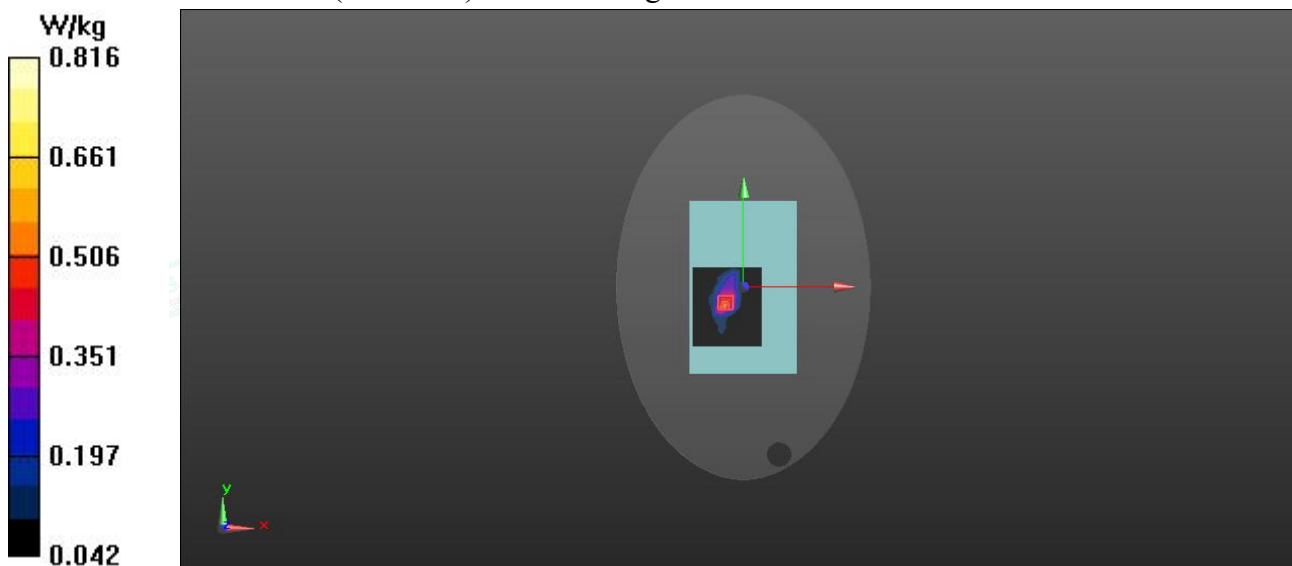

Date: 2026/9/4

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11n40 159CH Rear side 0mm**DUT: Tablet ; Type: 10WC1 ; Serial: A260714039-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5795 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5795 \text{ MHz}$; $\sigma = 5.286 \text{ S/m}$; $\epsilon_r = 35.153$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.87, 4.87, 4.87); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.586 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.376 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.784 W/kg

SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 0.538 W/kg

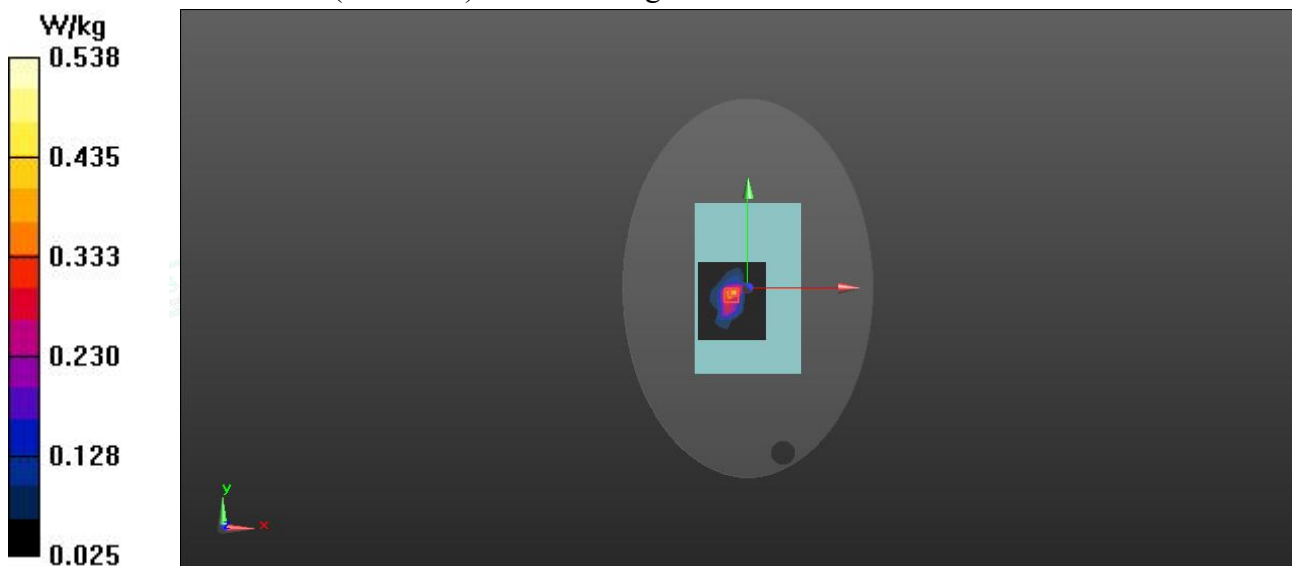



Date: 2026/9/1

Test Laboratory: LCS-SAR Lab
BLE 1M 39CH Rear side 0mm

DUT: Tablet ; Type: 10WC1 ; Serial: A260714039-1

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2480 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2480$ MHz; $\sigma = 1.835$ S/m; $\epsilon_r = 38.584$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.38, 7.38, 7.38); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.482 W/kg

Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.796 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.603 W/kg
SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 0.437 W/kg

