


NOTE :

- 1.The printing should be clear ,without burrs,and the dimension should be accurate.
- 2.Make the film according to the drawing.
- 3.Kisscut by the size request.

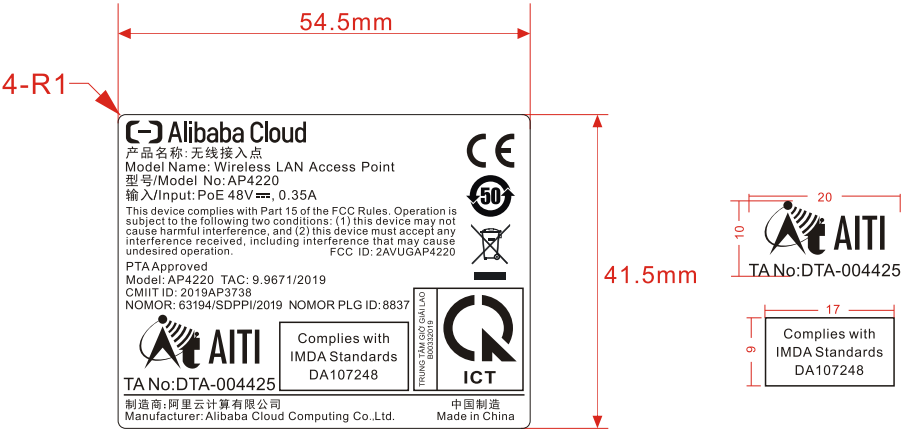

印刷颜色

C100 M100 Y100 K100

Modification		Card Paper / Top lineboard				Corrugate list				Cardboard Die Cut Legend				Unspecialized Die Cut Tolerance = +/- 0.2mm				PE Bag (A Degree)				Label list				Comply with RoHs				Accton TECHNOLOGY CORP.			
		Paper				Flute (A Degree)				(C) Cutting Line				DIN GRADE				Normal (None Anti-Static)				Material & Thickness				Others				Part No. 246000002439H REV. 04			
1 印刷内容变更 Ver. 02		GSM (g/m²)				Single wall Double wall GSM (g/m²) (Top lineboard/Medium/Botton lineboard)				(C1) Crease Line				0 16 0.05 0.1 0.15 0.2 0.3 0.5				Anti-Static ESD Value/Ω _{sqm} = 9-11				Art paper 0.025mm / 25# / 1mil				Material Spec:				Description:			
2 增加新加坡认证标识等 Ver. 03		CCNB SBS Double SBS				Bursting Strength (kg/cm²)				(PBL) Partial Blunt Line				16 63 250 500 1000 0.05 0.1 0.15 0.2 0.3 0.5 0.8 1.2 3.0				Electronic ESD Value/Ω _{sqm} < 5				✓ Metalized ✓ 0.050mm / 50# / 2mil ✓ Acrylic UL approved T=0.022mm				IQC Inspect Color				UL LABEL EAP7206AW2-0918-A1 AP4220			
3 增加越南认证标识等 Ver. 04		250 280 300 310 340 350				End Crush Test (kg/cm)				(SO) Slit-Score Line				250 500 1000 0.1 0.15 0.2 0.3 0.5 0.8 1.2 3.0				Thickness/mm 0.04 0.06 0.08				White Polyester 0.076mm / 75# / 3mil "R" Adhesive T=0.022mm				Please refer to				UNIT SCALE 1 / 1 SIZE A3			
4						14 22.5 18 37.1				(SL) Slit Line				Printing Tolerance = +/- mm				Bubble Bag (Bubble Ø=10mm) Single layer Double layer				White Polyester 0.178mm / 7mil Water Adhesive T=0.022mm				Approve Tony 03.25.20				MM (IN) Outside View Sheet 1 of 1			
5						14 22.5 18 37.1								Pulp Tray Recycle Kraft 80% + Newspaper 20%				Bubble Bag (Bubble Ø=10mm) Single layer Double layer				(PP)Pepa paper 0.254mm / 10mil 3M 467 T=0.05mm / 2mil				Check							
6						14 22.5 18 37.1								Weight/gs +/-5%				Bubble Bag (Bubble Ø=10mm) Single layer Double layer				PC 8B35 0.254mm / 10mil 3M 468 T=0.127mm / 5mil				Design Guiqun 03.25.20							
7						14 22.5 18 37.1								Thickness/mm 1.5 2.0				Bubble Bag (Bubble Ø=10mm) Single layer Double layer				PC 8010 0.381mm / 15mil 3M 7945 T=0.127mm / 5mil											
This document and the technical data disclosed are proprietary to Accton Tech. Corp. and shall not be duplicated, used, released, or disclosed without expressed written permission.		Coated UV PP Film				14 22.5 18 37.1								Draft Angle 3° Hydrourous % 7-14%				EPE Foam White Pink				other 0.500mm / 20mil 3M 7945 T=0.127mm / 5mil											
		PP Film LF / 0.15 mm DF / 0.18 mm				14 22.5 18 37.1												Laminated Non - laminated				PP Film LF (T = 0.045mm) DF (T = 0.035mm)											



CSAATT000008
AP420
Ver. R01
Ph. Ap420@csaatt.com

阿里云
制造商: 阿里巴巴云计算有限公司
产品名称: 无线接入点
型号: AP420
输入: POC 48V



Made in China

location