


Prüfbericht-Nr.: Test report no.:	IN26SIHY 001	Auftrags-Nr.: Order no.:	147163601 010	Seite 1 von 86 Page 1 of 86
Kunden-Referenz-Nr.: Client reference no.:	1039889	Auftragsdatum: Order date:	2026-02-05	
Auftraggeber: Client:	Bosch Global Software Technologies Private Limited MS/PAC, Ban601, Post Box No 3000 Hosur Road, Aduodi Bengaluru 560030 India			
Prüfgegenstand: Test item:	iTraMS Gen2E HF			
Bezeichnung / Typ-Nr.: Identification / Type no.:	CU-403-1011-01 CU-403-1011-02			
Auftrags-Inhalt: Order content:	Testing and issue of Test Report			
Prüfgrundlage: Test specification:	CFR 47 FCC Part 24 Subpart E, FCC Part15 SubpartC 15.207, 15.209 RSS Gen Issue 5, RSS-133 Issue 7			
Wareneingangsdatum: Date of sample receipt:	2026-03-17			
Prüfmuster-Nr.: Test sample no.:	A004227783-001, 003 A004227783-007, 009			
Prüfzeitraum: Testing period:	2026-03-18 - 2026-04-30			
Ort der Prüfung: Place of testing:	Wireless laboratory, Bangalore			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (India) Pvt.Ltd., 27/B, 2nd Cross, Electronic City Phase1 Bangalore -560 100, India FCC Test site registration number: 496599 ISED Test site registration number: 27711			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	genehmigt von: authorized by:			
Datum: Date: 2026-08-07		Ausstellungsdatum: Issue date: 2026-08-07		
Stellung / Position:	Darshan D Senior Engineer	Stellung / Position:	Yogesh V Assistant Manager	
Sonstiges / Other:	FCC ID: 2AVVT-CU4031011 IC: 25763-CU4031011			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
* Legende:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht - Nr.:

Test Report No.:

IN26SIHY 001

Seite 2 von 86

Page 2 of 86

- | | |
|---|--|
| 1 | <p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.</p> <p>Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p> |
| 2 | <p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature</p> <p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i></p> |
| 3 | <p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben.</p> <p>Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i></p> <p><i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p> |
| 4 | <p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p> |

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 3 von 86
Page 3 of 86

TEST SUMMARY

Test Item	FCC Clause	ISED Clause	Results
Conducted Output Average Power and Peak to Average Power ratio	§2.1046 §24.232 (c) & (d)	RSS-133, §5.5	Pass
Equivalent Isotropic Radiated Power (EIRP) / Effective Radiated Power (ERP)	§2.1046 §24.232 (c) & (d)	RSS-Gen, §6.12;	Pass
Field strength of spurious radiation	§2.1053 §24.238	RSS-133, §5.6	Pass
Frequency Stability	§2.1055 §24.235	RSS-Gen, §6.13;	N/T
Emission Bandwidth and Occupied Bandwidth	§2.1049	RSS-Gen, §5.1	N/T
Band Edge	§2.1051 §24.238	RSS-Gen, §6.6	N/T
Spurious emissions at antenna terminals	§2.1051 §24.238	RSS-Gen, §6.13	N/T

Note:

N/T: Not Tested – These test cases have not been executed, as the product incorporates the certified RF module **LTE Module, Model: AG35-NA** from **Quectel**. This module has been tested at **Sporton International (Kunshan) Inc. No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China** under **FCC ID: XMR201905AG35NA**. Therefore, the mentioned test cases are excluded, and relevant details can be found in the module's test report No. **FG912203B**,

Product Category: Electronics Testing
Test Discipline: EMC Test Facility

Prüfbericht - Nr.:

Test Report No.:

IN26SIHY 001

Seite 4 von 86

Page 4 of 86

REVISION HISTORY OF THIS REPORT

Report Number	Version	Description	Issue date
IN26SIHY 001	01	Initial issue of report	2026-08-07

Table of Contents

1	GENERAL REMARKS	6
1.1	Attachments	6
2	TEST SITES	7
2.1	Testing Facilities.....	7
2.2	List of Test and Measurement Instruments.....	7
3	GENERAL PRODUCT INFORMATION.....	8
3.1	Product Function and Intended Use.....	8
3.2	Ratings and System Details of Equipment under Test	8
3.3	Measurement Uncertainty	9
4	TEST SET-UP AND OPERATION MODE.....	10
4.1	Principle of Configuration Selection	10
4.2	UUT Operation and Software	10
4.3	Special Accessories and Auxiliary Equipment	10
4.4	Countermeasures to achieve EMC Compliance	10
4.5	Report references.....	10
5	Operational Description of the product	11
6	TEST METHODOLOGY	12
6.1	AC Power lines Conducted emission.	12
6.1.1	Test Setup Configuration	12
6.2	Radiated Emission Test	13
6.2.1	Test Setup Configuration	13
7	TEST RESULTS	17
7.1	PEAK – Average Ratio	17
7.2	EFFECTIVE (ISOTROPIC) RADIATED POWER	24
7.3	Field Strength of Spurious Radiation	31
	Simultaneous Operations:.....	80
8	LIST OF TABLES.....	86
9	LIST OF FIGURESS.....	86

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 6 von 86
Page 6 of 86

1 GENERAL REMARKS

1.1 Attachments

All attachments are part of this test report and are issued in separate document

1: TEST SETUP PHOTOS

2: EUT EXTERNAL PHOTOS

3: EUT INTERNAL PHOTOS

4: MAXIMUM PERMISSIBLE EXPOSURE INFORMATION

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 7 von 86
Page 7 of 86

2 TEST SITES

2.1 Testing Facilities

1. TÜV Rheinland (India) Pvt.Ltd.,
27/B, 2nd Cross,
ElectronicCityPhase1
Bangalore – 560 100,
India
2. TUV Rheinland (India) Private Limited
108, Beside ISBR Business School,
Electronic city Phase I
Bangalore - 560 100.
India

2.2 List of Test and Measurement Instruments

Table 1: List of test and measurement instruments

Equipment	Manufacturer	Model Name	Serial Number	Firmware Versions	Calibration Due Date	Periodicity	Test Facility
EMI Receiver	Rohde & Schwarz	ESW 44	101773	1.72 SP5	16.02.2027	Yearly	Radiated Spurious Emission
Active loop antenna	Frankonia	LAX-10	LAX-10-800	-	17.11.2026	Yearly	
Balun & Biconical Antenna	Schwarzbeck Mess-Elektronik	BBA 9106+VHBB 9124	9124-1117	-	11.04.2026	Yearly	
Log Periodic Antenna	Schwarzbeck Mess-Elektronik	VUSLP 9111B	9111B-324	-	26.05.2026	Yearly	
Horn Antenna	Schwarzbeck	BBHA 9120D	01944	-	11.11.2026	Yearly	
Double-Ridged Waveguide Horn Antenna	ETS	116706	00107323	-	16.05.2026	Yearly	
EMI Test Receiver	Rohde & Schwarz	ESW44	101732	1.72.SP1	20.11.2026	Yearly	Antenna – Port Conducted
30dB Attenuator	Mini Circuits	BW-N30W5+	938		06.10.2026		
Radio Communication tester	Rohde & Schwarz	CMW 500	1201.0002K50	-	10.02.2027	Yearly	

Table 2: Instrument application Software versions

SL. No.	Test Type	Application software	Version
1	Radiated spurious emission measurement in SAC	BATEMC	V2022.0.11.0
2	Radiated spurious emission measurement in FAC	EMC 32	10.60.20

3 GENERAL PRODUCT INFORMATION

3.1 Product Function and Intended Use

iTraMS is a platform for TCU or CCU that is an onboard system that controls wireless tracking, diagnostics and communication to/from the vehicle; these systems can be used for fleet management and vehicle tracking, among many others. This CCU has the following connectivity solutions:

1. Wireless Connectivity :

- Cellular – LTE
- WLAN
- Wi-Fi
- GNSS

2. Wireless Connectivity :

- CAN
- Ethernet
- USB

3.2 Ratings and System Details of Equipment under Test

Table 3: Ratings and System Details as declared by Supplier*

Radio Protocol		LTE Band 2				
LTE E-UTRA operating bands		Band	Bandwidth (MHz)	UL Frequency (MHz)	DL Frequency (MHz)	Modulation
		2	1.4, 3, 5, 10, 15, 20	1850.7 - 1909.3	1930.7-1989.3	QPSK, 16QAM
Transmitted Power for LTE (dBm)		Band	Power Class	Max. Conducted Average. Output Power		
		2	Power Class 3:23dBm	22.65dBm@CB1.4 MHz, QPSK (1860.7MHz)		
Modulation		LTE system, QPSK modulation LTE system, 16QAM modulation				
Antenna Type		Gen 2E & MA284 4 in 1 Adhesive Mount				
Number of Antenna		2				
Antenna Gain		Refer Tabel 4 & 5				
Supply Voltage to Product		12V DC 200mA Approx.				
Environmental conditions	Storage	-40°C to 80°C				
	Operating	-40°C to 70°C				
EUT Dimension (L x W x H)		190 X 95 X s42 mm				

Antenna Details:

Antenna Type	Cellular Bands	Uplink Frequency Range (MHz)	Downlink Frequency Range (MHz)	Antenna Gain (dBi)
Primary Antenna (External)	Band 2	1850.7 – 1909.3	1930.7 – 1989.3	5.45
	Band 4	1710.7 – 1754.3	2110.7 – 2154.3	5.00
	Band 5	824.7 – 848.3	869.7 – 893.3	1.80
	Band 7	2502.5 – 2567.5	2622.5 – 2687.5	4.14

Table 4: (Gen 2E) Internal Antenna Gain

Antenna Type	Cellular Bands	Uplink Frequency Range (MHz)	Downlink Frequency Range (MHz)	Antenna Gain (dBi)
Primary Antenna (External)	Band 2	1850.7 – 1909.3	1930.7 – 1989.3	3.63
	Band 4	1710.7 – 1754.3	2110.7 – 2154.3	3.15
	Band 5	824.7 – 848.3	869.7 – 893.3	2.34
	Band 7	2502.5 – 2567.5	2622.5 – 2687.5	2.85
	Band 12	699.7 – 715.3	729.7 – 745.3	1.99
	Band 13	779.5 – 784.5	748.5 – 753.5	1.99
	Band 17	706.5 – 713.5	736.5 – 743.5	1.99

Table 5: (MA284 4 in 1 Adhesive Mount) Extrenal Antenna Gain

*Disclaimer:

The above information/data is supplied by the client and the same is considered to arrive at the final value. Any changes made apart from the specified specification, can directly impact on the tests results. Refer the products user manual for more details.

3.3 Measurement Uncertainty

Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k = 2$

Table 6: Calculated Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±0.67 dB
Power Spectral Density, conducted	±0.85 dB
Unwanted Emissions, conducted	±2.58 dB
All emissions, radiated	±3.67 dB

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 10 von 86
Page 10 of 86

4 TEST SET-UP AND OPERATION MODE

4.1 Principle of Configuration Selection

Transmission was enabled with highest possible duty cycle on low, mid and high channels.

4.2 UUT Operation and Software

Software Version: 02.004.00
CU-403-1011-01- **AD00 A1 0143 5EA**
Hardware Version: CU-403-1011-02 - **AD00 A1 0154 5EA**

4.3 Special Accessories and Auxiliary Equipment

- None

4.4 Countermeasures to achieve EMC Compliance

- None

4.5 Report references

- None

Note:

TUV Sample Identification number: – A004227783-001 Radiated test Sample
A004227783-003 Conducted test Sample

5 Operational Description of the product

The iTraMS Gen2E CCU has a NAD (Network Access Device) module AG35 and a microcontroller RH850, which are connected over SPI to enable telematics functionality.

The AG35 NAD module comes from Quectel and is a North America specific variant. It functions only with North America regional LTE bands. It also contains embedded GNSS supporting GPS/GLONASS/Beidou/Galileo/QZSS and supports location-based telematics features such as tracking and geofencing. The internal antenna HW variant has dedicated LTE & GNSS antennas on the PCB.

The RH850 microcontroller comes from Renesas and collects vehicle data over the CAN network. It enables telematics related features on vehicle parameters such as engine performance.

The CCU also has an on-board accelerometer & gyro sensor, SMI230 from Bosch, which enables inertial monitoring


6 TEST METHODOLOGY

6.1 AC Power lines Conducted emission.

Measured levels of ac powerline conducted emission across the 50Ω LISN port (to which the EUT is connected). All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer.

The device is placed on the test table, raised 80cm above the reference ground plane. The vertical conducting plane is located 40cm to the rear of the device. AC Conducted emission measurement is made over frequency range from 150kHz to 30MHz, this measurement was performed with EUT powered with an AC adaptor with 110V AC 60Hz supply.

6.1.1 Test Setup Configuration

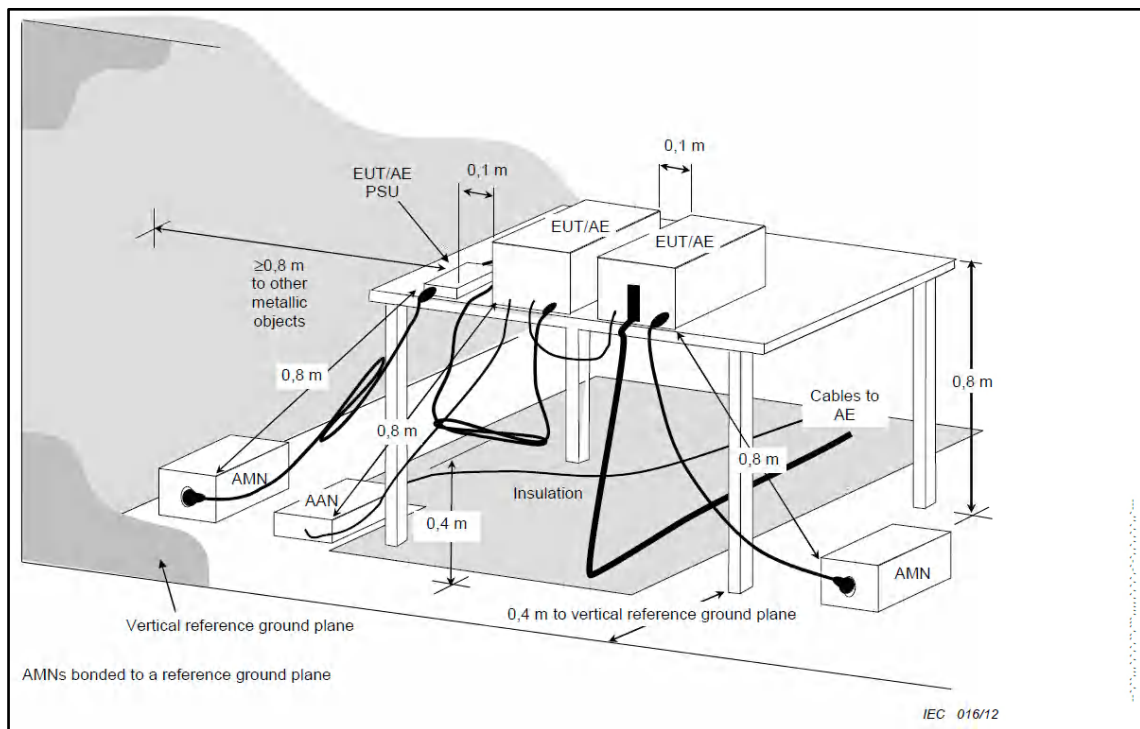

6.2 Radiated Emission Test

Frequency Range 9 kHz - 30 MHz

Test performed as per ANSI C63.4-2014 section 8.3

The loop Antenna was placed at 1m above the ground plane & EUT is 3 meters far from the measuring antenna. With 3m measurement distance, correction data were applied to the measured results. The test arrangement, measuring antenna guidelines and operational configurations in 8.2.1 and 8.2.2, shall be followed. The measurement antenna shall be positioned with its plane perpendicular to the ground at the Specified distance, when perpendicular to the ground plane, the lowest height of the magnetic antenna shall be 1 m above the ground and shall be positioned at the specified distance from the EUT. EUT & its associates are placed on non-conducting table of 0.8m height which is placed on the turn table, For each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable. The report shall list worst case emission results, for each of the parallel & perpendicular orientations.

6.2.1 Test Setup Configuration

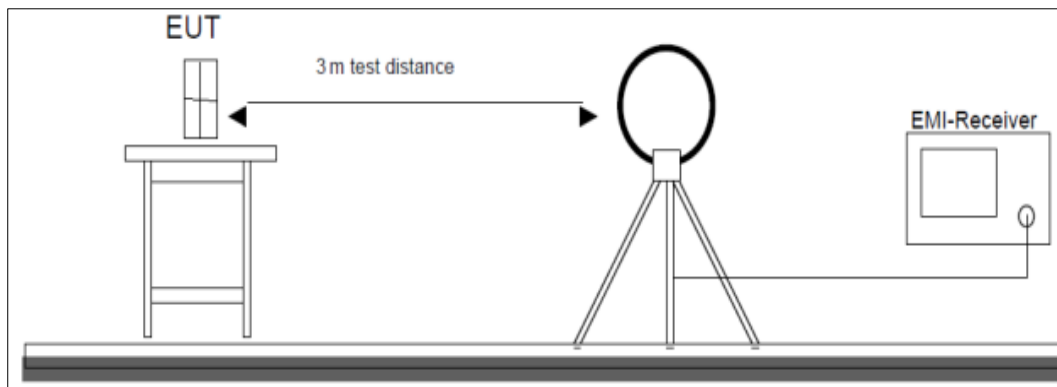


Figure 1: Frequency Range 9 kHz- 30 MHz

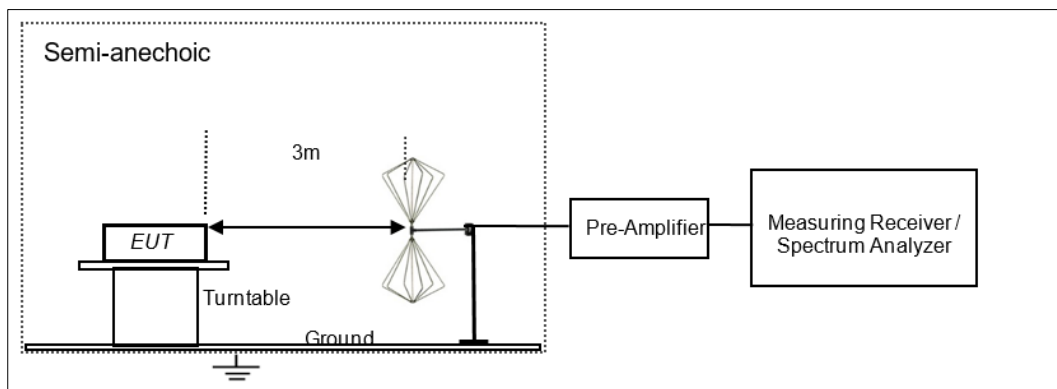


Figure 2: Frequency Range 30 MHz – 200 MHz

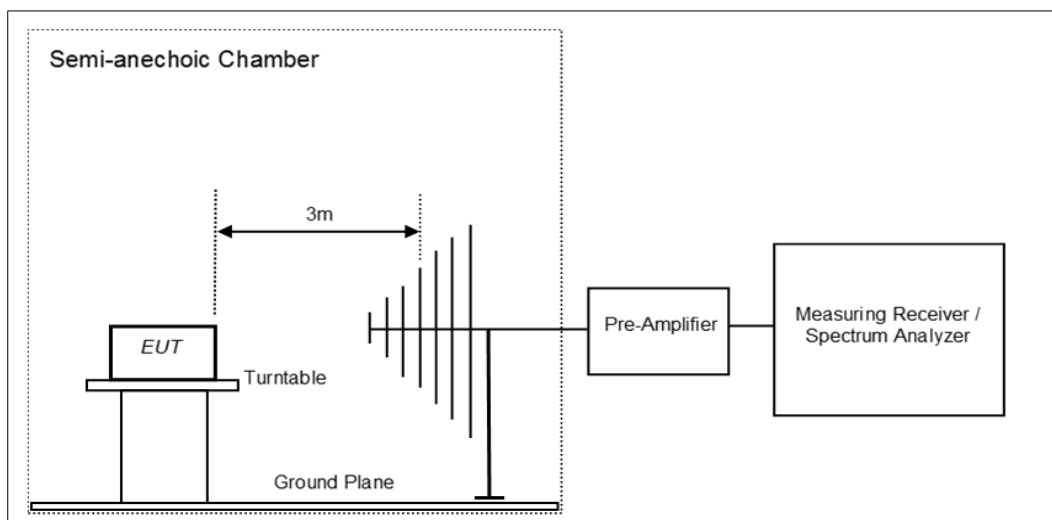


Figure 3: Frequency Range 200 MHz - 1GHz

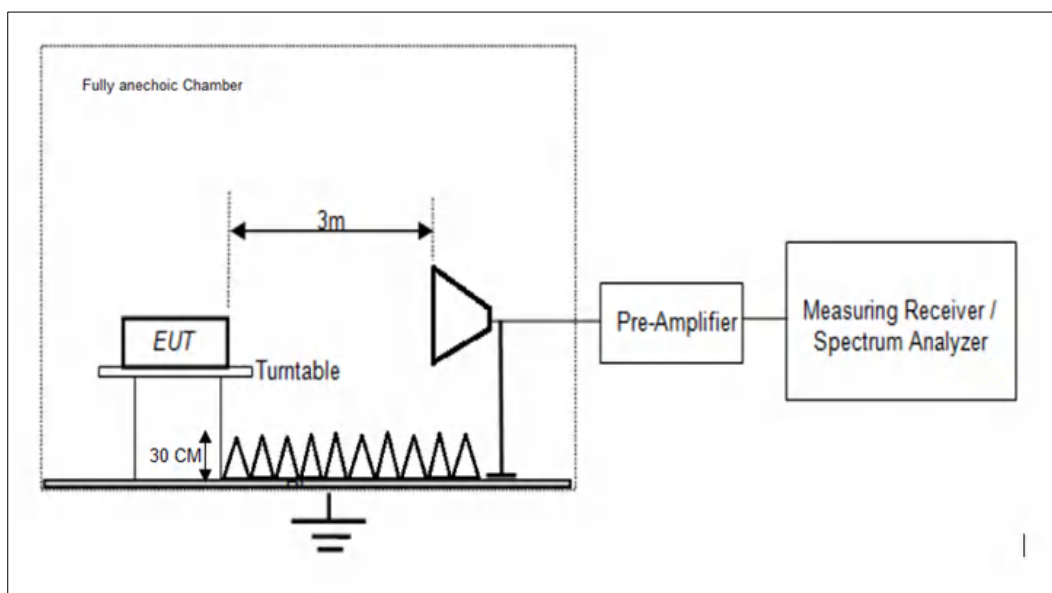


Figure 4: Frequency Range above 1 GHz

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 15 von 86
Page 15 of 86

Frequency Range 30MHz to 10th harmonics of the highest fundamental frequency

Test performed as per ANSI C63.26-2015

Radiated spurious emission test are performed as below.

All the radiated emission measurements are performed in accordance with common requirement specified in 5.5.2 and Pre-test site path loss correction factors are used to adjust the EUT emission data in place of two step substitution method (as defined in Annex B of ANSI C63.26-2015).

The equipment under test is placed on non-conductive table at 3m away from the receive antenna in accordance with above mentioned standard. Turn table is rotated through 360 degree, and receiver antenna height is varied in order to determine the level of maximum emission. The maximum emission level and position of the maximized emission is recorded with use of spectrum analyzer.

Using pre-test site path loss to determine EUT emission power:

- 1) EUT emission powers are calculated using the following equation:

$$\text{Emission Power} = \text{EUT}_{\text{Prec}} [\text{dBm EIRP/ ERP}] + \text{P}_L [\text{dB}]$$

where

EUT_{Prec} = power of the emission measured at the test receiver during EUT measurements.

P_L = path loss determined on the frequency of the EUT emission or calculated using linear interpolation between site characterization frequencies.

- 2) This is the level to be compared against the regulatory limit as it is the emission power referenced back to the EUT on the test site.

Prüfbericht - Nr.:


Test Report No.:

IN26SIHY 001


Seite 16 von 86

Page 16 of 86

Test site-up for radiated measurements

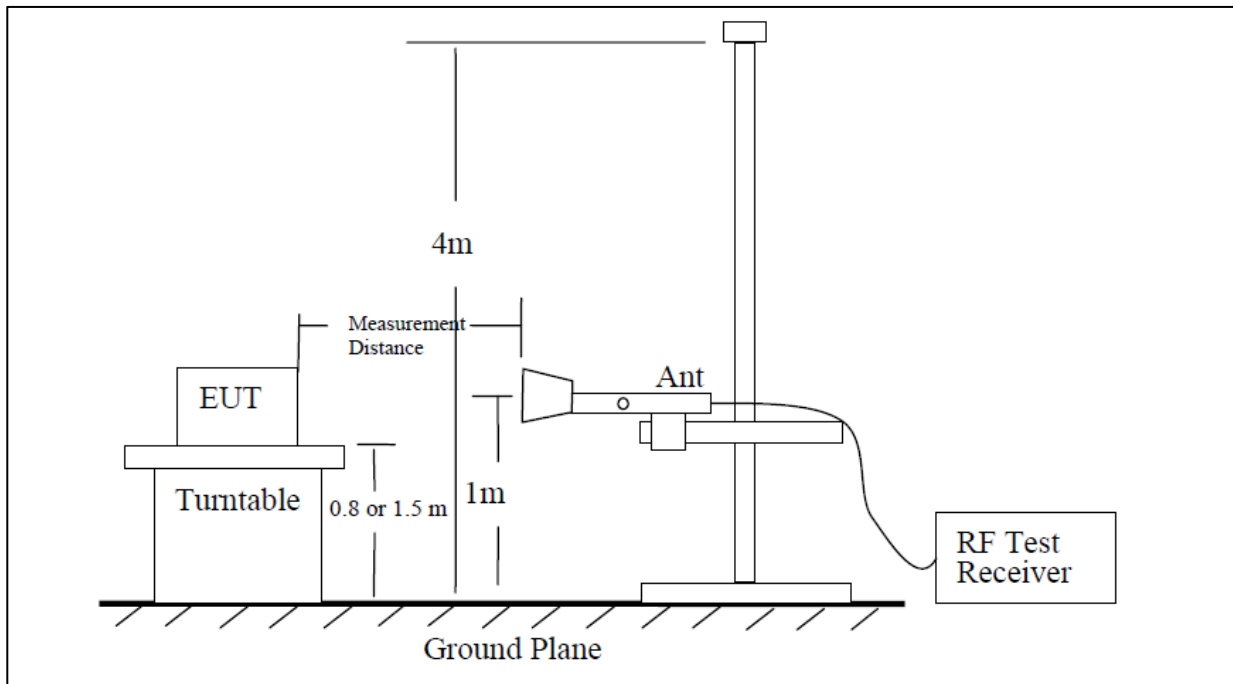

Substitution method set-up for radiated emission

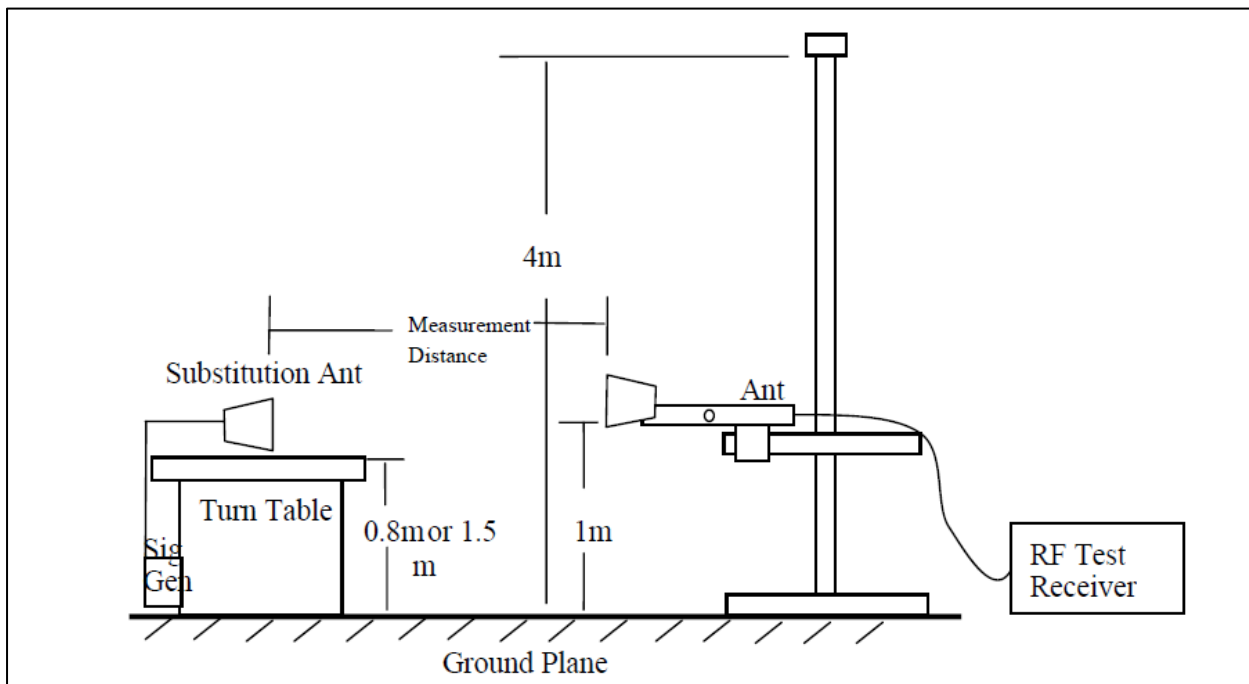

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 17 von 86
Page 17 of 86

7 TEST RESULTS


7.1 PEAK – Average Ratio

Result

Pass

Specification	FCC Part §2.1046 & §24.232 RSS-133, §5.5 ANSI C63.26-2015
Test Method / Procedure	As per subclause 5 in 971168 D01 Power Meas License Digital Systems v03r01
Detector Function	Peak/Average
Requirement	PAPR ≤ 13dB

Test Setup:

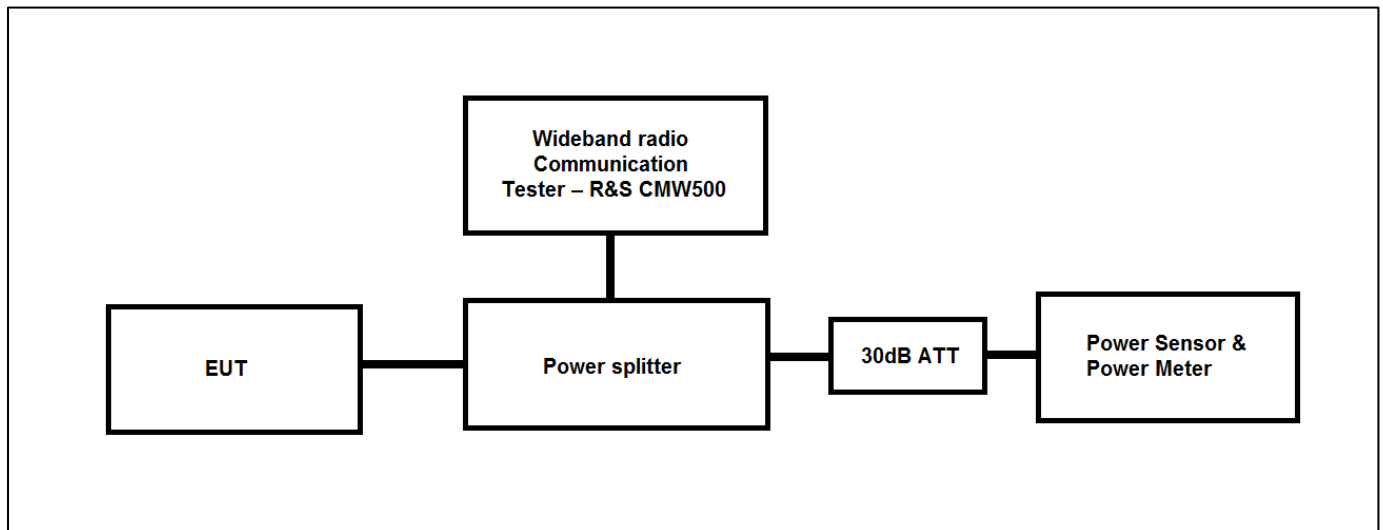

Environmental Conditions:

Temperature: +22.5°C

Voltage: 12VDC through AC-DC Adapter

Relative Humidity: 62%

KDB Guidelines applied:

Measurements were made as per section 5.2.4 in KDB 971168 D01 Power Meas License Digital Systems v03r01

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 18 von 86
Page 18 of 86

Test results:

Note:

- 1 All the losses are included during measurement and final values are mentioned in the test report.
2. Total Average Output power (dBm) = Measured Average power (dBm) + Attenuator factor (30dB) + Power Splitter (6 dB) + Cable loss (1dB)
3. PAPR (dB) = Measured Peak Power(dBm) – Measured Average Power(dBm)

PAPR Test Results

LTE Band: 2

Channel Bandwidth (MHz)	Modulation Technique	Channel Frequency (MHz)	RB Position & RB Allocation		Measured Peak Power (dBm)	Measured Average Power (dBm)	PAPR (dB)	Limit (dB)
			Size	Offset				
1.4MHz	QPSK	1860.7	1	0	25.03	22.19	2.84	13.00
			1	3	24.97	22.27	2.70	13.00
			1	5	25.01	22.19	2.82	13.00
			3	0	25.75	22.65	3.10	13.00
			3	3	25.53	22.47	3.06	13.00
			6	0	25.36	21.45	3.91	13.00
		1890.0	1	0	25.80	22.48	3.32	13.00
			1	3	25.68	22.51	3.17	13.00
			1	5	25.63	22.34	3.29	13.00
			3	0	26.09	22.65	3.44	13.00
			3	3	26.08	22.62	3.46	13.00
			6	0	25.81	21.69	4.12	13.00
		1919.3	1	0	25.39	22.39	3.00	13.00
			1	3	25.25	22.41	2.84	13.00
			1	5	25.29	22.29	3.00	13.00
			3	0	25.46	22.45	3.01	13.00
			3	3	25.41	22.50	2.91	13.00
			6	0	25.44	21.62	3.82	13.00
	16QAM	1860.7	1	0	24.97	21.29	3.68	13.00
			1	3	25.16	21.45	3.71	13.00
			1	5	24.79	21.23	3.56	13.00
			3	0	25.77	21.76	4.01	13.00
			3	3	25.71	21.74	3.97	13.00
			6	0	25.07	20.33	4.74	13.00
		1890.0	1	0	25.63	21.45	4.18	13.00
			1	3	25.59	21.53	4.06	13.00
			1	5	25.48	21.43	4.05	13.00
			3	0	26.04	21.66	4.38	13.00
			3	3	25.92	21.55	4.37	13.00
			6	0	25.72	20.69	5.03	13.00
		1919.3	1	0	25.34	21.63	3.71	13.00
			1	3	24.94	21.55	3.39	13.00
			1	5	24.89	21.34	3.55	13.00
			3	0	25.21	21.40	3.81	13.00
			3	3	25.50	21.79	3.71	13.00
			6	0	25.31	20.62	4.69	13.00

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 19 von 86
Page 19 of 86

Channel Bandwidth (MHz)	Modulation Technique	Channel Frequency (MHz)	RB Position & RB Allocation		Measured Peak Power (dBm)	Measured Average Power (dBm)	PAPR (dB)	Limit (dB)
			Size	Offset				
3MHz	QPSK	1861.5	1	0	25.34	22.27	3.07	13.00
			1	8	25.18	22.42	2.76	13.00
			1	14	25.16	22.34	2.82	13.00
			8	0	25.23	21.68	3.55	13.00
			8	7	25.15	21.59	3.56	13.00
			15	0	25.76	21.57	4.19	13.00
		1890.0	1	0	25.65	22.41	3.24	13.00
			1	8	25.42	22.25	3.17	13.00
			1	14	25.90	22.64	3.26	13.00
			8	0	25.37	21.61	3.76	13.00
			8	7	25.38	21.60	3.78	13.00
			15	0	25.81	21.55	4.26	13.00
		1918.5	1	0	25.91	22.65	3.26	13.00
			1	8	25.37	22.49	2.88	13.00
			1	14	25.43	22.51	2.92	13.00
			8	0	25.31	21.76	3.55	13.00
			8	7	24.37	20.95	3.42	13.00
			15	0	25.58	21.62	3.96	13.00
	16QAM	1861.5	1	0	25.14	21.44	3.70	13.00
			1	8	25.06	21.26	3.80	13.00
			1	14	24.67	20.97	3.70	13.00
			8	0	24.99	20.33	4.66	13.00
			8	7	25.10	20.62	4.48	13.00
			15	0	25.55	20.71	4.84	13.00
		1890.0	1	0	25.51	21.42	4.09	13.00
			1	8	25.40	21.43	3.97	13.00
			1	14	25.43	21.39	4.04	13.00
			8	0	24.12	19.35	4.77	13.00
			8	7	25.31	20.61	4.70	13.00
			15	0	25.63	20.60	5.03	13.00
		1918.5	1	0	25.29	21.32	3.97	13.00
			1	8	24.72	21.17	3.55	13.00
			1	14	24.97	21.35	3.62	13.00
			8	0	24.99	20.54	4.45	13.00
			8	7	24.76	20.46	4.30	13.00
			15	0	25.19	20.32	4.87	13.00

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 20 von 86
Page 20 of 86

Channel Bandwidth (MHz)	Modulation Technique	Channel Frequency (MHz)	RB Position & RB Allocation		Measured Peak Power (dBm)	Measured Average Power (dBm)	PAPR (dB)	Limit (dB)
			Size	Offset				
5MHz	QPSK	1862.5	1	0	25.14	22.07	3.07	13.00
			1	13	24.94	22.19	2.75	13.00
			1	24	24.11	21.20	2.91	13.00
			12	0	24.78	21.23	3.55	13.00
			12	13	24.73	21.27	3.46	13.00
			25	0	25.50	21.22	4.28	13.00
		1890.0	1	0	25.31	22.07	3.24	13.00
			1	13	25.47	22.30	3.17	13.00
			1	24	25.42	22.19	3.23	13.00
			12	0	25.10	21.31	3.79	13.00
			12	13	25.17	21.35	3.82	13.00
			25	0	24.89	20.45	4.44	13.00
		1917.5	1	0	25.32	22.26	3.06	13.00
			1	13	24.09	21.31	2.78	13.00
			1	24	24.97	22.12	2.85	13.00
			12	0	24.86	21.25	3.61	13.00
			12	13	23.87	20.43	3.44	13.00
			25	0	25.11	21.02	4.09	13.00
	16QAM	1862.5	1	0	24.83	21.03	3.80	13.00
			1	13	24.70	21.01	3.69	13.00
			1	24	23.86	20.07	3.79	13.00
			12	0	24.46	20.03	4.43	13.00
			12	13	24.84	20.40	4.44	13.00
			25	0	25.34	20.28	5.06	13.00
		1890.0	1	0	25.15	21.06	4.09	13.00
			1	13	25.11	21.22	3.89	13.00
			1	24	24.28	20.27	4.01	13.00
			12	0	24.88	20.17	4.71	13.00
			12	13	25.01	20.33	4.68	13.00
			25	0	25.60	20.30	5.30	13.00
		1917.5	1	0	25.24	21.22	4.02	13.00
			1	13	24.72	21.10	3.62	13.00
			1	24	23.69	20.03	3.66	13.00
			12	0	25.11	20.51	4.60	13.00
			12	13	24.67	20.29	4.38	13.00
			25	0	25.47	20.43	5.04	13.00

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 21 von 86
Page 21 of 86

Channel Bandwidth (MHz)	Modulation Technique	Channel Frequency (MHz)	RB Position & RB Allocation		Measured Peak Power (dBm)	Measured Average Power (dBm)	PAPR (dB)	Limit (dB)
			Size	Offset				
10MHz	QPSK	1865.0	1	0	24.97	22.10	2.87	13.00
			1	25	25.03	22.11	2.92	13.00
			1	49	25.14	22.05	3.09	13.00
			25	0	24.92	21.33	3.59	13.00
			25	25	24.83	21.21	3.62	13.00
			50	0	25.71	21.30	4.41	13.00
		1890.0	1	0	25.62	22.27	3.35	13.00
			1	25	25.41	22.23	3.18	13.00
			1	49	24.59	21.31	3.28	13.00
			25	0	25.24	21.39	3.85	13.00
			25	25	25.21	21.41	3.80	13.00
			50	0	25.55	21.34	4.21	13.00
		1915.0	1	0	25.51	22.19	3.32	13.00
			1	25	25.07	22.20	2.87	13.00
			1	49	25.29	22.31	2.98	13.00
			25	0	25.23	21.34	3.89	13.00
			25	25	24.84	21.28	3.56	13.00
			50	0	25.09	21.22	3.87	13.00
	16QAM	1865.0	1	0	25.03	21.29	3.74	13.00
			1	25	24.82	21.22	3.60	13.00
			1	49	25.03	21.19	3.84	13.00
			25	0	24.86	20.31	4.55	13.00
			25	25	24.57	20.01	4.56	13.00
			50	0	25.21	20.37	4.84	13.00
		1890.0	1	0	25.41	21.32	4.09	13.00
			1	25	25.18	21.19	3.99	13.00
			1	49	25.42	21.31	4.11	13.00
			25	0	25.19	20.41	4.78	13.00
			25	25	25.27	20.52	4.75	13.00
			50	0	25.51	20.43	5.08	13.00
		1915.0	1	0	25.33	21.22	4.11	13.00
			1	25	25.10	21.21	3.89	13.00
			1	49	25.03	21.18	3.85	13.00
			25	0	25.22	20.36	4.86	13.00
			25	25	24.97	20.47	4.50	13.00
			50	0	25.32	20.38	4.94	13.00

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 22 von 86
Page 22 of 86

Channel Bandwidth (MHz)	Modulation Technique	Channel Frequency (MHz)	RB Position & RB Allocation		Measured Peak Power (dBm)	Measured Average Power (dBm)	PAPR (dB)	Limit (dB)
			Size	Offset				
15MHz	QPSK	1867.5	1	0	24.21	21.33	2.88	13.00
			1	38	25.48	22.42	3.06	13.00
			1	74	25.42	22.19	3.23	13.00
			36	0	25.05	21.37	3.68	13.00
			36	39	15.69	21.49	-5.80	13.00
			75	0	25.55	21.21	4.34	13.00
		1890.0	1	0	25.11	22.25	2.86	13.00
			1	38	25.24	22.30	2.94	13.00
			1	74	25.53	22.29	3.24	13.00
			36	0	24.87	21.19	3.68	13.00
			36	39	25.23	21.46	3.77	13.00
			75	0	25.55	21.25	4.30	13.00
		1912.5	1	0	25.68	22.20	3.48	13.00
			1	38	25.69	22.51	3.18	13.00
			1	74	25.37	22.42	2.95	13.00
			36	0	25.49	21.44	4.05	13.00
			36	39	25.21	21.51	3.70	13.00
			75	0	25.81	21.43	4.38	13.00
	16QAM	1867.5	1	0	24.07	20.33	3.74	13.00
			1	38	25.14	21.28	3.86	13.00
			1	74	25.12	21.11	4.01	13.00
			36	0	25.03	20.41	4.62	13.00
			36	39	24.84	20.15	4.69	13.00
			75	0	25.59	20.41	5.18	13.00
		1890.0	1	0	25.32	21.11	4.21	13.00
			1	38	25.17	21.08	4.09	13.00
			1	74	25.44	21.15	4.29	13.00
			36	0	24.99	20.17	4.82	13.00
			36	39	25.14	20.37	4.77	13.00
			75	0	25.72	20.34	5.38	13.00
		1912.5	1	0	24.84	20.39	4.45	13.00
			1	38	25.10	21.12	3.98	13.00
			1	74	24.66	21.07	3.59	13.00
			36	0	25.46	20.45	5.01	13.00
			36	39	25.19	20.55	4.64	13.00
			75	0	25.75	20.42	5.33	13.00

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 23 von 86
Page 23 of 86

Channel Bandwidth (MHz)	Modulation Technique	Channel Frequency (MHz)	RB Position & RB Allocation		Measured Peak Power (dBm)	Measured Average Power (dBm)	PAPR (dB)	Limit (dB)
			Size	Offset				
20MHz	QPSK	1870.0	1	0	25.01	22.11	2.90	13.00
			1	50	25.22	22.18	3.04	13.00
			1	99	25.47	22.16	3.31	13.00
			50	0	25.06	21.39	3.67	13.00
			50	50	25.16	21.35	3.81	13.00
			100	0	25.74	21.41	4.33	13.00
		1890.0	1	0	25.59	22.30	3.29	13.00
			1	50	25.44	22.29	3.15	13.00
			1	99	25.57	22.19	3.38	13.00
			50	0	25.20	21.30	3.90	13.00
			50	50	25.28	21.41	3.87	13.00
			100	0	26.00	21.35	4.65	13.00
		1910.0	1	0	25.62	22.13	3.49	13.00
			1	50	25.82	22.55	3.27	13.00
			1	99	25.36	22.39	2.97	13.00
			50	0	25.62	21.52	4.10	13.00
			50	50	25.10	21.31	3.79	13.00
			100	0	26.24	21.49	4.75	13.00
	16QAM	1870.0	1	0	25.49	21.58	3.91	13.00
			1	50	25.15	21.17	3.98	13.00
			1	99	25.29	21.19	4.10	13.00
			50	0	24.93	20.31	4.62	13.00
			50	50	25.12	20.42	4.70	13.00
			100	0	25.58	20.45	5.13	13.00
		1890.0	1	0	25.63	21.61	4.02	13.00
			1	50	25.33	21.44	3.89	13.00
			1	99	25.44	21.29	4.15	13.00
			50	0	25.14	20.32	4.82	13.00
			50	50	25.29	20.42	4.87	13.00
			100	0	25.65	20.41	5.24	13.00
		1910.0	1	0	25.52	21.24	4.28	13.00
			1	50	25.36	21.31	4.05	13.00
			1	99	24.89	21.28	3.61	13.00
			50	0	25.59	20.52	5.07	13.00
			50	50	25.17	20.41	4.76	13.00
			100	0	26.08	20.49	5.59	13.00

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 24 von 86
Page 24 of 86


7.2 EFFECTIVE (ISOTROPIC) RADIATED POWER

Result

Pass

Specification	FCC Part §2.1046 & §24.232 RSS-Gen, §6.12, RSS-133 ANSI C63.26-2015
Test Method / Procedure	As per subclause 5 in 971168 D01 Power Meas License Digital Systems v03r01
Detector Function	Average
Requirement	The EIRP of mobile transmitters and auxiliary test transmitters must not exceed 2 watts

Test Setup:

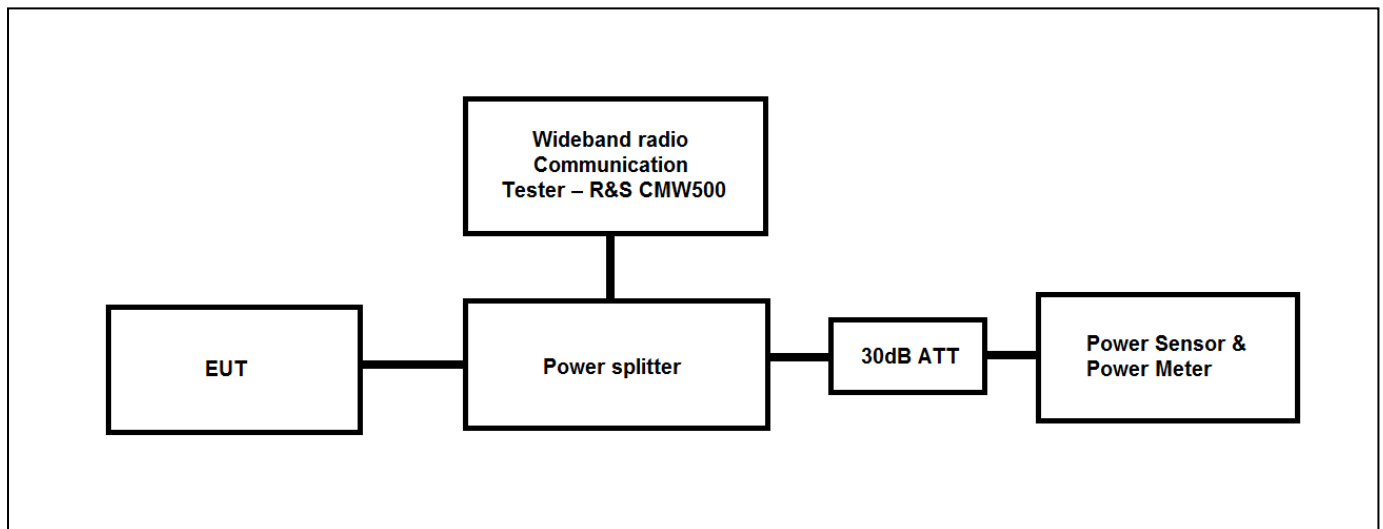

Environmental Conditions:

Temperature: +22.5°C

Voltage: 12VDC through AC-DC Adapter

Relative Humidity: 62%

KDB Guidelines applied:

Measurements were made as per section 5.2.4 in KDB 971168 D01 Power Meas License Digital Systems v03r01

Prüfbericht - Nr.:

Test Report No.:

IN26SIHY 001

Seite 25 von 86

Page 25 of 86

Test Results:

Note:

1. All the losses are included during measurement and final values are mentioned in the test report.
2. Total Average Output power (dBm) = Measured Average power (dBm) + Attenuator factor (30dB) + Power Splitter (3.3 dB) + Cable loss (1dB)
1. For getting the EIRP (Equivalent Isotropic Radiated Power), the following formula should be taken to calculate it,

ERP (dBm) = Conducted power (dBm) + Antenna gain (dBd)

EIRP (dBm) = Conducted power (dBm) + Antenna gain (dBi)

LTE Band: 2

Internal Antenna_Gain 5.45 dBi & External Antenna_ Gain 3.63dBi

Channel Bandwidth (MHz)	Modulation	Channel Frequency (MHz)	RB Position & RB Allocation		Measured Average Power (dBm)	e.i.r.p (dBm)	Limit (dBm)
			Size	Offset			
1.4MHz	QPSK	1860.7	1	0	22.19	27.64	33.00
			1	3	22.27	27.72	33.00
			1	5	22.19	27.64	33.00
			3	0	22.65	28.10	33.00
			3	3	22.47	27.92	33.00
			6	0	21.45	26.90	33.00
		1890	1	0	22.48	27.93	33.00
			1	3	22.51	27.96	33.00
			1	5	22.34	27.79	33.00
			3	0	22.65	28.10	33.00
			3	3	22.62	28.07	33.00
			6	0	21.69	27.14	33.00
		1919.3	1	0	22.39	27.84	33.00
			1	3	22.41	27.86	33.00
			1	5	22.29	27.74	33.00
			3	0	22.45	27.90	33.00
			3	3	22.5	27.95	33.00
			6	0	21.62	27.07	33.00
	16QAM	1860.7	1	0	21.29	26.74	33.00
			1	3	21.45	26.90	33.00
			1	5	21.23	26.68	33.00
			3	0	21.76	27.21	33.00
			3	3	21.74	27.19	33.00
			6	0	20.33	25.78	33.00
		1890	1	0	21.45	26.90	33.00
			1	3	21.53	26.98	33.00
			1	5	21.43	26.88	33.00
			3	0	21.66	27.11	33.00
			3	3	21.55	27.00	33.00
			6	0	20.69	26.14	33.00
		1919.3	1	0	21.63	27.08	33.00
			1	3	21.55	27.00	33.00
			1	5	21.34	26.79	33.00
			3	0	21.4	26.85	33.00
			3	3	21.79	27.24	33.00
			6	0	20.62	26.07	33.00

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 26 von 86
Page 26 of 86

Channel Bandwidth (MHz)	Modulation	Channel Frequency (MHz)	RB Position & RB Allocation		Measured Average Power (dBm)	e.i.r.p (dBm)	Limit (dBm)
			Size	Offset			
3MHz	QPSK	1861.5	1	0	22.27	27.72	33.00
			1	8	22.42	27.87	33.00
			1	14	22.34	27.79	33.00
			8	0	21.68	27.13	33.00
			8	7	21.59	27.04	33.00
			15	0	21.57	27.02	33.00
		1890	1	0	22.41	27.86	33.00
			1	8	22.25	27.70	33.00
			1	14	22.64	28.09	33.00
			8	0	21.61	27.06	33.00
			8	7	21.6	27.05	33.00
			15	0	21.55	27.00	33.00
		1918.5	1	0	22.65	28.10	33.00
			1	8	22.49	27.94	33.00
			1	14	22.51	27.96	33.00
			8	0	21.76	27.21	33.00
			8	7	20.95	26.40	33.00
			15	0	21.62	27.07	33.00
	16QAM	1861.5	1	0	21.44	26.89	33.00
			1	8	21.26	26.71	33.00
			1	14	20.97	26.42	33.00
			8	0	20.33	25.78	33.00
			8	7	20.62	26.07	33.00
			15	0	20.71	26.16	33.00
		1890	1	0	21.42	26.87	33.00
			1	8	21.43	26.88	33.00
			1	14	21.39	26.84	33.00
			8	0	19.35	24.80	33.00
			8	7	20.61	26.06	33.00
			15	0	20.6	26.05	33.00
		1918.5	1	0	21.32	26.77	33.00
			1	8	21.17	26.62	33.00
			1	14	21.35	26.80	33.00
			8	0	20.54	25.99	33.00
			8	7	20.46	25.91	33.00
			15	0	20.32	25.77	33.00

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 27 von 86
Page 27 of 86

Channel Bandwidth (MHz)	Modulation	Channel Frequency (MHz)	RB Position & RB Allocation		Measured Average Power (dBm)	e.i.r.p (dBm)	Limit (dBm)
			Size	Offset			
5MHz	QPSK	1862.5	1	0	22.07	27.52	33.00
			1	13	22.19	27.64	33.00
			1	24	21.2	26.65	33.00
			12	0	21.23	26.68	33.00
			12	13	21.27	26.72	33.00
			25	0	21.22	26.67	33.00
		1890.0	1	0	22.07	27.52	33.00
			1	13	22.3	27.75	33.00
			1	24	22.19	27.64	33.00
			12	0	21.31	26.76	33.00
			12	13	21.35	26.80	33.00
			25	0	20.45	25.90	33.00
		1917.5	1	0	22.26	27.71	33.00
			1	13	21.31	26.76	33.00
			1	24	22.12	27.57	33.00
			12	0	21.25	26.70	33.00
			12	13	20.43	25.88	33.00
			25	0	21.02	26.47	33.00
	16QAM	1862.5	1	0	21.03	26.48	33.00
			1	13	21.01	26.46	33.00
			1	24	20.07	25.52	33.00
			12	0	20.03	25.48	33.00
			12	13	20.4	25.85	33.00
			25	0	20.28	25.73	33.00
		1890.0	1	0	21.06	26.51	33.00
			1	13	21.22	26.67	33.00
			1	24	20.27	25.72	33.00
			12	0	20.17	25.62	33.00
			12	13	20.33	25.78	33.00
			25	0	20.3	25.75	33.00
		1917.5	1	0	21.22	26.67	33.00
			1	13	21.1	26.55	33.00
			1	24	20.03	25.48	33.00
			12	0	20.51	25.96	33.00
			12	13	20.29	25.74	33.00
			25	0	20.43	25.88	33.00

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 28 von 86
Page 28 of 86

Channel Bandwidth (MHz)	Modulation	Channel Frequency (MHz)	RB Position & RB Allocation		Measured Average Power (dBm)	e.i.r.p (dBm)	Limit (dBm)
			Size	Offset			
10MHz	QPSK	1865.0	1	0	22.1	27.55	33.00
			1	25	22.11	27.56	33.00
			1	49	22.05	27.50	33.00
			25	0	21.33	26.78	33.00
			25	25	21.21	26.66	33.00
			50	0	21.3	26.75	33.00
		1890.0	1	0	22.27	27.72	33.00
			1	25	22.23	27.68	33.00
			1	49	21.31	26.76	33.00
			25	0	21.39	26.84	33.00
			25	25	21.41	26.86	33.00
			50	0	21.34	26.79	33.00
		1915.0	1	0	22.19	27.64	33.00
			1	25	22.2	27.65	33.00
			1	49	22.31	27.76	33.00
			25	0	21.34	26.79	33.00
			25	25	21.28	26.73	33.00
			50	0	21.22	26.67	33.00
	16QAM	1865.0	1	0	21.29	26.74	33.00
			1	25	21.22	26.67	33.00
			1	49	21.19	26.64	33.00
			25	0	20.31	25.76	33.00
			25	25	20.01	25.46	33.00
			50	0	20.37	25.82	33.00
		1890.0	1	0	21.32	26.77	33.00
			1	25	21.19	26.64	33.00
			1	49	21.31	26.76	33.00
			25	0	20.41	25.86	33.00
			25	25	20.52	25.97	33.00
			50	0	20.43	25.88	33.00
		1915.0	1	0	21.22	26.67	33.00
			1	25	21.21	26.66	33.00
			1	49	21.18	26.63	33.00
			25	0	20.36	25.81	33.00
			25	25	20.47	25.92	33.00
			50	0	20.38	25.83	33.00

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 29 von 86
Page 29 of 86

Channel Bandwidth (MHz)	Modulation	Channel Frequency (MHz)	RB Position & RB Allocation		Measured Average Power (dBm)	e.i.r.p (dBm)	Limit (dBm)
			Size	Offset			
15MHz	QPSK	1867.5	1	0	21.33	26.78	33.00
			1	38	22.42	27.87	33.00
			1	74	22.19	27.64	33.00
			36	0	21.37	26.82	33.00
			36	39	21.49	26.94	33.00
			75	0	21.21	26.66	33.00
		1890.0	1	0	22.25	27.70	33.00
			1	38	22.3	27.75	33.00
			1	74	22.29	27.74	33.00
			36	0	21.19	26.64	33.00
			36	39	21.46	26.91	33.00
			75	0	21.25	26.70	33.00
		1912.5	1	0	22.2	27.65	33.00
			1	38	22.51	27.96	33.00
			1	74	22.42	27.87	33.00
			36	0	21.44	26.89	33.00
			36	39	21.51	26.96	33.00
			75	0	21.43	26.88	33.00
	16QAM	1867.5	1	0	20.33	25.78	33.00
			1	38	21.28	26.73	33.00
			1	74	21.11	26.56	33.00
			36	0	20.41	25.86	33.00
			36	39	20.15	25.60	33.00
			75	0	20.41	25.86	33.00
		1890.0	1	0	21.11	26.56	33.00
			1	38	21.08	26.53	33.00
			1	74	21.15	26.60	33.00
			36	0	20.17	25.62	33.00
			36	39	20.37	25.82	33.00
			75	0	20.34	25.79	33.00
		1912.5	1	0	20.39	25.84	33.00
			1	38	21.12	26.57	33.00
			1	74	21.07	26.52	33.00
			36	0	20.45	25.90	33.00
			36	39	20.55	26.00	33.00
			75	0	20.42	25.87	33.00

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 30 von 86
Page 30 of 86

Channel Bandwidth (MHz)	Modulation	Channel Frequency (MHz)	RB Position & RB Allocation		Measured Average Power (dBm)	e.i.r.p (dBm)	Limit (dBm)
			Size	Offset			
20MHz	QPSK	1870.0	1	0	22.11	27.56	33.00
			1	50	22.18	27.63	33.00
			1	99	22.16	27.61	33.00
			50	0	21.39	26.84	33.00
			50	50	21.35	26.80	33.00
			100	0	21.41	26.86	33.00
		1890.0	1	0	22.3	27.75	33.00
			1	50	22.29	27.74	33.00
			1	99	22.19	27.64	33.00
			50	0	21.3	26.75	33.00
			50	50	21.41	26.86	33.00
			100	0	21.35	26.80	33.00
		1910.0	1	0	22.13	27.58	33.00
			1	50	22.55	28.00	33.00
			1	99	22.39	27.84	33.00
			50	0	21.52	26.97	33.00
			50	50	21.31	26.76	33.00
			100	0	21.49	26.94	33.00
	16QAM	1870.0	1	0	21.58	27.03	33.00
			1	50	21.17	26.62	33.00
			1	99	21.19	26.64	33.00
			50	0	20.31	25.76	33.00
			50	50	20.42	25.87	33.00
			100	0	20.45	25.90	33.00
		1890.0	1	0	21.61	27.06	33.00
			1	50	21.44	26.89	33.00
			1	99	21.29	26.74	33.00
			50	0	20.32	25.77	33.00
			50	50	20.42	25.87	33.00
			100	0	20.41	25.86	33.00
		1910.0	1	0	21.24	26.69	33.00
			1	50	21.31	26.76	33.00
			1	99	21.28	26.73	33.00
			50	0	20.52	25.97	33.00
			50	50	20.41	25.86	33.00
			100	0	20.49	25.94	33.00

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 31 von 86
Page 31 of 86

7.3 Field Strength of Spurious Radiation

Result

Pass

Specification	FCC Part §2.1053 & §24.238(a) RSS-133, §5.6
Test Method / Procedure	As per subclause 5.5 of ANSI C63.26-2015 As per subclause 7 in 971168 D01 Power Meas License Digital Systems v03r01
Measurement Bandwidth (RBW)	100 kHz for frequency range < 1GHz 1 MHz for Frequency range >1GHz
Detector Function	Peak
Measuring Distance	3 m
Requirement	The power of any emission outside the authorized frequency range must be attenuated below the transmitting power (P) by a factor of at least $43+10\log(P)$ dB
Test setup	Refer TEST METHODOLOGY

Environmental conditions:

Temperature (Norm) = + 24 °C Voltage = 12VDC through AC-DC Adapter Relative humidity = 62 %

Note: All the losses are included during measurement and final values are mentioned in the test report. Refer TEST METHODOLOGY for more details

Note:

1. All the losses are included during measurement and final values are mentioned in the test report.
2. Spurious emission limit is derived using the following equation: $43 + 10*\log(P) = 43 + 10*\log(P) = -13$
P is average power in W

Prüfbericht - Nr.:

Test Report No.:

IN26SIHY 001

Seite 32 von 86

Page 32 of 86

Test results for Internal Antenna:

Test results for frequency range 9kHz – 30MHz

No emissions found in frequency range 9 kHz to 30 MHz, and measured levels are below 20dB from the limit line, hence not reported

Test results for frequency range 30MHz – 1GHz

Antenna Polarization	Measured Frequency (MHz)	Measured emission (dBm)	Limit (dBm)	Margin (dB)
Vertical	34.02	-77.40	-13.00	-64.40
	50.01	-78.60	-13.00	-65.60
	77.52	-75.10	-13.00	-62.10
	148.50	-81.50	-13.00	-68.50
	261.14	-73.70	-13.00	-60.70
	366.11	-81.20	-13.00	-68.20
	832.04*	-9.95	-	-
	877.64	-63.60	-13.00	-50.60
Horizontal	35.46	-82.80	-13.00	-69.80
	50.01	-85.10	-13.00	-72.10
	79.20	-83.80	-13.00	-70.80
	148.50	-78.70	-13.00	-65.70
	250.01	-73.30	-13.00	-60.30
	346.49	-72.10	-13.00	-59.10
	832.16*	-8.48	-	-
	882.71	-54.70	-13.00	-41.70

Note: * Fundamental Frequency

Prüfbericht - Nr.:

Test Report No.:


IN26SIHY 001

Seite 33 von 86


Page 33 of 86

Plots for frequency range 30MHz to 1GHz


Frequency Range: 30MHz-200MHz_Vertical Polarization

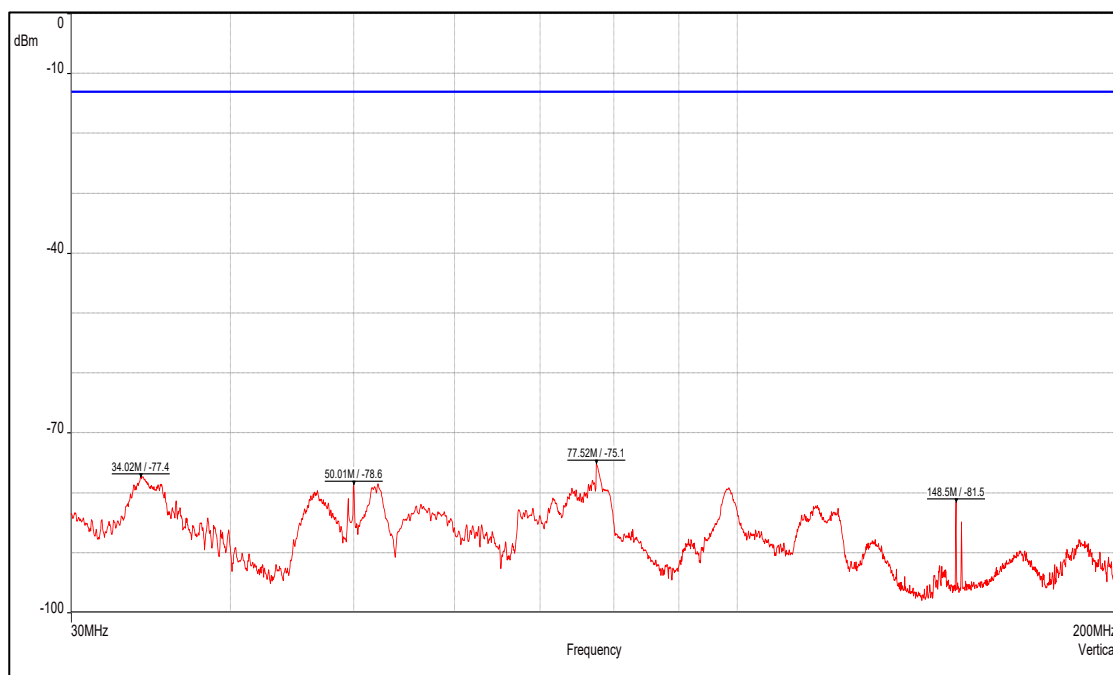


Frequency Range: 30MHz-200MHz_Horizontal Polarization

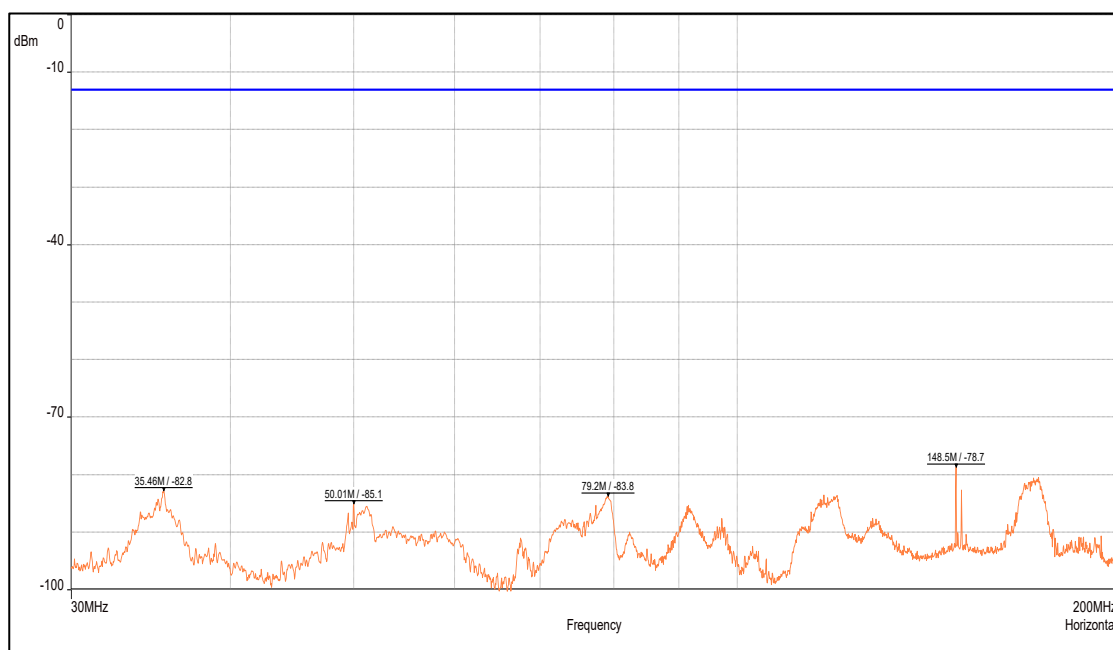

Frequency Range: 200MHz-1GHz_Vertical Polarization

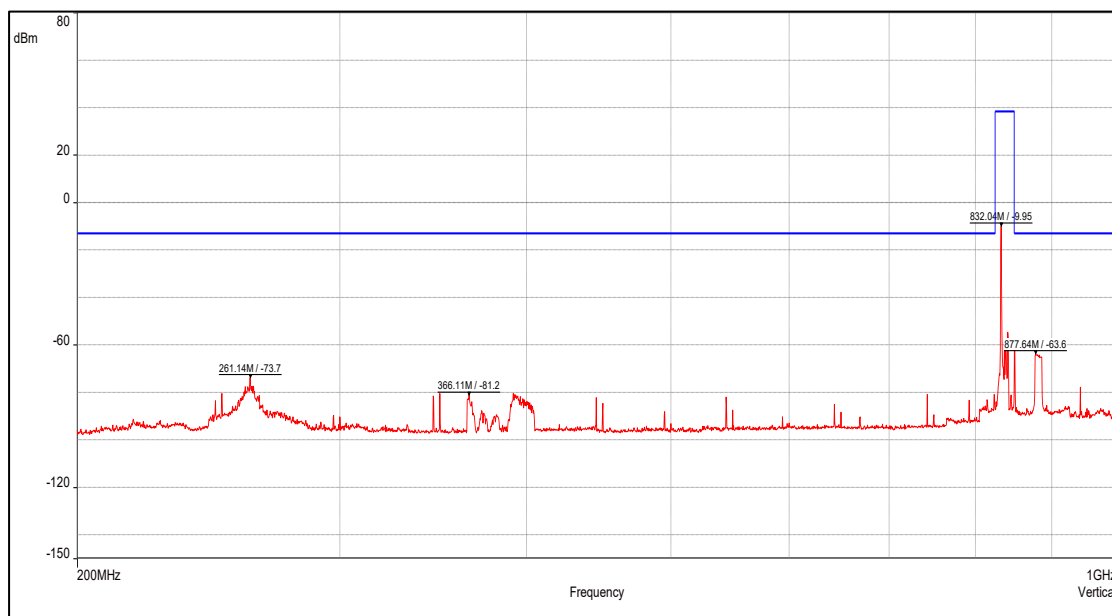

Frequency Range: 200MHz-1GHz_Horizontal Polarization

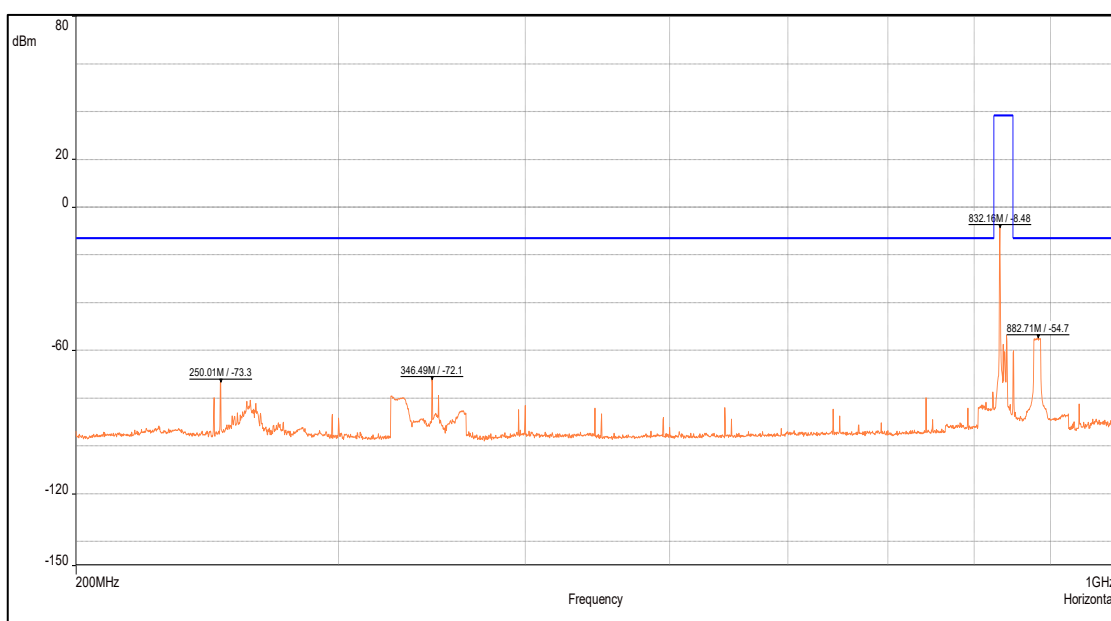

Prüfbericht - Nr.:

Test Report No.:

IN26SIHY 001

Seite 35 von 86

Page 35 of 86

Test results for External Antenna:

Test results for frequency range 9kHz – 30MHz

No emissions found in frequency range 9 kHz to 30 MHz, and measured levels are below 20dB from the limit line, hence not reported


Test results for frequency range 30MHz – 1GHz

Antenna Polarization	Measured Frequency (MHz)	Measured emission (dBm)	Limit (dBm)	Margin (dB)
Vertical	46.92	-72.90	-13.00	-59.90
	78.51	-61.80	-13.00	-48.80
	123.09	-67.00	-13.00	-54.00
	148.50	-80.50	-13.00	-67.50
	261.83	-72.90	-13.00	-59.90
	350.00	-81.50	-13.00	-68.50
	832.10*	-6.36	-	-
	879.29	-64.10	-13.00	-51.10
Horizontal	33.00	-61.30	-13.00	-48.30
	49.62	-65.80	-13.00	-52.80
	61.17	-69.70	-13.00	-56.70
	119.31	-72.00	-13.00	-59.00
	162.54	-76.10	-13.00	-63.10
	262.58	-75.40	-13.00	-62.40
	346.49	-76.50	-13.00	-63.50
	832.07*	-1.31	-	-
	881.00	-54.70	-13.00	-41.70


Note: * Fundamental Frequency

Plots for frequency range 30MHz to 1GHz

Frequency Range: 30MHz-200MHz_Vertical Polarization

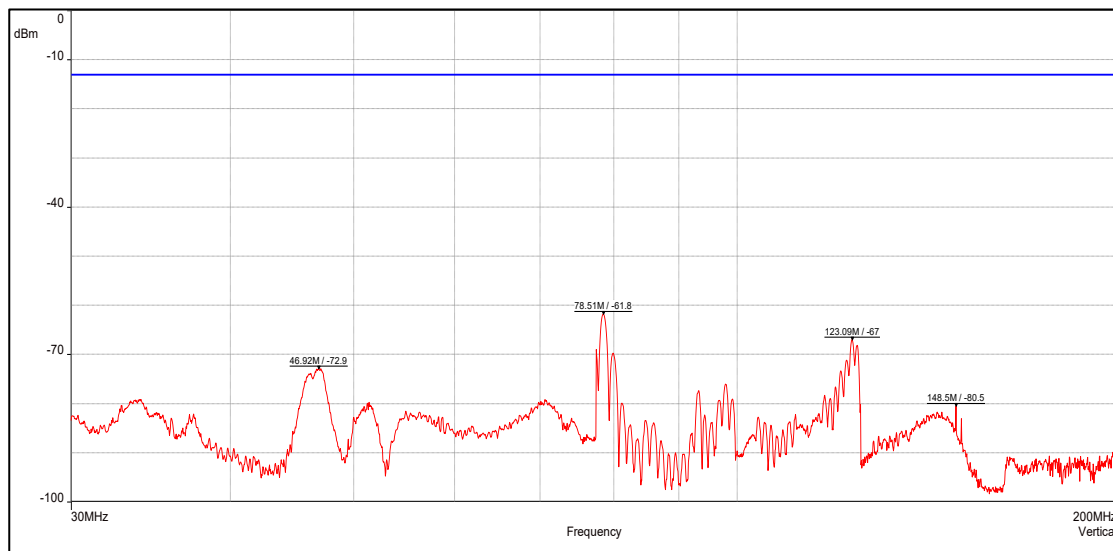

Frequency Range: 30MHz-200MHz_Horizontal Polarization

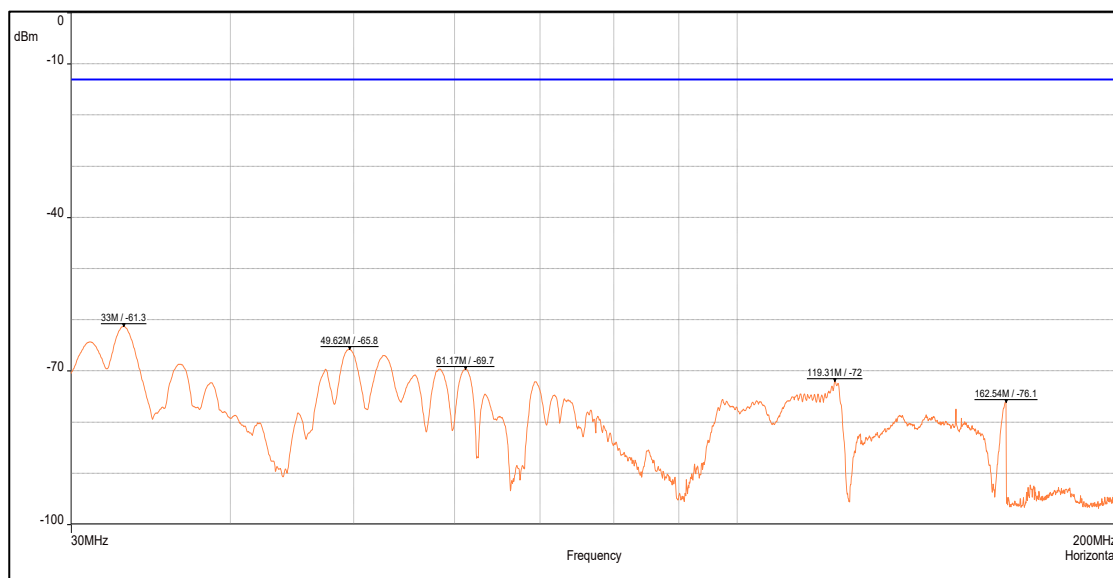

Prüfbericht - Nr.:


Test Report No.:

IN26SIHY 001


Seite 37 von 86

Page 37 of 86

Frequency Range: 200MHz-1GHz_Vertical Polarization

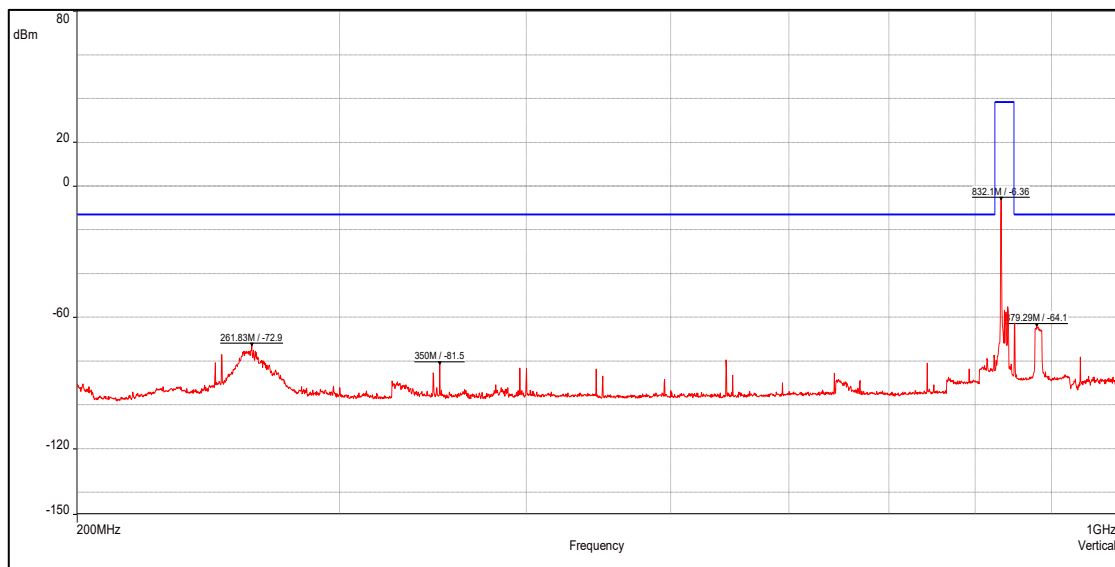

Frequency Range: 200MHz-1GHz_Horizontal Polarization

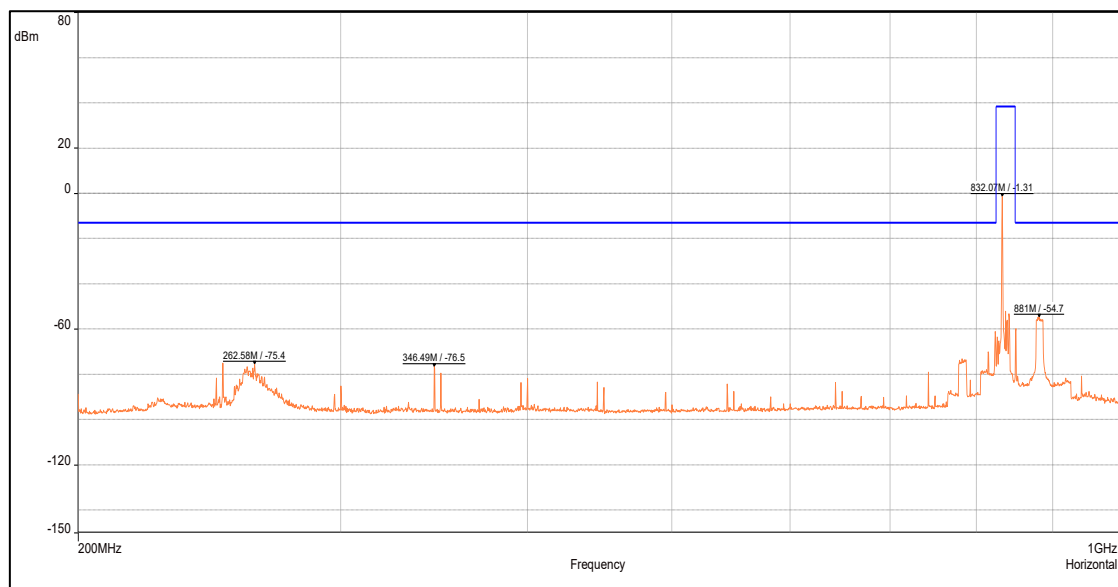

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 38 von 86
Page 38 of 86

Above 1GHz Test results for Internal Antenna:

Band 2:

Bandwidth	Modulation	Channel Frequency (MHz)	RB Position & RB Allocation	Antenna Polarization	Measured Frequency (MHz)	Measured emission (dBm)	Limit (dBm)	Margin (dB)
1.4	QPSK	1850.70	3/0	Vertical	3701.40	-47.55	-13.00	-34.55
					5552.10	-49.02	-13.00	-36.02
					7402.80	-49.73	-13.00	-36.73
				Horizontal	3701.40	-51.55	-13.00	-38.55
					5552.10	-50.32	-13.00	-37.32
					7402.80	-50.54	-13.00	-37.54
		1880.00	3/0	Vertical	3760.00	-47.16	-13.00	-34.16
					5640.00	-49.38	-13.00	-36.38
					7520.00	-49.28	-13.00	-36.28
				Horizontal	3760.00	-51.29	-13.00	-38.29
					5640.00	-49.48	-13.00	-36.48
					7520.00	-49.89	-13.00	-36.89
		1909.30	3/0	Vertical	3818.60	-44.45	-13.00	-31.45
					5727.90	-49.23	-13.00	-36.23
					7637.20	-50.20	-13.00	-37.20
				Horizontal	3818.60	-44.98	-13.00	-31.98
					5727.90	-49.98	-13.00	-36.98
					7637.20	-51.14	-13.00	-38.14
3	QPSK	1851.50	15/0	Vertical	3703.00	-47.73	-13.00	-34.73
					5554.50	-48.77	-13.00	-35.77
					7406.00	-50.13	-13.00	-37.13
				Horizontal	3703.00	-52.41	-13.00	-39.41
					5554.50	-49.06	-13.00	-36.06
					7406.00	-50.19	-13.00	-37.19
		1880.00	15/0	Vertical	3760.00	-48.47	-13.00	-35.47
					5640.00	-47.78	-13.00	-34.78
					7520.00	-48.99	-13.00	-35.99
				Horizontal	3760.00	-51.11	-13.00	-38.11
					5640.00	-48.48	-13.00	-35.48
					7520.00	-49.55	-13.00	-36.55
		1908.50	15/0	Vertical	3817.00	-47.53	-13.00	-34.53
					5725.50	-48.74	-13.00	-35.74
					7634.00	-49.95	-13.00	-36.95
				Horizontal	3817.00	-50.63	-13.00	-37.63
					5725.50	-49.42	-13.00	-36.42
					7634.00	-49.73	-13.00	-36.73

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 39 von 86
Page 39 of 86

Band 2:

Bandwidth	Modulation	Channel Frequency (MHz)	RB Position & RB Allocation	Antenna Polarization	Measured Frequency (MHz)	Measured emission (dBm)	Limit (dBm)	Margin (dB)
5	QPSK	1852.50	25/0	Vertical	3705.00	-49.62	-13.00	-36.62
					5557.50	-49.59	-13.00	-36.59
					7410.00	-50.28	-13.00	-37.28
				Horizontal	3705.00	-51.99	-13.00	-38.99
					5557.50	-49.42	-13.00	-36.42
					7410.00	-49.93	-13.00	-36.93
		1880.00	25/0	Vertical	3760.00	-49.69	-13.00	-36.69
					5640.00	-49.25	-13.00	-36.25
					7520.00	-49.65	-13.00	-36.65
				Horizontal	3760.00	-50.64	-13.00	-37.64
					5640.00	-48.64	-13.00	-35.64
					7520.00	-49.41	-13.00	-36.41
	16QAM	1907.50	25/0	Vertical	3815.00	-47.30	-13.00	-34.30
					5722.50	-48.79	-13.00	-35.79
					7630.00	-49.85	-13.00	-36.85
				Horizontal	3815.00	-51.10	-13.00	-38.10
					5722.50	-49.63	-13.00	-36.63
					7630.00	-50.04	-13.00	-37.04
10	QPSK	1855.00	50/0	Vertical	3710.00	-48.92	-13.00	-35.92
					5565.00	-49.63	-13.00	-36.63
					7420.00	-50.27	-13.00	-37.27
				Horizontal	3710.00	-52.19	-13.00	-39.19
					5565.00	-48.81	-13.00	-35.81
					7420.00	-49.77	-13.00	-36.77
		1880.00	50/0	Vertical	3760.00	-51.65	-13.00	-38.65
					5640.00	-49.25	-13.00	-36.25
					7520.00	-50.23	-13.00	-37.23
				Horizontal	3760.00	-52.49	-13.00	-39.49
					5640.00	-48.22	-13.00	-35.22
					7520.00	-49.92	-13.00	-36.92
		1905.00	1/0	Vertical	3810.00	-45.58	-13.00	-32.58
					5715.00	-45.92	-13.00	-32.92
					7620.00	-50.13	-13.00	-37.13
				Horizontal	3810.00	-47.64	-13.00	-34.64
					5715.00	-49.45	-13.00	-36.45
					7620.00	-49.24	-13.00	-36.24

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 40 von 86
Page 40 of 86

Band 2:

Bandwidth	Modulation	Channel Frequency (MHz)	RB Position & RB Allocation	Antenna Polarization	Measured Frequency (MHz)	Measured emission (dBm)	Limit (dBm)	Margin (dB)
15	QPSK	1857.50	75/0	Vertical	3715.00	-50.65	-13.00	-37.65
					5572.50	-49.39	-13.00	-36.39
					7430.00	-49.92	-13.00	-36.92
				Horizontal	3715.00	-52.37	-13.00	-39.37
					5572.50	-48.53	-13.00	-35.53
					7430.00	-49.79	-13.00	-36.79
		1880.00	75/0	Vertical	3760.00	-51.01	-13.00	-38.01
					5640.00	-49.42	-13.00	-36.42
					7520.00	-49.63	-13.00	-36.63
				Horizontal	3760.00	-52.86	-13.00	-39.86
					5640.00	-49.32	-13.00	-36.32
					7520.00	-50.63	-13.00	-37.63
		1902.50	75/0	Vertical	3805.00	-49.75	-13.00	-36.75
					5707.50	-49.78	-13.00	-36.78
					7610.00	-50.21	-13.00	-37.21
				Horizontal	3805.00	-51.02	-13.00	-38.02
					5707.50	-48.82	-13.00	-35.82
					7610.00	-50.36	-13.00	-37.36
20	QPSK	1860.00	100/0	Vertical	3720.00	-50.26	-13.00	-37.26
					5580.00	-49.20	-13.00	-36.20
					7440.00	-50.05	-13.00	-37.05
				Horizontal	3720.00	-52.57	-13.00	-39.57
					5580.00	-49.09	-13.00	-36.09
					7440.00	-50.19	-13.00	-37.19
		1880.00	100/0	Vertical	3760.00	-51.60	-13.00	-38.60
					5640.00	-49.35	-13.00	-36.35
					7520.00	-49.58	-13.00	-36.58
				Horizontal	3760.00	-52.49	-13.00	-39.49
					5640.00	-48.78	-13.00	-35.78
					7520.00	-49.78	-13.00	-36.78
		1900.00	100/0	Vertical	3800.00	-49.59	-13.00	-36.59
					5700.00	-49.17	-13.00	-36.17
					7600.00	-50.10	-13.00	-37.10
				Horizontal	3800.00	-52.29	-13.00	-39.29
					5700.00	-49.59	-13.00	-36.59
					7600.00	-50.24	-13.00	-37.24


Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001


Seite 41 von 86
Page 41 of 86

LTE Test Plots:


Band-2_Frequency-1850.7_CB-1.4_3RB#0_QPSK-1-18GHz_Vertical

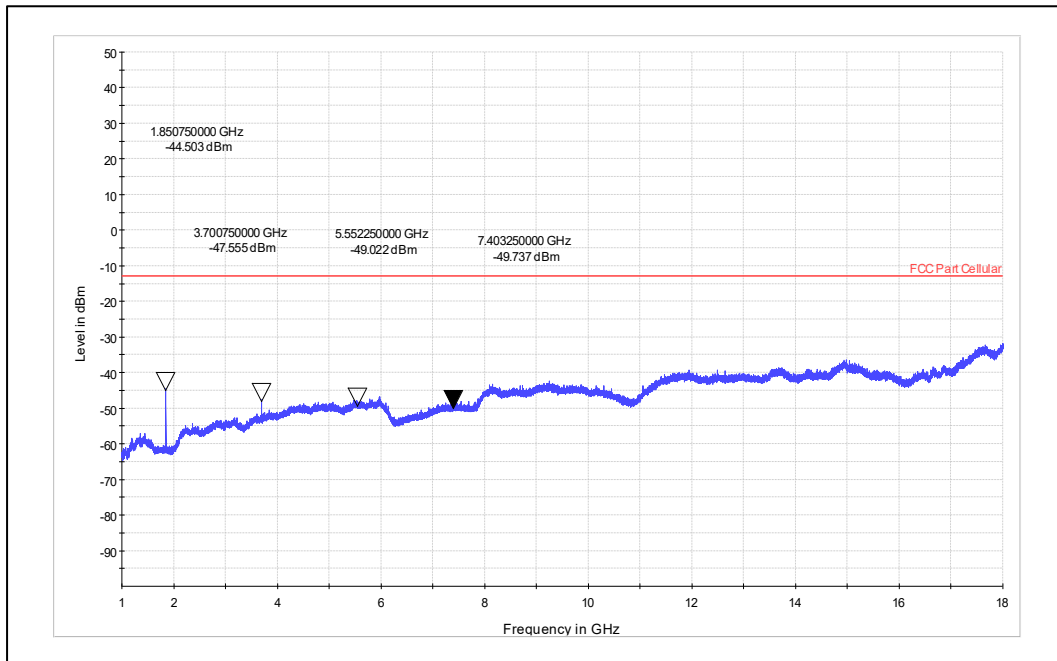


Band-2_Frequency-1850.7_CB-1.4_3RB#0_QPSK-1-18GHz_Horizontal

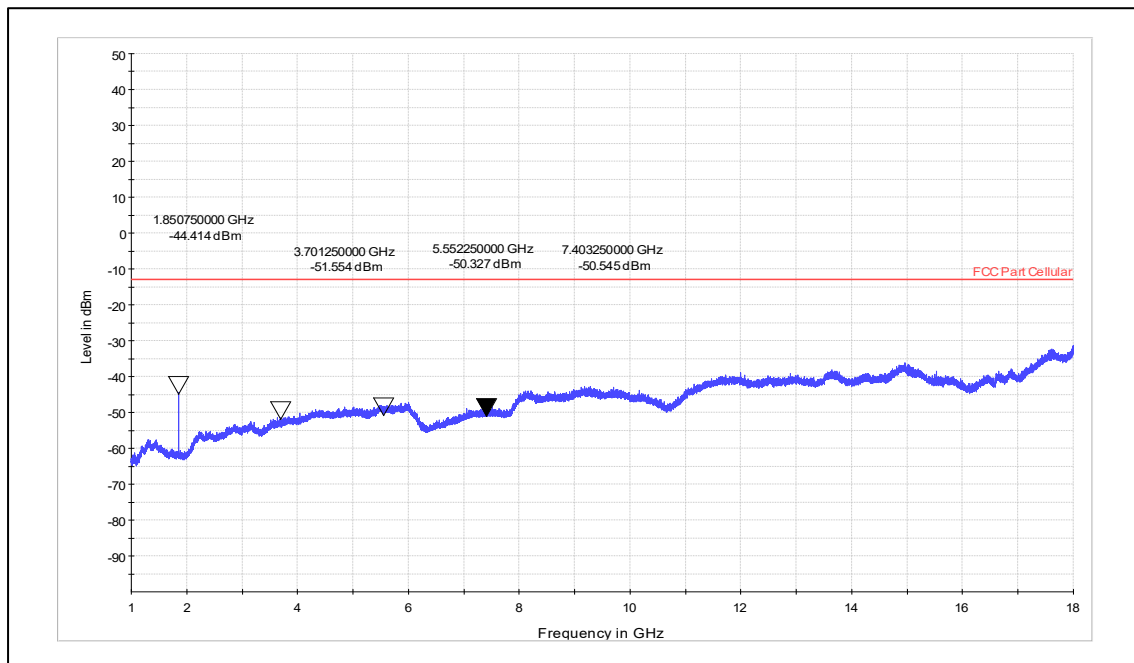


Band-2_Frequency-1880_CB-1.4_3RB#0_QPSK-1-18GHz_Vertical

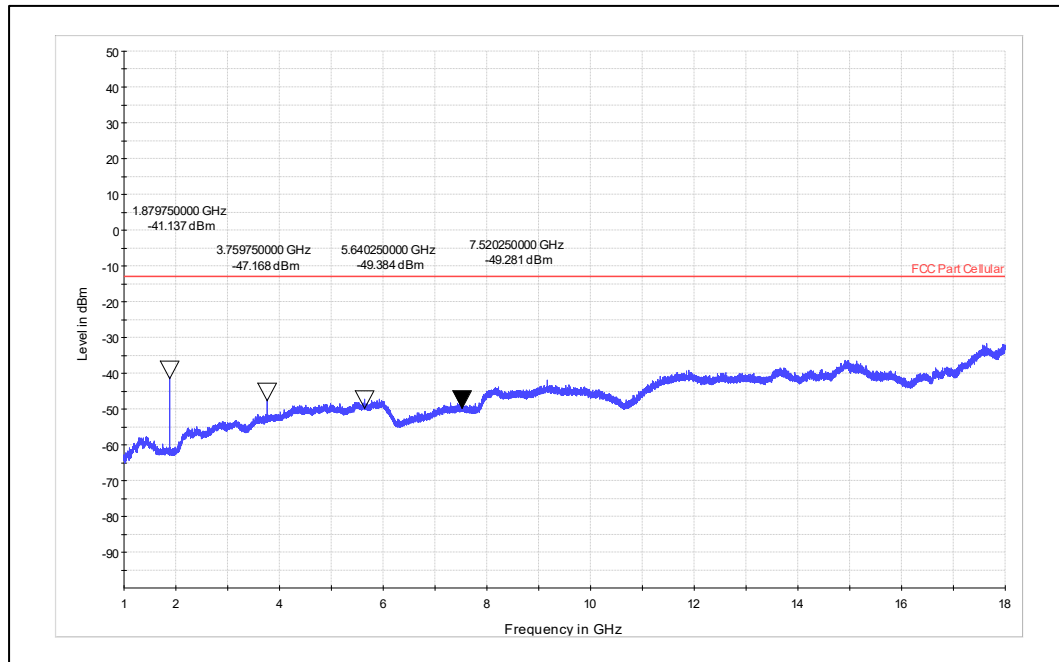


Band-2_Frequency-1880_CB-1.4_3RB#0_QPSK-1-18GHz_Horizontal

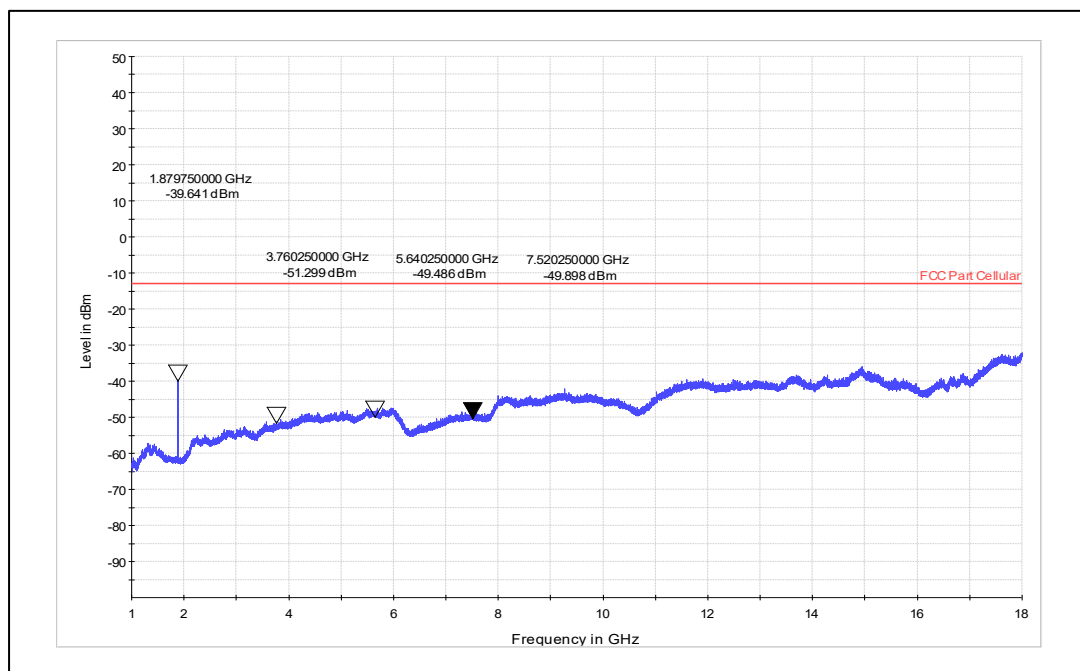


Band-2_Frequency-1909.3_CB-1.4_3RB#0_QPSK-1-18GHz_Vertical

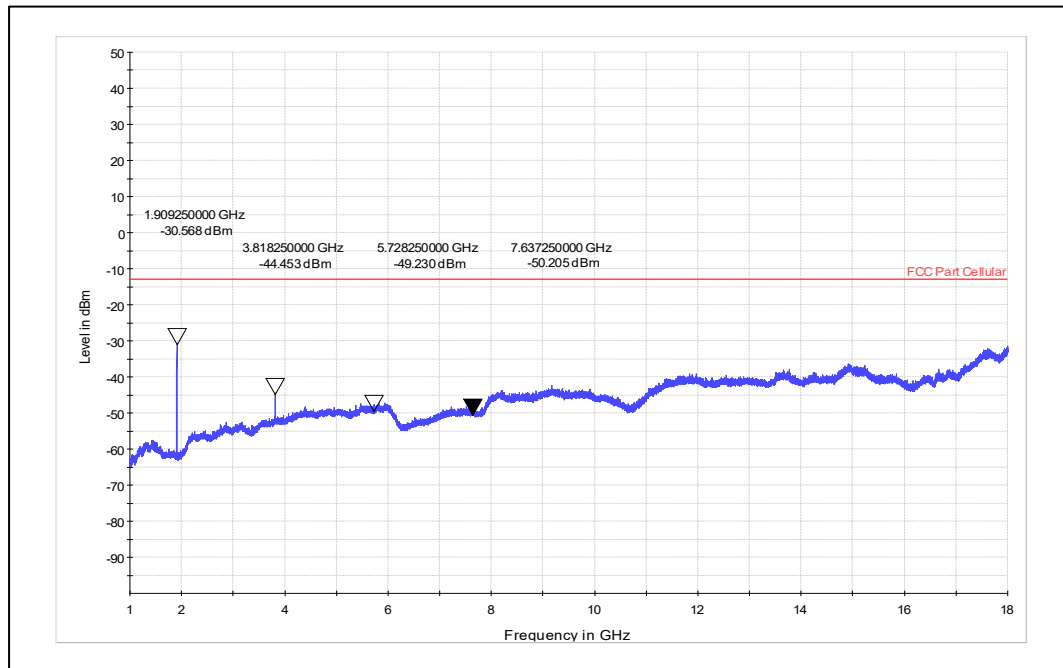


Band-2_Frequency-1909.3_CB-1.4_3RB#0_QPSK-1-18GHz_Horizontal

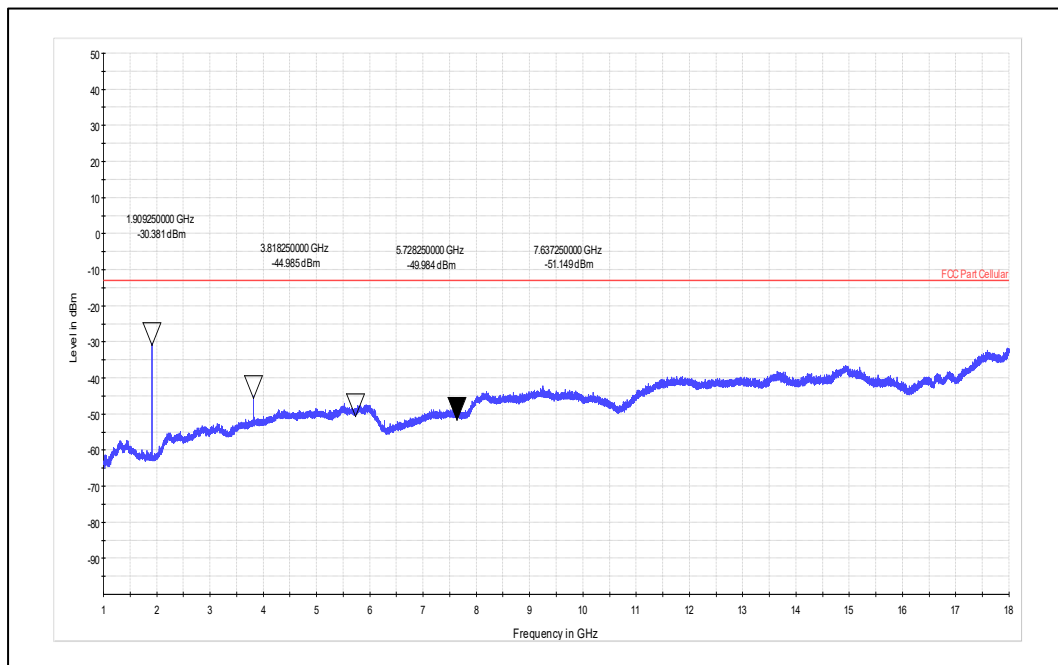

Band-2_Frequency-1851.5_CB-3_15RB#0_QPSK-1-18GHz_Vertical

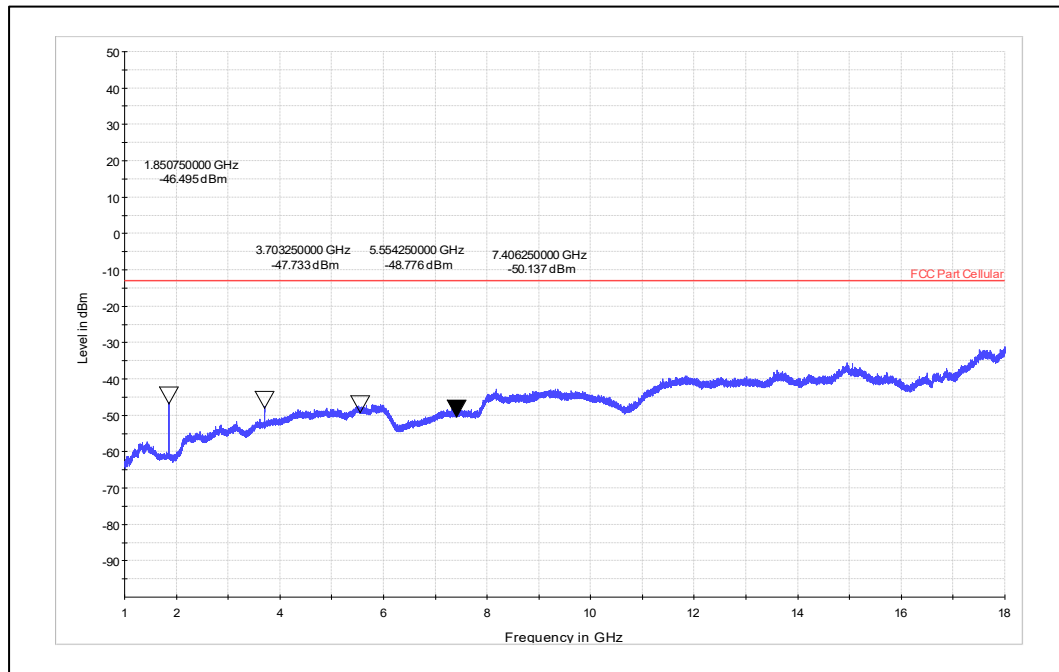

Band-2_Frequency-1851.5_CB-3_15RB#0_QPSK-1-18GHz_Horizontal

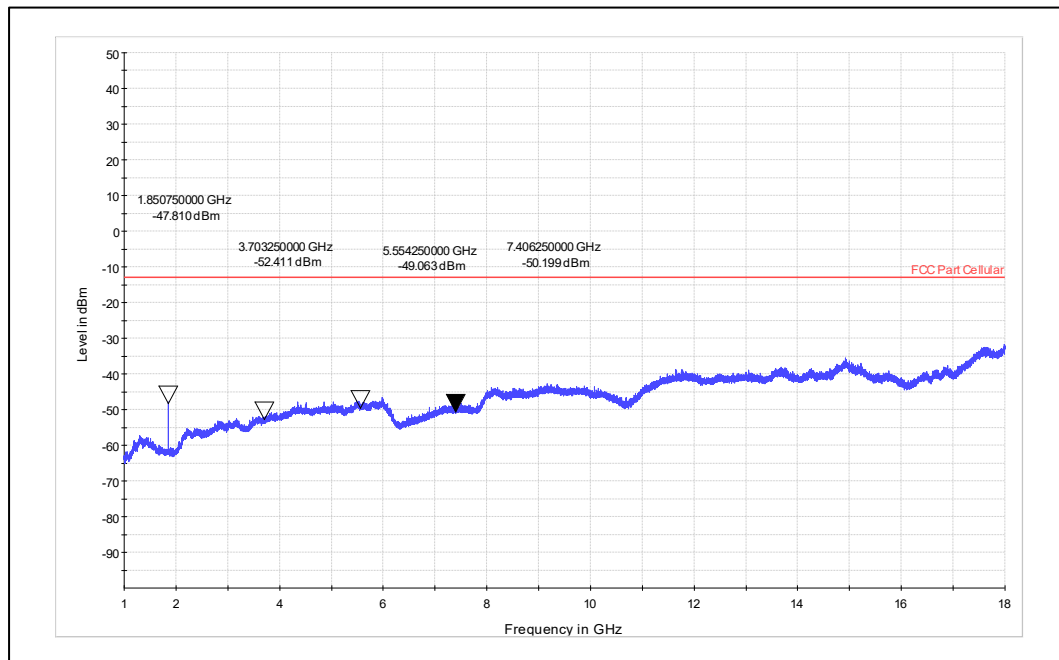


Prüfbericht - Nr.:
Test Report No.:


IN26SIHY 001

Seite 45 von 86
Page 45 of 86


Band-2_Frequency-1880_CB-3_15RB#0_QPSK-1-18GHz_Vertical

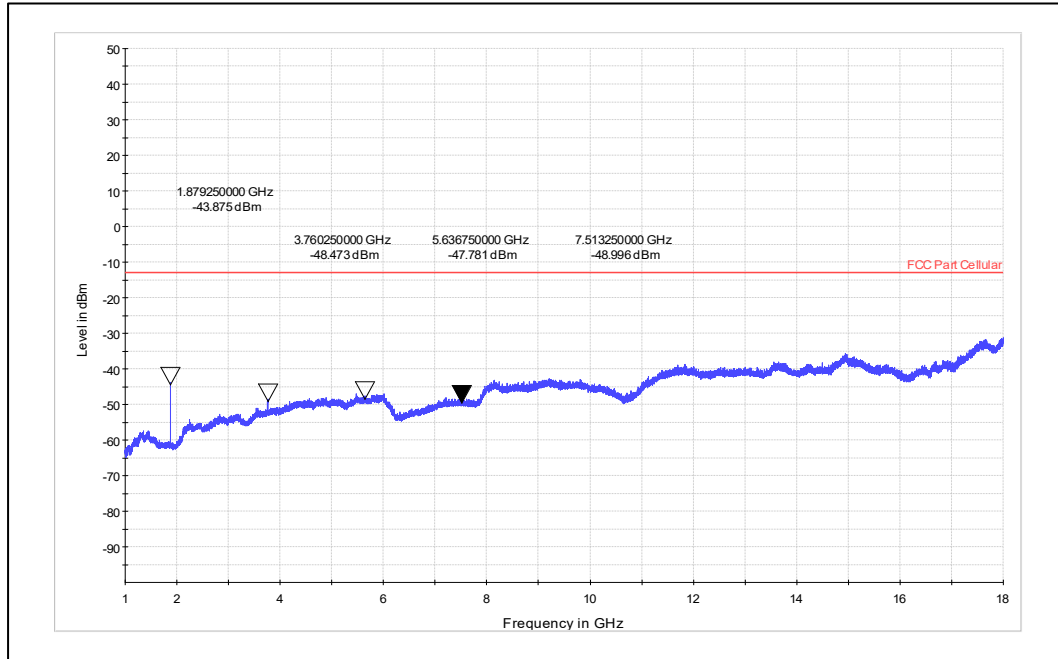


Band-2_Frequency-1880_CB-3_15RB#0_QPSK-1-18GHz_Horizontal

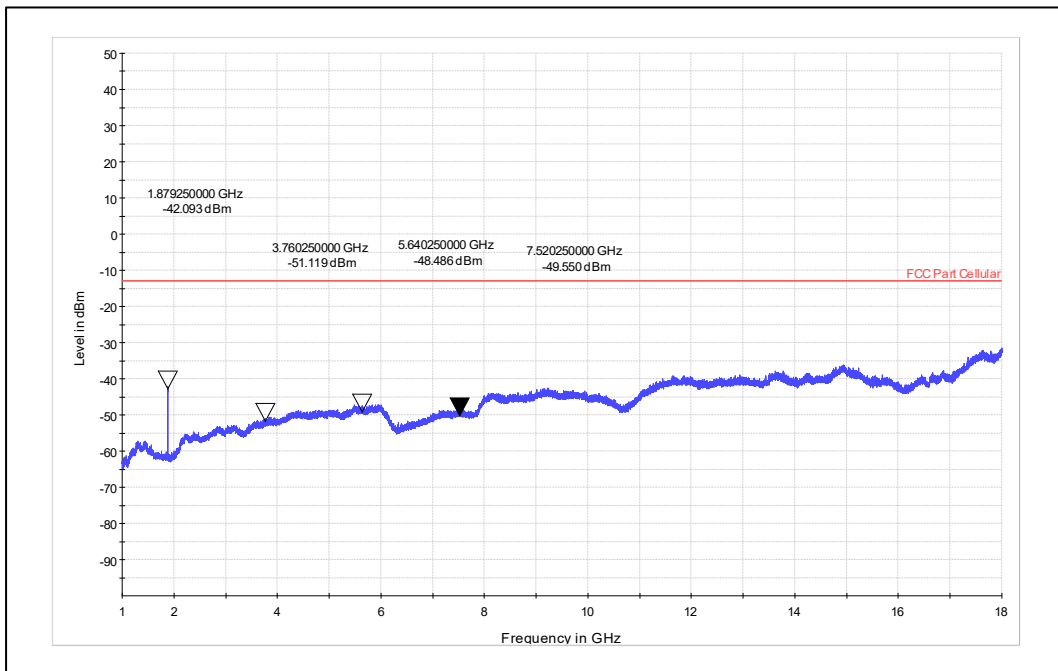


Band-2_Frequency-1908.5_CB-3_15RB#0_QPSK-1-18GHz_Vertical

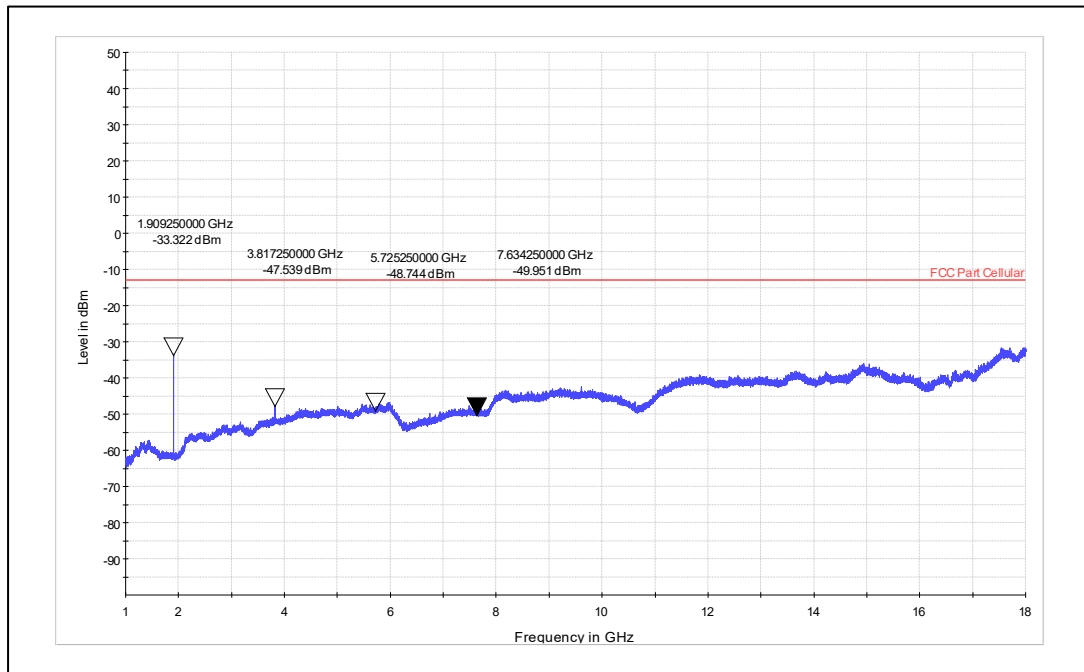


Band-2_Frequency-1908.5_CB-3_15RB#0_QPSK-1-18GHz_Horizontal

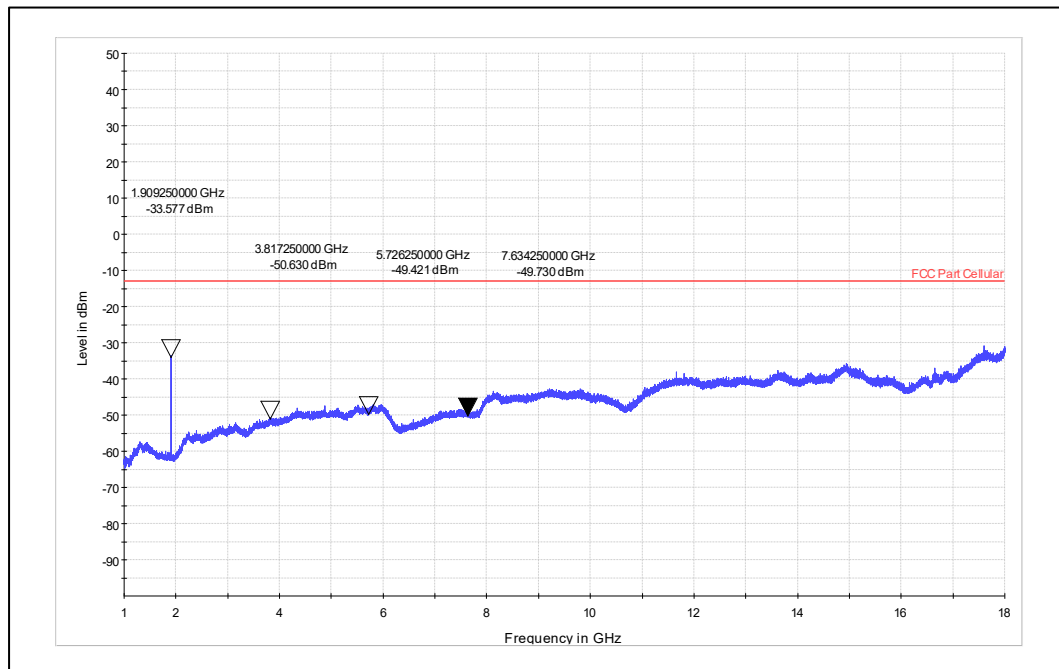

Band-2_Frequency-1852.5_CB-5_25RB#0_QPSK-1-18GHz_Vertical

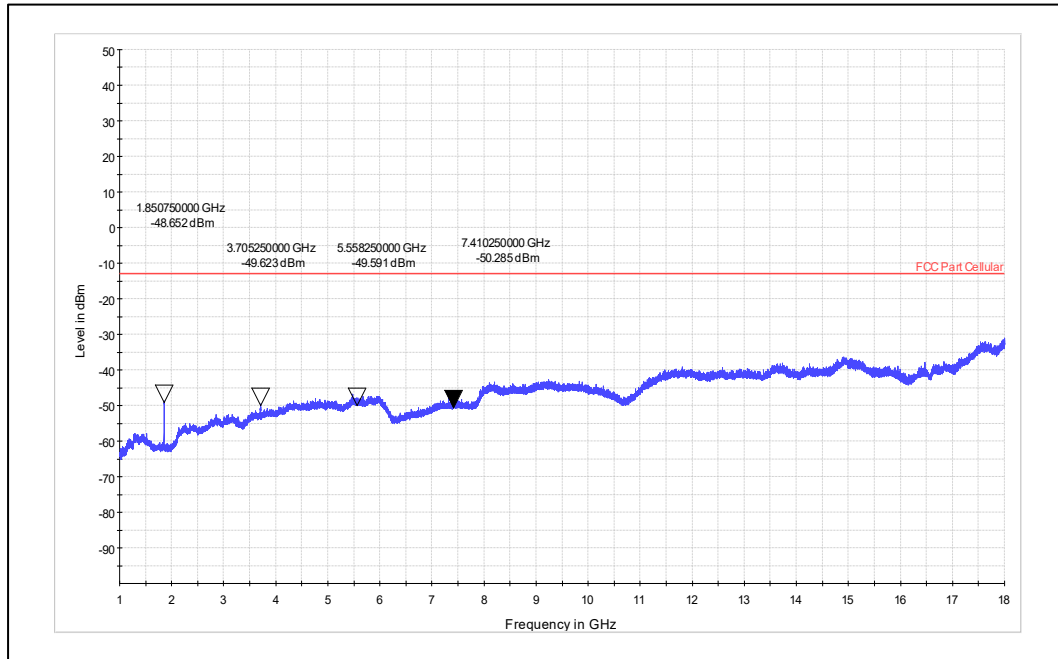

Band-2_Frequency-1852.5_CB-5_25RB#0_QPSK-1-18GHz_Horizontal

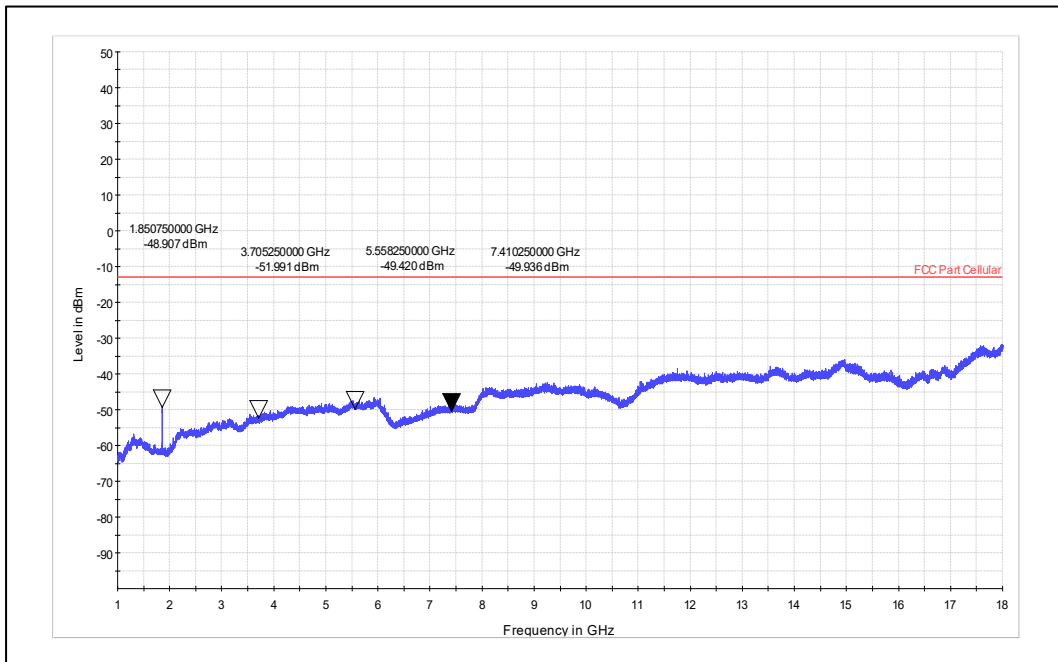

Prüfbericht - Nr.:


Test Report No.:

IN26SIHY 001


Seite 48 von 86

Page 48 of 86


Band-2_Frequency-1880_CB-5_25RB#0_QPSK-1-18GHz_Vertical

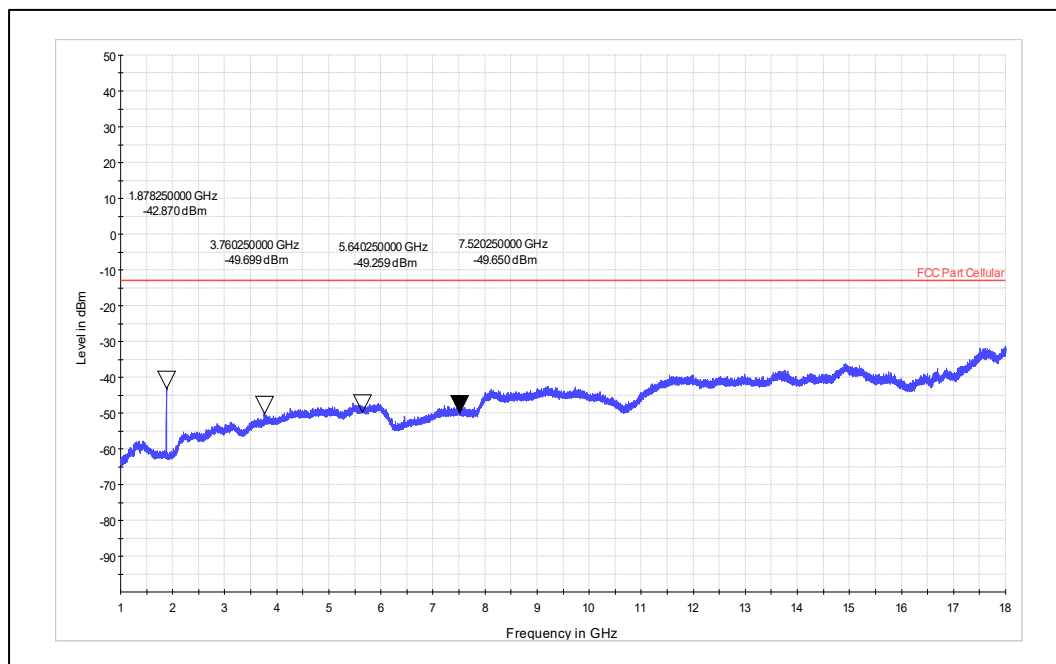


Band-2_Frequency-1880_CB-5_25RB#0_QPSK-1-18GHz_Horizontal

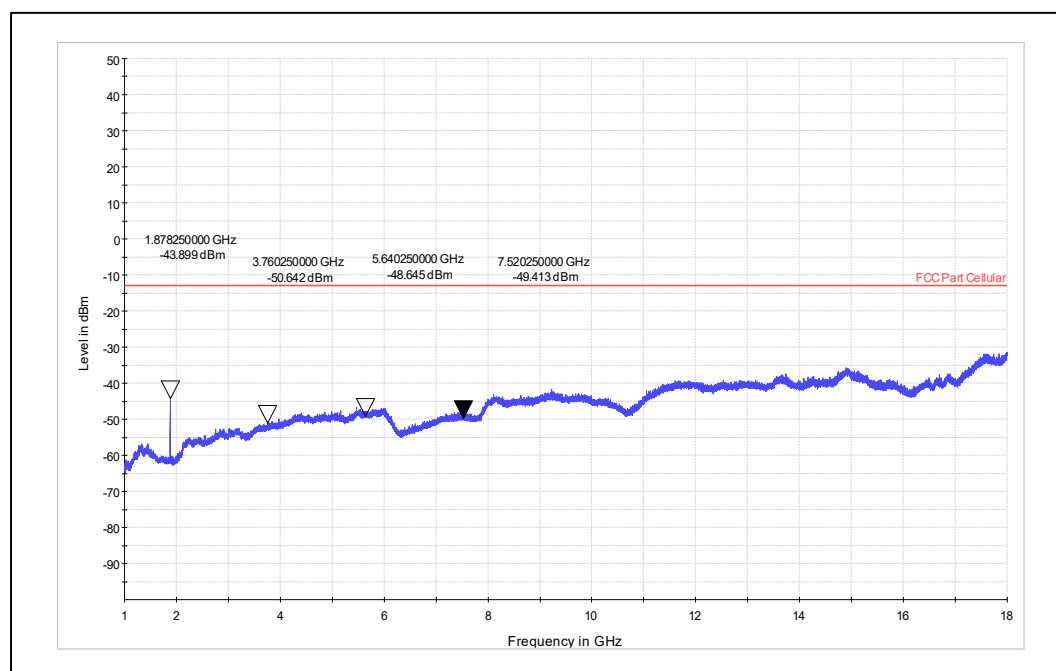

Band-2_Frequency-1907.5_CB-5_25RB#0_16QAM-1-18GHz_Vertical

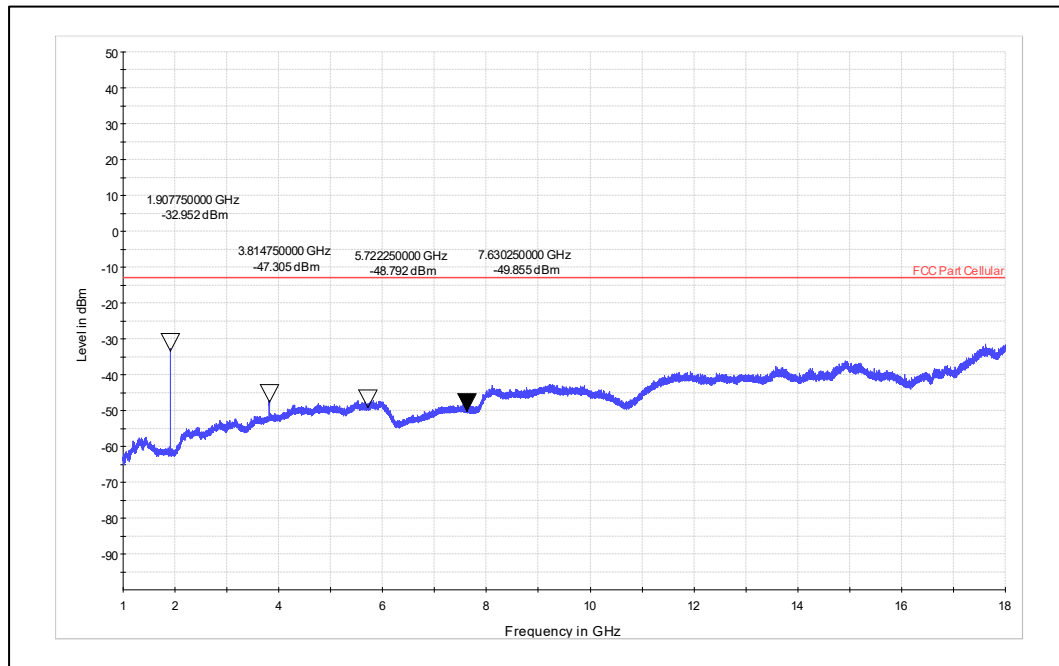

Band-2_Frequency-1907.5_CB-5_25RB#0_16QAM-1-18GHz_Horizontal

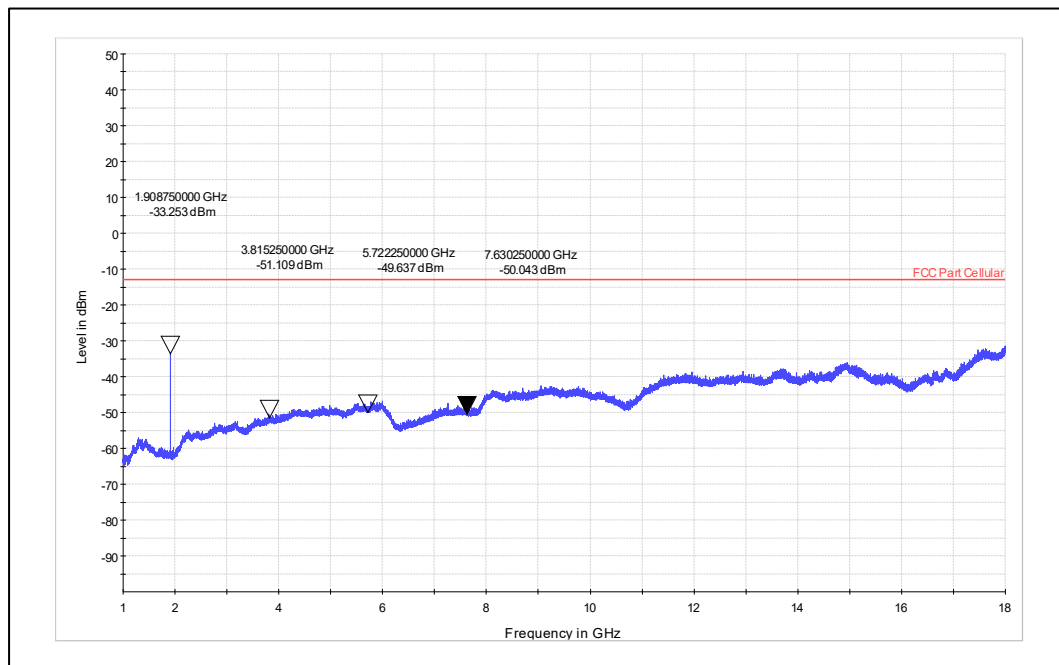

Prüfbericht - Nr.:


Test Report No.:

IN26SIHY 001


Seite 50 von 86

Page 50 of 86

Band-2_Frequency-1855_CB-10_50RB#0_QPSK-1-18GHz_Vertical

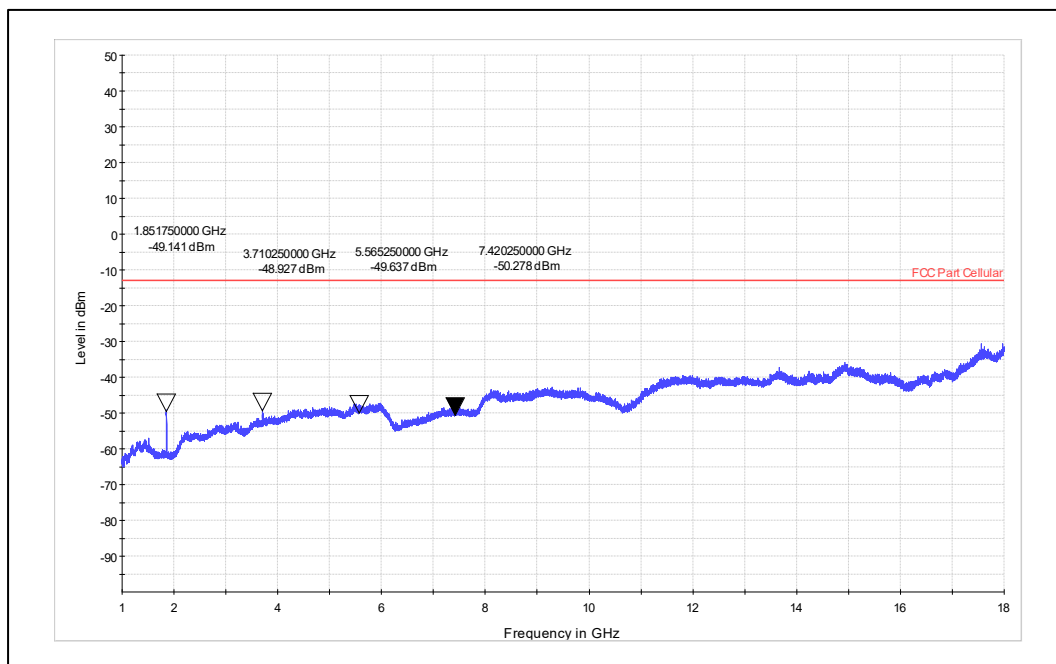

Band-2_Frequency-1855_CB-10_50RB#0_QPSK-1-18GHz_Horizontal

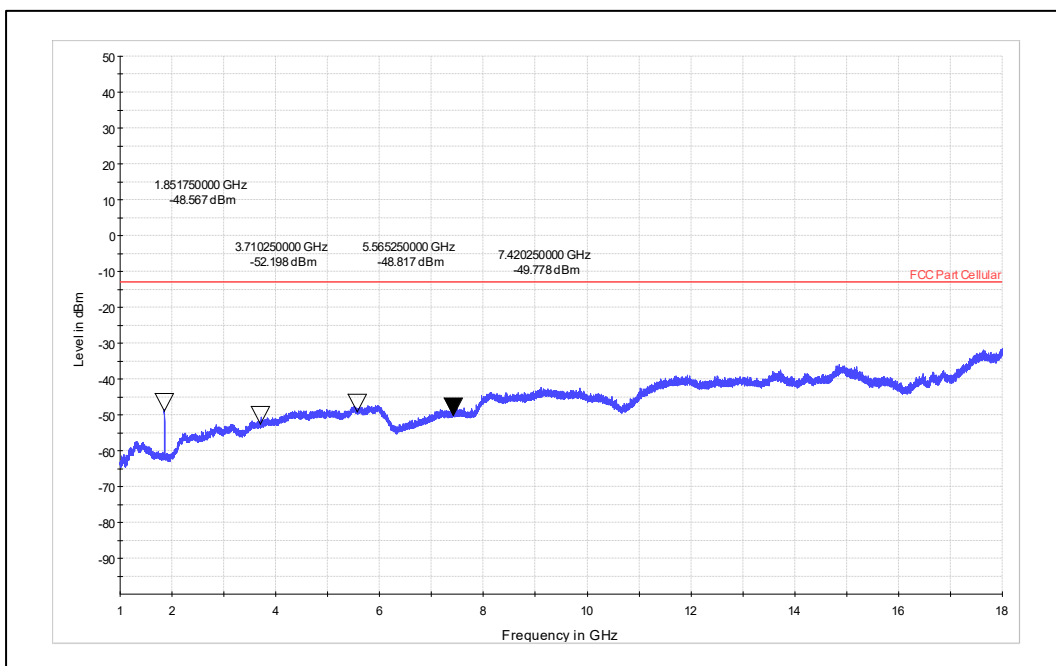


Prüfbericht - Nr.:
Test Report No.:


IN26SIHY 001

Seite 51 von 86
Page 51 of 86

Band-2_Frequency-1880_CB-10_50RB#0_QPSK-1-18GHz_Vertical

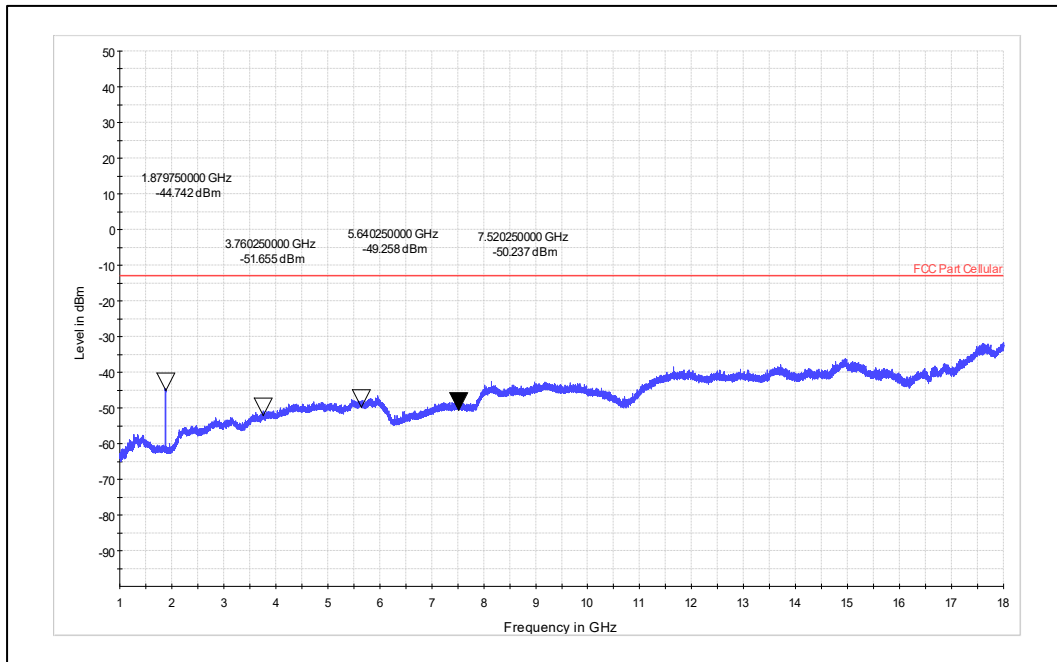

Band-2_Frequency-1880_CB-10_50RB#0_QPSK-1-18GHz_Horizontal

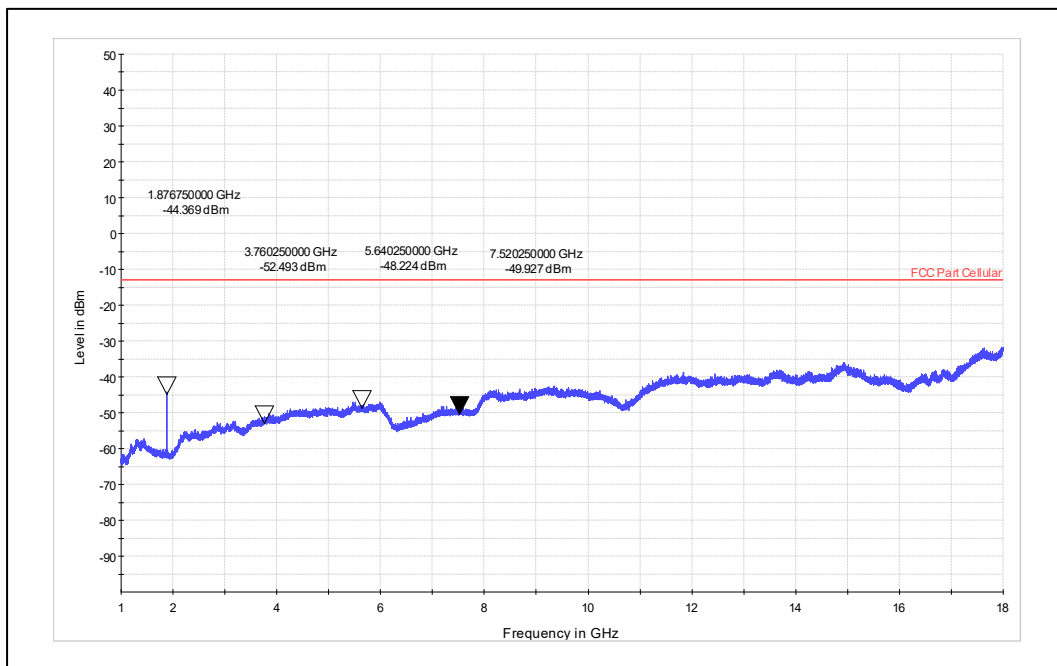


Prüfbericht - Nr.:
Test Report No.:


IN26SIHY 001

Seite 52 von 86
Page 52 of 86


Band-2_Frequency-1905_CB-10_1RB#0_QPSK-1-18GHz_Vertical

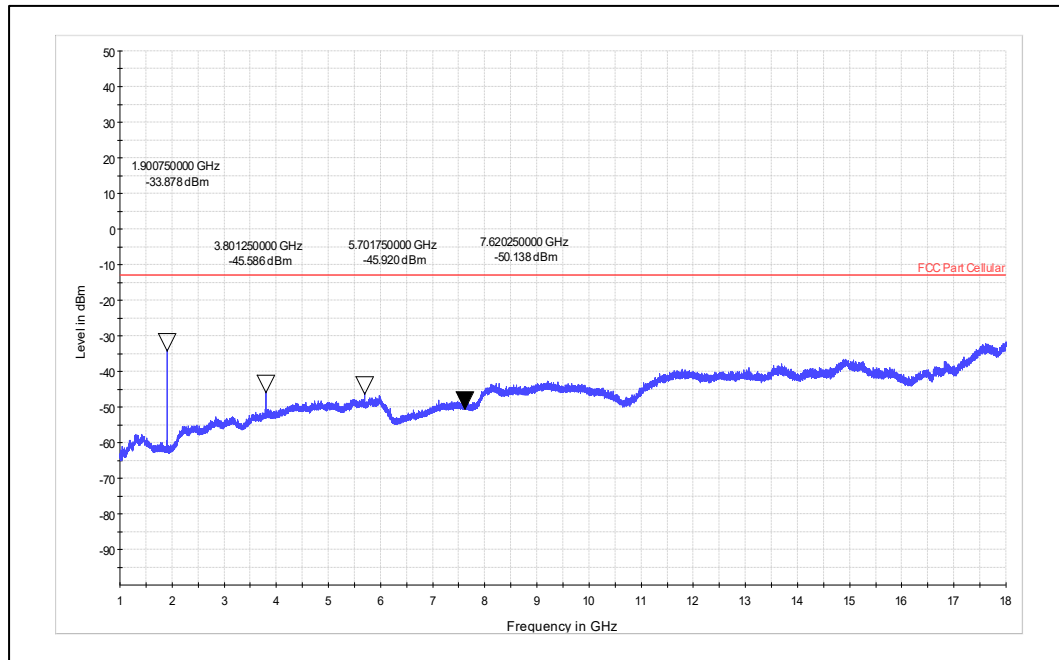


Band-2_Frequency-1905_CB-10_1RB#0_QPSK-1-18GHz_Horizontal

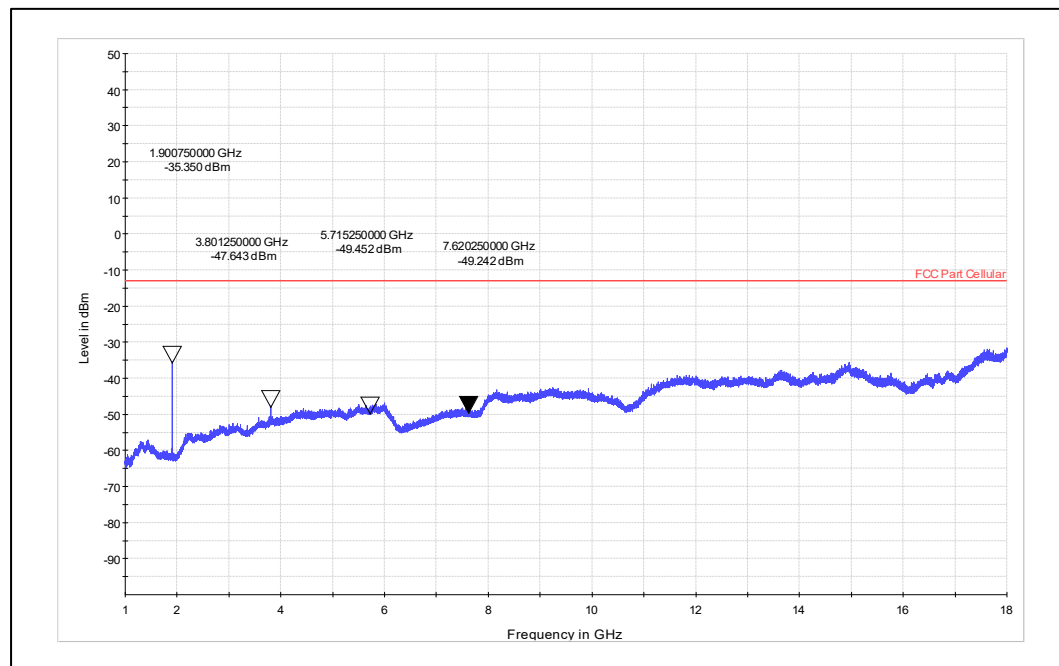

Band-2_Frequency-1857.5_CB-15_75RB#0_QPSK-1-18GHz_Vertical

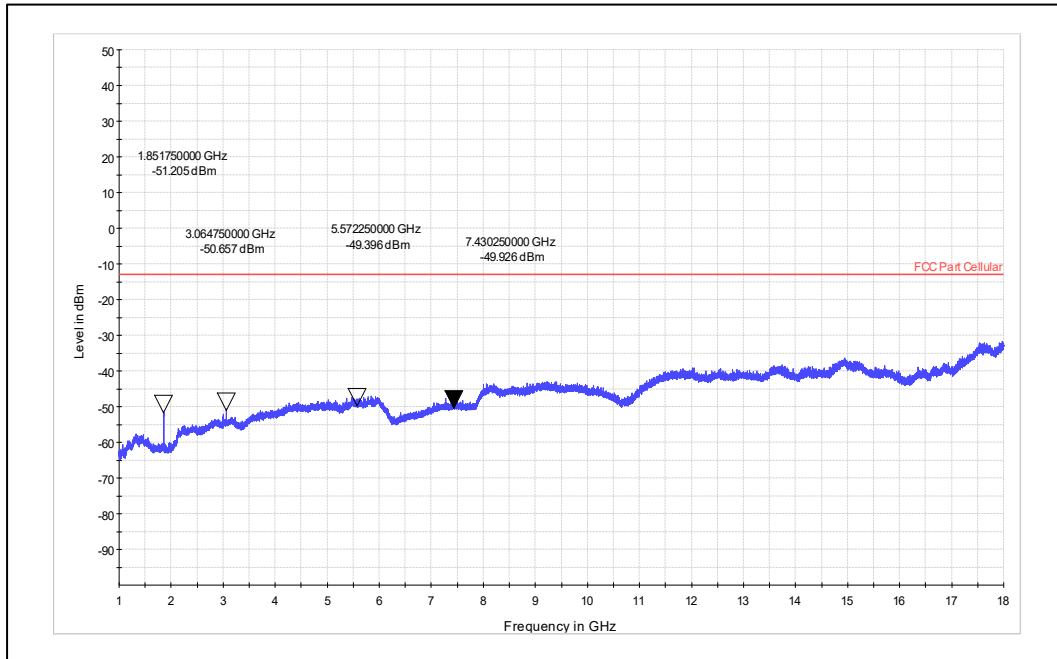

Band-2_Frequency-1857.5_CB-15_75RB#0_QPSK-1-18GHz_Horizontal

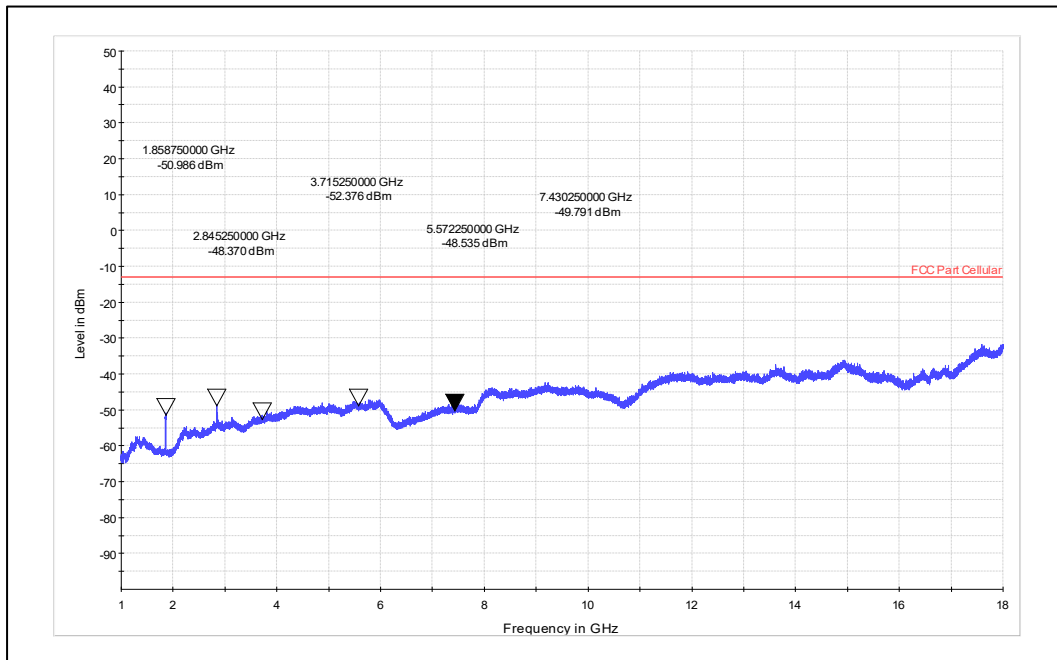


Prüfbericht - Nr.:
Test Report No.:


IN26SIHY 001

Seite 54 von 86
Page 54 of 86

Band-2_Frequency-1880_CB-15_75RB#0_QPSK-1-18GHz_Vertical

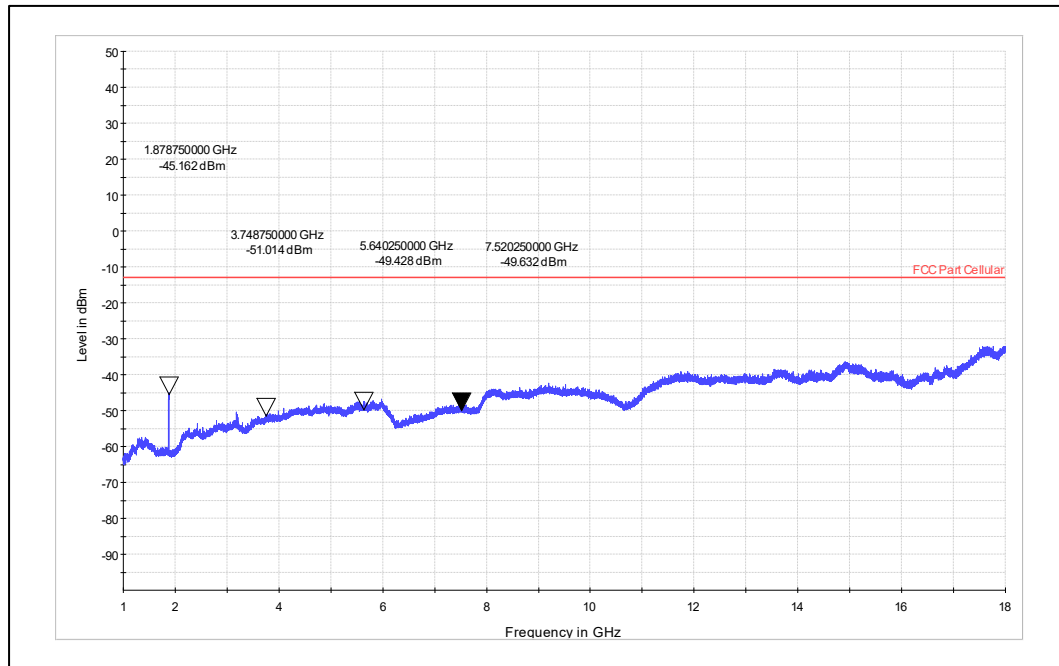

Band-2_Frequency-1880_CB-15_75RB#0_QPSK-1-18GHz_Horizontal

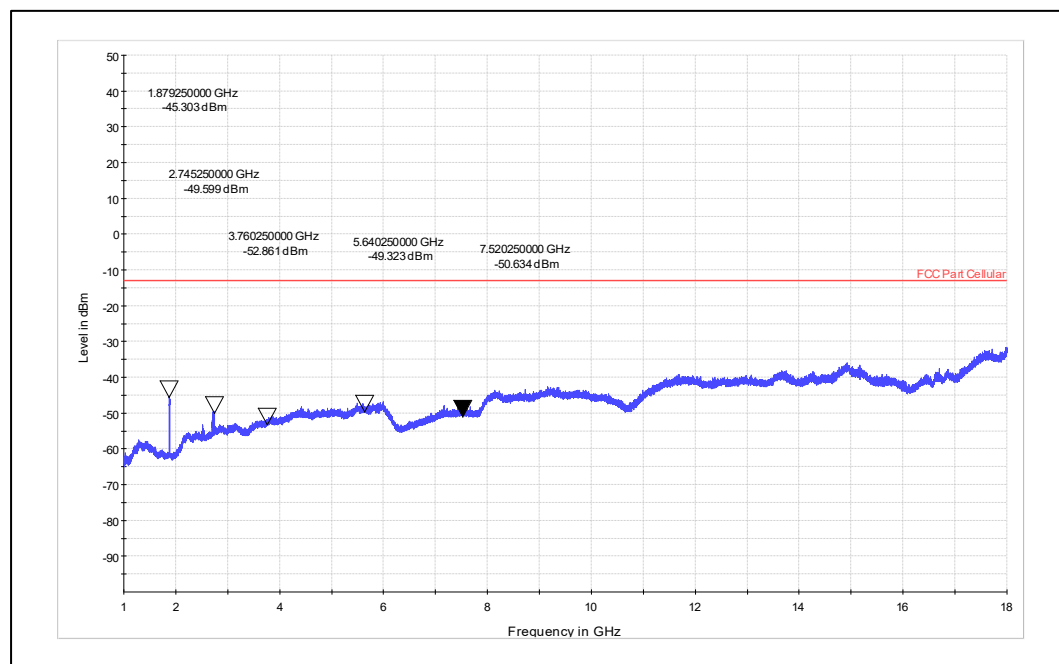

Prüfbericht - Nr.:


Test Report No.:

IN26SIHY 001


Seite 55 von 86

Page 55 of 86


Band-2_Frequency-1902.5_CB-15_75RB#0_QPSK-1-18GHz_Vertical

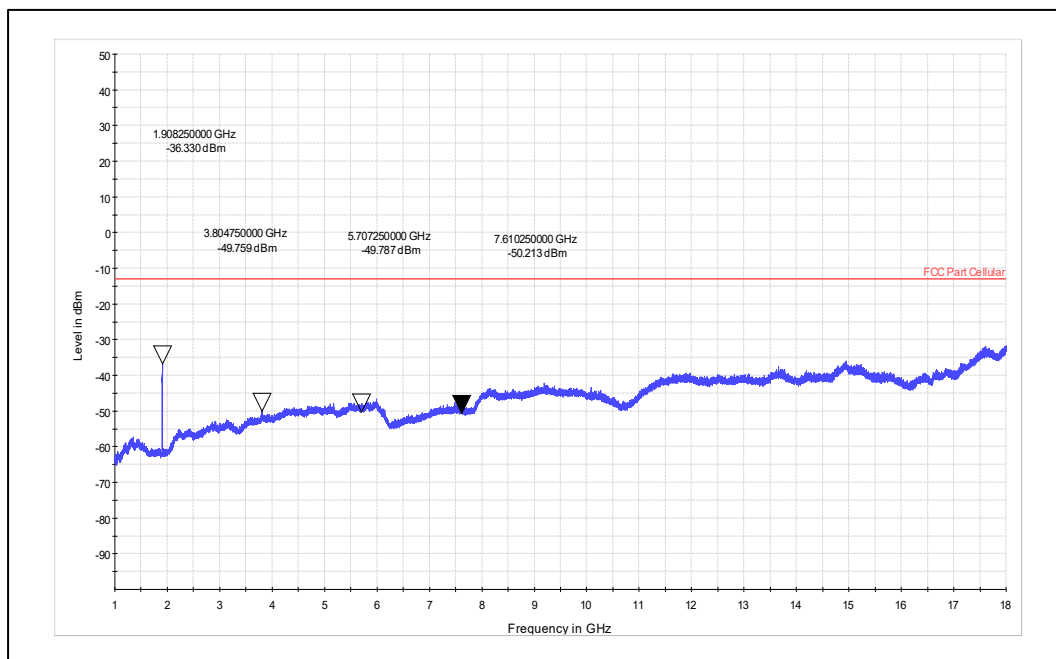


Band-2_Frequency-1902.5_CB-15_75RB#0_QPSK-1-18GHz_Horizontal

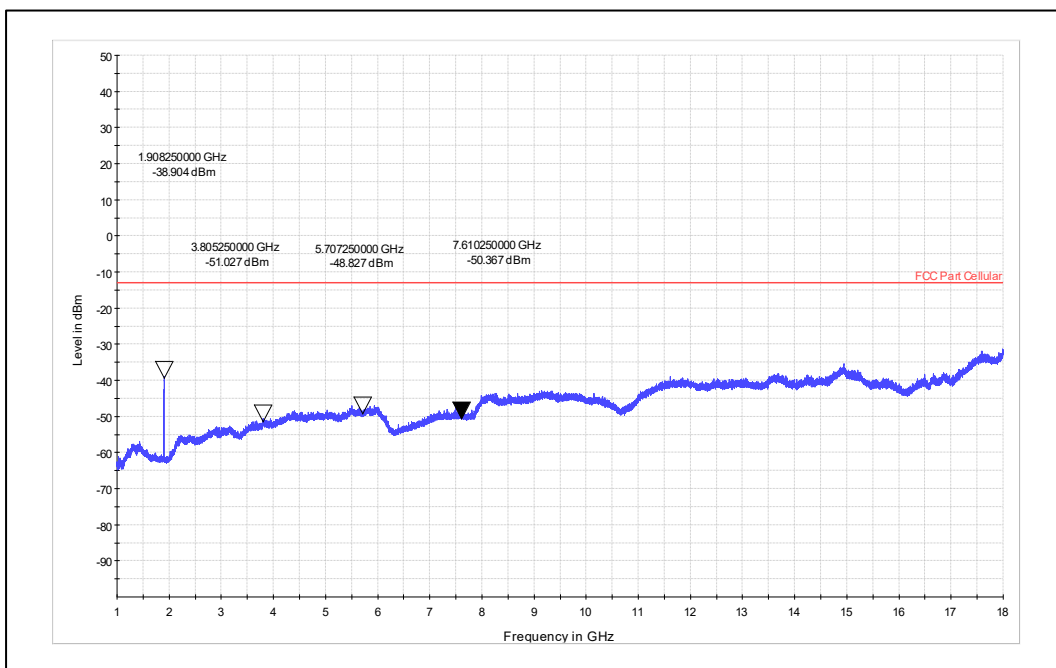

Band-2_Frequency-1860_CB-20_100RB#0_QPSK-1-18GHz_Vertical

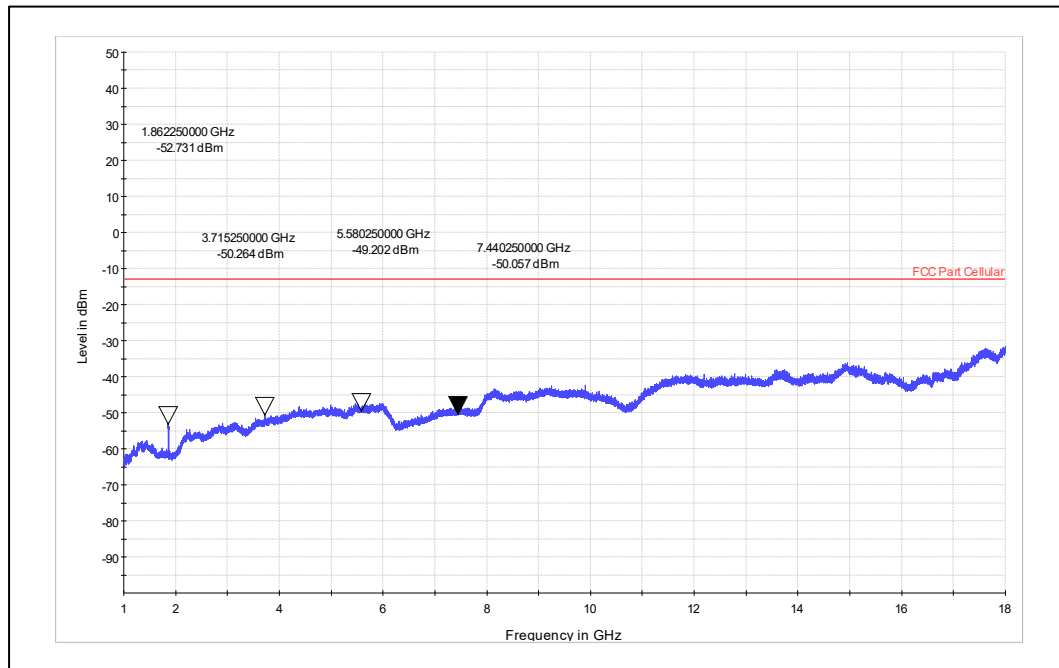

Band-2_Frequency-1860_CB-20_100RB#0_QPSK-1-18GHz_Horizontal

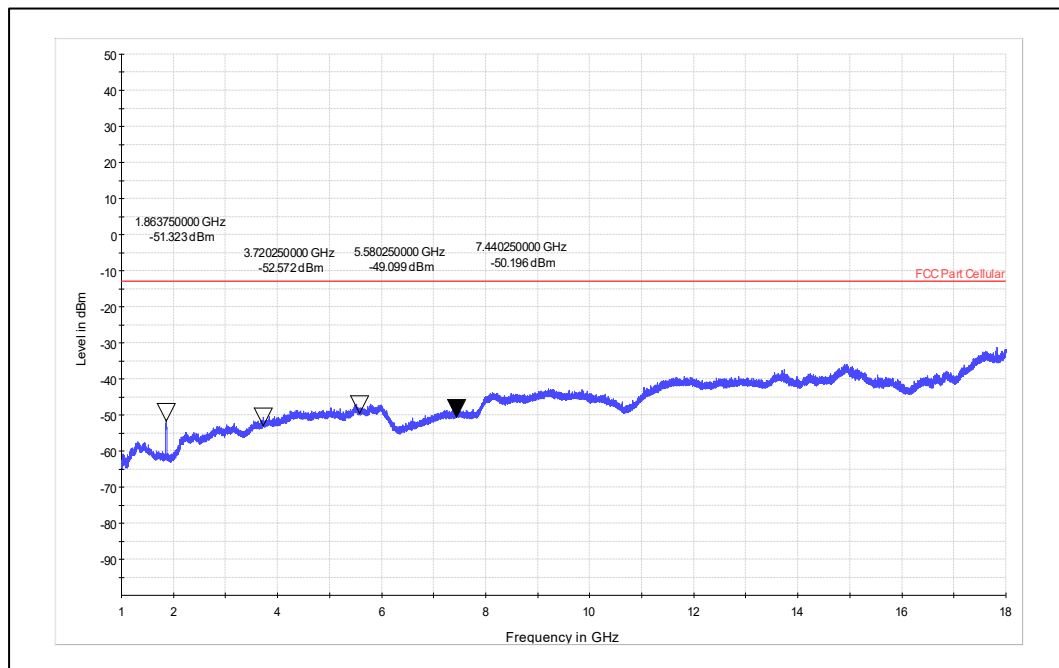

Prüfbericht - Nr.:


Test Report No.:

IN26SIHY 001


Seite 57 von 86

Page 57 of 86

Band-2_Frequency-1880_CB-20_100RB#0_QPSK-1-18GHz_Vertical

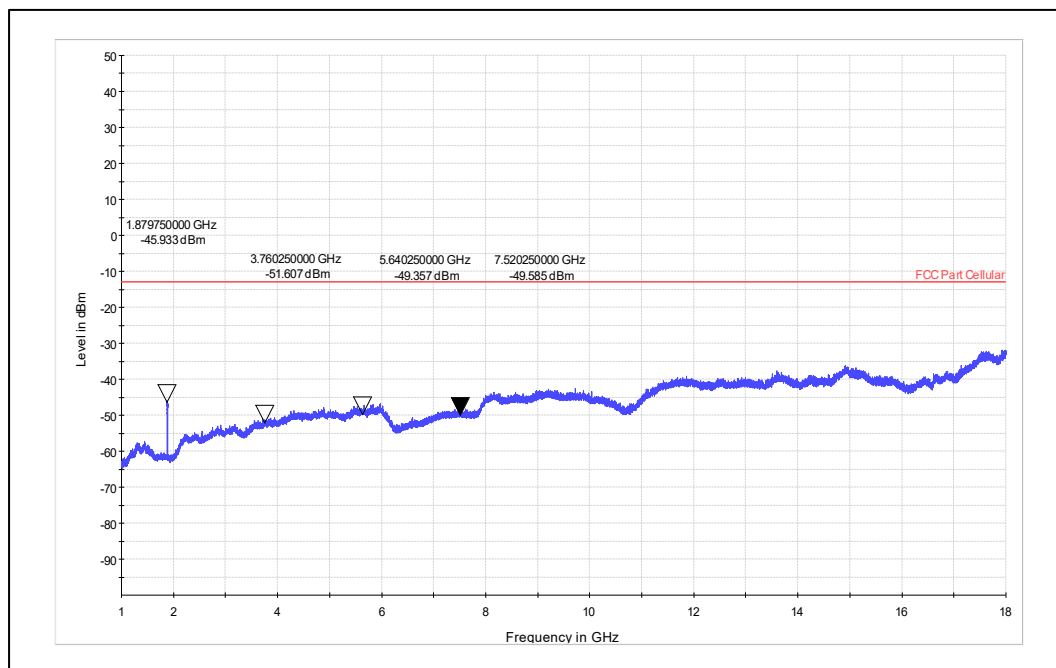

Band-2_Frequency-1880_CB-20_100RB#0_QPSK-1-18GHz_Horizontal

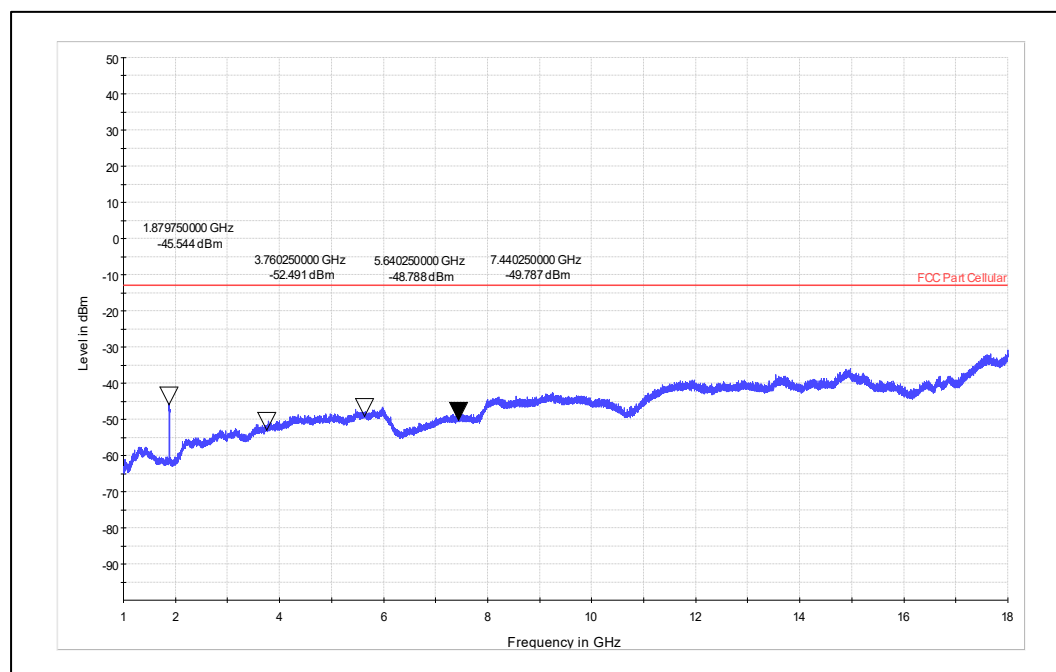


Prüfbericht - Nr.:
Test Report No.:


IN26SIHY 001

Seite 58 von 86
Page 58 of 86

Band-2_Frequency-1900_CB-20_100RB#0_QPSK-1-18GHz_Vertical

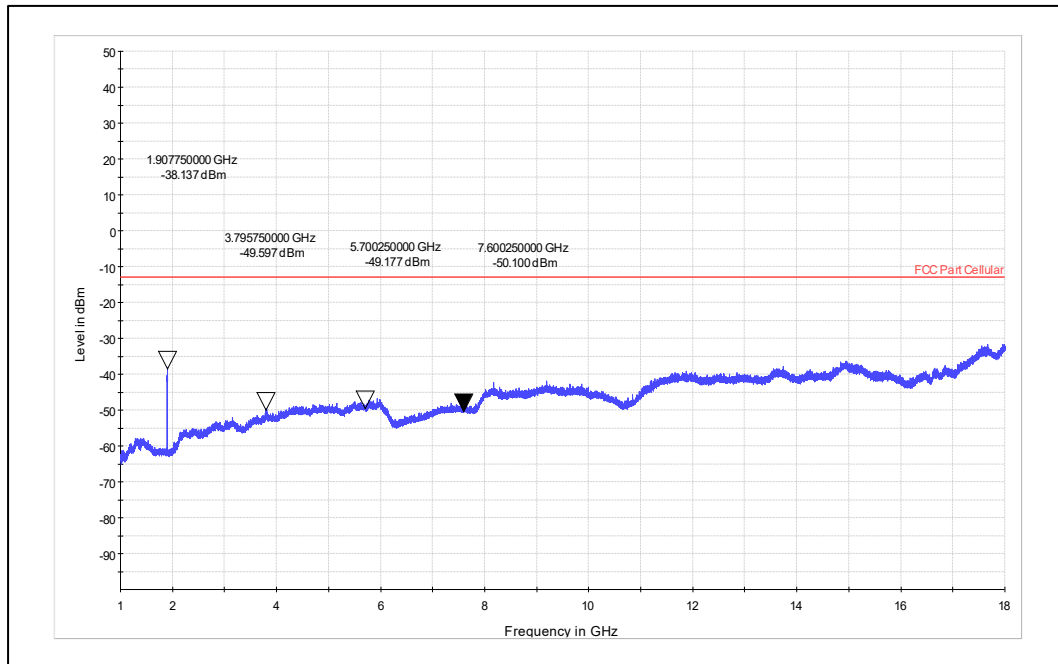

Band-2_Frequency-1900_CB-20_100RB#0_QPSK-1-18GHz_Horizontal

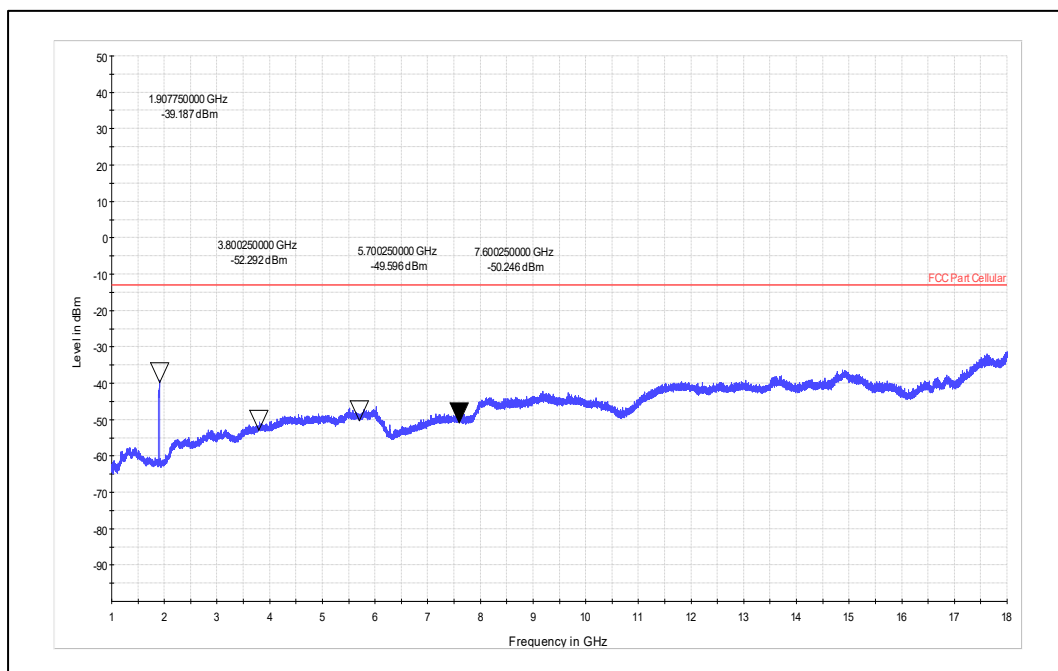

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 59 von 86
Page 59 of 86

Above 1GHz Test results for External Antenna:

Band 2:

Bandwidth	Modulation	Channel Frequency (MHz)	RB Position & RB Allocation	Antenna Polarization	Measured Frequency (MHz)	Measured emission (dBm)	Limit (dBm)	Margin (dB)
1.4	QPSK	1850.70	3/0	Vertical	3701.40	-50.76	-13.00	-37.76
					5552.10	-48.96	-13.00	-35.96
					7402.80	-50.08	-13.00	-37.08
				Horizontal	3701.40	-52.27	-13.00	-39.27
					5552.10	-49.31	-13.00	-36.31
					7402.80	-50.35	-13.00	-37.35
		1880.00	3/0	Vertical	3760.00	-50.35	-13.00	-37.35
					5640.00	-48.09	-13.00	-35.09
					7520.00	-49.74	-13.00	-36.74
				Horizontal	3760.00	-50.42	-13.00	-37.42
					5640.00	-50.02	-13.00	-37.02
					7520.00	-49.79	-13.00	-36.79
		1909.30	3/0	Vertical	3818.60	-48.67	-13.00	-35.67
					5727.90	-48.04	-13.00	-35.04
					7637.20	-49.76	-13.00	-36.76
				Horizontal	3818.60	-49.82	-13.00	-36.82
					5727.90	-49.67	-13.00	-36.67
					7637.20	-50.35	-13.00	-37.35
3	QPSK	1851.50	15/0	Vertical	3703.00	-52.81	-13.00	-39.81
					5554.50	-49.59	-13.00	-36.59
					7406.00	-50.80	-13.00	-37.80
				Horizontal	3703.00	-53.15	-13.00	-40.15
					5554.50	-48.37	-13.00	-35.37
					7406.00	-50.36	-13.00	-37.36
		1880.00	15/0	Vertical	3760.00	-50.75	-13.00	-37.75
					5640.00	-48.62	-13.00	-35.62
					7520.00	-49.74	-13.00	-36.74
				Horizontal	3760.00	-52.38	-13.00	-39.38
					5640.00	-48.95	-13.00	-35.95
					7520.00	-50.81	-13.00	-37.81
		1908.50	15/0	Vertical	3817.00	-50.78	-13.00	-37.78
					5725.50	-48.06	-13.00	-35.06
					7634.00	-49.33	-13.00	-36.33
				Horizontal	3817.00	-50.58	-13.00	-37.58
					5725.50	-48.87	-13.00	-35.87
					7634.00	-49.41	-13.00	-36.41

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 60 von 86
Page 60 of 86

Band 2:

Bandwidth	Modulation	Channel Frequency (MHz)	RB Position & RB Allocation	Antenna Polarization	Measured Frequency (MHz)	Measured emission (dBm)	Limit (dBm)	Margin (dB)
5	QPSK	1852.50	25/0	Vertical	3705.00	-52.59	-13.00	-39.59
					5557.50	-49.75	-13.00	-36.75
					7410.00	-50.41	-13.00	-37.41
				Horizontal	3705.00	-52.73	-13.00	-39.73
					5557.50	-49.06	-13.00	-36.06
					7410.00	-50.28	-13.00	-37.28
		1880.00	25/0	Vertical	3760.00	-51.94	-13.00	-38.94
					5640.00	-49.67	-13.00	-36.67
					7520.00	-50.15	-13.00	-37.15
				Horizontal	3760.00	-52.36	-13.00	-39.36
					5640.00	-49.30	-13.00	-36.30
					7520.00	-50.45	-13.00	-37.45
	16 QAM	1907.50	25/0	Vertical	3815.00	-52.06	-13.00	-39.06
					5722.50	-49.78	-13.00	-36.78
					7630.00	-48.90	-13.00	-35.90
				Horizontal	3815.00	-51.54	-13.00	-38.54
					5722.50	-49.57	-13.00	-36.57
					7630.00	-50.66	-13.00	-37.66
10	QPSK	1855.00	50/0	Vertical	3710.00	-52.58	-13.00	-39.58
					5565.00	-49.50	-13.00	-36.50
					7420.00	-49.85	-13.00	-36.85
				Horizontal	3710.00	-53.46	-13.00	-40.46
					5565.00	-47.98	-13.00	-34.98
					7420.00	-49.82	-13.00	-36.82
		1880.00	50/0	Vertical	3760.00	-53.02	-13.00	-40.02
					5640.00	-49.42	-13.00	-36.42
					7520.00	-50.23	-13.00	-37.23
				Horizontal	3760.00	-52.08	-13.00	-39.08
					5640.00	-49.22	-13.00	-36.22
					7520.00	-50.09	-13.00	-37.09
		1905.00	1/0	Vertical	3810.00	-45.29	-13.00	-32.29
					5715.00	-49.79	-13.00	-36.79
					7620.00	-50.62	-13.00	-37.62
				Horizontal	3810.00	-52.19	-13.00	-39.19
					5715.00	-49.92	-13.00	-36.92
					7620.00	-50.32	-13.00	-37.32

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001


Seite 61 von 86
Page 61 of 86

Band 2:


Bandwidth	Modulation	Channel Frequency (MHz)	RB Position & RB Allocation	Antenna Polarization	Measured Frequency (MHz)	Measured emission (dBm)	Limit (dBm)	Margin (dB)
15	QPSK	1857.50	75/0	Vertical	3715.00	-53.32	-13.00	-40.32
					5572.50	-48.17	-13.00	-35.17
					7430.00	-50.45	-13.00	-37.45
				Horizontal	3715.00	-53.14	-13.00	-40.14
					5572.50	-49.07	-13.00	-36.07
					7430.00	-49.30	-13.00	-36.30
		1880.00	75/0	Vertical	3760.00	-51.82	-13.00	-38.82
					5640.00	-48.84	-13.00	-35.84
					7520.00	-49.44	-13.00	-36.44
				Horizontal	3760.00	-51.97	-13.00	-38.97
					5640.00	-49.34	-13.00	-36.34
					7520.00	-50.12	-13.00	-37.12
		1902.50	75/0	Vertical	3805.00	-52.31	-13.00	-39.31
					5707.50	-49.99	-13.00	-36.99
					7610.00	-49.97	-13.00	-36.97
				Horizontal	3805.00	-52.47	-13.00	-39.47
					5707.50	-48.57	-13.00	-35.57
					7610.00	-50.51	-13.00	-37.51
20	QPSK	1860.00	100/0	Vertical	3720.00	-53.00	-13.00	-40.00
					5580.00	-49.80	-13.00	-36.80
					7440.00	-50.18	-13.00	-37.18
				Horizontal	3720.00	-53.01	-13.00	-40.01
					5580.00	-49.87	-13.00	-36.87
					7440.00	-50.60	-13.00	-37.60
		1880.00	100/0	Vertical	3760.00	-52.23	-13.00	-39.23
					5640.00	-48.47	-13.00	-35.47
					7520.00	-50.08	-13.00	-37.08
				Horizontal	3760.00	-52.36	-13.00	-39.36
					5640.00	-49.23	-13.00	-36.23
					7520.00	-50.30	-13.00	-37.30
		1900.00	100/0	Vertical	3800.00	-51.96	-13.00	-38.96
					5700.00	-49.85	-13.00	-36.85
					7600.00	-49.79	-13.00	-36.79
				Horizontal	3800.00	-52.02	-13.00	-39.02
					5700.00	-49.87	-13.00	-36.87
					7600.00	-48.95	-13.00	-35.95

LTE Test Plots:


Band-2_Frequency-1850.7_CB-1.4_3RB#0_QPSK-1-18GHz_Vertical

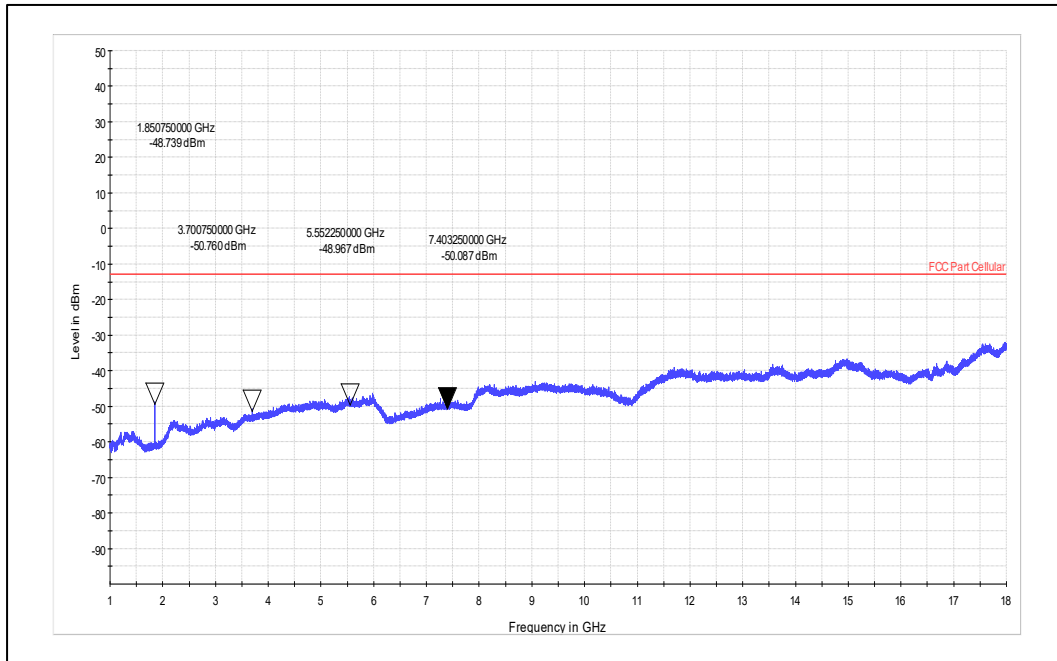


Band-2_Frequency-1850.7_CB-1.4_3RB#0_QPSK-1-18GHz_Horizontal

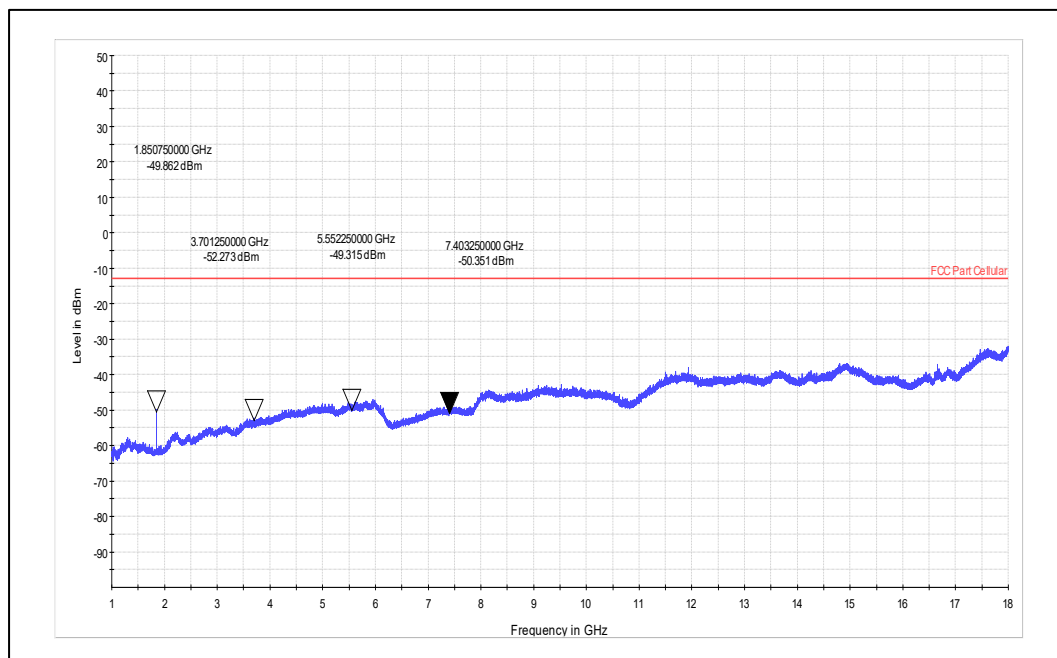

Band-2_Frequency-1880_CB-1.4_3RB#0_QPSK-1-18GHz_Vertical

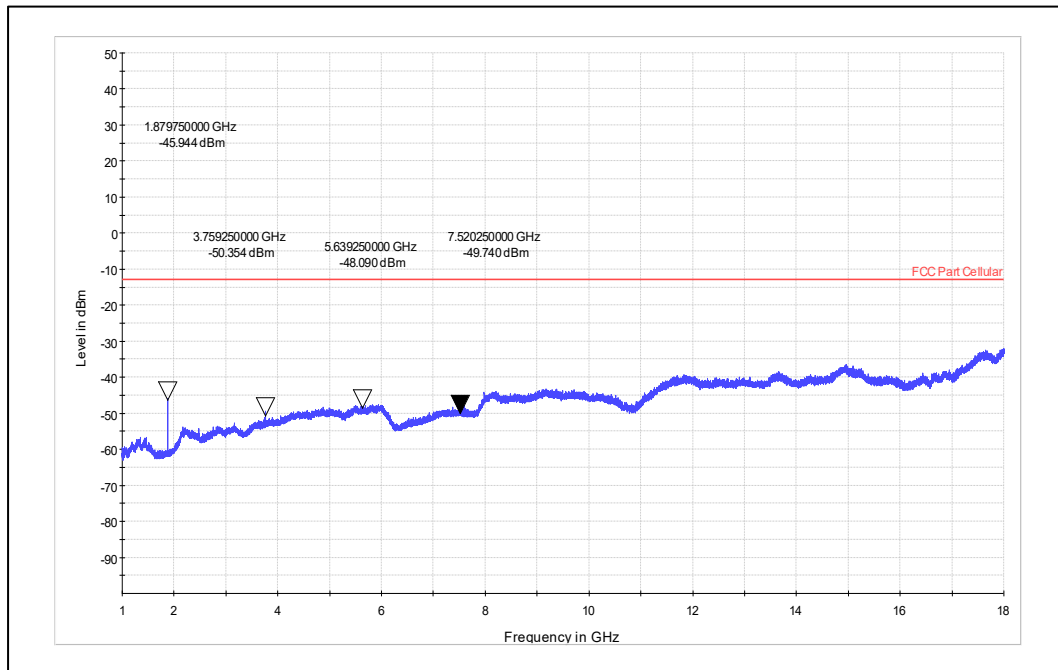

Band-2_Frequency-1880_CB-1.4_3RB#0_QPSK-1-18GHz_Horizontal

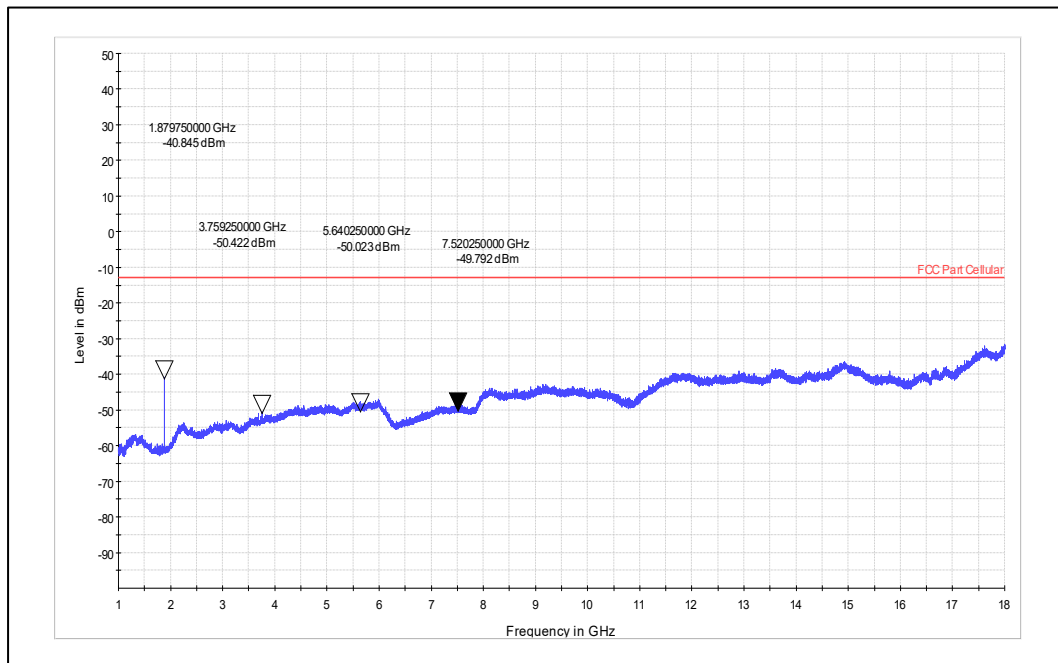


Prüfbericht - Nr.:
Test Report No.:


IN26SIHY 001

Seite 64 von 86
Page 64 of 86


Band-2_Frequency-1909.3_CB-1.4_3RB#0_QPSK-1-18GHz_Vertical

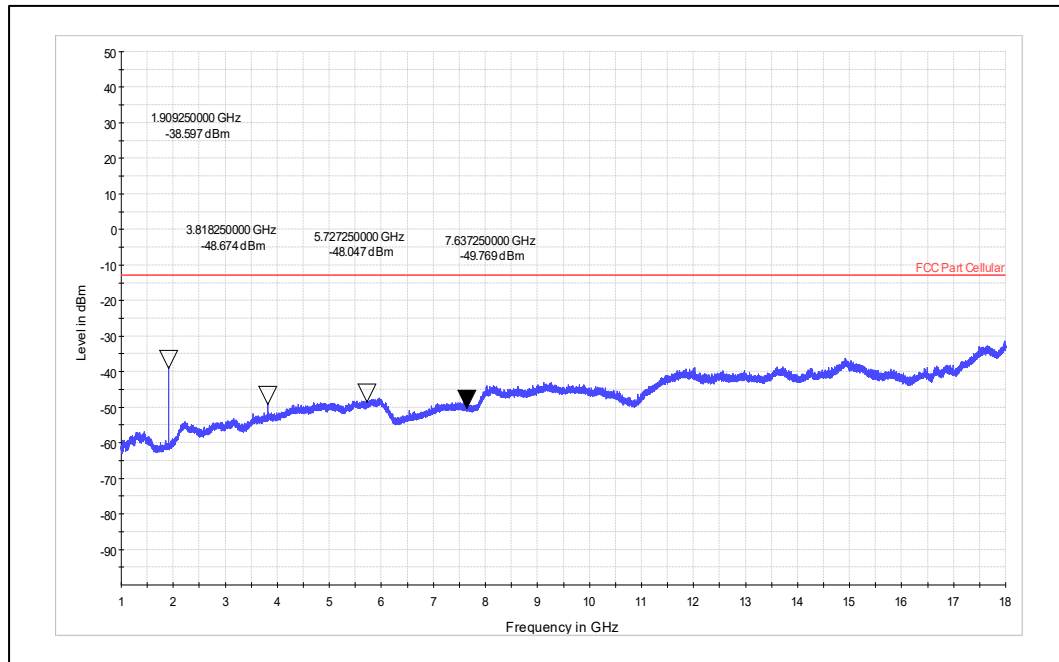


Band-2_Frequency-1909.3_CB-1.4_3RB#0_QPSK-1-18GHz_Horizontal

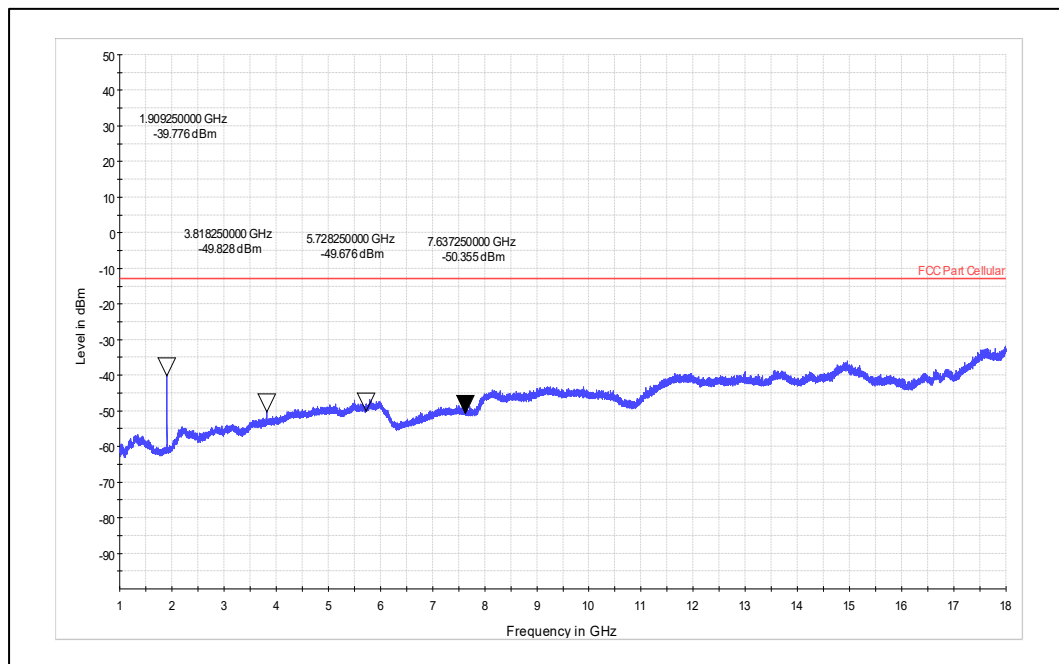

Band-2_Frequency-1851.5_CB-3_15RB#0_QPSK-1-18GHz_Vertical

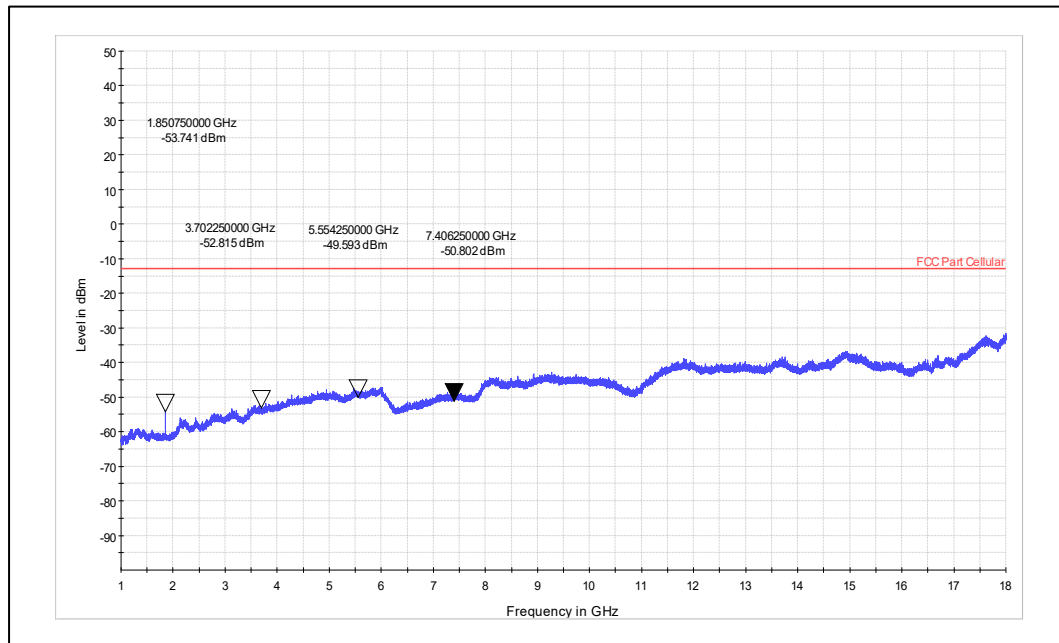

Band-2_Frequency-1851.5_CB-3_15RB#0_QPSK-1-18GHz_Horizontal

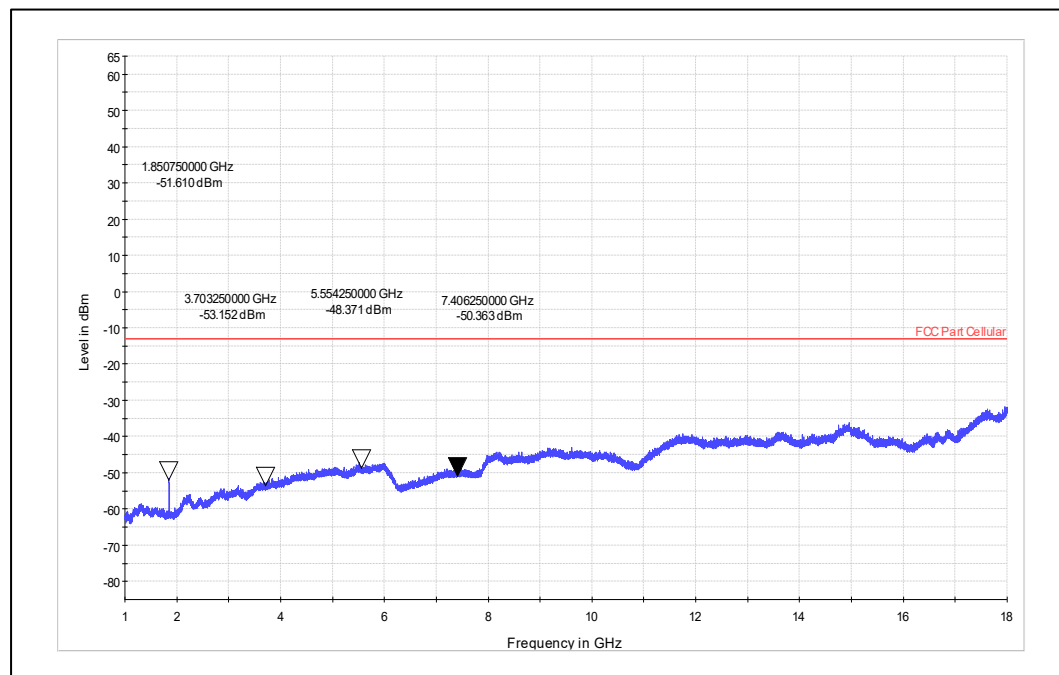


Prüfbericht - Nr.:
Test Report No.:


IN26SIHY 001

Seite 66 von 86
Page 66 of 86

Band-2_Frequency-1880_CB-3_15RB#0_QPSK-1-18GHz_Vertical

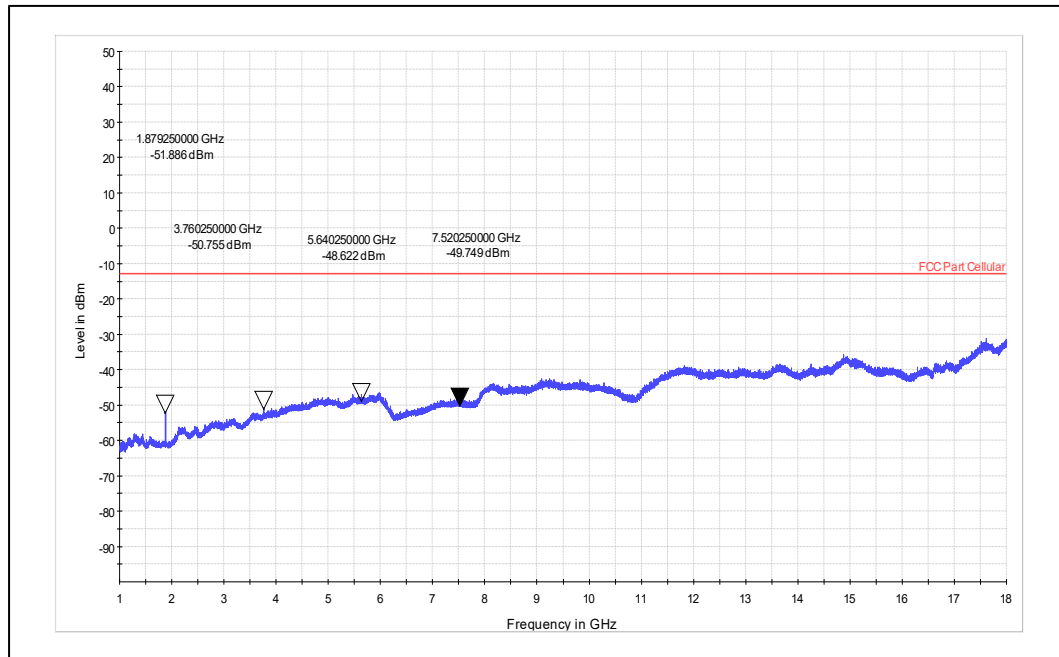

Band-2_Frequency-1880_CB-3_15RB#0_QPSK-1-18GHz_Horizontal

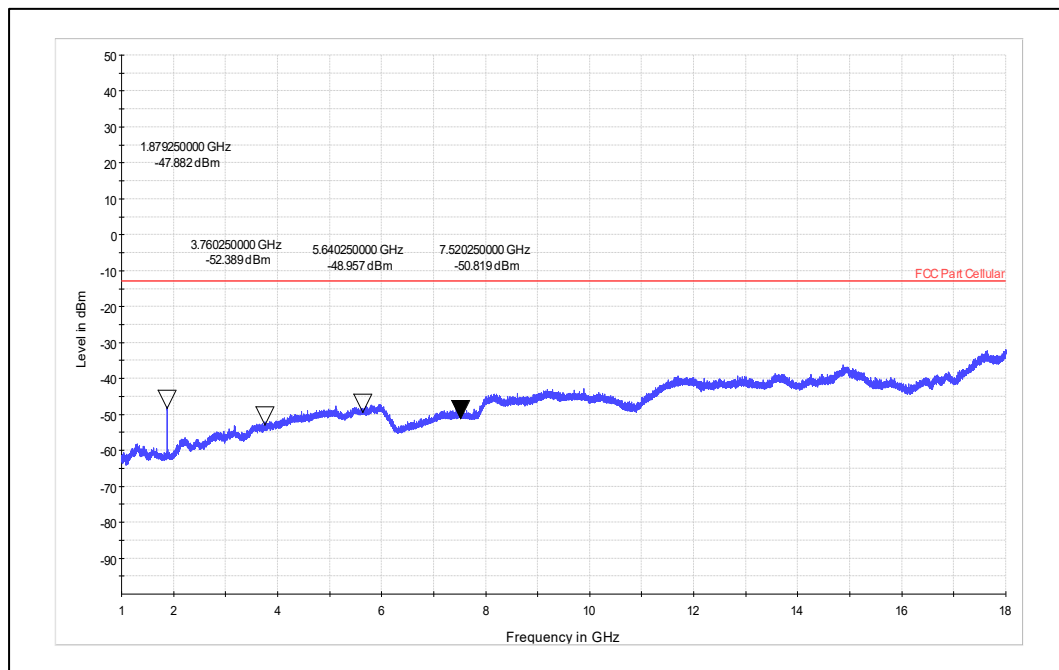


Prüfbericht - Nr.:
Test Report No.:


IN26SIHY 001

Seite 67 von 86
Page 67 of 86


Band-2_Frequency-1908.5_CB-3_15RB#0_QPSK-1-18GHz_Vertical

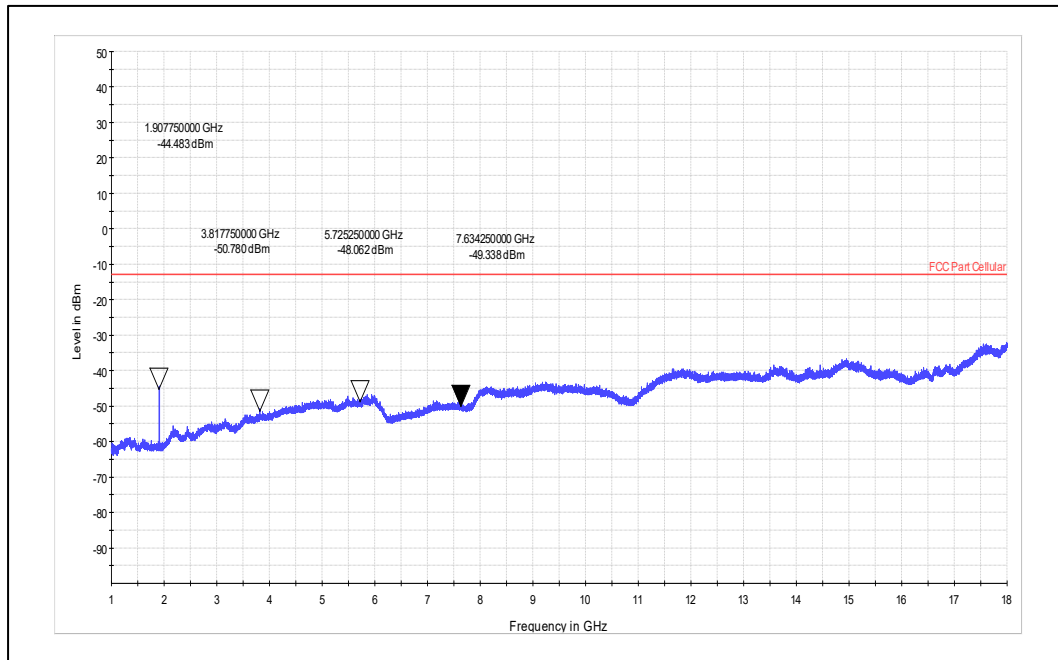


Band-2_Frequency-1908.5_CB-3_15RB#0_QPSK-1-18GHz_Horizontal

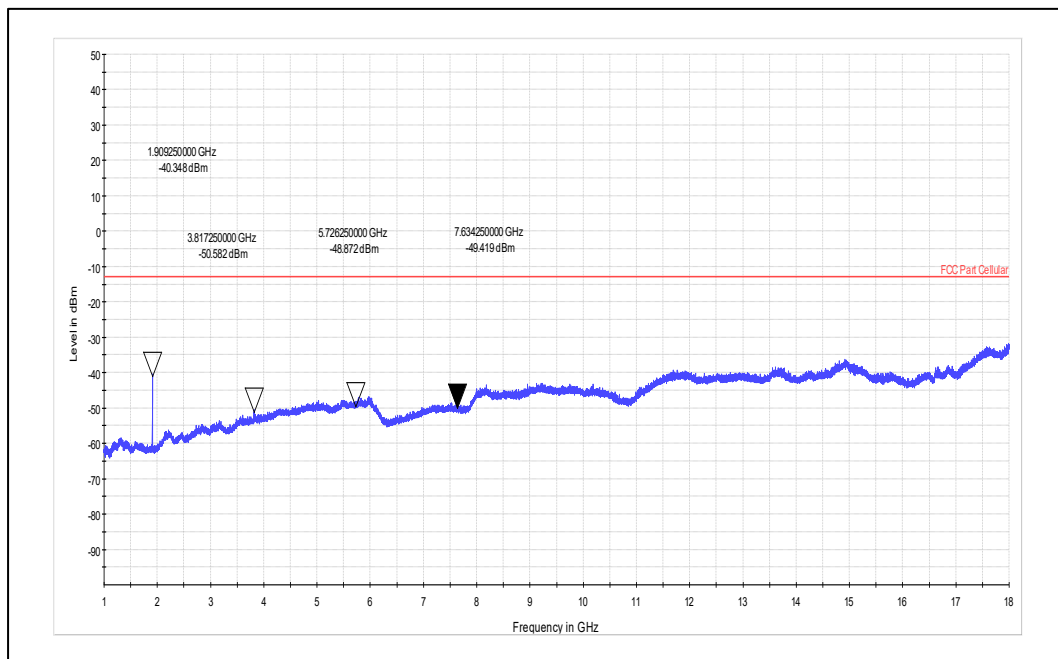

Band-2_Frequency-1852.5_CB-5_25RB#0_QPSK-1-18GHz_Vertical

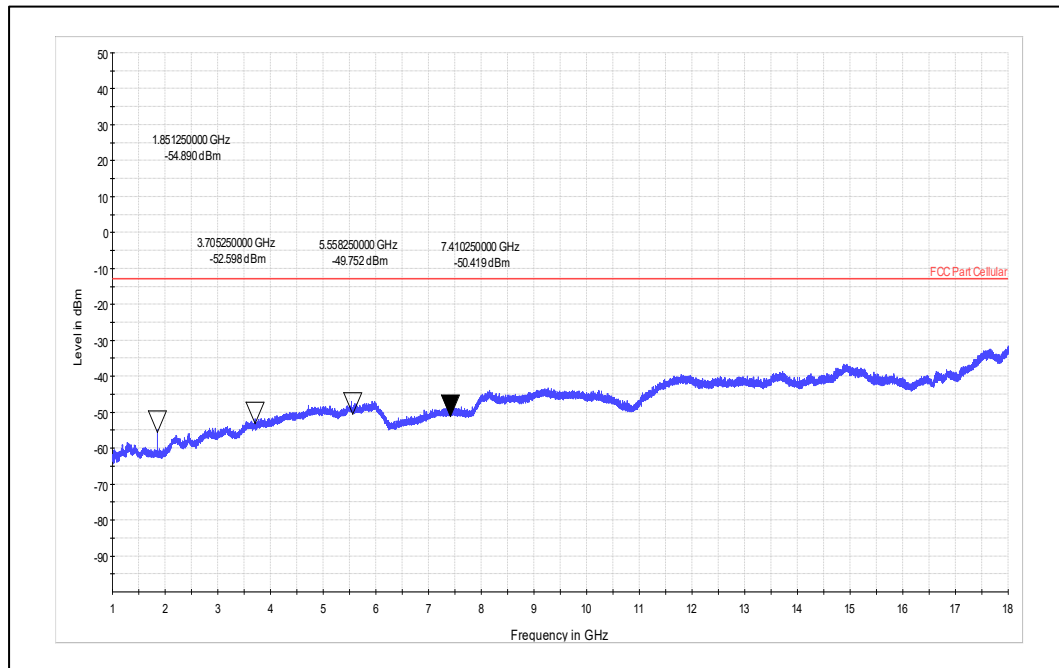

Band-2_Frequency-1852.5_CB-5_25RB#0_QPSK-1-18GHz_Horizontal

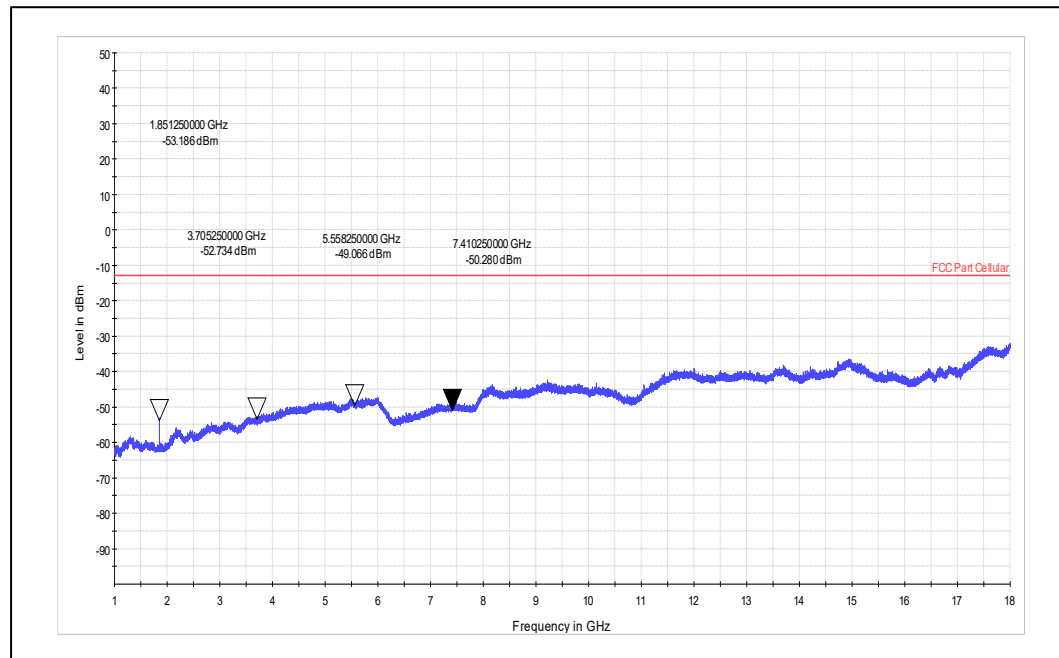

Prüfbericht - Nr.:


Test Report No.:

IN26SIHY 001


Seite 69 von 86

Page 69 of 86

Band-2_Frequency-1880_CB-5_25RB#0_QPSK-1-18GHz_Vertical

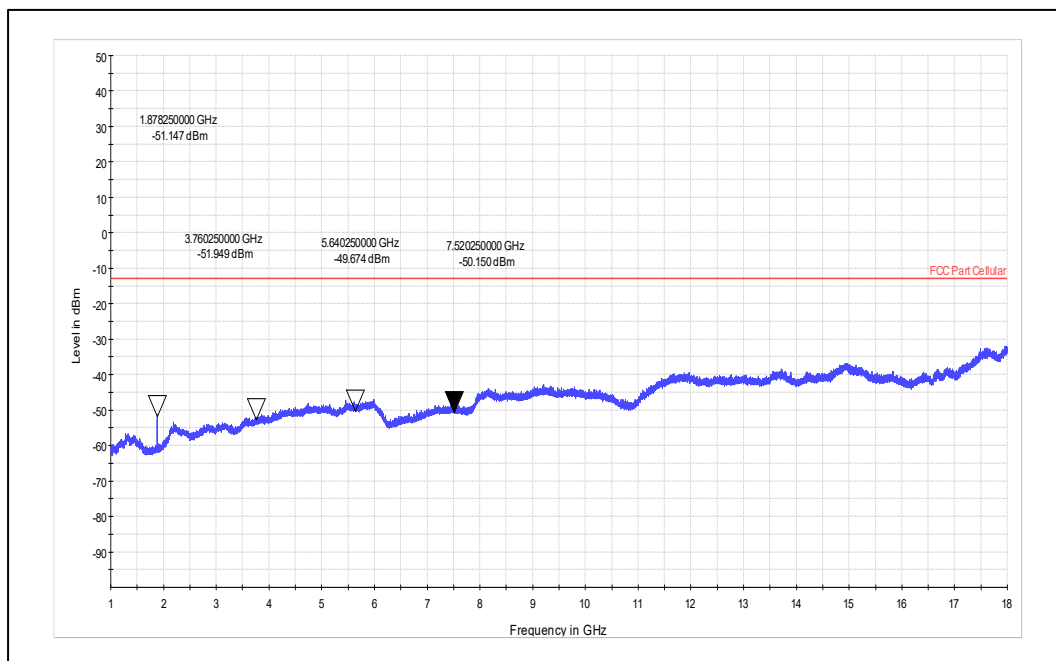

Band-2_Frequency-1880_CB-5_25RB#0_QPSK-1-18GHz_Horizontal

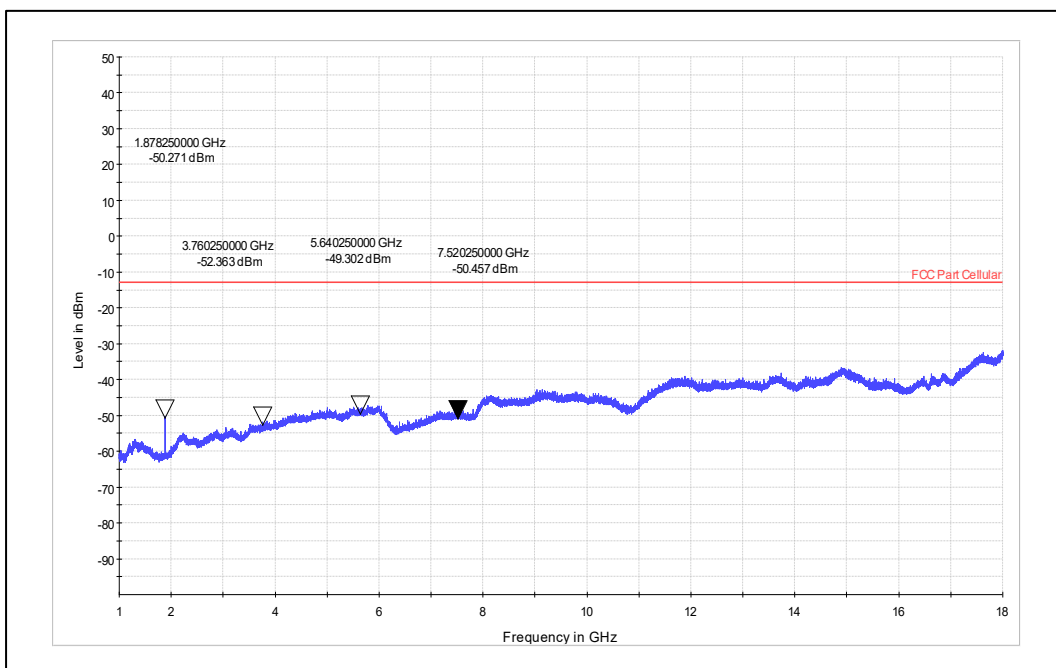

Prüfbericht - Nr.:


Test Report No.:

IN26SIHY 001


Seite 70 von 86

Page 70 of 86

Band-2_Frequency-1907.5_CB-5_25RB#0_16QAM-1-18GHz_Vertical

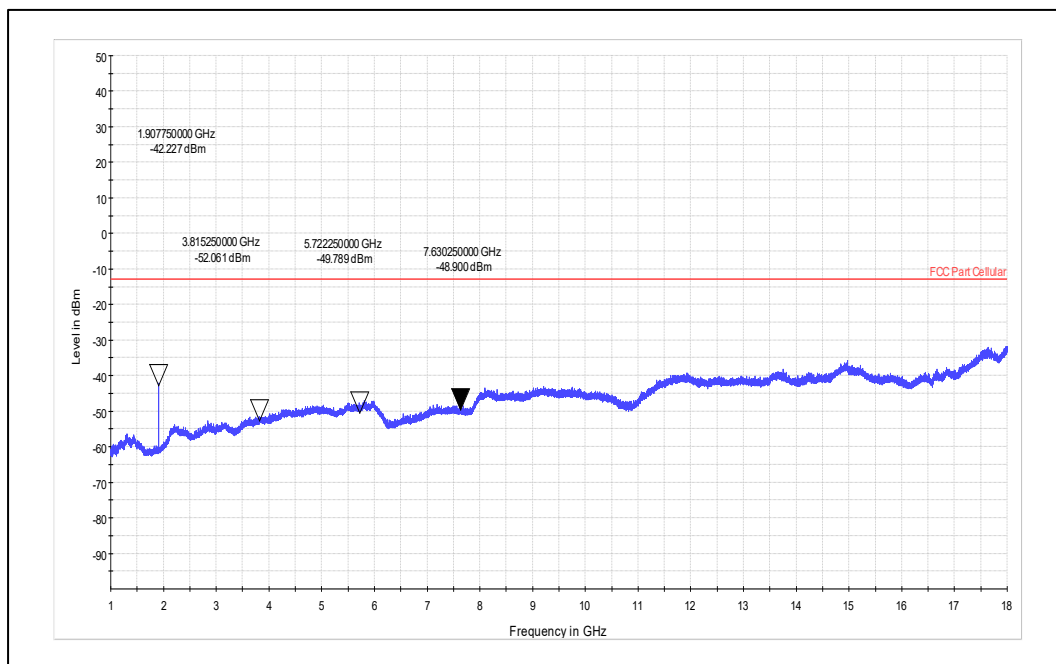

Band-2_Frequency-1907.5_CB-5_25RB#0_16QAM-1-18GHz_Horizontal

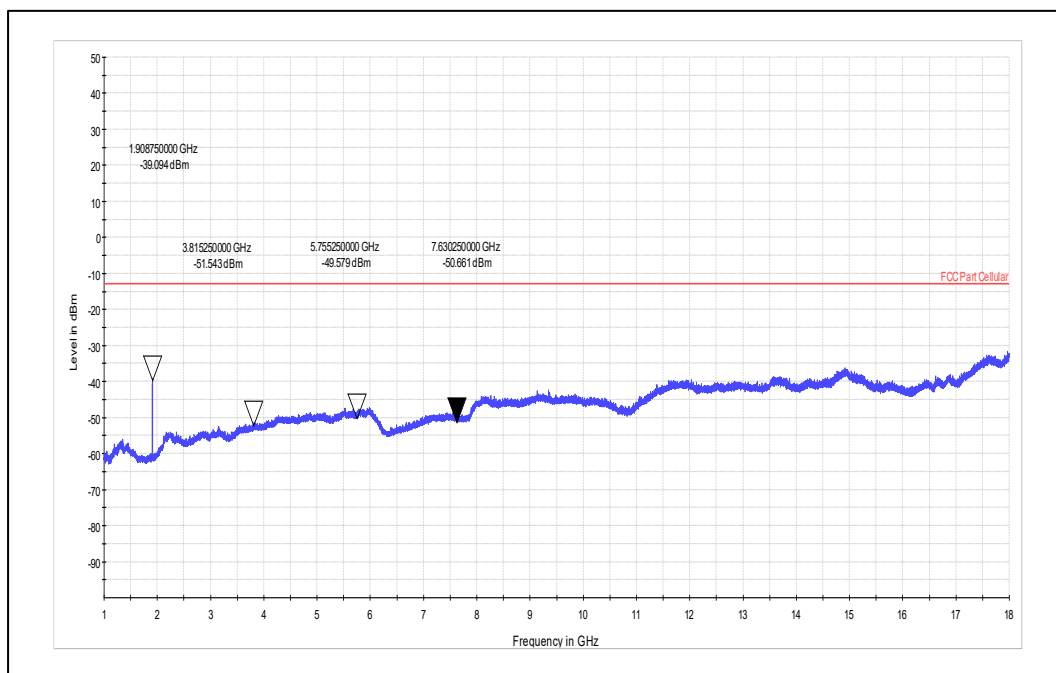

Prüfbericht - Nr.:


Test Report No.:

IN26SIHY 001


Seite 71 von 86

Page 71 of 86

Band-2_Frequency-1855_CB-10_50RB#0_QPSK-1-18GHz_Vertical

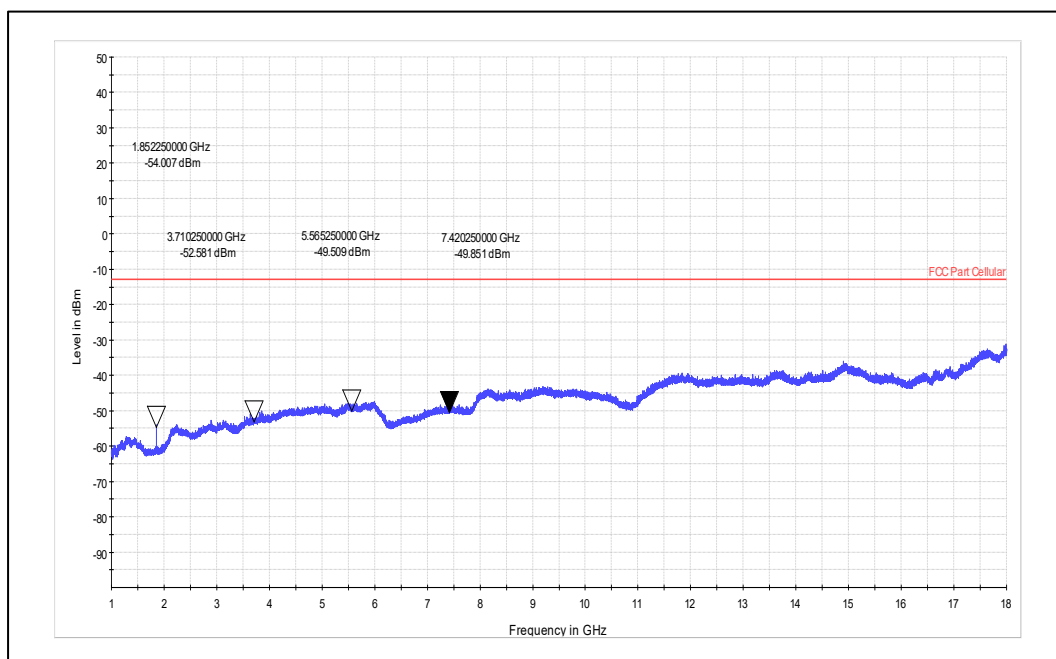

Band-2_Frequency-1855_CB-10_50RB#0_QPSK-1-18GHz_Horizontal

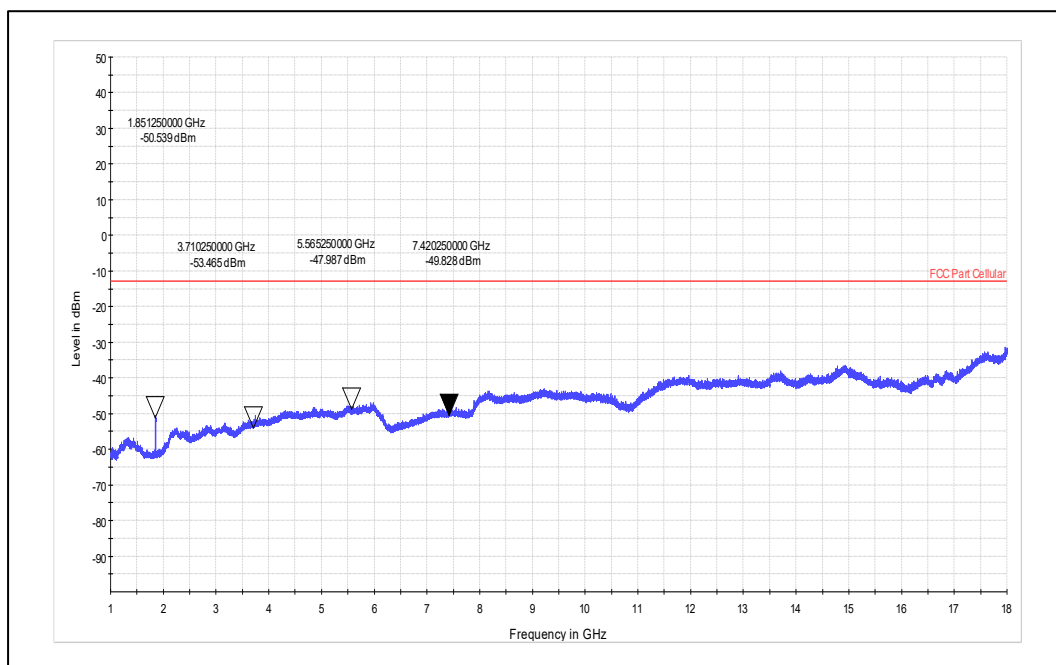


Prüfbericht - Nr.:
Test Report No.:


IN26SIHY 001

Seite 72 von 86
Page 72 of 86

Band-2_Frequency-1880_CB-10_50RB#0_QPSK-1-18GHz_Vertical

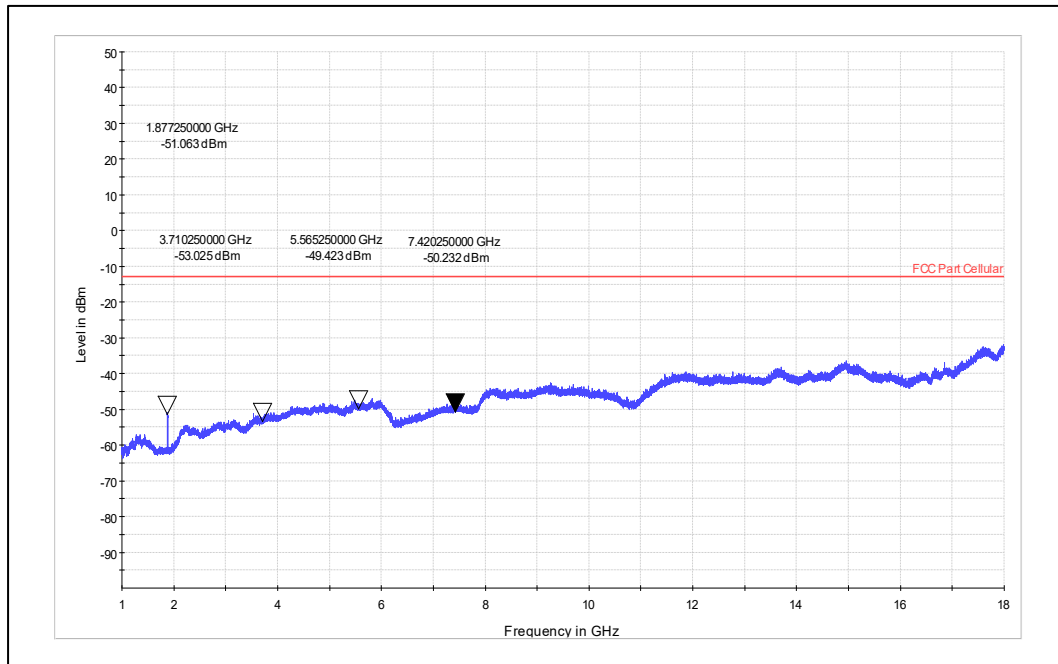

Band-2_Frequency-1880_CB-10_50RB#0_QPSK-1-18GHz_Horizontal

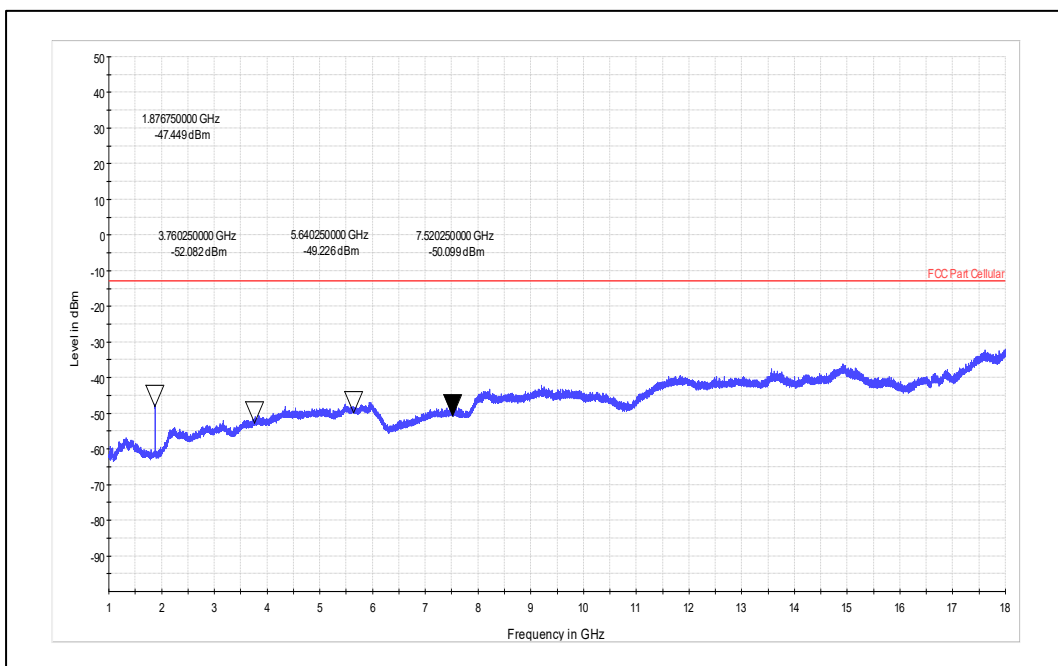

Prüfbericht - Nr.:


Test Report No.:

IN26SIHY 001


Seite 73 von 86

Page 73 of 86


Band-2_Frequency-1905_CB-10_1RB#0_QPSK-1-18GHz_Vertical

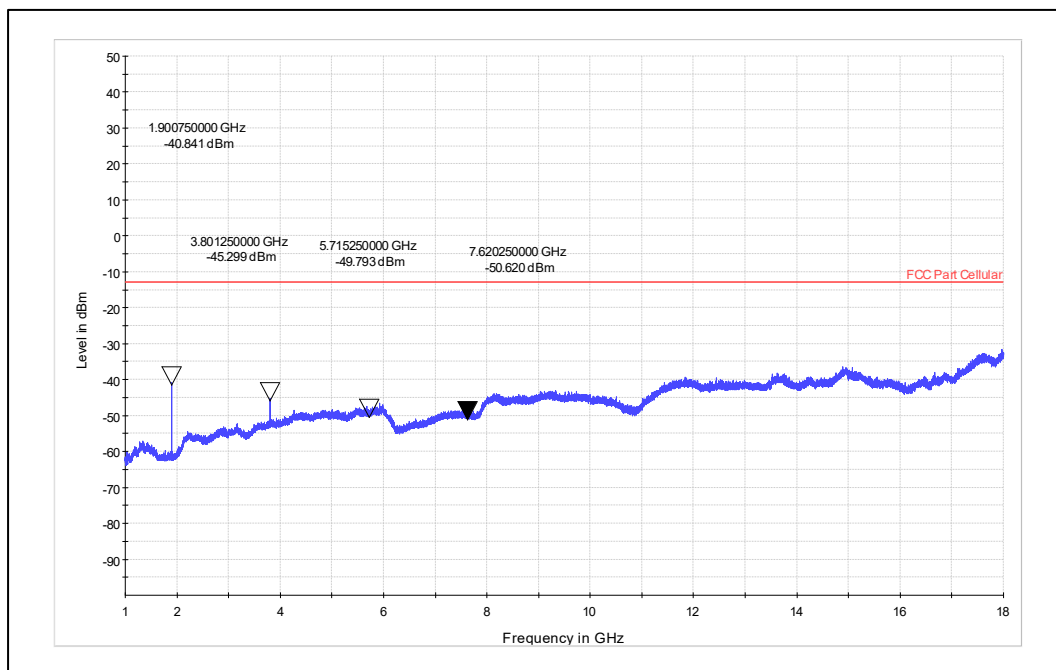


Band-2_Frequency-1905_CB-10_1RB#0_QPSK-1-18GHz_Horizontal

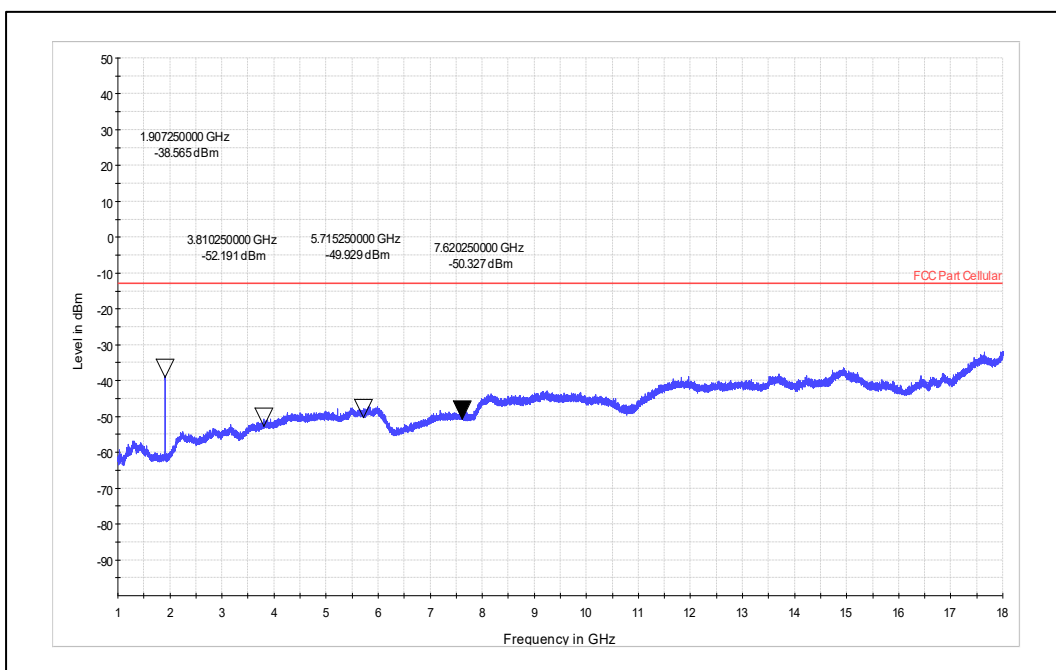


Band-2_Frequency-1857.5_CB-15_75RB#0_QPSK-1-18GHz_Vertical

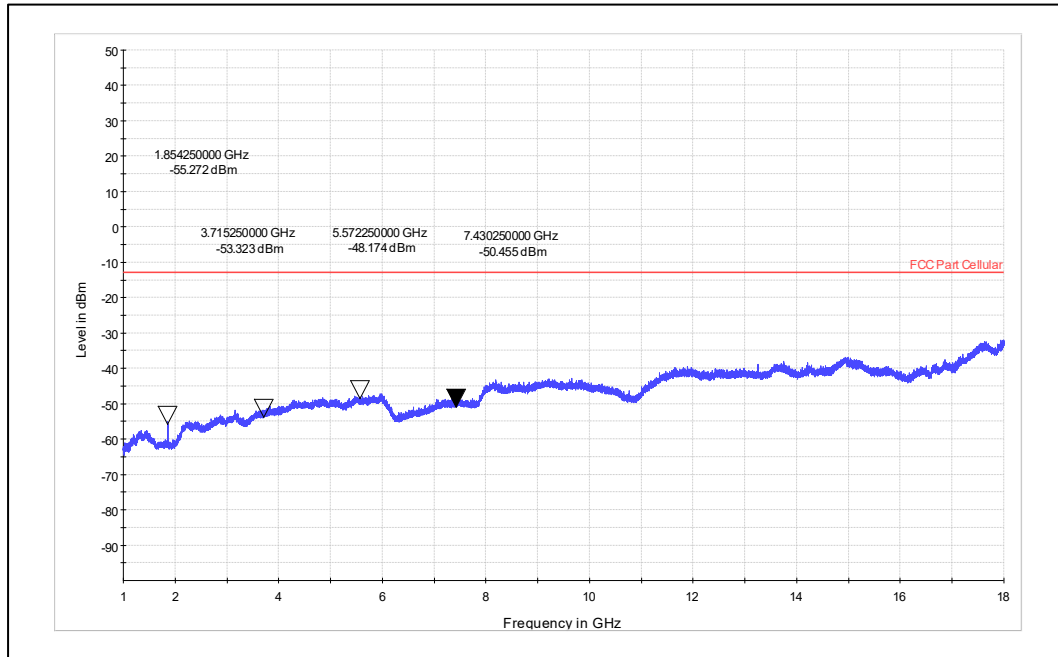


Band-2_Frequency-1857.5_CB-15_75RB#0_QPSK-1-18GHz_Horizontal

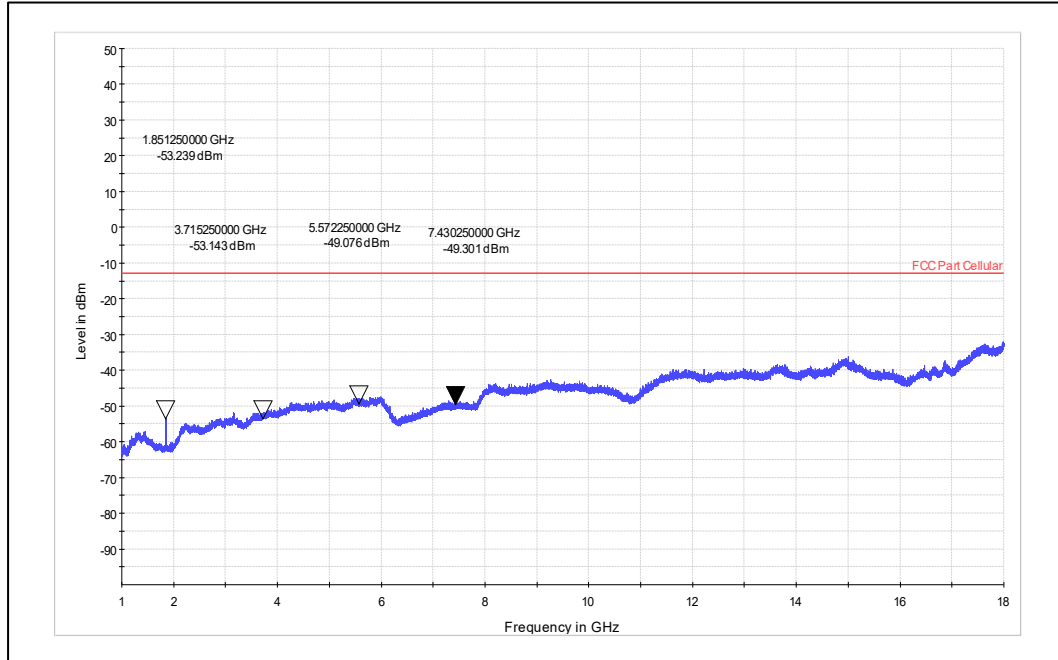

Band-2_Frequency-1880_CB-15_75RB#0_QPSK-1-18GHz_Vertical

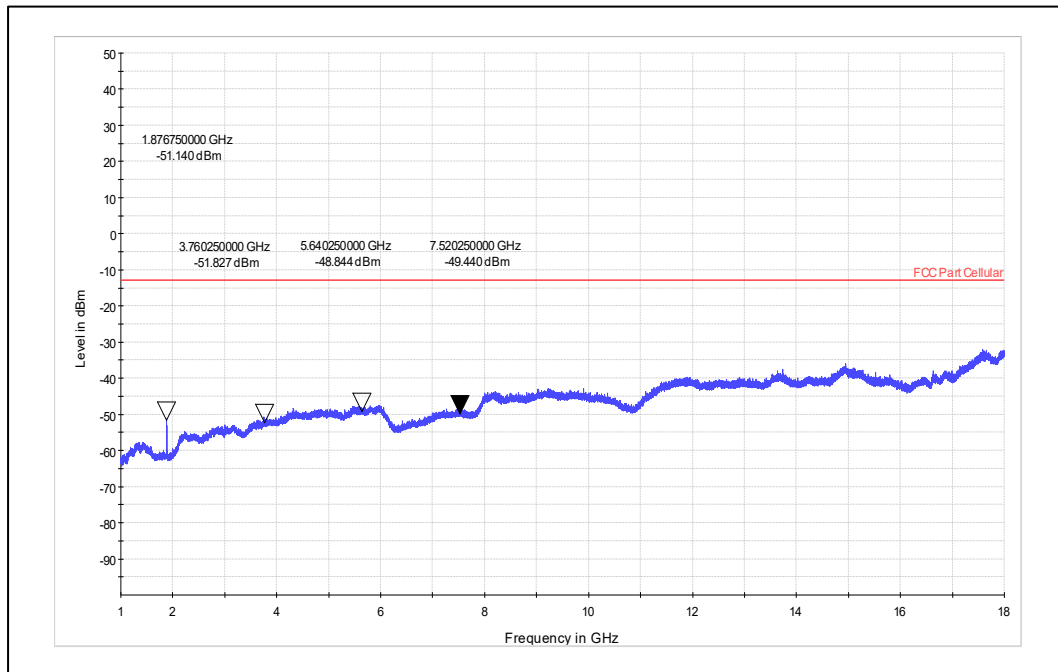

Band-2_Frequency-1880_CB-15_75RB#0_QPSK-1-18GHz_Horizontal

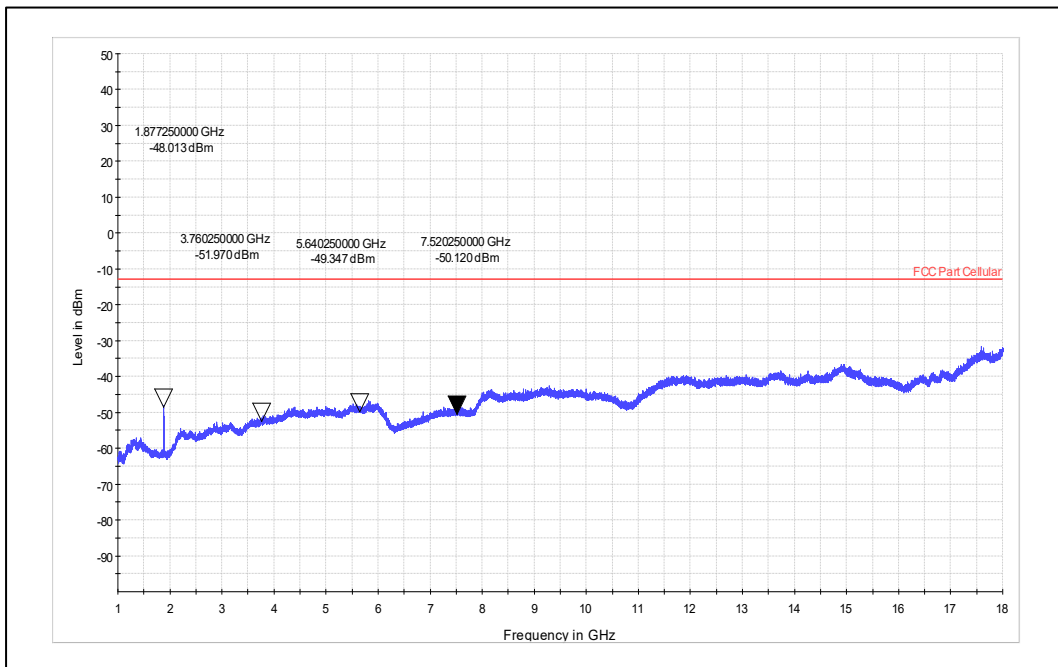

Prüfbericht - Nr.:


Test Report No.:

IN26SIHY 001


Seite 76 von 86

Page 76 of 86


Band-2_Frequency-1902.5_CB-15_75RB#0_QPSK-1-18GHz_Vertical

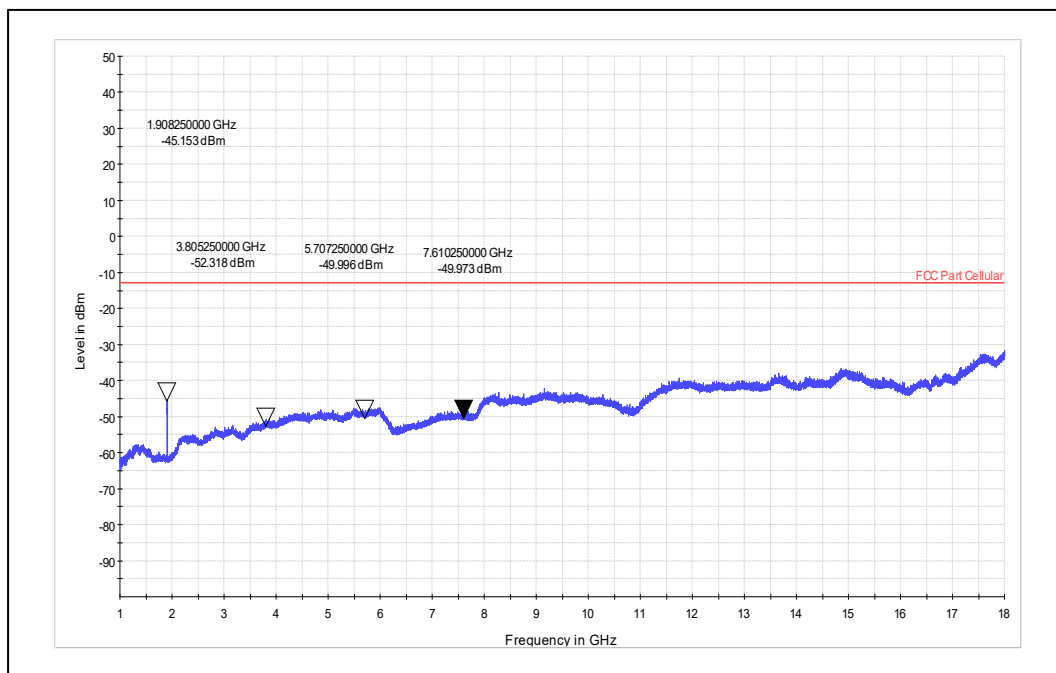


Band-2_Frequency-1902.5_CB-15_75RB#0_QPSK-1-18GHz_Horizontal

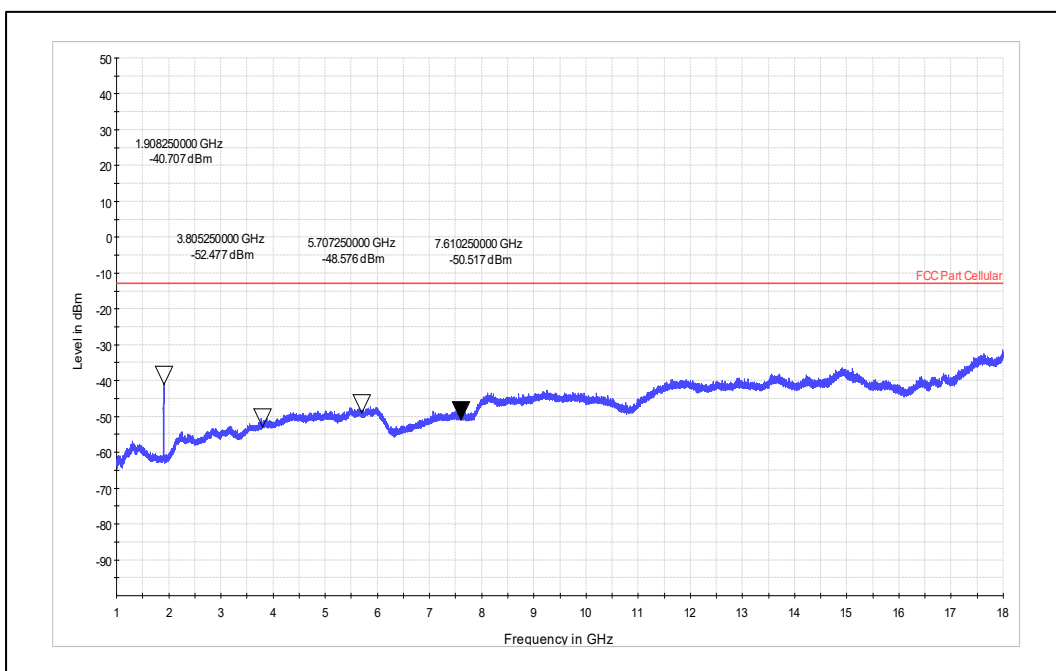

Band-2_Frequency-1860_CB-20_100RB#0_QPSK-1-18GHz_Vertical

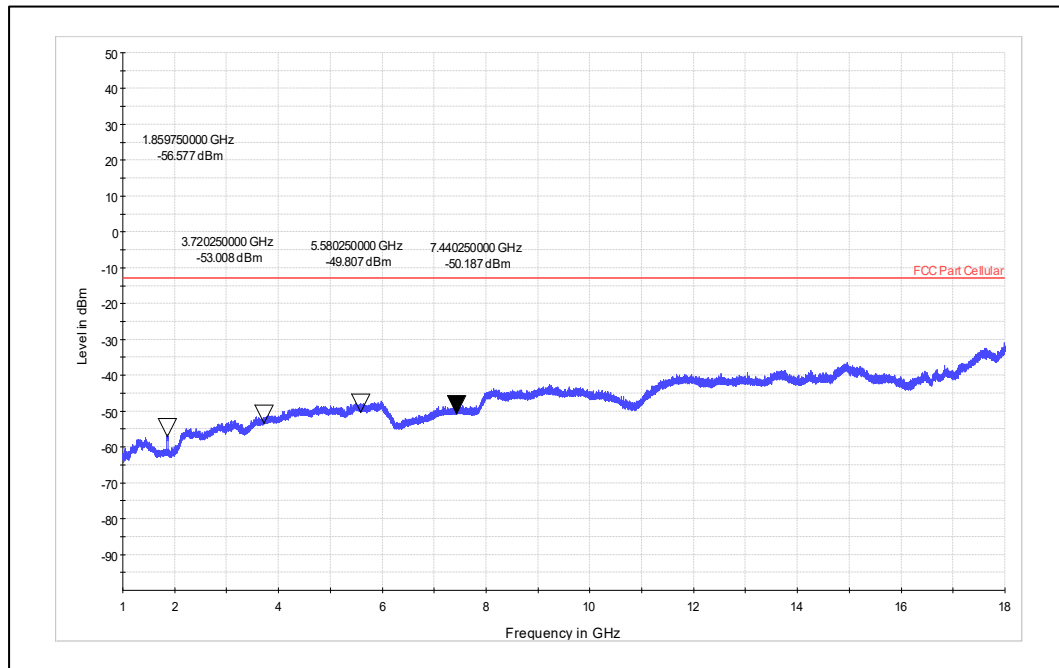

Band-2_Frequency-1860_CB-20_100RB#0_QPSK-1-18GHz_Horizontal

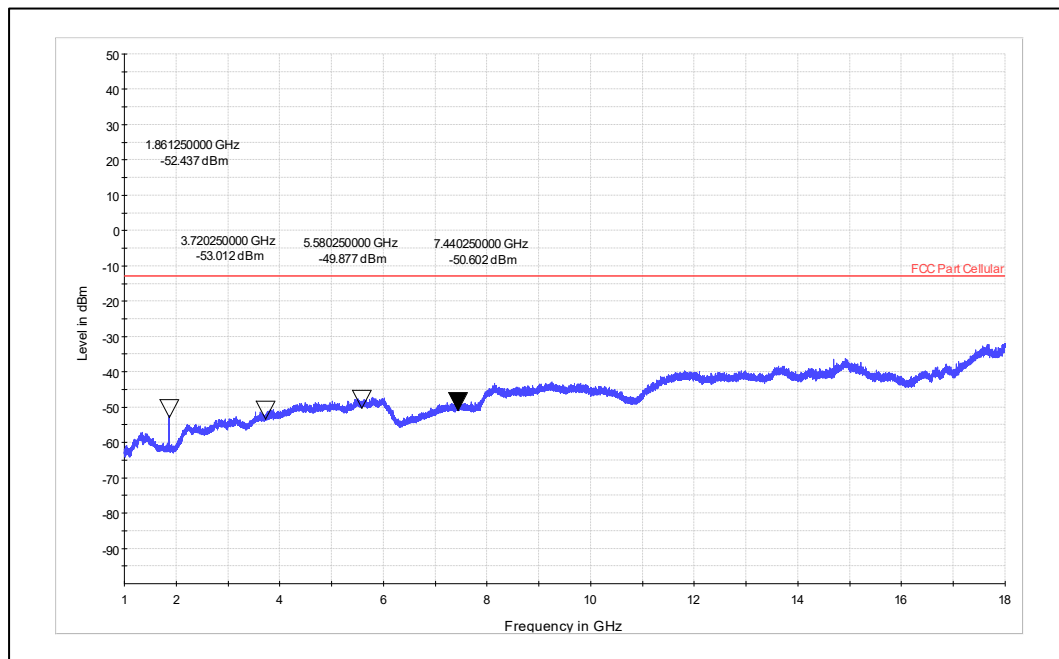

Prüfbericht - Nr.:


Test Report No.:

IN26SIHY 001


Seite 78 von 86

Page 78 of 86


Band-2_Frequency-1880_CB-20_100RB#0_QPSK-1-18GHz_Vertical

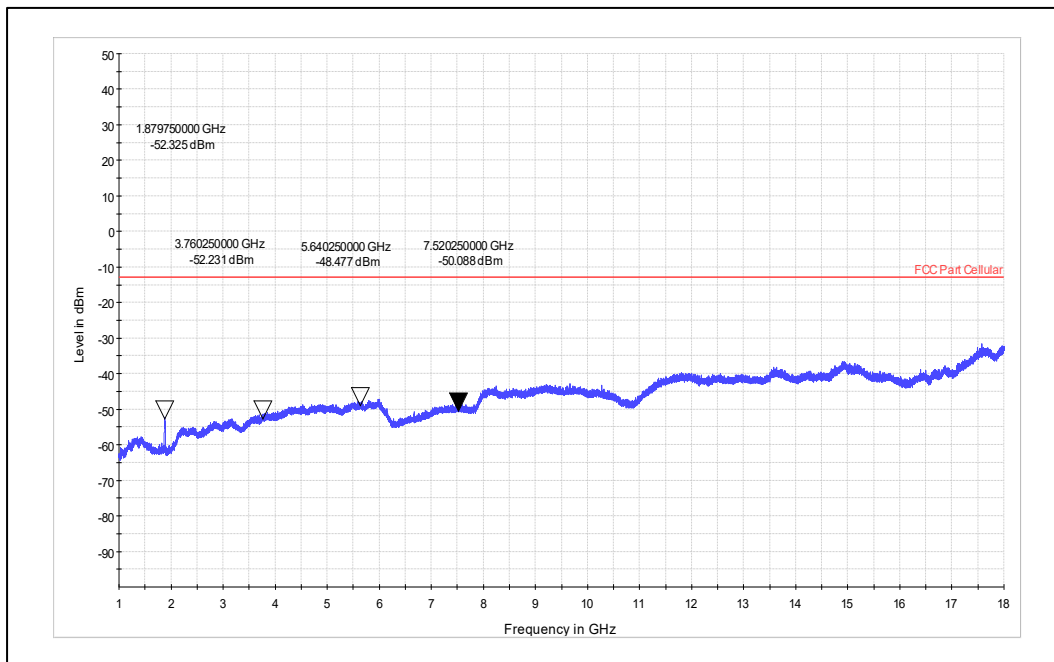


Band-2_Frequency-1880_CB-20_100RB#0_QPSK-1-18GHz_Horizontal

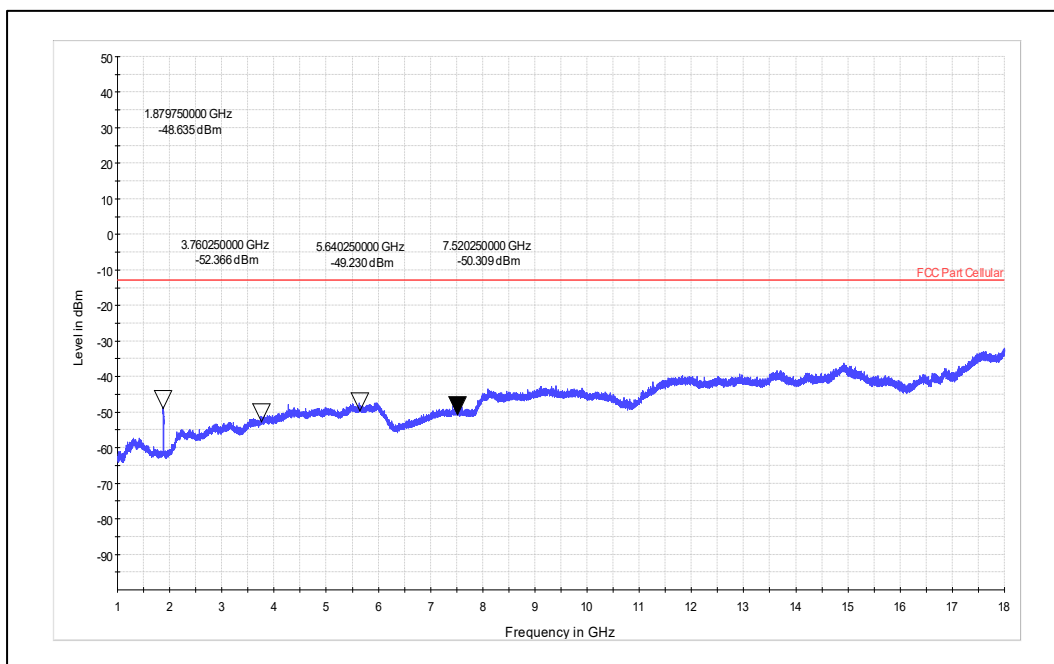

Band-2_Frequency-1900_CB-20_100RB#0_QPSK-1-18GHz_Vertical

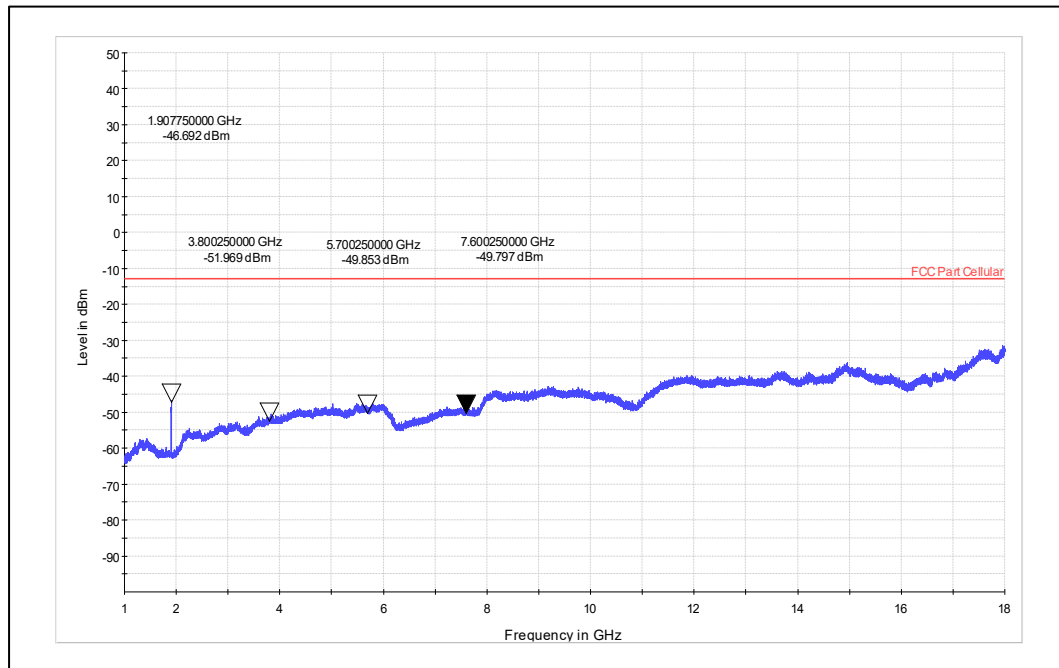

Band-2_Frequency-1900_CB-20_100RB#0_QPSK-1-18GHz_Horizontal

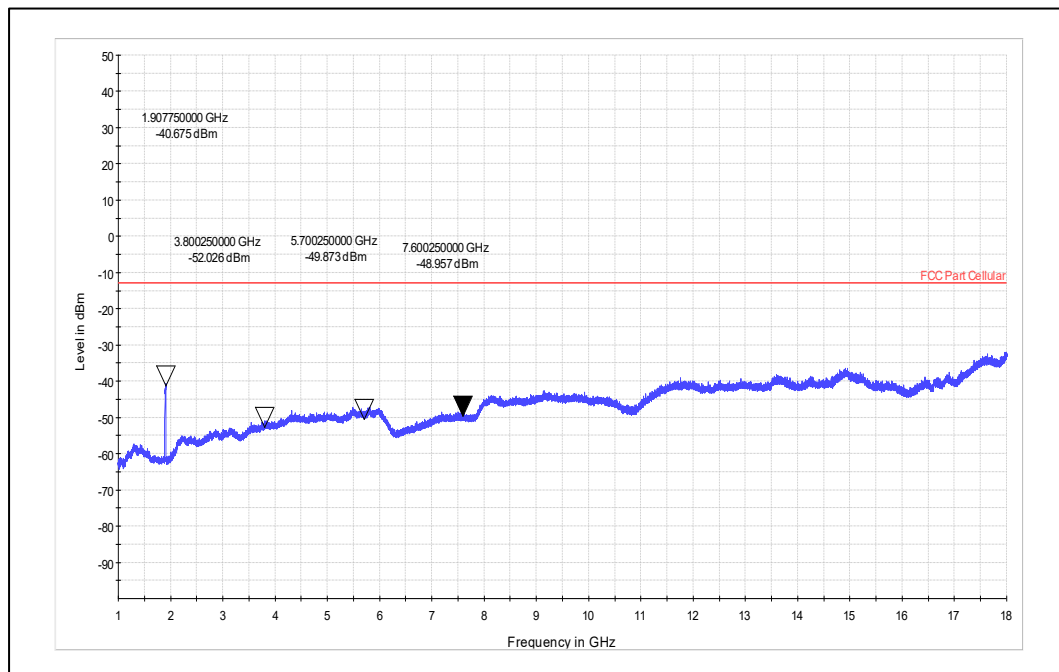

Prüfbericht - Nr.:

Test Report No.:

IN26SIHY 001

Seite 80 von 86

Page 80 of 86

Simultaneous Operations:


Above 1GHz Test results for Internal Antenna:

Combination of Wi-Fi 2.4GHz and LTE (Band-7):


Frequency Bands	Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Emission (dBm)	Limit (dBm)	Margin (dB)
Wi-Fi 2.4 GHz 802.11b 1 Mbps	2412	Vertical	4824	-46.37	-13.00	-33.37
			7236	-50.46	-13.00	-37.46
		Horizontal	4824	-45.65	-13.00	-32.65
			7236	-50.89	-13.00	-37.89
LTE Band-7	2535	Vertical	5070	-45.68	-13.00	-32.68
			7605	-50.79	-13.00	-37.79
		Horizontal	5070	-50.14	-13.00	-37.14
			7605	-49.86	-13.00	-36.86

Test Plots:


WiFi-2.4GHz_Ch-2412MHz_Band 7_Channel-2535MHz-QPSK-CB10MHz_Vertical Polarization

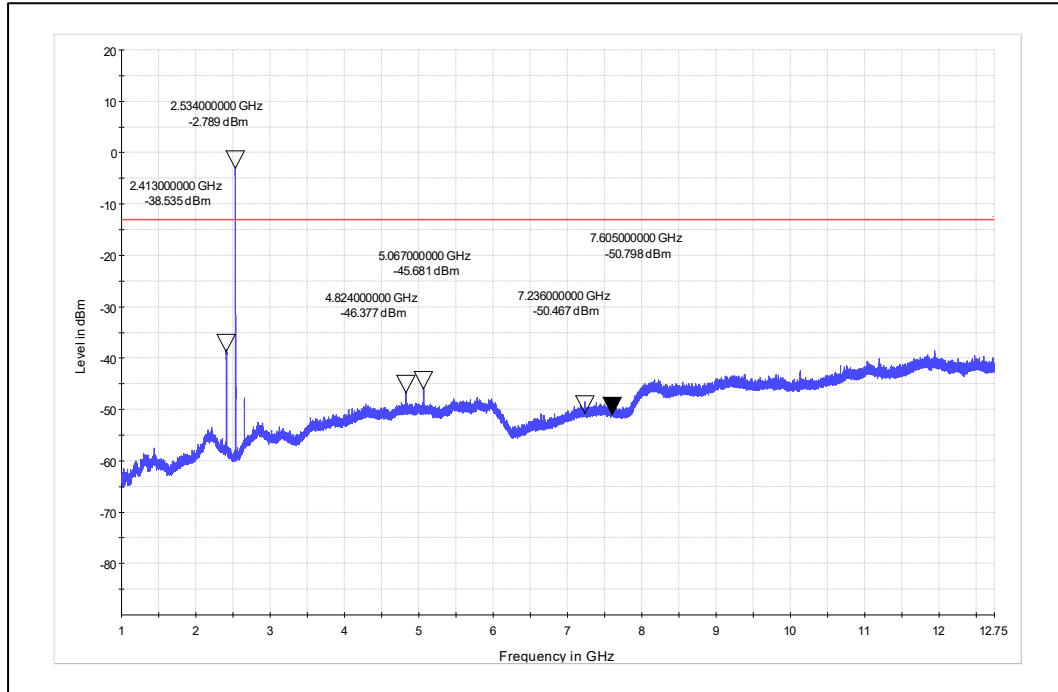


WiFi-2.4GHz_Ch-2412MHz_Band 7_Channel-2535MHz-QPSK-CB10MHz_Horizontal Polarization

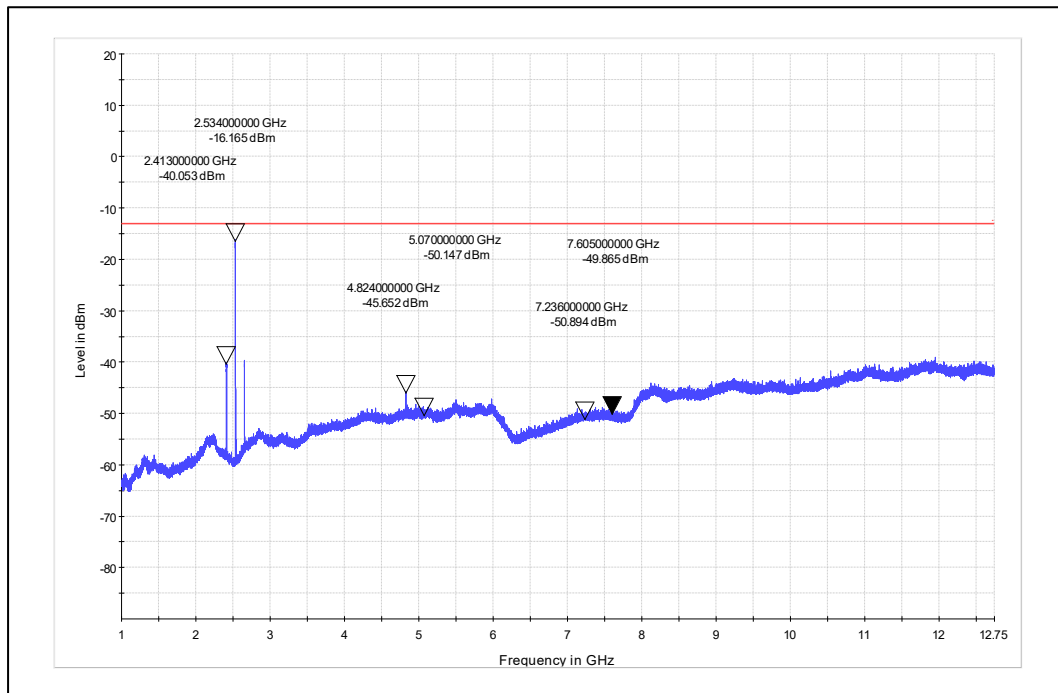

WiFi-2.4GHz_Ch-2412MHz_GSM 900_EGPRS_Frequency-902.4MHz_Vertical Polarization

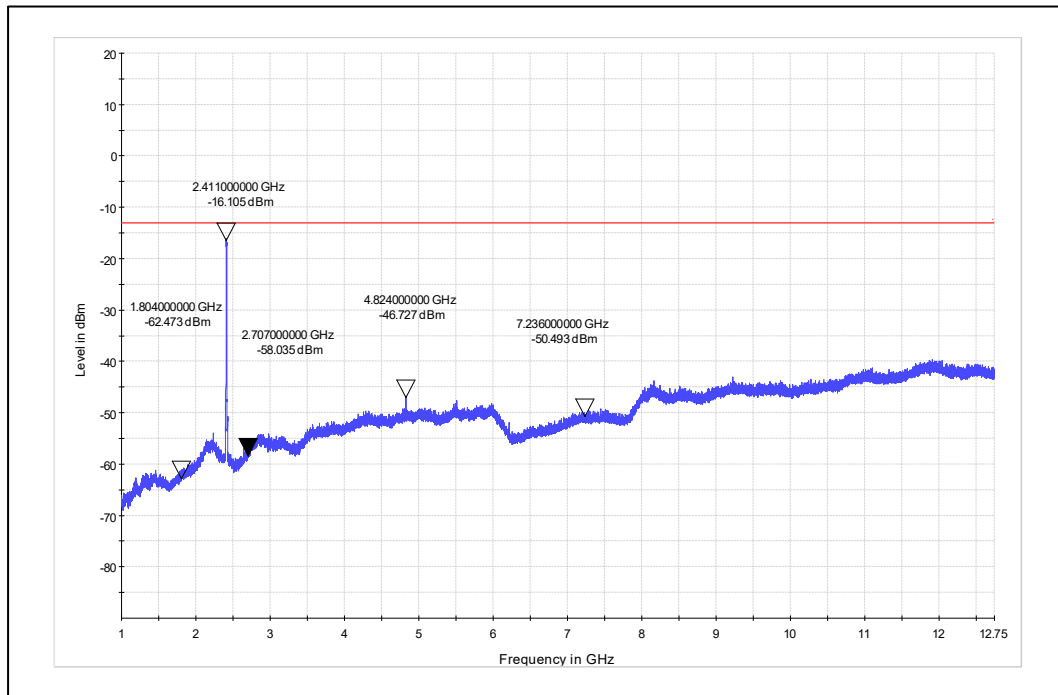

WiFi-2.4GHz_Ch-2412MHz_GSM 900_EGPRS_Frequency-902.4MHz_Horizontal Polarization

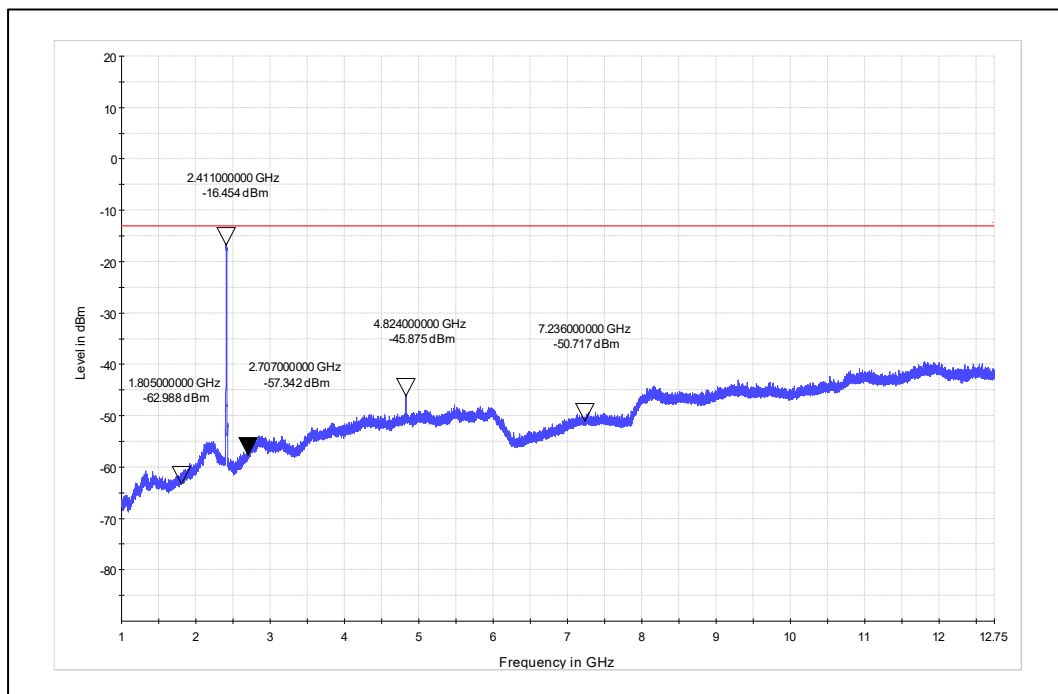

Prüfbericht - Nr.:
Test Report No.:

IN26SIHY 001

Seite 83 von 86
Page 83 of 86

Above 1GHz Test results for External Antenna:

Combination of Wi-Fi 2.4GHz and LTE (Band-7):


Frequency Bands	Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Emission (dBm)	Limit (dBm)	Margin (dB)
Wi-Fi 2.4 GHz 802.11b 1 Mbps	2412	Vertical	4824	-47.02	-13.00	-34.02
			7236	-50.34	-13.00	-37.34
		Horizontal	4824	-46.91	-13.00	-33.91
			7236	-50.68	-13.00	-37.68
LTE Band-7	2535	Vertical	5070	-46.99	-13.00	-33.99
			7605	-48.56	-13.00	-35.56
		Horizontal	5070	-50.90	-13.00	-37.90
			7605	-51.05	-13.00	-38.05

Combination of Wi-Fi 2.4GHz and GSM 900:


Frequency Bands	Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Emission (dBm)	Limit (dBm)	Margin (dB)
Wi-Fi 2.4 GHz 802.11b 1 Mbps	2412	Vertical	4824	-45.19	-13.00	-32.19
			7236	-50.99	-13.00	-37.99
		Horizontal	4824	-46.15	-13.00	-33.15
			7236	-51.09	-13.00	-38.09
GSM 900 EGPRS	902.4	Vertical	1804.8	-62.81	-13.00	-49.81
			2707.2	-58.41	-13.00	-45.41
		Horizontal	1804.8	-62.87	-13.00	-49.87
			2707.2	-58.01	-13.00	-45.01

Test Plots:


WiFi-2.4GHz_Ch-2412MHz_Band 7_Channel-2535MHz-QPSK-CB10MHz_Vertical Polarization

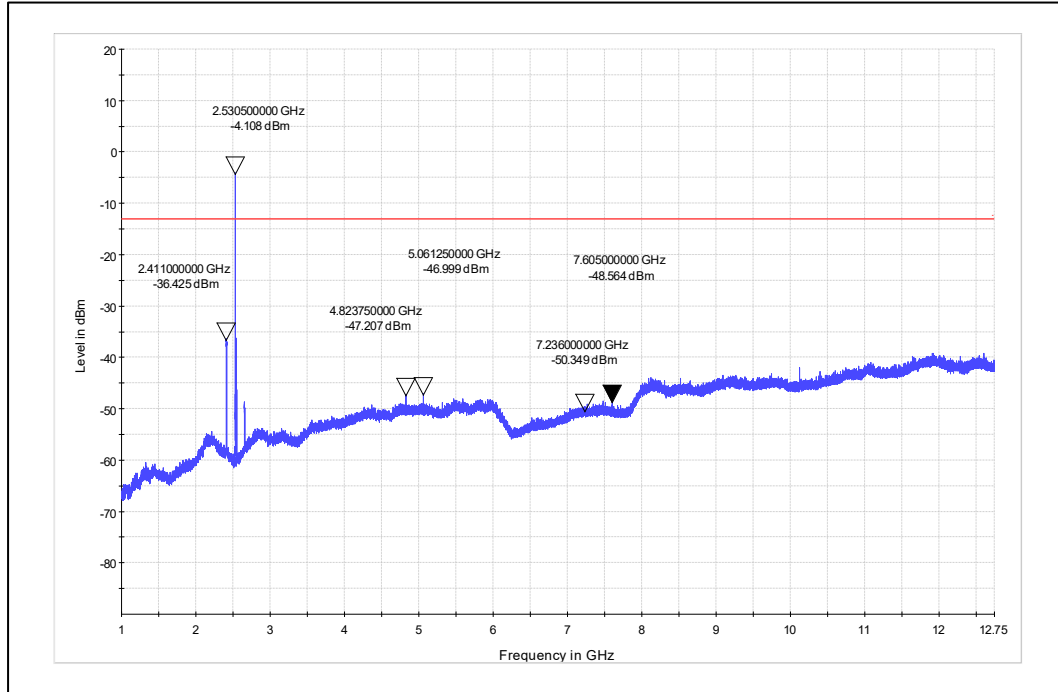


WiFi-2.4GHz_Ch-2412MHz_Band 7_Channel-2535MHz-QPSK-CB10MHz_Horizontal Polarization

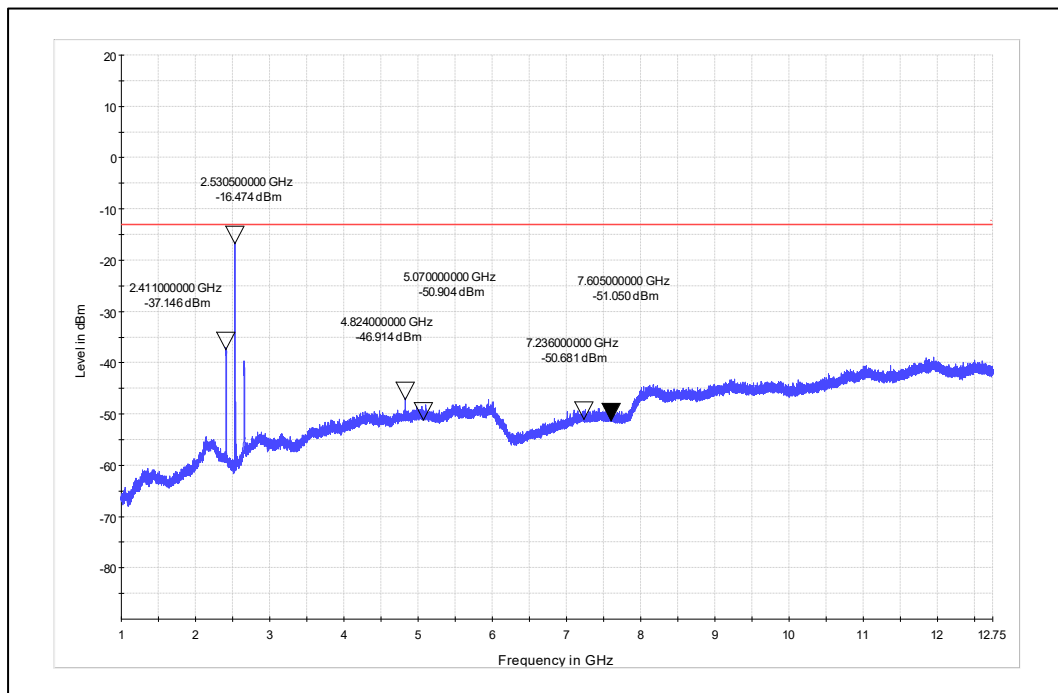

WiFi-2.4GHz_Ch-2412MHz_GSM 900_EGPRS_Frequency-902.4MHz_Vertical Polarization

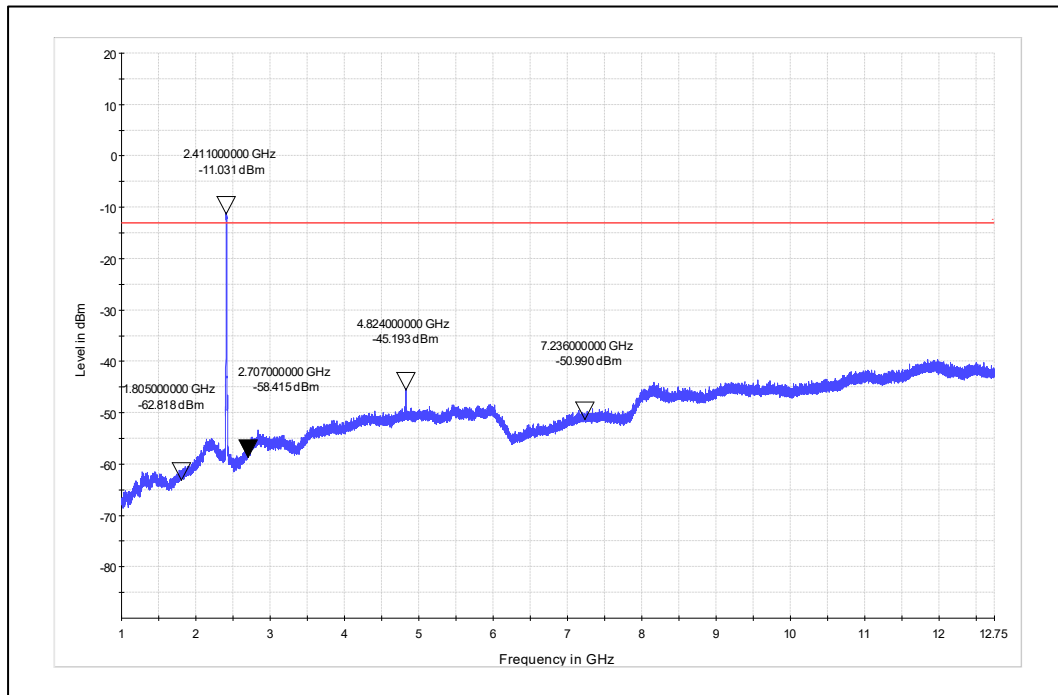

WiFi-2.4GHz_Ch-2412MHz_GSM 900_EGPRS_Frequency-902.4MHz_Horizontal Polarization

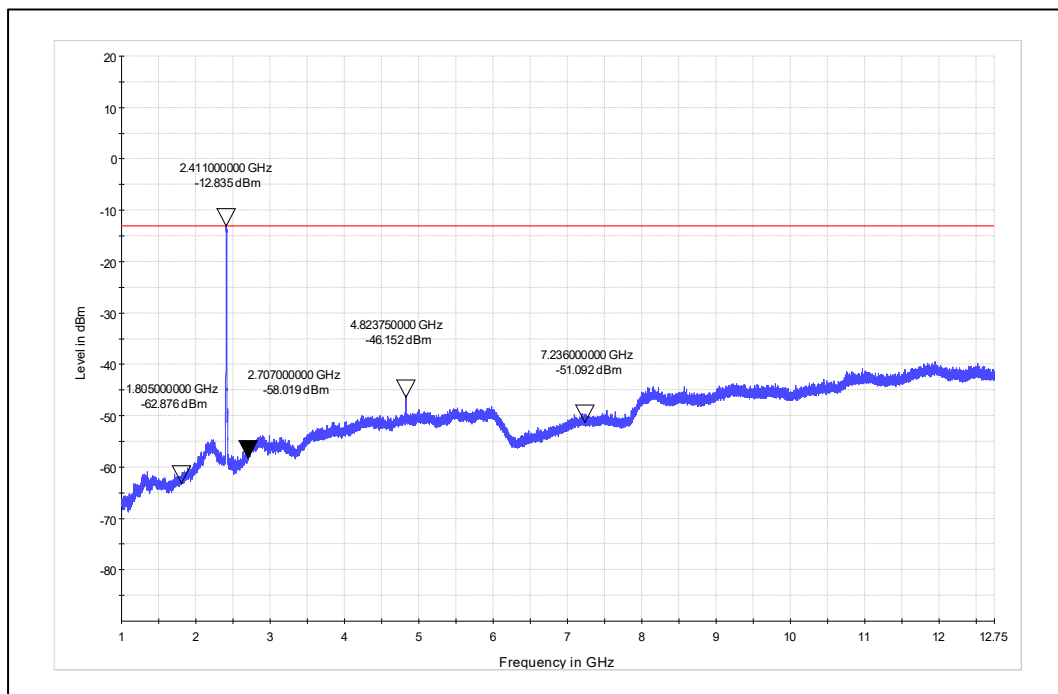

8 LIST OF TABLES

Table 1: List of test and measurement instruments	7
Table 2: Instrument application Software versions	7
Table 3: Ratings and System Details as declared by Supplier*	8
Table 4: (Gen 2E) Internal Antenna Gain	9
Table 5: (MA284 4 in 1 Adhesive Mount) Extrenal Antenna Gain	9
Table 6: Calculated Measurement Uncertainty	9

9 LIST OF FIGURESs

Figure 1: Frequency Range 9 kHz- 30 MHz	13
Figure 2: Frequency Range 30 MHz – 200 MHz	13
Figure 3: Frequency Range 200 MHz - 1GHz	14
Figure 4: Frequency Range above 1 GHz	14