



FCC RADIO TEST REPORT

FCC ID : 2AVVV-A1
Equipment : 2x2x2 Indoor Wi-Fi 7 Access Point
Brand Name : Meter
Model Name : A1
Applicant : Meter Inc.
2700 18th St., San Francisco, California 94110 United States
Manufacturer : Meter Inc.
2700 18th St., San Francisco, California 94110 United States
Standard : 47 CFR FCC Part 15.407

The product was received on Mar. 24, 2026, and testing was started from Apr. 16, 2026 and completed on May 05, 2026. We, SPORTON INTERNATIONAL INC. Hsinhua Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Hsinhua Laboratory, the test report shall not be reproduced except in full.


Approved by: Jackson Tsai

SPORTON INTERNATIONAL INC. Hsinhua Laboratory

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	9
1.3 Testing Location Information	9
1.4 Measurement Uncertainty	9
2 Test Configuration of EUT.....	10
2.1 The Worst Case Measurement Configuration	10
2.2 Support Equipment.....	10
2.3 Test Setup Diagram	11
3 Transmitter Test Result	12
3.1 Unwanted Emissions.....	12
4 Test Equipment and Calibration Data	16
Appendix A. Test Results of Unwanted Emissions	
Appendix B. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: HE1-D1-1 Ver2.8
FCC ID: 2AVVV-A1



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.407(b)	Unwanted Emissions	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

None

Reviewed by: Barry Hsiao

Report Producer: Debby Hung



1 General Description

1.1 Information

Scan Radio only has RX function.

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925 ~ 7125	a, ax (HEW20), be (EHT20)	5955 ~ 7115	1 ~ 233 [59]
5925 ~ 7125	ax (HEW40), be (EHT40)	5965 ~ 7085	3 ~ 227 [29]
5925 ~ 7125	ax (HEW80), be (EHT80)	5985 ~ 7025	7 ~ 215 [14]
5925 ~ 7125	ax (HEW160), be (EHT160)	6025 ~ 6985	15 ~ 207 [7]

Band	Mode	BWch	Nant
6.425-6.525GHz	802.11be EHT160	160	2TX

Note:

- ♦ 11a use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80, EHT160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.
- ♦ The channel defined in the IEEE Standard P802.11ax™/D6.1.
- ♦ Evaluated EHT20/EHT40/EHT80/EHT160 mode only due to the similar modulation. The power setting of HEW20/HEW40/HEW80/HEW160 mode are the same or lower than EHT20/EHT40/EHT80/EHT160.

**1.1.2 Antenna Information**

Ant.	Brand Name	Model Name	Antenna Type	Connector	Support	Radio
1	GrandTek	BT	PIFA	I-Pex	BT	BT
2	GrandTek	2G-1	PIFA	I-Pex	2.4G	Radio 1
3	GrandTek	2G-2	PIFA	I-Pex	2.4G	Radio 1
4	GrandTek	5G-1	PIFA	I-Pex	5G	Radio 2
5	GrandTek	5G-2	Dipole	I-Pex	5G	Radio 2
6	GrandTek	6G-1	PIFA	I-Pex	6G	Radio 3
7	GrandTek	6G-2	Dipole	I-Pex	6G	Radio 3
8	GrandTek	TB1	PIFA	I-Pex	RX Only	Scan Radio
9	GrandTek	TB2	PIFA	I-Pex	RX Only	Scan Radio

Ant.	Port	Gain (dBi)			
		2.4G	5G	6G	BT
1	1	-	-	-	4.4
2	1	2.9	-	-	-
3	2	4.7	-	-	-
4	1	-	5.3	-	-
5	2	-	4.9	-	-
6	1	-	-	4.9	-
7	2	-	-	5.3	-
8	1	3.9	6.1	6.4	-
9	2	4.8	5.9	7.0	-

Note 1: The EUT has nine antennas.



For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax/be mode (2TX/2RX) **(Radio 1)**

Ant. 2 (port 1), Ant. 3 (port 2) could transmit/receive simultaneously.

For IEEE 802.11 b/g/n/VHT/ax (2RX) **(Scan Radio)**

Ant. 8 (port 1), Ant. 9 (port 2) could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax/be mode (2TX/2RX) **(Radio 2)**

Ant. 4 (port 1), Ant. 5 (port 2) could transmit/receive simultaneously.

For IEEE 802.11 a/n/ac/ax mode (2RX) **(Scan Radio)**

Ant. 8 (port 1), Ant. 9 (port 2) could transmit/receive simultaneously.

For 6GHz function:

For IEEE 802.11 a/ax/be mode (2TX/2RX) **(Radio 3)**

Ant. 6 (port 1), Ant. 7 (port 2) could transmit/receive simultaneously.

For IEEE 802.11 a/ax mode (2RX) **(Scan Radio)**

Ant. 8 (port 1), Ant. 9 (port 2) could transmit/receive simultaneously.

For BT function:

For IEEE 802.15.1 Bluetooth mode (1TX/1RX)

Ant. 1 (port 1) could transmit/receive.

Note 2: Directional gain information

	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

1.1.3 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FR590410AE,

FR590410-01AN. Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Shielding Case Design Change 2. DC Converter Vendor Change 3. Crystal (XTAL) Vendor Change 4. The circuit of the scan radio has been redesigned. 5. These changes are limited to hardware components only. There is no modification to the software or firmware (FW) as part of this design change.	The worst case of Radiated Unwanted Emissions above 1GHz was evaluated, and the test result of original report was found to be the worst case scenario.

**1.1.4 EUT Information**

Operational Condition			
EUT Power Type	From PoE		
EUT Function	☒	Indoor Access Point	☐ Dual Client
	☐	Indoor Client	☐ Fixed Client
	☐	Subordinate	☐ Standard Client
	☐	Very Low Power	☐ Standard Power Access Point
			☐ Indoor use
			☐ Outdoor use
Beamforming Function	☒	With beamforming	☐ Without beamforming
Resource Unit	☒	Full RU	☐ Partial RU
	☐	MRU (static preamble puncturing)	☐ MRU (dynamic preamble puncturing)
Channel Puncturing	☐	Support	☒ Not support
Type of EUT			
☒	Stand-alone		
☐	Combined (EUT where the radio part is fully integrated within another device)		
	Combined Equipment - Brand Name / Model No.:		...
☐	Plug-in radio (EUT intended for a variety of host systems)		
	Host System - Brand Name / Model No.:		
☐	Other:		

Note: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ KDB 987594 D01 v03r01
- ♦ KDB 987594 D02 v03
- ♦ KDB 662911 D01 v02r01
- ♦ KDB 412172 D01 v01r01
- ♦ KDB 414788 D01 v01r01

1.3 Testing Location Information

Test Lab. : Sporton International Inc. Hsinhua Laboratory				
☐ Hsinhua (TAF: 3785)	ADD: No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)			
	TEL: 886-3-327-3456		FAX: 886-3-327-0973	
Test site Designation No. TW3785 with FCC.				
☒ Wenhua 3rd. (TAF: 3785)	ADD: No. 58, Aly. 75, Ln. 564, Wenhua 3rd Rd., Guishan Dist. Taoyuan City 333, Taiwan (R.O.C.)			
	TEL: 886-3-327-0868			
Test site Designation No. TW0036 with FCC				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
Radiated (R3 6E B6)	03CH25-HY	Rian Chung	20.1~22.8°C / 52~57%	16/Apr/2026
Radiated (R3 6E B8)	03CH24-HY	Billy Wang	20.8~20.9°C / 55~56%	05/May/2026

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Radiated Emission (1 GHz ~ 18 GHz)	4.94 dB	Confidence levels of 95%
Radiated Emission (18 GHz ~ 40 GHz)	4.92 dB	Confidence levels of 95%

2 Test Configuration of EUT


2.1 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests			
Tests Item	Unwanted Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	CTX		
1	PoE Mode		
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT		V	

2.2 Support Equipment

Support Equipment – Radiated					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	RJ45 Cable	Power sync	CAT-6E-03	-	-
2	PoE	PHIHONG	POE29U-1AT(PL)	-	Remote Provided by Customer
3	AC Power Cable	Power Sync	PW-GPC180-3	-	Remote

2.3 Test Setup Diagram

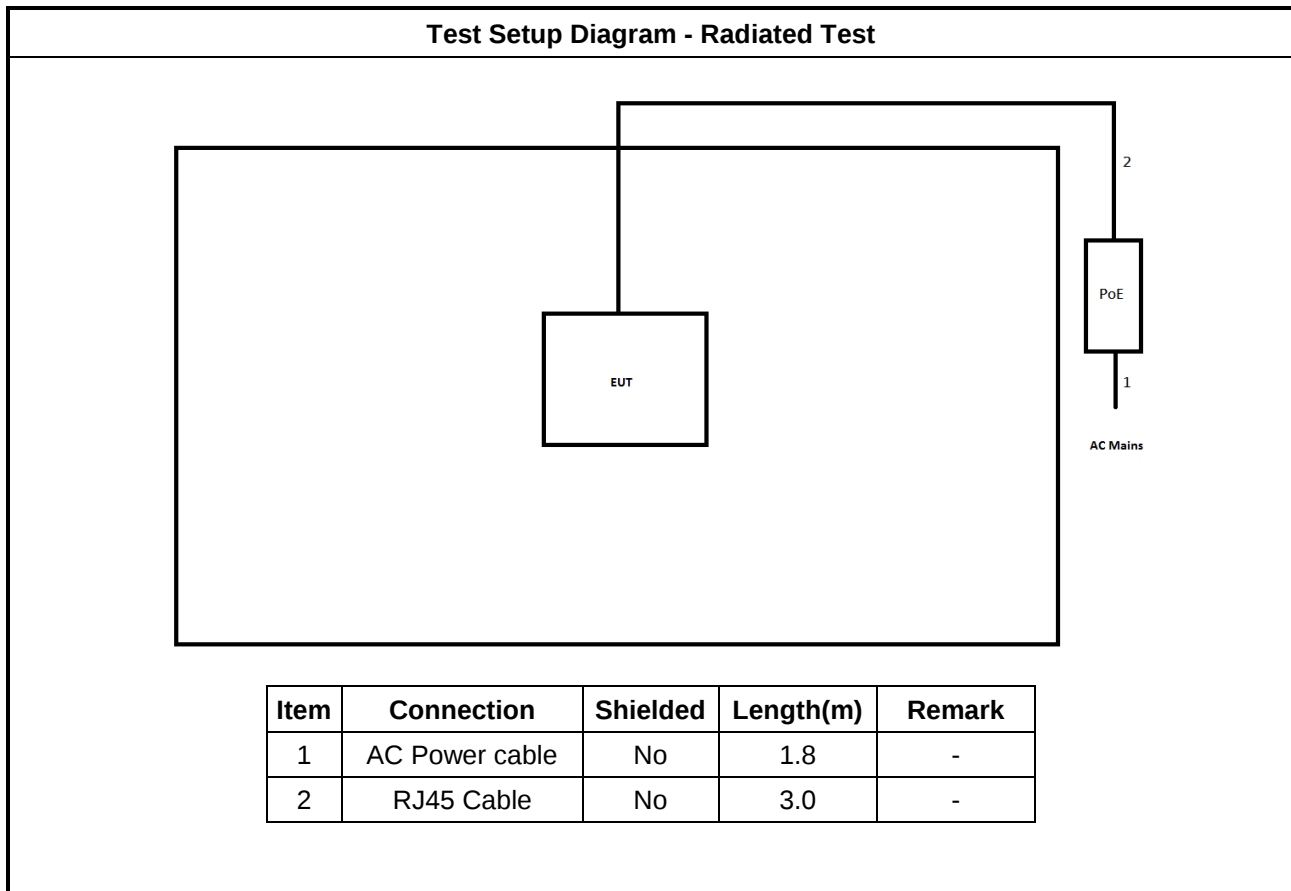



3 Transmitter Test Result

3.1 Unwanted Emissions

3.1.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3


Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = 54dBuV/m at 3m + 9.54dB = 63.54 dBuV/m at 1m.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.945 – 7.125 GHz emission	e.i.r.p. -27 dBm [68.2 dBuV/m@3m] Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = 68.2dBuV/m at 3m + 9.54dB = 77.74 dBuV/m at 1m.
Frequency	Emission MASK Limit
5.945 – 7.125 GHz	Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel

center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB. The channel bandwidth is defined as 26 dB EBW.

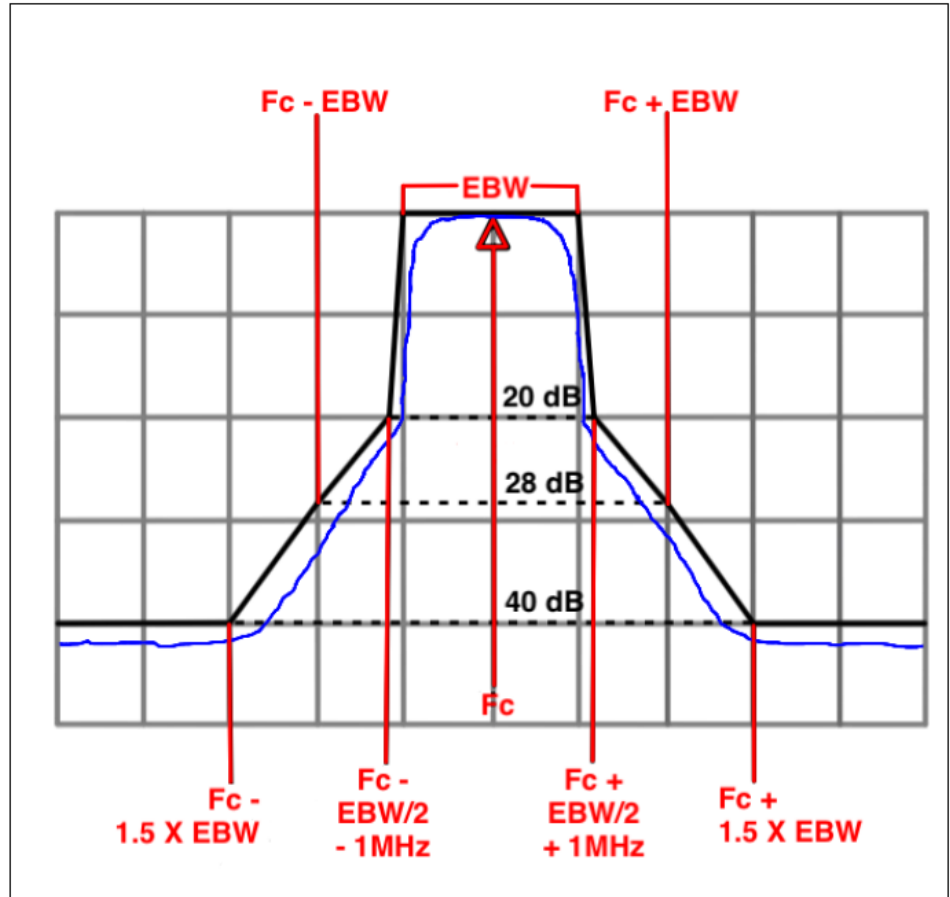



3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands.
	☒ Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
	☐ Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW).
	☒ Refer as ANSI C63.10, clause 11.12.2.5.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.(For restricted band average measurement)
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.5.2.2 measurement procedure peak limit.
	☒ Refer as FCC KDB 789033, clause G)3)d)ii) for Band edge Integration measurements.
For emission MASK shall be measured using following options below:	
	☒ Refer as KDB 987594 D02, J) In-Band Emissions
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	



The measured Level is calculated using:
Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamplifier Factor)

Transmitter Radiated Unwanted Emissions Above 1GHz

The diagram illustrates the test setup for measuring transmitter radiated unwanted emissions above 1GHz. It features a black metal frame with a horizontal arm. On the left, a small white rectangular box labeled 'EUT' (Equipment Under Test) is mounted on a vertical post. The distance from the ground to the top of the EUT is marked as 1.5M. A horizontal double-headed arrow indicates a distance of 3M & 1M between the EUT and the antenna. The antenna is a horn antenna mounted on the horizontal arm. The distance from the ground to the antenna is marked as 1.5M. The antenna is pointed towards the EUT. A dashed line indicates the radiation pattern of the antenna. A blue line connects the antenna to a yellow box labeled 'Spectrum Analyzer' at the bottom right. The distance from the ground to the antenna is also marked as 4M. The distance from the ground to the antenna is also marked as 1M. The distance from the ground to the antenna is also marked as Max 30cm. The distance from the ground to the antenna is also marked as 1.5M. The distance from the ground to the antenna is also marked as 4M.

Refer as Appendix A



4 Test Equipment and Calibration Data

Instrument for Radiated Test (03CH25-HY)

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH25-HY	1GHz~18GHz 3m	07/Aug/2025	06/Aug/2026
Signal Analyzer	ROHDE&SCHWARZ	FSV3044	101410	10Hz~44GHz	19/Nov/2025	18/Nov/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02876	1GHz~18GHz	02/Jul/2025	01/Jul/2026
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB007	1GHz~40GHz	10/Feb/2026	09/Feb/2027
Preamplifier	SGH	PRAMP 118-H	20230515-3	1GHz~18GHz	21/May/2025	20/May/2026
Microwave Preamplifier	EMC INSTRUMENTS	EM18G40G	060604	18GHz ~ 40GHz	26/Apr/2025	25/Apr/2026
SENSE-15407-NII	Sporton	V5.11.27	NA	NA	NA	NA

Instrument for Radiated Test (03CH24-HY)

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH24-HY	1GHz~18GHz 3m	29/Jul/2025	28/Jul/2026
Signal Analyzer	ROHDE&SCHWARZ	FSV3044	101345	10Hz~44GHz	26/Aug/2025	25/Aug/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02744	1GHz~18GHz	07/Aug/2025	06/Aug/2026
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	07/Oct/2025	06/Oct/2026
RF Cable	HUBER+SUHNER	SUOFLEX 104	03CH24-cable-01	9kHz~40GHz	02/Oct/2025	01/Oct/2026
Amplifier	EM	EM01G18G	060870	1GHz ~18GHz	08/Aug/2025	07/Aug/2026
Amplifier	EM	EM18G40GA	060874	18GHz ~40GHz	27/Apr/2026	26/Apr/2027
SENSE-15407-NII	Sporton	V5.11.27	NA	NA	NA	NA



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
6.875-7.125GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	AV	7.126G	65.80	68.20	-2.40	3	Vertical	321	1.64

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	AV	12.94536G	41.81	68.20	-26.39	3	Vertical	173	1.50
6505MHz	Pass	PK	12.95272G	54.84	88.20	-33.36	3	Vertical	173	1.50
6505MHz	Pass	AV	12.93928G	41.74	68.20	-26.46	3	Horizontal	326	1.50
6505MHz	Pass	PK	12.9316G	55.00	88.20	-33.20	3	Horizontal	326	1.50
6985MHz	Pass	AV	6.9825G	98.51	Inf	-Inf	3	Vertical	321	1.64
6985MHz	Pass	AV	7.126G	65.80	68.20	-2.40	3	Vertical	321	1.64
6985MHz	Pass	PK	6.9835G	111.53	Inf	-Inf	3	Vertical	321	1.64
6985MHz	Pass	PK	7.1375G	81.80	88.20	-6.40	3	Vertical	321	1.64
6985MHz	Pass	AV	6.9805G	96.18	Inf	-Inf	3	Horizontal	285	2.00
6985MHz	Pass	AV	7.1255G	63.94	68.20	-4.26	3	Horizontal	285	2.00
6985MHz	Pass	PK	6.982G	109.10	Inf	-Inf	3	Horizontal	285	2.00
6985MHz	Pass	PK	7.13G	79.18	88.20	-9.02	3	Horizontal	285	2.00
6985MHz	Pass	AV	13.96994G	41.16	68.20	-27.04	3	Vertical	5	1.71
6985MHz	Pass	PK	13.95818G	54.92	88.20	-33.28	3	Vertical	5	1.71
6985MHz	Pass	AV	13.96988G	41.13	68.20	-27.07	3	Horizontal	53	2.24
6985MHz	Pass	PK	13.95596G	53.99	88.20	-34.21	3	Horizontal	53	2.24


6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6505MHz Straddle 6.425-6.525GHz_TX

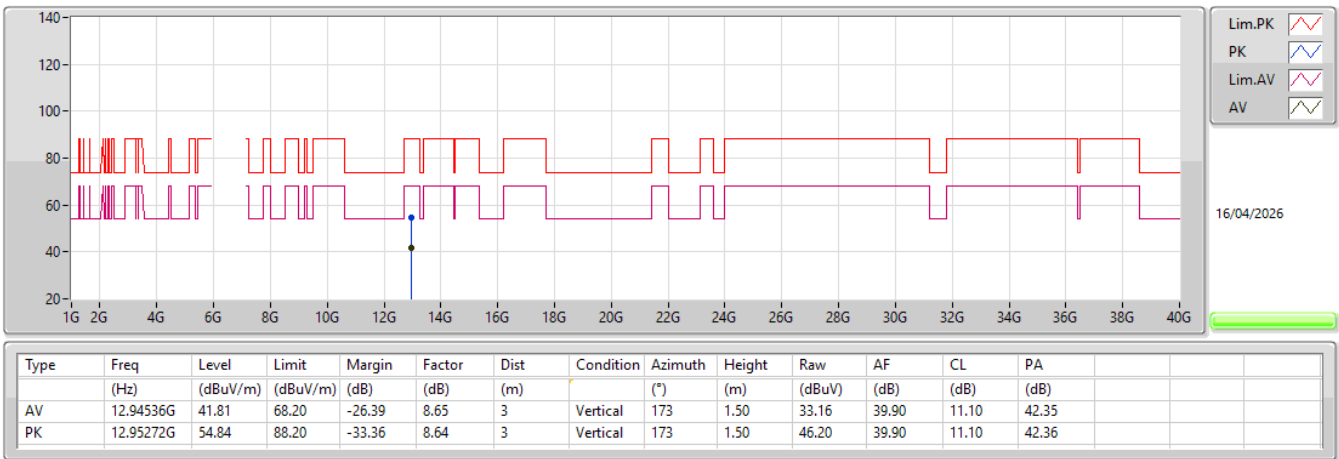


6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6505MHz Straddle 6.425-6.525GHz_TX

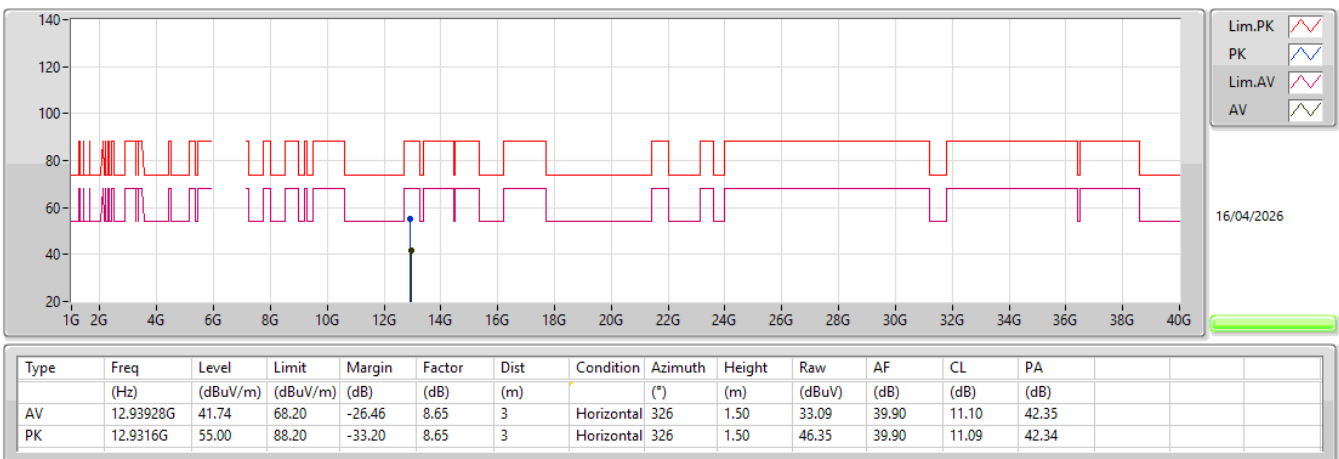


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6985MHz_TX

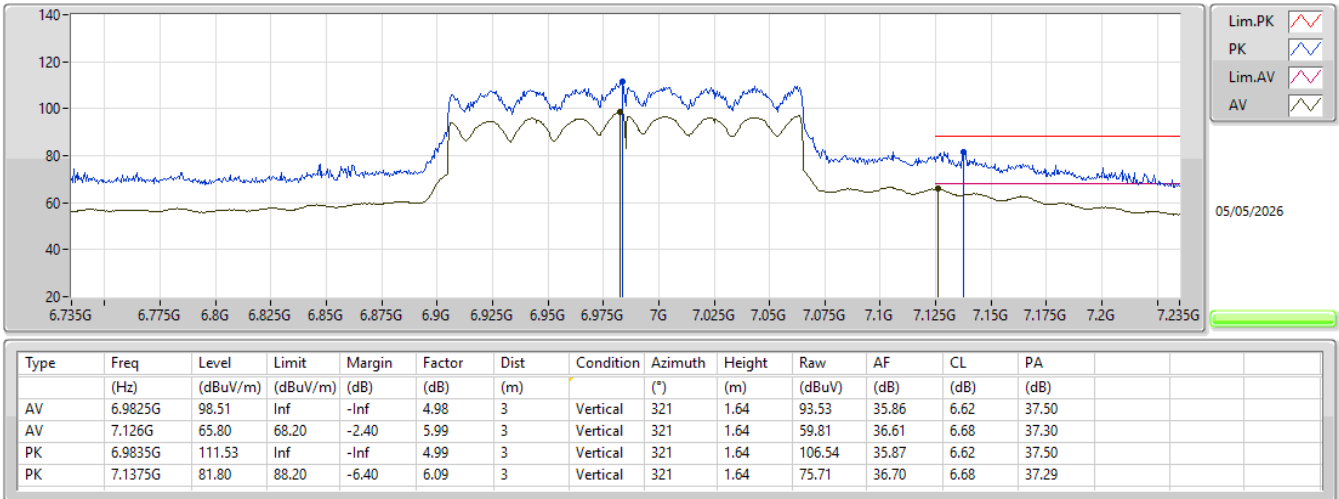


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6985MHz_TX

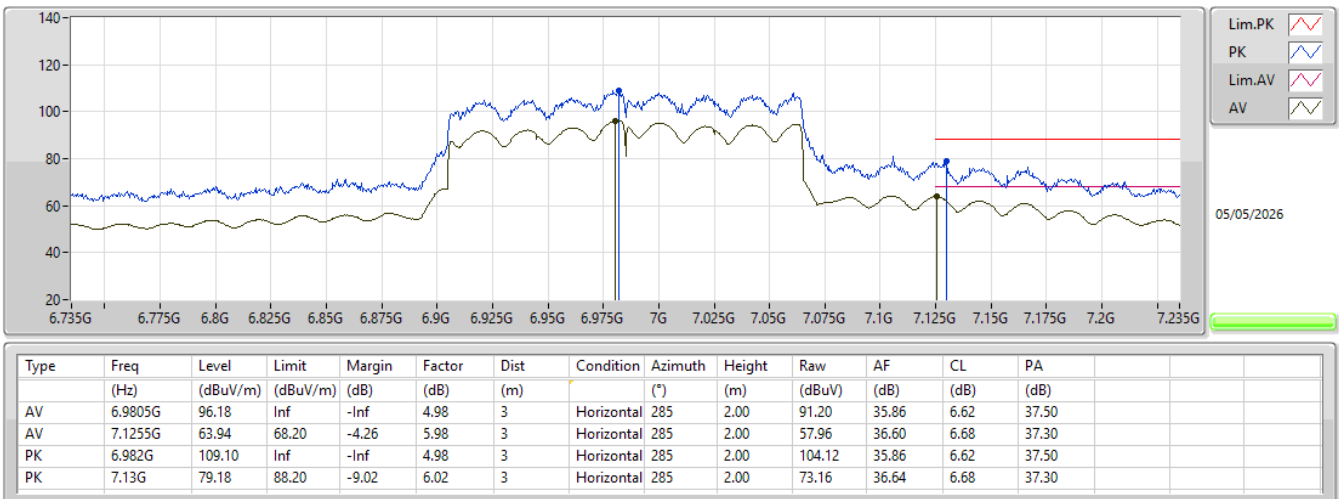

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6985MHz_TX

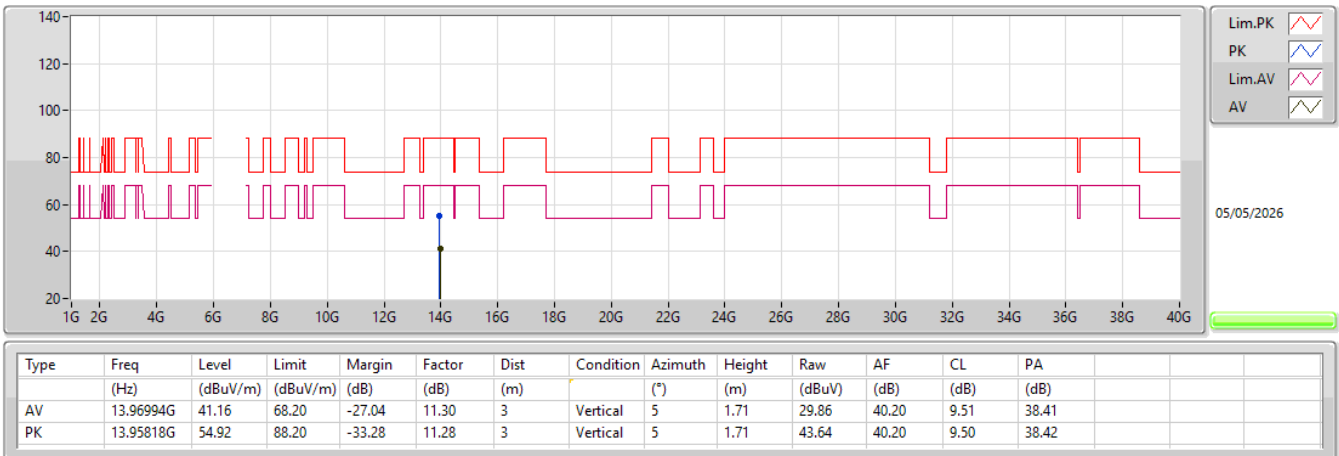

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6985MHz_TX

