



TEST REPORT

Applicant Name : MERCURY Corporation
Address : 90, Gajaeul-ro, Seo-Gu, Incheon, 22830, Republic of Korea
Report Number : 2504Z00193E-RF-00B
FCC ID: 2AVW5MCR-AP19000

Test Standard (s)

FCC PART 15.407

Sample Description

Product Type: AP
Model No.: MCR-AP19000
Trade Mark: MERCURY
Date Received: 2025-11-12
Report Date: 2025-12-15

Test Result:	The EUT complied with the standards above.
--------------	--

Prepared and Checked By:

Amanda Wei

Amanda Wei
EMC Engineer

Approved By:

Bob. Liao

Bob.Liao
EMC Engineer

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. The information marked "#" is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included but no need marked. This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Tel: +86 755-26503290

Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY..... 4

GENERAL INFORMATION..... 5

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 5

 OBJECTIVE 5

 TEST METHODOLOGY 5

 TEST FACILITY 5

SYSTEM TEST CONFIGURATION 6

 DESCRIPTION OF TEST CONFIGURATION..... 6

 EUT EXERCISE SOFTWARE[#] 6

 EQUIPMENT MODIFICATIONS..... 6

 SUPPORT EQUIPMENT LIST AND DETAILS 6

 EXTERNAL I/O CABLE..... 6

SUMMARY OF TEST RESULTS 7

TEST EQUIPMENT LIST 8

APPLICABLE STANDARDS..... 9

 DFS REQUIREMENT 9

 DFS MEASUREMENT SYSTEM..... 13

 SYSTEM BLOCK DIAGRAM..... 13

 CONDUCTED METHOD 14

 RADIATED METHOD..... 15

 TEST PROCEDURE 15

TEST RESULTS..... 16

 DESCRIPTION OF EUT 16

 TEST DATA 16

CHANNEL AVAILABILITY CHECK TIME(CAC) 17

 TEST PROCEDURE 17

 TEST DATA..... 17

CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME 18

 TEST PROCEDURE 18

 TEST DATA..... 18

NON-OCCUPANCY PERIOD 19

 TEST PROCEDURE 19

 TEST DATA 19

DETECTION BANDWIDTH..... 20

 TEST PROCEDURE 20

 TEST DATA..... 20

STATISTICAL PERFORMANCE CHECK 21

 TEST PROCEDURE 21

 TEST DATA..... 21

APPENDIX(TEST RESULT) 22

APPENDIX A: DFS DETECTION THRESHOLDS 23

APPENDIX B: CHANNEL LOADING 32

APPENDIX C: CHANNEL AVAILABILITY CHECK TIME 35

APPENDIX D: CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME 37

APPENDIX E: NON-OCCUPANCY PERIOD 39

APPENDIX F: U-NII DETECTION BANDWIDTH..... 41

APPENDIX G: STATISTICAL PERFORMANCE CHECK..... 43

EXHIBIT A-EUT PHOTOGRAPHS 98

EXHIBIT B-TEST SETUP PHOTOGRAPHS 99

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
Rev.00	2504Z00193E-RF-00B	Original Report	2025-12-15

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product Name	AP
Tested Model	MCR-AP19000
Frequency Range	5G Wi-Fi: 5250-5350MHz; 5470-5725MHz
Mode	802.11a/n ht20/n ht40/ac vht20/ac vht40/ac vht80/ac vht160/ ax he20/ax he40/ax he80/ ax he160/be eht20/be eht40/ be eht80/be eht160
Maximum Antenna gain [#]	4.98 dBi
Voltage Range [#]	DC 12V from Adapter
Sample Serial Number	For RF Conducted Test: 3CUK-3 (Assigned by ATC, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information [#]	Model: KA4801A-1204000US Input:100-240V~50/60Hz 1.2A Max Output: 12V $\overline{\text{---}}$ 4000mA
Note: The device is belong an indoor access point type.	

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts E of the Federal Communications Commission's rules.

The objective is to determine compliance with FCC Part 15, Subpart E, section 15.407 Dynamic Frequency Selection (DFS) for devices operating in the bands 5250-5350 MHz, 5470-5725 MHz.

Test Methodology

FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02.

Unless otherwise stated there are no any additions to, deviations, or exclusions from the method.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Accredited by American Association for Laboratory Accreditation (A2LA).The Certificate Number is 4297.01.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

Note: Ant 1 was used for tested.

EUT Exercise Software[#]

Exercise Software:	Iperf
WLAN traffic is generated by software " Iperf ", software is used by IP and Frame based systems for loading the test channel during the In-service compliance testing of the U-NII device. Data packet streamed from the Access Point to the Client using the software "Iperf".	

Note: The information in the above table is provided by the applicant.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
SAMSUNG	Laptop	NT501R5L-L12/C	0LL191AH400062J
DEPLOY (PVT) LIMITED	Mobile Phone	Neo 5 Plus	E6547LV23021700148

External I/O Cable

Cable Description	Shielding Type	Length (m)	From Port	To
RF cable	YES	0.3	Mobile Phone	Open Switch and Control Unit
RF cable	YES	1.6	EUT	Open Switch and Control Unit
RJ45 cable	NO	1.0	EUT	Laptop

SUMMARY OF TEST RESULTS

The following result table represents the list of measurements required under the CFR §47 Part 15.407(h) and KDB: 905462 D02 UNII DFS Compliance Procedures New Rules v02

Items	Description of Test	Result
Detection Bandwidth	UNII Detection Bandwidth	Compliance
Performance Requirements Check	Initial Channel Availability Check Time (CAC)	Compliance
	Radar Burst at the Beginning of the CAC	Compliance
	Radar Burst at the End of the CAC	Compliance
In-Service Monitoring	Channel Move Time	Compliance
	Channel Closing Transmission Time	Compliance
	Non-Occupancy Period	Compliance
Radar Detection	Statistical Performance Check	Compliance

Note 1: EUT is a master with radar detection.
Note 2: Chain 0 was tested.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2025/09/17	2026/09/16
AGILENT	Vector Signal Generator	N5182A	MY50143401	2025/09/17	2026/09/16
Rohde & Schwarz	Open Switch and Control Unit	OSP120+OSP-B157	101244+100866	2025/09/17	2026/09/16
Agilent	10dB Attenuator	8491B	A5825	2025/09/18	2026/09/17
HEWLETT PACKARD	20dB Attenuator	8491A	53857	2025/09/18	2026/09/17
Unknown	RF Coaxial Cable	No.31	RF-01	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.32	RF-02	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.33	RF-03	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.34	RF-04	2025/05/30	2026/05/29
Test Software: Tonscend JS1120-3 Test System V3.3.38					

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

APPLICABLE STANDARDS

DFS Requirement

CFR §47 Part 15.407(h) & FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
<i>Non-Occupancy Period</i>	Yes	Not required	Yes
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Availability Check Time</i>	Yes	Not required	Not required
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>DFS Detection Threshold</i>	Yes	Not required
<i>Channel Closing Transmission Time</i>	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>U-NII Detection Bandwidth and Statistical Performance Check</i>	All BW modes must be tested	Not required
<i>Channel Move Time and Channel Closing Transmission Time</i>	Test using widest BW mode available	Test using the widest BW mode available for the link
<i>All other tests</i>	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

Table 4: DFS Response Requirement Values

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the U- NII 99% transmission power bandwidth. See Note 3.
Note 1: <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel move</i> (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{SEC}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

For example if in Short Pulse Radar Type 1 Test B a PRI of 3066 usec is selected, the number of pulses

would be $\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{3066} \right) \right\} = \text{Roundup} \{17.2\} = 18$.

Table 5a - Pulse Repetition Intervals Values for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

The aggregate is the average of the percentage of successful detections of Short Pulse Radar Types 1-4. For example, the following table indicates how to compute the aggregate of percentage of successful detections.

Radar Type	Number of Trials	Number of Successful Detections	Minimum Percentage of Successful Detection
1	35	29	82.9%
2	30	18	60%
3	30	27	90%
4	50	44	88%
Aggregate $(82.9\% + 60\% + 90\% + 88\%)/4 = 80.2\%$			

Table 6 – Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30


Table 7 – Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30


DFS Measurement System

DFS measurement system consists of two subsystems: (1) The radar signal generating subsystem and (2) the traffic monitoring subsystem.


System Block Diagram

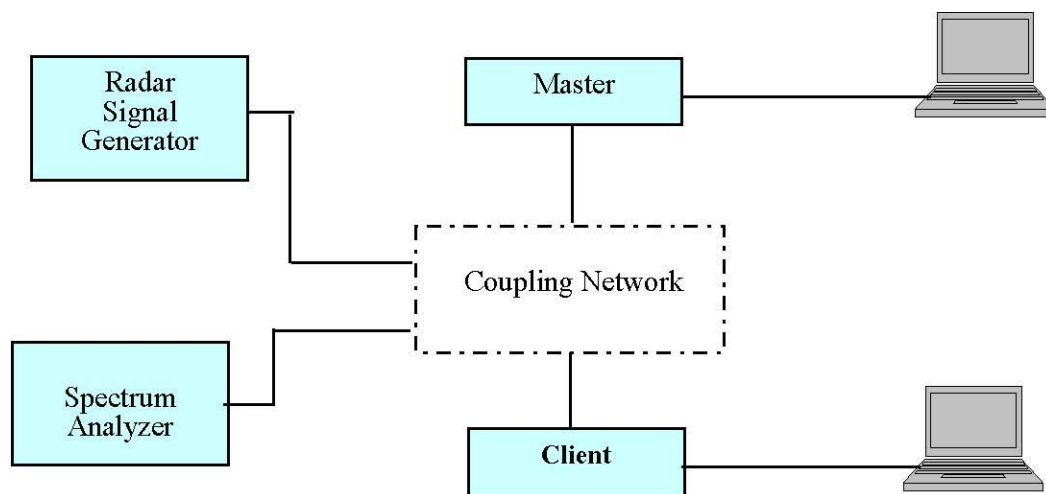


Conducted Method

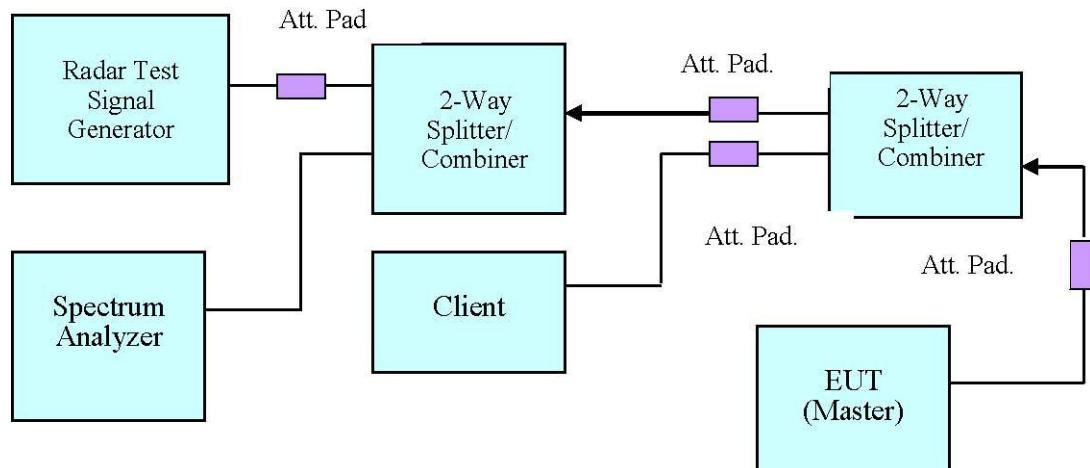

Setup for Master with injection at the Master

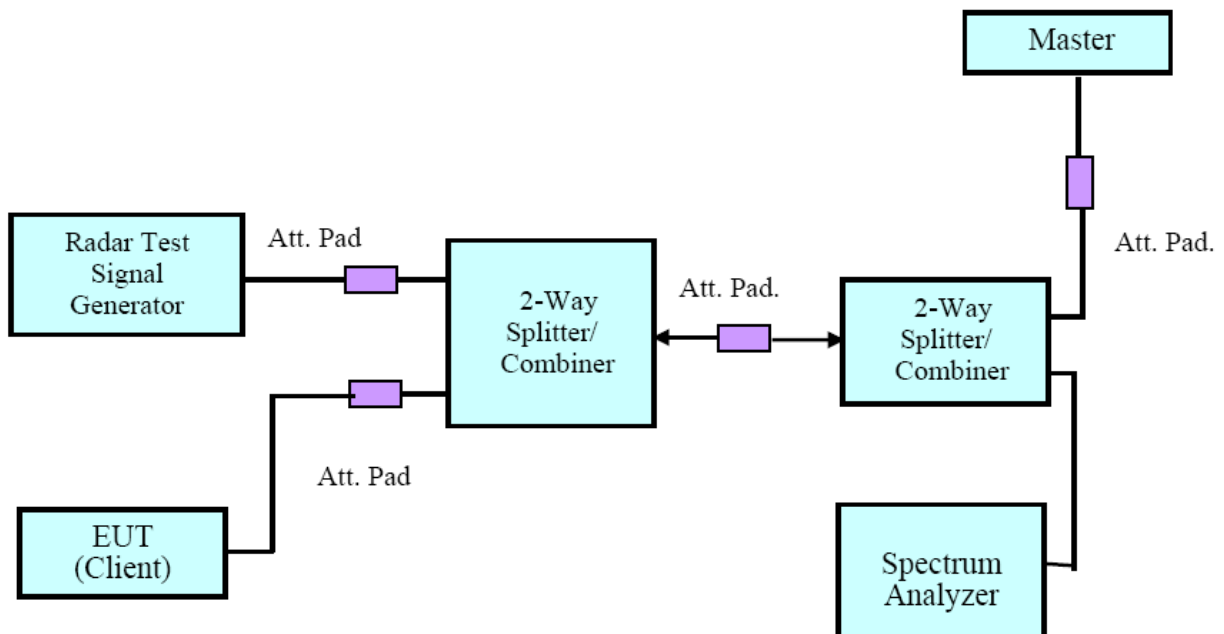


Setup for Client with injection at the Master

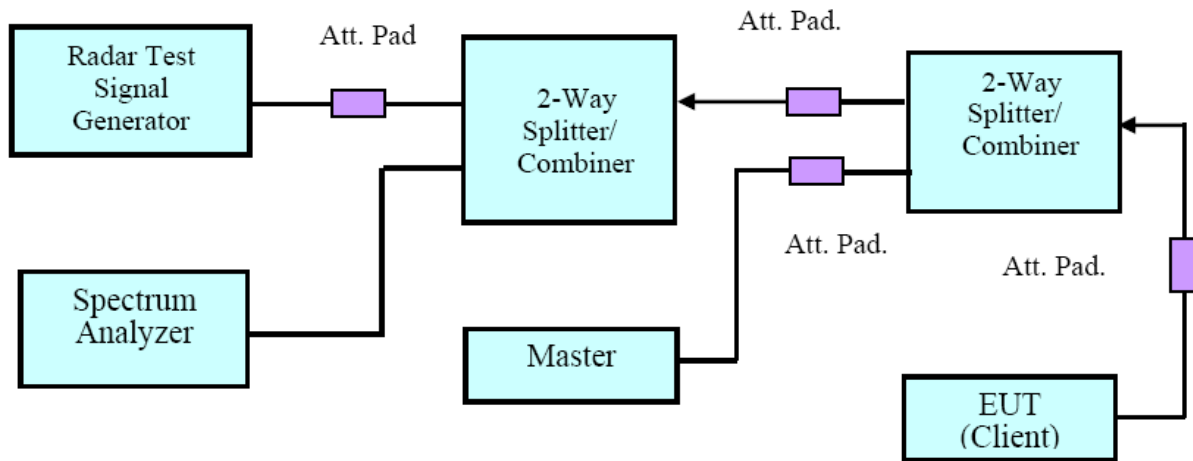

Setup for Client with injection at the Client

Radiated Method

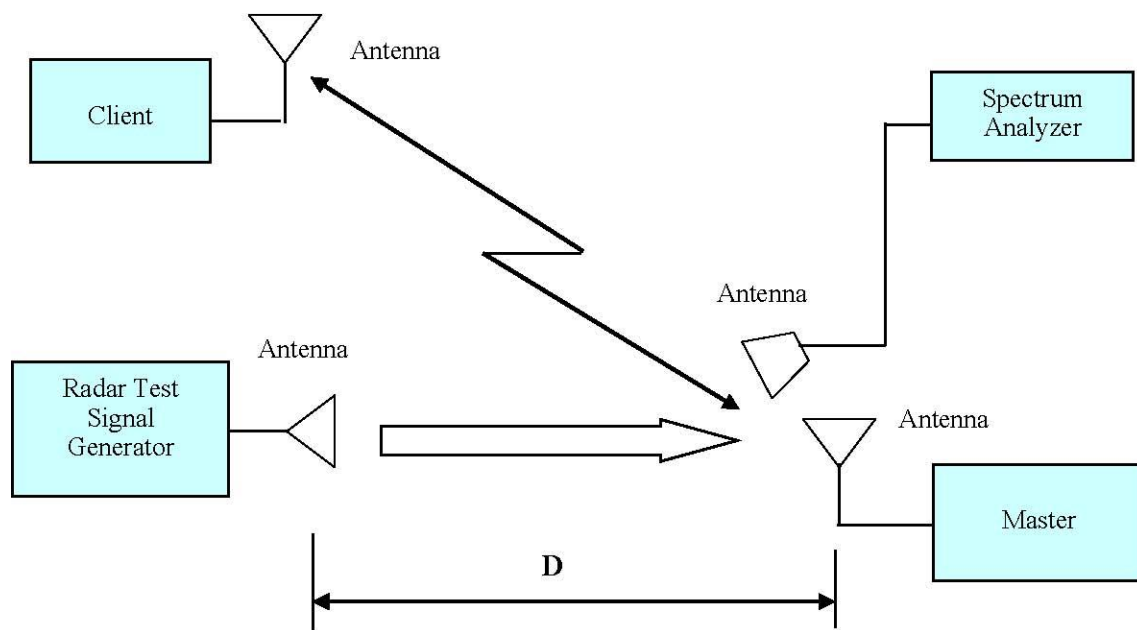

Test Procedure

A spectrum analyzer is used as a monitor verifies that the EUT status including Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the diction and Channel move. It is also used to monitor EUT transmissions during the Channel Availability Check Time.

TEST RESULTS

Description of EUT

The maximum EIRP is more than 200mW. The calibrated radiated DFS detection threshold level is set to -59.02 dBm.

Note: Limit(dBm)=-64+Antenna gain=-64+4.98=-59.02dBm

Test Data

Please refer to the Appendix.

CHANNEL AVAILABILITY CHECK TIME(CAC)

Test Procedure

1. Initial Channel Availability Check Time

The U-NII devices will be powered on and be instructed to operate on the appropriate U-NII Channel that must incorporate DFS functions. At the same time the UUT is powered on, the spectrum analyzer will be set to zero span and the spectrum analyzer's sweep will be started at the same time power is applied to the U-NII device.

The UUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle.

Confirm that the UUT initiates transmission on the channel

2. Radar Burst at the Beginning of the Channel Availability Check Time

A single Burst of one of the Short Pulse Radar Types 0-4 will commence within a 6 second window at the beginning of CAC time. Visual indication or measured results on the UUT of successful detection of the radar Burst will be recorded and reported.

3. Radar Burst at the End of the Channel Availability Check Time

A single Burst of one of the Short Pulse Radar Types 0-4 will commence within a 6 second window at the end of CAC time. Visual indication or measured results on the UUT of successful detection of the radar Burst will be recorded and reported.

Test Data

Please refer to the Appendix.

CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME

Test Procedure

Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. repeat using a long pulse radar type5 waveform.

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time = $N \times \text{Dwell Time}$

N is the number of spectrum analyzer bins showing a device transmission Dwell Time is the dwell time per bin (i.e. $\text{Dwell Time} = S/B$, S is the sweep time and B is the number of bin, i.e. 8192)

Test Data

Please refer to the Appendix.

NON-OCCUPANCY PERIOD

Test Procedure

Measure the EUT for more than 30 minutes following the channel close/move time to verify that the EUT does not resume any transmissions on this channel. Provide one plot to demonstrate no transmission on the channel for the non-occupancy period (30 minutes observation time)

Test Data

Please refer to the Appendix.

DETECTION BANDWIDTH

Test Procedure

Performed with Type 0 radar waveforms

Starting at the center frequency of the UUT operating Channel, increase the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the *U-NII Detection Bandwidth* criterion specified in Table 4. Repeat this measurement in 1MHz steps at frequencies 5 MHz below where the detection rate begins to fall. Record the highest frequency (denote as F_H) at which detection is greater than or equal to the *U-NII Detection Bandwidth* criterion. Recording the detection rate at frequencies above F_H is not required to demonstrate compliance.

Starting at the center frequency of the UUT operating Channel, decrease the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the *U-NII Detection Bandwidth* criterion specified in Table 4. Repeat this measurement in 1MHz steps at frequencies 5 MHz above where the detection rate begins to fall. Record the lowest frequency (denote as F_L) at which detection is greater than or equal to the *U-NII Detection Bandwidth* criterion. Recording the detection rate at frequencies below F_L is not required to demonstrate compliance

The *U-NII Detection Bandwidth* is calculated as follows: $U-NII\ Detection\ Bandwidth = F_H - F_L$

The *U-NII Detection Bandwidth* must meet the *U-NII Detection Bandwidth* criterion specified in Table 4. Otherwise, the UUT does not comply with DFS requirements. This is essential to ensure that the UUT is capable of detecting *Radar Waveforms* across the same frequency spectrum that contains the significant energy from the system. In the case that the *U-NII Detection Bandwidth* is greater than or equal to the 99 percent power bandwidth for the measured F_H and F_L , the test can be truncated and the *U-NII Detection Bandwidth* can be reported as the measured F_H and F_L .

Test Data

Please refer to the Appendix.

STATISTICAL PERFORMANCE CHECK

Test Procedure

The steps below define the procedure to determine the minimum percentage of successful detection requirements found in **Tables 5-7** when a radar burst with a level equal to the *DFS Detection Threshold + 1dB* is generated on the *Operating Channel* of the U-NII device (*In-Service Monitoring*).

a) One frequency will be chosen from the *Operating Channels* of the UUT within the 5250-5350 MHz or 5470-5725 MHz bands.

b) In case the UUT is a U-NII device operating as a *Client Device* (with or without Radar Detection), a U-NII device operating as a *Master Device* will be used to allow the UUT (Client device) to *Associate* with the *Master Device*. In case the UUT is a *Master Device*, a U-NII device operating as a *Client Device* will be used and it is assumed that the Client will *Associate* with the UUT (Master). In both cases for conducted tests, the *Radar Waveform* generator will be connected to the *Master Device*. For radiated tests, the emissions of the *Radar Waveform* generator will be directed towards the *Master Device*. If the *Master Device* has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.

c) Stream the channel loading test file from the *Master Device* to the Client Device on the test *Channel* for the entire period of the test.

d) At time T_0 the *Radar Waveform* generator sends the individual waveform for each of the Radar Types 1- 6 in **Tables 5-7**, at levels defined in **Table 3**, on the *Operating Channel*. An additional 1 dB is added to the radar test signal to ensure it is at or above the *DFS Detection Threshold*, accounting for equipment variations/errors.

e) Observe the transmissions of the UUT at the end of the Burst on the *Operating Channel* for duration greater than 10 seconds for Radar Type 0 to ensure detection occurs.

f) Observe the transmissions of the UUT at the end of the Burst on the *Operating Channel* for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs.

g) In case the UUT is a U-NII device operating as a *Client Device* with *In-Service Monitoring*, perform steps a) to f).

Test Data

Please refer to the Appendix.

APPENDIX(TEST RESULT)

Test Information:

Serial No.:	3CUK-3	Test Date:	2025/11/13~2025/11/25
Test Site:	RF	Test Mode:	Traffic
Tester:	Len Lin	Test Result:	PASS

Environmental Conditions:


Temperature: (°C)	25.3-26.2	Relative Humidity: (%)	28-51	ATM Pressure: (kPa)	101.0-101.9
----------------------	-----------	------------------------------	-------	------------------------	-------------


Appendix A: DFS Detection Thresholds


Test Result


Test Mode	Radar Frequency (MHz)	Radar Type	Result[dBm]	Limit[dBm]	Verdict
20M	5320	Type0	-60.02	-59.02	PASS
		Type1	-59.62	-59.02	PASS
		Type2	-59.55	-59.02	PASS
		Type3	-59.40	-59.02	PASS
		Type4	-59.46	-59.02	PASS
		Type5	-59.86	-59.02	PASS
		Type6	-59.26	-59.02	PASS
		Type6-1	-59.25	-59.02	PASS
40M	5310	Type0	-60.20	-59.02	PASS
		Type1	-60.10	-59.02	PASS
		Type2	-59.77	-59.02	PASS
		Type3	-59.97	-59.02	PASS
		Type4	-59.56	-59.02	PASS
		Type5	-60.33	-59.02	PASS
		Type6	-59.74	-59.02	PASS
		Type6-1	-59.82	-59.02	PASS
80M/160M	5290	Type0	-60.13	-59.02	PASS
		Type1	-59.91	-59.02	PASS
		Type2	-59.77	-59.02	PASS
		Type3	-59.74	-59.02	PASS
		Type4	-59.95	-59.02	PASS
		Type5	-60.16	-59.02	PASS
		Type6	-59.56	-59.02	PASS
		Type6-1	-59.69	-59.02	PASS


Test Graphs

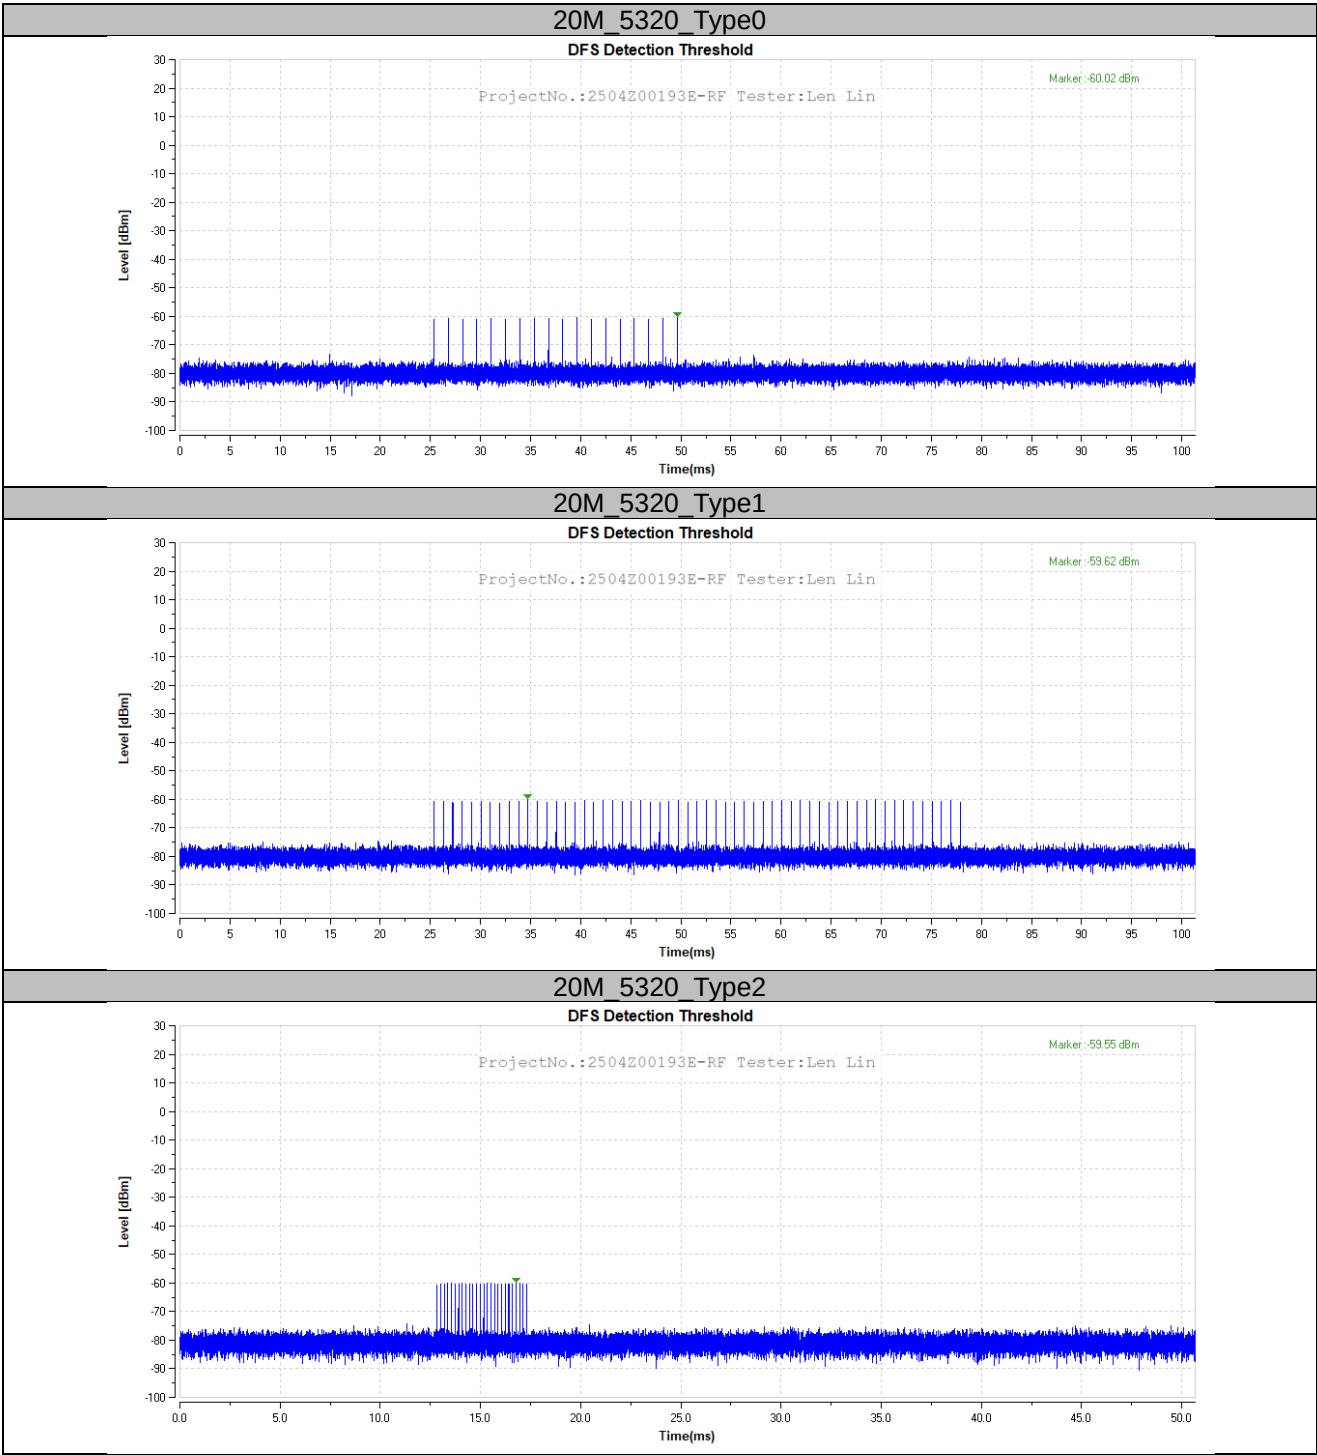


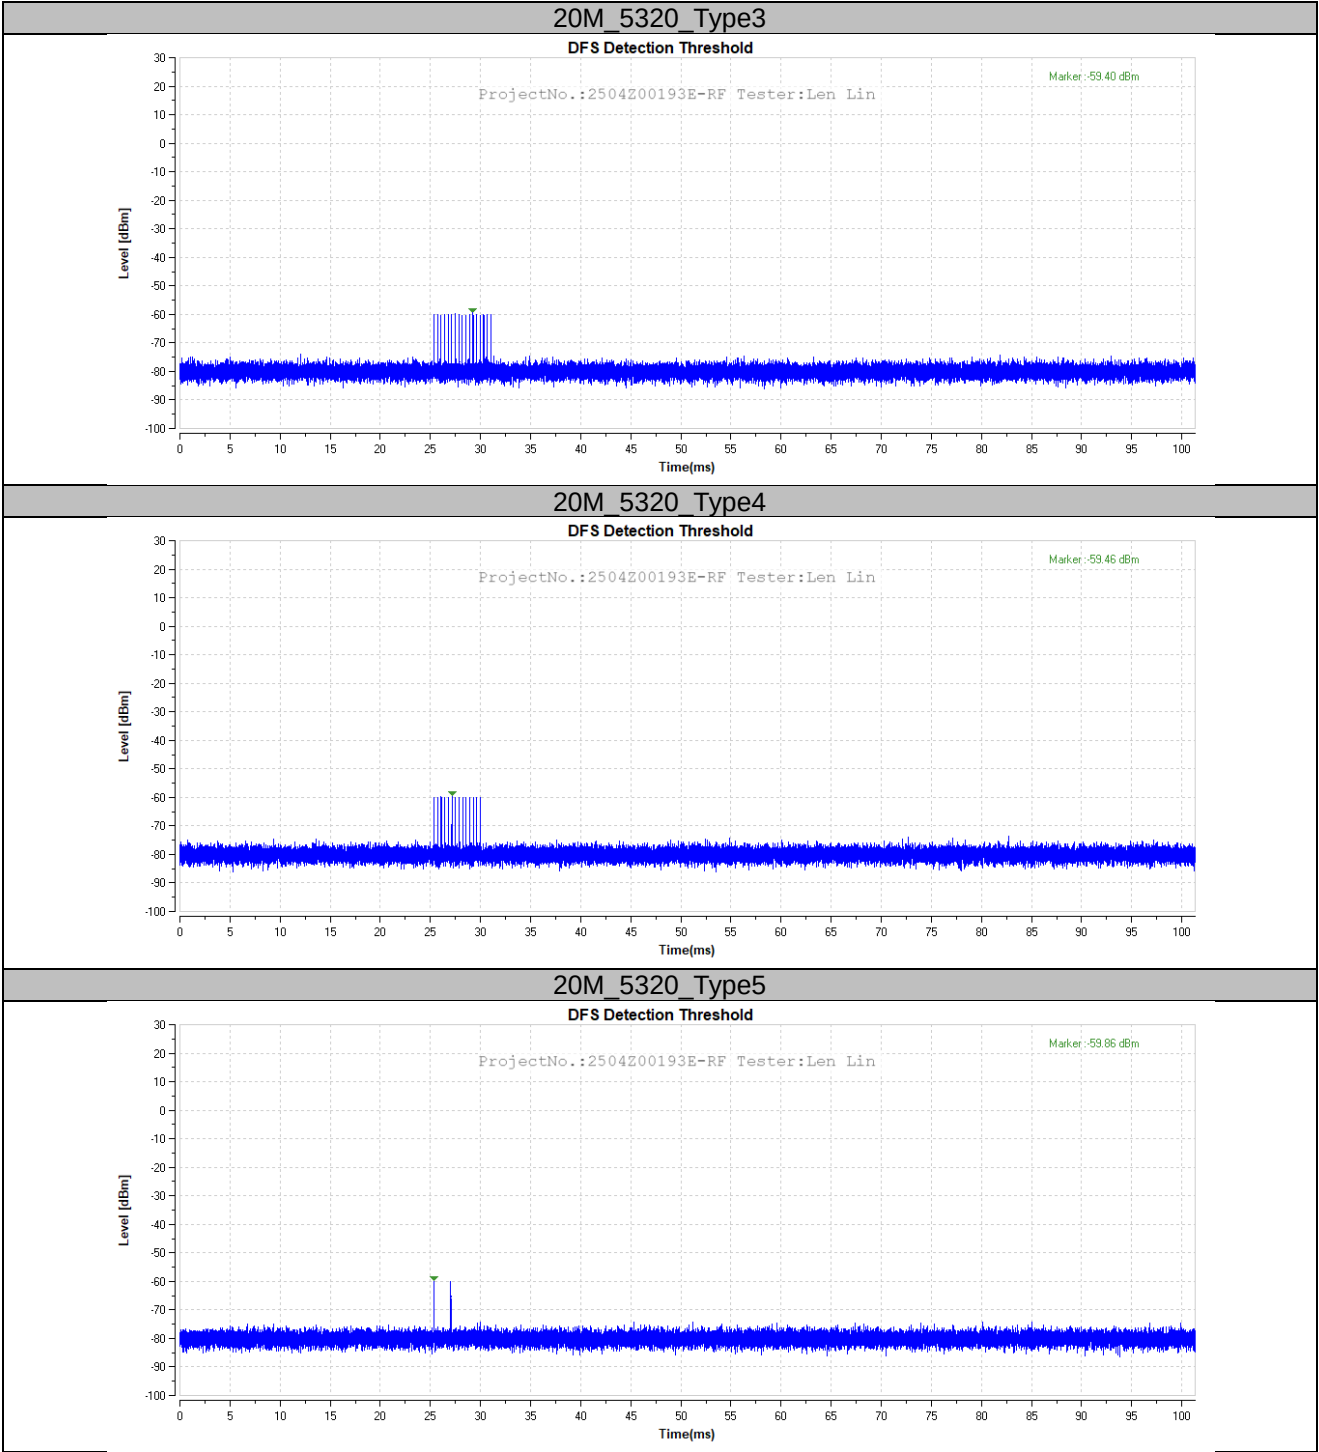


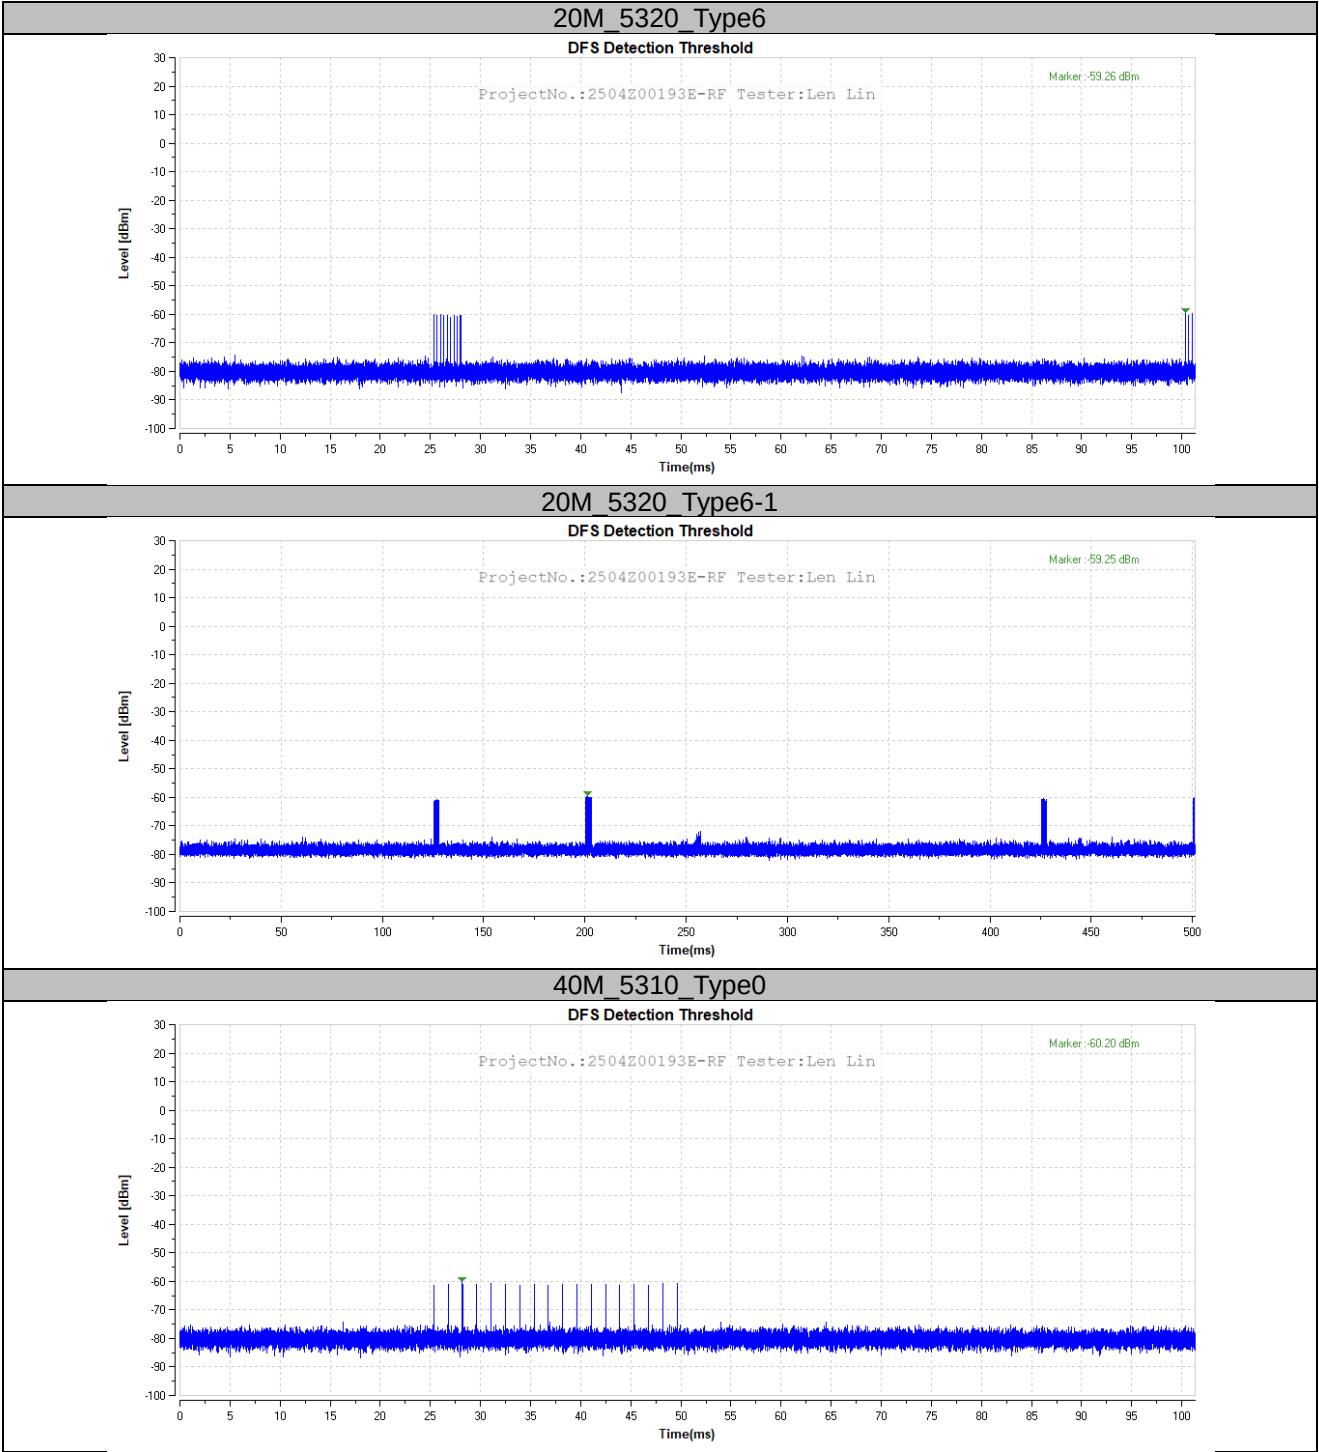


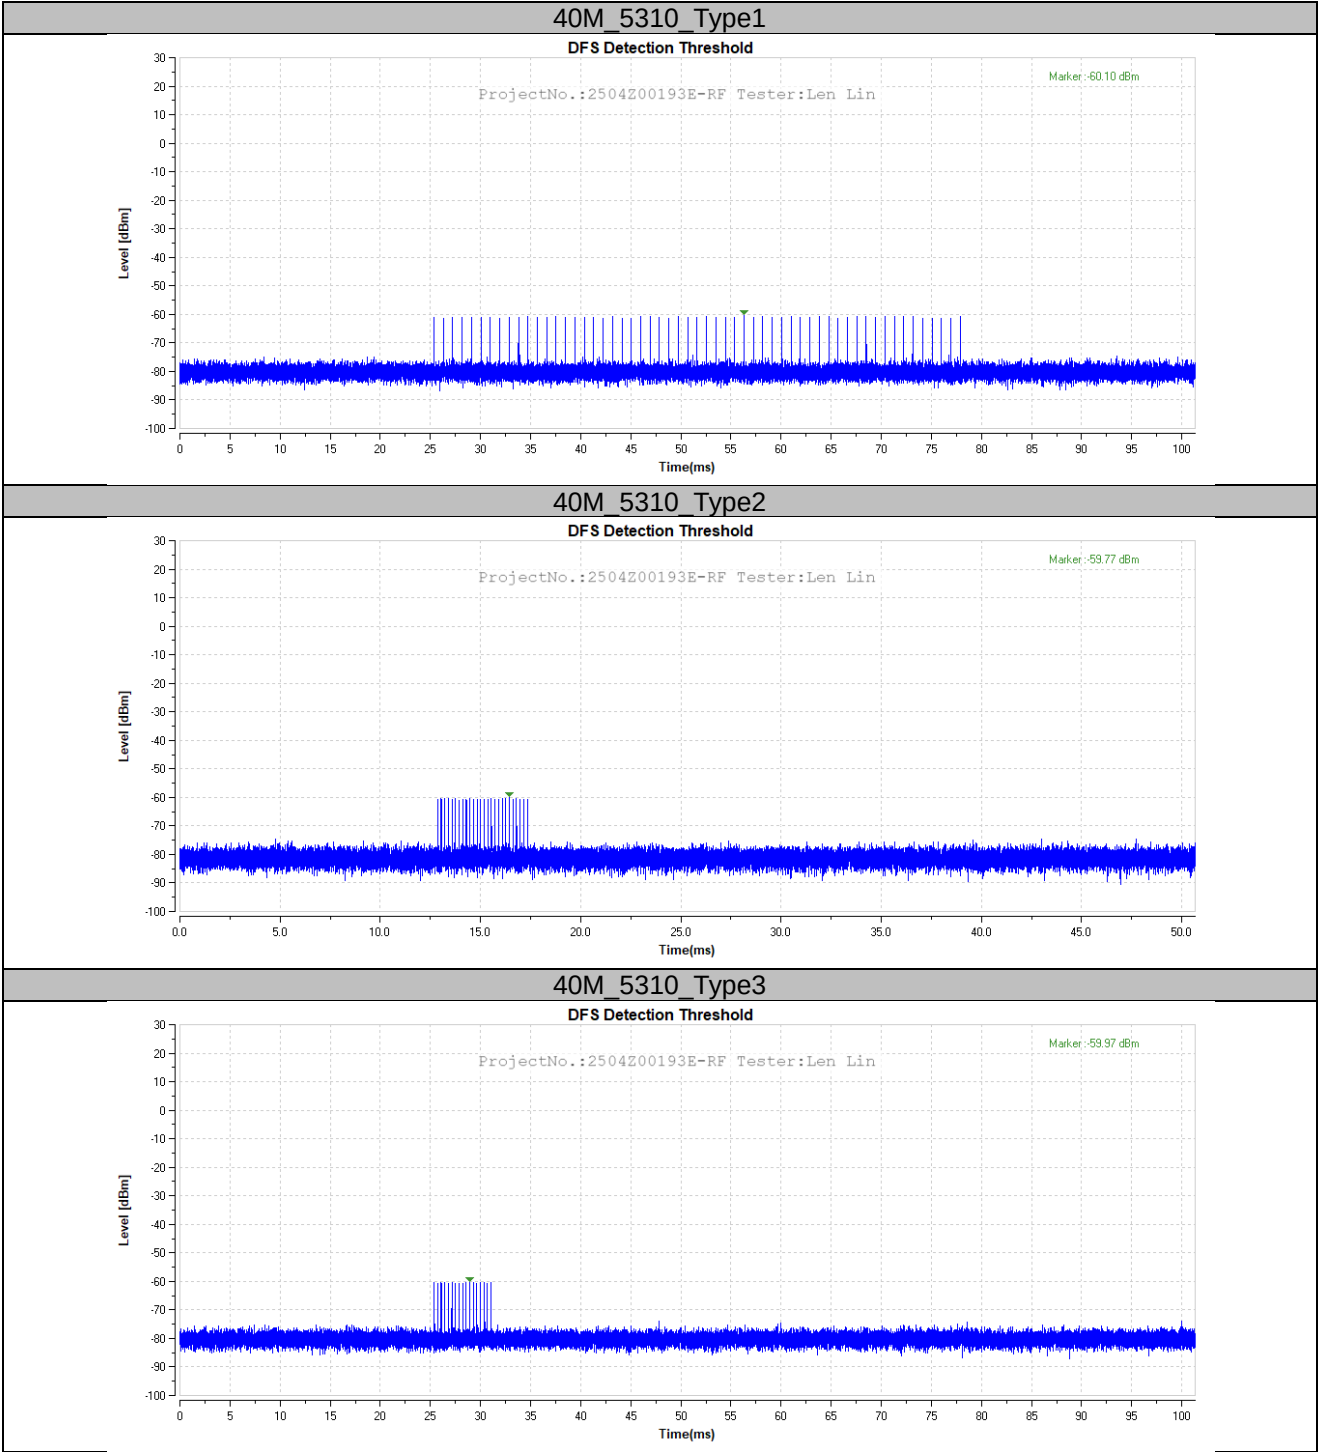

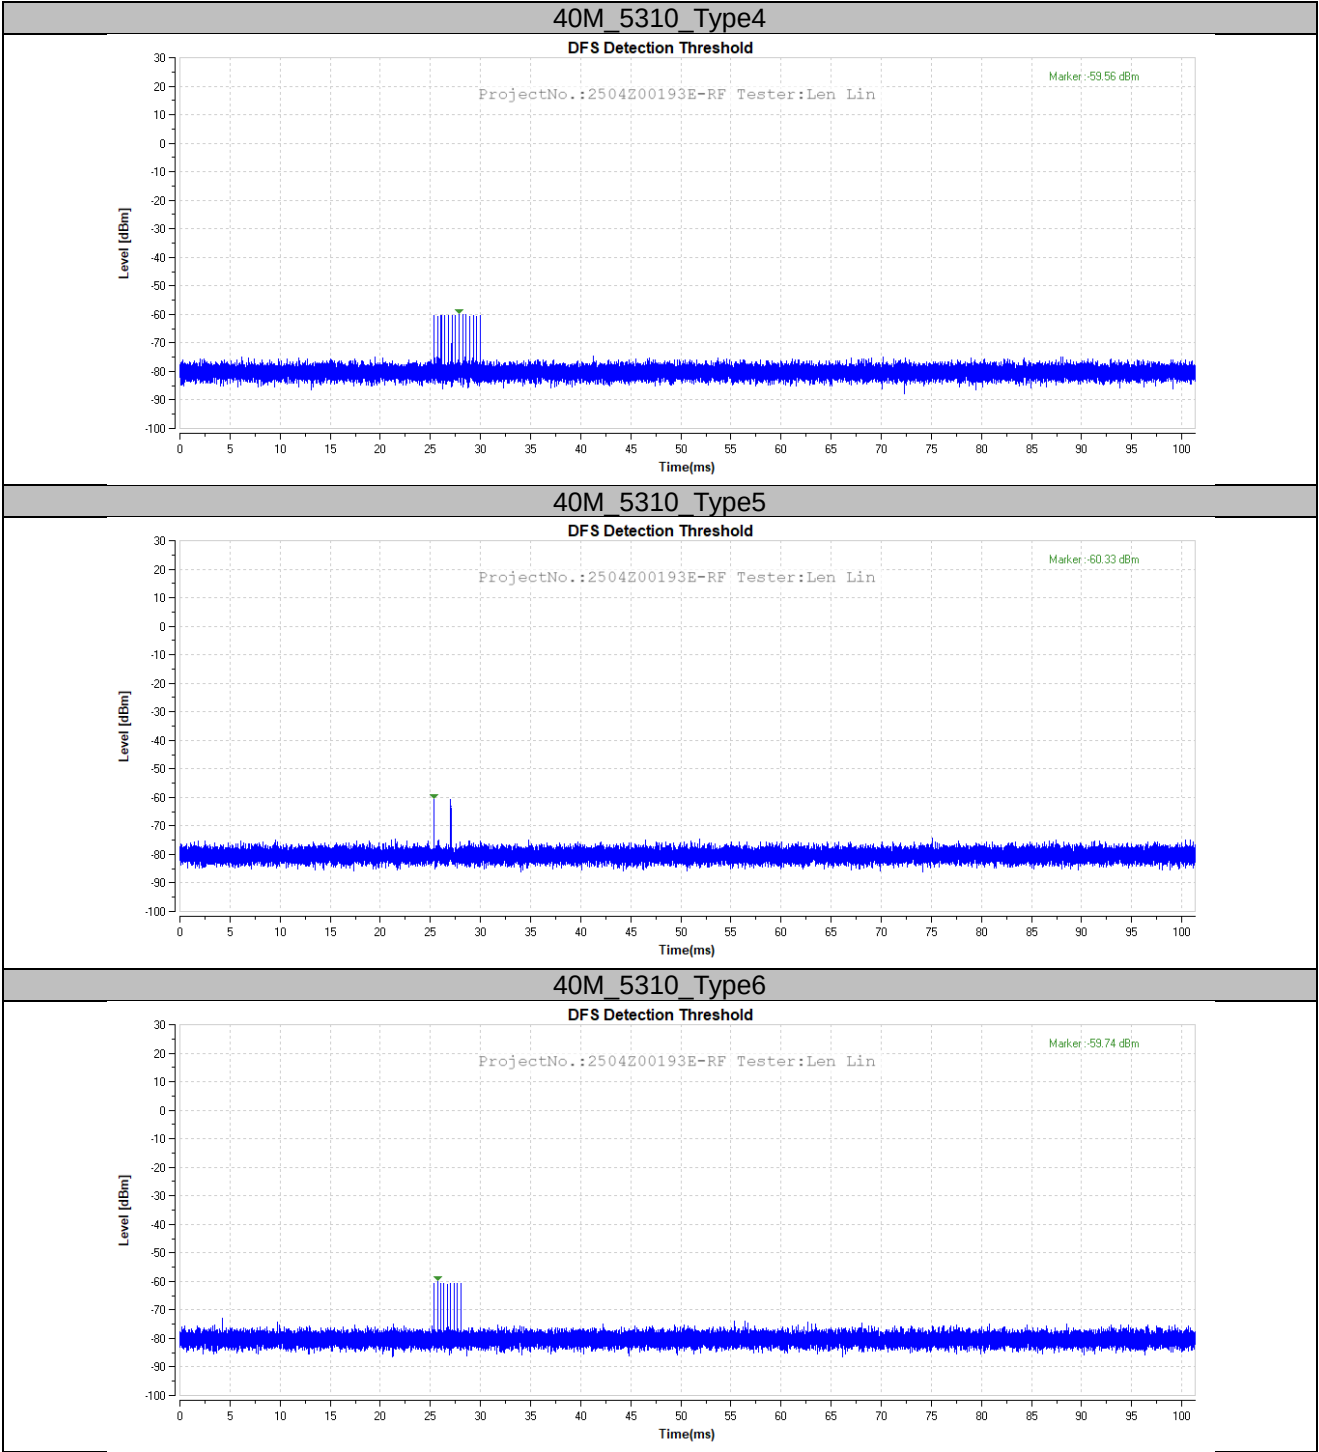

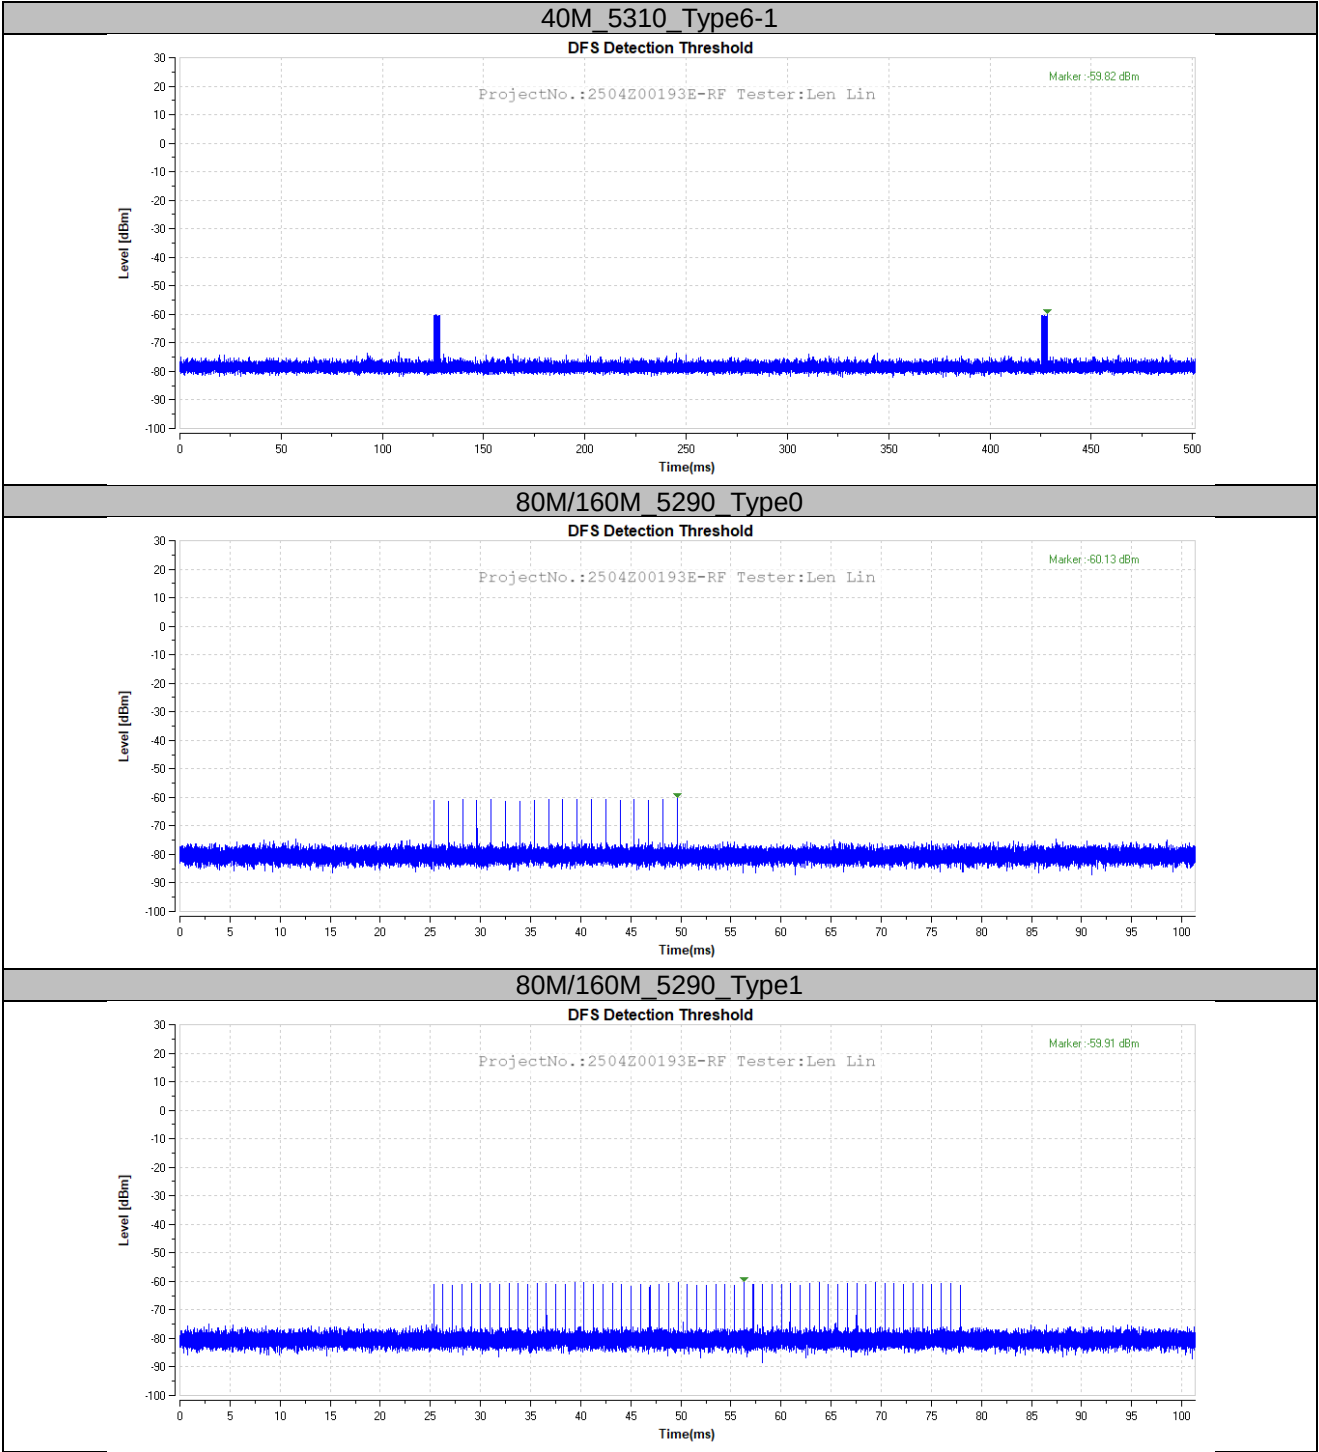

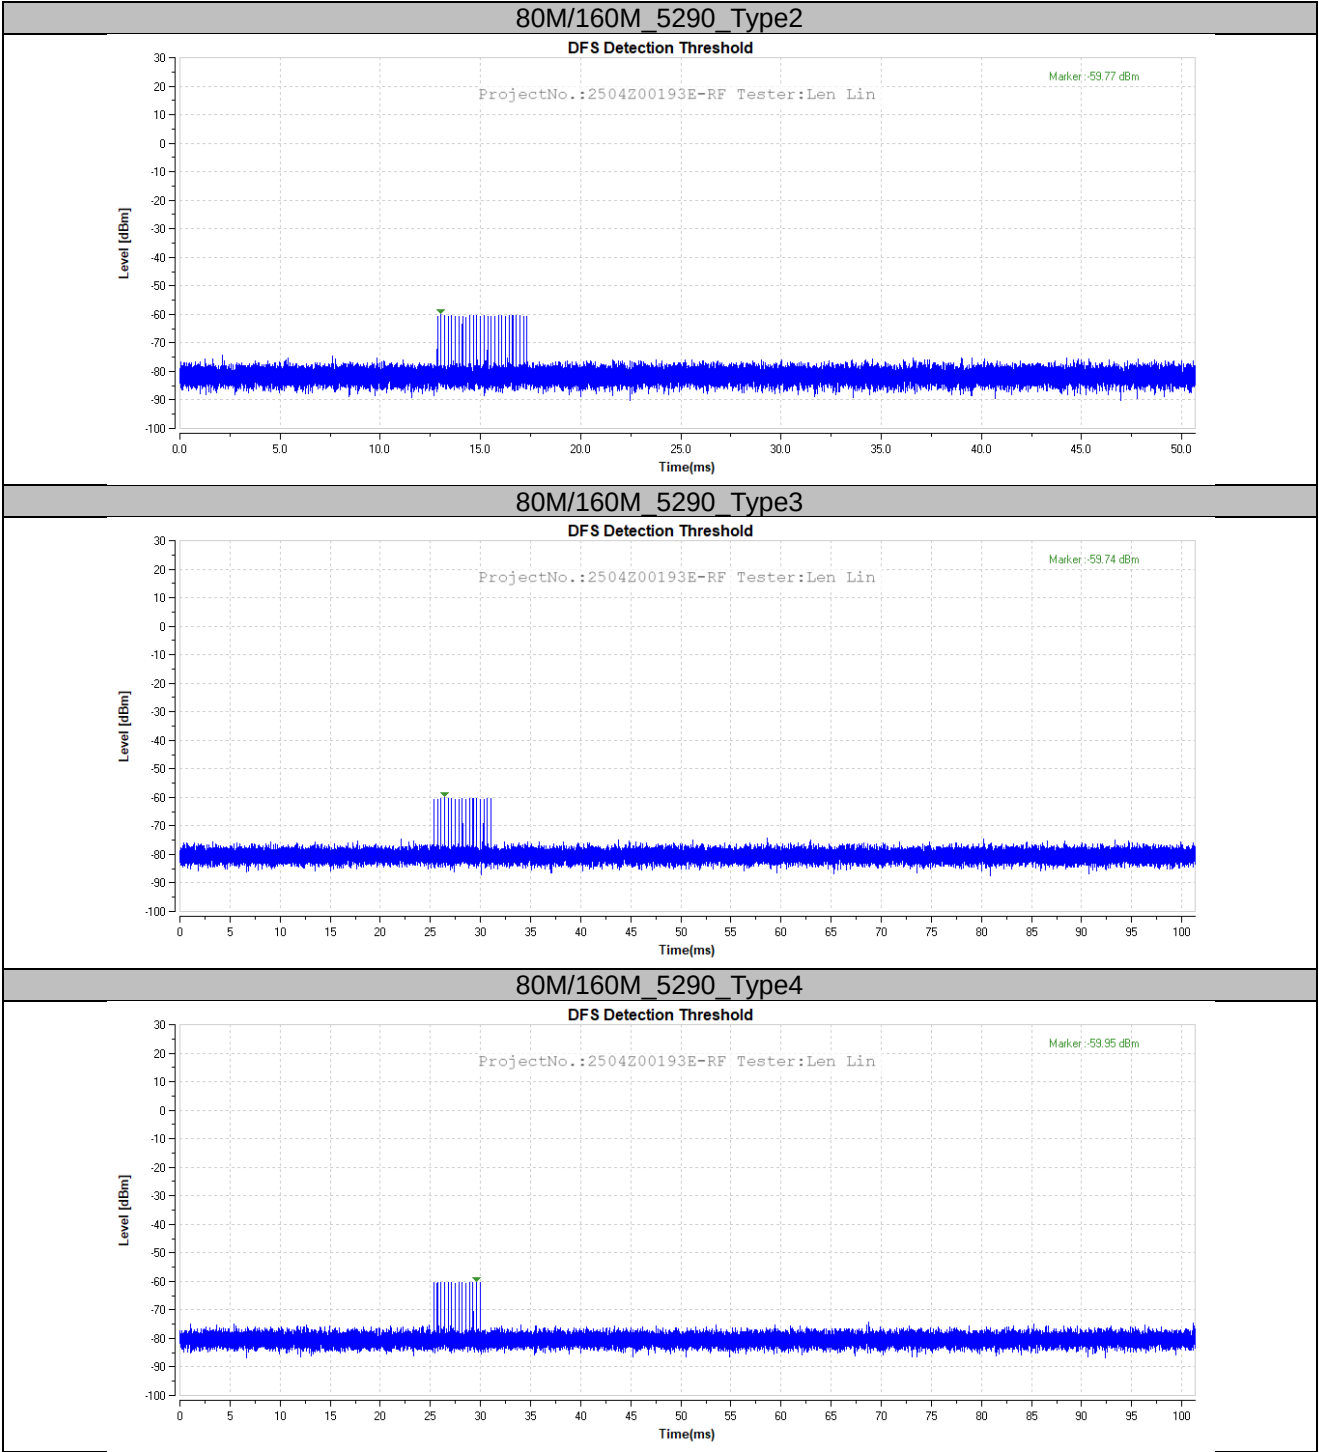

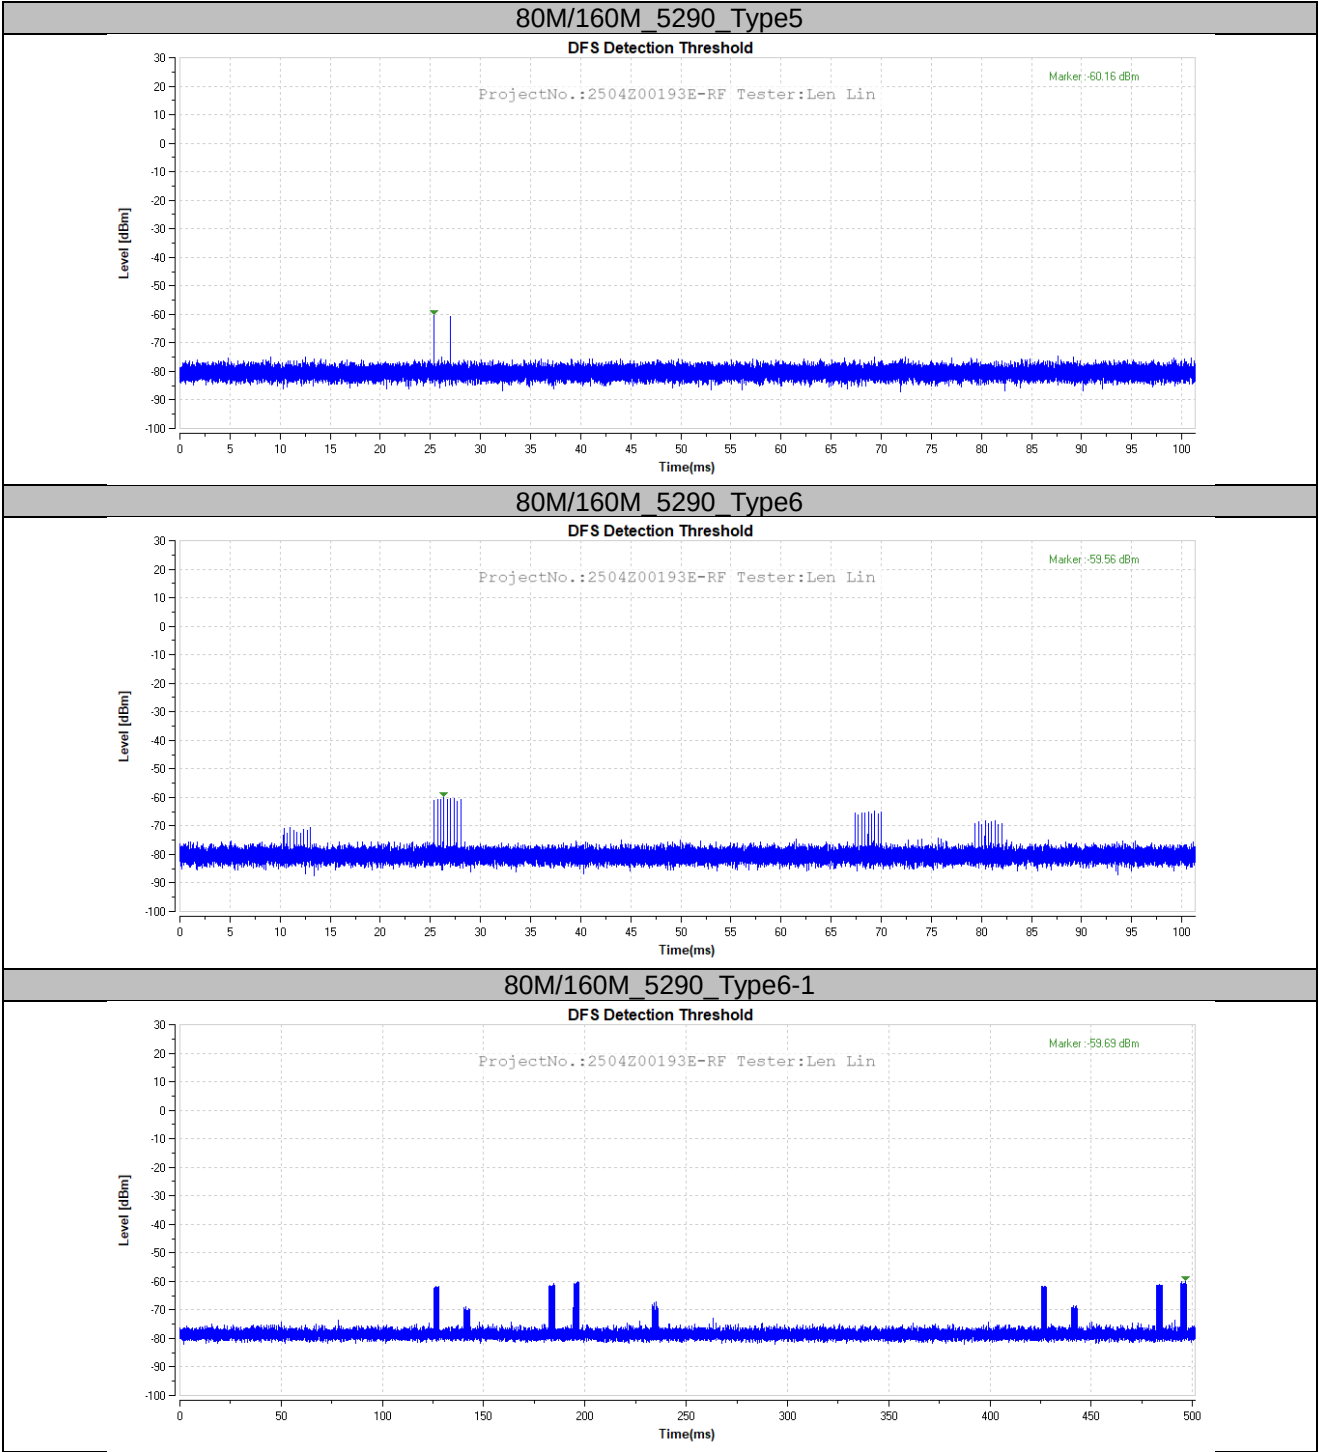



Appendix B: Channel Loading

Test Result

Test Mode	Test Frequency (MHz)	Result [%]	Limit [%]	Verdict
11A	5320	24	17	PASS
11AC40MIMO	5310	30.42	17	PASS
11AC80MIMO	5290	21.06	17	PASS
11AC160MIMO	5250	21.83	17	PASS

Test Graphs

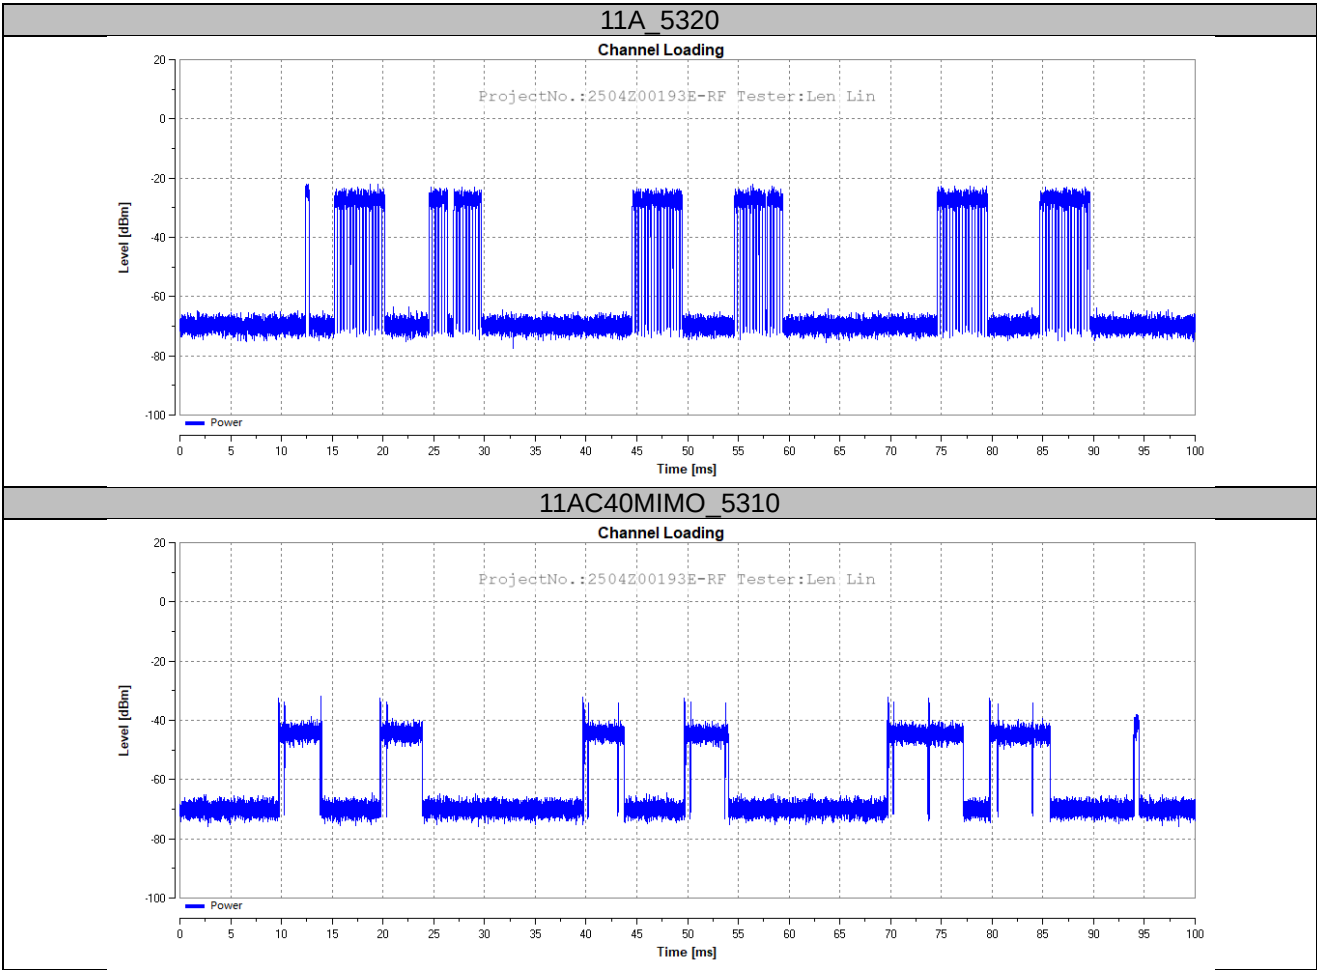

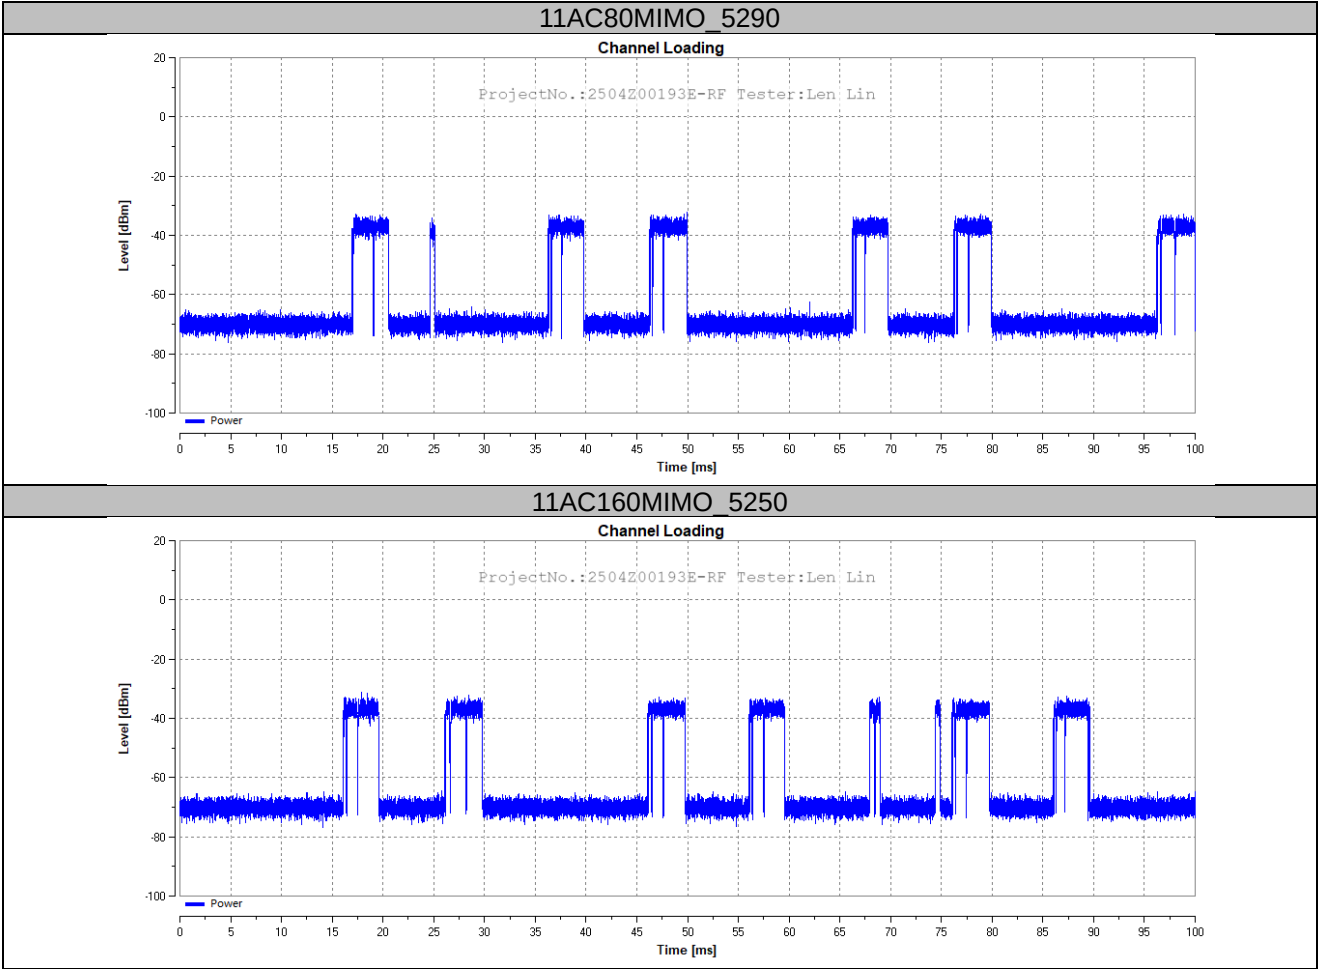

Appendix C: Channel Availability Check Time

Test Result

Initial Channel Availability Check Time

Test Mode	Test Frequency (MHz)	Radar Frequency (MHz)	Result	Verdict
11AC160MIMO	5250	5290	See test Graph	PASS




Beginning of Channel Availability Check Time

Test Mode	Test Frequency (MHz)	Radar Frequency (MHz)	Result	Verdict
11AC160MIMO	5250	5290	See test Graph	PASS

End of Channel Availability Check Time

Test Mode	Test Frequency (MHz)	Radar Frequency (MHz)	Result	Verdict
11AC160MIMO	5250	5290	See test Graph	PASS

Test Graphs

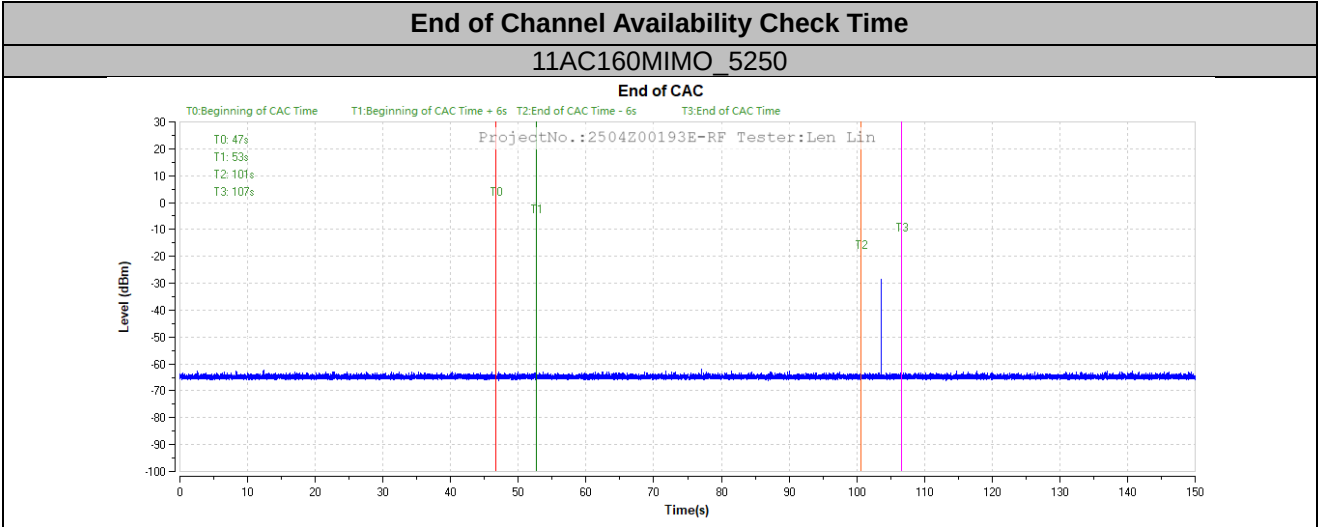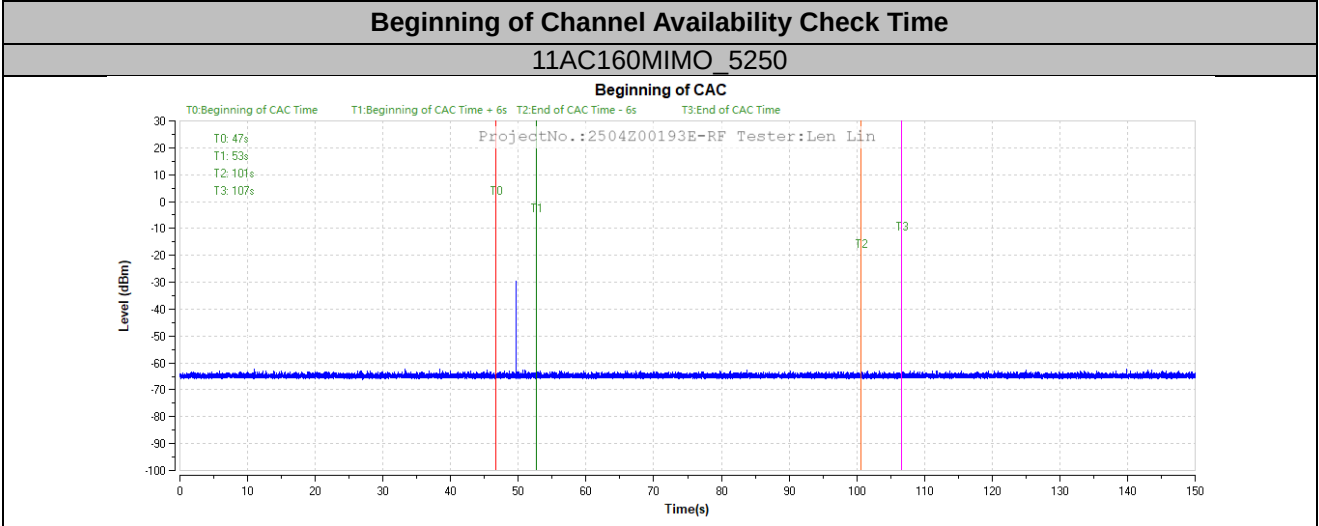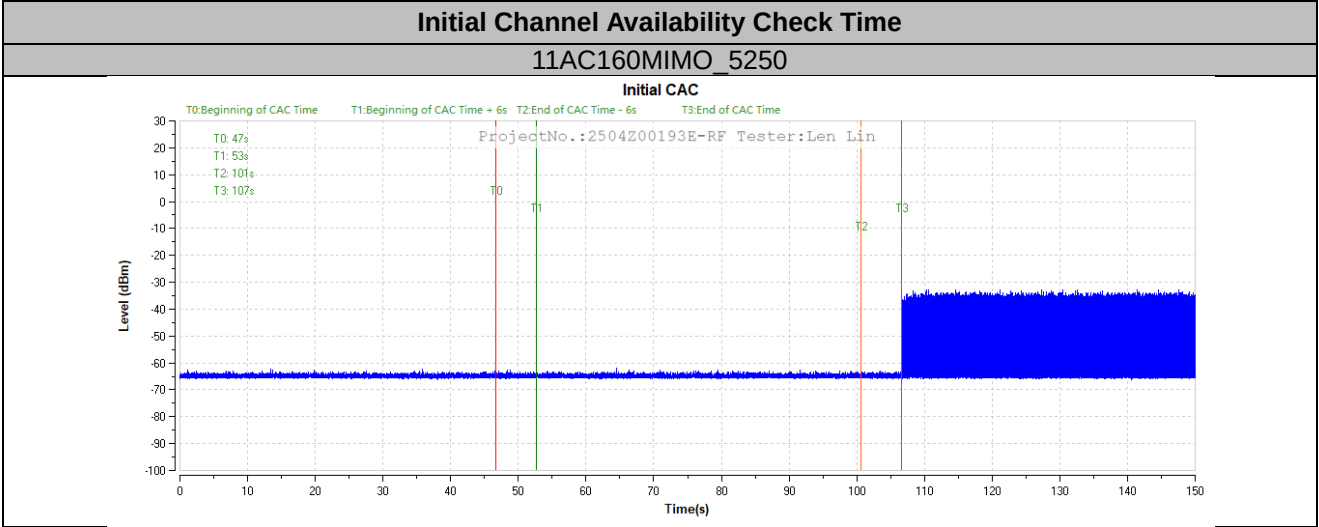


Appendix D: Channel Move Time and Channel Closing Transmission Time

Test Result

Test Mode	Test Frequency (MHz)	Radar Frequency (MHz)	CCTT[ms]	Limit[ms]	CMT[ms]	Limit[ms]	Verdict
11AC160MIMO	5250	5290	200+8.64	200+60	991	10000	PASS

Test Graphs

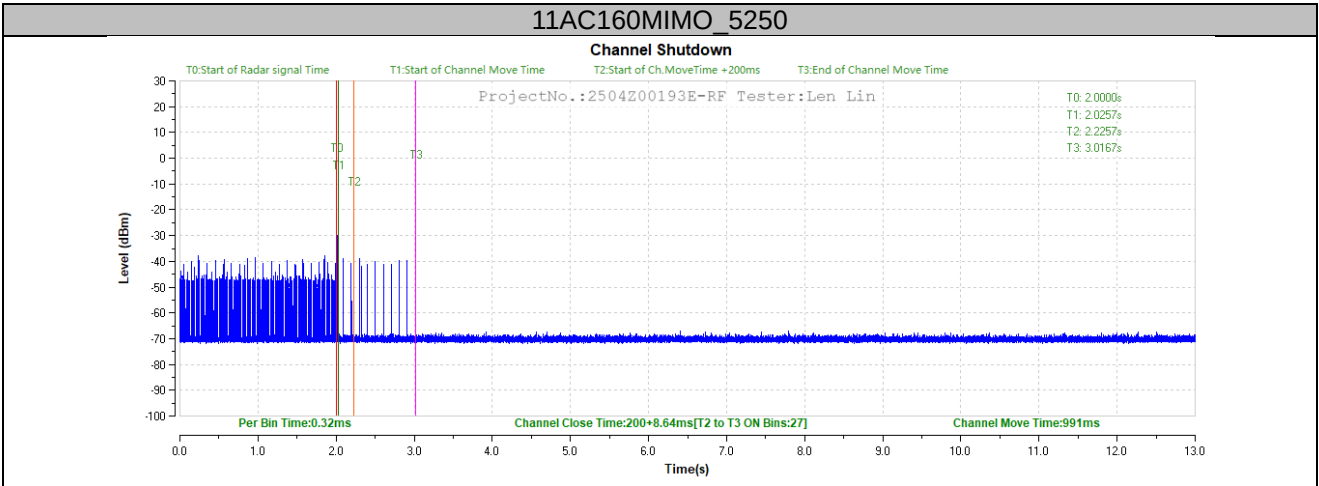


Appendix E: Non-Occupancy Period

Test Result

Test Mode	Test Frequency (MHz)	Radar Frequency (MHz)	Result	Limit[s]	Verdict
11AC160MIMO	5250	5290	see test graph	≥1800	PASS

Test Graphs

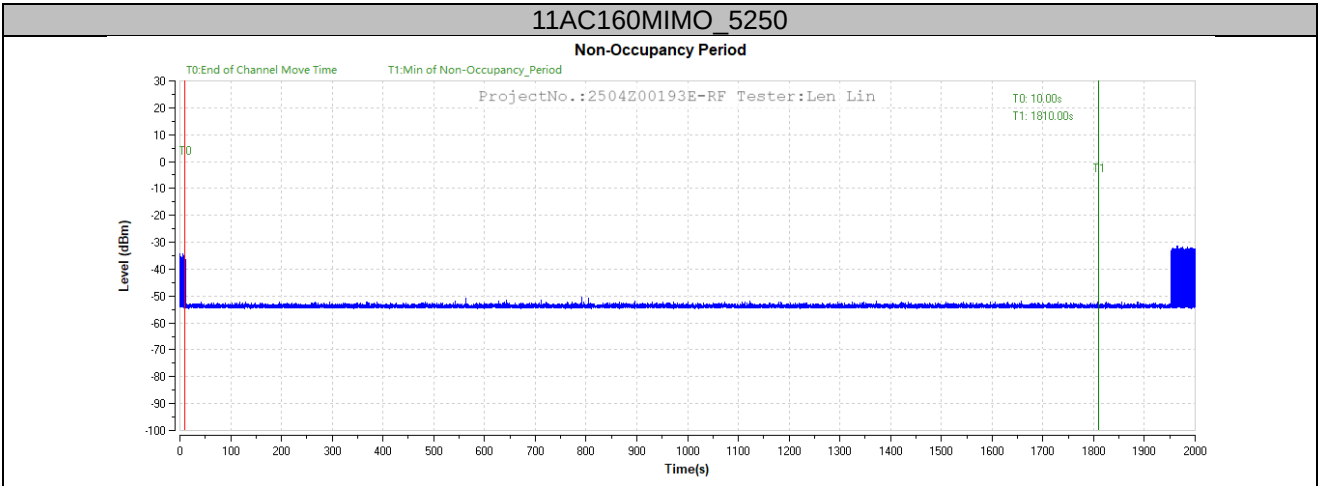

Appendix F: U-NII Detection Bandwidth

Test Result

Test Mode	Test Frequency (MHz)	Radar Frequency (MHz)	FL[MHz]	FH[MHz]	Detection Bandwidth [MHz]	OCB [MHz]	Ratio [%]	Limit [%]	Verdict
11A	5320	5320	5310	5330	20	16.4	121.95	≥100	PASS
11AC40MIMO	5310	5310	5290	5330	40	35.9	111.42	≥100	PASS
11AC80MIMO	5290	5290	5250	5330	80	75.2	106.38	≥100	PASS
11AC160MIMO	5250	5290	5189	5356	167	154	108.44	≥100	PASS

Note: For the determination of the OCB value, please refer to the test data in Section FCC §15.407(a), (e) - 26 DB & 6DB EMISSION BANDWIDTH of Report 2509T61338E-RF-00B[#] regarding "99% Occupied Bandwidth." The OCB value is taken from the largest 99% Occupied Bandwidth result in the corresponding test mode.

Test Mode	Test Freq. (MHz)	Radar Freq. (MHz)	Radar Freq.	Trial1	Trial2	Trial3	Trial4	Trial5	Trial6	Trial7	Trial8	Trial9	Trial10	Ratio (%)
11A	5320	5320	5309	0	0	0	0	0	0	0	0	0	0	0
			5310	1	1	1	1	1	1	1	1	1	1	100
			5315	1	1	1	1	1	1	1	1	1	1	100
			5320	1	1	1	1	1	1	1	1	1	1	100
			5325	1	1	1	1	1	1	1	1	1	1	100
			5330	1	1	1	1	1	1	1	1	1	1	100
			5331	0	0	0	0	0	0	0	0	0	0	0
11AC40 MIMO	5310	5310	5289	0	0	0	0	0	0	0	0	0	0	0
			5290	1	1	1	1	1	1	1	1	1	1	100
			5295	1	1	1	1	1	1	1	1	1	1	100
			5300	1	1	1	1	1	1	1	1	1	1	100
			5305	1	1	1	1	1	1	1	1	1	1	100
			5310	1	1	1	1	1	1	1	1	1	1	100
			5315	1	1	1	1	1	1	1	1	1	1	100
			5320	1	1	1	1	1	1	1	1	1	1	100
			5325	1	1	1	1	1	1	1	1	1	1	100
			5330	1	1	1	1	1	1	1	1	1	1	100
			5331	0	0	0	0	0	0	0	0	0	0	0
11AC80 MIMO	5290	5290	5249	0	0	0	0	0	0	0	0	0	0	0
			5250	1	1	1	1	1	1	1	1	1	1	100
			5255	1	1	1	1	1	1	1	1	1	1	100
			5260	1	1	1	1	1	1	1	1	1	1	100
			5265	1	1	1	1	1	1	1	1	1	1	100
			5270	1	1	1	1	1	1	1	1	1	1	100
			5275	1	1	1	1	1	1	1	1	1	1	100
			5280	1	1	1	1	1	1	1	1	1	1	100
			5285	1	1	1	1	1	1	1	1	1	1	100
			5290	1	1	1	1	1	1	1	1	1	1	100
			5295	1	1	1	1	1	1	1	1	1	1	100
			5300	1	1	1	1	1	1	1	1	1	1	100
			5305	1	1	1	1	1	1	1	1	1	1	100
			5310	1	1	1	1	1	1	1	1	1	1	100
			5315	1	1	1	1	1	1	1	1	1	1	100
			5320	1	1	1	1	1	1	1	1	1	1	100
			5325	1	1	1	1	1	1	1	1	1	1	100
			5330	1	1	1	1	1	1	1	1	1	1	100
			5331	0	0	0	0	0	0	0	0	0	0	0

Test Mode	Test Freq. (MHz)	Radar Freq. (MHz)	Radar Freq.	Trial1	Trial2	Trial3	Trial4	Trial5	Trial6	Trial7	Trial8	Trial9	Trial10	Ratio (%)
11AC160 MIMO	5250	5290	5188	0	0	0	0	0	0	0	0	0	0	0
			5189	1	1	1	1	1	1	1	1	1	1	100
			5190	1	1	1	1	1	1	1	1	1	1	100
			5195	1	1	1	1	1	1	1	1	1	1	100
			5200	1	1	1	1	1	1	1	1	1	1	100
			5205	1	1	1	1	1	1	1	1	1	1	100
			5210	1	1	1	1	1	1	1	1	1	1	100
			5215	1	1	1	1	1	1	1	1	1	1	100
			5220	1	1	1	1	1	1	1	1	1	1	100
			5225	1	1	1	1	1	1	1	1	1	1	100
			5230	1	1	1	1	1	1	1	1	1	1	100
			5235	1	1	1	1	1	1	1	1	1	1	100
			5240	1	1	1	1	1	1	1	1	1	1	100
			5245	1	1	1	1	1	1	1	1	1	1	100
			5250	1	1	1	1	1	1	1	1	1	1	100
			5255	1	1	1	1	1	1	1	1	1	1	100
			5260	1	1	1	1	1	1	1	1	1	1	100
			5265	1	1	1	1	1	1	1	1	1	1	100
			5270	1	1	1	1	1	1	1	1	1	1	100
			5275	1	1	1	1	1	1	1	1	1	1	100
			5280	1	1	1	1	1	1	1	1	1	1	100
			5285	1	1	1	1	1	1	1	1	1	1	100
			5290	1	1	1	1	1	1	1	1	1	1	100
			5295	1	1	1	1	1	1	1	1	1	1	100
			5300	1	1	1	1	1	1	1	1	1	1	100
			5305	1	1	1	1	1	1	1	1	1	1	100
			5310	1	1	1	1	1	1	1	1	1	1	100
			5315	1	1	1	1	1	1	1	1	1	1	100
			5320	1	1	1	1	1	1	1	1	1	1	100
			5325	1	1	1	1	1	1	1	1	1	1	100
			5330	1	1	1	1	1	1	1	1	1	1	100
			5335	1	1	1	1	1	1	1	1	1	1	100
			5340	1	1	1	1	1	1	1	1	1	1	100
			5345	1	1	1	1	1	1	1	1	1	1	100
			5350	1	1	1	1	1	1	1	1	1	1	100
			5355	1	1	1	1	1	1	1	1	1	1	100
			5356	1	1	1	1	1	1	1	1	1	1	100
			5357	0	0	0	0	0	0	0	0	0	0	0

Appendix G: Statistical Performance check
Test Result

Test Mode	Test Frequency (MHz)	Radar Frequency (MHz)	Radar Type	Pass Times	Fail Times	Probability (%)	Limit (%)	Verdict
11A	5320	5320	Type1	30	0	100.00	60	PASS
			Type2	30	0	100.00	60	PASS
			Type3	30	0	100.00	60	PASS
			Type4	30	0	100.00	60	PASS
			Type 1-4	---	---	100.00	80	PASS
			Type5	30	0	100.00	80	PASS
11AC40MIMO	5310	5310	Type6	30	0	100.00	70	PASS
			Type1	30	0	100.00	60	PASS
			Type2	30	0	100.00	60	PASS
			Type3	30	0	100.00	60	PASS
			Type4	30	0	100.00	60	PASS
			Type 1-4	---	---	100.00	80	PASS
11AC80MIMO	5290	5290	Type5	30	0	100.00	80	PASS
			Type6	30	0	100.00	70	PASS
			Type1	30	0	100.00	60	PASS
			Type2	30	0	100.00	60	PASS
			Type3	30	0	100.00	60	PASS
			Type4	30	0	100.00	60	PASS
11AC160MIMO	5250	5290	Type 1-4	---	---	100.00	80	PASS
			Type5	30	0	100.00	80	PASS
			Type6	30	0	100.00	70	PASS
			Type1	30	0	100.00	60	PASS
			Type2	30	0	100.00	60	PASS
			Type3	30	0	100.00	60	PASS
			Type4	30	0	100.00	60	PASS
			Type 1-4	---	---	100.00	80	PASS
			Type5	30	0	100.00	80	PASS
			Type6	30	0	100.00	70	PASS
			Type1	30	0	100.00	60	PASS
			Type2	30	0	100.00	60	PASS

Note: Probability(Type 1-4)= (Probability(Type 1)+ Probability(Type 2)+ Probability(Type 3)+ Probability(Type 4))/4

Test Mode	Test Freq. (MHz)	Radar Freq. (MHz)	Radar Type	Trial ID	Pulse width (μs)	PRI(μs)	Pulses per Burst	Detection (1: Yes; 0: No)
11A	5320	5320	Type1	0	1.0	938.0	57	1
			Type1	1	1.0	698.0	76	1
			Type1	2	1.0	618.0	86	1
			Type1	3	1.0	538.0	99	1
			Type1	4	1.0	878.0	61	1
			Type1	5	1.0	3066.0	18	1
			Type1	6	1.0	638.0	83	1
			Type1	7	1.0	918.0	58	1
			Type1	8	1.0	838.0	63	1
			Type1	9	1.0	858.0	62	1
			Type1	10	1.0	798.0	67	1
			Type1	11	1.0	718.0	74	1
			Type1	12	1.0	578.0	92	1
			Type1	13	1.0	598.0	89	1
			Type1	14	1.0	558.0	95	1
			Type1	15	1.0	2536.0	21	1
			Type1	16	1.0	966.0	55	1
			Type1	17	1.0	827.0	64	1
			Type1	18	1.0	2501.0	22	1
			Type1	19	1.0	2595.0	21	1
			Type1	20	1.0	1114.0	48	1
			Type1	21	1.0	1302.0	41	1
			Type1	22	1.0	3045.0	18	1
			Type1	23	1.0	1624.0	33	1
			Type1	24	1.0	2878.0	19	1
			Type1	25	1.0	1027.0	52	1
			Type1	26	1.0	2485.0	22	1
			Type1	27	1.0	1600.0	33	1
			Type1	28	1.0	1172.0	46	1
			Type1	29	1.0	1177.0	45	1
			Type2	0	3.2	179.0	26	1
			Type2	1	1.1	207.0	23	1
			Type2	2	2.1	230.0	24	1
			Type2	3	4.8	200.0	29	1
			Type2	4	3.9	214.0	28	1
			Type2	5	2.9	222.0	26	1
			Type2	6	3.2	204.0	26	1
			Type2	7	2.5	192.0	25	1
			Type2	8	3.1	164.0	26	1
			Type2	9	1.2	156.0	23	1
			Type2	10	3.9	210.0	27	1
			Type2	11	4.6	201.0	29	1
			Type2	12	3.2	162.0	26	1
			Type2	13	2.2	197.0	25	1
			Type2	14	4.5	163.0	29	1
			Type2	15	3.0	203.0	26	1
			Type2	16	5.0	168.0	29	1
			Type2	17	2.4	217.0	25	1
			Type2	18	2.9	191.0	26	1
			Type2	19	2.3	166.0	25	1
			Type2	20	3.7	150.0	27	1
			Type2	21	2.2	176.0	25	1
			Type2	22	4.9	195.0	29	1
			Type2	23	2.9	202.0	26	1
			Type2	24	2.5	178.0	25	1
			Type2	25	1.1	206.0	23	1
			Type2	26	3.8	155.0	27	1
			Type2	27	4.7	157.0	29	1

Test Mode	Test Freq. (MHz)	Radar Freq. (MHz)	Radar Type	Trial ID	Pulse width (μs)	PRI(μs)	Pulses per Burst	Detection (1: Yes; 0: No)
11A	5320	5320	Type2	28	2.4	224.0	25	1
			Type2	29	4.2	159.0	28	1
			Type3	0	8.2	355.0	17	1
			Type3	1	6.1	487.0	16	1
			Type3	2	7.1	344.0	16	1
			Type3	3	9.8	288.0	18	1
			Type3	4	8.9	230.0	18	1
			Type3	5	7.9	432.0	17	1
			Type3	6	8.2	207.0	17	1
			Type3	7	7.5	443.0	17	1
			Type3	8	8.1	439.0	17	1
			Type3	9	6.2	223.0	16	1
			Type3	10	8.9	208.0	18	1
			Type3	11	9.6	463.0	18	1
			Type3	12	8.2	441.0	17	1
			Type3	13	7.2	323.0	16	1
			Type3	14	9.5	297.0	18	1
			Type3	15	8.0	412.0	17	1
			Type3	16	10.0	324.0	18	1
			Type3	17	7.4	271.0	17	1
			Type3	18	7.9	349.0	17	1
			Type3	19	7.3	409.0	16	1
			Type3	20	8.7	373.0	18	1
			Type3	21	7.2	254.0	16	1
			Type3	22	9.9	274.0	18	1
			Type3	23	7.9	278.0	17	1
			Type3	24	7.5	317.0	17	1
			Type3	25	6.1	260.0	16	1
			Type3	26	8.8	211.0	18	1
			Type3	27	9.7	272.0	18	1
			Type3	28	7.4	264.0	17	1
			Type3	29	9.2	284.0	18	1
			Type4	0	16.0	355.0	14	1
			Type4	1	11.3	487.0	12	1
			Type4	2	13.5	344.0	13	1
			Type4	3	19.4	288.0	16	1
			Type4	4	17.5	230.0	15	1
			Type4	5	15.3	432.0	14	1
			Type4	6	15.9	207.0	14	1
			Type4	7	14.3	443.0	13	1
			Type4	8	15.8	439.0	14	1
			Type4	9	11.5	223.0	12	1
			Type4	10	17.4	208.0	15	1
			Type4	11	19.0	463.0	16	1
			Type4	12	16.0	441.0	14	1
			Type4	13	13.8	323.0	13	1
			Type4	14	18.9	297.0	16	1
			Type4	15	15.5	412.0	14	1
			Type4	16	19.9	324.0	16	1
			Type4	17	14.1	271.0	13	1
			Type4	18	15.2	349.0	14	1
			Type4	19	13.8	409.0	13	1
			Type4	20	17.1	373.0	15	1
			Type4	21	13.8	254.0	13	1
			Type4	22	19.8	274.0	16	1

Test Mode	Test Freq. (MHz)	Radar Freq. (MHz)	Radar Type	Trial ID	Pulse width (μs)	PRI(μs)	Pulses per Burst	Detection (1: Yes; 0: No)
11A	5320	5320	Type4	23	15.3	278.0	14	1
			Type4	24	14.5	317.0	13	1
			Type4	25	11.3	260.0	12	1
			Type4	26	17.3	211.0	15	1
			Type4	27	19.2	272.0	16	1
			Type4	28	14.2	264.0	13	1
11AC40MI MO	5310	5310	Type4	29	18.2	284.0	15	1
			Type1	0	1.0	938.0	57	1
			Type1	1	1.0	698.0	76	1
			Type1	2	1.0	618.0	86	1
			Type1	3	1.0	538.0	99	1
			Type1	4	1.0	878.0	61	1
			Type1	5	1.0	3066.0	18	1
			Type1	6	1.0	638.0	83	1
			Type1	7	1.0	918.0	58	1
			Type1	8	1.0	838.0	63	1
			Type1	9	1.0	858.0	62	1
			Type1	10	1.0	798.0	67	1
			Type1	11	1.0	718.0	74	1
			Type1	12	1.0	578.0	92	1
			Type1	13	1.0	598.0	89	1
			Type1	14	1.0	558.0	95	1
			Type1	15	1.0	2536.0	21	1
			Type1	16	1.0	966.0	55	1
			Type1	17	1.0	827.0	64	1
			Type1	18	1.0	2501.0	22	1
			Type1	19	1.0	2595.0	21	1
			Type1	20	1.0	1114.0	48	1
			Type1	21	1.0	1302.0	41	1
			Type1	22	1.0	3045.0	18	1
			Type1	23	1.0	1624.0	33	1
			Type1	24	1.0	2878.0	19	1
			Type1	25	1.0	1027.0	52	1
			Type1	26	1.0	2485.0	22	1
			Type1	27	1.0	1600.0	33	1
			Type1	28	1.0	1172.0	46	1
			Type1	29	1.0	1177.0	45	1
			Type2	0	3.2	179.0	26	1
			Type2	1	1.1	207.0	23	1
			Type2	2	2.1	230.0	24	1
			Type2	3	4.8	200.0	29	1
			Type2	4	3.9	214.0	28	1
			Type2	5	2.9	222.0	26	1
			Type2	6	3.2	204.0	26	1
			Type2	7	2.5	192.0	25	1
			Type2	8	3.1	164.0	26	1
			Type2	9	1.2	156.0	23	1
			Type2	10	3.9	210.0	27	1
			Type2	11	4.6	201.0	29	1
			Type2	12	3.2	162.0	26	1
			Type2	13	2.2	197.0	25	1
			Type2	14	4.5	163.0	29	1
			Type2	15	3.0	203.0	26	1
			Type2	16	5.0	168.0	29	1
			Type2	17	2.4	217.0	25	1
			Type2	18	2.9	191.0	26	1

Test Mode	Test Freq. (MHz)	Radar Freq. (MHz)	Radar Type	Trial ID	Pulse width (μs)	PRI(μs)	Pulses per Burst	Detection (1: Yes; 0: No)
11AC40MI MO	5310	5310	Type2	19	2.3	166.0	25	1
			Type2	20	3.7	150.0	27	1
			Type2	21	2.2	176.0	25	1
			Type2	22	4.9	195.0	29	1
			Type2	23	2.9	202.0	26	1
			Type2	24	2.5	178.0	25	1
			Type2	25	1.1	206.0	23	1
			Type2	26	3.8	155.0	27	1
			Type2	27	4.7	157.0	29	1
			Type2	28	2.4	224.0	25	1
			Type2	29	4.2	159.0	28	1
			Type3	0	8.2	355.0	17	1
			Type3	1	6.1	487.0	16	1
			Type3	2	7.1	344.0	16	1
			Type3	3	9.8	288.0	18	1
			Type3	4	8.9	230.0	18	1
			Type3	5	7.9	432.0	17	1
			Type3	6	8.2	207.0	17	1
			Type3	7	7.5	443.0	17	1
			Type3	8	8.1	439.0	17	1
			Type3	9	6.2	223.0	16	1
			Type3	10	8.9	208.0	18	1
			Type3	11	9.6	463.0	18	1
			Type3	12	8.2	441.0	17	1
			Type3	13	7.2	323.0	16	1
			Type3	14	9.5	297.0	18	1
			Type3	15	8.0	412.0	17	1
			Type3	16	10.0	324.0	18	1
			Type3	17	7.4	271.0	17	1
			Type3	18	7.9	349.0	17	1
			Type3	19	7.3	409.0	16	1
			Type3	20	8.7	373.0	18	1
			Type3	21	7.2	254.0	16	1
			Type3	22	9.9	274.0	18	1
			Type3	23	7.9	278.0	17	1
			Type3	24	7.5	317.0	17	1
			Type3	25	6.1	260.0	16	1
			Type3	26	8.8	211.0	18	1
			Type3	27	9.7	272.0	18	1
			Type3	28	7.4	264.0	17	1
			Type3	29	9.2	284.0	18	1
			Type4	0	16.0	355.0	14	1
			Type4	1	11.3	487.0	12	1
			Type4	2	13.5	344.0	13	1
			Type4	3	19.4	288.0	16	1
			Type4	4	17.5	230.0	15	1
			Type4	5	15.3	432.0	14	1
			Type4	6	15.9	207.0	14	1
			Type4	7	14.3	443.0	13	1
			Type4	8	15.8	439.0	14	1
			Type4	9	11.5	223.0	12	1
			Type4	10	17.4	208.0	15	1
			Type4	11	19.0	463.0	16	1
			Type4	12	16.0	441.0	14	1

Test Mode	Test Freq. (MHz)	Radar Freq. (MHz)	Radar Type	Trial ID	Pulse width (μs)	PRI(μs)	Pulses per Burst	Detection (1: Yes; 0: No)
11AC40MI MO	5310	5310	Type4	13	13.8	323.0	13	1
			Type4	14	18.9	297.0	16	1
			Type4	15	15.5	412.0	14	1
			Type4	16	19.9	324.0	16	1
			Type4	17	14.1	271.0	13	1
			Type4	18	15.2	349.0	14	1
			Type4	19	13.8	409.0	13	1
			Type4	20	17.1	373.0	15	1
			Type4	21	13.8	254.0	13	1
			Type4	22	19.8	274.0	16	1
			Type4	23	15.3	278.0	14	1
			Type4	24	14.5	317.0	13	1
			Type4	25	11.3	260.0	12	1
			Type4	26	17.3	211.0	15	1
			Type4	27	19.2	272.0	16	1
			Type4	28	14.2	264.0	13	1
11AC80MI MO	5290	5290	Type4	29	18.2	284.0	15	1
			Type1	0	1.0	938.0	57	1
			Type1	1	1.0	698.0	76	1
			Type1	2	1.0	618.0	86	1
			Type1	3	1.0	538.0	99	1
			Type1	4	1.0	878.0	61	1
			Type1	5	1.0	3066.0	18	1
			Type1	6	1.0	638.0	83	1
			Type1	7	1.0	918.0	58	1
			Type1	8	1.0	838.0	63	1
			Type1	9	1.0	858.0	62	1
			Type1	10	1.0	798.0	67	1
			Type1	11	1.0	718.0	74	1
			Type1	12	1.0	578.0	92	1
			Type1	13	1.0	598.0	89	1
			Type1	14	1.0	558.0	95	1
			Type1	15	1.0	2536.0	21	1
			Type1	16	1.0	966.0	55	1
			Type1	17	1.0	827.0	64	1
			Type1	18	1.0	2501.0	22	1
			Type1	19	1.0	2595.0	21	1
			Type1	20	1.0	1114.0	48	1
			Type1	21	1.0	1302.0	41	1
			Type1	22	1.0	3045.0	18	1
			Type1	23	1.0	1624.0	33	1
			Type1	24	1.0	2878.0	19	1
			Type1	25	1.0	1027.0	52	1
			Type1	26	1.0	2485.0	22	1
			Type1	27	1.0	1600.0	33	1
			Type1	28	1.0	1172.0	46	1
			Type1	29	1.0	1177.0	45	1
			Type2	0	3.2	179.0	26	1
			Type2	1	1.1	207.0	23	1
			Type2	2	2.1	230.0	24	1
			Type2	3	4.8	200.0	29	1
			Type2	4	3.9	214.0	28	1
			Type2	5	2.9	222.0	26	1
			Type2	6	3.2	204.0	26	1
			Type2	7	2.5	192.0	25	1

Test Mode	Test Freq. (MHz)	Radar Freq. (MHz)	Radar Type	Trial ID	Pulse width (μs)	PRI(μs)	Pulses per Burst	Detection (1: Yes; 0: No)
11AC80MI MO	5290	5290	Type2	8	3.1	164.0	26	1
			Type2	9	1.2	156.0	23	1
			Type2	10	3.9	210.0	27	1
			Type2	11	4.6	201.0	29	1
			Type2	12	3.2	162.0	26	1
			Type2	13	2.2	197.0	25	1
			Type2	14	4.5	163.0	29	1
			Type2	15	3.0	203.0	26	1
			Type2	16	5.0	168.0	29	1
			Type2	17	2.4	217.0	25	1
			Type2	18	2.9	191.0	26	1
			Type2	19	2.3	166.0	25	1
			Type2	20	3.7	150.0	27	1
			Type2	21	2.2	176.0	25	1
			Type2	22	4.9	195.0	29	1
			Type2	23	2.9	202.0	26	1
			Type2	24	2.5	178.0	25	1
			Type2	25	1.1	206.0	23	1
			Type2	26	3.8	155.0	27	1
			Type2	27	4.7	157.0	29	1
			Type2	28	2.4	224.0	25	1
			Type2	29	4.2	159.0	28	1
			Type3	0	8.2	355.0	17	1
			Type3	1	6.1	487.0	16	1
			Type3	2	7.1	344.0	16	1
			Type3	3	9.8	288.0	18	1
			Type3	4	8.9	230.0	18	1
			Type3	5	7.9	432.0	17	1
			Type3	6	8.2	207.0	17	1
			Type3	7	7.5	443.0	17	1
			Type3	8	8.1	439.0	17	1
			Type3	9	6.2	223.0	16	1
			Type3	10	8.9	208.0	18	1
			Type3	11	9.6	463.0	18	1
			Type3	12	8.2	441.0	17	1
			Type3	13	7.2	323.0	16	1
			Type3	14	9.5	297.0	18	1
			Type3	15	8.0	412.0	17	1
			Type3	16	10.0	324.0	18	1
			Type3	17	7.4	271.0	17	1
			Type3	18	7.9	349.0	17	1
			Type3	19	7.3	409.0	16	1
			Type3	20	8.7	373.0	18	1
			Type3	21	7.2	254.0	16	1
			Type3	22	9.9	274.0	18	1
			Type3	23	7.9	278.0	17	1
			Type3	24	7.5	317.0	17	1
			Type3	25	6.1	260.0	16	1
			Type3	26	8.8	211.0	18	1
			Type3	27	9.7	272.0	18	1
			Type3	28	7.4	264.0	17	1
			Type3	29	9.2	284.0	18	1
			Type4	0	16.0	355.0	14	1
			Type4	1	11.3	487.0	12	1
			Type4	2	13.5	344.0	13	1

Test Mode	Test Freq. (MHz)	Radar Freq. (MHz)	Radar Type	Trial ID	Pulse width (μs)	PRI(μs)	Pulses per Burst	Detection (1: Yes; 0: No)
11AC80MI MO	5290	5290	Type4	3	19.4	288.0	16	1
			Type4	4	17.5	230.0	15	1
			Type4	5	15.3	432.0	14	1
			Type4	6	15.9	207.0	14	1
			Type4	7	14.3	443.0	13	1
			Type4	8	15.8	439.0	14	1
			Type4	9	11.5	223.0	12	1
			Type4	10	17.4	208.0	15	1
			Type4	11	19.0	463.0	16	1
			Type4	12	16.0	441.0	14	1
			Type4	13	13.8	323.0	13	1
			Type4	14	18.9	297.0	16	1
			Type4	15	15.5	412.0	14	1
			Type4	16	19.9	324.0	16	1
			Type4	17	14.1	271.0	13	1
			Type4	18	15.2	349.0	14	1
			Type4	19	13.8	409.0	13	1
			Type4	20	17.1	373.0	15	1
			Type4	21	13.8	254.0	13	1
			Type4	22	19.8	274.0	16	1
			Type4	23	15.3	278.0	14	1
			Type4	24	14.5	317.0	13	1
			Type4	25	11.3	260.0	12	1
			Type4	26	17.3	211.0	15	1
			Type4	27	19.2	272.0	16	1
			Type4	28	14.2	264.0	13	1
			Type4	29	18.2	284.0	15	1
11AC160MI MO	5250	5290	Type1	0	1.0	938.0	57	1
			Type1	1	1.0	698.0	76	1
			Type1	2	1.0	618.0	86	1
			Type1	3	1.0	538.0	99	1
			Type1	4	1.0	878.0	61	1
			Type1	5	1.0	3066.0	18	1
			Type1	6	1.0	638.0	83	1
			Type1	7	1.0	918.0	58	1
			Type1	8	1.0	838.0	63	1
			Type1	9	1.0	858.0	62	1
			Type1	10	1.0	798.0	67	1
			Type1	11	1.0	718.0	74	1
			Type1	12	1.0	578.0	92	1
			Type1	13	1.0	598.0	89	1
			Type1	14	1.0	558.0	95	1
			Type1	15	1.0	2536.0	21	1
			Type1	16	1.0	966.0	55	1
			Type1	17	1.0	827.0	64	1
			Type1	18	1.0	2501.0	22	1
			Type1	19	1.0	2595.0	21	1
			Type1	20	1.0	1114.0	48	1
			Type1	21	1.0	1302.0	41	1
			Type1	22	1.0	3045.0	18	1
			Type1	23	1.0	1624.0	33	1
			Type1	24	1.0	2878.0	19	1
			Type1	25	1.0	1027.0	52	1
			Type1	26	1.0	2485.0	22	1
			Type1	27	1.0	1600.0	33	1
			Type1	28	1.0	1172.0	46	1

Test Mode	Test Freq. (MHz)	Radar Freq. (MHz)	Radar Type	Trial ID	Pulse width (μs)	PRI(μs)	Pulses per Burst	Detection (1: Yes; 0: No)
11AC160MI MO	5250	5290	Type1	29	1.0	1177.0	45	1
			Type2	0	3.2	179.0	26	1
			Type2	1	1.1	207.0	23	1
			Type2	2	2.1	230.0	24	1
			Type2	3	4.8	200.0	29	1
			Type2	4	3.9	214.0	28	1
			Type2	5	2.9	222.0	26	1
			Type2	6	3.2	204.0	26	1
			Type2	7	2.5	192.0	25	1
			Type2	8	3.1	164.0	26	1
			Type2	9	1.2	156.0	23	1
			Type2	10	3.9	210.0	27	1
			Type2	11	4.6	201.0	29	1
			Type2	12	3.2	162.0	26	1
			Type2	13	2.2	197.0	25	1
			Type2	14	4.5	163.0	29	1
			Type2	15	3.0	203.0	26	1
			Type2	16	5.0	168.0	29	1
			Type2	17	2.4	217.0	25	1
			Type2	18	2.9	191.0	26	1
			Type2	19	2.3	166.0	25	1
			Type2	20	3.7	150.0	27	1
			Type2	21	2.2	176.0	25	1
			Type2	22	4.9	195.0	29	1
			Type2	23	2.9	202.0	26	1
			Type2	24	2.5	178.0	25	1
			Type2	25	1.1	206.0	23	1
			Type2	26	3.8	155.0	27	1
			Type2	27	4.7	157.0	29	1
			Type2	28	2.4	224.0	25	1
			Type2	29	4.2	159.0	28	1
			Type3	0	8.2	355.0	17	1
			Type3	1	6.1	487.0	16	1
			Type3	2	7.1	344.0	16	1
			Type3	3	9.8	288.0	18	1
			Type3	4	8.9	230.0	18	1
			Type3	5	7.9	432.0	17	1
			Type3	6	8.2	207.0	17	1
			Type3	7	7.5	443.0	17	1
			Type3	8	8.1	439.0	17	1
			Type3	9	6.2	223.0	16	1
			Type3	10	8.9	208.0	18	1
			Type3	11	9.6	463.0	18	1
			Type3	12	8.2	441.0	17	1
			Type3	13	7.2	323.0	16	1
			Type3	14	9.5	297.0	18	1
			Type3	15	8.0	412.0	17	1
			Type3	16	10.0	324.0	18	1
			Type3	17	7.4	271.0	17	1
			Type3	18	7.9	349.0	17	1
			Type3	19	7.3	409.0	16	1
			Type3	20	8.7	373.0	18	1
			Type3	21	7.2	254.0	16	1
			Type3	22	9.9	274.0	18	1
			Type3	23	7.9	278.0	17	1

Test Mode	Test Freq. (MHz)	Radar Freq. (MHz)	Radar Type	Trial ID	Pulse width (μs)	PRI(μs)	Pulses per Burst	Detection (1: Yes; 0: No)
11AC160MI MO	5250	5290	Type3	24	7.5	317.0	17	1
			Type3	25	6.1	260.0	16	1
			Type3	26	8.8	211.0	18	1
			Type3	27	9.7	272.0	18	1
			Type3	28	7.4	264.0	17	1
			Type3	29	9.2	284.0	18	1
			Type4	0	16.0	355.0	14	1
			Type4	1	11.3	487.0	12	1
			Type4	2	13.5	344.0	13	1
			Type4	3	19.4	288.0	16	1
			Type4	4	17.5	230.0	15	1
			Type4	5	15.3	432.0	14	1
			Type4	6	15.9	207.0	14	1
			Type4	7	14.3	443.0	13	1
			Type4	8	15.8	439.0	14	1
			Type4	9	11.5	223.0	12	1
			Type4	10	17.4	208.0	15	1
			Type4	11	19.0	463.0	16	1
			Type4	12	16.0	441.0	14	1
			Type4	13	13.8	323.0	13	1
			Type4	14	18.9	297.0	16	1
			Type4	15	15.5	412.0	14	1
			Type4	16	19.9	324.0	16	1
			Type4	17	14.1	271.0	13	1
			Type4	18	15.2	349.0	14	1
			Type4	19	13.8	409.0	13	1
			Type4	20	17.1	373.0	15	1
			Type4	21	13.8	254.0	13	1
			Type4	22	19.8	274.0	16	1
			Type4	23	15.3	278.0	14	1
			Type4	24	14.5	317.0	13	1
			Type4	25	11.3	260.0	12	1
			Type4	26	17.3	211.0	15	1
			Type4	27	19.2	272.0	16	1
			Type4	28	14.2	264.0	13	1
			Type4	29	18.2	284.0	15	1

Test Mode	Test Freq. (MHz)	Radar Freq. (MHz)	Radar Type	Trial ID	Number Of Bursts	Waveform Length (s)	Radar Freq.	Detection (1: Yes; 0: No)
11A	5320	5320	Type5	0	15	12	5320	1
			Type5	1	8	12	5320	1
			Type5	2	11	12	5320	1
			Type5	3	20	12	5320	1
			Type5	4	17	12	5320	1
			Type5	5	14	12	5320	1
			Type5	6	15	12	5320	1
			Type5	7	12	12	5320	1
			Type5	8	14	12	5320	1
			Type5	9	8	12	5320	1
			Type5	10	17	12	5317.975	1
			Type5	11	19	12	5319.175	1
			Type5	12	15	12	5316.775	1
			Type5	13	12	12	5315.575	1
			Type5	14	19	12	5318.775	1
			Type5	15	14	12	5316.375	1
			Type5	16	20	12	5319.575	1
			Type5	17	12	12	5315.575	1
			Type5	18	14	12	5316.375	1
			Type5	19	12	12	5315.575	1
			Type5	20	16	12	5322.425	1
			Type5	21	12	12	5324.825	1
			Type5	22	20	12	5320.425	1
			Type5	23	14	12	5323.625	1
			Type5	24	13	12	5324.025	1
			Type5	25	8	12	5326.425	1
			Type5	26	17	12	5322.025	1
			Type5	27	19	12	5320.825	1
			Type5	28	12	12	5324.425	1
			Type5	29	18	12	5321.625	1
11AC40MI MO	5310	5310	Type5	0	15	12	5310	1
			Type5	1	8	12	5310	1
			Type5	2	11	12	5310	1
			Type5	3	20	12	5310	1
			Type5	4	17	12	5310	1
			Type5	5	14	12	5310	1
			Type5	6	15	12	5310	1
			Type5	7	12	12	5310	1
			Type5	8	14	12	5310	1
			Type5	9	8	12	5310	1
			Type5	10	17	12	5297.95	1
			Type5	11	19	12	5299.15	1
			Type5	12	15	12	5296.75	1
			Type5	13	12	12	5295.55	1
			Type5	14	19	12	5298.75	1
			Type5	15	14	12	5296.35	1
			Type5	16	20	12	5299.55	1
			Type5	17	12	12	5295.55	1
			Type5	18	14	12	5296.35	1
			Type5	19	12	12	5295.55	1
			Type5	20	16	12	5322.45	1
			Type5	21	12	12	5324.85	1
			Type5	22	20	12	5320.45	1
			Type5	23	14	12	5323.65	1
			Type5	24	13	12	5324.05	1
			Type5	25	8	12	5326.45	1
			Type5	26	17	12	5322.05	1
			Type5	27	19	12	5320.85	1
			Type5	28	12	12	5324.45	1
			Type5	29	18	12	5321.65	1

Test Mode	Test Freq. (MHz)	Radar Freq. (MHz)	Radar Type	Trial ID	Number Of Bursts	Waveform Length (s)	Radar Freq.	Detection (1: Yes; 0: No)
11AC80MI MO	5290	5290	Type5	0	15	12	5290	1
			Type5	1	8	12	5290	1
			Type5	2	11	12	5290	1
			Type5	3	20	12	5290	1
			Type5	4	17	12	5290	1
			Type5	5	14	12	5290	1
			Type5	6	15	12	5290	1
			Type5	7	12	12	5290	1
			Type5	8	14	12	5290	1
			Type5	9	8	12	5290	1
			Type5	10	17	12	5258.2	1
			Type5	11	19	12	5259.4	1
			Type5	12	15	12	5257	1
			Type5	13	12	12	5255.8	1
			Type5	14	19	12	5259	1
			Type5	15	14	12	5256.6	1
			Type5	16	20	12	5259.8	1
			Type5	17	12	12	5255.8	1
			Type5	18	14	12	5256.6	1
			Type5	19	12	12	5255.8	1
			Type5	20	16	12	5322.2	1
			Type5	21	12	12	5324.6	1
			Type5	22	20	12	5320.2	1
			Type5	23	14	12	5323.4	1
			Type5	24	13	12	5323.8	1
			Type5	25	8	12	5326.2	1
			Type5	26	17	12	5321.8	1
			Type5	27	19	12	5320.6	1
			Type5	28	12	12	5324.2	1
			Type5	29	18	12	5321.4	1
11AC160MI MO	5250	5290	Type5	0	15	12	5290	1
			Type5	1	8	12	5290	1
			Type5	2	11	12	5290	1
			Type5	3	20	12	5290	1
			Type5	4	17	12	5290	1
			Type5	5	14	12	5290	1
			Type5	6	15	12	5290	1
			Type5	7	12	12	5290	1
			Type5	8	14	12	5290	1
			Type5	9	8	12	5290	1
			Type5	10	17	12	5218.4	1
			Type5	11	19	12	5219.6	1
			Type5	12	15	12	5217.2	1
			Type5	13	12	12	5216	1
			Type5	14	19	12	5219.2	1
			Type5	15	14	12	5216.8	1
			Type5	16	20	12	5220	1
			Type5	17	12	12	5216	1
			Type5	18	14	12	5216.8	1
			Type5	19	12	12	5216	1
			Type5	20	16	12	5362	1
			Type5	21	12	12	5364.4	1
			Type5	22	20	12	5360	1
			Type5	23	14	12	5363.2	1
			Type5	24	13	12	5363.6	1
			Type5	25	8	12	5366	1
			Type5	26	17	12	5361.6	1
			Type5	27	19	12	5360.4	1
			Type5	28	12	12	5364	1
			Type5	29	18	12	5361.2	1

Test Mode	Test Freq. (MHz)	Radar Freq. (MHz)	Radar Type	Trial ID	Pulse width (μs)	PRI (μs)	Pulses per Hop	Detection (1: Yes; 0: No)
11A	5320	5320	Type6	0	1	333.3	9	1
			Type6	1	1	333.3	9	1
			Type6	2	1	333.3	9	1
			Type6	3	1	333.3	9	1
			Type6	4	1	333.3	9	1
			Type6	5	1	333.3	9	1
			Type6	6	1	333.3	9	1
			Type6	7	1	333.3	9	1
			Type6	8	1	333.3	9	1
			Type6	9	1	333.3	9	1
			Type6	10	1	333.3	9	1
			Type6	11	1	333.3	9	1
			Type6	12	1	333.3	9	1
			Type6	13	1	333.3	9	1
			Type6	14	1	333.3	9	1
			Type6	15	1	333.3	9	1
			Type6	16	1	333.3	9	1
			Type6	17	1	333.3	9	1
			Type6	18	1	333.3	9	1
			Type6	19	1	333.3	9	1
			Type6	20	1	333.3	9	1
			Type6	21	1	333.3	9	1
			Type6	22	1	333.3	9	1
			Type6	23	1	333.3	9	1
			Type6	24	1	333.3	9	1
			Type6	25	1	333.3	9	1
			Type6	26	1	333.3	9	1
			Type6	27	1	333.3	9	1
			Type6	28	1	333.3	9	1
			Type6	29	1	333.3	9	1
11AC40MI MO	5310	5310	Type6	0	1	333.3	9	1
			Type6	1	1	333.3	9	1
			Type6	2	1	333.3	9	1
			Type6	3	1	333.3	9	1
			Type6	4	1	333.3	9	1
			Type6	5	1	333.3	9	1
			Type6	6	1	333.3	9	1
			Type6	7	1	333.3	9	1
			Type6	8	1	333.3	9	1
			Type6	9	1	333.3	9	1
			Type6	10	1	333.3	9	1
			Type6	11	1	333.3	9	1
			Type6	12	1	333.3	9	1
			Type6	13	1	333.3	9	1
			Type6	14	1	333.3	9	1
			Type6	15	1	333.3	9	1
			Type6	16	1	333.3	9	1
			Type6	17	1	333.3	9	1
			Type6	18	1	333.3	9	1
			Type6	19	1	333.3	9	1
			Type6	20	1	333.3	9	1
			Type6	21	1	333.3	9	1
			Type6	22	1	333.3	9	1
			Type6	23	1	333.3	9	1
			Type6	24	1	333.3	9	1
			Type6	25	1	333.3	9	1
			Type6	26	1	333.3	9	1
			Type6	27	1	333.3	9	1
			Type6	28	1	333.3	9	1
			Type6	29	1	333.3	9	1

Test Mode	Test Freq. (MHz)	Radar Freq. (MHz)	Radar Type	Trial ID	Pulse width (μs)	PRI (μs)	Pulses per Hop	Detection (1: Yes; 0: No)
11AC80MI MO	5290	5290	Type6	0	1	333.3	9	1
			Type6	1	1	333.3	9	1
			Type6	2	1	333.3	9	1
			Type6	3	1	333.3	9	1
			Type6	4	1	333.3	9	1
			Type6	5	1	333.3	9	1
			Type6	6	1	333.3	9	1
			Type6	7	1	333.3	9	1
			Type6	8	1	333.3	9	1
			Type6	9	1	333.3	9	1
			Type6	10	1	333.3	9	1
			Type6	11	1	333.3	9	1
			Type6	12	1	333.3	9	1
			Type6	13	1	333.3	9	1
			Type6	14	1	333.3	9	1
			Type6	15	1	333.3	9	1
			Type6	16	1	333.3	9	1
			Type6	17	1	333.3	9	1
			Type6	18	1	333.3	9	1
			Type6	19	1	333.3	9	1
			Type6	20	1	333.3	9	1
			Type6	21	1	333.3	9	1
			Type6	22	1	333.3	9	1
			Type6	23	1	333.3	9	1
			Type6	24	1	333.3	9	1
			Type6	25	1	333.3	9	1
			Type6	26	1	333.3	9	1
			Type6	27	1	333.3	9	1
			Type6	28	1	333.3	9	1
			Type6	29	1	333.3	9	1
11AC160MI MO	5250	5290	Type6	0	1	333.3	9	1
			Type6	1	1	333.3	9	1
			Type6	2	1	333.3	9	1
			Type6	3	1	333.3	9	1
			Type6	4	1	333.3	9	1
			Type6	5	1	333.3	9	1
			Type6	6	1	333.3	9	1
			Type6	7	1	333.3	9	1
			Type6	8	1	333.3	9	1
			Type6	9	1	333.3	9	1
			Type6	10	1	333.3	9	1
			Type6	11	1	333.3	9	1
			Type6	12	1	333.3	9	1
			Type6	13	1	333.3	9	1
			Type6	14	1	333.3	9	1
			Type6	15	1	333.3	9	1
			Type6	16	1	333.3	9	1
			Type6	17	1	333.3	9	1
			Type6	18	1	333.3	9	1
			Type6	19	1	333.3	9	1
			Type6	20	1	333.3	9	1
			Type6	21	1	333.3	9	1
			Type6	22	1	333.3	9	1
			Type6	23	1	333.3	9	1
			Type6	24	1	333.3	9	1
			Type6	25	1	333.3	9	1
			Type6	26	1	333.3	9	1
			Type6	27	1	333.3	9	1
			Type6	28	1	333.3	9	1
			Type6	29	1	333.3	9	1

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
11A	5320	Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
11A	5320	Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
11A	5320	Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
11A	5320	Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
11A	5320	Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
11A	5320	Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
11A	5320	Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
11A	5320	Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
11A	5320	Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
11A	5320	Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
11A	5320	Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
11A	5320	Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
11A	5320	Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
11A	5320	Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0
11AC40MIMO	5310	Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
11AC40MIMO	5310	Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
11AC40MIMO	5310	Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
11AC40MIMO	5310	Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
11AC40MIMO	5310	Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
11AC40MIMO	5310	Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
11AC40MIMO	5310	Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
11AC40MIMO	5310	Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
11AC40MIMO	5310	Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
11AC40MIMO	5310	Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
11AC40MIMO	5310	Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
11AC40MIMO	5310	Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
11AC40MIMO	5310	Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
11AC40MIMO	5310	Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
11AC40MIMO	5310	Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0
11AC80MIMO	5290	Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
11AC80MIMO	5290	Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
11AC80MIMO	5290	Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
11AC80MIMO	5290	Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
11AC80MIMO	5290	Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
11AC80MIMO	5290	Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
11AC80MIMO	5290	Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
11AC80MIMO	5290	Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
11AC80MIMO	5290	Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
11AC80MIMO	5290	Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
11AC80MIMO	5290	Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
11AC80MIMO	5290	Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
11AC80MIMO	5290	Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
11AC80MIMO	5290	Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
11AC80MIMO	5290	Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0
11AC160MIMO	5290	Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
11AC160MIMO	5290	Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
11AC160MIMO	5290	Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
11AC160MIMO	5290	Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
11AC160MIMO	5290	Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
11AC160MIMO	5290	Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
11AC160MIMO	5290	Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
11AC160MIMO	5290	Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
11AC160MIMO	5290	Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
11AC160MIMO	5290	Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
11AC160MIMO	5290	Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
11AC160MIMO	5290	Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
11AC160MIMO	5290	Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
11AC160MIMO	5290	Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
11AC160MIMO	5290	Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
11A	5320	Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
11A	5320	Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
11A	5320	Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
11A	5320	Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
11A	5320	Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
11A	5320	Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
11A	5320	Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0
11AC40MIMO	5310	Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
11AC40MIMO	5310	Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
11AC40MIMO	5310	Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
11AC40MIMO	5310	Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
11AC40MIMO	5310	Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
11AC40MIMO	5310	Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
11AC40MIMO	5310	Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
11AC40MIMO	5310	Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0
11AC80MIMO	5290	Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
11AC80MIMO	5290	Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
11AC80MIMO	5290	Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
11AC80MIMO	5290	Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
11AC80MIMO	5290	Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
11AC80MIMO	5290	Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
11AC80MIMO	5290	Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
11AC80MIMO	5290	Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0
11AC160MIMO	5290	Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
11AC160MIMO	5290	Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
11AC160MIMO	5290	Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
11AC160MIMO	5290	Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
11AC160MIMO	5290	Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
11AC160MIMO	5290	Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
11AC160MIMO	5290	Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
11AC160MIMO	5290	Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
11A	5320	Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
11A	5320	Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
11A	5320	Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
11A	5320	Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
11A	5320	Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---
11A	5320	Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
11A	5320	Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
11A	5320	Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
11A	5320	Type5	2	9	609331.0	9	1	53.7	1597.0	---	---
11A	5320	Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0
11AC40MIMO	5310	Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
11AC40MIMO	5310	Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
11AC40MIMO	5310	Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
11AC40MIMO	5310	Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
11AC40MIMO	5310	Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
11AC40MIMO	5310	Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---
11AC40MIMO	5310	Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
11AC40MIMO	5310	Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
11AC40MIMO	5310	Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
11AC40MIMO	5310	Type5	2	9	609331.0	9	1	53.7	1597.0	---	---
11AC40MIMO	5310	Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0
11AC80MIMO	5290	Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
11AC80MIMO	5290	Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
11AC80MIMO	5290	Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
11AC80MIMO	5290	Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
11AC80MIMO	5290	Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
11AC80MIMO	5290	Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---
11AC80MIMO	5290	Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
11AC80MIMO	5290	Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
11AC80MIMO	5290	Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
11AC80MIMO	5290	Type5	2	9	609331.0	9	1	53.7	1597.0	---	---
11AC80MIMO	5290	Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0
11AC160MIMO	5290	Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
11AC160MIMO	5290	Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
11AC160MIMO	5290	Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
11AC160MIMO	5290	Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
11AC160MIMO	5290	Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
11AC160MIMO	5290	Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---
11AC160MIMO	5290	Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
11AC160MIMO	5290	Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
11AC160MIMO	5290	Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
11AC160MIMO	5290	Type5	2	9	609331.0	9	1	53.7	1597.0	---	---
11AC160MIMO	5290	Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
11A	5320	Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
11A	5320	Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
11A	5320	Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
11A	5320	Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
11A	5320	Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
11A	5320	Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
11A	5320	Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
11A	5320	Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
11A	5320	Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
11A	5320	Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
11A	5320	Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
11A	5320	Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
11A	5320	Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
11A	5320	Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
11A	5320	Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
11A	5320	Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
11A	5320	Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
11A	5320	Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
11A	5320	Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---
11AC40MIMO	5310	Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
11AC40MIMO	5310	Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
11AC40MIMO	5310	Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
11AC40MIMO	5310	Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
11AC40MIMO	5310	Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
11AC40MIMO	5310	Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
11AC40MIMO	5310	Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
11AC40MIMO	5310	Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
11AC40MIMO	5310	Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
11AC40MIMO	5310	Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
11AC40MIMO	5310	Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
11AC40MIMO	5310	Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
11AC40MIMO	5310	Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
11AC40MIMO	5310	Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
11AC40MIMO	5310	Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
11AC40MIMO	5310	Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
11AC40MIMO	5310	Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
11AC40MIMO	5310	Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
11AC40MIMO	5310	Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
11AC40MIMO	5310	Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---
11AC80MIMO	5290	Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
11AC80MIMO	5290	Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
11AC80MIMO	5290	Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
11AC80MIMO	5290	Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
11AC80MIMO	5290	Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
11AC80MIMO	5290	Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
11AC80MIMO	5290	Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
11AC80MIMO	5290	Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
11AC80MIMO	5290	Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
11AC80MIMO	5290	Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
11AC80MIMO	5290	Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
11AC80MIMO	5290	Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
11AC80MIMO	5290	Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
11AC80MIMO	5290	Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
11AC80MIMO	5290	Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
11AC80MIMO	5290	Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
11AC80MIMO	5290	Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
11AC80MIMO	5290	Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
11AC80MIMO	5290	Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
11AC80MIMO	5290	Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---
11AC160MIMO	5290	Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
11AC160MIMO	5290	Type5	3	1	171821.0	19	1	58.7	1251.0	---	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AC160MIMO	5290	Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
11AC160MIMO	5290	Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
11AC160MIMO	5290	Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
11AC160MIMO	5290	Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
11AC160MIMO	5290	Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
11AC160MIMO	5290	Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
11AC160MIMO	5290	Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
11AC160MIMO	5290	Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
11AC160MIMO	5290	Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
11AC160MIMO	5290	Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
11AC160MIMO	5290	Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
11AC160MIMO	5290	Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
11AC160MIMO	5290	Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
11AC160MIMO	5290	Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
11AC160MIMO	5290	Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
11AC160MIMO	5290	Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
11AC160MIMO	5290	Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
11AC160MIMO	5290	Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
11A	5320	Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
11A	5320	Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
11A	5320	Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
11A	5320	Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
11A	5320	Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
11A	5320	Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
11A	5320	Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
11A	5320	Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
11A	5320	Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
11A	5320	Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
11A	5320	Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
11A	5320	Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
11A	5320	Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
11A	5320	Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
11A	5320	Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
11A	5320	Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0
11AC40MIMO	5310	Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
11AC40MIMO	5310	Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
11AC40MIMO	5310	Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
11AC40MIMO	5310	Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
11AC40MIMO	5310	Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
11AC40MIMO	5310	Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
11AC40MIMO	5310	Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
11AC40MIMO	5310	Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
11AC40MIMO	5310	Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
11AC40MIMO	5310	Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
11AC40MIMO	5310	Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
11AC40MIMO	5310	Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
11AC40MIMO	5310	Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
11AC40MIMO	5310	Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
11AC40MIMO	5310	Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
11AC40MIMO	5310	Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
11AC40MIMO	5310	Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0
11AC80MIMO	5290	Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
11AC80MIMO	5290	Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
11AC80MIMO	5290	Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
11AC80MIMO	5290	Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
11AC80MIMO	5290	Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
11AC80MIMO	5290	Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
11AC80MIMO	5290	Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
11AC80MIMO	5290	Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
11AC80MIMO	5290	Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
11AC80MIMO	5290	Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
11AC80MIMO	5290	Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
11AC80MIMO	5290	Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
11AC80MIMO	5290	Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
11AC80MIMO	5290	Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
11AC80MIMO	5290	Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
11AC80MIMO	5290	Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
11AC80MIMO	5290	Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0
11AC160MIMO	5290	Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
11AC160MIMO	5290	Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
11AC160MIMO	5290	Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
11AC160MIMO	5290	Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
11AC160MIMO	5290	Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
11AC160MIMO	5290	Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
11AC160MIMO	5290	Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
11AC160MIMO	5290	Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
11AC160MIMO	5290	Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
11AC160MIMO	5290	Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
11AC160MIMO	5290	Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AC160MIMO	5290	Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
11AC160MIMO	5290	Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
11AC160MIMO	5290	Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
11AC160MIMO	5290	Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
11AC160MIMO	5290	Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
11AC160MIMO	5290	Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
11A	5320	Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
11A	5320	Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
11A	5320	Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
11A	5320	Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
11A	5320	Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
11A	5320	Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
11A	5320	Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
11A	5320	Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
11A	5320	Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
11A	5320	Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
11A	5320	Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
11A	5320	Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
11A	5320	Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---
11AC40MIMO	5310	Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
11AC40MIMO	5310	Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
11AC40MIMO	5310	Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
11AC40MIMO	5310	Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
11AC40MIMO	5310	Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
11AC40MIMO	5310	Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
11AC40MIMO	5310	Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
11AC40MIMO	5310	Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
11AC40MIMO	5310	Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
11AC40MIMO	5310	Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
11AC40MIMO	5310	Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
11AC40MIMO	5310	Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
11AC40MIMO	5310	Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
11AC40MIMO	5310	Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---
11AC80MIMO	5290	Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
11AC80MIMO	5290	Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
11AC80MIMO	5290	Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
11AC80MIMO	5290	Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
11AC80MIMO	5290	Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
11AC80MIMO	5290	Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
11AC80MIMO	5290	Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
11AC80MIMO	5290	Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
11AC80MIMO	5290	Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
11AC80MIMO	5290	Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
11AC80MIMO	5290	Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
11AC80MIMO	5290	Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
11AC80MIMO	5290	Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
11AC80MIMO	5290	Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---
11AC160MIMO	5290	Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
11AC160MIMO	5290	Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
11AC160MIMO	5290	Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
11AC160MIMO	5290	Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
11AC160MIMO	5290	Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
11AC160MIMO	5290	Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
11AC160MIMO	5290	Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
11AC160MIMO	5290	Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
11AC160MIMO	5290	Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
11AC160MIMO	5290	Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
11AC160MIMO	5290	Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
11AC160MIMO	5290	Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
11AC160MIMO	5290	Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
11AC160MIMO	5290	Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0
11A	5320	Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
11A	5320	Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
11A	5320	Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
11A	5320	Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
11A	5320	Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
11A	5320	Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
11A	5320	Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
11A	5320	Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
11A	5320	Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
11A	5320	Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
11A	5320	Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
11A	5320	Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
11A	5320	Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
11A	5320	Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0
11AC40MIMO	5310	Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0
11AC40MIMO	5310	Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
11AC40MIMO	5310	Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
11AC40MIMO	5310	Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
11AC40MIMO	5310	Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
11AC40MIMO	5310	Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
11AC40MIMO	5310	Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
11AC40MIMO	5310	Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
11AC40MIMO	5310	Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
11AC40MIMO	5310	Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
11AC40MIMO	5310	Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
11AC40MIMO	5310	Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
11AC40MIMO	5310	Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
11AC40MIMO	5310	Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
11AC40MIMO	5310	Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0
11AC80MIMO	5290	Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0
11AC80MIMO	5290	Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
11AC80MIMO	5290	Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
11AC80MIMO	5290	Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
11AC80MIMO	5290	Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
11AC80MIMO	5290	Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
11AC80MIMO	5290	Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
11AC80MIMO	5290	Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
11AC80MIMO	5290	Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
11AC80MIMO	5290	Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
11AC80MIMO	5290	Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
11AC80MIMO	5290	Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
11AC80MIMO	5290	Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
11AC80MIMO	5290	Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
11AC80MIMO	5290	Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0
11AC160MIMO	5290	Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0
11AC160MIMO	5290	Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
11AC160MIMO	5290	Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
11AC160MIMO	5290	Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
11AC160MIMO	5290	Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
11AC160MIMO	5290	Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
11AC160MIMO	5290	Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
11AC160MIMO	5290	Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
11AC160MIMO	5290	Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
11AC160MIMO	5290	Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
11AC160MIMO	5290	Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
11AC160MIMO	5290	Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
11AC160MIMO	5290	Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
11AC160MIMO	5290	Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
11AC160MIMO	5290	Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
11A	5320	Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
11A	5320	Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
11A	5320	Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
11A	5320	Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
11A	5320	Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
11A	5320	Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
11A	5320	Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
11A	5320	Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
11A	5320	Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
11A	5320	Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
11A	5320	Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0
11AC40MIMO	5310	Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
11AC40MIMO	5310	Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
11AC40MIMO	5310	Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
11AC40MIMO	5310	Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
11AC40MIMO	5310	Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
11AC40MIMO	5310	Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
11AC40MIMO	5310	Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
11AC40MIMO	5310	Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
11AC40MIMO	5310	Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
11AC40MIMO	5310	Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
11AC40MIMO	5310	Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
11AC40MIMO	5310	Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0
11AC80MIMO	5290	Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
11AC80MIMO	5290	Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
11AC80MIMO	5290	Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
11AC80MIMO	5290	Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
11AC80MIMO	5290	Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
11AC80MIMO	5290	Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
11AC80MIMO	5290	Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
11AC80MIMO	5290	Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
11AC80MIMO	5290	Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
11AC80MIMO	5290	Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
11AC80MIMO	5290	Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
11AC80MIMO	5290	Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0
11AC160MIMO	5290	Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
11AC160MIMO	5290	Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
11AC160MIMO	5290	Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
11AC160MIMO	5290	Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
11AC160MIMO	5290	Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
11AC160MIMO	5290	Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
11AC160MIMO	5290	Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
11AC160MIMO	5290	Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
11AC160MIMO	5290	Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
11AC160MIMO	5290	Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
11AC160MIMO	5290	Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
11AC160MIMO	5290	Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
11A	5320	Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
11A	5320	Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
11A	5320	Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
11A	5320	Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
11A	5320	Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
11A	5320	Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
11A	5320	Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
11A	5320	Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
11A	5320	Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
11A	5320	Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
11A	5320	Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
11A	5320	Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
11A	5320	Type5	8	13	98172.0	13	1	64.3	1937.0	---	---
11AC40MIMO	5310	Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
11AC40MIMO	5310	Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
11AC40MIMO	5310	Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
11AC40MIMO	5310	Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
11AC40MIMO	5310	Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
11AC40MIMO	5310	Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
11AC40MIMO	5310	Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
11AC40MIMO	5310	Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
11AC40MIMO	5310	Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
11AC40MIMO	5310	Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
11AC40MIMO	5310	Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
11AC40MIMO	5310	Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
11AC40MIMO	5310	Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
11AC40MIMO	5310	Type5	8	13	98172.0	13	1	64.3	1937.0	---	---
11AC80MIMO	5290	Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
11AC80MIMO	5290	Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
11AC80MIMO	5290	Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
11AC80MIMO	5290	Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
11AC80MIMO	5290	Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
11AC80MIMO	5290	Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
11AC80MIMO	5290	Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
11AC80MIMO	5290	Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
11AC80MIMO	5290	Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
11AC80MIMO	5290	Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
11AC80MIMO	5290	Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
11AC80MIMO	5290	Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
11AC80MIMO	5290	Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
11AC80MIMO	5290	Type5	8	13	98172.0	13	1	64.3	1937.0	---	---
11AC160MIMO	5290	Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
11AC160MIMO	5290	Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
11AC160MIMO	5290	Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
11AC160MIMO	5290	Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
11AC160MIMO	5290	Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
11AC160MIMO	5290	Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
11AC160MIMO	5290	Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
11AC160MIMO	5290	Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
11AC160MIMO	5290	Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
11AC160MIMO	5290	Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
11AC160MIMO	5290	Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
11AC160MIMO	5290	Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
11AC160MIMO	5290	Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
11AC160MIMO	5290	Type5	8	13	98172.0	13	1	64.3	1937.0	---	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
11A	5320	Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
11A	5320	Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0
11A	5320	Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
11A	5320	Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
11A	5320	Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
11A	5320	Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
11A	5320	Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0
11AC40MIMO	5310	Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
11AC40MIMO	5310	Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
11AC40MIMO	5310	Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0
11AC40MIMO	5310	Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
11AC40MIMO	5310	Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
11AC40MIMO	5310	Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
11AC40MIMO	5310	Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
11AC40MIMO	5310	Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0
11AC80MIMO	5290	Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
11AC80MIMO	5290	Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
11AC80MIMO	5290	Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0
11AC80MIMO	5290	Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
11AC80MIMO	5290	Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
11AC80MIMO	5290	Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
11AC80MIMO	5290	Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
11AC80MIMO	5290	Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0
11AC160MIMO	5290	Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
11AC160MIMO	5290	Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
11AC160MIMO	5290	Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0
11AC160MIMO	5290	Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
11AC160MIMO	5290	Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
11AC160MIMO	5290	Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
11AC160MIMO	5290	Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
11AC160MIMO	5290	Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
11A	5320	Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
11A	5320	Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
11A	5320	Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
11A	5320	Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
11A	5320	Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
11A	5320	Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
11A	5320	Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
11A	5320	Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
11A	5320	Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
11A	5320	Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
11A	5320	Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---
11A	5320	Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
11A	5320	Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
11A	5320	Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
11A	5320	Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
11A	5320	Type5	10	16	125509.0	16	1	59.3	1093.0	---	---
11AC40MIMO	5310	Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
11AC40MIMO	5310	Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
11AC40MIMO	5310	Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
11AC40MIMO	5310	Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
11AC40MIMO	5310	Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
11AC40MIMO	5310	Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
11AC40MIMO	5310	Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
11AC40MIMO	5310	Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
11AC40MIMO	5310	Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
11AC40MIMO	5310	Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
11AC40MIMO	5310	Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
11AC40MIMO	5310	Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---
11AC40MIMO	5310	Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
11AC40MIMO	5310	Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
11AC40MIMO	5310	Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
11AC40MIMO	5310	Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
11AC40MIMO	5310	Type5	10	16	125509.0	16	1	59.3	1093.0	---	---
11AC80MIMO	5290	Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
11AC80MIMO	5290	Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
11AC80MIMO	5290	Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
11AC80MIMO	5290	Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
11AC80MIMO	5290	Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
11AC80MIMO	5290	Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
11AC80MIMO	5290	Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
11AC80MIMO	5290	Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
11AC80MIMO	5290	Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
11AC80MIMO	5290	Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
11AC80MIMO	5290	Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
11AC80MIMO	5290	Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---
11AC80MIMO	5290	Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
11AC80MIMO	5290	Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
11AC80MIMO	5290	Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
11AC80MIMO	5290	Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
11AC80MIMO	5290	Type5	10	16	125509.0	16	1	59.3	1093.0	---	---
11AC160MIMO	5290	Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
11AC160MIMO	5290	Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
11AC160MIMO	5290	Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
11AC160MIMO	5290	Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
11AC160MIMO	5290	Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
11AC160MIMO	5290	Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
11AC160MIMO	5290	Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
11AC160MIMO	5290	Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
11AC160MIMO	5290	Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
11AC160MIMO	5290	Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
11AC160MIMO	5290	Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AC160MIMO	5290	Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---
11AC160MIMO	5290	Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
11AC160MIMO	5290	Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
11AC160MIMO	5290	Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
11AC160MIMO	5290	Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
11AC160MIMO	5290	Type5	10	16	125509.0	16	1	59.3	1093.0	---	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
11A	5320	Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
11A	5320	Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
11A	5320	Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
11A	5320	Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
11A	5320	Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
11A	5320	Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
11A	5320	Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
11A	5320	Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
11A	5320	Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
11A	5320	Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
11A	5320	Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
11A	5320	Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
11A	5320	Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
11A	5320	Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
11A	5320	Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
11A	5320	Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
11A	5320	Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
11A	5320	Type5	11	18	495737.0	19	1	55.0	1012.0	---	---
11AC40MIMO	5310	Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
11AC40MIMO	5310	Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
11AC40MIMO	5310	Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
11AC40MIMO	5310	Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
11AC40MIMO	5310	Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
11AC40MIMO	5310	Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
11AC40MIMO	5310	Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
11AC40MIMO	5310	Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
11AC40MIMO	5310	Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
11AC40MIMO	5310	Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
11AC40MIMO	5310	Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
11AC40MIMO	5310	Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
11AC40MIMO	5310	Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
11AC40MIMO	5310	Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
11AC40MIMO	5310	Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
11AC40MIMO	5310	Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
11AC40MIMO	5310	Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
11AC40MIMO	5310	Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
11AC40MIMO	5310	Type5	11	18	495737.0	19	1	55.0	1012.0	---	---
11AC80MIMO	5290	Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
11AC80MIMO	5290	Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
11AC80MIMO	5290	Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
11AC80MIMO	5290	Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
11AC80MIMO	5290	Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
11AC80MIMO	5290	Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
11AC80MIMO	5290	Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
11AC80MIMO	5290	Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
11AC80MIMO	5290	Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
11AC80MIMO	5290	Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
11AC80MIMO	5290	Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
11AC80MIMO	5290	Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
11AC80MIMO	5290	Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
11AC80MIMO	5290	Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
11AC80MIMO	5290	Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
11AC80MIMO	5290	Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
11AC80MIMO	5290	Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
11AC80MIMO	5290	Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
11AC80MIMO	5290	Type5	11	18	495737.0	19	1	55.0	1012.0	---	---
11AC160MIMO	5290	Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
11AC160MIMO	5290	Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
11AC160MIMO	5290	Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
11AC160MIMO	5290	Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
11AC160MIMO	5290	Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AC160MIMO	5290	Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
11AC160MIMO	5290	Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
11AC160MIMO	5290	Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
11AC160MIMO	5290	Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
11AC160MIMO	5290	Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
11AC160MIMO	5290	Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
11AC160MIMO	5290	Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
11AC160MIMO	5290	Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
11AC160MIMO	5290	Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
11AC160MIMO	5290	Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
11AC160MIMO	5290	Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
11AC160MIMO	5290	Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
11AC160MIMO	5290	Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
11AC160MIMO	5290	Type5	11	18	495737.0	19	1	55.0	1012.0	---	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
11A	5320	Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
11A	5320	Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
11A	5320	Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
11A	5320	Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
11A	5320	Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
11A	5320	Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
11A	5320	Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
11A	5320	Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
11A	5320	Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
11A	5320	Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
11A	5320	Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
11A	5320	Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
11A	5320	Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
11A	5320	Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---
11AC40MIMO	5310	Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
11AC40MIMO	5310	Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
11AC40MIMO	5310	Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
11AC40MIMO	5310	Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
11AC40MIMO	5310	Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
11AC40MIMO	5310	Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
11AC40MIMO	5310	Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
11AC40MIMO	5310	Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
11AC40MIMO	5310	Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
11AC40MIMO	5310	Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
11AC40MIMO	5310	Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
11AC40MIMO	5310	Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
11AC40MIMO	5310	Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
11AC40MIMO	5310	Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
11AC40MIMO	5310	Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---
11AC80MIMO	5290	Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
11AC80MIMO	5290	Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
11AC80MIMO	5290	Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
11AC80MIMO	5290	Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
11AC80MIMO	5290	Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
11AC80MIMO	5290	Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
11AC80MIMO	5290	Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
11AC80MIMO	5290	Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
11AC80MIMO	5290	Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
11AC80MIMO	5290	Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
11AC80MIMO	5290	Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
11AC80MIMO	5290	Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
11AC80MIMO	5290	Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
11AC80MIMO	5290	Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
11AC80MIMO	5290	Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---
11AC160MIMO	5290	Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
11AC160MIMO	5290	Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
11AC160MIMO	5290	Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
11AC160MIMO	5290	Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
11AC160MIMO	5290	Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
11AC160MIMO	5290	Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
11AC160MIMO	5290	Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
11AC160MIMO	5290	Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
11AC160MIMO	5290	Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
11AC160MIMO	5290	Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
11AC160MIMO	5290	Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
11AC160MIMO	5290	Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
11AC160MIMO	5290	Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
11AC160MIMO	5290	Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
11AC160MIMO	5290	Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
11A	5320	Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
11A	5320	Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
11A	5320	Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
11A	5320	Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---
11A	5320	Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
11A	5320	Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
11A	5320	Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
11A	5320	Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
11A	5320	Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
11A	5320	Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
11A	5320	Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0
11AC40MIMO	5310	Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
11AC40MIMO	5310	Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
11AC40MIMO	5310	Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
11AC40MIMO	5310	Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
11AC40MIMO	5310	Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---
11AC40MIMO	5310	Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
11AC40MIMO	5310	Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
11AC40MIMO	5310	Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
11AC40MIMO	5310	Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
11AC40MIMO	5310	Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
11AC40MIMO	5310	Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
11AC40MIMO	5310	Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0
11AC80MIMO	5290	Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
11AC80MIMO	5290	Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
11AC80MIMO	5290	Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
11AC80MIMO	5290	Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
11AC80MIMO	5290	Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---
11AC80MIMO	5290	Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
11AC80MIMO	5290	Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
11AC80MIMO	5290	Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
11AC80MIMO	5290	Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
11AC80MIMO	5290	Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
11AC80MIMO	5290	Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
11AC80MIMO	5290	Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0
11AC160MIMO	5290	Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
11AC160MIMO	5290	Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
11AC160MIMO	5290	Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
11AC160MIMO	5290	Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
11AC160MIMO	5290	Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---
11AC160MIMO	5290	Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
11AC160MIMO	5290	Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
11AC160MIMO	5290	Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
11AC160MIMO	5290	Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
11AC160MIMO	5290	Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
11AC160MIMO	5290	Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
11AC160MIMO	5290	Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
11A	5320	Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
11A	5320	Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
11A	5320	Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
11A	5320	Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
11A	5320	Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
11A	5320	Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
11A	5320	Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
11A	5320	Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
11A	5320	Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
11A	5320	Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
11A	5320	Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
11A	5320	Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
11A	5320	Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
11A	5320	Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
11A	5320	Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
11A	5320	Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
11A	5320	Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
11A	5320	Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---
11AC40MIMO	5310	Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
11AC40MIMO	5310	Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
11AC40MIMO	5310	Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
11AC40MIMO	5310	Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
11AC40MIMO	5310	Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
11AC40MIMO	5310	Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
11AC40MIMO	5310	Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
11AC40MIMO	5310	Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
11AC40MIMO	5310	Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
11AC40MIMO	5310	Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
11AC40MIMO	5310	Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
11AC40MIMO	5310	Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
11AC40MIMO	5310	Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
11AC40MIMO	5310	Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
11AC40MIMO	5310	Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
11AC40MIMO	5310	Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
11AC40MIMO	5310	Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
11AC40MIMO	5310	Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
11AC40MIMO	5310	Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---
11AC80MIMO	5290	Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
11AC80MIMO	5290	Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
11AC80MIMO	5290	Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
11AC80MIMO	5290	Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
11AC80MIMO	5290	Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
11AC80MIMO	5290	Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
11AC80MIMO	5290	Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
11AC80MIMO	5290	Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
11AC80MIMO	5290	Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
11AC80MIMO	5290	Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
11AC80MIMO	5290	Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
11AC80MIMO	5290	Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
11AC80MIMO	5290	Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
11AC80MIMO	5290	Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
11AC80MIMO	5290	Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
11AC80MIMO	5290	Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
11AC80MIMO	5290	Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
11AC80MIMO	5290	Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
11AC80MIMO	5290	Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---
11AC160MIMO	5290	Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
11AC160MIMO	5290	Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
11AC160MIMO	5290	Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
11AC160MIMO	5290	Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
11AC160MIMO	5290	Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AC160MIMO	5290	Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
11AC160MIMO	5290	Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
11AC160MIMO	5290	Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
11AC160MIMO	5290	Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
11AC160MIMO	5290	Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
11AC160MIMO	5290	Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
11AC160MIMO	5290	Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
11AC160MIMO	5290	Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
11AC160MIMO	5290	Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
11AC160MIMO	5290	Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
11AC160MIMO	5290	Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
11AC160MIMO	5290	Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
11AC160MIMO	5290	Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
11AC160MIMO	5290	Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
11A	5320	Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
11A	5320	Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
11A	5320	Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
11A	5320	Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
11A	5320	Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
11A	5320	Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
11A	5320	Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
11A	5320	Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
11A	5320	Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
11A	5320	Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
11A	5320	Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
11A	5320	Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
11A	5320	Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---
11AC40MIMO	5310	Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
11AC40MIMO	5310	Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
11AC40MIMO	5310	Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
11AC40MIMO	5310	Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
11AC40MIMO	5310	Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
11AC40MIMO	5310	Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
11AC40MIMO	5310	Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
11AC40MIMO	5310	Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
11AC40MIMO	5310	Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
11AC40MIMO	5310	Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
11AC40MIMO	5310	Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
11AC40MIMO	5310	Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
11AC40MIMO	5310	Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
11AC40MIMO	5310	Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---
11AC80MIMO	5290	Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
11AC80MIMO	5290	Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
11AC80MIMO	5290	Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
11AC80MIMO	5290	Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
11AC80MIMO	5290	Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
11AC80MIMO	5290	Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
11AC80MIMO	5290	Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
11AC80MIMO	5290	Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
11AC80MIMO	5290	Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
11AC80MIMO	5290	Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
11AC80MIMO	5290	Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
11AC80MIMO	5290	Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
11AC80MIMO	5290	Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
11AC80MIMO	5290	Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---
11AC160MIMO	5290	Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
11AC160MIMO	5290	Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
11AC160MIMO	5290	Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
11AC160MIMO	5290	Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
11AC160MIMO	5290	Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
11AC160MIMO	5290	Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
11AC160MIMO	5290	Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
11AC160MIMO	5290	Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
11AC160MIMO	5290	Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
11AC160MIMO	5290	Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
11AC160MIMO	5290	Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
11AC160MIMO	5290	Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
11AC160MIMO	5290	Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
11AC160MIMO	5290	Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
11A	5320	Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
11A	5320	Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
11A	5320	Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
11A	5320	Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
11A	5320	Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
11A	5320	Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
11A	5320	Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
11A	5320	Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
11A	5320	Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
11A	5320	Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
11A	5320	Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
11A	5320	Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---
11A	5320	Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
11A	5320	Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
11A	5320	Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
11A	5320	Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
11A	5320	Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
11A	5320	Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
11A	5320	Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---
11AC40MIMO	5310	Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
11AC40MIMO	5310	Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
11AC40MIMO	5310	Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
11AC40MIMO	5310	Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
11AC40MIMO	5310	Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
11AC40MIMO	5310	Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
11AC40MIMO	5310	Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
11AC40MIMO	5310	Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
11AC40MIMO	5310	Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
11AC40MIMO	5310	Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
11AC40MIMO	5310	Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
11AC40MIMO	5310	Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
11AC40MIMO	5310	Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---
11AC40MIMO	5310	Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
11AC40MIMO	5310	Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
11AC40MIMO	5310	Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
11AC40MIMO	5310	Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
11AC40MIMO	5310	Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
11AC40MIMO	5310	Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
11AC40MIMO	5310	Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---
11AC80MIMO	5290	Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
11AC80MIMO	5290	Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
11AC80MIMO	5290	Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
11AC80MIMO	5290	Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
11AC80MIMO	5290	Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
11AC80MIMO	5290	Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
11AC80MIMO	5290	Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
11AC80MIMO	5290	Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
11AC80MIMO	5290	Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
11AC80MIMO	5290	Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
11AC80MIMO	5290	Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
11AC80MIMO	5290	Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
11AC80MIMO	5290	Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---
11AC80MIMO	5290	Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
11AC80MIMO	5290	Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
11AC80MIMO	5290	Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
11AC80MIMO	5290	Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
11AC80MIMO	5290	Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
11AC80MIMO	5290	Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
11AC80MIMO	5290	Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---
11AC160MIMO	5290	Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
11AC160MIMO	5290	Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AC160MIMO	5290	Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
11AC160MIMO	5290	Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
11AC160MIMO	5290	Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
11AC160MIMO	5290	Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
11AC160MIMO	5290	Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
11AC160MIMO	5290	Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
11AC160MIMO	5290	Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
11AC160MIMO	5290	Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
11AC160MIMO	5290	Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
11AC160MIMO	5290	Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
11AC160MIMO	5290	Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---
11AC160MIMO	5290	Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
11AC160MIMO	5290	Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
11AC160MIMO	5290	Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
11AC160MIMO	5290	Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
11AC160MIMO	5290	Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
11AC160MIMO	5290	Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
11AC160MIMO	5290	Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
11A	5320	Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
11A	5320	Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
11A	5320	Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
11A	5320	Type5	17	4	400824.0	10	1	53.1	1303.0	---	---
11A	5320	Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
11A	5320	Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
11A	5320	Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
11A	5320	Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
11A	5320	Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
11A	5320	Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
11A	5320	Type5	17	11	98897.0	10	1	65.3	1709.0	---	---
11AC40MIMO	5310	Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
11AC40MIMO	5310	Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
11AC40MIMO	5310	Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
11AC40MIMO	5310	Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
11AC40MIMO	5310	Type5	17	4	400824.0	10	1	53.1	1303.0	---	---
11AC40MIMO	5310	Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
11AC40MIMO	5310	Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
11AC40MIMO	5310	Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
11AC40MIMO	5310	Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
11AC40MIMO	5310	Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
11AC40MIMO	5310	Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
11AC40MIMO	5310	Type5	17	11	98897.0	10	1	65.3	1709.0	---	---
11AC80MIMO	5290	Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
11AC80MIMO	5290	Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
11AC80MIMO	5290	Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
11AC80MIMO	5290	Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
11AC80MIMO	5290	Type5	17	4	400824.0	10	1	53.1	1303.0	---	---
11AC80MIMO	5290	Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
11AC80MIMO	5290	Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
11AC80MIMO	5290	Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
11AC80MIMO	5290	Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
11AC80MIMO	5290	Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
11AC80MIMO	5290	Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
11AC80MIMO	5290	Type5	17	11	98897.0	10	1	65.3	1709.0	---	---
11AC160MIMO	5290	Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
11AC160MIMO	5290	Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
11AC160MIMO	5290	Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
11AC160MIMO	5290	Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
11AC160MIMO	5290	Type5	17	4	400824.0	10	1	53.1	1303.0	---	---
11AC160MIMO	5290	Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
11AC160MIMO	5290	Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
11AC160MIMO	5290	Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
11AC160MIMO	5290	Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
11AC160MIMO	5290	Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
11AC160MIMO	5290	Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
11AC160MIMO	5290	Type5	17	11	98897.0	10	1	65.3	1709.0	---	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
11A	5320	Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
11A	5320	Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
11A	5320	Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
11A	5320	Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
11A	5320	Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
11A	5320	Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
11A	5320	Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
11A	5320	Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
11A	5320	Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
11A	5320	Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
11A	5320	Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
11A	5320	Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
11A	5320	Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0
11AC40MIMO	5310	Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
11AC40MIMO	5310	Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
11AC40MIMO	5310	Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
11AC40MIMO	5310	Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
11AC40MIMO	5310	Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
11AC40MIMO	5310	Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
11AC40MIMO	5310	Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
11AC40MIMO	5310	Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
11AC40MIMO	5310	Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
11AC40MIMO	5310	Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
11AC40MIMO	5310	Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
11AC40MIMO	5310	Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
11AC40MIMO	5310	Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
11AC40MIMO	5310	Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0
11AC80MIMO	5290	Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
11AC80MIMO	5290	Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
11AC80MIMO	5290	Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
11AC80MIMO	5290	Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
11AC80MIMO	5290	Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
11AC80MIMO	5290	Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
11AC80MIMO	5290	Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
11AC80MIMO	5290	Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
11AC80MIMO	5290	Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
11AC80MIMO	5290	Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
11AC80MIMO	5290	Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
11AC80MIMO	5290	Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
11AC80MIMO	5290	Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
11AC80MIMO	5290	Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0
11AC160MIMO	5290	Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
11AC160MIMO	5290	Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
11AC160MIMO	5290	Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
11AC160MIMO	5290	Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
11AC160MIMO	5290	Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
11AC160MIMO	5290	Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
11AC160MIMO	5290	Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
11AC160MIMO	5290	Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
11AC160MIMO	5290	Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
11AC160MIMO	5290	Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
11AC160MIMO	5290	Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
11AC160MIMO	5290	Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
11AC160MIMO	5290	Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
11AC160MIMO	5290	Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
11A	5320	Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
11A	5320	Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
11A	5320	Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
11A	5320	Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---
11A	5320	Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
11A	5320	Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
11A	5320	Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
11A	5320	Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
11A	5320	Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
11A	5320	Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
11A	5320	Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---
11AC40MIMO	5310	Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
11AC40MIMO	5310	Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
11AC40MIMO	5310	Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
11AC40MIMO	5310	Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
11AC40MIMO	5310	Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---
11AC40MIMO	5310	Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
11AC40MIMO	5310	Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
11AC40MIMO	5310	Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
11AC40MIMO	5310	Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
11AC40MIMO	5310	Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
11AC40MIMO	5310	Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
11AC40MIMO	5310	Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---
11AC80MIMO	5290	Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
11AC80MIMO	5290	Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
11AC80MIMO	5290	Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
11AC80MIMO	5290	Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
11AC80MIMO	5290	Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---
11AC80MIMO	5290	Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
11AC80MIMO	5290	Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
11AC80MIMO	5290	Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
11AC80MIMO	5290	Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
11AC80MIMO	5290	Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
11AC80MIMO	5290	Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
11AC80MIMO	5290	Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---
11AC160MIMO	5290	Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
11AC160MIMO	5290	Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
11AC160MIMO	5290	Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
11AC160MIMO	5290	Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
11AC160MIMO	5290	Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---
11AC160MIMO	5290	Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
11AC160MIMO	5290	Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
11AC160MIMO	5290	Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
11AC160MIMO	5290	Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
11AC160MIMO	5290	Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
11AC160MIMO	5290	Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
11AC160MIMO	5290	Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
11A	5320	Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
11A	5320	Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
11A	5320	Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
11A	5320	Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
11A	5320	Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
11A	5320	Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
11A	5320	Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
11A	5320	Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
11A	5320	Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
11A	5320	Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
11A	5320	Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
11A	5320	Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
11A	5320	Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
11A	5320	Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
11A	5320	Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0
11AC40MIMO	5310	Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
11AC40MIMO	5310	Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
11AC40MIMO	5310	Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
11AC40MIMO	5310	Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
11AC40MIMO	5310	Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
11AC40MIMO	5310	Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
11AC40MIMO	5310	Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
11AC40MIMO	5310	Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
11AC40MIMO	5310	Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
11AC40MIMO	5310	Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
11AC40MIMO	5310	Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
11AC40MIMO	5310	Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
11AC40MIMO	5310	Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
11AC40MIMO	5310	Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
11AC40MIMO	5310	Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
11AC40MIMO	5310	Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0
11AC80MIMO	5290	Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
11AC80MIMO	5290	Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
11AC80MIMO	5290	Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
11AC80MIMO	5290	Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
11AC80MIMO	5290	Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
11AC80MIMO	5290	Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
11AC80MIMO	5290	Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
11AC80MIMO	5290	Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
11AC80MIMO	5290	Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
11AC80MIMO	5290	Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
11AC80MIMO	5290	Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
11AC80MIMO	5290	Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
11AC80MIMO	5290	Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
11AC80MIMO	5290	Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
11AC80MIMO	5290	Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
11AC80MIMO	5290	Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0
11AC160MIMO	5290	Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
11AC160MIMO	5290	Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
11AC160MIMO	5290	Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
11AC160MIMO	5290	Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
11AC160MIMO	5290	Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
11AC160MIMO	5290	Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
11AC160MIMO	5290	Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
11AC160MIMO	5290	Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
11AC160MIMO	5290	Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
11AC160MIMO	5290	Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
11AC160MIMO	5290	Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
11AC160MIMO	5290	Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
11AC160MIMO	5290	Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
11AC160MIMO	5290	Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AC160MIMO	5290	Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
11AC160MIMO	5290	Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
11A	5320	Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
11A	5320	Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
11A	5320	Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
11A	5320	Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
11A	5320	Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
11A	5320	Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
11A	5320	Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
11A	5320	Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
11A	5320	Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
11A	5320	Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
11A	5320	Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0
11AC40MIMO	5310	Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
11AC40MIMO	5310	Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
11AC40MIMO	5310	Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
11AC40MIMO	5310	Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
11AC40MIMO	5310	Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
11AC40MIMO	5310	Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
11AC40MIMO	5310	Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
11AC40MIMO	5310	Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
11AC40MIMO	5310	Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
11AC40MIMO	5310	Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
11AC40MIMO	5310	Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
11AC40MIMO	5310	Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0
11AC80MIMO	5290	Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
11AC80MIMO	5290	Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
11AC80MIMO	5290	Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
11AC80MIMO	5290	Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
11AC80MIMO	5290	Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
11AC80MIMO	5290	Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
11AC80MIMO	5290	Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
11AC80MIMO	5290	Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
11AC80MIMO	5290	Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
11AC80MIMO	5290	Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
11AC80MIMO	5290	Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
11AC80MIMO	5290	Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0
11AC160MIMO	5290	Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
11AC160MIMO	5290	Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
11AC160MIMO	5290	Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
11AC160MIMO	5290	Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
11AC160MIMO	5290	Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
11AC160MIMO	5290	Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
11AC160MIMO	5290	Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
11AC160MIMO	5290	Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
11AC160MIMO	5290	Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
11AC160MIMO	5290	Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
11AC160MIMO	5290	Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
11AC160MIMO	5290	Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
11A	5320	Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
11A	5320	Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
11A	5320	Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
11A	5320	Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
11A	5320	Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
11A	5320	Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
11A	5320	Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
11A	5320	Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
11A	5320	Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
11A	5320	Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
11A	5320	Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
11A	5320	Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0
11A	5320	Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
11A	5320	Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
11A	5320	Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
11A	5320	Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
11A	5320	Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
11A	5320	Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
11A	5320	Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0
11AC40MIMO	5310	Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
11AC40MIMO	5310	Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
11AC40MIMO	5310	Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
11AC40MIMO	5310	Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
11AC40MIMO	5310	Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
11AC40MIMO	5310	Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
11AC40MIMO	5310	Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
11AC40MIMO	5310	Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
11AC40MIMO	5310	Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
11AC40MIMO	5310	Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
11AC40MIMO	5310	Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
11AC40MIMO	5310	Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
11AC40MIMO	5310	Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0
11AC40MIMO	5310	Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
11AC40MIMO	5310	Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
11AC40MIMO	5310	Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
11AC40MIMO	5310	Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
11AC40MIMO	5310	Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
11AC40MIMO	5310	Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
11AC40MIMO	5310	Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0
11AC80MIMO	5290	Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
11AC80MIMO	5290	Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
11AC80MIMO	5290	Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
11AC80MIMO	5290	Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
11AC80MIMO	5290	Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
11AC80MIMO	5290	Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
11AC80MIMO	5290	Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
11AC80MIMO	5290	Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
11AC80MIMO	5290	Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
11AC80MIMO	5290	Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
11AC80MIMO	5290	Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
11AC80MIMO	5290	Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
11AC80MIMO	5290	Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0
11AC80MIMO	5290	Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
11AC80MIMO	5290	Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
11AC80MIMO	5290	Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
11AC80MIMO	5290	Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
11AC80MIMO	5290	Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
11AC80MIMO	5290	Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
11AC80MIMO	5290	Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0
11AC160MIMO	5290	Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
11AC160MIMO	5290	Type5	22	1	407646.0	20	1	58.1	1248.0	---	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AC160MIMO	5290	Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
11AC160MIMO	5290	Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
11AC160MIMO	5290	Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
11AC160MIMO	5290	Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
11AC160MIMO	5290	Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
11AC160MIMO	5290	Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
11AC160MIMO	5290	Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
11AC160MIMO	5290	Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
11AC160MIMO	5290	Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
11AC160MIMO	5290	Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
11AC160MIMO	5290	Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0
11AC160MIMO	5290	Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
11AC160MIMO	5290	Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
11AC160MIMO	5290	Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
11AC160MIMO	5290	Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
11AC160MIMO	5290	Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
11AC160MIMO	5290	Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
11AC160MIMO	5290	Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
11A	5320	Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
11A	5320	Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
11A	5320	Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
11A	5320	Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
11A	5320	Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
11A	5320	Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
11A	5320	Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
11A	5320	Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
11A	5320	Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
11A	5320	Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
11A	5320	Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
11A	5320	Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
11A	5320	Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---
11AC40MIMO	5310	Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
11AC40MIMO	5310	Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
11AC40MIMO	5310	Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
11AC40MIMO	5310	Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
11AC40MIMO	5310	Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
11AC40MIMO	5310	Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
11AC40MIMO	5310	Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
11AC40MIMO	5310	Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
11AC40MIMO	5310	Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
11AC40MIMO	5310	Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
11AC40MIMO	5310	Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
11AC40MIMO	5310	Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
11AC40MIMO	5310	Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
11AC40MIMO	5310	Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---
11AC80MIMO	5290	Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
11AC80MIMO	5290	Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
11AC80MIMO	5290	Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
11AC80MIMO	5290	Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
11AC80MIMO	5290	Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
11AC80MIMO	5290	Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
11AC80MIMO	5290	Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
11AC80MIMO	5290	Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
11AC80MIMO	5290	Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
11AC80MIMO	5290	Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
11AC80MIMO	5290	Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
11AC80MIMO	5290	Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
11AC80MIMO	5290	Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
11AC80MIMO	5290	Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---
11AC160MIMO	5290	Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
11AC160MIMO	5290	Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
11AC160MIMO	5290	Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
11AC160MIMO	5290	Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
11AC160MIMO	5290	Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
11AC160MIMO	5290	Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
11AC160MIMO	5290	Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
11AC160MIMO	5290	Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
11AC160MIMO	5290	Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
11AC160MIMO	5290	Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
11AC160MIMO	5290	Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
11AC160MIMO	5290	Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
11AC160MIMO	5290	Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
11AC160MIMO	5290	Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
11A	5320	Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
11A	5320	Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
11A	5320	Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
11A	5320	Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
11A	5320	Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
11A	5320	Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
11A	5320	Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
11A	5320	Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
11A	5320	Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
11A	5320	Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
11A	5320	Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
11A	5320	Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0
11AC40MIMO	5310	Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
11AC40MIMO	5310	Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
11AC40MIMO	5310	Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
11AC40MIMO	5310	Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
11AC40MIMO	5310	Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
11AC40MIMO	5310	Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
11AC40MIMO	5310	Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
11AC40MIMO	5310	Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
11AC40MIMO	5310	Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
11AC40MIMO	5310	Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
11AC40MIMO	5310	Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
11AC40MIMO	5310	Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
11AC40MIMO	5310	Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0
11AC80MIMO	5290	Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
11AC80MIMO	5290	Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
11AC80MIMO	5290	Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
11AC80MIMO	5290	Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
11AC80MIMO	5290	Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
11AC80MIMO	5290	Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
11AC80MIMO	5290	Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
11AC80MIMO	5290	Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
11AC80MIMO	5290	Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
11AC80MIMO	5290	Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
11AC80MIMO	5290	Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
11AC80MIMO	5290	Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
11AC80MIMO	5290	Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0
11AC160MIMO	5290	Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
11AC160MIMO	5290	Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
11AC160MIMO	5290	Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
11AC160MIMO	5290	Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
11AC160MIMO	5290	Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
11AC160MIMO	5290	Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
11AC160MIMO	5290	Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
11AC160MIMO	5290	Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
11AC160MIMO	5290	Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
11AC160MIMO	5290	Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
11AC160MIMO	5290	Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
11AC160MIMO	5290	Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
11AC160MIMO	5290	Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
11A	5320	Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
11A	5320	Type5	25	2	482958.0	5	1	60.9	1687.0	---	---
11A	5320	Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
11A	5320	Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---
11A	5320	Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
11A	5320	Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
11A	5320	Type5	25	7	800152.0	5	3	91.2	1409.0	1681.0	1275.0
11AC40MIMO	5310	Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
11AC40MIMO	5310	Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
11AC40MIMO	5310	Type5	25	2	482958.0	5	1	60.9	1687.0	---	---
11AC40MIMO	5310	Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
11AC40MIMO	5310	Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---
11AC40MIMO	5310	Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
11AC40MIMO	5310	Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
11AC40MIMO	5310	Type5	25	7	800152.0	5	3	91.2	1409.0	1681.0	1275.0
11AC80MIMO	5290	Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
11AC80MIMO	5290	Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
11AC80MIMO	5290	Type5	25	2	482958.0	5	1	60.9	1687.0	---	---
11AC80MIMO	5290	Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
11AC80MIMO	5290	Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---
11AC80MIMO	5290	Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
11AC80MIMO	5290	Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
11AC80MIMO	5290	Type5	25	7	800152.0	5	3	91.2	1409.0	1681.0	1275.0
11AC160MIMO	5290	Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
11AC160MIMO	5290	Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
11AC160MIMO	5290	Type5	25	2	482958.0	5	1	60.9	1687.0	---	---
11AC160MIMO	5290	Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
11AC160MIMO	5290	Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---
11AC160MIMO	5290	Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
11AC160MIMO	5290	Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
11AC160MIMO	5290	Type5	25	7	800152.0	5	3	91.2	1409.0	1681.0	1275.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
11A	5320	Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
11A	5320	Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
11A	5320	Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
11A	5320	Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
11A	5320	Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
11A	5320	Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
11A	5320	Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
11A	5320	Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
11A	5320	Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
11A	5320	Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
11A	5320	Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0
11A	5320	Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
11A	5320	Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
11A	5320	Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
11A	5320	Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
11A	5320	Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0
11AC40MIMO	5310	Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
11AC40MIMO	5310	Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
11AC40MIMO	5310	Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
11AC40MIMO	5310	Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
11AC40MIMO	5310	Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
11AC40MIMO	5310	Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
11AC40MIMO	5310	Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
11AC40MIMO	5310	Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
11AC40MIMO	5310	Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
11AC40MIMO	5310	Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
11AC40MIMO	5310	Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
11AC40MIMO	5310	Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0
11AC40MIMO	5310	Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
11AC40MIMO	5310	Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
11AC40MIMO	5310	Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
11AC40MIMO	5310	Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
11AC40MIMO	5310	Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0
11AC80MIMO	5290	Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
11AC80MIMO	5290	Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
11AC80MIMO	5290	Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
11AC80MIMO	5290	Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
11AC80MIMO	5290	Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
11AC80MIMO	5290	Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
11AC80MIMO	5290	Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
11AC80MIMO	5290	Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
11AC80MIMO	5290	Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
11AC80MIMO	5290	Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
11AC80MIMO	5290	Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
11AC80MIMO	5290	Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0
11AC80MIMO	5290	Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
11AC80MIMO	5290	Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
11AC80MIMO	5290	Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
11AC80MIMO	5290	Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
11AC80MIMO	5290	Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0
11AC160MIMO	5290	Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
11AC160MIMO	5290	Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
11AC160MIMO	5290	Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
11AC160MIMO	5290	Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
11AC160MIMO	5290	Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
11AC160MIMO	5290	Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
11AC160MIMO	5290	Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
11AC160MIMO	5290	Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
11AC160MIMO	5290	Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
11AC160MIMO	5290	Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
11AC160MIMO	5290	Type5	26	10	142890.0	16	1	55.0	1427.0	---	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AC160MIMO	5290	Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0
11AC160MIMO	5290	Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
11AC160MIMO	5290	Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
11AC160MIMO	5290	Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
11AC160MIMO	5290	Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
11AC160MIMO	5290	Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
11A	5320	Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
11A	5320	Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
11A	5320	Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
11A	5320	Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
11A	5320	Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
11A	5320	Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
11A	5320	Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
11A	5320	Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
11A	5320	Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
11A	5320	Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
11A	5320	Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
11A	5320	Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
11A	5320	Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
11A	5320	Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
11A	5320	Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
11A	5320	Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
11A	5320	Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
11A	5320	Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---
11AC40MIMO	5310	Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
11AC40MIMO	5310	Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
11AC40MIMO	5310	Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
11AC40MIMO	5310	Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
11AC40MIMO	5310	Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
11AC40MIMO	5310	Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
11AC40MIMO	5310	Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
11AC40MIMO	5310	Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
11AC40MIMO	5310	Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
11AC40MIMO	5310	Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
11AC40MIMO	5310	Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
11AC40MIMO	5310	Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
11AC40MIMO	5310	Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
11AC40MIMO	5310	Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
11AC40MIMO	5310	Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
11AC40MIMO	5310	Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
11AC40MIMO	5310	Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
11AC40MIMO	5310	Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
11AC40MIMO	5310	Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---
11AC80MIMO	5290	Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
11AC80MIMO	5290	Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
11AC80MIMO	5290	Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
11AC80MIMO	5290	Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
11AC80MIMO	5290	Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
11AC80MIMO	5290	Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
11AC80MIMO	5290	Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
11AC80MIMO	5290	Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
11AC80MIMO	5290	Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
11AC80MIMO	5290	Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
11AC80MIMO	5290	Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
11AC80MIMO	5290	Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
11AC80MIMO	5290	Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
11AC80MIMO	5290	Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
11AC80MIMO	5290	Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
11AC80MIMO	5290	Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
11AC80MIMO	5290	Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
11AC80MIMO	5290	Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
11AC80MIMO	5290	Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---
11AC160MIMO	5290	Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
11AC160MIMO	5290	Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
11AC160MIMO	5290	Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
11AC160MIMO	5290	Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
11AC160MIMO	5290	Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AC160MIMO	5290	Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
11AC160MIMO	5290	Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
11AC160MIMO	5290	Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
11AC160MIMO	5290	Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
11AC160MIMO	5290	Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
11AC160MIMO	5290	Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
11AC160MIMO	5290	Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
11AC160MIMO	5290	Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
11AC160MIMO	5290	Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
11AC160MIMO	5290	Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
11AC160MIMO	5290	Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
11AC160MIMO	5290	Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
11AC160MIMO	5290	Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
11AC160MIMO	5290	Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
11A	5320	Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
11A	5320	Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
11A	5320	Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
11A	5320	Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---
11A	5320	Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
11A	5320	Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
11A	5320	Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
11A	5320	Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
11A	5320	Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
11A	5320	Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
11A	5320	Type5	28	11	176231.0	10	1	55.3	1522.0	---	---
11AC40MIMO	5310	Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
11AC40MIMO	5310	Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
11AC40MIMO	5310	Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
11AC40MIMO	5310	Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
11AC40MIMO	5310	Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---
11AC40MIMO	5310	Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
11AC40MIMO	5310	Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
11AC40MIMO	5310	Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
11AC40MIMO	5310	Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
11AC40MIMO	5310	Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
11AC40MIMO	5310	Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
11AC40MIMO	5310	Type5	28	11	176231.0	10	1	55.3	1522.0	---	---
11AC80MIMO	5290	Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
11AC80MIMO	5290	Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
11AC80MIMO	5290	Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
11AC80MIMO	5290	Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
11AC80MIMO	5290	Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---
11AC80MIMO	5290	Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
11AC80MIMO	5290	Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
11AC80MIMO	5290	Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
11AC80MIMO	5290	Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
11AC80MIMO	5290	Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
11AC80MIMO	5290	Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
11AC80MIMO	5290	Type5	28	11	176231.0	10	1	55.3	1522.0	---	---
11AC160MIMO	5290	Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
11AC160MIMO	5290	Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
11AC160MIMO	5290	Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
11AC160MIMO	5290	Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
11AC160MIMO	5290	Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---
11AC160MIMO	5290	Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
11AC160MIMO	5290	Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
11AC160MIMO	5290	Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
11AC160MIMO	5290	Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
11AC160MIMO	5290	Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
11AC160MIMO	5290	Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
11AC160MIMO	5290	Type5	28	11	176231.0	10	1	55.3	1522.0	---	---

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11A	5320	Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
11A	5320	Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
11A	5320	Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
11A	5320	Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
11A	5320	Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
11A	5320	Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
11A	5320	Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
11A	5320	Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
11A	5320	Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
11A	5320	Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
11A	5320	Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
11A	5320	Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
11A	5320	Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
11A	5320	Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
11A	5320	Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
11A	5320	Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
11A	5320	Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
11A	5320	Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---
11AC40MIMO	5310	Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
11AC40MIMO	5310	Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
11AC40MIMO	5310	Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
11AC40MIMO	5310	Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
11AC40MIMO	5310	Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
11AC40MIMO	5310	Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
11AC40MIMO	5310	Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
11AC40MIMO	5310	Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
11AC40MIMO	5310	Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
11AC40MIMO	5310	Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
11AC40MIMO	5310	Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
11AC40MIMO	5310	Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
11AC40MIMO	5310	Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
11AC40MIMO	5310	Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
11AC40MIMO	5310	Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
11AC40MIMO	5310	Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
11AC40MIMO	5310	Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
11AC40MIMO	5310	Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---
11AC80MIMO	5290	Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
11AC80MIMO	5290	Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
11AC80MIMO	5290	Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
11AC80MIMO	5290	Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
11AC80MIMO	5290	Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
11AC80MIMO	5290	Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
11AC80MIMO	5290	Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
11AC80MIMO	5290	Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
11AC80MIMO	5290	Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
11AC80MIMO	5290	Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
11AC80MIMO	5290	Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
11AC80MIMO	5290	Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
11AC80MIMO	5290	Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
11AC80MIMO	5290	Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
11AC80MIMO	5290	Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
11AC80MIMO	5290	Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
11AC80MIMO	5290	Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
11AC80MIMO	5290	Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---
11AC160MIMO	5290	Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
11AC160MIMO	5290	Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
11AC160MIMO	5290	Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
11AC160MIMO	5290	Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
11AC160MIMO	5290	Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
11AC160MIMO	5290	Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
11AC160MIMO	5290	Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
11AC160MIMO	5290	Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0

Test Mode	Test Frequency (MHz)	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AC160MIMO	5290	Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
11AC160MIMO	5290	Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
11AC160MIMO	5290	Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
11AC160MIMO	5290	Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
11AC160MIMO	5290	Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
11AC160MIMO	5290	Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
11AC160MIMO	5290	Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
11AC160MIMO	5290	Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
11AC160MIMO	5290	Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
11AC160MIMO	5290	Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---

EXHIBIT A-EUT PHOTOGRAPHS

Please refer to the Attachment No.1 2504Z00193E-RF EUT External Photos and Attachment No.2 2504Z00193E-RF EUT Internal Photos.

EXHIBIT B-TEST SETUP PHOTOGRAPHS

Please refer to the Attachment No.4 2504Z00193E-RF-00B Test Photos.

***** END OF REPORT *****