

Font: Arial Unicode MS
Font size: 5pt
Bar code height is not less than 4mm
The barcode must be clearly visible



2) Password: The password consists of 8 digits or letters, using 0-9, a-z, A-Z, Among them, characters such as "0 / o/ O, B/8, 1/ l/ I" are excluded. The specific content is automatically generated according to the algorithm.

S/N: AZRSXXXXXXXX

AZRS is fixed, XXXXXXXX is the production serial number,
00000001~99999999

MAC:XX:XX:XX:XX:XX:XX, Barcode without colon

"MAC"Need to be capitalized, provided by BFW

Note: One product uses 16 MAC addresses


Barcode:code 128

NOTES (技术要求) :

- 1.黑色印刷，无边框，R0.5
(Black printing,R0.5)
- 2.材料：50# 亮白PET，背油胶
(Material:50# bright white PET, adhesive)

TOL±		△								
DIM						TITLE: 铭牌标贴		对应空白标贴料号： 706-0000-0092		
RANGE	C1	C2	C3	C4						
0-6	0.1	0.1	0.15	0.2						
6-30	0.2	0.3	0.4	0.5						
30-80	0.25	0.5	0.9	1.2						
80-180	0.3	0.8	1.2	1.5						
180-315	0.5	1.3	1.8	3						
315-500	0.7	1.5	2.5	4						
500-800	0.9	1.8	3	5						
ANG. TOL±	0°-30°/0.1°	30°-60°/0.3°	60°-90°/0.5°				SCALE	1:1	UNIT'S	mm

IC LABEL:

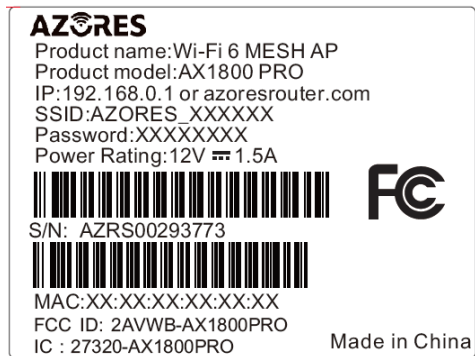

Label Location

