

Test report

Number T251-0605/25 M1

Project file: C20250839

Date: 2026-02-25

Pages: 71

Product: Charger System Wireless
CS WSU STD 10KW 50V, CS WSU STD 10KW 36V

Type reference: EOE17010950, EOE17011077

Ratings: See page 5.

Trademark:



Applicant: Delta Energy Systems (Germany) GmbH
Tscheulinstrasse 21, 79331 Teningen, Germany

Manufacturer: Delta Energy Systems (Germany) GmbH
Tscheulinstrasse 21, 79331 Teningen, Germany

Place of manufacture: Delta Energy Systems (Germany) GmbH
Tscheulinstrasse 21, 79331 Teningen, Germany

Summary of testing

Testing method: 47 CFR Part 15.225
RSS-Gen (Issue 5), RSS-210 (Issue 11) last amended 2024-08-08 in
conjunction with ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024

Testing location: SIQ Ljubljana
Mašera-Spasičeva ulica 10, SI-1000 Ljubljana, Slovenia

Remarks: Date of receipt of test items: 2025-05-22
Number of items tested: 1
Date of performance of tests: 2025-06-06 – 2025-06-19
The test results presented in this report relate only to the items tested.
The test items were tested in the condition as received.
The product complies with the requirements of the testing methods.

Tested by: Luka Cvajnar

Approved by: Marjan Mak



The report shall not be reproduced except in full.

CONTENTS	page
1 GENERAL	3
1.1 EQUIPMENT UNDER TEST	3
1.2 MEASUREMENT UNCERTAINTY	6
1.3 APPLICATION OF DECISION RULE	6
2 TEST EQUIPMENT	7
2.1 CONVERSION FACTORS AND ALL OTHER FORMULAS	7
3 TEST SUMMARY	8
3.1 OPERATING VOLTAGES/FREQUENCIES USED FOR TESTING	8
4 TESTS RESULTS	9
4.1 ANTENNA REQUIREMENTS (§15.203)	9
4.2 RESTRICTED BANDS OF OPERATION (§15.205&RSS-GEN)	10
4.3 CONDUCTED EMISSION MEASUREMENT (§15.207)	12
4.4 RADIATED EMISSION MEASUREMENT (§15.209)	13
4.5 BANDWIDTH OF THE EMISSION (§15.215)	50
4.6 SPECTRUM MASK (§15.225 (A)-(D))	55
4.7 FREQUENCY TOLERANCE OF THE CARRIER SIGNAL (§15.225 (E))	64

1 GENERAL

History sheet			
Date	Report No.	Change	Revision
2025-09-30	T251-0605/25	Initial Test Report issued.	--
2026-02-25	T251-0605/25 M1	Modification of initial test report due to added IC standards and 99% Occupied bandwidth test results for IC certification procedure.	1.0

Environmental conditions:

Ambient temperature: 15°C to 35°C

Relative humidity: 30% to 60%

Atmospheric pressure: 860 mbar to 1060 mbar

1.1 Equipment under test

Charger System Wireless

CS WSU STD 10KW 50V, CS WSU STD 10KW 36V

Type: EOE17010950, EOE17011077

FCC ID: 2AVWKWSU10KW

IC: 27805-WSU10KW

Equipment marking plates

{The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.}

WSU 50V:



WSU 36V:

1.1.1 General product information

Product	Charger System Wireless
Type / Model	EOE17010950, EOE17011077
Supply voltage of transmitter	24 Vdc
Operating frequency	13.56 MHz
Number of channels	1
Antenna type	Rectangular planar antenna
Modulation type	ASK Modulation (100%)
Hardware version	Secondary pad: V01
Software version	WSU 36V APL V4.2 WSU 50V APL V10.3

Device is a wireless charger for charging of electrical forklifts. Device consist of Primary Box (EOE17010813) that gets power from the grid and of Primary Pad (EOE17010951) that transfers the energy to secondary pad (EOE17010950, EOE17011077).

Energy is transferred in the frequency range 55 – 65 kHz. Communication between primary and secondary pad is at 13.56 MHz.

Test mode	Description
1	Secondary pad was activated and waiting for communication with secondary pad
2	Communication between primary pad and secondary pad was established. The secondary pad was set to declared distance to the primary pad.

Ratings:

- For EOE17010813:
 - o Input: 400 V a.c.; 50 Hz; 480 V a.c.; 60 Hz; 18 A; 3Ph + PE
 - o Output: pairing with WPP
- For EOE17010951:
 - o Input: Supplied by WPB
 - o Output: pairing with WSU
- For EOE17010950:
 - o Input: Pairing with WPP
 - o Input Aux: 18-60 V d.c.; 200 mA;
 - o Output: 36-60 V d.c.; max 200 A
 - o Output Aux: 5 V d.c.; 100 mA
- For EOE17011077:
 - o Input: Pairing with WPP
 - o Input Aux: 18-44 V d.c.; 200 mA;
 - o Output: 18-44 V d.c.; max 280 A
 - o Output Aux: 5 V d.c.; 100 mA

NOTE: The information in this section has been provided by the applicant.

1.2 Measurement uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the product, as specified in ETSI TR 100 028-2 and C63.23. This represents an expanded uncertainty expressed at 95% confidence level using a coverage factor $k=2$.

Measurements	U_{LAB}	$U_{ETSI\ TR\ 100\ 028-2}$	$U_{C63.23}$
AC Line Conducted Emission	3.2 dB	/	$\pm 4,13$
Spurious emission 30 – 300 MHz	4.2 dB	± 6	/
Spurious emission 300 – 1000 MHz	4.4 dB	± 6	/
Occupied bandwidth (99% emission bandwidth)	< 2%	$\pm 5\%$	/


Note: Measurement uncertainty calculated in accordance with ETSI TR 100 028-2 and C63.23.

1.3 Application of decision rule

Application of decision rule and statement of conformity is defined in document TN023 Decision rule and measurement uncertainty.

As a general rule Pass/Fail decisions are based on simple acceptance rule and acceptance limits chosen based on simple acceptance ($w = 0$, $AL = TL$) except if a decision rule is governed by particular standard or guidance document.

Decision rule:

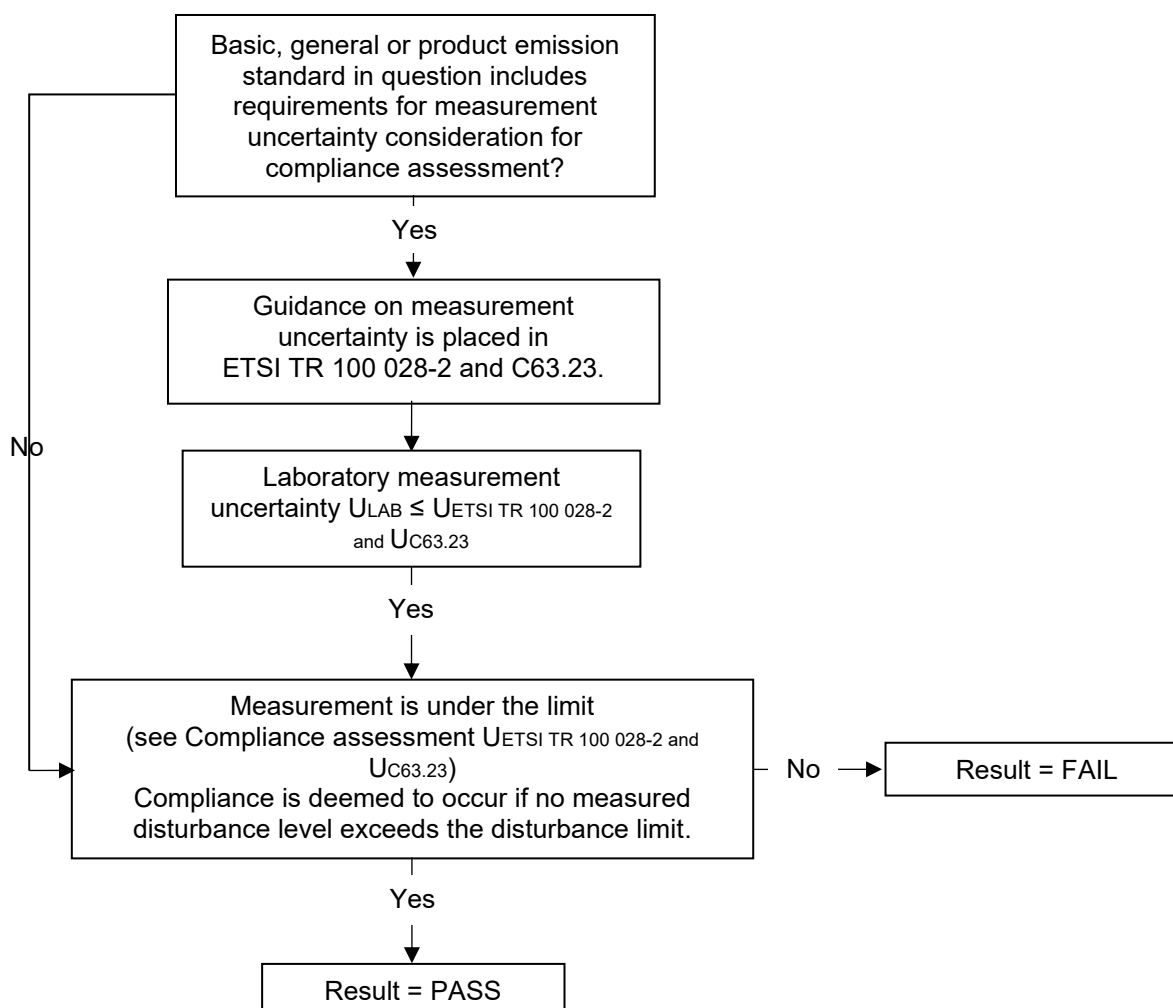

2 TEST EQUIPMENT

Equipment used					
<i>Conducted measurements</i>					
Equipment	Type	Inventory number	Manufacturer	Last calibration	Calibration due date
Spectrum analyser	FSV40	101848	Rohde & Schwarz	2024-11-08	2026-11-08
Temperature chamber	I-190 CK	/	Kambič	N/A	N/A
<i>Radiated measurements</i>					
EMI test receiver	ESW 44		R&S	2024-09-26	2026-03-26
Semi-anechoic chamber	SAC 3m	109071	Comtest engineering	2025-03-24	2028-03-24
Ultra-Broadband Antenna	HL562E	/	Rohde & Schwarz	2023-09-26	2026-09-26
Horn Antenna	HF907	102508	Rohde & Schwarz	2023-08-22	2026-08-22
Active loop antenna	FMZB 1519		Schwarzbeck	2024-09-18	2026-03-18
Turn table (2 m diameter)	TT 2.0 SI	/	Maturo	N/A	
Bore-sight antenna mast	BAM-4.0-P	/	Maturo	N/A	
Multi-channel positioning equipment	Maturo NCD	/	Maturo	N/A	

2.1 Conversion factors and all other formulas

Unit	Conversion unit	Formula of conversion
dB μ V	dB μ V/m	dB μ V/m = dB μ V + AF
μ V/m	dB μ V/m	dB μ V/m = 20log(X(μ V/m)/1 μ V)

Test distance stated in standard	Test distance of measurement	Conversion factor
3 m	3 m	/
10 m	3 m	20dB/decade (over 30 MHz)
		40dB/decade (under 30 MHz)

3 TEST SUMMARY

STANDARDS (details on first page)	Tested		Sample	
	yes	no	pass	not pass
ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024; 47 CFR Part 15, Subpart C	☒	☐	☒	☐

Test	47 CFR Part 15 section	Section within the report	Conclusion
Antenna requirements	15.203	5.1	PASS
Restricted bands of operation	15.205	5.2	PASS
Conducted emission	15.207	5.3	PASS
Radiated emission	15.209	5.4	PASS
Bandwidth of the emission	15.215	5.5	PASS
Spectrum mask	15.225	5.6	PASS
Frequency tolerance of the carrier signal	15.225	5.7	PASS

3.1 Operating voltages/frequencies used for testing

Section	Test	Operating conditions
6.1	Restricted bands of operation	50 Vdc
6.2	Conducted emission	/
6.3	Radiated emission	50 Vdc, 36 Vdc and 24 Vdc
6.4	Bandwidth of the emission	50 Vdc
6.5	Spectrum mask	50 Vdc
6.6	Frequency tolerance of the carrier signal	50 Vdc

4 TESTS RESULTS

4.1 Antenna requirements (§15.203)

Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Conclusion:

PASS; EUT has internal PCB antenna.

4.2 Restricted bands of operation (§15.205&RSS-Gen)

4.2.1 Requirement

Except as shown in paragraph (d) of §15.205 only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

RSS Gen Restricted frequency bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	1435-1626.5	9.0-9.2
0.495-0.505	16.69475-16.69525	1645.5-1646.5	9.3-9.5
2.1735-2.1905	16.80425-16.80475	1660-1710	10.6-12.7
3.020 - 3.026	25.5-25.67	1718.8-1722.2	13.25-13.4
4.125-4.128	37.5-38.25	2200-2300	14.47-14.5
4.17725-4.17775	73-74.6	2310-2390	15.35-16.2
4.20725-4.20775	74.8-75.2	2483.5-2500	17.7-21.4
6.215-6.218	108-138	2655-2900	22.01-23.12
6.26775-6.26825	149.9-150.05	3260-3267	23.6-24.0
6.31175-6.31225	156.52475-156.52525	3332-3339	31.2-31.8
8.291-8.294	156.7-156.9	3345.8-3358	36.43-36.5
8.362-8.366	162.0125-167.17	3500-4400	Above 38.6
8.37625-8.38675	167.72-173.2	4500-5150	
8.41425-8.41475	240-285	5350-5460	
12.29-12.293	322-335.4	7250-7750	
12.51975-12.52025	399.9-410	8025-8500	
12.57675-12.57725	608-614		(²)
13.36-13.41	960-1427		

4.2.2 Test results

See Radiated emission results under 5.4 Radiated emission and 5.6 Spectrum mask.

4.3 Conducted emission measurement (§15.207)

4.3.1 Requirement

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.5	66 – 56*	56 – 46*
0.5 to 5.0	56	46
5.0 to 30.0	60	50

* Decreases with the logarithm of the frequency.

The shown limits in table shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

- For carrier current systems containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.
- For all other carrier current systems: 1000 µV within the frequency band 535-1705 kHz, as measured using a 50 µH/50 ohms LISN.
- Carrier current systems operating below 30 MHz are also subject to the radiated emission limits as appropriate.

4.3.2 Test procedure

- As per clause 6.2 from ANSI C63.10-2020.
- The EUT is placed on a non-conductive 0.8 meters high table, 0.4 meters from the vertical conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). LISN provide 50 Ohm / 50 µH + 5 Ohm of coupling impedance for the measuring instrument.
- Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.
- AC power lines of EUT are checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz is searched using PEAK, QUASI-PEAK and AVERAGE function of the receiver to determine compliance with Section 15.207 limits outside the transmitter's fundamental emission band. Bandwidth is set to 9 kHz.
- Measurement repeated with a dummy load in lieu of the antenna to determine compliance with Section 15.207 limits within the transmitter's fundamental emission band.

4.3.3 Test results

Test not applicable due to battery power supply.

4.4 Radiated emission measurement (§15.209)

4.4.1 Requirement

Frequency Range (MHz)	Limits (dBμV/m)	Test distance (m)
0.009 to 0.490	$20 \cdot \log(2400/F(\text{kHz}))$	300
0.490 to 1.705	$20 \cdot \log(24000/F(\text{kHz}))$	30
1.705 to 30.0	30	30
30 to 88	40**	3
88 to 216	43.5**	3
216 to 960	46**	3
Above 960	54	3

** Except as provided in paragraph below, fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz.

Perimeter protection systems may operate in the 54-72 MHz and 76-88 MHz bands under the provisions of this section. The use of such perimeter protection systems is limited to industrial, business and commercial applications

4.4.2 Test procedure

Measurements from 9 kHz to 30 MHz

1. As per clause 6.4 from ANSI C63.10-2020
2. Radiated emission in the frequency range 9 kHz to 30 MHz are measured Active loop Antenna.
3. First preliminary measurements were performed in Semi-anechoic chamber at a distance of 3 m using active loop antenna.
4. The EUT was placed on the top of a rotating table 0.8 meters above the ground in an Anechoic Chamber. The table and antenna was rotated 360 degrees to determine the position of the highest radiation.
5. Final measurements were done at a distance of 10 m at Open Area Test Site due to low emissions measured during preliminary measurements acc. to the clauses from Part 15, Sections 15.31(d) and 15.31(f)(2). Test results were extrapolated by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Measurements from 30 MHz to 1 GHz

1. As per clause 6.5 from ANSI C63.10-2020
2. The EUT was placed on the top of a rotating table 0.8 meters above the ground in an Anechoic Chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
3. The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.
4. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
6. The test-receiver system was set to PEAK and QUAS-PEAK Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The highest points would be re-tested one by one using the quasi-peak method.

4.4.3 Test results

Device passed the requirements stated in 47 CFR Part 15, Subpart C, Section 15.209

Preliminary measurements at 3 m:

Landscape mode:

Only secondary pad active, antenna in X orientation:

EUT Information

EUT:

Operating Mode:


Antenna Polarization:

10 kW Delta, Secondary 2

Secondary only, Input 50V d.c., Landscape mode, PPL mode

Coaxial

Full Spectrum

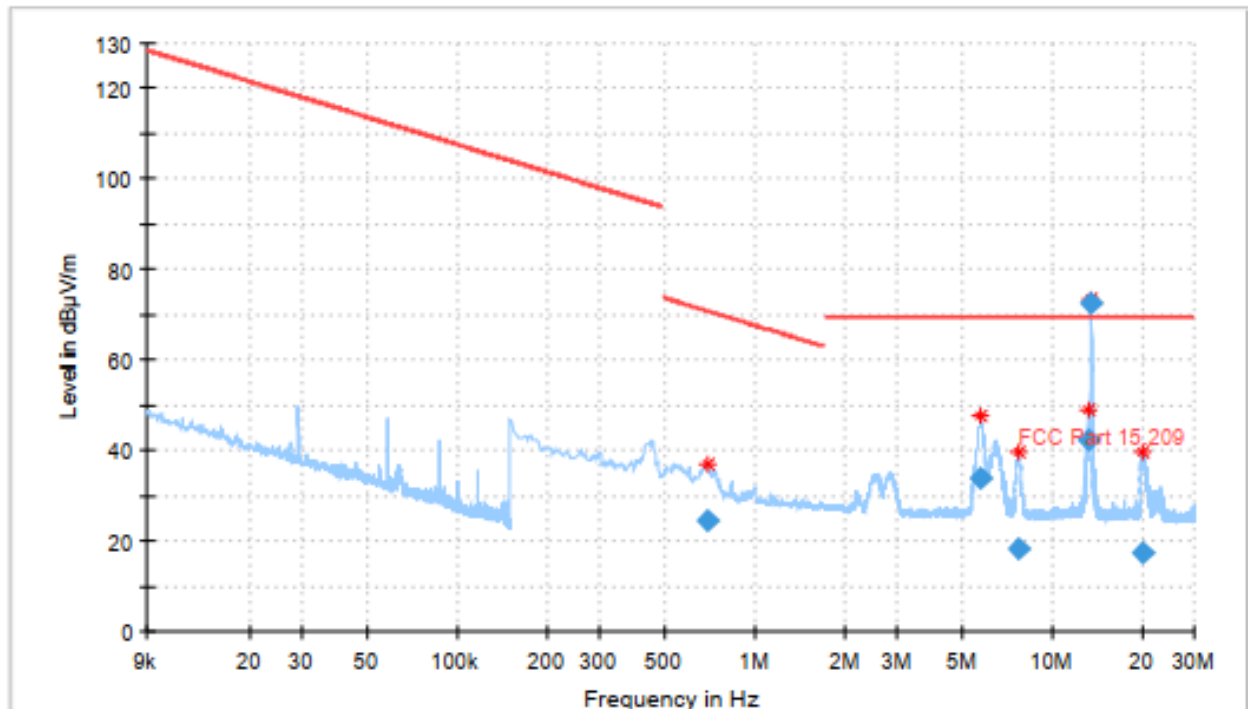

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	72.77	69.50	-3.27	1000.0	9.000	H	188.0	18.3
13.299000	42.32	69.50	27.18	1000.0	9.000	H	188.0	18.3
5.696250	33.86	69.50	35.64	1000.0	9.000	H	212.0	18.3
0.694500	24.55	70.78	46.23	1000.0	9.000	H	20.0	18.1
7.678500	18.44	69.50	51.06	1000.0	9.000	H	212.0	18.3
20.071500	17.50	69.50	52.00	1000.0	9.000	H	212.0	18.4

Only secondary pad active, antenna in Y orientation:

EUT Information

EUT:

10 kW Delta, Secondary 2


Operating Mode:

Secondary only, Input 50V d.c., Landscape mode, PPL mode

Antenna Polarization:

Coplanar

Full Spectrum

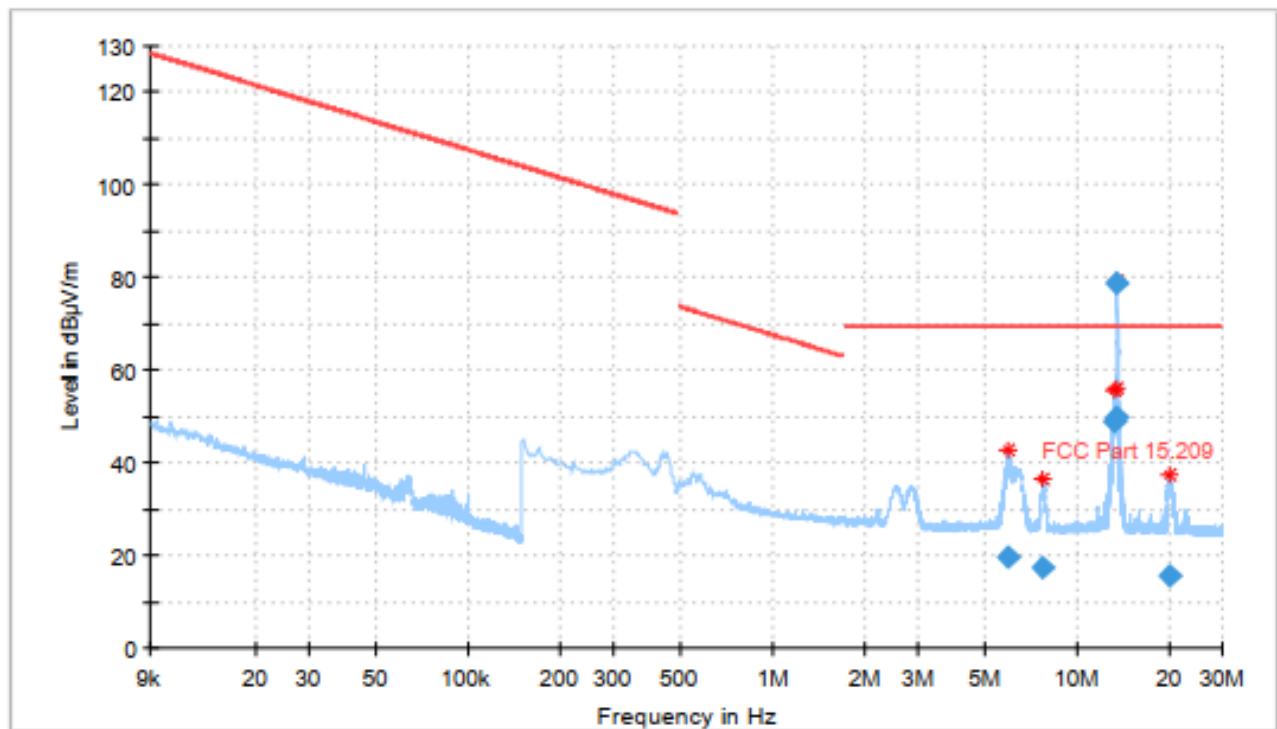

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	78.61	69.50	-9.11	1000.0	9.000	H	254.0	18.3
13.357500	49.72	69.50	19.78	1000.0	9.000	H	254.0	18.3
13.299000	48.91	69.50	20.59	1000.0	9.000	H	242.0	18.3
5.916750	19.61	69.50	49.89	1000.0	9.000	H	30.0	18.3
7.746000	17.25	69.50	52.25	1000.0	9.000	H	345.0	18.3
20.114250	15.63	69.50	53.87	1000.0	9.000	H	345.0	18.4

Only secondary pad active, antenna in X orientation:

EUT Information

EUT: 10 kW Delta
 Operating Mode: Uin: 277 V / 60 Hz; Secondary only 36V, Landscape mode, PPL mode
 Polarization: Coaxial

Full Spectrum

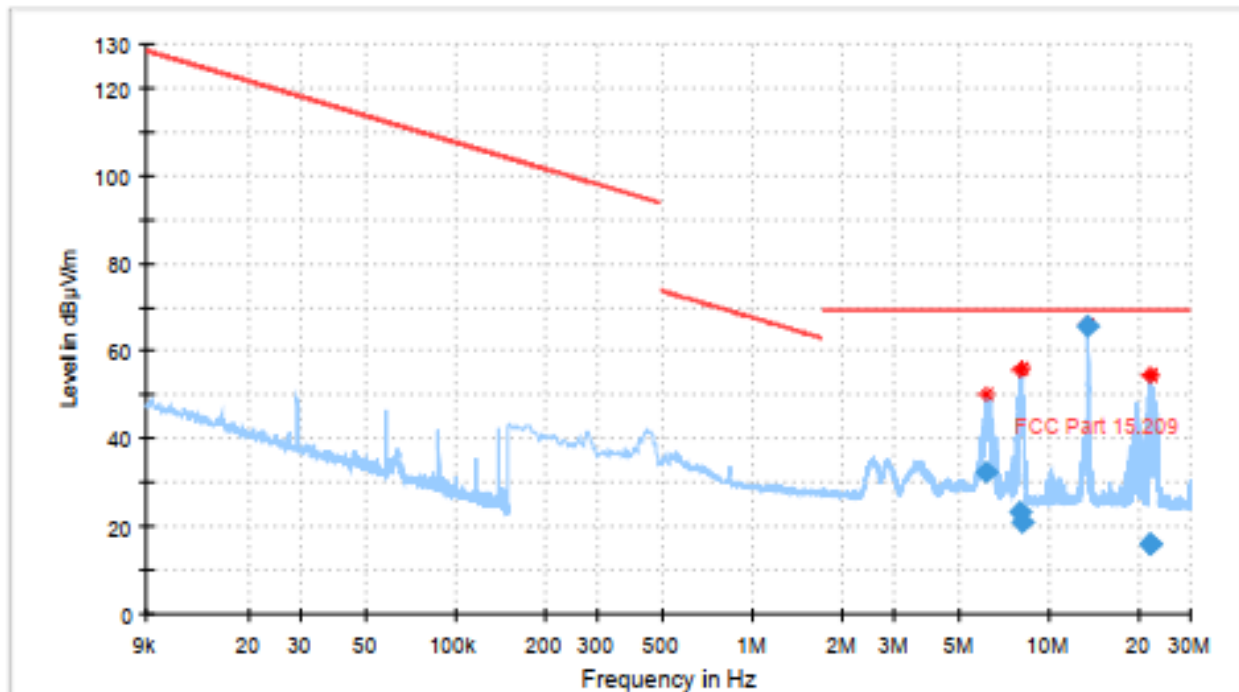

Final Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	65.46	69.50	4.04	1000.0	9.000	H	0.0	18.3
6.144000	32.44	69.50	37.06	1000.0	9.000	H	252.0	18.3
7.926000	23.37	69.50	46.13	1000.0	9.000	H	252.0	18.3
8.067750	21.11	69.50	48.39	1000.0	9.000	H	252.0	18.3
22.101000	16.18	69.50	53.32	1000.0	9.000	H	252.0	18.3
21.783750	16.00	69.50	53.50	1000.0	9.000	H	252.0	18.3

Only secondary pad active, antenna in Y orientation:

EUT Information

EUT: 10 kW Delta
Operating Mode: Uin: 277 V / 60 Hz; Secondary only 36V, Landscape mode, PPL mode
Polarization: Coplanar

Full Spectrum

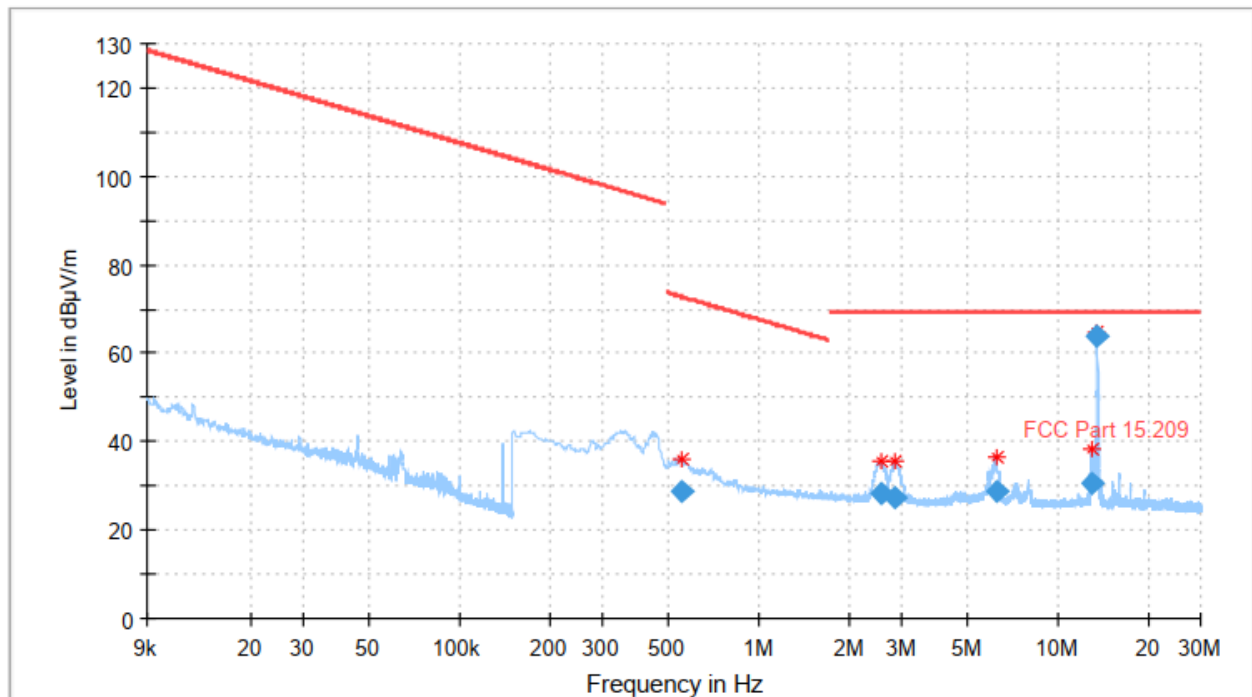

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	64.05	69.50	5.45	1000.0	9.000	H	63.0	18.3
13.011000	30.41	69.50	39.09	1000.0	9.000	H	51.0	18.3
6.202500	28.57	69.50	40.93	1000.0	9.000	H	332.0	18.3
2.550750	28.24	69.50	41.26	1000.0	9.000	H	237.0	18.2
2.834250	27.50	69.50	42.00	1000.0	9.000	H	86.0	18.2
0.555000	28.91	72.72	43.81	1000.0	9.000	H	297.0	18.1




Only secondary pad active, antenna in X orientation:

EUT Information

EUT:
Operating Mode:
Polarization:

10 kW Delta
Uin: 277 V / 60 Hz; Secondary only 24V, Landscape mode, PPL
Coaxial

Full Spectrum

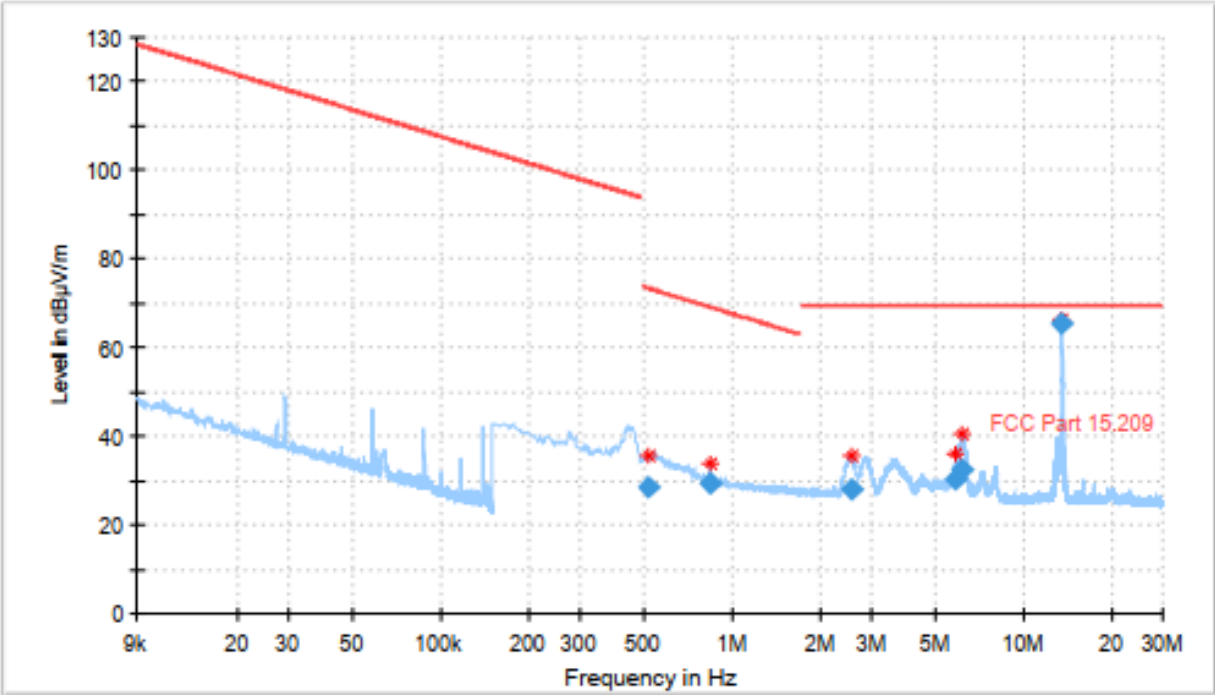

Final Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	65.41	69.50	4.09	1000.0	9.000	H	0.0	18.3
6.184500	32.68	69.50	36.82	1000.0	9.000	H	288.0	18.3
5.867250	30.38	69.50	39.12	1000.0	9.000	H	146.0	18.3
0.838500	29.32	69.15	39.83	1000.0	9.000	H	42.0	18.1
2.550750	28.09	69.50	41.41	1000.0	9.000	H	30.0	18.2
0.514500	28.41	73.38	44.97	1000.0	9.000	H	146.0	18.1

Only secondary pad active, antenna in Y orientation:

EUT Information

EUT: 10 kW Delta
Operating Mode: Uin: 277 V / 60 Hz; Secondary only 24V, Landscape mode, PPL mode
Polarization: Coplanar

Full Spectrum

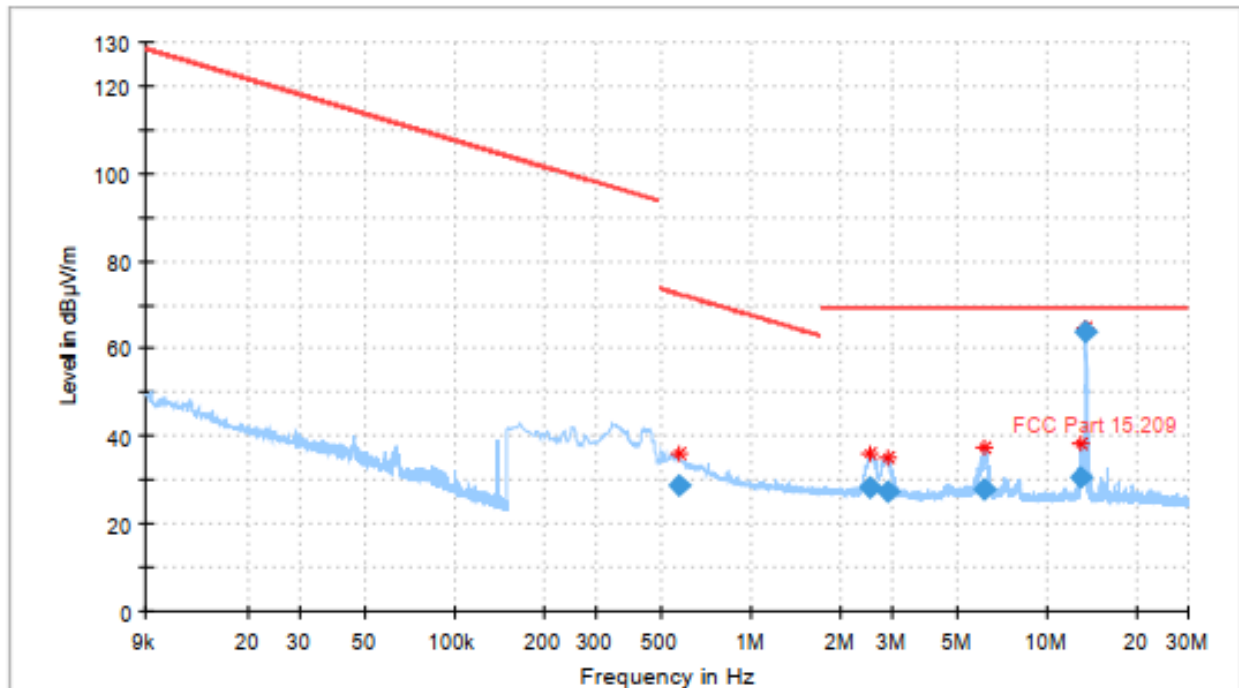

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	63.96	69.50	5.54	1000.0	9.000	H	54.0	18.3
13.067250	30.47	69.50	39.03	1000.0	9.000	H	54.0	18.3
2.514750	28.09	69.50	41.41	1000.0	9.000	H	66.0	18.2
6.162000	27.79	69.50	41.71	1000.0	9.000	H	255.0	18.3
2.877000	27.59	69.50	41.91	1000.0	9.000	H	255.0	18.2
0.573000	28.59	72.45	43.86	1000.0	9.000	H	12.0	18.1

Portrait mode:

Only secondary pad active, antenna in X orientation:

EUT Information

EUT:

10 kW Delta, Secondary 2


Operating Mode:

Secondary only, Input 50V d.c., Portrait mode, PPL mode

Antenna Polarization:

Coaxial

Full Spectrum

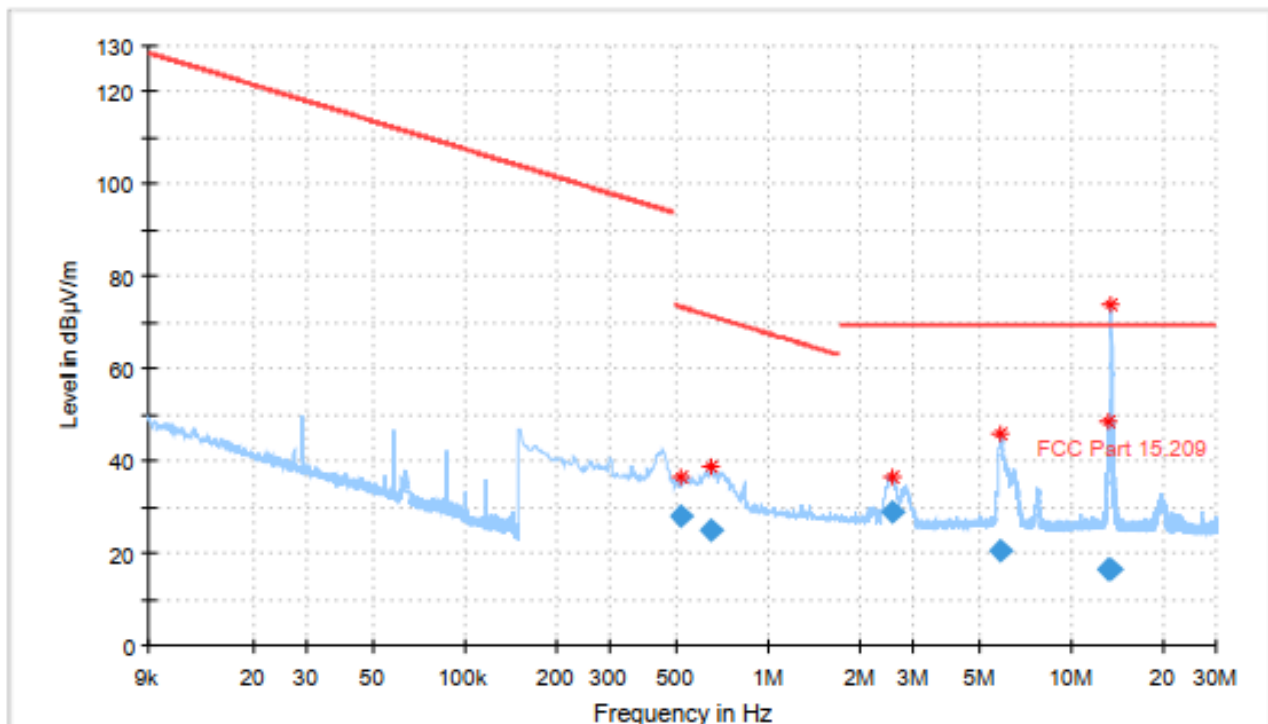

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
2.541750	29.15	69.50	40.35	1000.0	9.000	H	231.0	18.2
0.514500	27.97	73.38	45.41	1000.0	9.000	H	313.0	18.1
0.651750	24.79	71.33	46.54	1000.0	9.000	H	66.0	18.1
5.835750	20.52	69.50	48.98	1000.0	9.000	H	100.0	18.3
13.560000	16.50	69.50	53.00	1000.0	9.000	H	335.0	18.3
13.299000	16.29	69.50	53.21	1000.0	9.000	H	335.0	18.3

Only secondary pad active, antenna in y orientation:

EUT Information

EUT: 10 kW Delta, Secondary 2
Operating Mode: Secondary only, Input 50V d.c., Portrait mode, PPL mode
Antenna Polarization: Coplanar

Full Spectrum

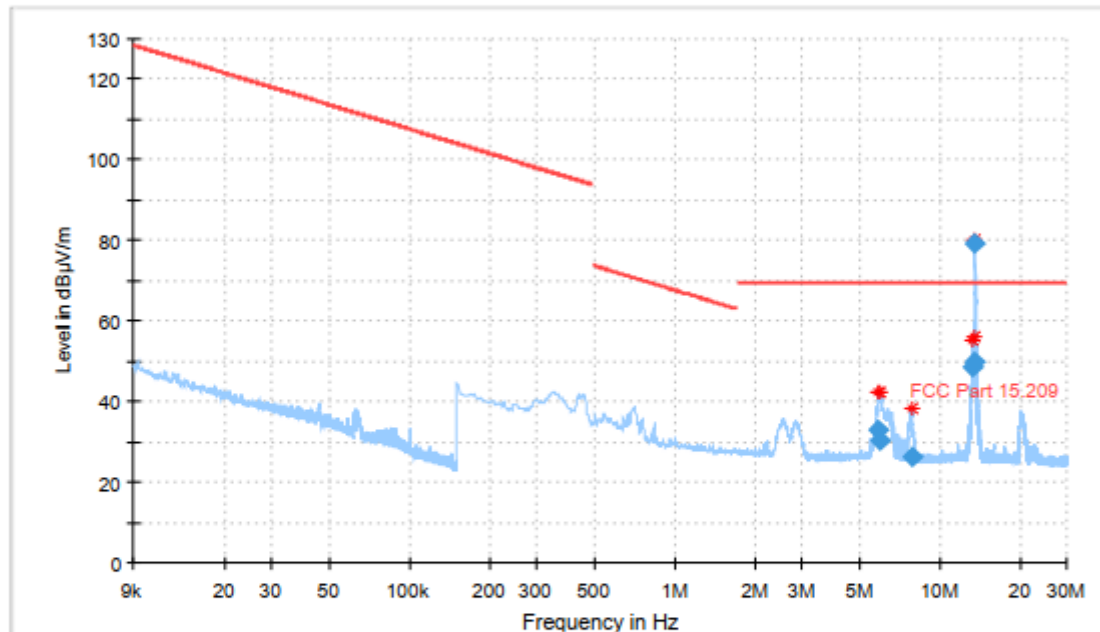

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	79.44	69.50	-9.94	1000.0	9.000	H	265.0	18.3
13.357500	49.74	69.50	19.76	1000.0	9.000	H	276.0	18.3
13.299000	48.50	69.50	21.00	1000.0	9.000	H	265.0	18.3
5.847000	33.06	69.50	36.44	1000.0	9.000	H	358.0	18.3
5.937000	30.19	69.50	39.31	1000.0	9.000	H	181.0	18.3
7.797750	26.09	69.50	43.41	1000.0	9.000	H	158.0	18.3

Only secondary pad active, antenna in X orientation:

EUT Information

EUT: 10 kW Delta
 Operating Mode: Uin: 277 V / 60 Hz; Secondary only 36V, Portrait mode, PPL mode
 Polarization: Coaxial

Full Spectrum

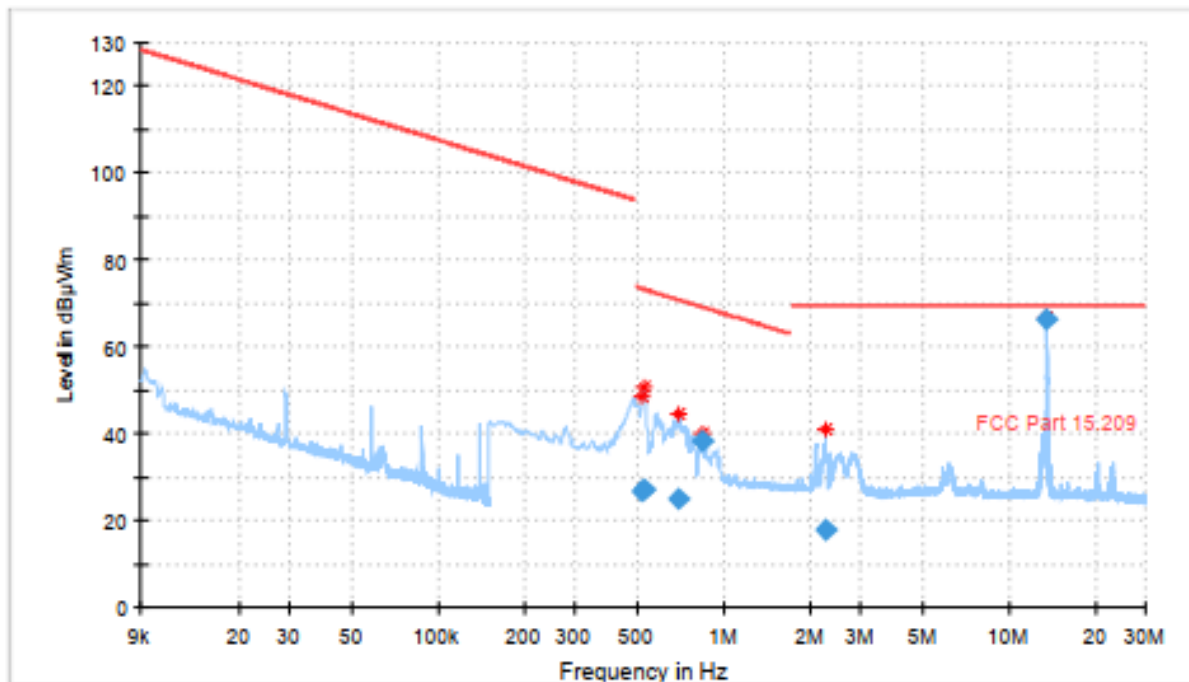

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	66.21	69.50	3.29	1000.0	9.000	H	342.0	18.3
0.838500	38.30	69.15	30.85	1000.0	9.000	H	66.0	18.1
0.696750	25.13	70.75	45.62	1000.0	9.000	H	123.0	18.1
0.525750	27.36	73.19	45.83	1000.0	9.000	H	123.0	18.1
0.519000	26.77	73.30	46.54	1000.0	9.000	H	123.0	18.1
2.274000	17.93	69.50	51.57	1000.0	9.000	H	123.0	18.2

Only secondary pad active, antenna in Y orientation:

EUT Information

EUT:

10 kW Delta


Operating Mode:

Uin: 277 V / 60 Hz; Secondary only 36V, Portrait mode, PPL mode

Polarization:

Coplanar

Full Spectrum

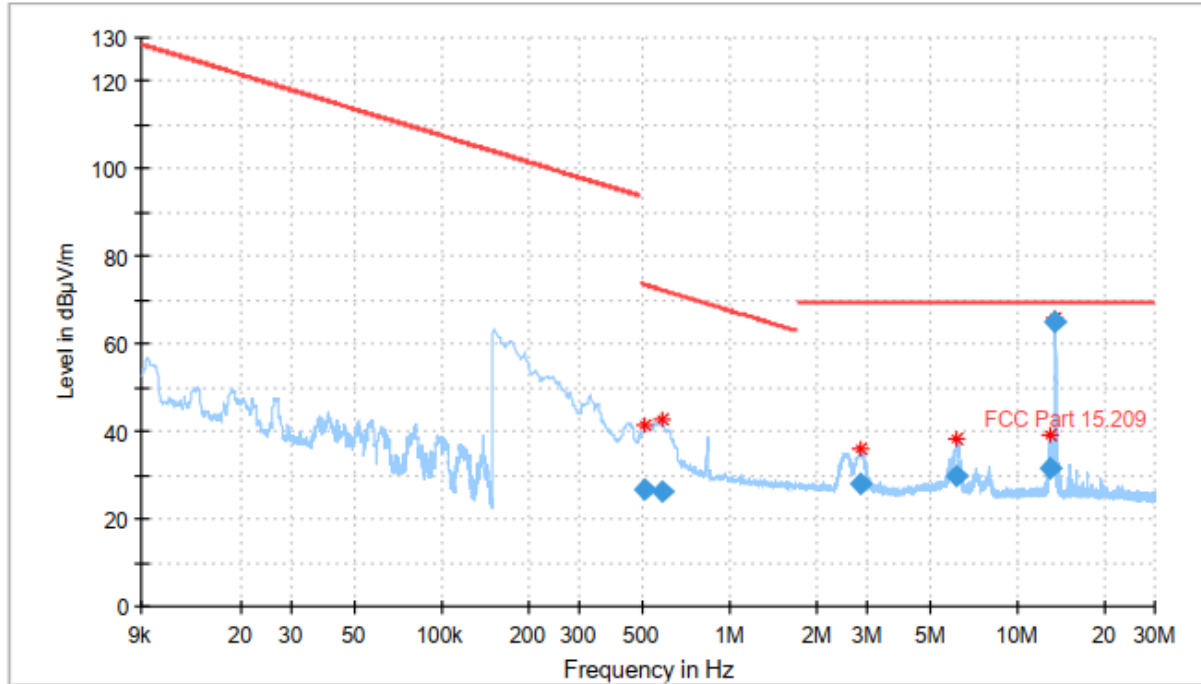

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	65.12	69.50	4.38	1000.0	9.000	H	53.0	18.3
13.067250	31.40	69.50	38.10	1000.0	9.000	H	53.0	18.3
6.146250	29.66	69.50	39.84	1000.0	9.000	H	6.0	18.3
2.832000	28.27	69.50	41.23	1000.0	9.000	H	217.0	18.2
0.579750	26.45	72.34	45.90	1000.0	9.000	H	206.0	18.1
0.510000	26.72	73.45	46.74	1000.0	9.000	H	53.0	18.0

Only secondary pad active, antenna in X orientation:

EUT Information

EUT:

Operating Mode:


Polarization:

10 kW Delta

Uin: 277 V / 60 Hz; Secondary only 24V, Portrait mode, PPL mode

Coaxial

Full Spectrum

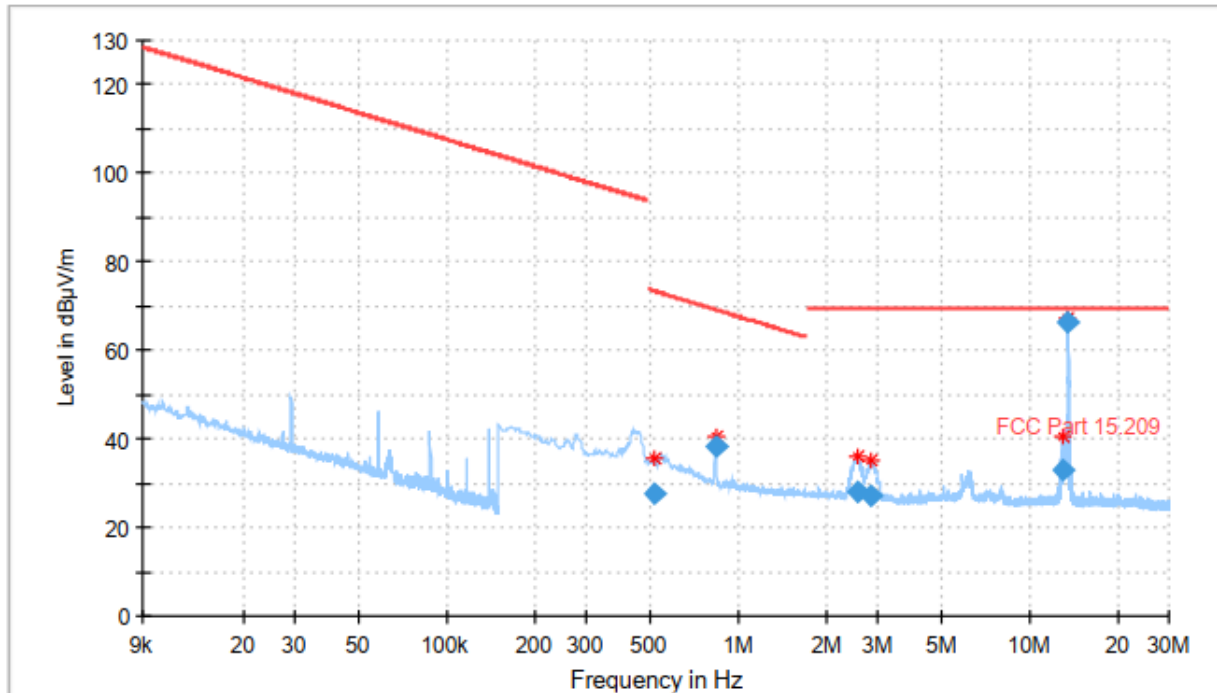

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	66.21	69.50	3.29	1000.0	9.000	H	341.0	18.3
0.838500	38.31	69.15	30.83	1000.0	9.000	H	74.0	18.1
13.011000	33.05	69.50	36.45	1000.0	9.000	H	348.0	18.3
2.559750	28.14	69.50	41.36	1000.0	9.000	H	320.0	18.2
2.847750	27.19	69.50	42.31	1000.0	9.000	H	2.0	18.2
0.516750	27.76	73.34	45.58	1000.0	9.000	H	12.0	18.1

Only secondary pad active, antenna in Y orientation:

EUT Information

EUT:

10 kW Delta


Operating Mode:

Uin: 277 V / 60 Hz; Secondary only 24V, Portrait mode, PPL mode

Polarization:

Coplanar

Full Spectrum

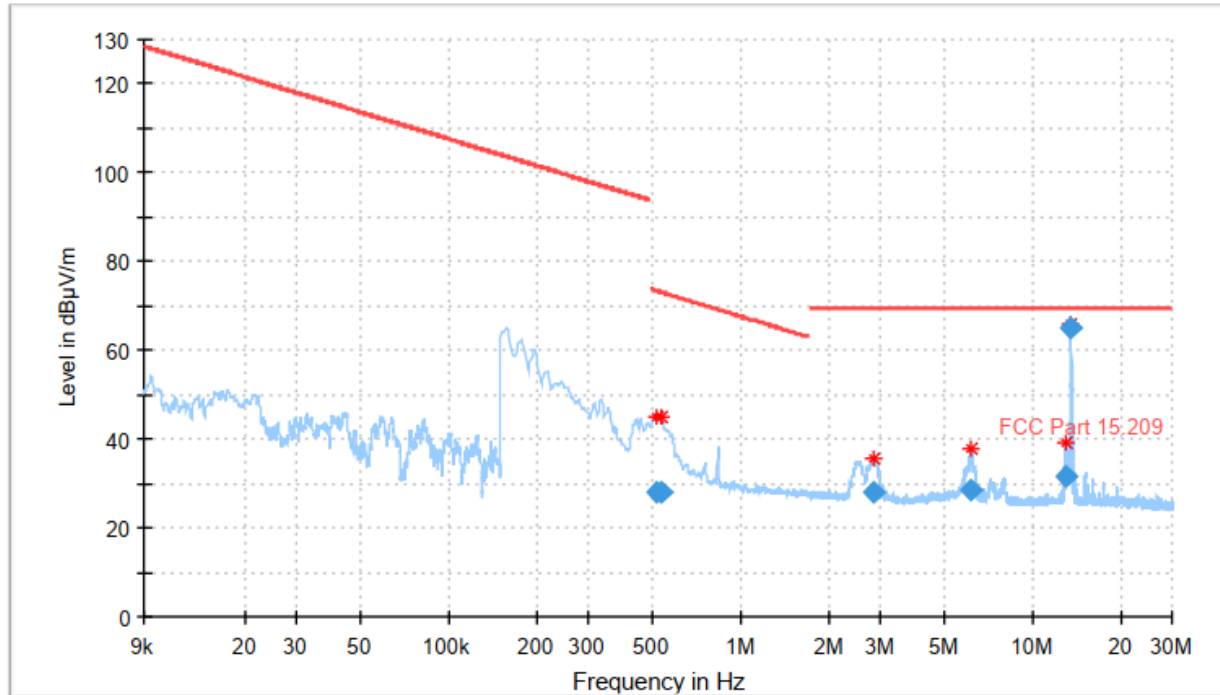

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	65.14	69.50	4.36	1000.0	9.000	H	52.0	18.3
13.011000	31.43	69.50	38.07	1000.0	9.000	H	64.0	18.3
6.171000	28.33	69.50	41.17	1000.0	9.000	H	52.0	18.3
2.854500	28.19	69.50	41.31	1000.0	9.000	H	308.0	18.2
0.530250	27.89	73.12	45.23	1000.0	9.000	H	359.0	18.1
0.516750	28.02	73.34	45.32	1000.0	9.000	H	359.0	18.1

Primary and secondary pad active, antenna in X orientation:

EUT Information

EUT: 10 kW Delta,
 Operating Mode: Uin: 277 V / 60 Hz; Secondary voltage 50 V, Both active,
 Landscape mode, PPL mode
 Antenna Polarization: Coaxial

Full Spectrum

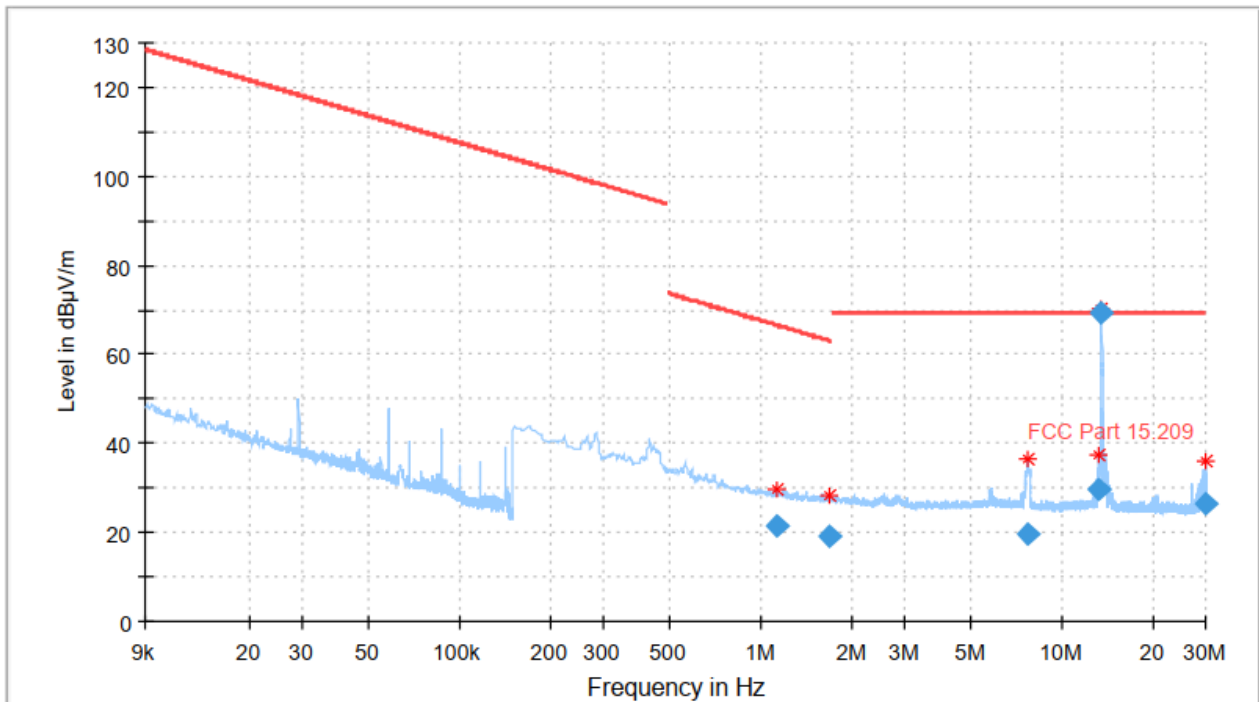

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	69.47	69.50	0.03	1000.0	9.000	H	342.0	18.3
13.299000	29.63	69.50	39.87	1000.0	9.000	H	137.0	18.3
29.764500	26.67	69.50	42.83	1000.0	9.000	H	137.0	18.1
1.675500	18.94	63.15	44.21	1000.0	9.000	H	125.0	18.1
1.126500	21.58	66.59	45.01	1000.0	9.000	H	231.0	18.1
7.696500	19.57	69.50	49.93	1000.0	9.000	H	101.0	18.3

Primary and secondary pad active, antenna in Y orientation:

EUT Information

EUT: 10 kW Delta,
Operating Mode: Uin: 277 V / 60 Hz; Secondary voltage 50 V, Both active,
Landscape mode, PPL mode
Antenna Polarization: Coplanar

Full Spectrum

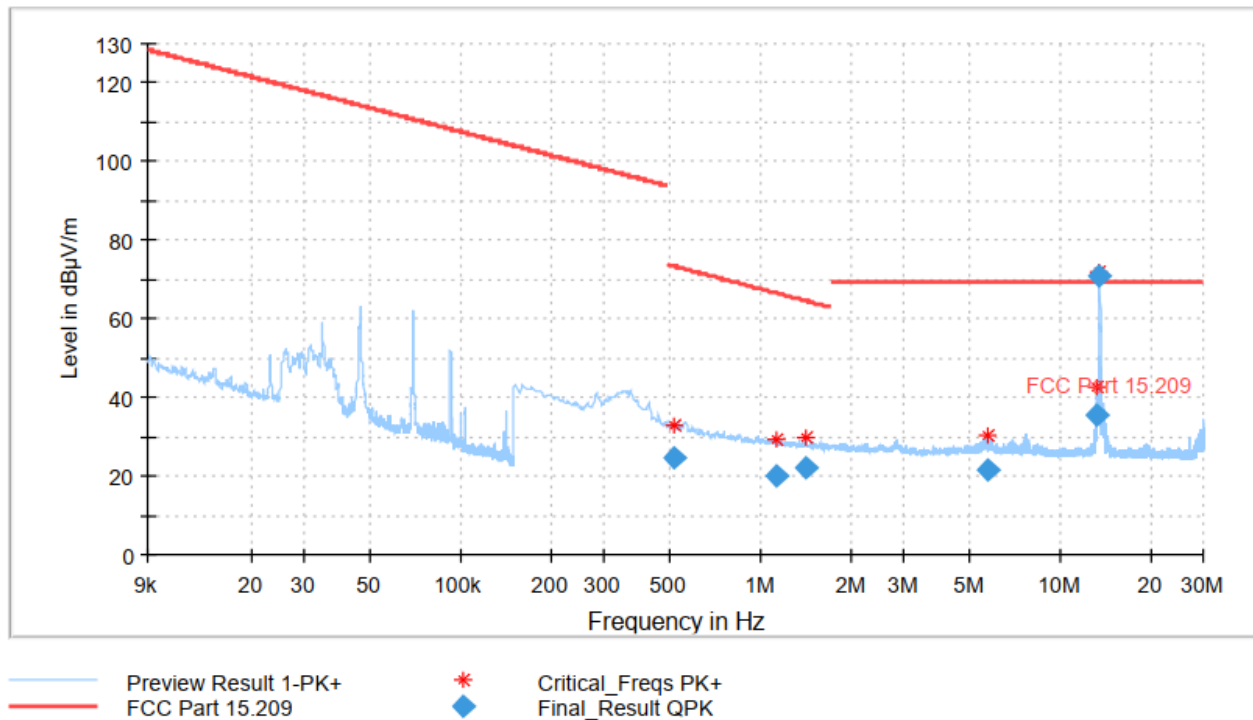

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	71.03	69.50	-1.53	1000.0	9.000	H	51.0	18.3
13.299000	35.53	69.50	33.97	1000.0	9.000	H	63.0	18.3
1.410000	22.30	64.65	42.35	1000.0	9.000	H	169.0	18.1
1.137750	20.17	66.50	46.33	1000.0	9.000	H	255.0	18.1
5.680500	21.72	69.50	47.78	1000.0	9.000	H	122.0	18.3
0.516750	24.69	73.34	48.65	1000.0	9.000	H	134.0	18.1

Primary and secondary pad active, antenna in X orientation:

EUT Information


EUT:

10 kW Delta

Operating Mode:

Uin: 277 V / 60 Hz; Secondary voltage 50 V, Both active, Portrait mode, PPL mode

Full Spectrum

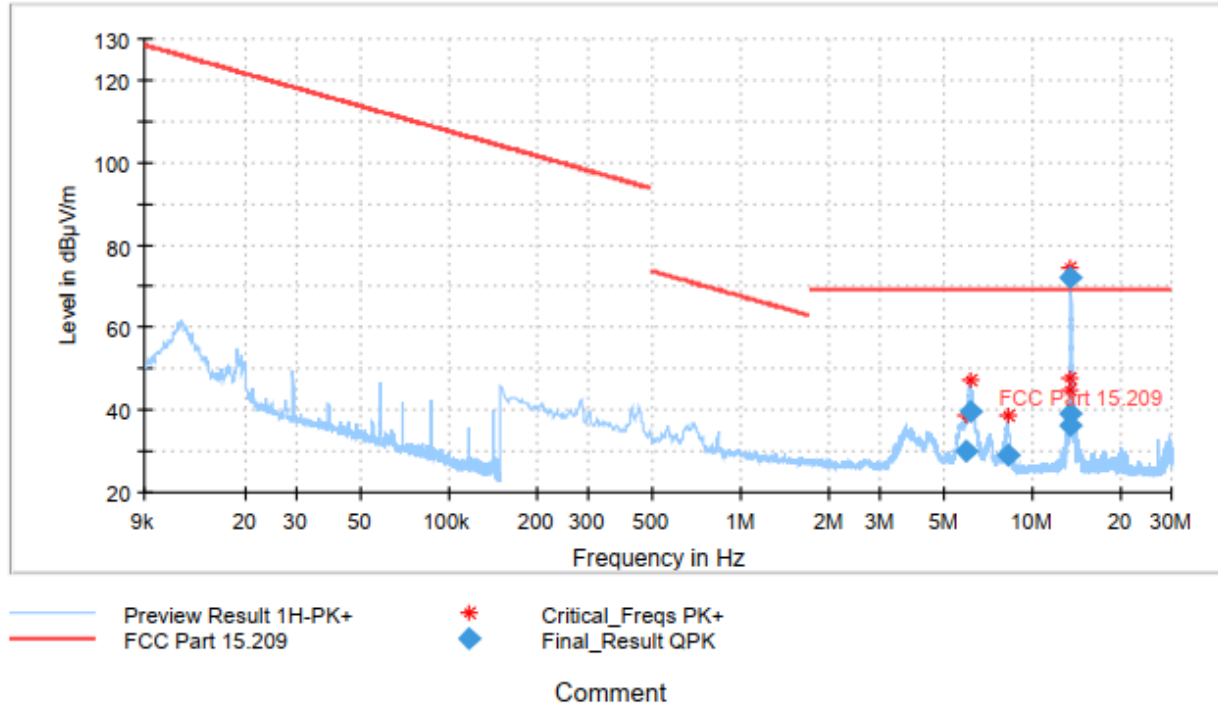

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth h (deg)	Corr. (dB/m)
5.905500	29.88	69.50	39.62	1000.0	9.000	H	213.0	18.3
6.128250	39.49	69.50	30.01	1000.0	9.000	H	296.0	18.3
8.229750	29.01	69.50	40.49	1000.0	9.000	H	166.0	18.3
13.357500	36.02	69.50	33.48	1000.0	9.000	H	24.0	18.3
13.416000	39.06	69.50	30.44	1000.0	9.000	H	24.0	18.3
13.560000	72.11	69.50	-2.61	1000.0	9.000	H	24.0	18.3

Primary and secondary pad active, antenna in Y orientation:

EUT Information


EUT:

10 kW Delta

Operating Mode:

Uin: 277 V / 60 Hz; Secondary voltage 50 V, Both active, Portrait mode, PPL mode

Full Spectrum

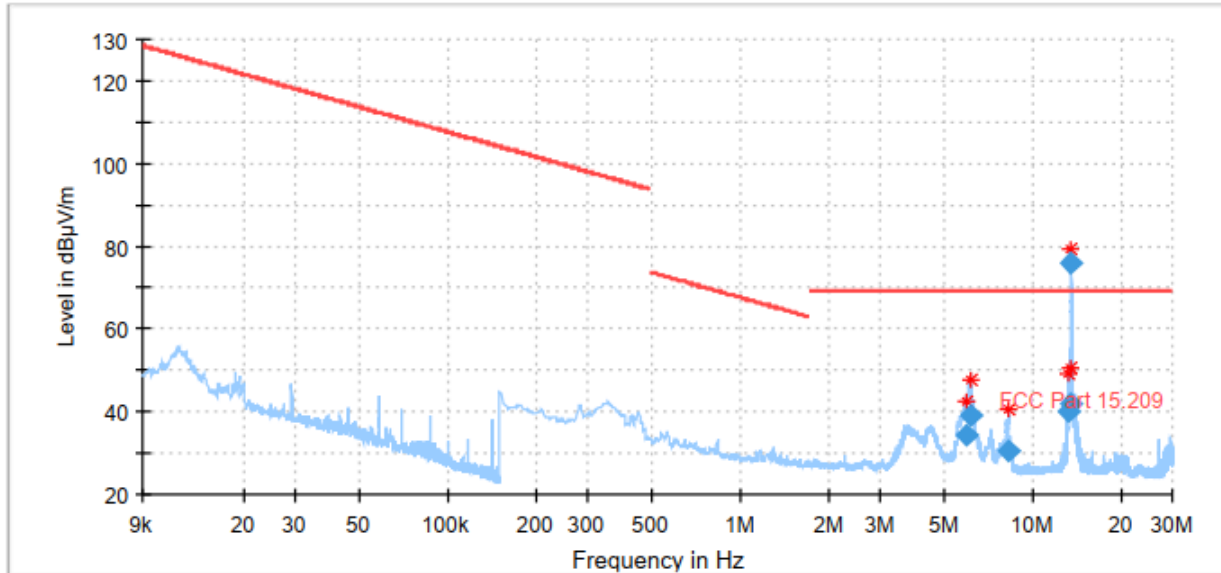

— Preview Result 1H-PK+
— FCC Part 15.209

* Critical_Freqs PK+
◆ Final_Result QPK

Comment

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azim uth (deg)	Corr. (dB/m)
5.919000	34.24	69.50	35.26	1000.0	9.000	H	159.0	18.3
6.083250	39.14	69.50	30.36	1000.0	9.000	H	358.0	18.3
8.232000	30.46	69.50	39.04	1000.0	9.000	H	29.0	18.3
13.299000	40.26	69.50	29.24	1000.0	9.000	H	0.0	18.3
13.357500	42.10	69.50	27.40	1000.0	9.000	H	6.0	18.3
13.560000	76.16	69.50	-6.66	1000.0	9.000	H	53.0	18.3

Primary and secondary pad active, antenna in X orientation:

EUT Information

EUT: 10 kW Delta
 Operating Mode: Uin: 277 V / 60 Hz; Secondary voltage 36 V, Both active, Landscape mode, PPL mode
 Polarization: Coaxial

Full Spectrum

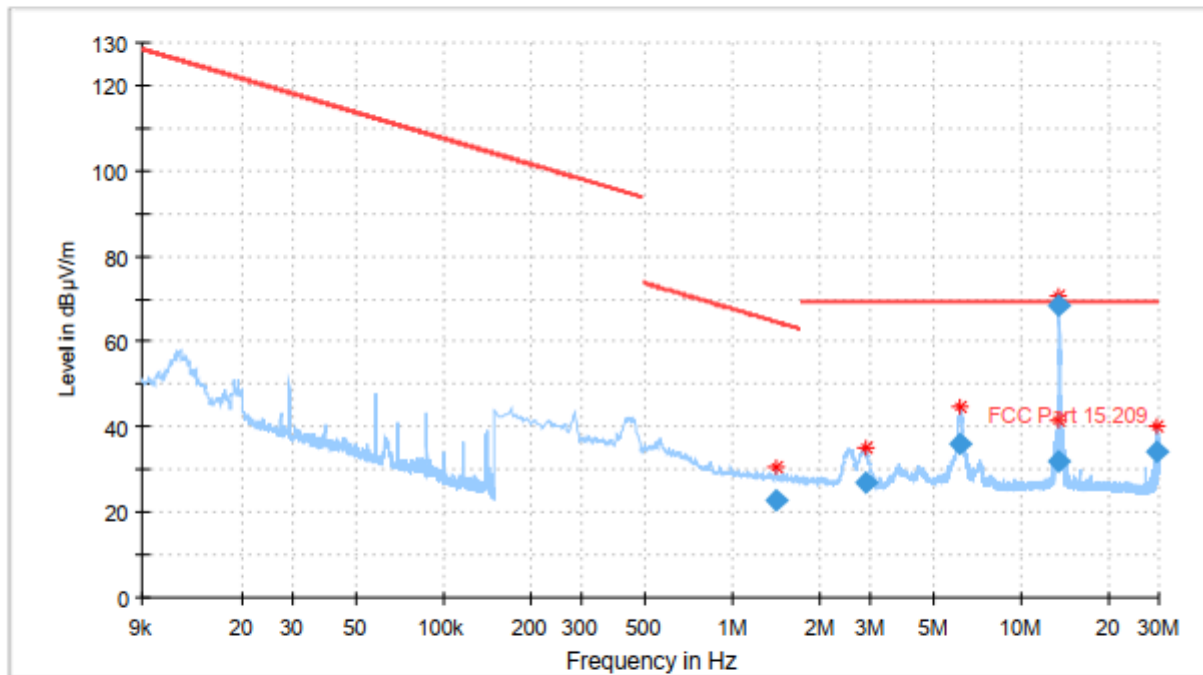

Final Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	68.31	69.50	1.19	1000.0	9.000	H	0.0	18.3
6.166500	36.21	69.50	33.29	1000.0	9.000	H	315.0	18.3
29.721750	34.34	69.50	35.16	1000.0	9.000	H	135.0	18.1
13.357500	31.84	69.50	37.66	1000.0	9.000	H	6.0	18.3
1.410000	23.01	64.65	41.64	1000.0	9.000	H	233.0	18.1
2.872500	26.82	69.50	42.68	1000.0	9.000	H	19.0	18.2

Primary and secondary pad active, antenna in Y orientation:

EUT Information

EUT: 10 kW Delta
 Operating Mode: Uin: 277 V / 60 Hz; Secondary voltage 36 V, Both active, Landscape mode, PPL mode
 Polarization: Coplanar

Full Spectrum

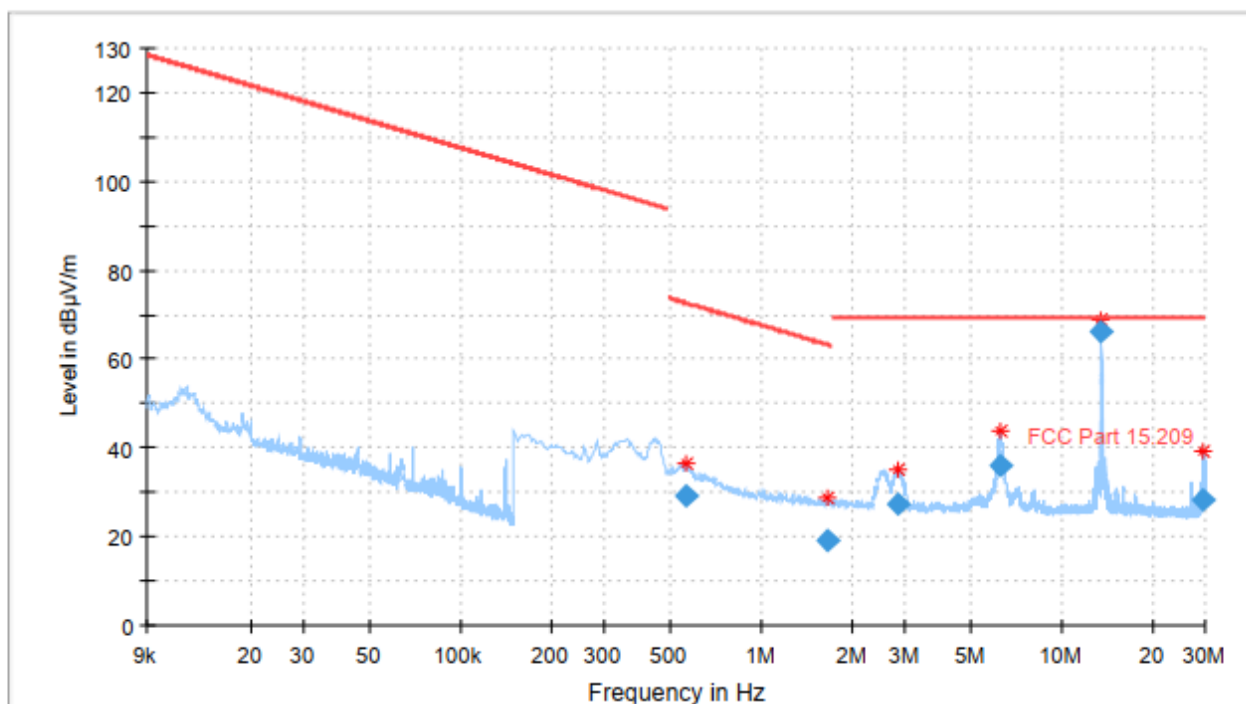

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	66.22	69.50	3.28	1000.0	9.000	H	277.0	18.3
6.225000	35.88	69.50	33.62	1000.0	9.000	H	149.0	18.3
29.685750	28.46	69.50	41.04	1000.0	9.000	H	149.0	18.1
2.863500	27.21	69.50	42.29	1000.0	9.000	H	2.0	18.2
0.557250	29.12	72.69	43.56	1000.0	9.000	H	149.0	18.1
1.671000	19.23	63.17	43.94	1000.0	9.000	H	312.0	18.1

Primary and secondary pad active, antenna in X orientation:

EUT Information

EUT: 10 kW Delta
 Operating Mode: Uin: 277 V / 60 Hz; Secondary voltage 36 V, Both active, Potrait mode, PPL mode
 Polarization: Coaxial

Full Spectrum

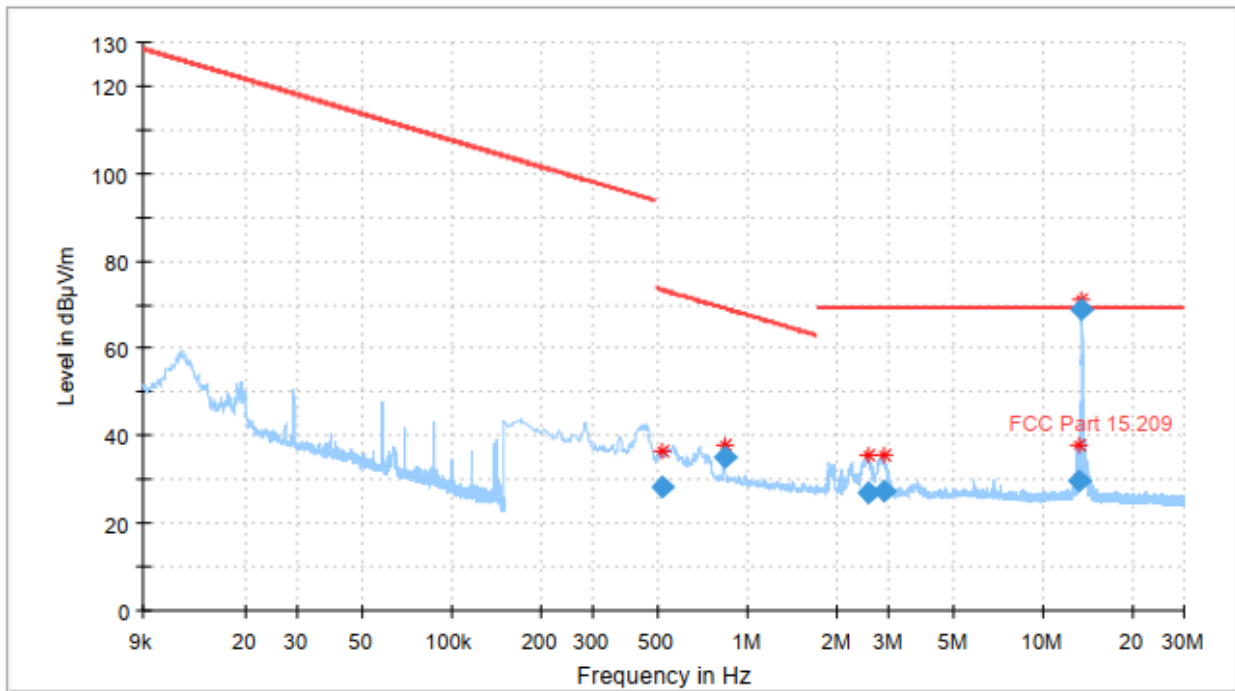

Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	68.91	69.50	0.59	1000.0	9.000	H	12.0	18.3
0.838500	35.10	69.15	34.05	1000.0	9.000	H	90.0	18.1
13.299000	29.80	69.50	39.70	1000.0	9.000	H	358.0	18.3
2.872500	27.38	69.50	42.12	1000.0	9.000	H	196.0	18.2
2.557500	27.07	69.50	42.43	1000.0	9.000	H	324.0	18.2
0.514500	28.45	73.38	44.93	1000.0	9.000	H	115.0	18.1

Primary and secondary pad active, antenna in Y orientation:

EUT Information

EUT:

10 kW Delta


Operating Mode:

Uin: 277 V / 60 Hz; Secondary voltage 36 V, Both active, Potrait mode, PPL mode

Polarization:

Coplanar

Full Spectrum

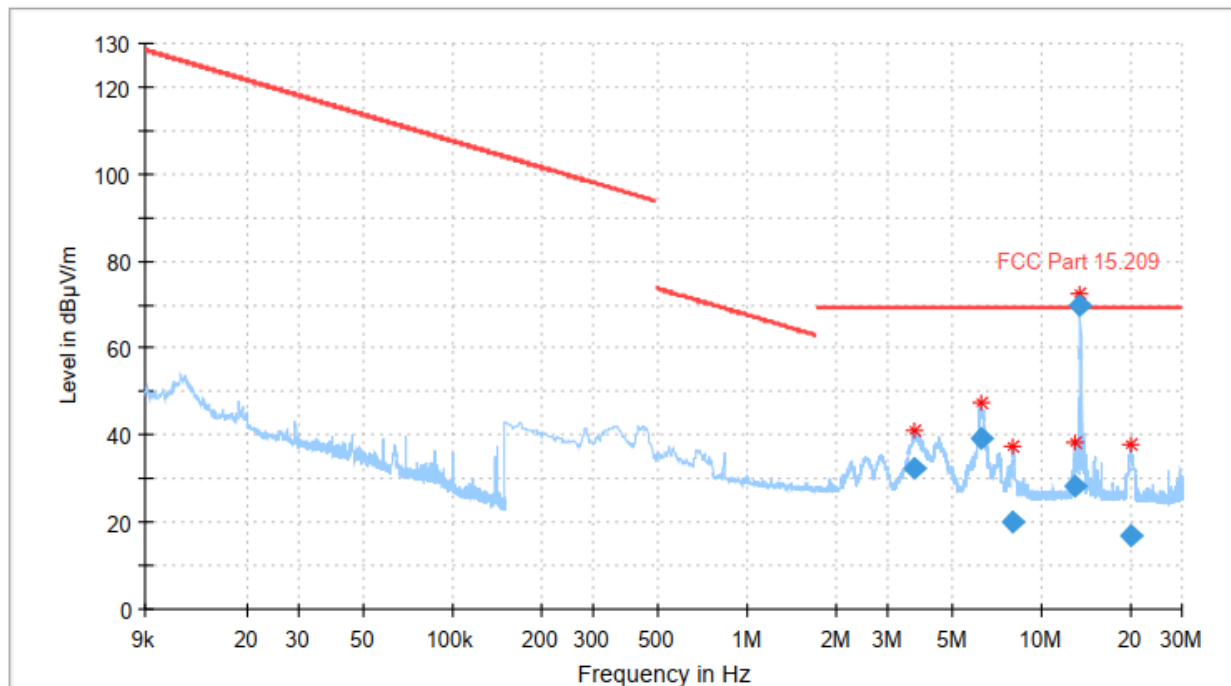

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	69.66	69.50	-0.16	1000.0	9.000	H	275.0	18.3
6.245250	39.20	69.50	30.30	1000.0	9.000	H	354.0	18.3
3.707250	32.45	69.50	37.05	1000.0	9.000	H	310.0	18.3
13.011000	28.15	69.50	41.35	1000.0	9.000	H	287.0	18.3
8.016000	19.92	69.50	49.58	1000.0	9.000	H	159.0	18.3
20.055750	16.81	69.50	52.69	1000.0	9.000	H	65.0	18.4

Primary and secondary pad active, antenna in X orientation:

EUT Information

EUT: 10 kW Delta
 Operating Mode: Uin: 277 V / 60 Hz; Secondary voltage 24 V, Both active, Landscape mode, PPL mode
 Polarization: Coaxial

Full Spectrum

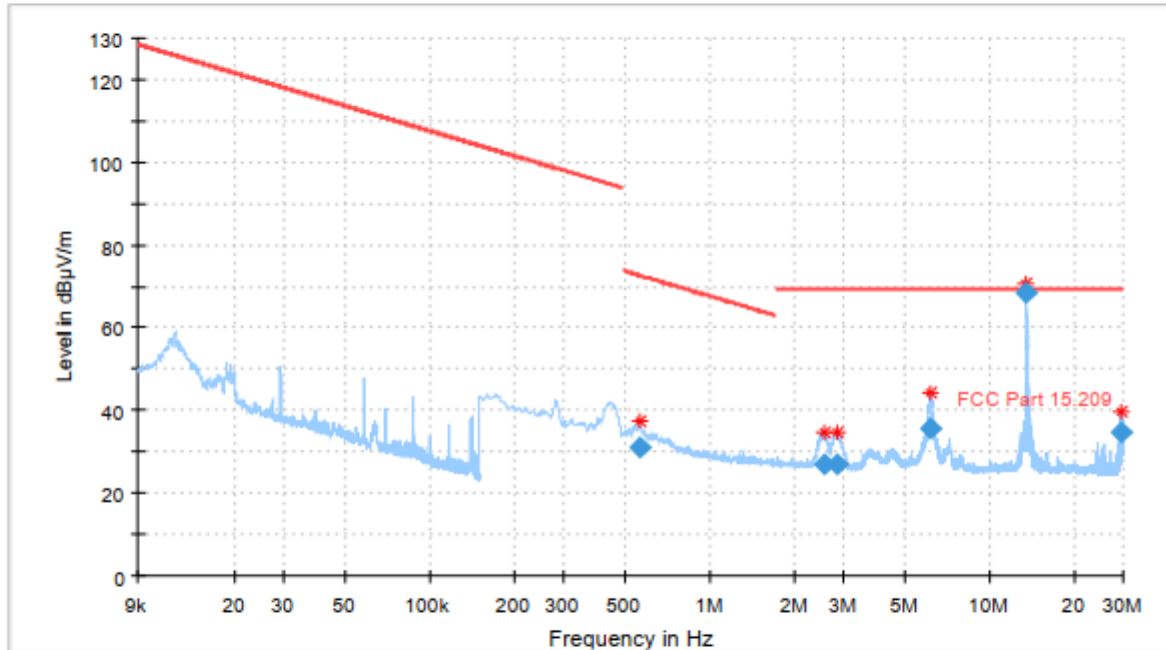

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	68.41	69.50	1.09	1000.0	9.000	H	0.0	18.3
6.123750	35.68	69.50	33.82	1000.0	9.000	H	254.0	18.3
29.728500	34.75	69.50	34.75	1000.0	9.000	H	135.0	18.1
0.561750	30.84	72.62	41.78	1000.0	9.000	H	111.0	18.1
2.825250	26.81	69.50	42.69	1000.0	9.000	H	350.0	18.2
2.571000	26.72	69.50	42.78	1000.0	9.000	H	230.0	18.2

Primary and secondary pad active, antenna in Y orientation:

EUT Information

EUT: 10 kW Delta
 Operating Mode: Uin: 277 V / 60 Hz; Secondary voltage 24 V, Both active, Landscape mode, PPL mode
 Polarization: Coplanar

Full Spectrum

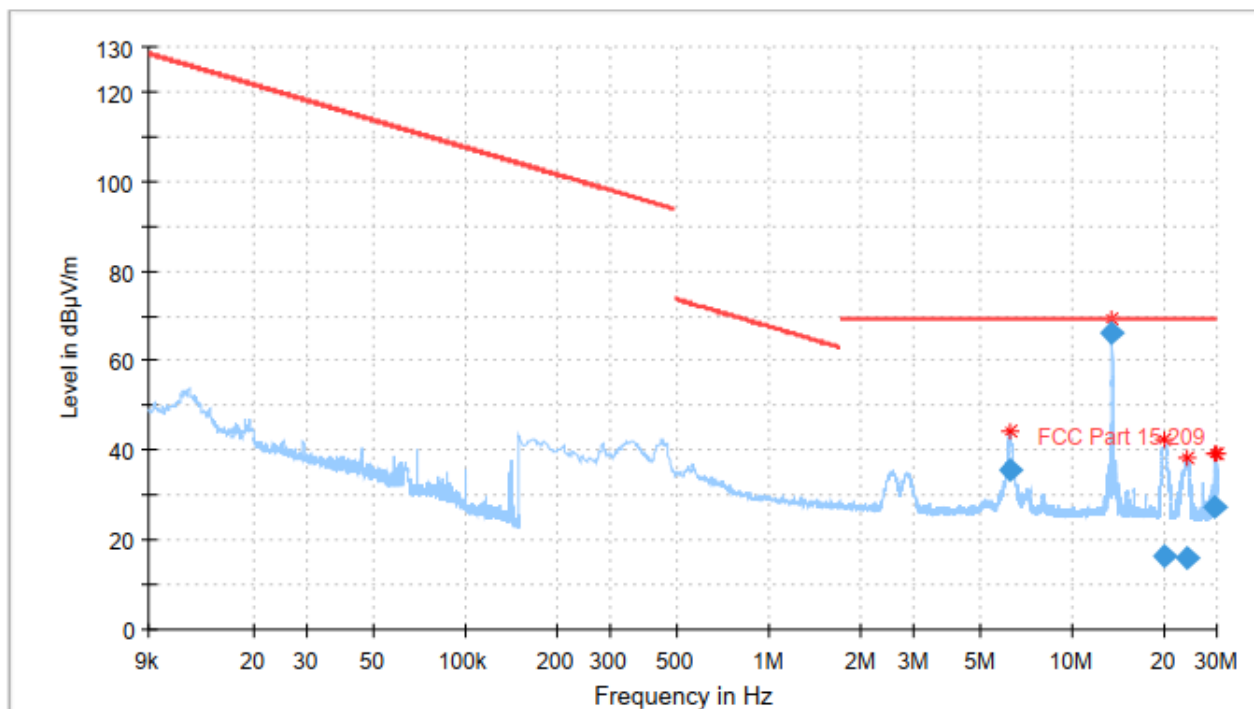

Final Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	66.18	69.50	3.32	1000.0	9.000	H	271.0	18.3
6.229500	35.65	69.50	33.85	1000.0	9.000	H	53.0	18.3
29.683500	27.27	69.50	42.23	1000.0	9.000	H	152.0	18.1
20.067000	16.38	69.50	53.12	1000.0	9.000	H	352.0	18.4
23.952750	15.92	69.50	53.58	1000.0	9.000	H	352.0	18.3

Primary and secondary pad active, antenna in X orientation:

EUT Information

EUT: 10 kW Delta
 Operating Mode: Uin: 277 V / 60 Hz; Secondary voltage 24 V, Both active, Potrait mode, PPL mode
 Polarization: Coaxial

Full Spectrum

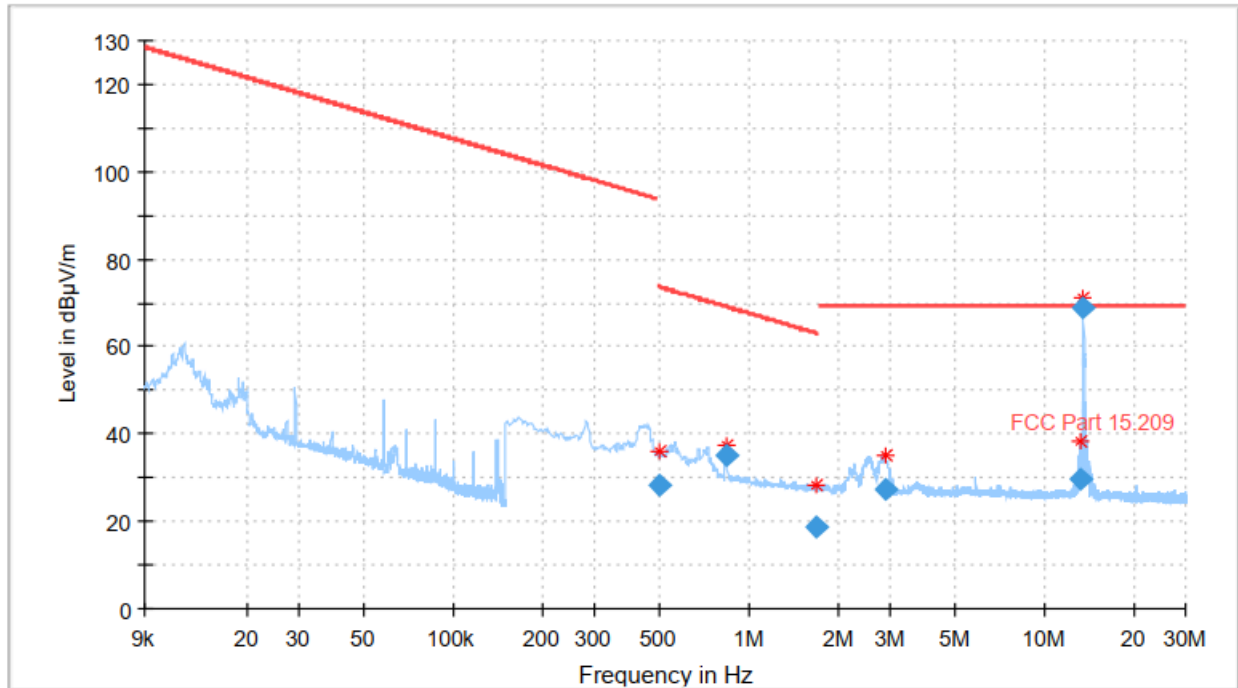

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	68.85	69.50	0.65	1000.0	9.000	H	11.0	18.3
0.838500	35.13	69.15	34.02	1000.0	9.000	H	85.0	18.1
13.301250	29.68	69.50	39.82	1000.0	9.000	H	6.0	18.3
2.883750	27.51	69.50	41.99	1000.0	9.000	H	236.0	18.2
1.693500	18.88	63.06	44.18	1000.0	9.000	H	19.0	18.1
0.501000	28.17	73.61	45.44	1000.0	9.000	H	85.0	18.0

Primary and secondary pad active, antenna in Y orientation:

EUT Information

EUT:

10 kW Delta


Operating Mode:

Uin: 277 V / 60 Hz; Secondary voltage 24 V, Both active, Potrait mode, PPL mode

Polarization:

Coplanar

Full Spectrum

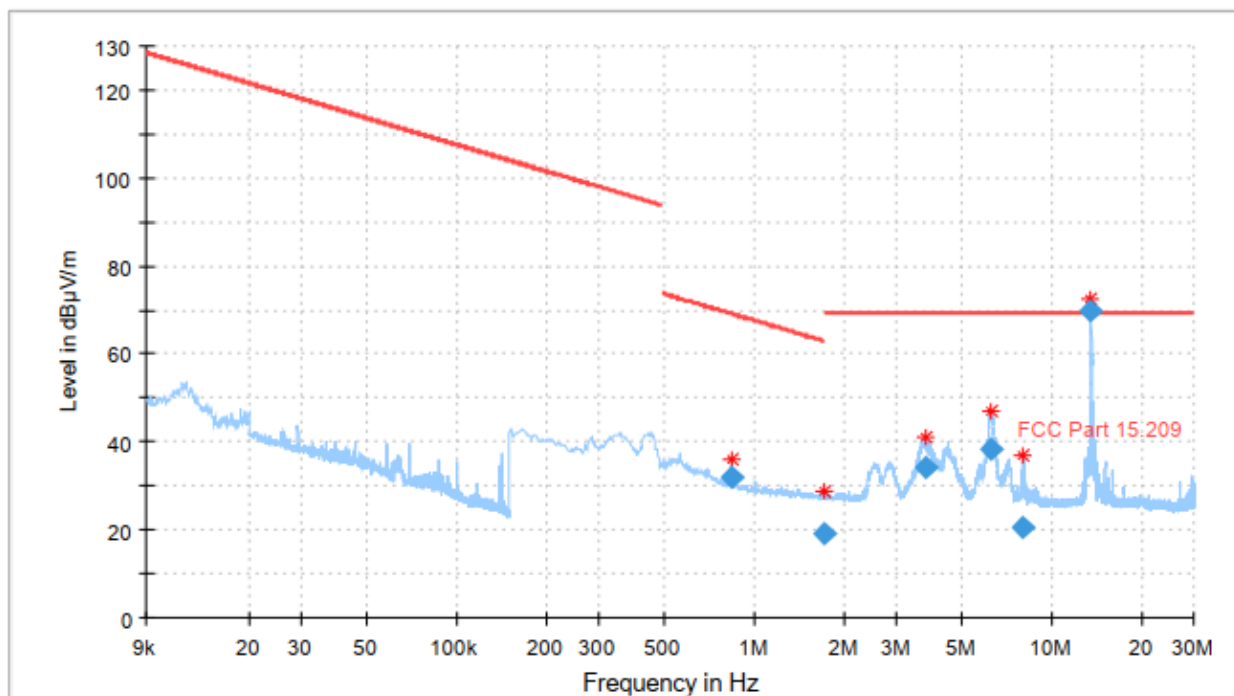

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	69.91	69.50	-0.41	1000.0	9.000	H	275.0	18.3
6.283500	38.43	69.50	31.07	1000.0	9.000	H	310.0	18.3
3.768000	34.00	69.50	35.50	1000.0	9.000	H	321.0	18.3
0.838500	32.08	69.15	37.07	1000.0	9.000	H	29.0	18.1
1.704750	18.93	63.00	44.07	1000.0	9.000	H	342.0	18.1
8.027250	20.49	69.50	49.01	1000.0	9.000	H	354.0	18.3

Final measurement at 10 m on OATS:

Results with measuring distance of 10 m				
Operating Mode	Frequency (MHz)	Measured value (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Secondary pad (Landscape)	13.56	63.40	103	37.79
Primary + secondary pad (Landscape)	13.56	66.62	103	36.38
Secondary pad (Portrait)	13.56	67.21	103	34.03
Primary + secondary pad (Portrait)	13.56	67.01	103	35.99

Calculated value from 10 m to 30 m						
Operating Mode	Frequency (MHz)	Measured value at 10 m (dBμV/m)	Correction factor from 10 m to 30 m (dB)	Calculated value at 30 m (dBμV/m)	Limit at 30 m (dBμV/m)	Margin (dB)
Secondary pad (Landscape)	13.56	63.40	19	44.40	84.00	39.60
Primary + secondary pad (Landscape)	13.56	66.62	19	47.62	84.00	36.38
Secondary pad (Portrait)	13.56	67.21	19	48.21	84.00	35.79
Primary + secondary pad (Portrait)	13.56	67.01	19	48.01	84.00	35.99

NOTE: Antenna factor and cable loss are included in measurement correction.

Only secondary pad active:

EUT Information


EUT:

10 kW Delta, Secondary 2

Operating Mode:

Secondary only, Input 50V d.c., Landscape mode, PPL mode

Full Spectrum

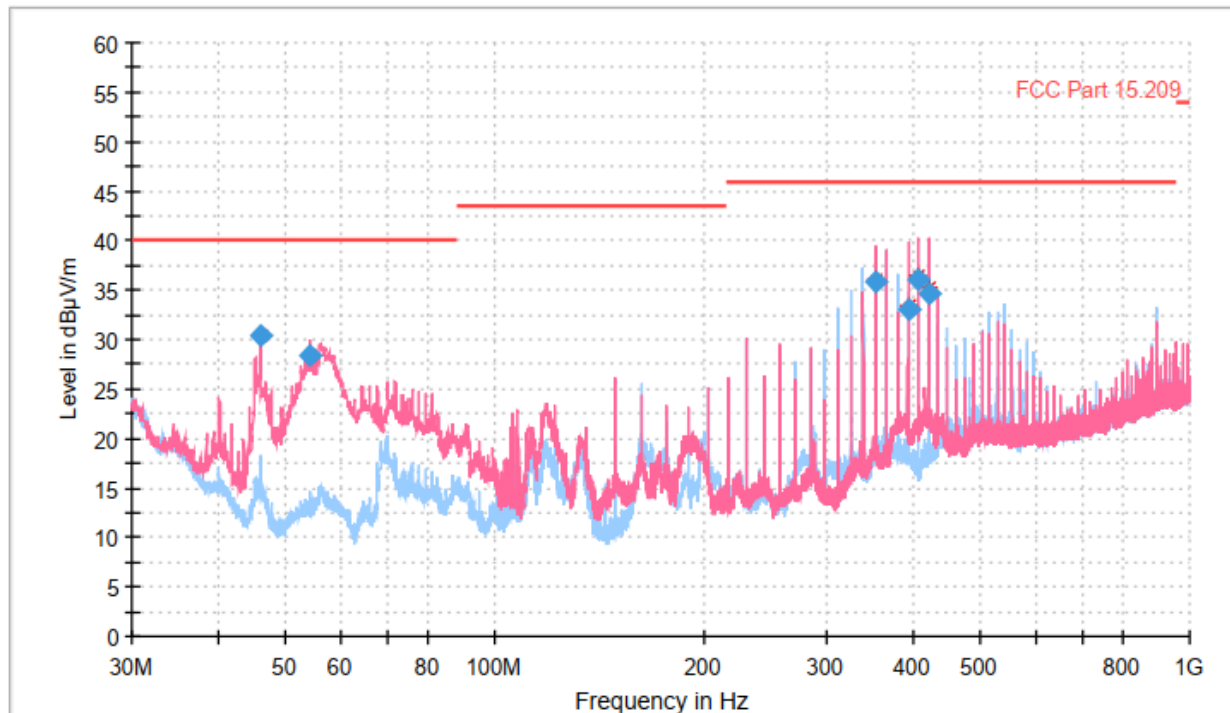

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.960000	30.34	40.00	9.66	1000.0	120.000	100.0	V	58.0	10.1
406.800000	36.01	46.00	9.99	1000.0	120.000	122.0	V	309.0	15.5
352.530000	35.79	46.00	10.21	1000.0	120.000	126.0	V	304.0	14.2
420.360000	34.67	46.00	11.33	1000.0	120.000	103.0	V	272.0	15.8
54.240000	28.33	40.00	11.67	1000.0	120.000	122.0	V	67.0	6.1
393.240000	32.96	46.00	13.04	1000.0	120.000	123.0	V	314.0	15.2

EUT Information


EUT:

10 kW Delta, Secondary 2

Operating Mode:

Secondary only, Input 50V d.c., Portrait mode, PPL mode

Full Spectrum

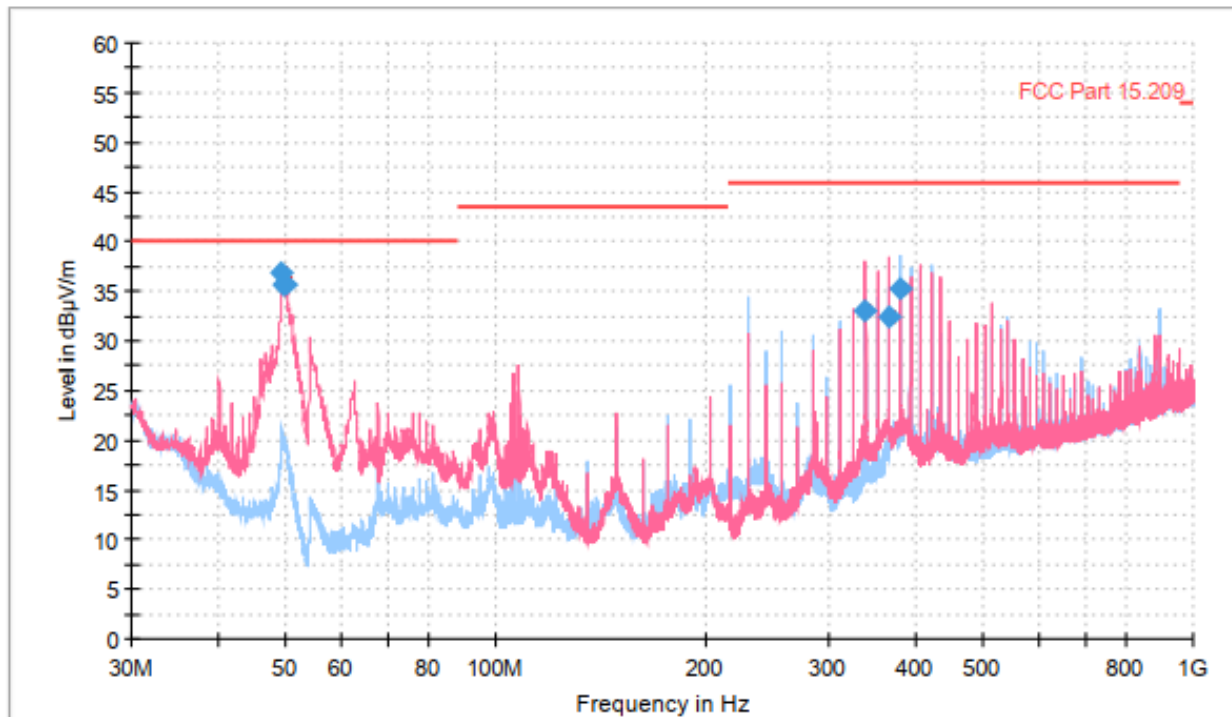

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.320000	36.80	40.00	3.20	1000.0	120.000	100.0	V	309.0	8.2
49.800000	35.74	40.00	4.26	1000.0	120.000	100.0	V	0.0	7.9
49.620000	35.64	40.00	4.36	1000.0	120.000	100.0	V	329.0	8.0
379.650000	35.31	46.00	10.69	1000.0	120.000	100.0	H	237.0	14.7
338.970000	32.92	46.00	13.08	1000.0	120.000	164.0	V	339.0	13.8
366.090000	32.43	46.00	13.57	1000.0	120.000	123.0	V	324.0	14.4

EUT Information


EUT:

10 kW Delta

Operating Mode:

Secondary only 36V, Landscape mode, PPL mode

Full Spectrum

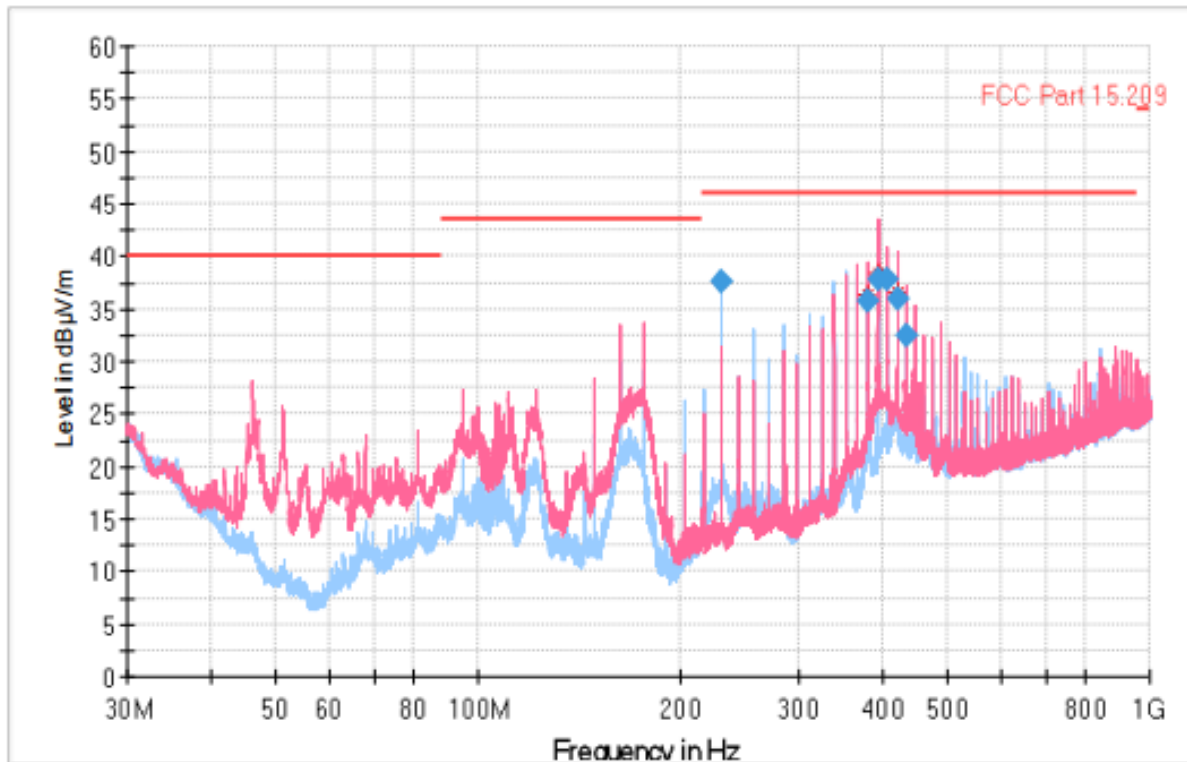

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth h (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr (dB/)
406.800000	37.86	46.00	8.14	1000.0	120.000	122.0	V	229.0	15.5
393.210000	37.85	46.00	8.15	1000.0	120.000	123.0	V	245.0	15.2
230.520000	37.58	46.00	8.42	1000.0	120.000	143.0	H	195.0	10.5
420.360000	35.87	46.00	10.13	1000.0	120.000	103.0	V	266.0	15.8
379.680000	35.74	46.00	10.26	1000.0	120.000	122.0	V	262.0	14.7
433.890000	32.44	46.00	13.56	1000.0	120.000	106.0	V	335.0	16.0

EUT Information


EUT:

10 kW Delta

Operating Mode:

Secondary only 24V, Landscape mode, PPL mode

Full Spectrum

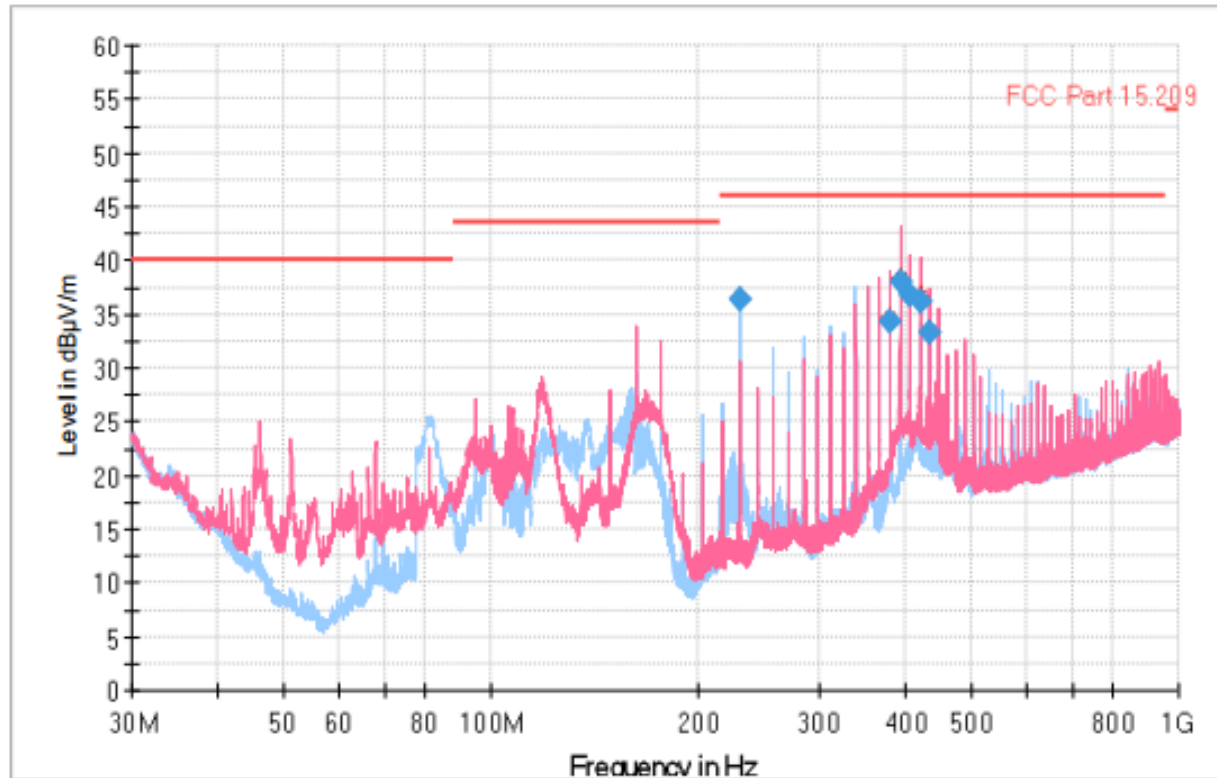

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth h (kHz)	Height (cm)	Pol	Azimuth h (deg)	Corr (dB/)
393.210000	38.06	46.00	7.94	1000.0	120.000	122.0	V	274.0	15.2
406.800000	36.87	46.00	9.13	1000.0	120.000	126.0	V	232.0	15.5
230.520000	36.42	46.00	9.58	1000.0	120.000	123.0	H	168.0	10.5
420.360000	36.08	46.00	9.92	1000.0	120.000	103.0	V	213.0	15.8
379.650000	34.28	46.00	11.72	1000.0	120.000	123.0	V	292.0	14.7
433.920000	33.38	46.00	12.62	1000.0	120.000	104.0	V	312.0	16.0

EUT Information


EUT:

10 kW Delta

Operating Mode:

Secondary only 24V, Portrait mode, PPL mode

Full Spectrum

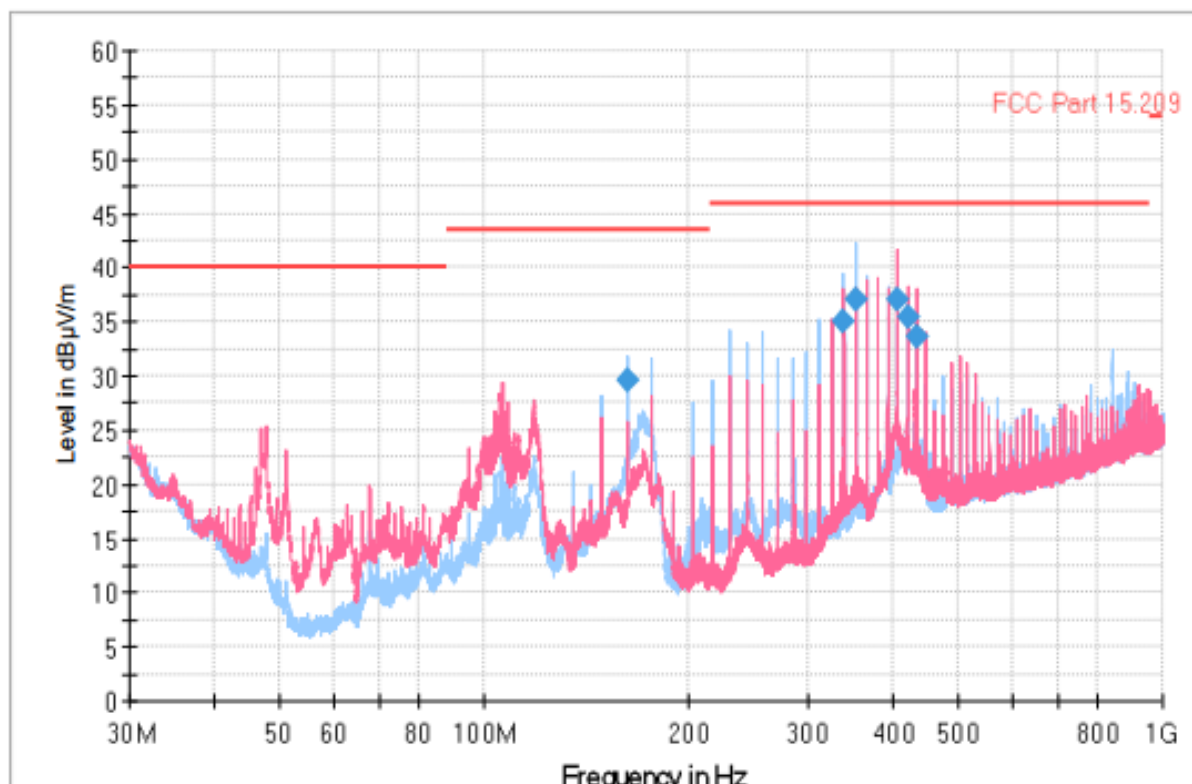

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
352.530000	37.14	46.00	8.86	1000.0	120.000	100.0	H	59.0	14.2
406.800000	37.14	46.00	8.86	1000.0	120.000	183.0	V	249.0	15.5
420.330000	35.49	46.00	10.51	1000.0	120.000	143.0	V	134.0	15.8
338.970000	35.03	46.00	10.97	1000.0	120.000	100.0	H	237.0	13.8
433.920000	33.72	46.00	12.28	1000.0	120.000	142.0	V	147.0	16.0
162.720000	29.62	43.50	13.88	1000.0	120.000	200.0	H	327.0	9.3

Primary and secondary pad active:

EUT Information


EUT:

Operating Mode:

10 kW Delta

Uin: 277 V / 60 Hz; Secondary voltage 50 V, Both active,
Landscape mode, PPL mode

Full Spectrum

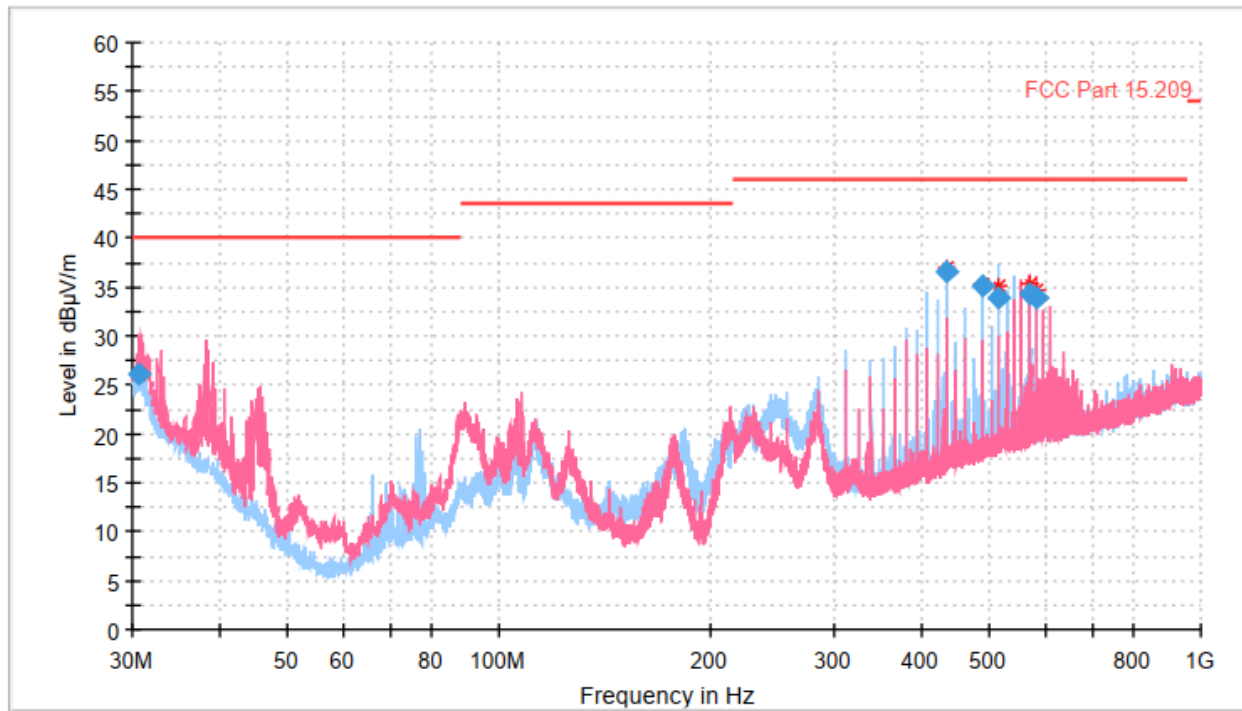

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
433.920000	36.67	46.00	9.33	1000.0	120.000	103.0	H	216.0	16.0
488.160000	35.23	46.00	10.77	1000.0	120.000	149.0	H	326.0	17.5
569.520000	34.24	46.00	11.76	1000.0	120.000	143.0	V	289.0	18.7
515.250000	34.00	46.00	12.00	1000.0	120.000	124.0	H	349.0	17.9
583.080000	33.98	46.00	12.02	1000.0	120.000	143.0	V	279.0	19.2
30.720000	26.01	40.00	14.00	1000.0	120.000	100.0	V	117.0	19.5

EUT Information


EUT:

10 kW Delta

Operating Mode:

Uin: 277 V / 60 Hz; Secondary voltage 50 V, Both active, Portrait mode, PPL mode

Full Spectrum

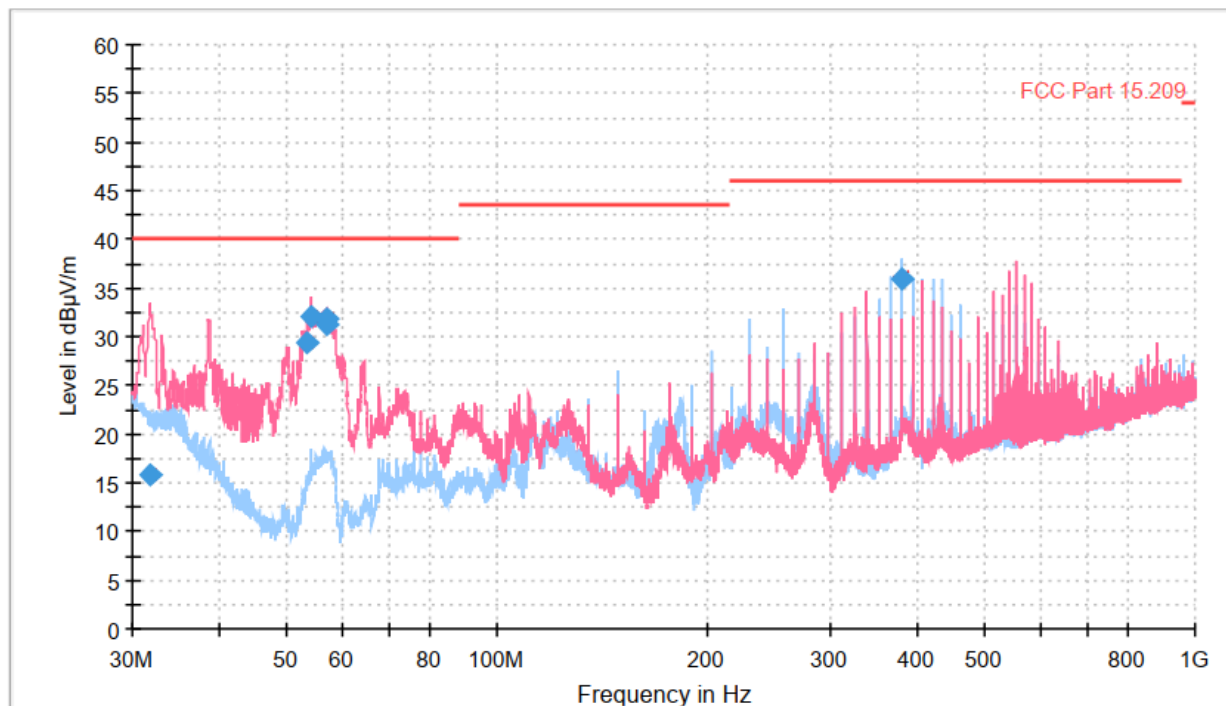

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth h (deg)	Corr. (dB/m)
31.800000	15.89	40.00	24.11	1000.0	120.000	100.0	V	214.0	18.9
53.460000	29.45	40.00	10.55	1000.0	120.000	145.0	V	151.0	6.3
54.240000	32.05	40.00	7.95	1000.0	120.000	145.0	V	130.0	6.1
56.820000	31.88	40.00	8.12	1000.0	120.000	143.0	V	180.0	5.9
56.910000	31.25	40.00	8.75	1000.0	120.000	164.0	V	180.0	5.8
379.680000	36.00	46.00	10.00	1000.0	120.000	100.0	H	343.0	14.7

EUT Information


EUT:

10 kW Delta

Operating Mode:

Uin: 277 V / 60 Hz; Secondary voltage 36 V, Both active, Landscape mode, PPL mode

Full Spectrum

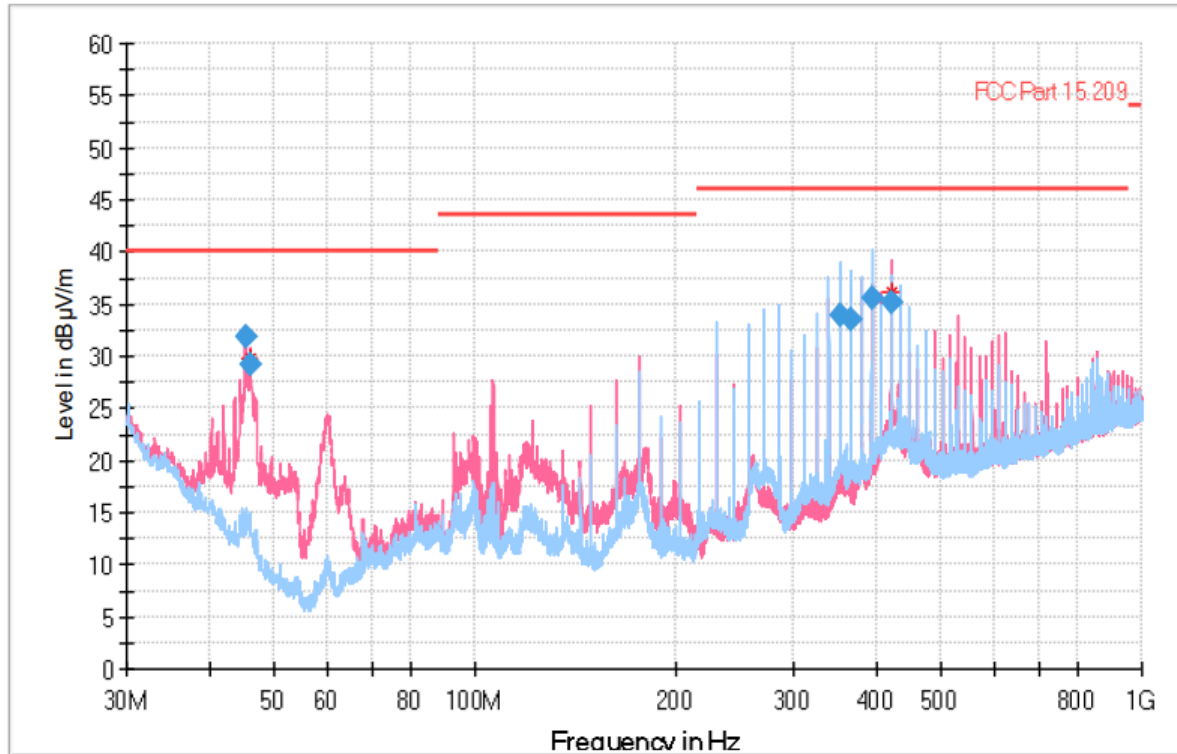

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth h (kHz)	Height (cm)	Pol	Azimuth h (deg)	Corr (dB/)
45.240000	31.86	40.00	8.14	1000.0	120.000	100.0	V	0.0	10.6
393.210000	35.53	46.00	10.47	1000.0	120.000	100.0	H	17.0	15.2
46.080000	29.27	40.00	10.73	1000.0	120.000	100.0	V	13.0	10.0
420.360000	35.04	46.00	10.96	1000.0	120.000	104.0	V	59.0	15.8
352.530000	33.80	46.00	12.20	1000.0	120.000	173.0	H	343.0	14.2
366.090000	33.57	46.00	12.43	1000.0	120.000	104.0	H	316.0	14.4

EUT Information


EUT:

10 kW Delta

Operating Mode:

Uin: 277 V / 60 Hz; Secondary voltage 36 V, Both active, Potrait mode, PPL mode

Full Spectrum

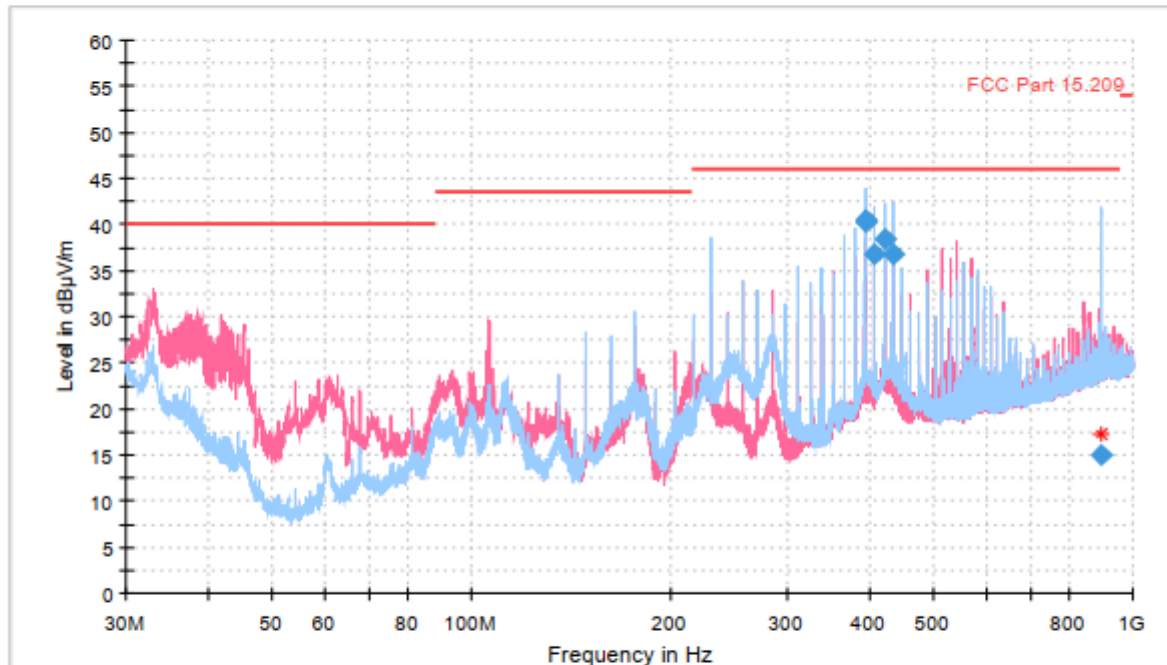

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
393.240000	40.45	46.00	5.55	1000.0	120.000	100.0	H	328.0	15.2
393.180000	40.19	46.00	5.81	1000.0	120.000	100.0	H	333.0	15.2
420.360000	38.37	46.00	7.63	1000.0	120.000	100.0	H	328.0	15.8
433.890000	36.81	46.00	9.19	1000.0	120.000	100.0	H	320.0	16.0
406.800000	36.77	46.00	9.23	1000.0	120.000	100.0	H	328.0	15.5
895.470000	15.07	46.00	30.93	1000.0	120.000	150.0	H	83.0	23.1

EUT Information


EUT:

10 kW Delta

Operating Mode:

Uin: 277 V / 60 Hz; Secondary voltage 24 V, Both active, Landscape mode, PPL mode

Full Spectrum

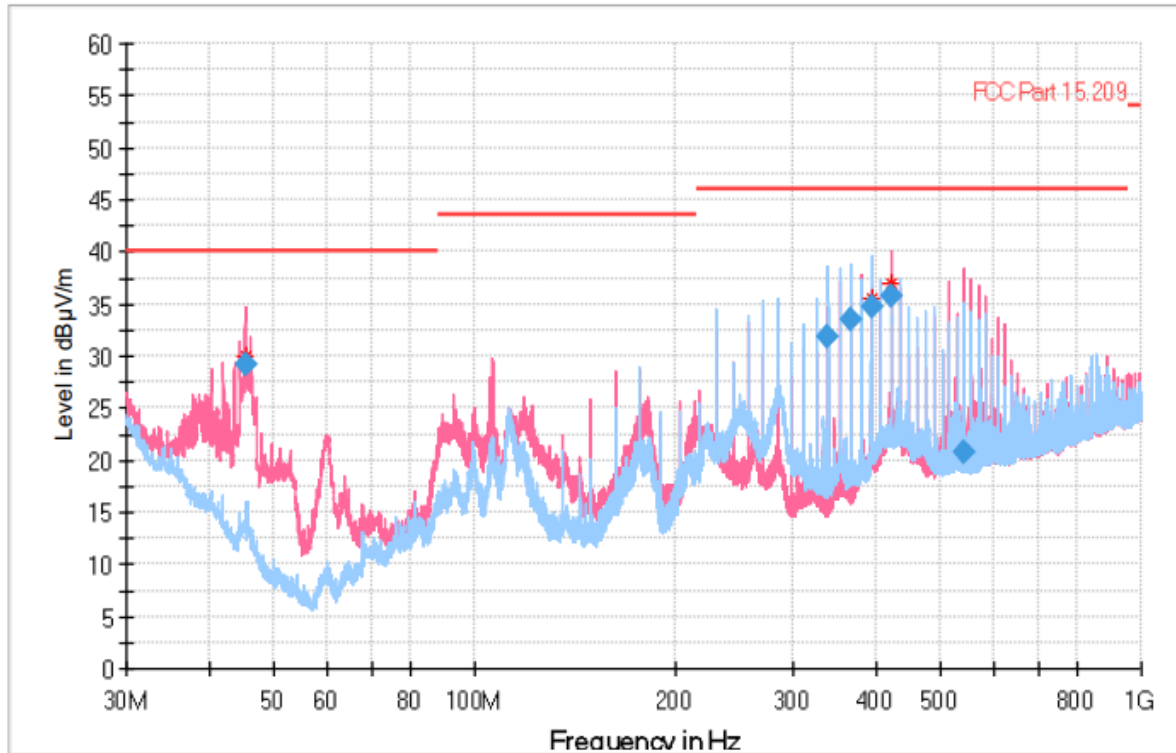

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth h (kHz)	Height (cm)	Pol	Azimuth h (deg)	Corr . (dB/)
420.360000	35.82	46.00	10.18	1000.0	120.000	103.0	V	43.0	15.8
45.270000	29.18	40.00	10.82	1000.0	120.000	103.0	V	329.0	10.5
393.240000	34.78	46.00	11.22	1000.0	120.000	100.0	H	9.0	15.2
366.090000	33.46	46.00	12.54	1000.0	120.000	103.0	H	320.0	14.4
338.970000	31.91	46.00	14.09	1000.0	120.000	145.0	H	328.0	13.8
542.370000	20.77	46.00	25.23	1000.0	120.000	103.0	V	300.0	18.4

EUT Information


EUT:

10 kW Delta

Operating Mode:

Uin: 277 V / 60 Hz; Secondary voltage 24 V, Both active, Potrait mode, PPL mode

Full Spectrum

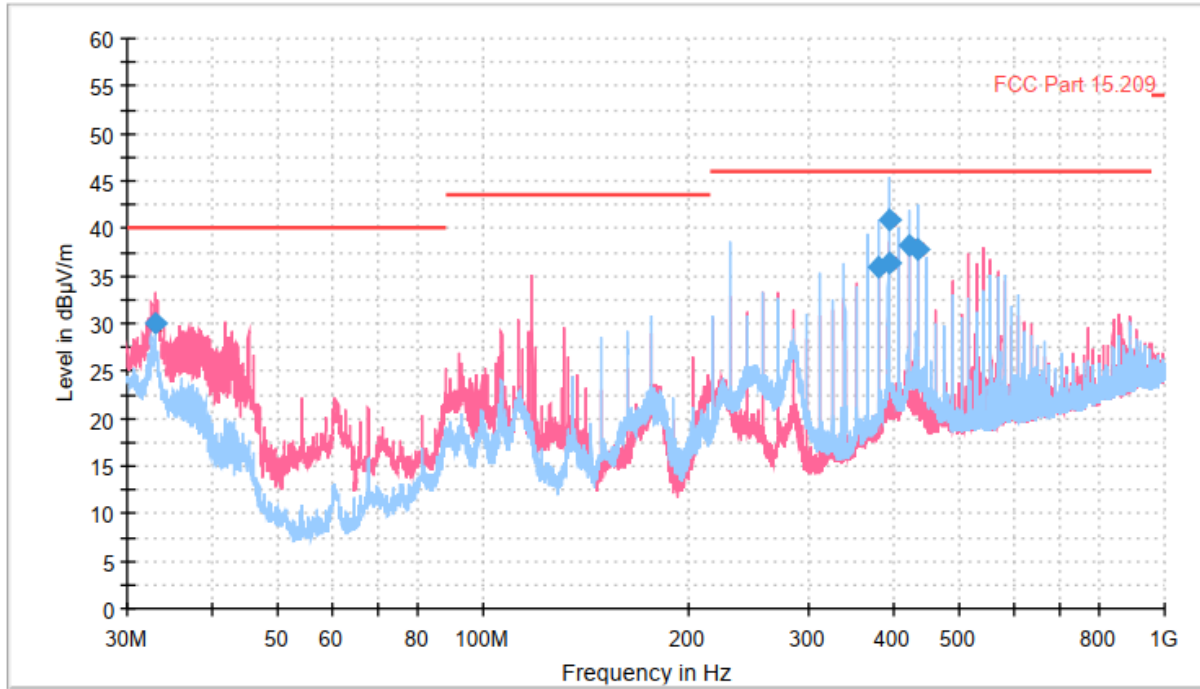

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
393.210000	40.84	46.00	5.16	1000.0	120.000	100.0	H	328.0	15.2
420.360000	38.30	46.00	7.70	1000.0	120.000	100.0	H	323.0	15.8
433.920000	37.78	46.00	8.22	1000.0	120.000	100.0	H	323.0	16.0
393.330000	36.29	46.00	9.71	1000.0	120.000	100.0	H	328.0	15.2
32.970000	29.97	40.00	10.03	1000.0	120.000	100.0	V	112.0	18.2
379.650000	35.94	46.00	10.06	1000.0	120.000	100.0	H	328.0	14.7

4.5 Bandwidth of the emission (§15.215)

4.5.1 Requirements

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §15.217 through 15.257 and in subpart E of FCC Part 15, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.5.2 Test procedure


1. As per Clause 6.9.2 from ANSI C63.10-2020
2. The EUT is placed on the top of a rotating table 0.8 meters above the ground in an Anechoic Chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
3. The EUT is set 3 m away from the interference-receiving antenna.
4. Resolution bandwidth is set to a value greater than 5% of the allowed bandwidth.

4.5.3 Test results

Device passed the requirements stated in 47 CFR Part 15, Subpart C, Section 15.215


Landscape mode:

Only secondary pad active, antenna at 0 deg:

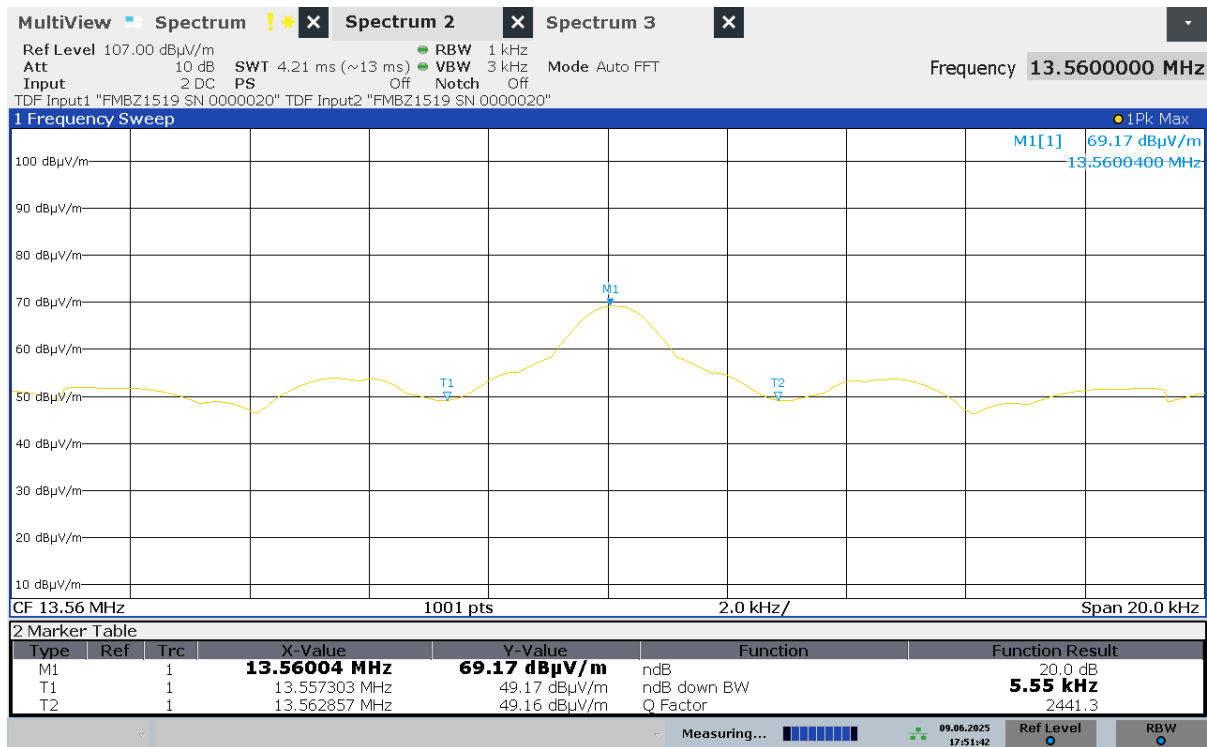

17:51:43 09.06.2025


Only secondary pad active, antenna at 90 deg:

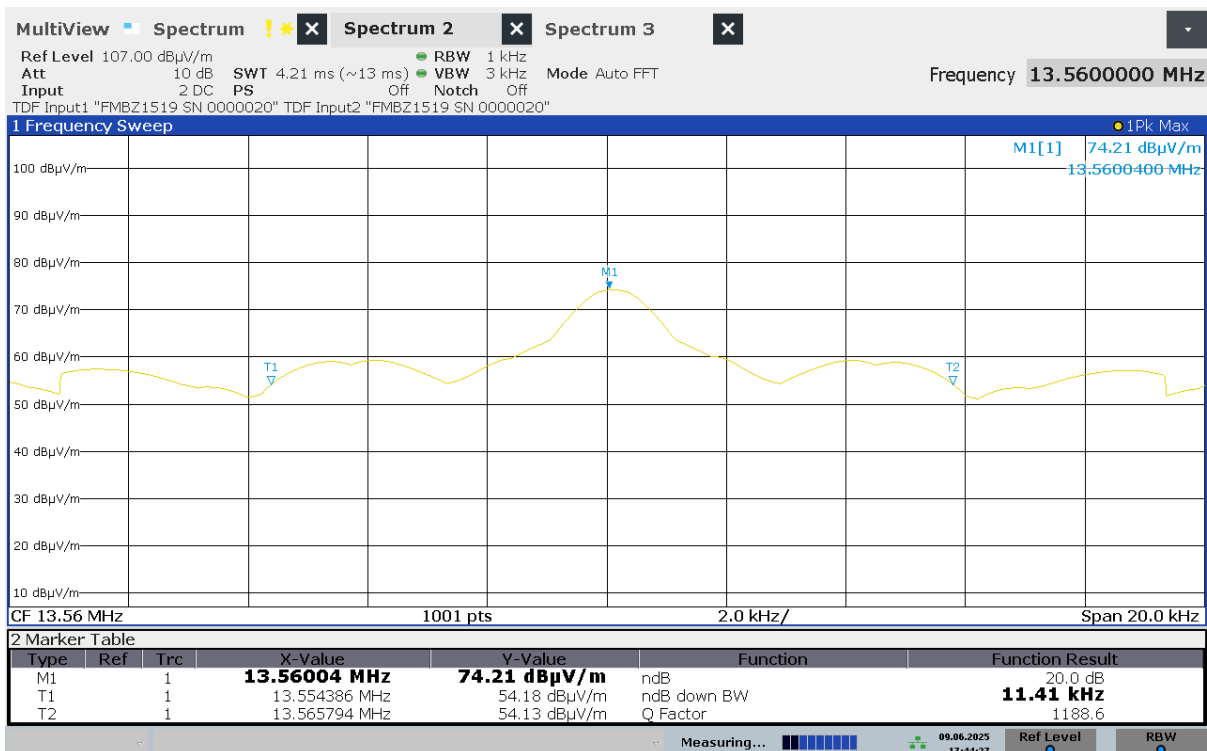

17:44:28 09.06.2025




Primary and secondary pad active, antenna at 0 deg:

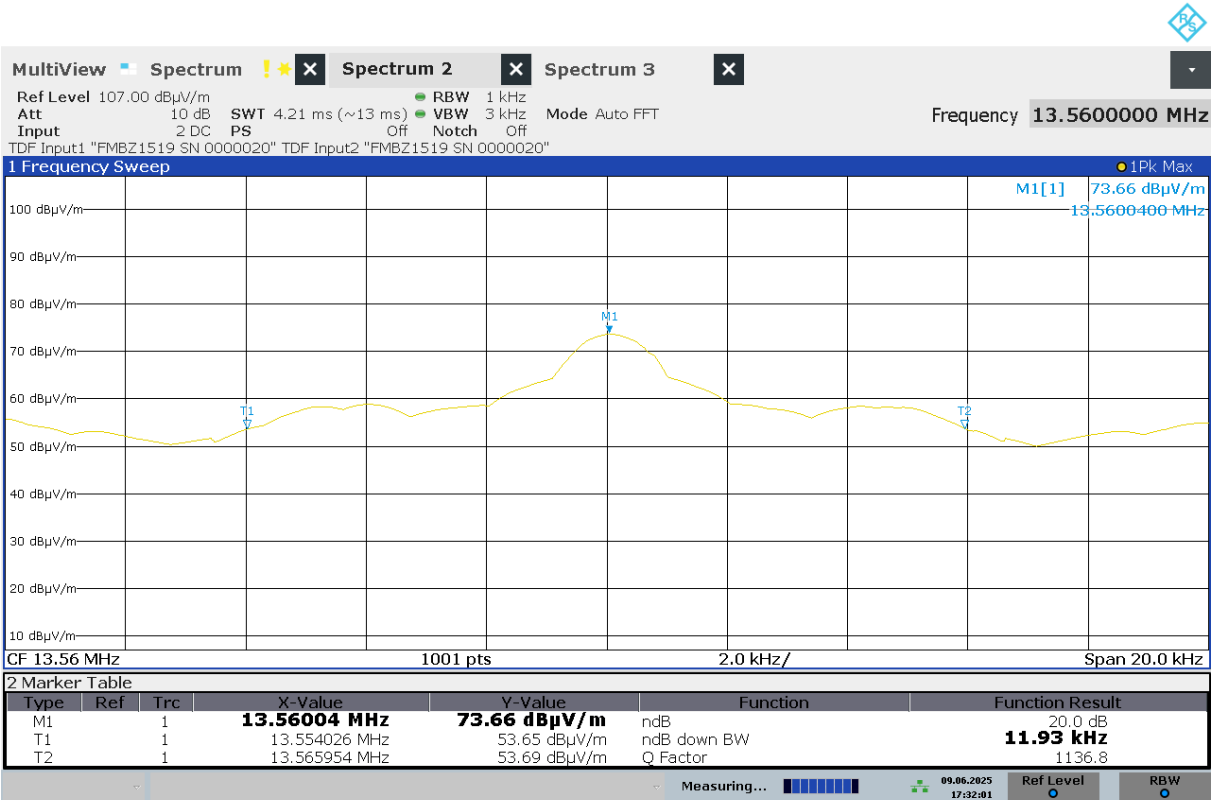

17:32:01 09.06.2025


Primary and secondary pad active, antenna at 90 deg:

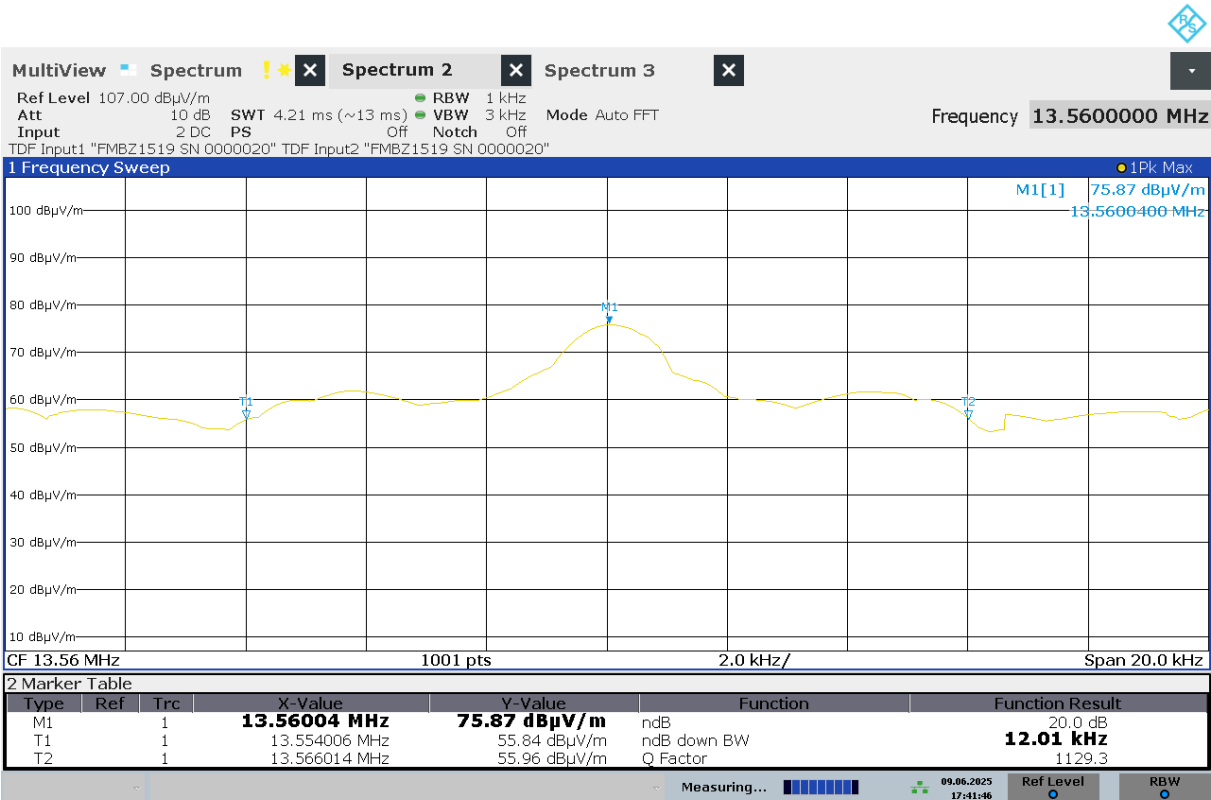

17:41:47 09.06.2025


Portrait mode:

Only secondary pad active, antenna at 0 deg:

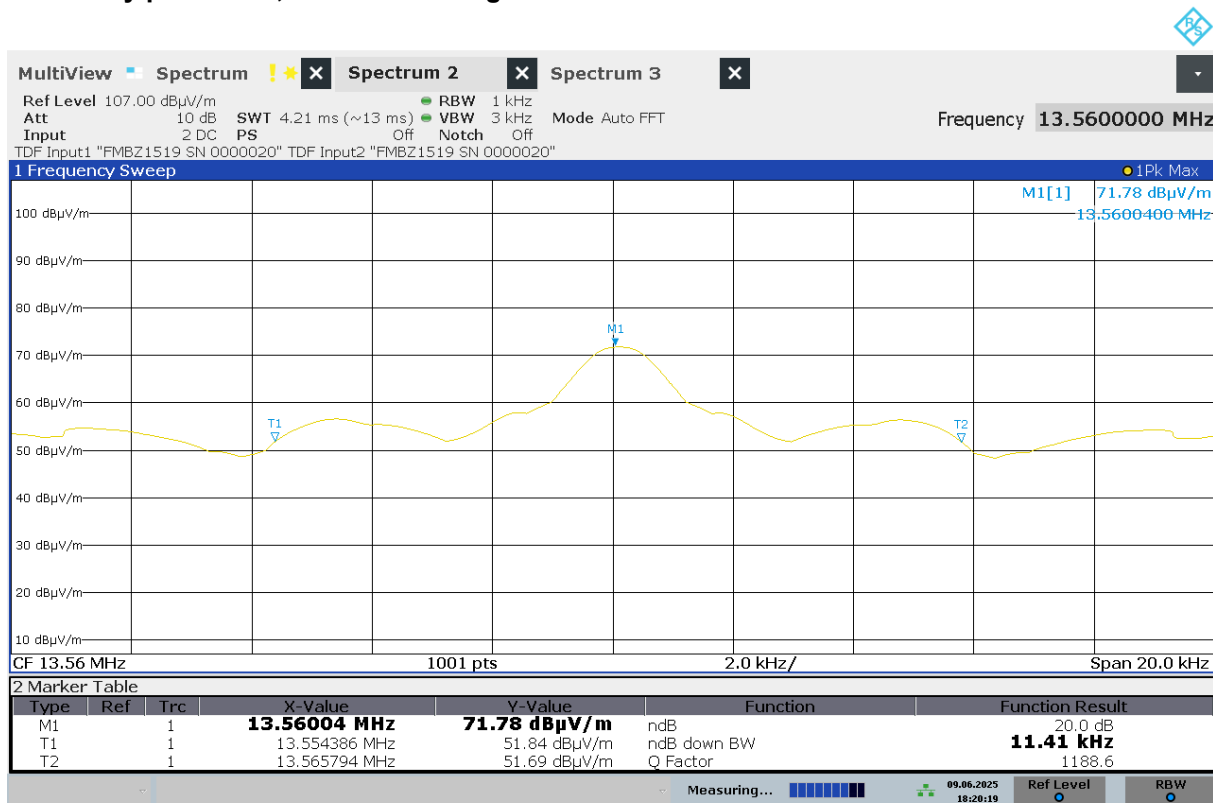


18:20:20 09.06.2025

Only secondary pad active, antenna at 90 deg:

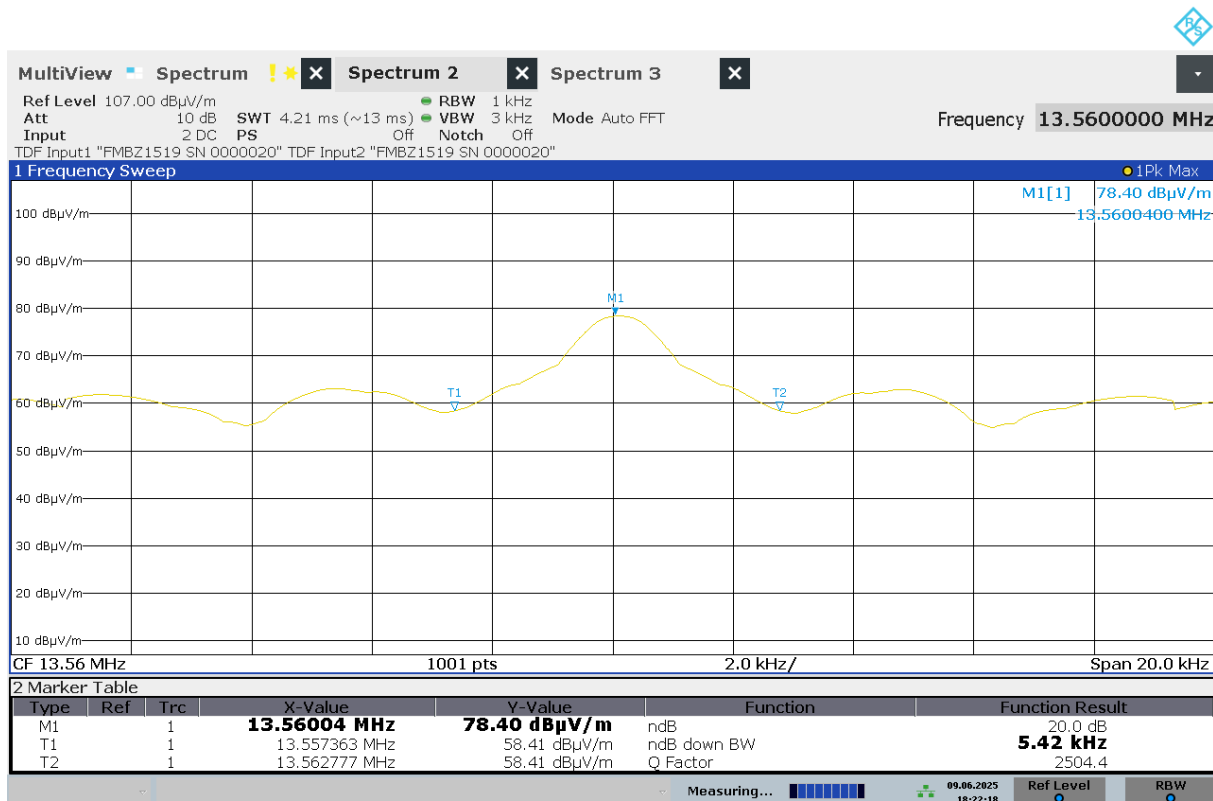


18:22:18 09.06.2025

Primary and secondary pad active, antenna at 0 deg:

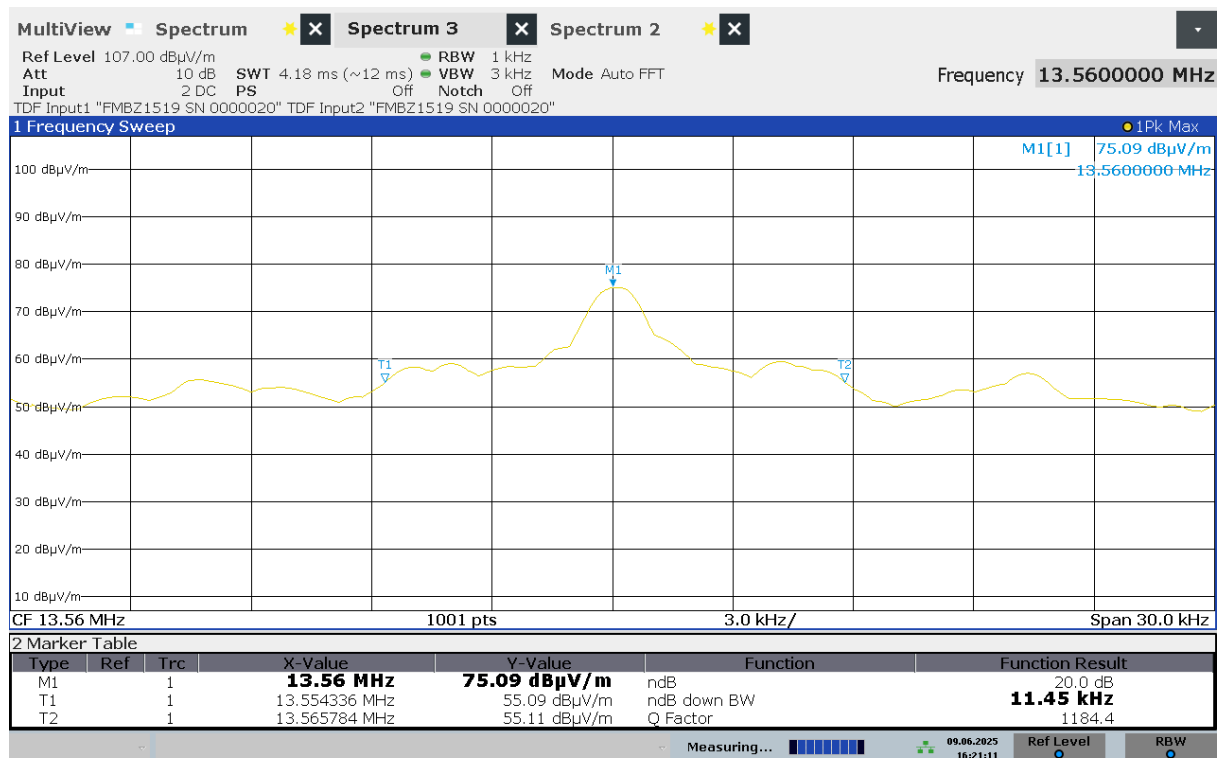

16:21:11 09.06.2025

Primary and secondary pad active, antenna at 90 deg:

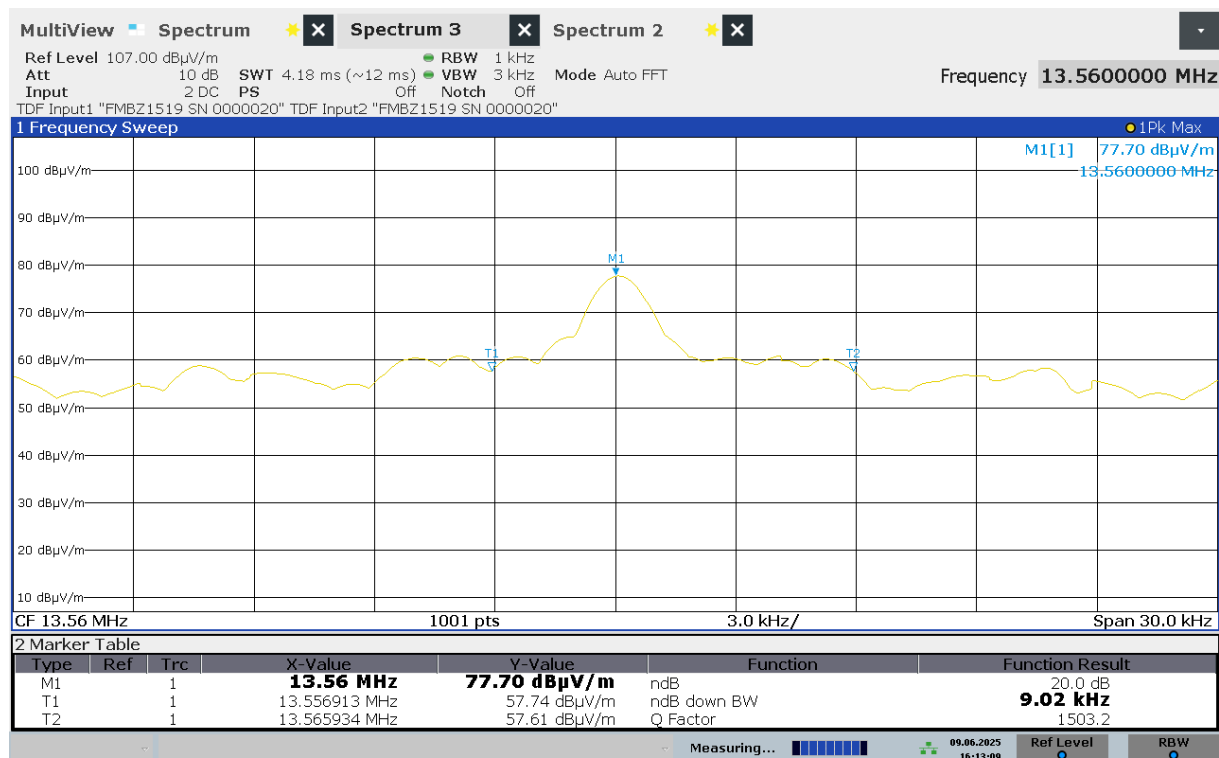

16:13:09 09.06.2025

Frequency (MHz)	Permitted frequency band (MHz)	20 dB bandwidth (kHz)	PASS/FAIL
13.56	13.110 – 14.010	12.01	PASS

4.6 Spectrum mask (§15.225 (a)-(d))

4.6.1 Requirements

The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters. Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters. Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters. The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

4.6.2 Test procedure

1. As per clause 6.4 from ANSI C63.10-2020
2. The EUT was placed on the top of a rotating table 0.8 meters above the ground in an Anechoic Chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
3. The EUT was set 3 m away from the interference-receiving antenna.
4. Frequencies with maximum emission were retested on OATS.
5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.

Frequency (MHz)	Limit 30 m (dBµV/m)	Correction factor (dB)	Limit 3 m (dBµV/m)
13.110–13.410	40.5	40	80.5
13.410–13.553	50.5	40	90.5
13.553–13.567	84	40	124
13.567–13.710	50.5	40	90.5
13.710–14.010	40.5	40	80.5




4.6.3 Test results

Device passed the requirements stated in 47 CFR Part 15, Subpart C, Section 15.225

Landscape mode:


Only secondary pad active, antenna at 0 deg:

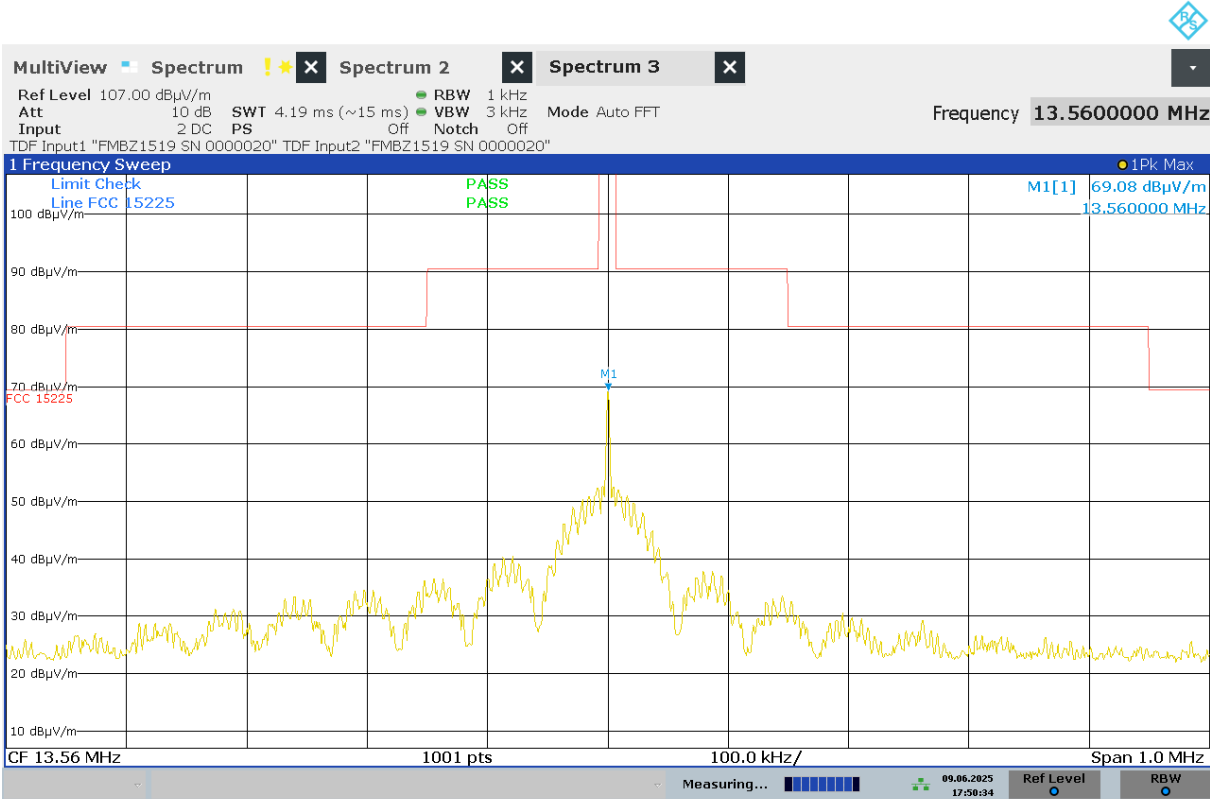

17:50:35 09.06.2025

Frequency (MHz)	Limit 30 m (dBμV/m)	Correction factor (dB)	Limit 3 m (dBμV/m)	Measured Level(dBμV/m)	Margin
13.56	84	40	124	69.08	54.92

Only secondary pad active, antenna at 90 deg:

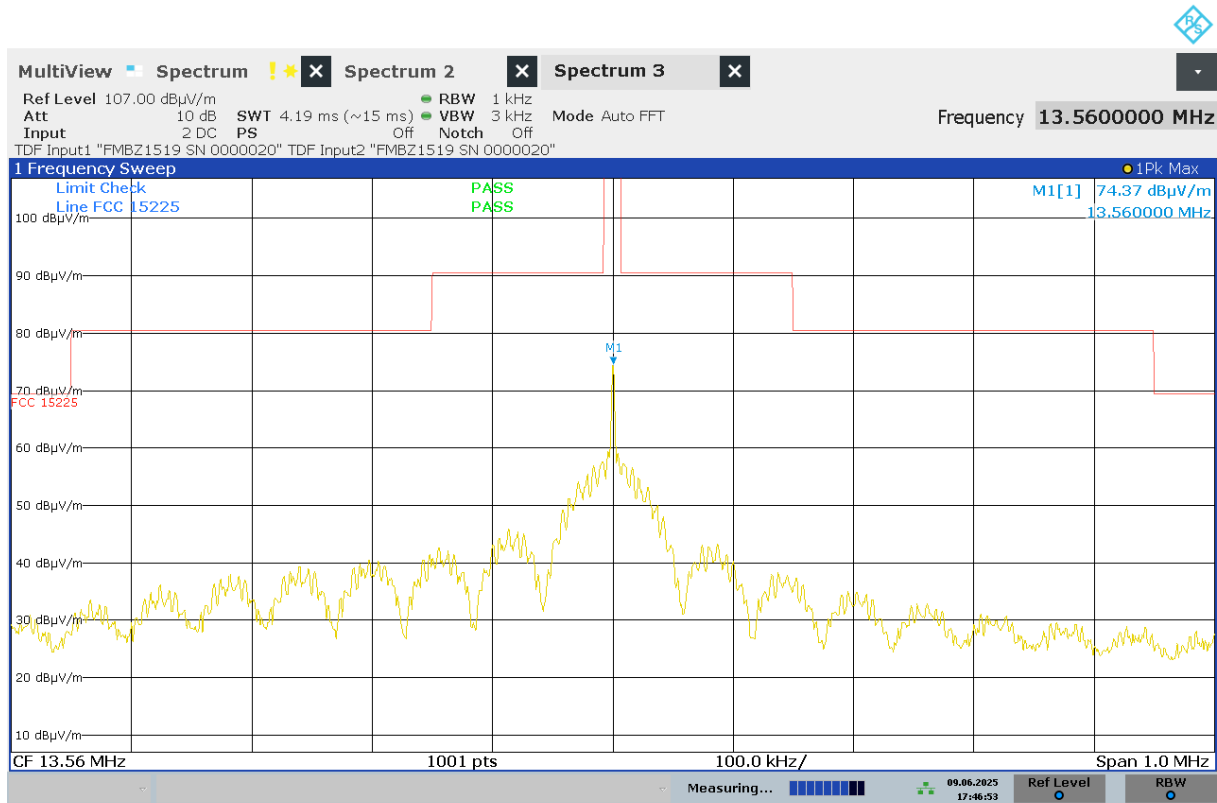


17:46:53 09.06.2025

Frequency (MHz)	Limit 30 m (dBμV/m)	Correction factor (dB)	Limit 3 m (dBμV/m)	Measured Level(dBμV/m)	Margin
13.56	84	40	124	74.37	49.63




Primary and secondary pad active, antenna at 0 deg:

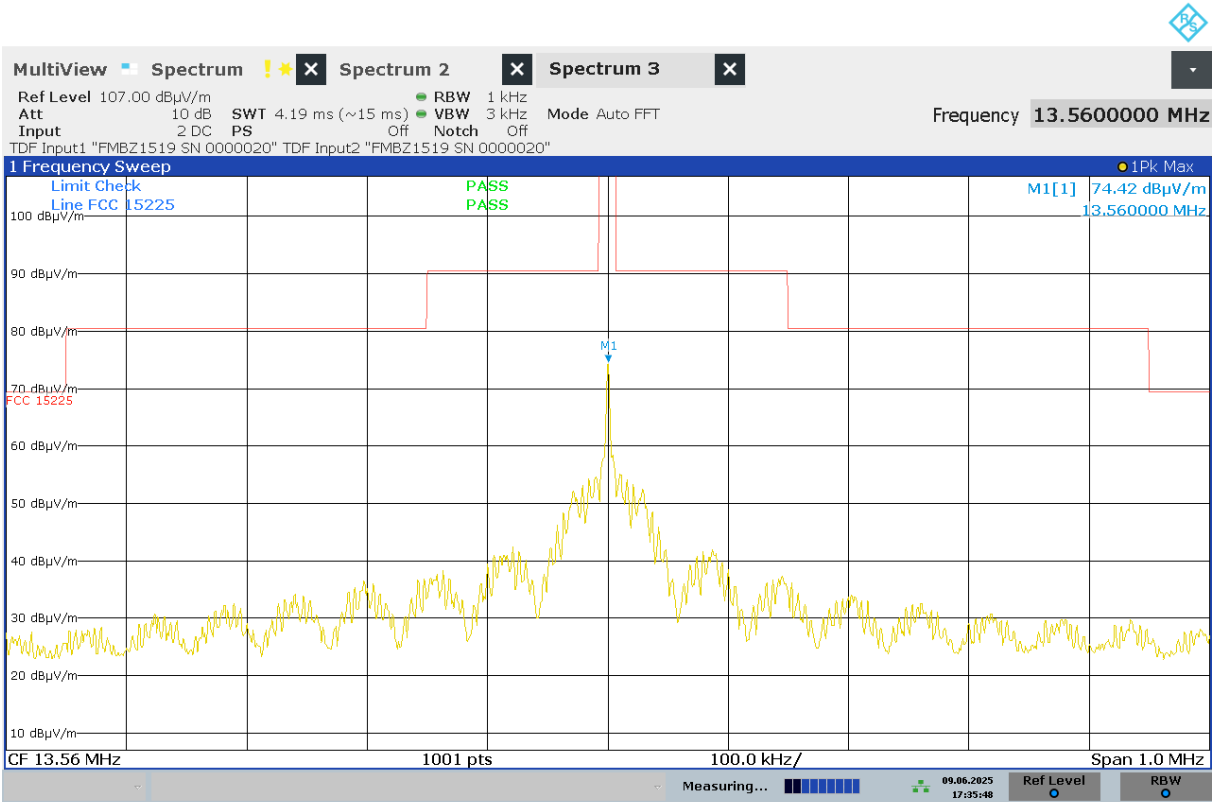

17:35:49 09.06.2025

Frequency (MHz)	Limit 30 m (dBμV/m)	Correction factor (dB)	Limit 3 m (dBμV/m)	Measured Level(dBμV/m)	Margin
13.56	84	40	124	74.42	49.58

Primary and secondary pad active, antenna at 90 deg:

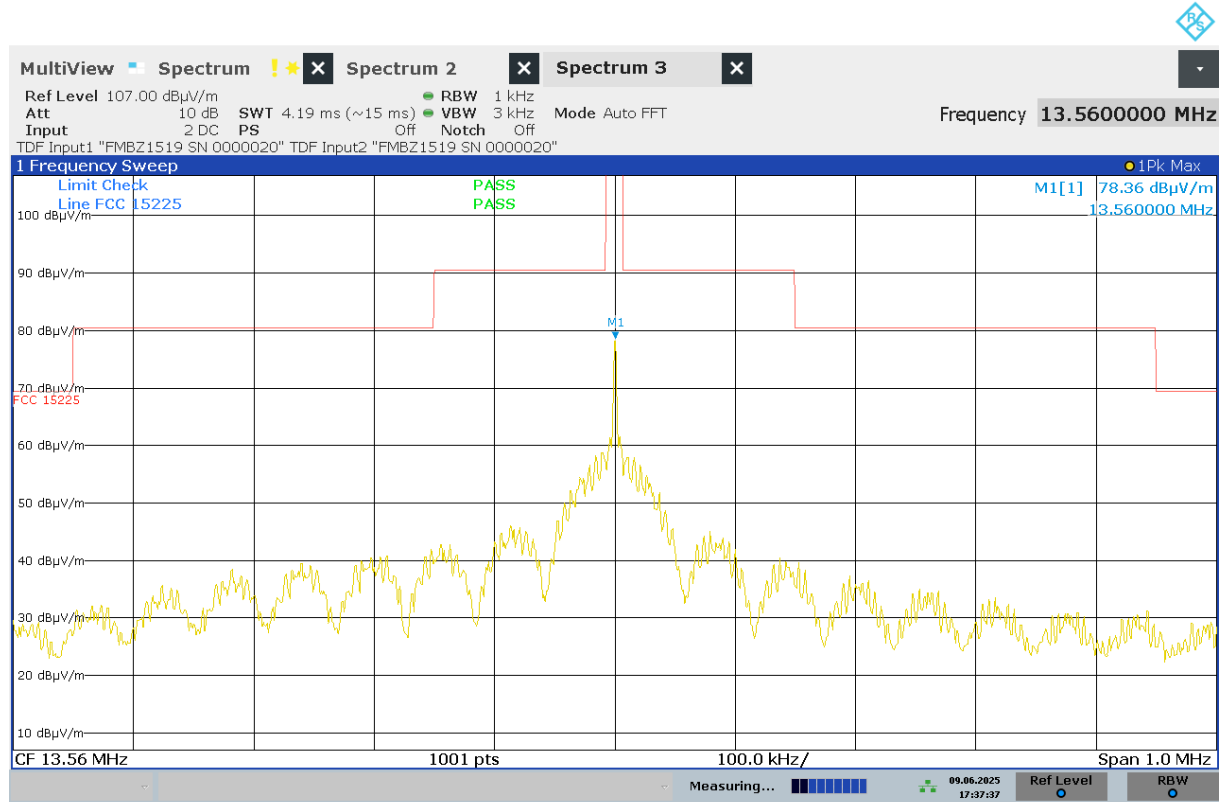


17:37:37 09.06.2025

Frequency (MHz)	Limit 30 m (dBμV/m)	Correction factor (dB)	Limit 3 m (dBμV/m)	Measured Level(dBμV/m)	Margin
13.56	84	40	124	78.36	45.64



Portrait mode:


Only secondary pad active, antenna at 0 deg:

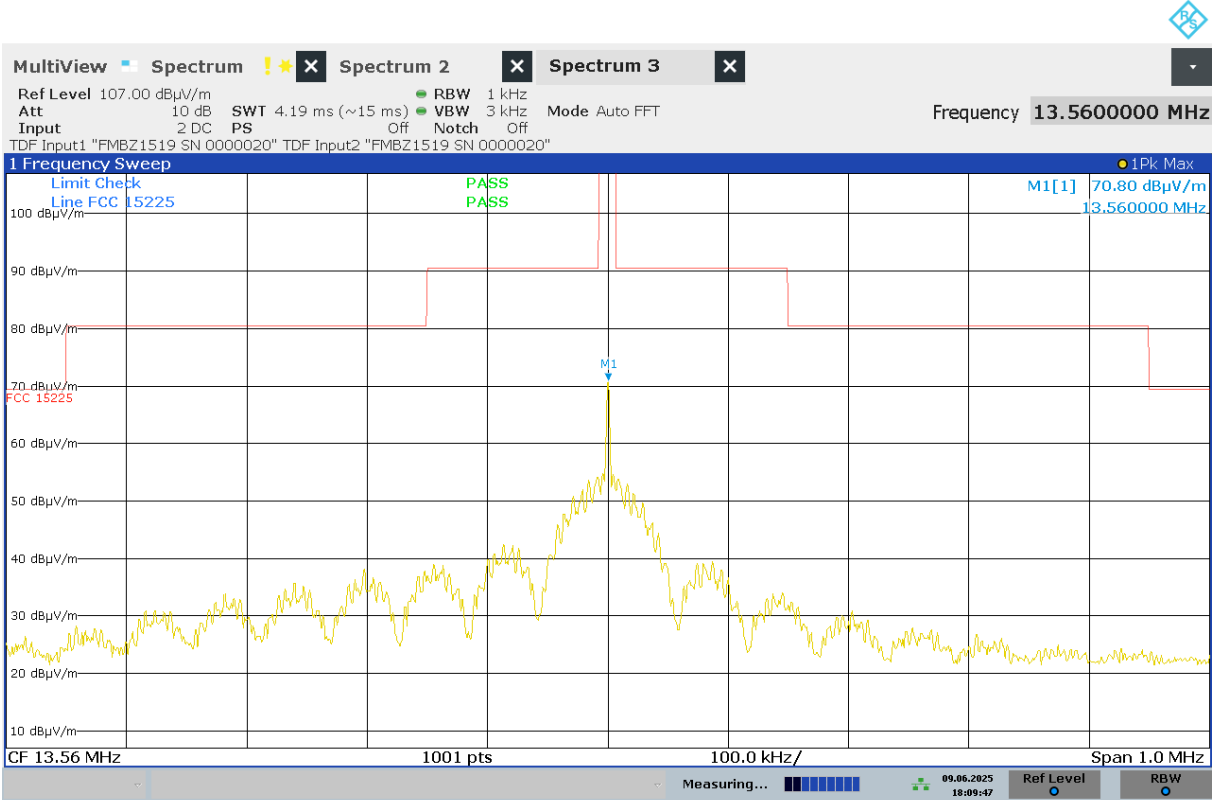

18:09:48 09.06.2025

Frequency (MHz)	Limit 30 m (dBμV/m)	Correction factor (dB)	Limit 3 m (dBμV/m)	Measured Level(dBμV/m)	Margin
13.56	84	40	124	70.80	53.20


Only secondary pad active, antenna at 90 deg:

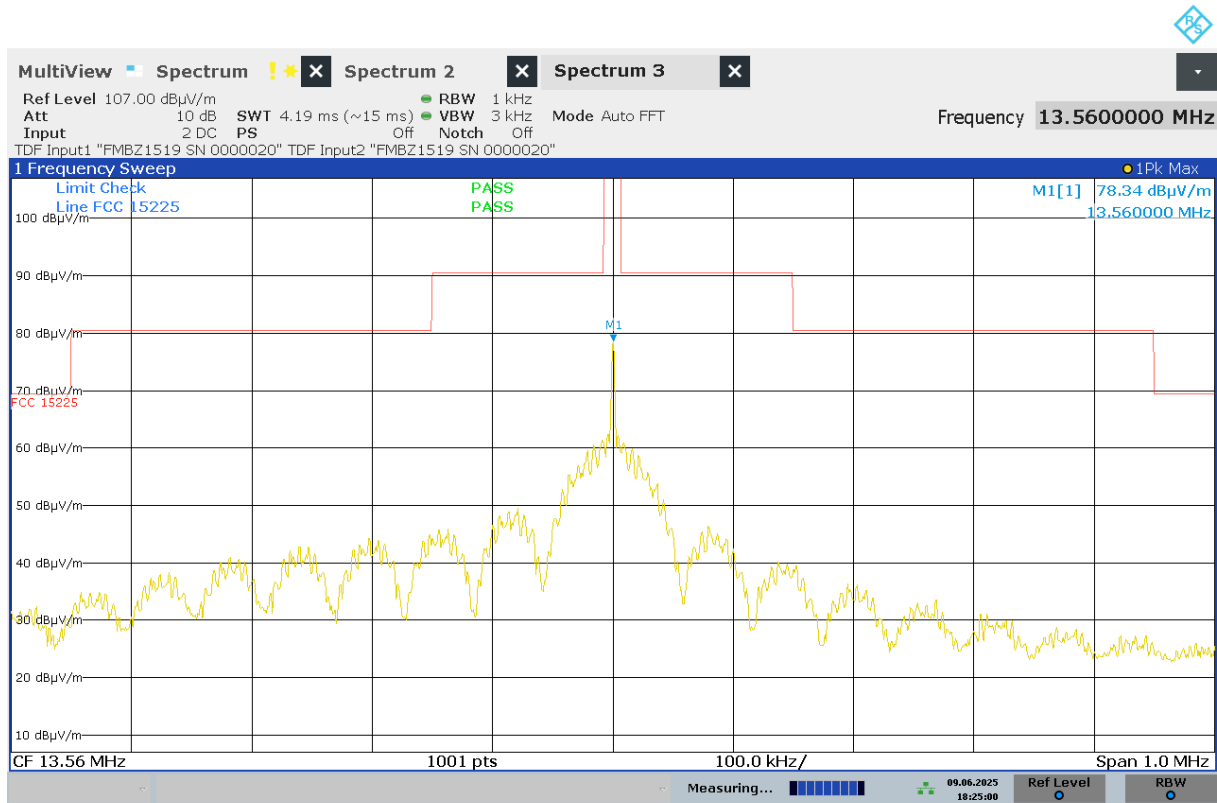

18:25:00 09.06.2025

Frequency (MHz)	Limit 30 m (dBµV/m)	Correction factor (dB)	Limit 3 m (dBµV/m)	Measured Level(dBµV/m)	Margin
13.56	84	40	124	78.34	45.66


Primary and secondary pad active, antenna at 0 deg:

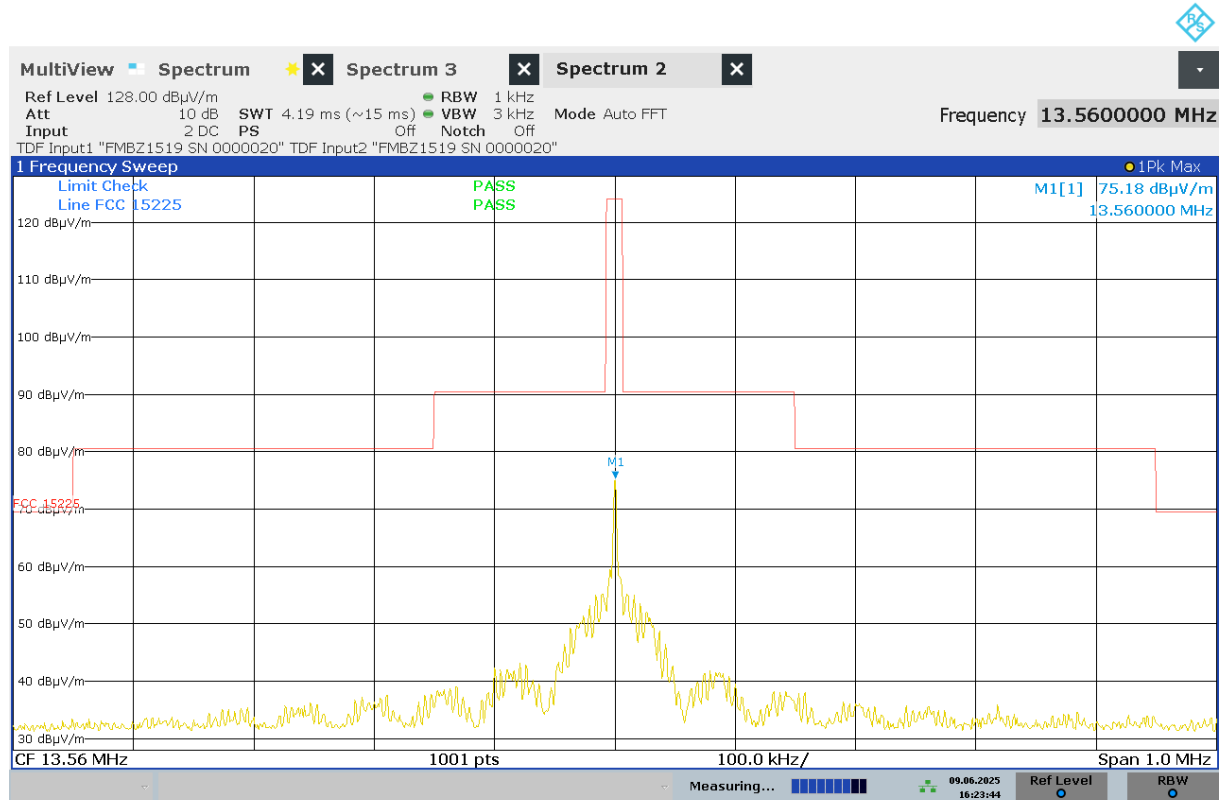

16:23:45 09.06.2025

Frequency (MHz)	Limit 30 m (dBμV/m)	Correction factor (dB)	Limit 3 m (dBμV/m)	Measured Level(dBμV/m)	Margin
13.56	84	40	124	75.18	48.82

Primary and secondary pad active, antenna at 90 deg:

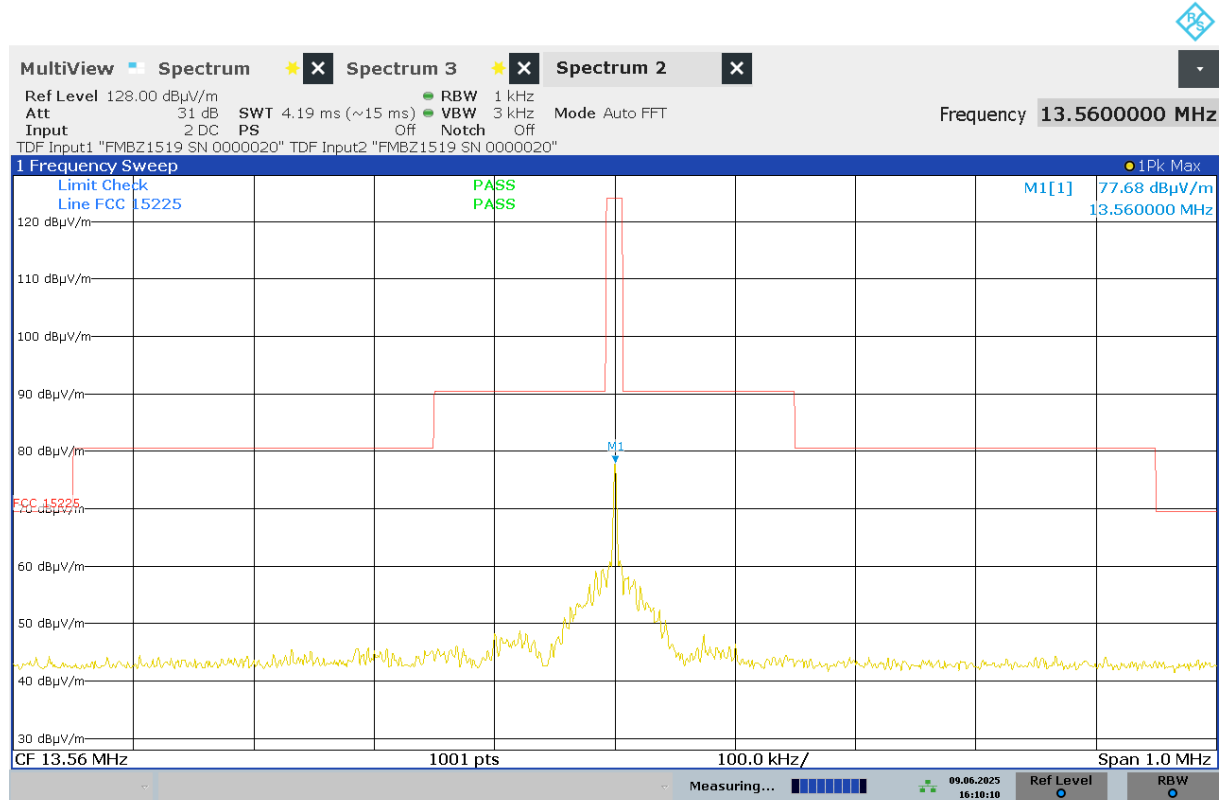

16:10:10 09.06.2025

Frequency (MHz)	Limit 30 m (dBμV/m)	Correction factor (dB)	Limit 3 m (dBμV/m)	Measured Level(dBμV/m)	Margin
13.56	84	40	124	77.68	46.32

4.7 Frequency tolerance of the carrier signal (§15.225 (e))

4.7.1 Requirement

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

4.7.2 Test procedure

1. As per clause 6.8 from ANSI C63.10-2020.
2. The frequency tolerance of the carrier signal is measured over a temperature variation of -20 °C to +50 °C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 °C.
3. If the EUT provides an antenna connector the spectrum analyzer is connected to this port. In cases where the EUT does not provide an antenna connector a test fixture is used.
4. The peak detector of the spectrum analyzer is selected and the resolution bandwidth as well as the video bandwidth is set to values appropriate to the shape of the spectrum of the EUT.
5. While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized.

4.7.3 Test results

Device passed the requirements stated in of FCC 47 CFR 15, Subpart C, Section 15.225

FREQUENCY STABILITY						
Temperature	Supply voltage (V)	Minutes after switch on	Measured Frequency (MHz)	Allowed tolerance (kHz)	Measured tolerance	RESULT
50	24.00	0	13,560000000	Fref±1.356 kHz	-0,108	PASS
	24.00	2	13,559995700	Fref±1.356 kHz	-0,113	PASS
	24.00	5	13,559991300	Fref±1.356 kHz	-0,117	PASS
	24.00	10	13,559991300	Fref±1.356 kHz	-0,117	PASS
40	24.00	0	13,560039100	Fref±1.356 kHz	-0,069	PASS
	24.00	2	13,560030400	Fref±1.356 kHz	-0,078	PASS
	24.00	5	13,560026000	Fref±1.356 kHz	-0,082	PASS
	24.00	10	13,560026000	Fref±1.356 kHz	-0,082	PASS
30	24.00	0	13,560082500	Fref±1.356 kHz	-0,026	PASS
	24.00	2	13,560073800	Fref±1.356 kHz	-0,035	PASS
	24.00	5	13,560069500	Fref±1.356 kHz	-0,039	PASS
	24.00	10	13,560069500	Fref±1.356 kHz	-0,039	PASS
20	27.60	0	13,560112900	Fref±1.356 kHz	0,004	PASS
	27.60	2	13,560108500	Fref±1.356 kHz	0,000	PASS
	27.60	5	13,560108500	Fref±1.356 kHz	0,000	PASS
	27.60	10	13,560108500	Fref±1.356 kHz	0,000	PASS
20	24.00	0	13,560117200	Fref±1.356 kHz	0,009	PASS
	24.00	2	13,560112900	Fref±1.356 kHz	0,004	PASS
	24.00	5	13,560108500	Fref±1.356 kHz	0,000	PASS
	24.00	10	13,560108500	Fref	0,000	PASS
20	20.40	0	13,560117200	Fref±1.356 kHz	0,009	PASS
	20.40	2	13,560112900	Fref±1.356 kHz	0,004	PASS
	20.40	5	13,560108500	Fref±1.356 kHz	0,000	PASS
	20.40	10	13,560108500	Fref±1.356 kHz	0,000	PASS
10	24.00	0	13,560152000	Fref±1.356 kHz	0,044	PASS
	24.00	2	13,560147600	Fref±1.356 kHz	0,039	PASS
	24.00	5	13,560147600	Fref±1.356 kHz	0,039	PASS
	24.00	10	13,560147600	Fref±1.356 kHz	0,039	PASS
0	24.00	0	13,560165000	Fref±1.356 kHz	0,056	PASS
	24.00	2	13,560165000	Fref±1.356 kHz	0,056	PASS
	24.00	5	13,560165000	Fref±1.356 kHz	0,056	PASS
	24.00	10	13,560165000	Fref±1.356 kHz	0,056	PASS
-10	24.00	0	13,560152000	Fref±1.356 kHz	0,044	PASS
	24.00	2	13,560156300	Fref±1.356 kHz	0,048	PASS
	24.00	5	13,560160600	Fref±1.356 kHz	0,052	PASS
	24.00	10	13,560160600	Fref±1.356 kHz	0,052	PASS
-20	24.00	0	13,560108500	Fref±1.356 kHz	0,000	PASS
	24.00	2	13,560121600	Fref±1.356 kHz	0,013	PASS
	24.00	5	13,560121600	Fref±1.356 kHz	0,013	PASS
	24.00	10	13,560121600	Fref±1.356 kHz	0,013	PASS

5 Annex I – Additional data

Cross-reference table				
Test	47 CFR Part 15 section	IC requirements	Section within the report	Conclusion
Antenna requirements	15.203	RSS-Gen Issue 5 §6.8	4.1	PASS
Restricted bands of operation	15.205	RSS-Gen Issue 5 §8.10*	4.2	PASS
Conducted emission	15.207	RSS-Gen Issue 5 §8.8	4.3	PASS
Radiated emission	15.205 15.209 15.225	RSS-Gen Issue 5 §8.9* RSS-Gen Issue 5 §8.10* RSS-210 Issue 3 Annex B.6	4.4	PASS
Bandwidth of the emission	15.215	RSS-210 Issue 3 Annex B.6	4.5	PASS
Spectrum mask	15.225	RSS-210 Issue 3 Annex B.6	4.6	PASS
Frequency tolerance of the carrier signal	15.225	RSS-210 Issue 3 Annex B.6	4.7	PASS
*Note: Radiated measurements performed in laboratory recognized by ISED Canada: – CAB identifier: SI0001 – ISED#: 21434				

5.1 Occupied bandwidth (99% emission bandwidth)

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained.

5.1.1 Test procedure


According ANSI C63.10-2013:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyser marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - \text{xx}]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyser and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.
- k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).




5.1.2 Test results

Landscape mode:
Secondary pad active, antenna at 0 deg:

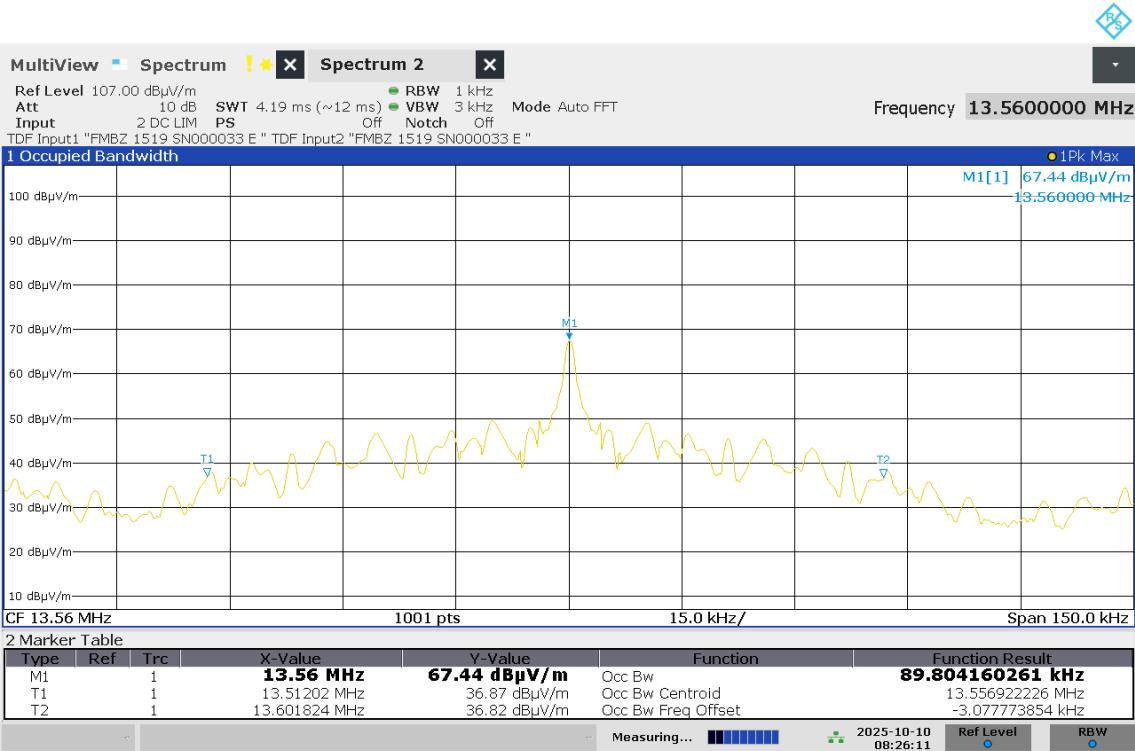


08:26:12 AM 10/10/2025

Secondary pad active, antenna at 90 deg:

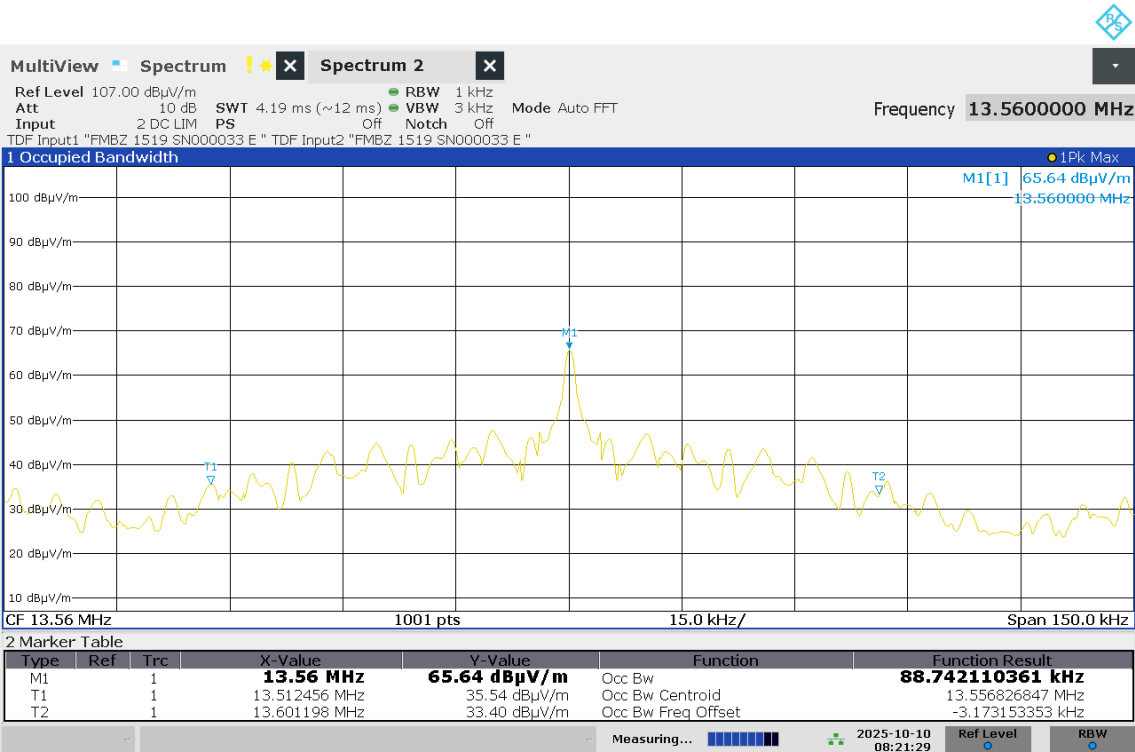


08:21:29 AM 10/10/2025

Portrait mode:
Secondary pad active, antenna at 0 deg:

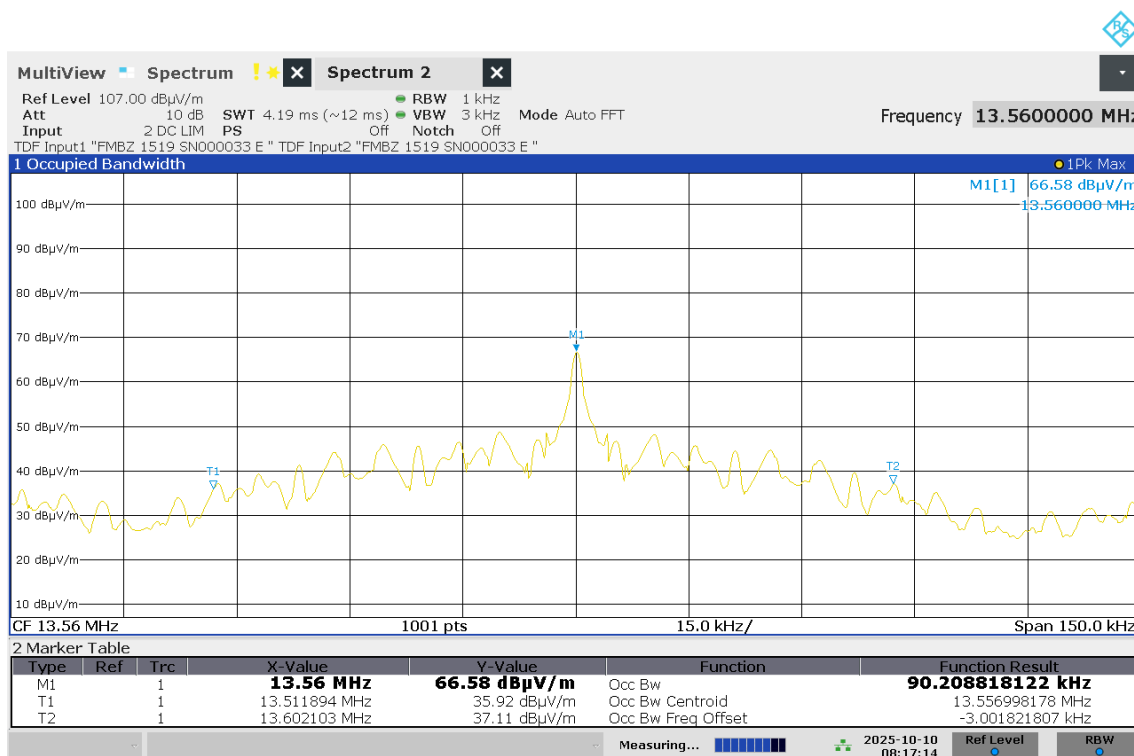

08:17:15 AM 10/10/2025

Secondary pad active, antenna at 90 deg:

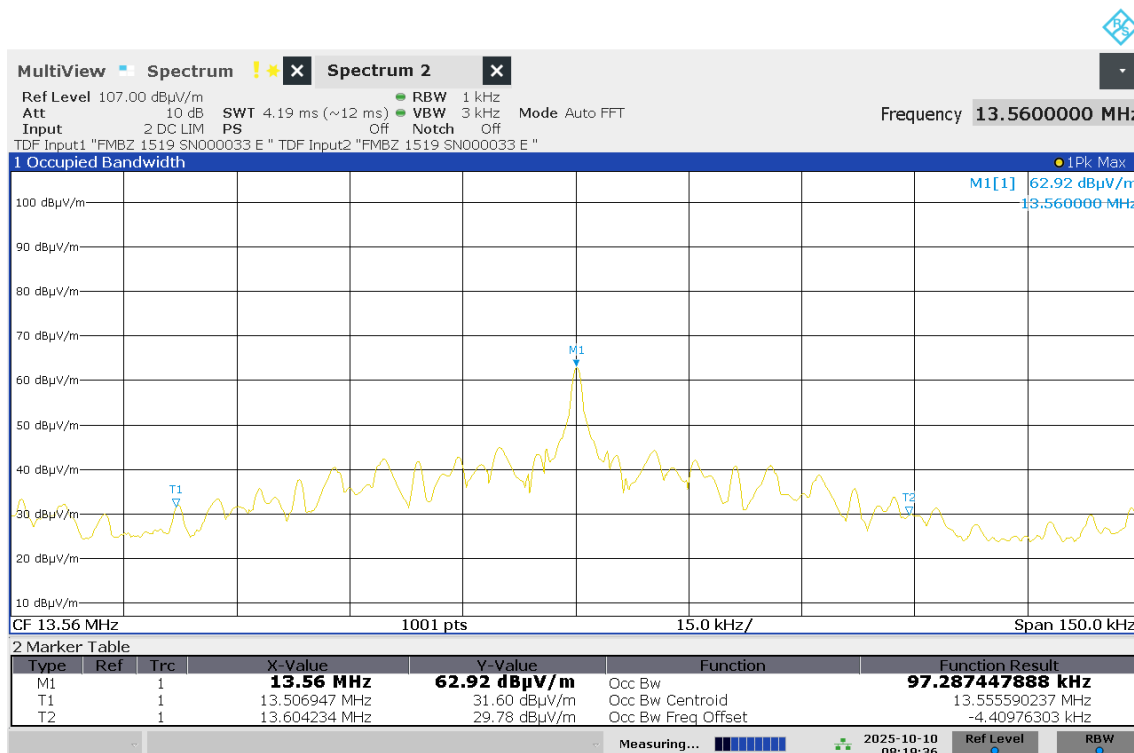


08:19:37 AM 10/10/2025

Landscape mode:




Primary and secondary pad active, antenna at 0 deg:

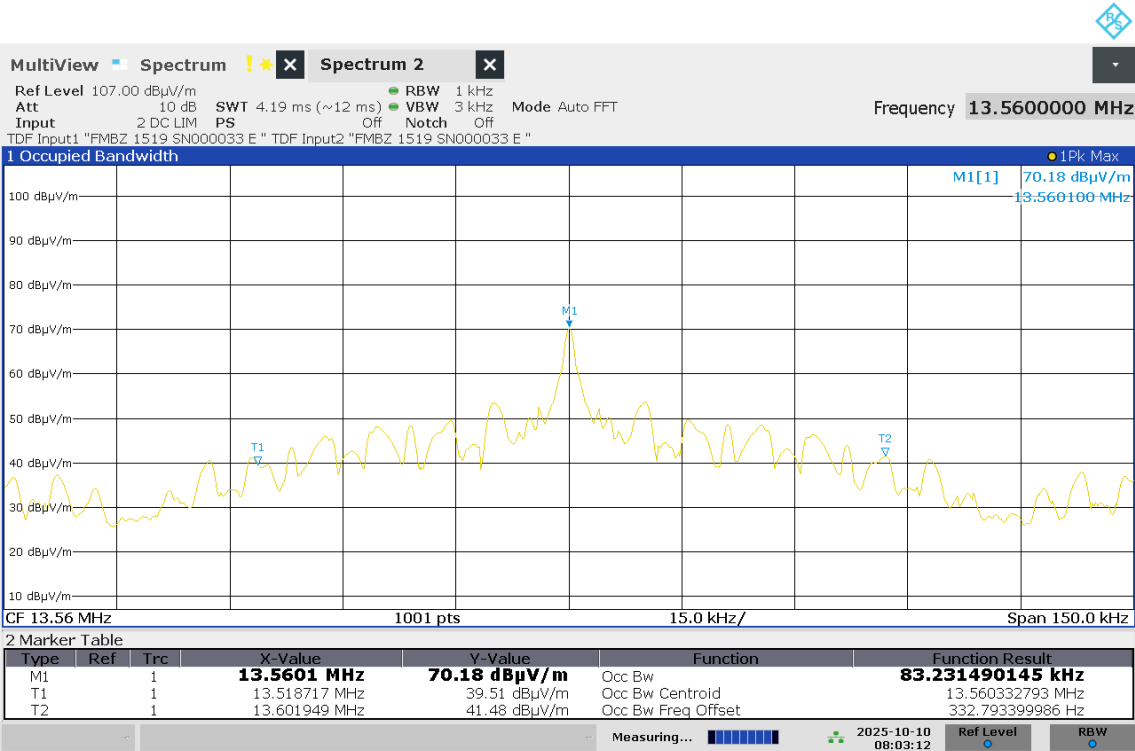

08:03:12 AM 10/10/2025


Primary and secondary pad active, antenna at 90 deg:

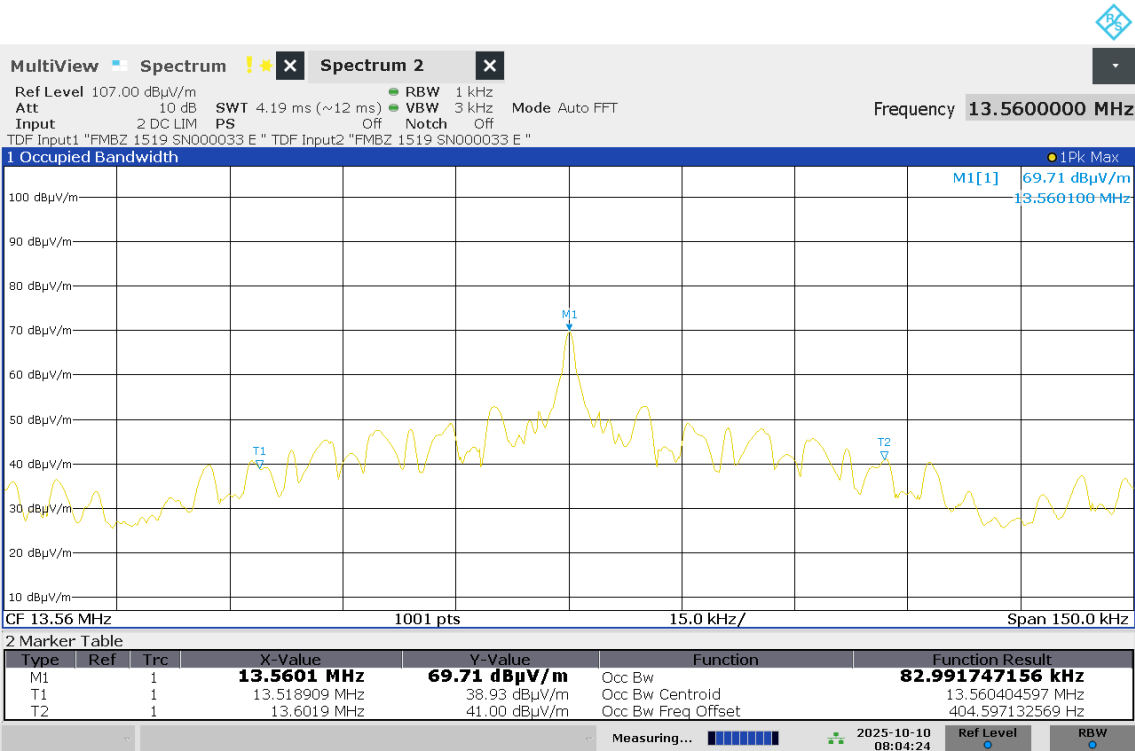

08:04:24 AM 10/10/2025


Portrait mode:

Primary and secondary pad active, antenna at 0 deg:

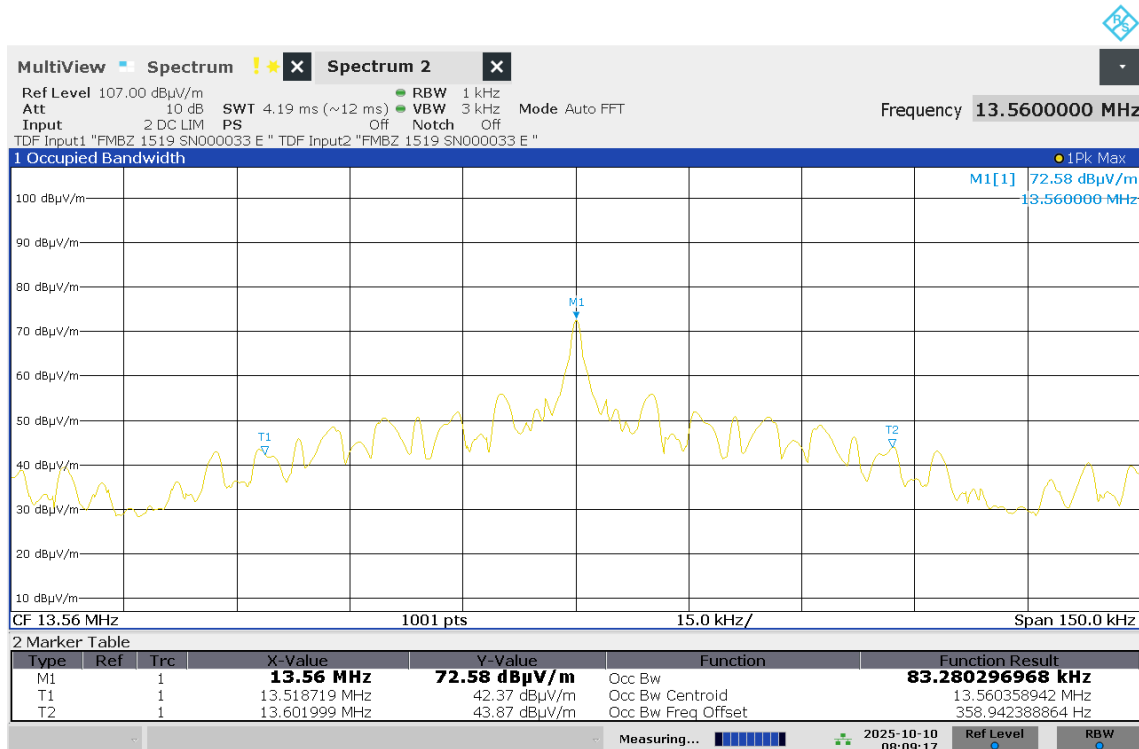

08:09:17 AM 10/10/2025

Primary and secondary pad active, antenna at 90 deg:

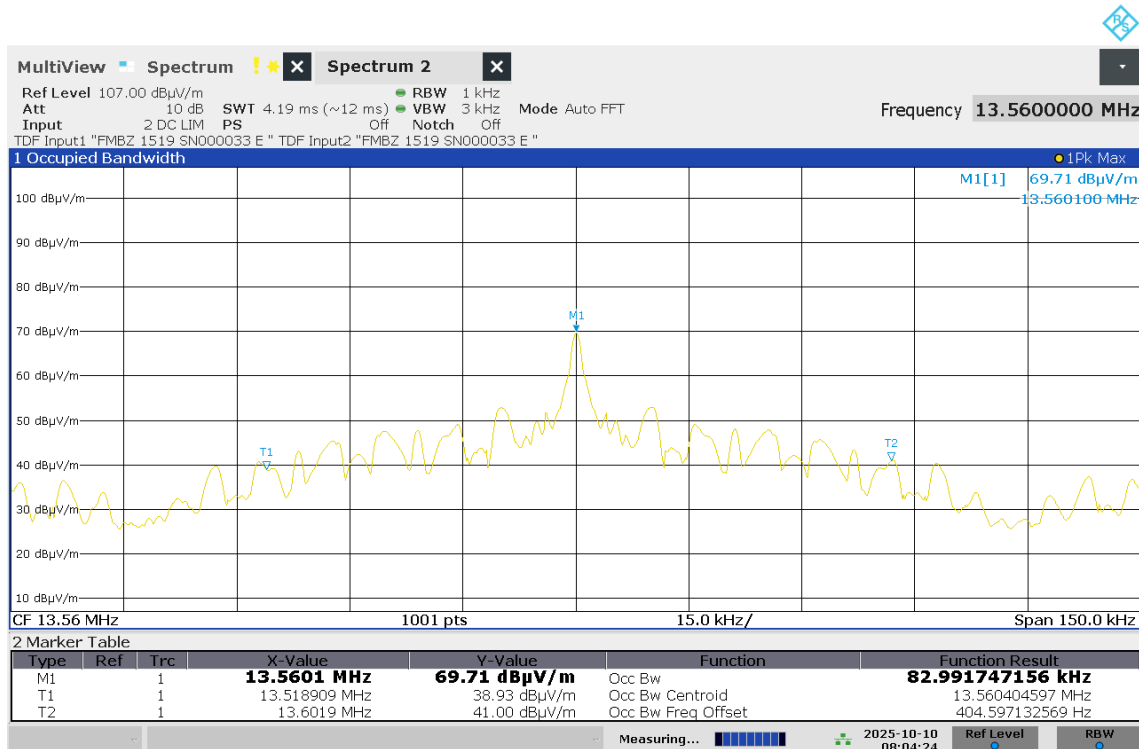

08:04:24 AM 10/10/2025

-----END OF TEST REPORT-----