



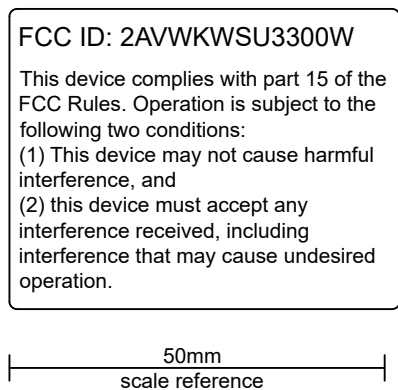

NOTES:

1. RINTING MUST MEET TEST STANDARD IEC 62368-1 Ed.3-F3.10 (TEST FOR PERMANENCE MARKING)
2. Released thermal transfer ribbon: Ricoh B110CR and ARIMOR AXR 7+
3. Font = Arial
4. Raw Label = 3263789600 (PLE T0.07)
5. FOR SURFACE TEMPERATURE AND APPLICATION SURFACE: SEE RAW LABEL DATA SHEET AND UL FILE

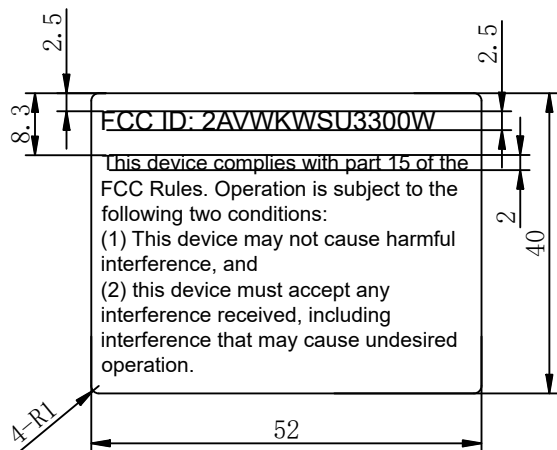

台達電子工業股份有限公司
DELTA ELECTRONICS, INC.

Drawn:

Jason

Design:

Jason

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.



Description:

WSU FCC LABEL

DIMENSIONAL TOLERANCES

HOLES : ± 0.05 ANGLES : $\pm 0.5^\circ$

()	()	()	()	()
<30 : ± 0.25	DECIMALS	UP~100 : ± 0.2	250~300 : ± 0.4	UP~600 : ± 1.5
>30~100 : ± 0.35	X : ± 0.3	100~150 : ± 0.25	300~350 : ± 0.45	600~900 : ± 2.4
>100~300 : ± 0.5	X.X : ± 0.2	150~200 : ± 0.3	350~400 : ± 0.5	900~OVER : ± 3.1
ABOVE 300 : ± 0.6	X.XX : ± 0.1	200~250 : ± 0.35		

A4
SIZE

Part No.

326071xxxx

REV.

00

SCALE UNIT mm USED ON EOE16010870

SHEET 2 OF 2 ISSUE DATE: Mar. 30' 26