



TEST REPORT

Applicant Name : Speed Well International Industrial Ltd.
Address : 2/F, West Wing, 822 Lai Chi Kok Road Cheung Sha Wan,
Kowloon Hong Kong China
Report Number : RA230504-23383E-RF-00
FCC ID: 2AVYA-27T23

Test Standard (s)

FCC PART 15.227

Sample Description

Product Type: RC Spin Stunt Cruiser
Model No.: 82592
Multiple Model(s) No.: N/A
Trade Mark: N/A
Date Received: 2023/05/04
Report Date: 2023/06/06

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Approved By:

Dave Liang

Candy Li

Dave Liang
EMC Engineer

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "**". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503290 Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
TEST EQUIPMENT LIST	8
FCC §1.1307 (B) & §2.1093 – RF EXPOSURE.....	9
APPLICABLE STANDARD	9
FCC§15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC§15.205, §15.209, §15.227(A), §15.227 (B) – FIELD STRENGTH AND RESTRICTED BAND EMISSIONS.....	11
APPLICABLE STANDARD	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	11
CORRECTED AMPLITUDE & MARGIN CALCULATION	12
TEST DATA	12
FCC§15.215(C) - 20DB EMISSION BANDWIDTH	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST DATA	24

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA230504-23383E-RF-00	Original Report	2023-06-06

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Test Frequency	27.145MHz
Modulation	AM
Voltage Range	DC 3.0V from battery
Sample serial number	25BH-1 (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The objective is to determine the compliance of EUT with FCC rules, section 15.203, 15.205, 15.209, 15.215 and 15.227.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Emissions, Radiated	9kHz - 30MHz	2.06dB
	30MHz - 1GHz	5.08dB
	1GHz - 18GHz	4.96dB
	18GHz - 26.5GHz	5.16dB
	26.5GHz - 40GHz	4.64dB
Occupied Channel Bandwidth		5%
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 30241.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical mode.


EUT Exercise Software

No exercise software was used.

Equipment Modifications

No modifications.

Block Diagram of Test Setup

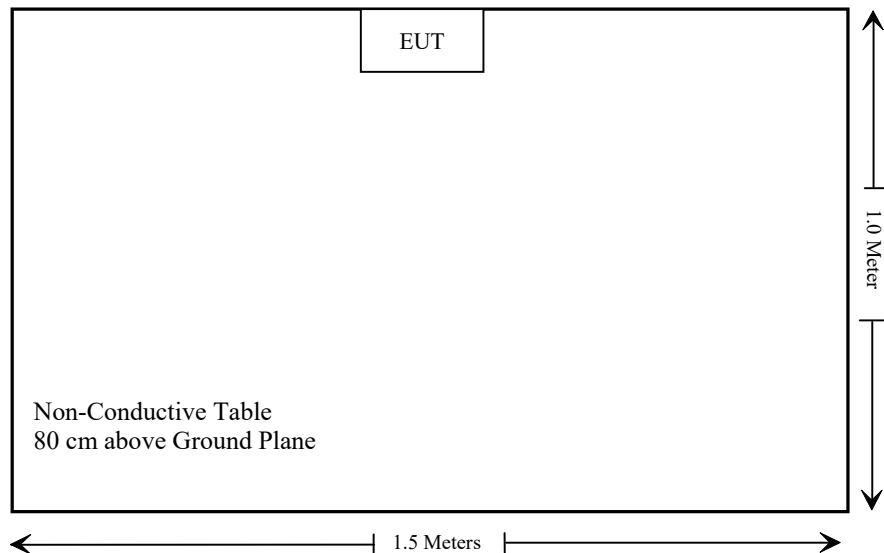

Note: the support table edge was flush with the center of turntable

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§ 1.1307 (b) & §2.1093	RF EXPOSURE	Compliant
§15.203	Antenna requirement	Compliant
§15.207	Conducted Emissions	Not Applicable
§15.205, §15.209, §15.227(a), §15.227(b)	Field Strength and Restricted Band Emissions	Compliant
§15.215(c)	20dB Emission Bandwidth	Compliant

Not Applicable: The EUT is powered by battery.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Rohde& Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
SCHWARZBECK	LOOP ANTENNA	FMZB1516	1516131	2021/12/22	2024/12/21
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307 (b) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance v06, clause 4.3. General SAR test exclusion guidance:

c) For frequencies below 100 MHz, the following may be considered for SAR test exclusion (also illustrated in Appendix C):

- 1) For test separation distances > 50 mm and < 200 mm, the power threshold at the corresponding test separation distance at 100 MHz in step b) is multiplied by $[1 + \log(100/f_{\text{(MHz)}})]$
- 2) For test separation distances ≤ 50 mm, the power threshold determined by the equation in c) 1) for 50 mm and 100 MHz is multiplied by $\frac{1}{2}$
- 3) SAR measurement procedures are not established below 100 MHz.

For worst case:

The SAR Exclusion Threshold Level for 27.145MHz when the minimum test separation distances ≤ 50 mm:

$$= [474 * (1 + \log(100/f_{\text{(MHz)}}))] / 2 = 371 \text{ mW}$$

Use the maximum E-field strength (58.63dBuV/m@3m) for the RF exposure evaluation

$$E[\text{dB } \mu \text{ V/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ for distance 3m, so the EIRP} = 58.63 \text{ dBuV/m} - 95.2 = -36.57 \text{ dBm}$$

The maximum tune-up power = -36dBm = 0.0003mW, which less than 371mW@27.145MHz Exclusion Threshold Level.

So the stand-alone SAR evaluation can be exempted.

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Antenna Connector Construction

The EUT has an integral antenna arrangement which was permanently attached, fulfill the requirement of this section. Please refer to EUT photos.

Result: Compliant.

FCC§15.205, §15.209, §15.227(a), §15.227 (b) – FIELD STRENGTH AND RESTRICTED BAND EMISSIONS


Applicable Standard

According to FCC §15.227 (a), the field strength if any emission within this band shall not exceed 10,000 microvolts/meter at 3 meters.

(b) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in §15.209.

EUT Setup

30MHz-1GHz

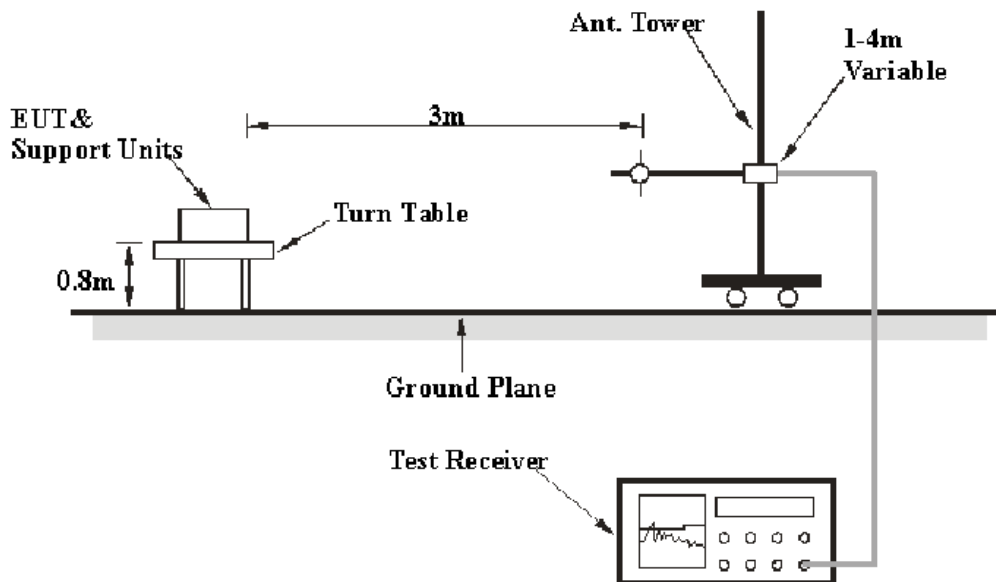

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part 15.205 and 15.209 and 15.227 limits.

For Below 30MHz

According to ANSI C63.10-2013, Clause 6.4.6, the lowest height of the magnetic antenna shall be 1 m above the ground and shall be positioned at the specified distance from the EUT. When the EUT contains a loop antenna that can only be placed in a vertical axis, normal measurements shall be made aligning the measurement antenna along the site axis, and then orthogonal to the axis. For each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable

EMI Test Receiver Setup

The system was investigated from 9 kHz to 1000MHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Correction Factor}$$

$$\text{Correction Factor} = \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions


Temperature:	23 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

Testing was performed by Jason Liu on 2023-05-27.

Test mode: Transmitting (Scan with X-AXIS, Y-AXIS, Z-AXIS, the worst case was Y-AXIS which was recorded)


9 kHz~30MHz:

Note: PK detector data compliance with the QP detector limit for the spurious emission test.

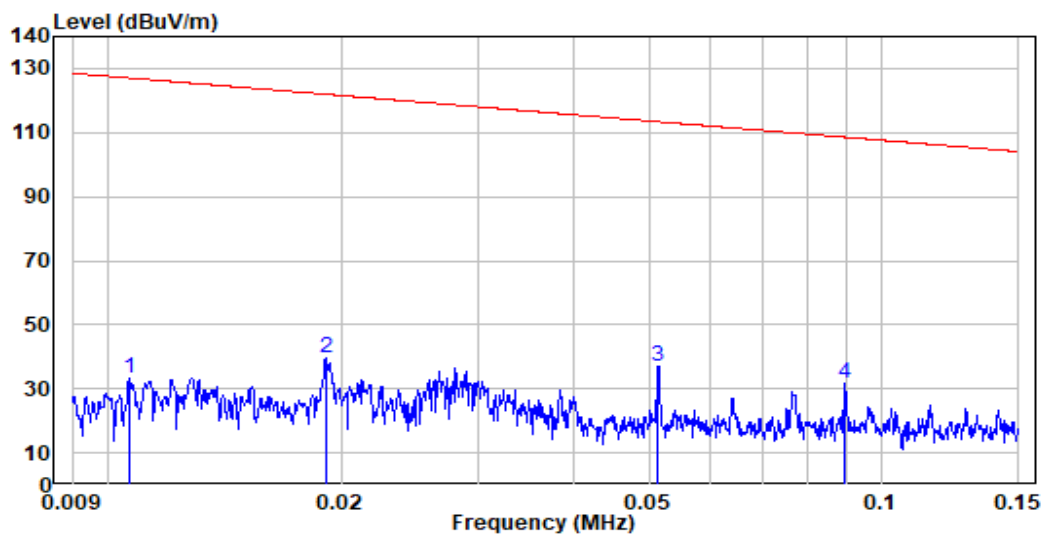Ground-parallel:


Site : chamber
Condition: 3m
Job No. : RA230504-23383E-RF
Test Mode: Transmitting
Note : Ground-parallel

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.011	-11.38	44.76	33.38	127.05	-93.67	Peak
2	0.019	-11.66	51.24	39.58	121.97	-82.39	Peak
3	0.051	-11.54	48.57	37.03	113.39	-76.36	Peak
4	0.090	-11.57	43.14	31.57	108.55	-76.98	Peak

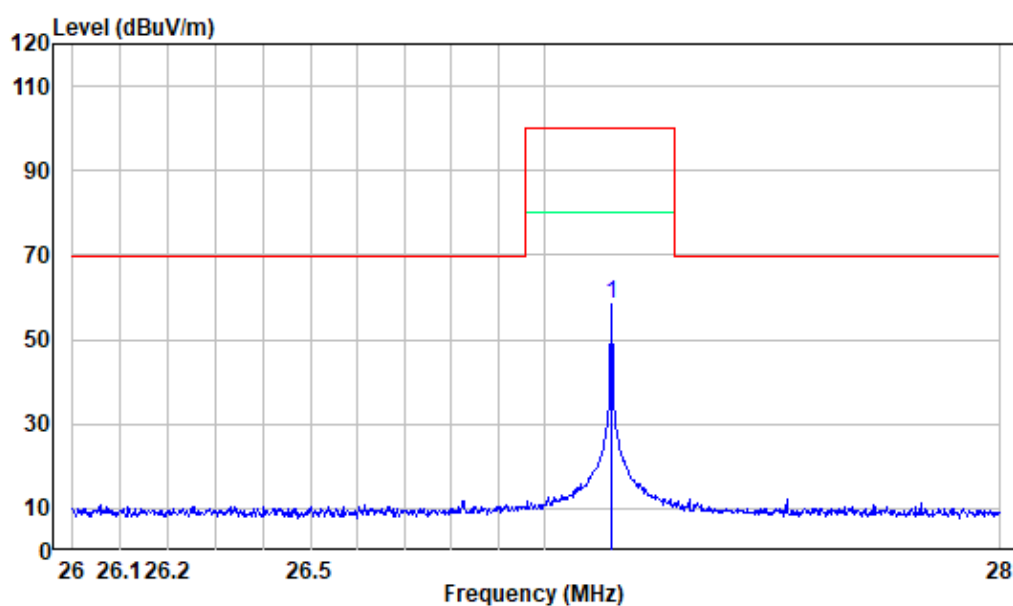


Site : chamber
Condition: 3m
Job No. : RA230504-23383E-RF
Test Mode: Transmitting
Note : Ground-parallel

	Freq		Read		Limit	Over	Remark
	Factor	Level	Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	27.146	-9.97	68.60	58.63	100.00	-41.37	Peak

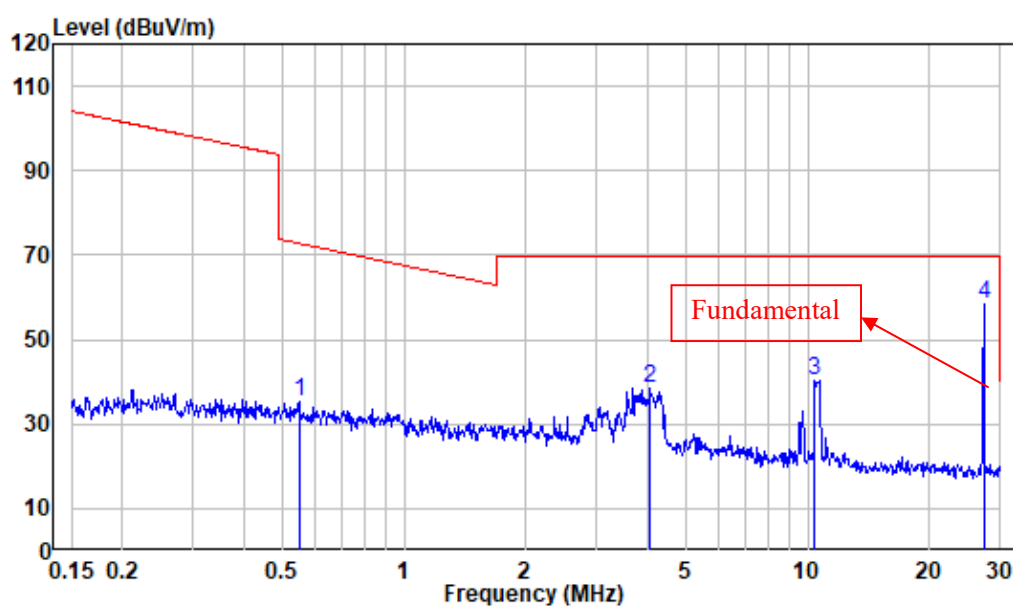

Site : chamber
Condition: 3m
Job No. : RA230504-23383E-RF
Test Mode: Transmitting
Note : Ground-parallel

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.549	-11.64	46.77	35.13	72.79	-37.66	Peak
2	4.070	-11.69	50.14	38.45	69.54	-31.09	Peak
3	10.397	-10.93	51.18	40.25	69.54	-29.29	Peak
4	27.271	-9.96	68.19	58.23	69.54	-11.31	Peak

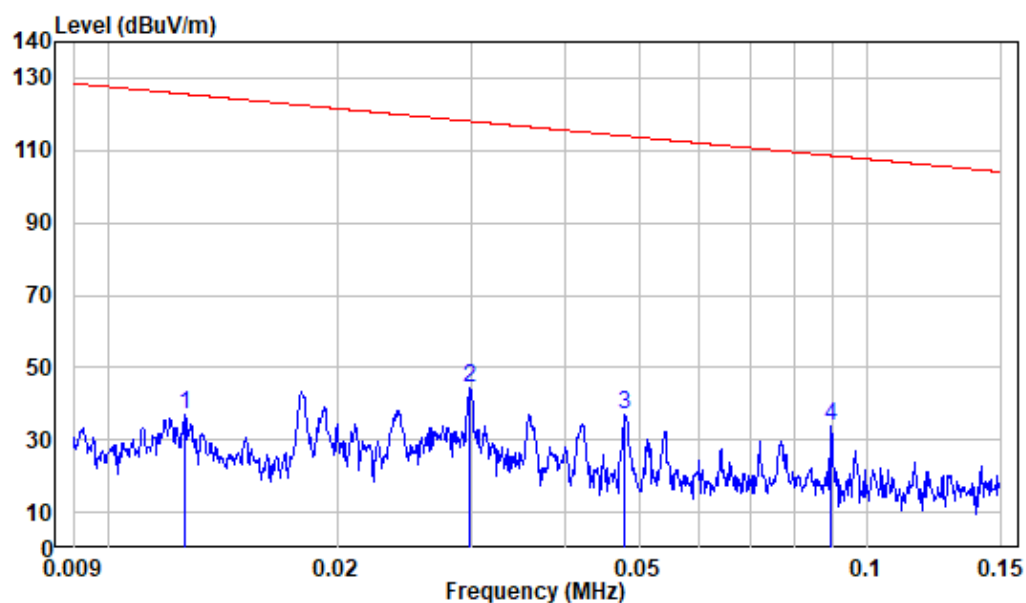Parallel:

Site : chamber


Condition: 3m

Job No. : RA230504-23383E-RF

Test Mode: Transmitting


Note : Parallel

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.013	-11.45	48.47	37.02	125.56	-88.54	Peak
2	0.030	-11.64	55.82	44.18	118.09	-73.91	Peak
3	0.048	-11.54	48.50	36.96	114.00	-77.04	Peak
4	0.090	-11.57	45.14	33.57	108.55	-74.98	Peak

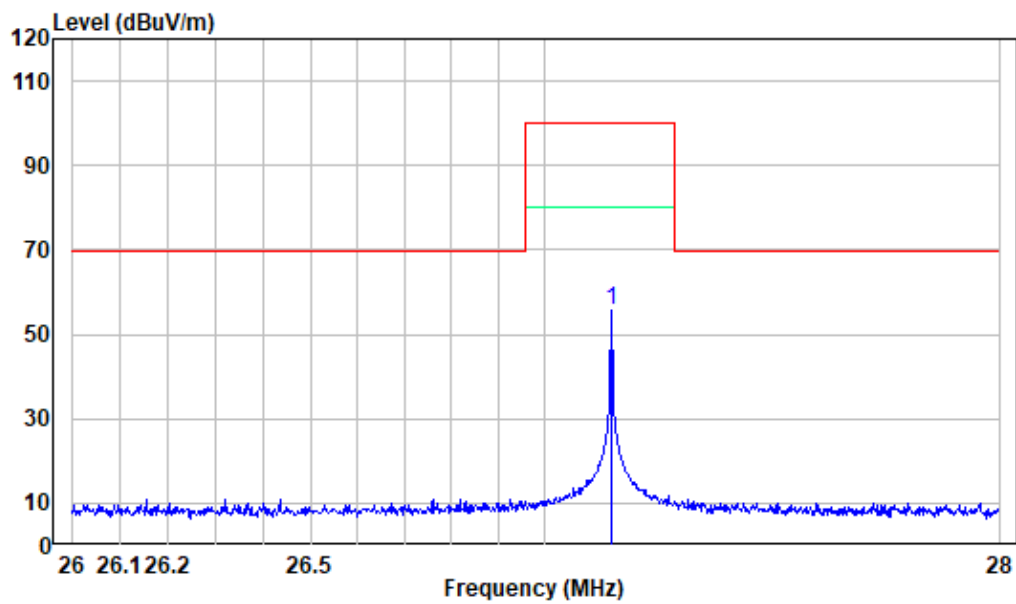


Site : chamber
Condition: 3m
Job No. : RA230504-23383E-RF
Test Mode: Transmitting
Note : Parallel

	Freq Factor		Read	Limit	Over	Remark
	MHz	dB/m	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	27.146	-9.97	65.64	55.67	100.00	-44.33 Peak

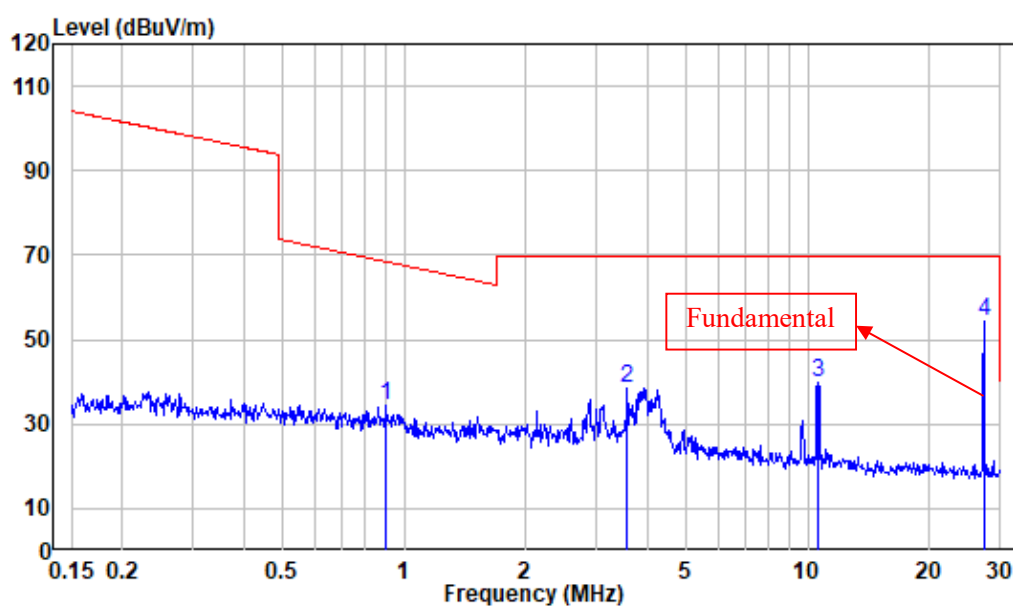


Site : chamber
Condition: 3m
Job No. : RA230504-23383E-RF
Test Mode: Transmitting
Note : Parallel

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.904	-11.71	46.20	34.49	68.37	-33.88	Peak
2	3.565	-11.77	50.34	38.57	69.54	-30.97	Peak
3	10.620	-10.93	50.76	39.83	69.54	-29.71	Peak
4	27.271	-9.96	64.16	54.20	69.54	-15.34	Peak

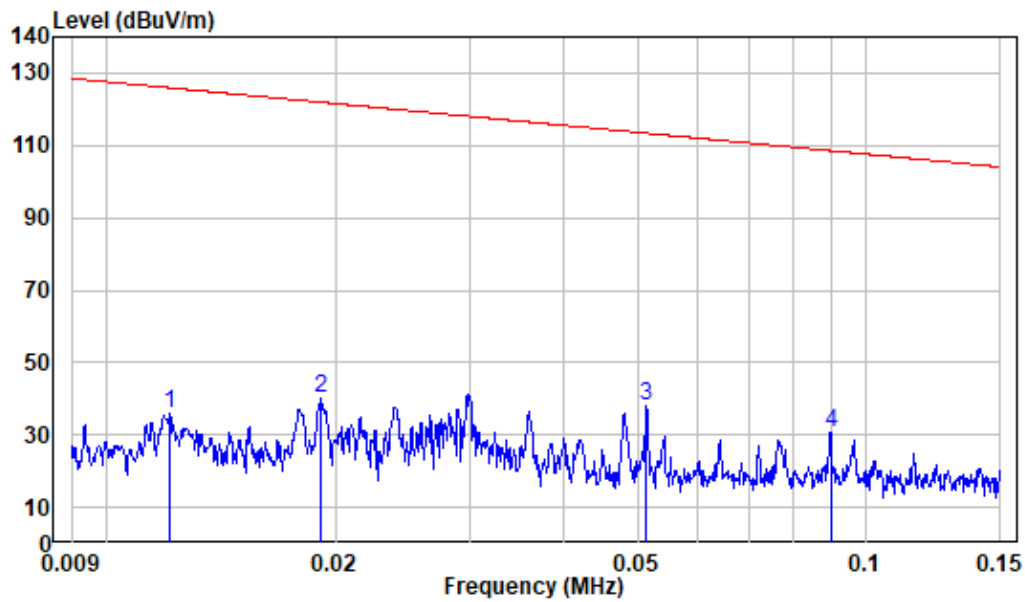Perpendicular:


Site : chamber
Condition: 3m
Job No. : RA230504-23383E-RF
Test Mode: Transmitting
Note : Perpendicular

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.012	-11.43	47.23	35.80	125.93	-90.13	Peak
2	0.019	-11.66	51.68	40.02	121.97	-81.95	Peak
3	0.051	-11.54	49.34	37.80	113.39	-75.59	Peak
4	0.090	-11.57	42.13	30.56	108.53	-77.97	Peak

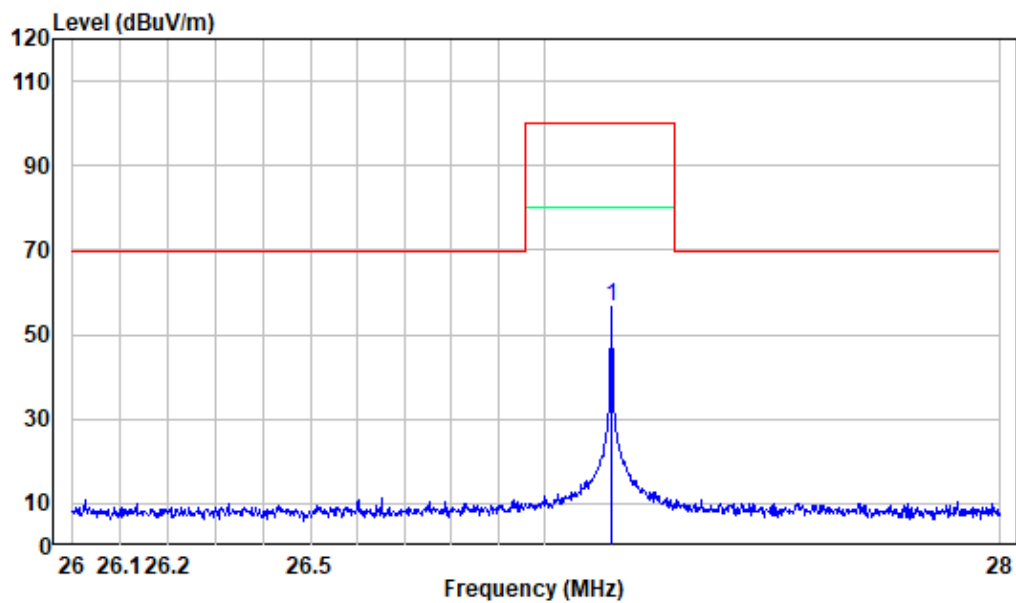

Site : chamber
Condition: 3m
Job No. : RA230504-23383E-RF
Test Mode: Transmitting
Note : Perpendicular

	Freq		Read		Limit	Over	Remark
	Factor		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	27.146	-9.97	66.62	56.65	100.00	-43.35	Peak

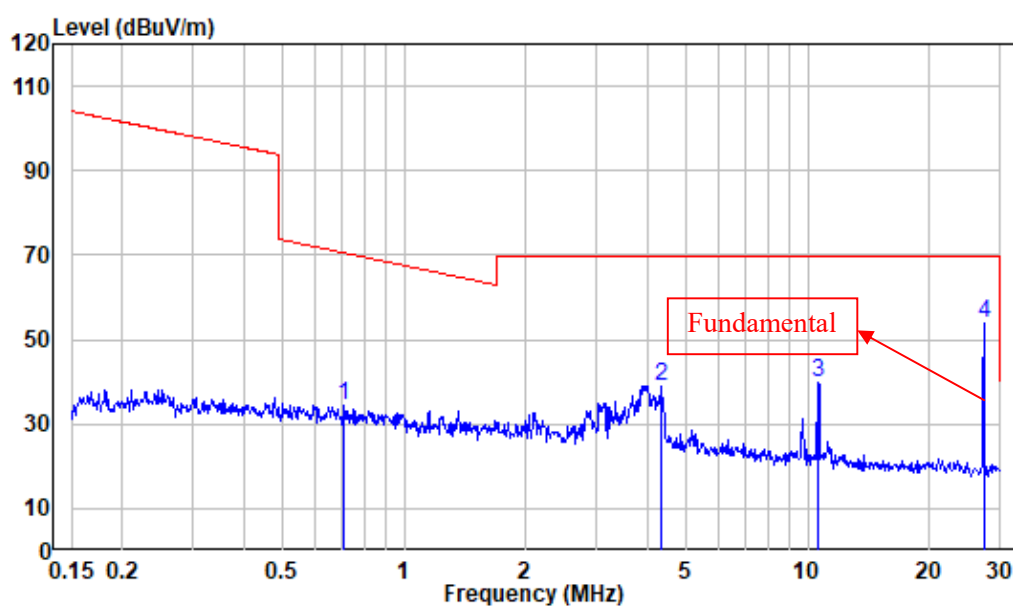


Site : chamber
 Condition: 3m
 Job No. : RA230504-23383E-RF
 Test Mode: Transmitting
 Note : Perpendicular

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.712	-11.87	46.26	34.39	70.48	-36.09	Peak
2	4.315	-11.69	50.74	39.05	69.54	-30.49	Peak
3	10.620	-10.93	50.75	39.82	69.54	-29.72	Peak
4	27.271	-9.96	63.90	53.94	69.54	-15.60	Peak

30 MHz ~ 1GHz


Horizontal

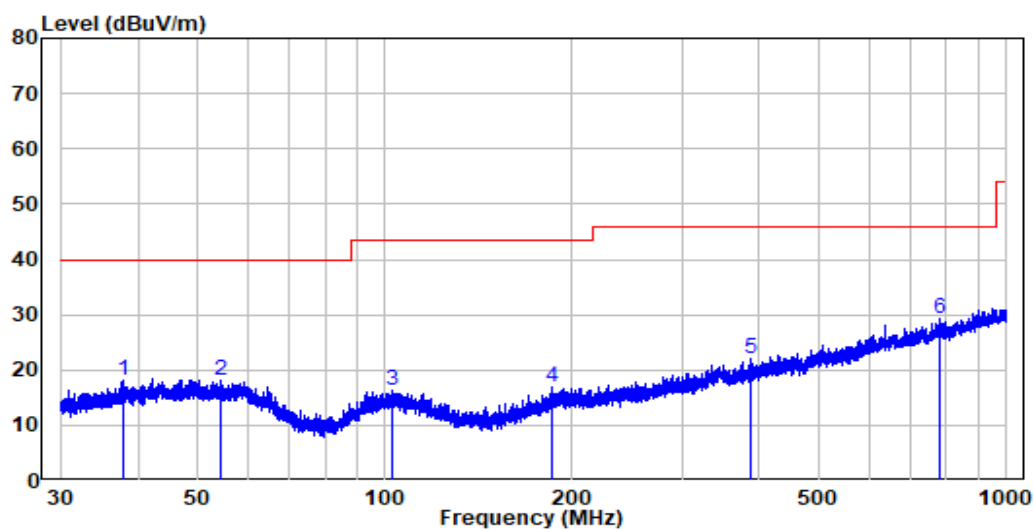

Site : chamber
Condition: 3m Horizontal
Job No. : RA230504-23383E-RF
Test Mode: Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	37.945	-10.83	29.01	18.18	40.00	-21.82	Peak
2	54.190	-10.33	28.32	17.99	40.00	-22.01	Peak
3	102.449	-11.60	27.77	16.17	43.50	-27.33	Peak
4	185.870	-12.08	28.95	16.87	43.50	-26.63	Peak
5	386.973	-6.99	28.98	21.99	46.00	-24.01	Peak
6	779.949	0.08	29.17	29.25	46.00	-16.75	Peak

Vertical

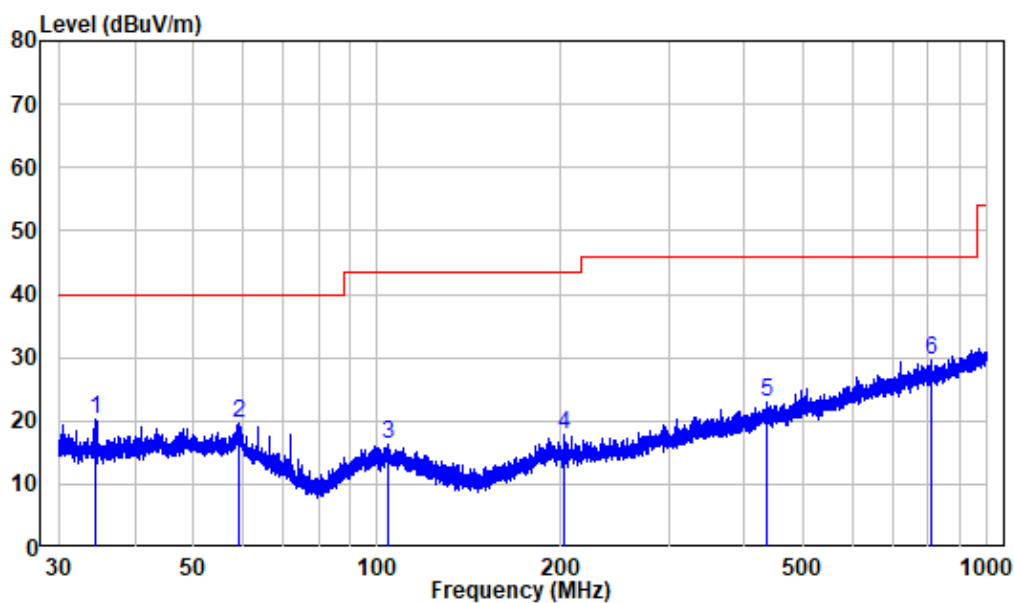

Site : chamber
Condition: 3m VERTICAL
Job No. : RA230504-23383E-RF
Test Mode: Transmitting

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	34.442	-11.72	31.90	20.18	40.00	-19.82	Peak
2	59.181	-10.32	30.04	19.72	40.00	-20.28	Peak
3	104.353	-11.78	27.99	16.21	43.50	-27.29	Peak
4	201.746	-11.55	29.39	17.84	43.50	-25.66	Peak
5	435.208	-5.71	28.64	22.93	46.00	-23.07	Peak
6	807.075	-0.43	29.95	29.52	46.00	-16.48	Peak

Result: Compliant.

FCC§15.215(c) - 20dB EMISSION BANDWIDTH

Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

Per ANSI C63.10-2013 §6.4 & §6.9.

Test Data


Environmental Conditions

Temperature:	23 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

Testing was performed by Jason Liu on 2023-06-06.

Test Mode: Transmitting

Please refer to the following plots.

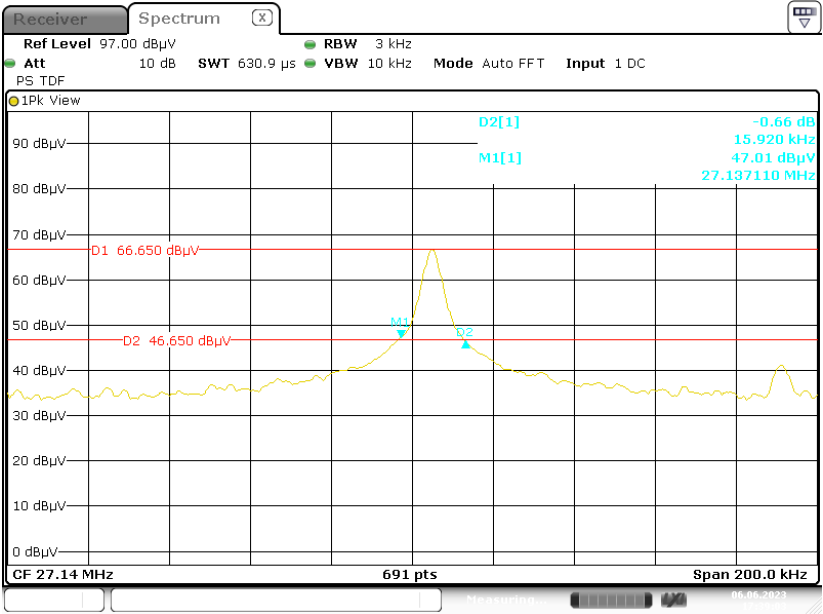

Date: 6.JUN.2023 17:39:04

Frequency (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Result
27.145	0.016	26.96-27.28	Compliant

****END OF REPORT****