

Prüfbericht-Nr.: <i>Test report no.:</i>	IN25KPWW 001	Auftrags-Nr.: <i>Order no.:</i>	147104915 010	Seite 1 von 44 Page 1 of 44
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	2566340	Auftragsdatum: <i>Order date:</i>	2025-09-09	
Auftraggeber: <i>Client:</i>	75F Inc. , 1650 W, 82nd St, #200, Bloomington, Minnesota, USA - 55431			
Prüfgegenstand: <i>Test item:</i>	MyStat			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	Main Model: 7X-TS-C4K-C2 Associated Model: 7X-TS-C4K-X; 7C-TS-C4K-C2; 7C-TS-C4K-X;			
Auftrags-Inhalt: <i>Order content:</i>	Testing and issue of Test Report with Grant Certificate			
Prüfgrundlage: <i>Test specification:</i>	FCC Part15 SubpartC 15.247; 15.205; 15.207; 15.209 RSS Gen Issue 5; RSS 247 Issue 4			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2025-09-10			
Prüfmuster-Nr.: <i>Test sample no:</i>	A004088908-001 A004088908-002			
Prüfzeitraum: <i>Testing period:</i>	2025-09-15 - 2025-10-13			
Ort der Prüfung: <i>Place of testing:</i>	Wireless laboratory, Bangalore			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (India) Pvt.Ltd., 27/B, 2nd Cross, Electronic City Phase1 Bangalore -560 100, India FCC Test site registration number: 496599 ISED Test site registration number: 27711			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	genehmigt von: <i>authorized by:</i>			
Datum: <i>Date:</i>	Ausstellungsdatum: <i>Issue date:</i>			
Stellung / Position:	Stellung / Position:			
Sonstiges / <i>Other:</i>				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht - Nr.:

IN25KPWW 001

Seite 2 von 44

Test Report No.:

Page 2 of 44

- | | |
|---|--|
| 1 | <p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.</p> <p>Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p> |
| 2 | <p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature</p> <p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i></p> |
| 3 | <p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben.</p> <p>Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i></p> <p><i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p> |
| 4 | <p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p> |

Prüfbericht - Nr.:
Test Report No.:

IN25KPWW 001

Seite 3 von 44
Page 3 of 44

TEST SUMMARY

Test Item	FCC	ISED	Result
Maximum conducted (Peak) output power	15.247 (b)(3)	RSS 247 Issue 4 Section 6.3.2	Pass
Maximum Power Spectral Density	FCC 15.247(e)	RSS 247 Issue 4 Section 6.3.1	Pass
DTS Bandwidth & 99% Bandwidth	FCC 15.247(a)(2)	RSS 247 Issue 4 Section 6.3.1 RSS Gen Issue 5 Section 6.7	Pass
Emissions in non-restricted frequency bands	15.247 (d)	RSS 247 Issue 4 Section 6.6	Pass
Spurious Radiated Emissions and Restricted Bands of Operation	15.247 (d) / FCC 15.209 / FCC 15.205	RSS-Gen Issue 5, Section 8.9 /8.10	Pass
AC Power lines Conducted emission	FCC 15.207	RSS Gen Issue 5 Section 8.8	Pass
Antenna Requirement	FCC 15.203	RSS Gen Issue 5 Section 6.8	Complied

Product Category: Electronics Testing

Test Discipline: EMC Test Facility

Prüfbericht - Nr.:

Test Report No.:

IN25KPWW 001

Seite 4 von 44

Page 4 of 44

REVISION HISTORY OF THIS REPORT

Report Number	Version	Description	Issue date
IN25KPWW 001	01	Initial issue of report	2025-11-07

***Note:**

Mystat product having different models & all models are electrically identical and no RF changes. Hence, we tested **7X-TS-C4K-C2**

Sl.No	Product Name	Model No	HVIN
1	Mystat	7X-TS-C4K-C2	7X-TS-C4K-C2
2		7C-TS-C4K-C2	7C-TS-C4K-C2
3		7X-TS-C4K-X	7X-TS-C4K-X
4		7C-TS-C4K-X	7C-TS-C4K-X

Table of Contents

1	GENERAL REMARKS	6
1.1	Attachments	6
2	TEST SITES	7
2.1	Testing Facilities	7
2.2	List of Test and Measurement Instruments.....	7
3	GENERAL PRODUCT INFORMATION.....	8
3.1	Product Function and Intended Use	8
3.2	Ratings and System Details of Equipment under Test	8
3.3	Measurement Uncertainty:	9
4	TEST SET-UP AND OPERATION MODE.....	10
4.1	Principle of Configuration Selection	10
4.2	Test Operation and Test Software	10
4.3	Special Accessories and Auxiliary Equipment	10
4.4	Simultaneous Transmission	10
4.5	Countermeasures to achieve EMC Compliance	10
4.6	List of frequencies	10
4.7	TUV Sample Identification.....	10
5	Operational Description	11
6	TEST METHODOLOGY	12
6.1	AC Power lines Conducted emission	12
6.1.1	Test Setup Configuration.....	12
6.2	Radiated Emission Test	13
6.2.1	Test Setup Configuration.....	13
7	TEST RESULTS	15
7.1	Maximum Peak Conducted Output Power	15
7.2	DTS Bandwidth & 99% Bandwidth.....	17
7.3	Power Spectral Density.....	20
7.4	Emissions in non-restricted frequency bands and Conducted Spurious Emission.....	22
7.4.1	Out-Of-Band Emissions.....	25
7.5	Spurious Radiated Emissions & Restricted Bands of Operation	28
7.6	Simultaneous Operation for BLE and LoRa.....	39
8	AC Powerlines Conducted Emission	41
9	LIST OF TABLES.....	44
10	List of Figures.....	44

Prüfbericht - Nr.:

Test Report No.:

IN25KPWW 001

Seite 6 von 44

Page 6 of 44

1 GENERAL REMARKS

1.1 Attachments

All attachments are part of this test report and are issued in separate document

1. Test Setup photos
2. EUT External Photos
3. EUT Internal Photos
4. FCC Label and Label Location
5. Block Diagram
6. Specification of EUT
7. Schematic Diagrams
8. Bill of Material
9. User Manual
10. Maximum Permissible Exposure Information

Prüfbericht - Nr.:
Test Report No.:

IN25KPWW 001

Seite 7 von 44
Page 7 of 44

2 TEST SITES

2.1 Testing Facilities

1. TÜV Rheinland (India) Pvt.Ltd.,
27/B, 2nd Cross,
ElectronicCityPhase1
Bangalore – 560 100,
India
2. TUV Rheinland (India) Pvt.Ltd.,
108, Beside ISBR Business School,
Electronic city Phase I
Bangalore - 560 100,
India

2.2 List of Test and Measurement Instruments

Table 1: List of test and measurement instruments

Equipment	Manufacturer	Model Name	Serial Number	Firmware Versions	Calibration Due Date	Periodicity	Test Facility
EMI Receiver	Rohde & Schwarz	ESW 44	103384	3.20SP2	24.06.2026	Yearly	Radiated Spurious Emission
Active loop antenna	Frankonia	LAX-10	LAX-10-800	-	16.04.2026	Yearly	
Balun & Biconical Antenna	Schwarzbeck mess-elektronik	BBA 9106+VH BB 9124	9124-1117	-	27.05.2026	Yearly	
Log-Periodic Antenna	Schwarzbeck mess-elektronik	VUSLP 9111B	9111B-324	-	26.05.2026	Yearly	
Horn Antenna	Schwarzbeck	BBHA 9120 D	9120D-01944	-	12.11.2025	Yearly	
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA 9170-0904	-	14.02.2026	Yearly	
EMI Test Receiver	Rohde & Schwarz	ESW44	101773	1.72.SP1	26.01.2026	Yearly	
Semi Anechoic Chamber	Frankonia	-	-	-	-	-	
Fully Anechoic Chamber	Albatross	-	-	-	-	-	Conducted Test Parameters
Spectrum Analyzer	Agilent	E4407B	US411927 72	A.14.07	16.01.2026	Yearly	
10 dB RF Attenuator (DUT-1)	Rohde & Schwarz	-	-	-	10.10.2026	Yearly	Conducted AC Power line Test
EMI Receiver	Rohde & Schwarz	ESR7	101133	3.48 SP3	20.05.2026	Yearly	
Two Line LISN	Scientific	SMLIN6 3-2	161101	-	06.03.2026	Yearly	
Pulse limiter [0 - 30 MHz]	Rohde & Schwarz	ESH3-Z2	100811	-	26.06.2026	Yearly	

Table 2: Instrument application Software versions

SL. No.	Test Type	Application software	Version
1	Radiated spurious emission measurement in FAC	EMC 32	10.60.20
2	Radiated spurious emission measurement in 10mtr SAC	BAT EMC	3.20.0.17
3	Conducted Emissions on a.c power Lines	BAT EMC	3.20.0.17

3 GENERAL PRODUCT INFORMATION

3.1 Product Function and Intended Use

MyStat is a thermostat which works with most HVAC systems that use standalone heating/cooling and uses industry standard connections to facilitate the control of these appliances.

3.2 Ratings and System Details of Equipment under Test

Table 3: Ratings and System Details as declared by Client*

Protocol		LW Mesh
Operating Frequency Range		902MHz to 928MHz
Channel Spacing		200kHz
Maximum measured e.i.r.p (dBm)		11.05dBm
Modulation		BPSK
Data Rate		20kbps
Number of antennas		1
Antenna Gain & Antenna Type		1.0dBi & monopole flexible antenna
Antenna Part Number		2111400100
Supply Voltage to Product		24VDC through DC supply
Environmental conditions	Operating Condition	0 to 50 deg
	Storage Condition	0 to 50 deg
EUT Dimension		75mm Dia.

***Disclaimer:** The information/data is supplied by the client and the same is considered to arrive at the final value. Any changes made apart from the specified specification, can directly impact on the tests results. Refer the products user manual for more details.

3.3 Measurement Uncertainty:

Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k = 2$

Table 4: Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	± 0.67 dB
Power Spectral Density, conducted	± 0.85 dB
Unwanted Emissions, conducted	± 2.58 dB
All emissions, radiated	± 3.67 dB

4 TEST SET-UP AND OPERATION MODE

4.1 Principle of Configuration Selection

Transmission was enabled with highest possible duty cycle transmission on low, mid and high channel.

4.2 Test Operation and Test Software

Hardware Version Identification Number (HVIN):	101644MS
Test Firmware:	1.0
Software Name:	Tera Term
Hardware Name:	Mystat 101644
Hardware revision:	1.2

4.3 Special Accessories and Auxiliary Equipment

- None

4.4 Simultaneous Transmission

- This product supports Simultaneous transmission.

4.5 Countermeasures to achieve EMC Compliance

- None

4.6 List of frequencies

Frequency Band (GHz)	Channel No.	Frequency (MHz)
Sub-GHz (902 MHz – 928 MHz)	Low	906
	:	:
	Mid	914
	:	:
	High	924

Table 5: List of Sub-GHz Center frequencies

Channel used for Sub-GHz testing.

Channel Low: 906MHz

Channel Mid: 914MHz

Channel High: 924MHz

4.7 TUV Sample Identification

1. TUV Sample Identification number: A004088908-001 – Radiated test Sample.
A004088908-002 --Conducted test Sample

Prüfbericht - Nr.:
Test Report No.:

IN25KPWW 001

Seite 11 von 44
Page 11 of 44

5 Operational Description

It can be used to control single stage Heating/Cooling with Fan or upto 3 stages of only cooling or heating using the five onboard relays. It works on the 75F proprietary RF communication which helps in seamless integration with existing 75F solution. This device can also be run in a standalone mode which can be programmed using a CCU.

The MyStat has an Occupancy sensor in addition to the Temperature and Humidity sensor which helps in demand-controlled conditioning of a zone(space) which it is controlling.


6 TEST METHODOLOGY

6.1 AC Power lines Conducted emission

Measured levels of ac powerline conducted emission across the 50Ω LISN port (to which the EUT is connected). All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer.

The device is placed on the test table, raised 80cm above the reference ground plane. The vertical conducting plane is located 40cm to the rear of the device. AC Conducted emission measurement is made over frequency range from 150 kHz to 30MHz, this measurement was performed an AC adaptor 110V AC 60Hz supply

6.1.1 Test Setup Configuration

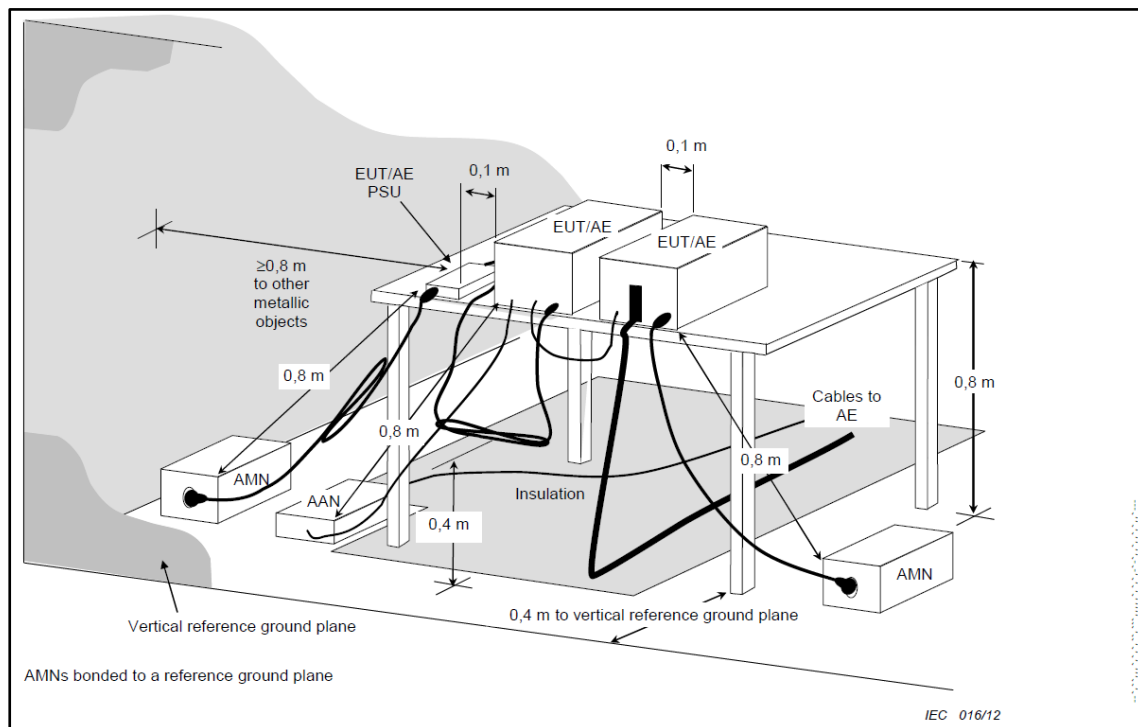

6.2 Radiated Emission Test

The radiated emission measurement was performed according to the procedures in ANSI C63.10-2020. The equipment under test (EUT) was placed at the middle of the 80 cm high turntable for below 1 GHz & 1.5 m height for above 1 GHz measurement, and the EUT is 3 meters far from the measuring antenna. The turntable was rotated 360° for obtaining the maximum emission. The height of the measuring antennas was scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained. The measurement above 1000 MHz was performed by horn antenna, the measurement below 30 MHz was performed by loop antenna, Measurement from 30 MHz to 200 MHz was performed by Balloon and Biconical Antenna, and measurement from 200 MHz to 1 GHz was performed by Log-Periodic Antenna.

The EUT was rotated around the X-, Y-, and Z-Axis and the results from worst case axis are recorded

6.2.1 Test Setup Configuration

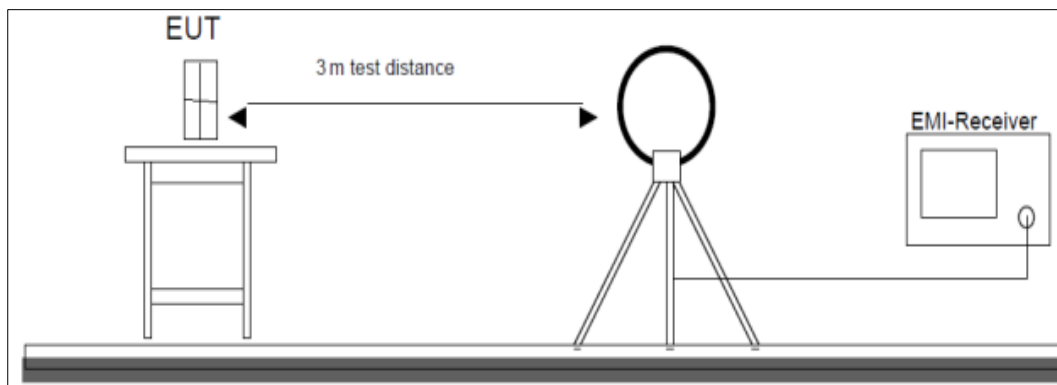


Figure 1: Frequency Range 9 kHz- 30 MHz

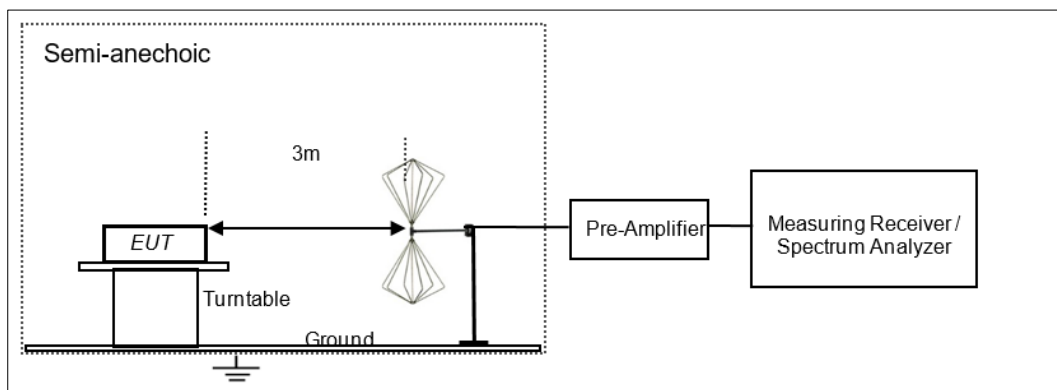


Figure 2: Frequency Range 30 MHz – 200 MHz

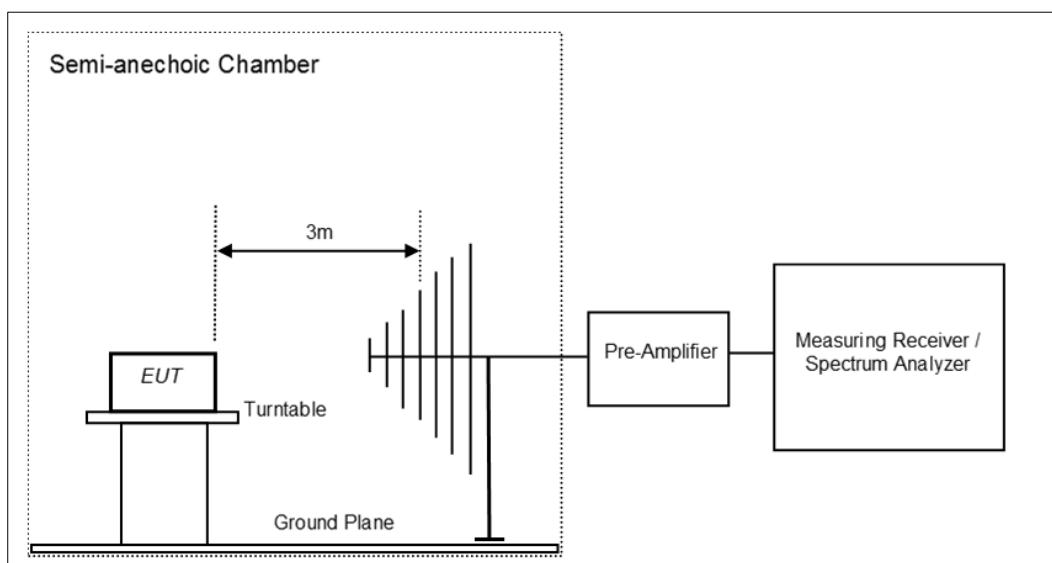


Figure 3: Frequency Range 200 MHz - 1GHz

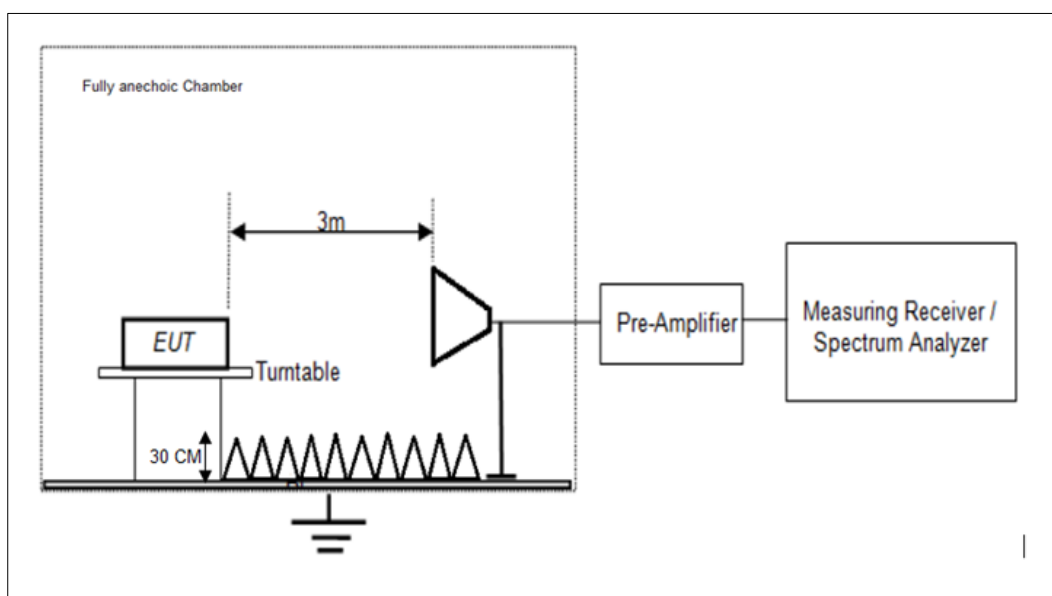


Figure 4: Frequency Range above 1 GHz

Prüfbericht - Nr.:
Test Report No.:

IN25KPWW 001

Seite 15 von 44
Page 15 of 44

7 TEST RESULTS

7.1 Maximum Peak Conducted Output Power

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (b)(3)/ RSS 247 Issue 4 Section 6.3.2 (a)
Test Method	Subclause 11.9.1.1 of ANSI C63.10-2020
Measurement Bandwidth	1MHz
Detector	Peak
Port of testing	Conducted mode
Requirement	Power ≤ 1 W (30 dBm) & e.i.r.p ≤ 4 W (36dBm)

Test Condition

Normal Test Condition:

Temperature (Norm) = +21.8°C Voltage = 24 VDC through DC supply Relative humidity: 55%

KDB Guidelines applied:

Measurements were made as per section 8.3.1.1 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:

Test Report No.:

IN25KPWW 001

Seite 16 von 44

Page 16 of 44

Test results:


Note:

1. All the losses are included during measurement and final values are mentioned in the test report
2. This product does not support additional beamforming gain / directional gain, it uses single antenna and hence Directional gain of the single antenna is 1.0 dBi


Channel Frequency (MHz)	Measured Power (dBm)	Maximum (e.i.r.p)	Power Limit (dBm)	e.i.r.p Limit (dBm)
906	10.05	11.05	30.00	36.00
914	9.93	10.93	30.00	36.00
924	9.76	10.76	30.00	36.00

Test Plots:


Data Rate: 1Mbps

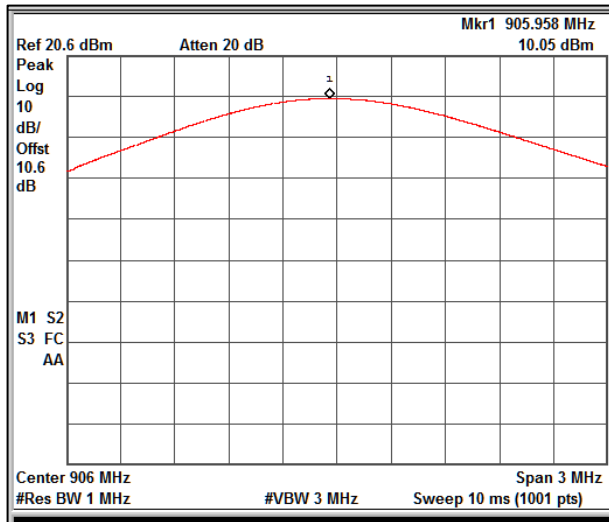

Channel frequency: 906MHz

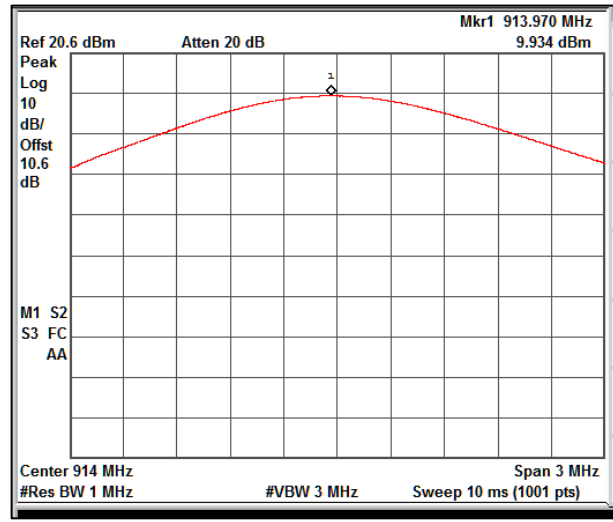

Channel frequency: 914MHz

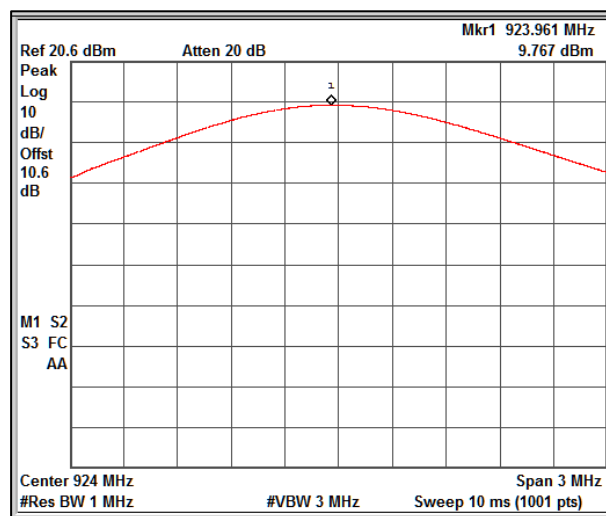

Channel frequency: 924MHz

Prüfbericht - Nr.:
Test Report No.:

IN25KPWW 001

Seite 17 von 44
Page 17 of 44

7.2 DTS Bandwidth & 99% Bandwidth

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (a) (2)/ RSS 247 Issue 4 Section 6.3.1 RSS Gen Issue 5 Section 6.7
Test Method	Subclause 11.8.1 of ANSI C63.10-2020 for DTS Subclause 6.9.3 of ANSI C63.10-2020 for OBW Subclause 6.9.3 of ANSI C63.10a-2024
Measurement Bandwidth	100 kHz for DTS Bandwidth 1% to 5% of OBW
Detector	Peak
Port of testing	Conducted mode
Requirement	Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Condition

Normal Test Condition:

Temperature (Norm) = +21.8°C Voltage = 24 VDC through DC supply Relative humidity: 55%

KDB Guidelines applied:

Measurements were made as per section 8.2 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

IN25KPWW 001

Seite 18 von 44
Page 18 of 44


Test results:

Note: All the losses are included during measurement and final values are mentioned in the test report.


Channel Frequency	99% (MHz)	6dB BW (MHz)	Limit (MHz)
906	0.82	0.68	0.5
914	0.81	0.67	0.5
924	0.81	0.67	0.5

Test Plots:


99% Bandwidth:

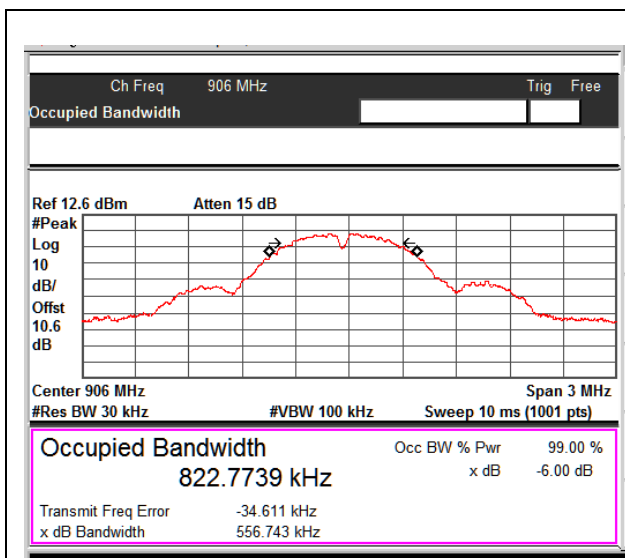

Channel frequency: 906MHz

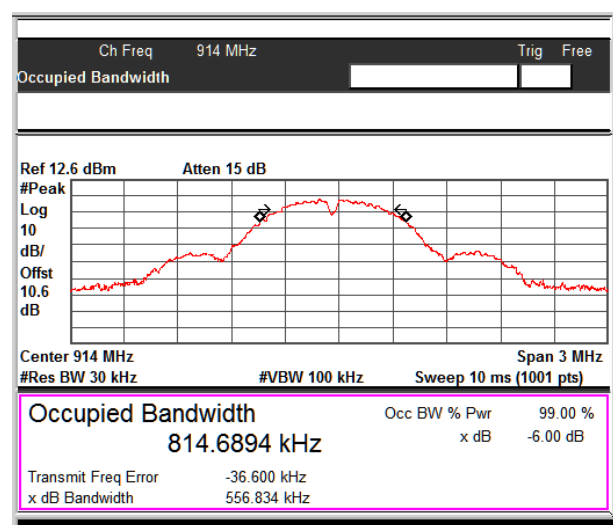

Channel frequency: 914MHz

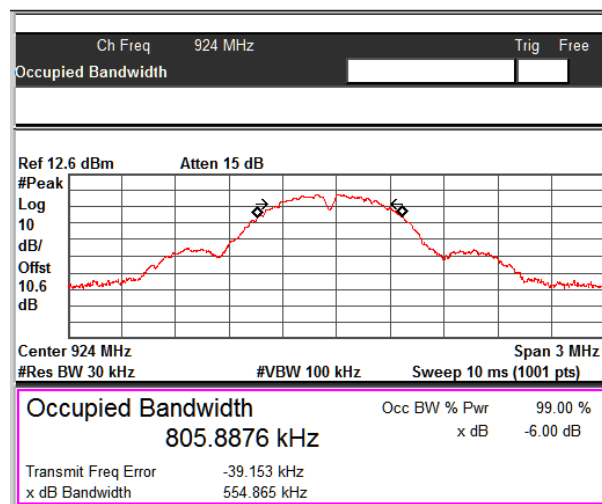


Channel frequency: 924MHz

Prüfbericht - Nr.:
Test Report No.:


IN25KPWW 001

Seite 19 von 44
Page 19 of 44


DTS Bandwidth:

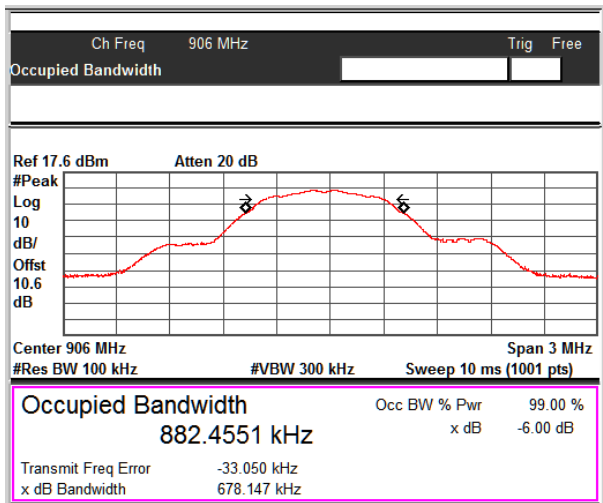

Channel frequency: 906MHz

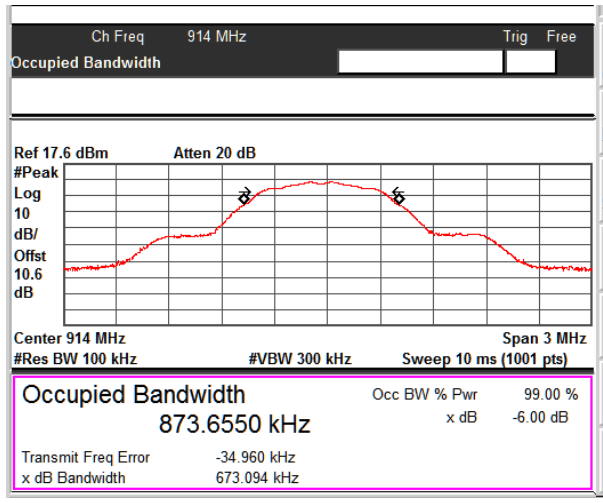

Channel frequency: 914MHz

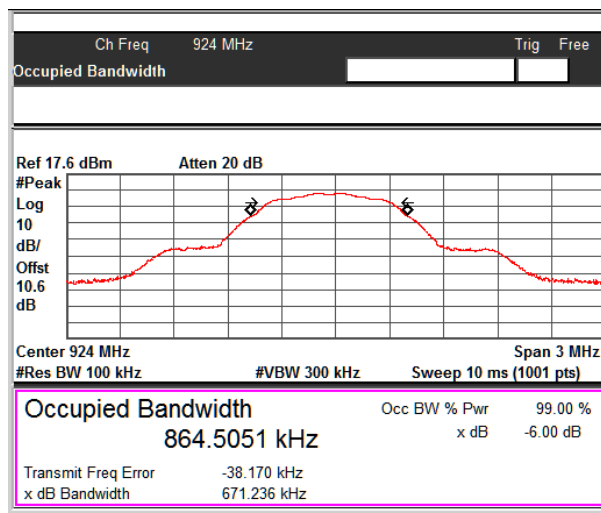

Channel frequency: 924MHz

Prüfbericht - Nr.:
Test Report No.:

IN25KPWW 001

Seite 20 von 44
Page 20 of 44

7.3 Power Spectral Density

Result

Pass

Test Specification	FCC Part 15 Subpart C Section 15.247 (e)/ RSS 247 Issue 4 Section 6.3.1
Test Method	Subclause 11.10.2 of ANSI C63.10-2020
Measurement Bandwidth	3 kHz
Detector	Peak
Port of testing	Conducted mode
Requirement	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 100 kHz band during any time interval of continuous transmission.

Test Condition

Normal Test Condition:

Temperature (Norm) = +21.8°C Voltage = 24 VDC through DC supply Relative humidity: 55%

KDB Guidelines applied:

Measurements were made as per section 8.4 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

IN25KPWW 001

Seite 21 von 44
Page 21 of 44


Test results:

Note: All the losses are included during measurement and final values are mentioned in the test report.


Channel Frequency (MHz)	Measured PSD (dBm)	Limit (dBm in any 3kHz)
906	6.30	8.00
914	6.18	8.00
924	5.88	8.00

Test Plots:


Data Rate: 1Mbps

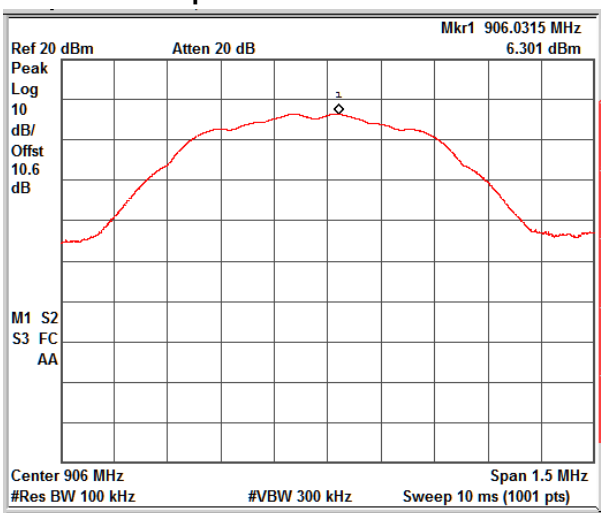

Channel frequency: 906MHz

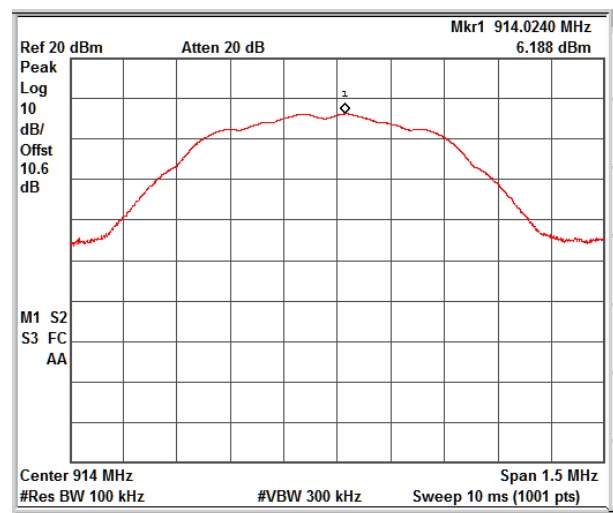

Channel frequency: 914MHz

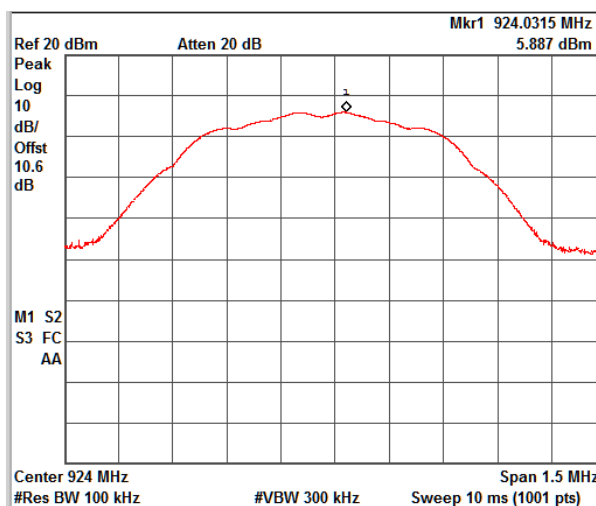

Channel frequency: 924MHz

Prüfbericht - Nr.:
Test Report No.:

IN25KPWW 001

Seite 22 von 44
Page 22 of 44

7.4 Emissions in non-restricted frequency bands and Conducted Spurious Emission

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (d)/ RSS 247 Issue 4 Section 6.6
Test Method	Subclause 11.11.3 of ANSI C63.10-2020
Measurement Bandwidth	100 kHz
Detector	Peak
Port of testing	Conducted mode
Requirement	In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB

Test Condition

Normal Test Condition:

Temperature (Norm) = +21.8°C Voltage = 24 VDC through DC supply Relative humidity: 55%

KDB Guidelines applied:

Measurements were made as per section 8.5 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

IN25KPWW 001

Seite 23 von 44
Page 23 of 44

Test results:


Note: All the losses are included during measurement and final values are mentioned in the test report

Band edge


Channel Frequency (MHz)	Band edge frequency (MHz)	Value at band edge (A) (dBm)	Reference value (B) (dBm)	A-B (dBc)	Minimum Limit (dBc)
906	902.00	-48.18	6.30	-54.48	-20.00
924	928.00	-48.56	5.88	-54.44	-20.00

Reference Plots:


Data Rate: 1Mbps

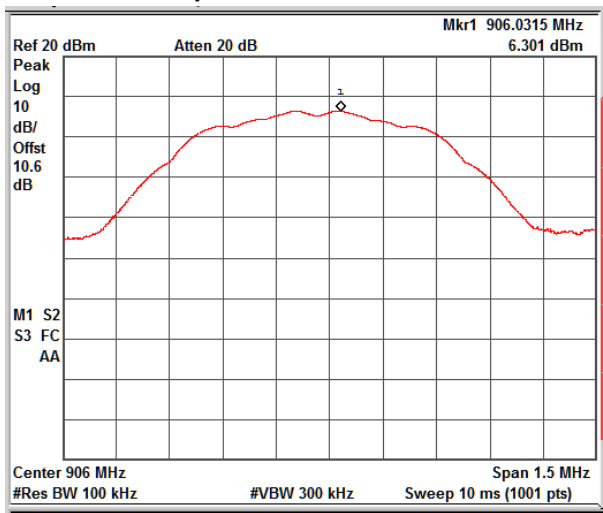

Channel frequency: 906MHz

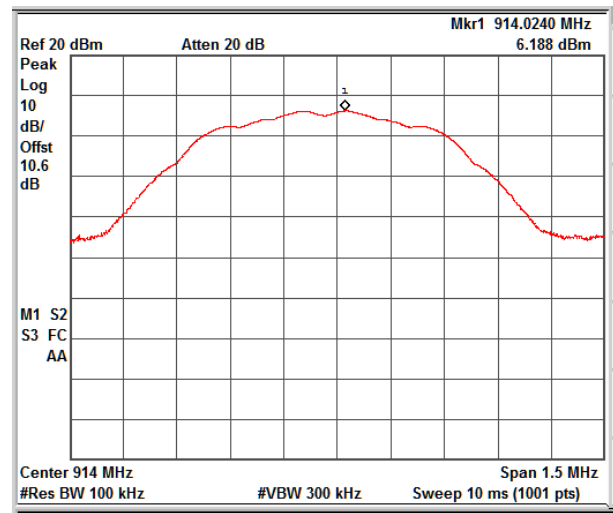

Channel frequency: 914MHz

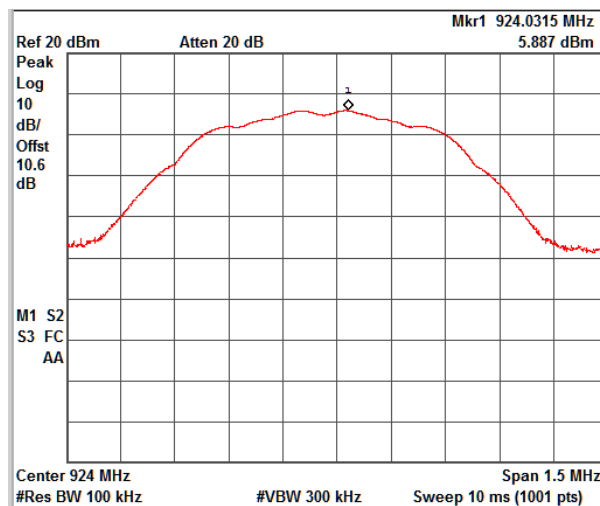

Channel frequency: 924MHz


Prüfbericht - Nr.:
Test Report No.:

IN25KPWW 001


Seite 24 von 44
Page 24 of 44

Bandedge Plots:

Data Rate: 1Mbps

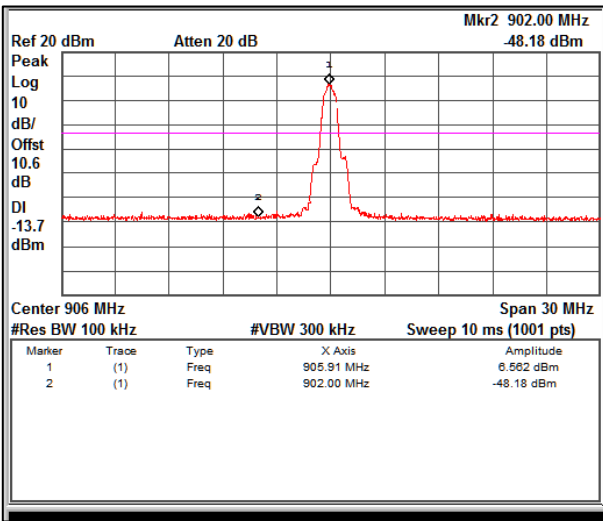


Channel frequency: 906MHz

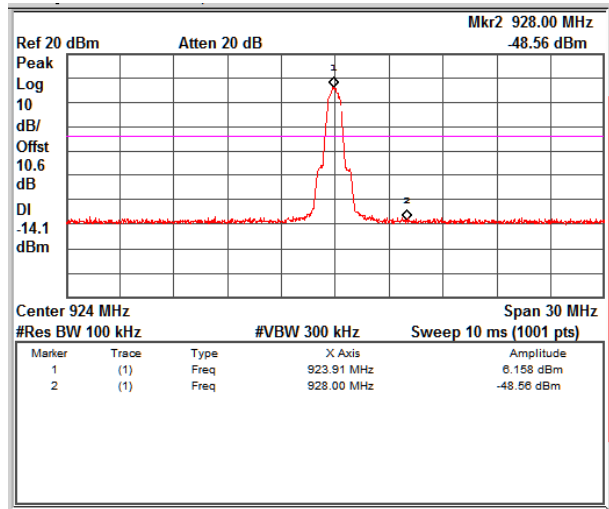


Channel frequency: 924MHz

7.4.1 Out-Of-Band Emissions

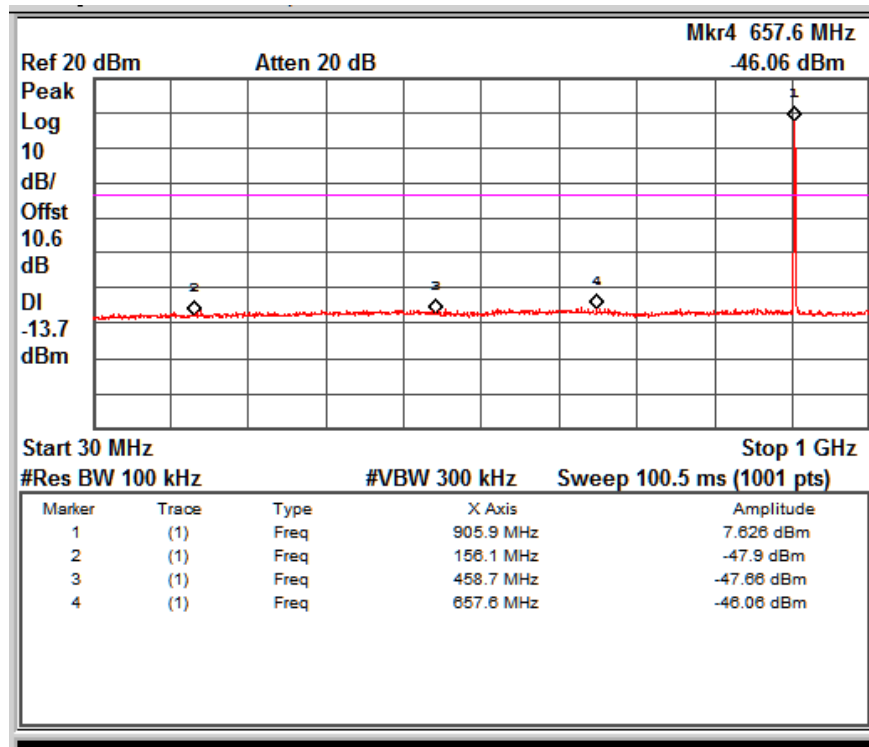

Channel Frequency: 906 MHz

Frequency Range 30 MHz – 1 GHz

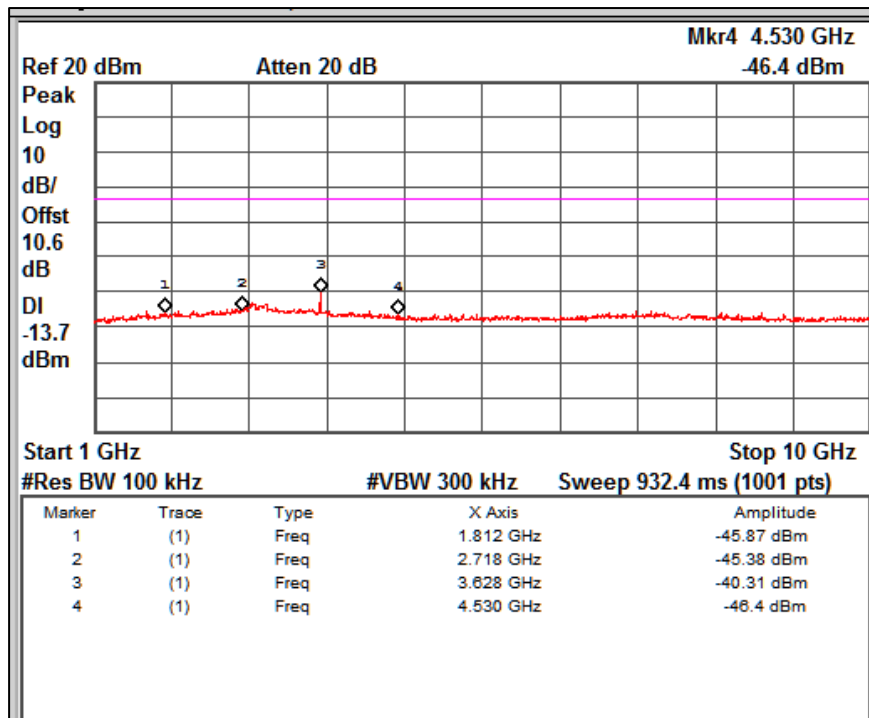


Channel Frequency: 906 MHz

Frequency Range 1 GHz to 10 GHz

Prüfbericht - Nr.:
Test Report No.:


IN25KPWW 001

Seite 26 von 44
Page 26 of 44

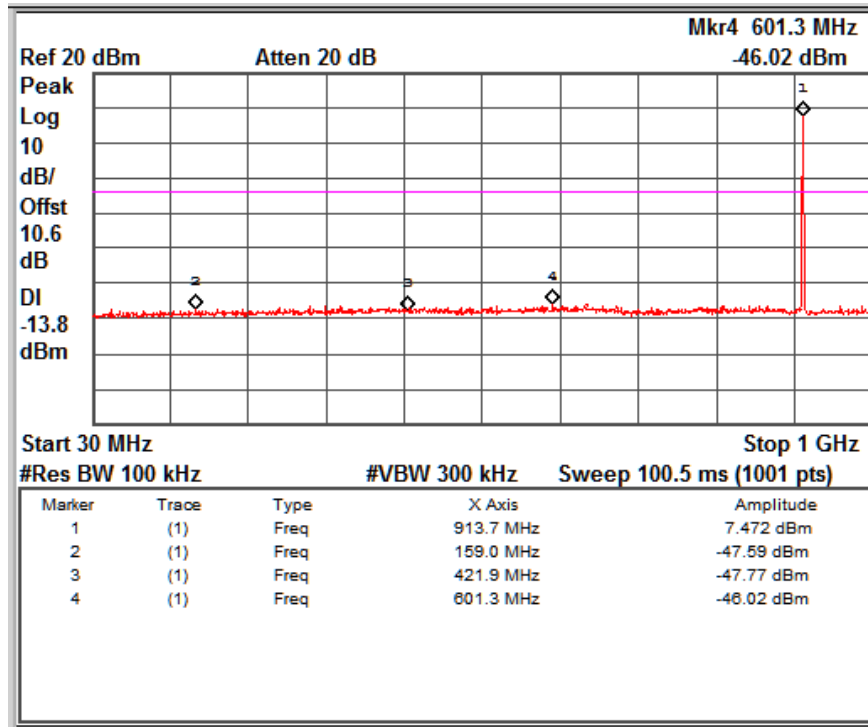

Channel Frequency: 914MHz

Frequency Range 30MHz – 1GHz

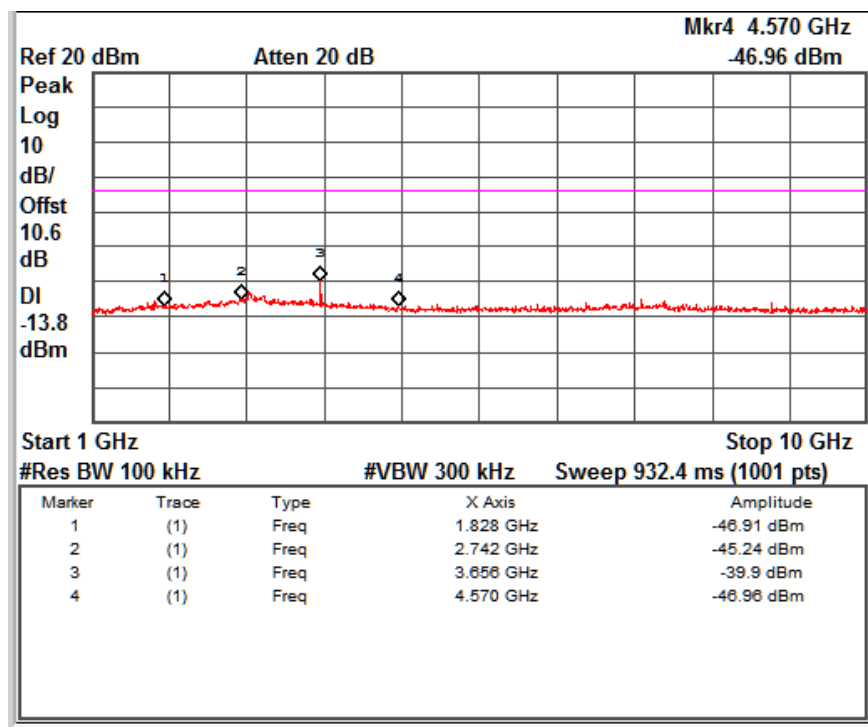


Channel Frequency: 914MHz

Frequency Range: 1GHz – 10GHz

Prüfbericht - Nr.:
Test Report No.:


IN25KPWW 001

Seite 27 von 44
Page 27 of 44

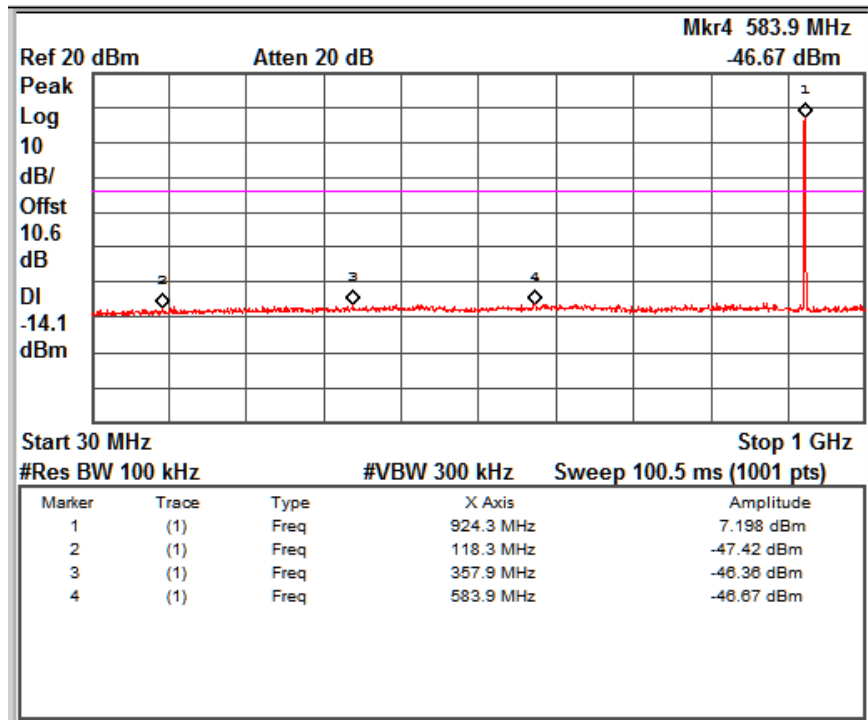

Channel Frequency: 924MHz

Frequency Range 30MHz – 1GHz

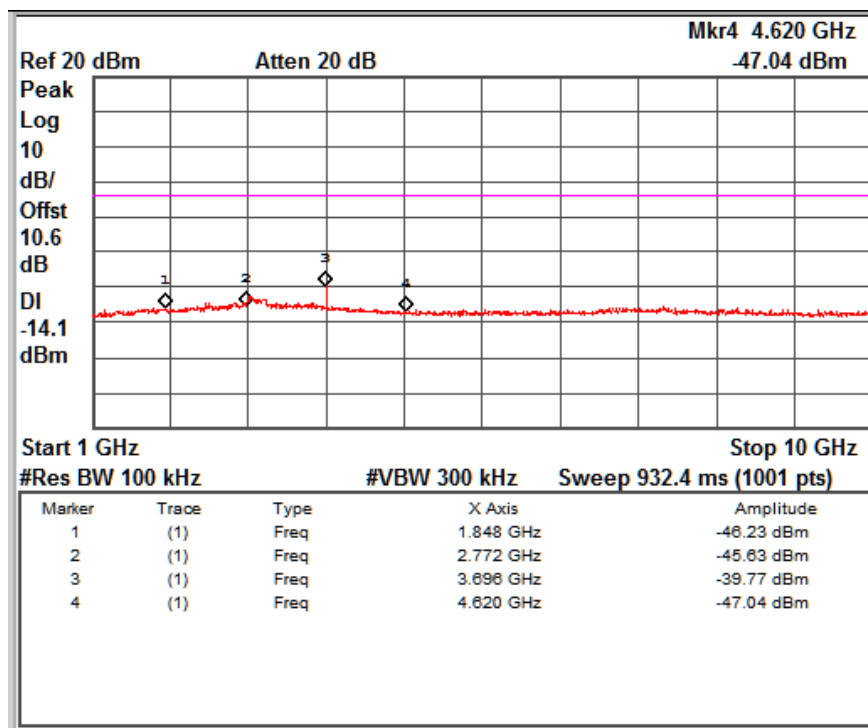

Channel Frequency: 924MHz

Frequency Range: 1GHz – 10GHz

7.5 Spurious Radiated Emissions & Restricted Bands of Operation

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (d) / (15.209 & 15.205)/ RSS-Gen Issue 5, Section 8.9 /8.10
Test Method	ANSI C63.10-2020
Measurement Location	Semi Anechoic Chamber 9kHz - 1 GHz Fully Anechoic Chamber 1 GHz - 26GHz
Measurement Bandwidth	100 kHz for frequency range < 1GHz 1 MHz for Frequency range >1GHz
Detector	Refer remarks below
Measuring Distance	3 m
Requirement	As per the limits mentioned in the below table
Test setup	Refer TEST METHODOLOGY

Table 6: Transmitter limits for Radiated emission

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Distance of Measurement (m)
0.009 – 0.490	2400/F(kHz)	48.50 – 13.80	300*
0.490 – 1.705	24000/F(kHz)	33.80 – 23.00	30*
1.705 -30	30	29.54	30*
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Remark: * The limit shows in the table above of frequency range 0.009 – 0.490, 0.490 – 1.705 MHz and 1.705-30MHz is at 300 meter, 30 meter and 30 meter range respectively, which corresponds to 128.51 – 93.80, 73.80 – 62.96 and 69.54 dBμV/m at 3m range by extrapolation calculation and the measurement of loop antenna.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.

Test Conditions:

Temperature (Norm) = +21.8°C

Voltage = 24 VDC through DC supply

Relative humidity: 55%

Prüfbericht - Nr.:
Test Report No.:

IN25KPWW 001

Seite 29 von 44
Page 29 of 44

Test results:

Note: All the losses are included during measurement and final values are mentioned in the test report. Refer TEST METHODOLOGY for more details


Test results for frequency range 9kHz – 30MHz

No emissions found in frequency range 9 kHz to 30 MHz, and measured levels are below 20dB from the limit line, hence not reported.

Table 7: Test results for frequency range 30MHz – 200MHz


Antenna Polarization	Measured Frequency (MHz)	Measured emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Vertical	54.84	25.50	40.00	-14.50
	71.97	25.20	40.00	-14.80
	98.13	18.10	43.50	-25.40
	123.81	20.70	43.50	-22.80
Horizontal	51.57	16.80	40.00	-23.20
	72.36	12.70	40.00	-27.30
	97.44	15.80	43.50	-27.70
	113.61	16.10	43.50	-27.40

Test Plots:

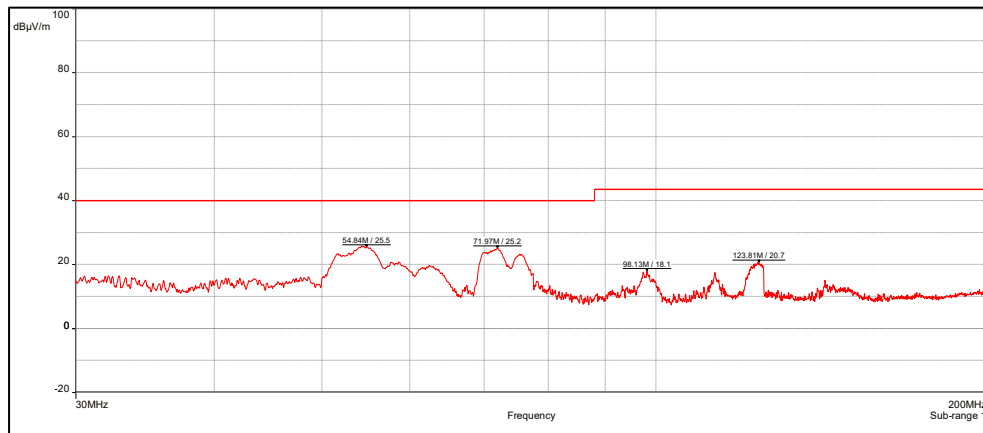

Channel Frequency 30MHz – 200MHz

Polarization Vertical

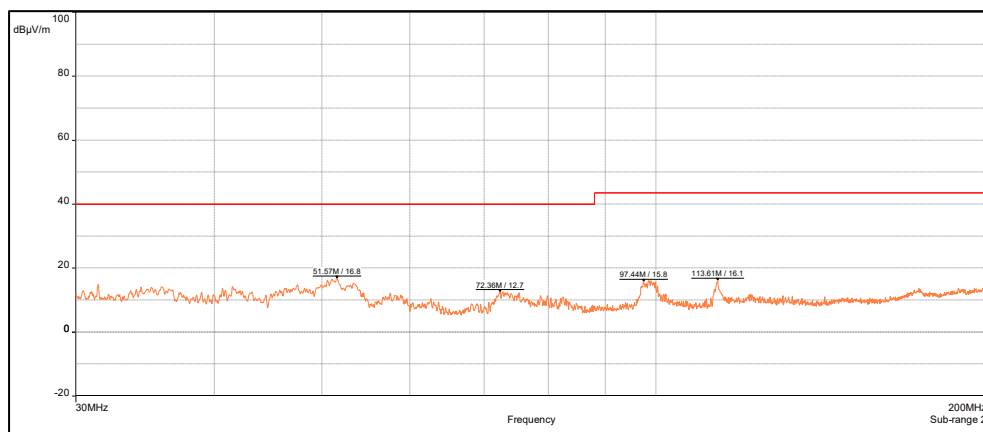


Channel Frequency 30MHz – 200MHz

Polarization Horizontal

Table 8: Test results for frequency range 200MHz – 1GHz


Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Measured emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)
906	Vertical	235.52	16.10	46.00	-29.90
		348.02	26.70	46.00	-19.30
		905.90	81.00*	-	-
	Horizontal	211.10	28.70	43.50	-14.80
		346.01	33.10	46.00	-12.90
		905.90	79.90*	-	-
914	Vertical	216.20	16.50	46.00	-29.50
		346.40	27.00	46.00	-19.00
		913.88	81.20*	-	-
	Horizontal	202.46	28.30	43.50	-15.20
		346.90	33.40	46.00	-12.60
		913.88	79.10*	-	-
924	Vertical	347.45	27.70	46.00	-18.30
		585.05	21.10	46.00	-24.90
		923.90	82.00*	-	-
	Horizontal	347.75	33.90	46.00	-12.10
		590.69	22.20	46.00	-23.80
		923.90	79.50*	-	-

Note: * Indicates the Nominal Frequency

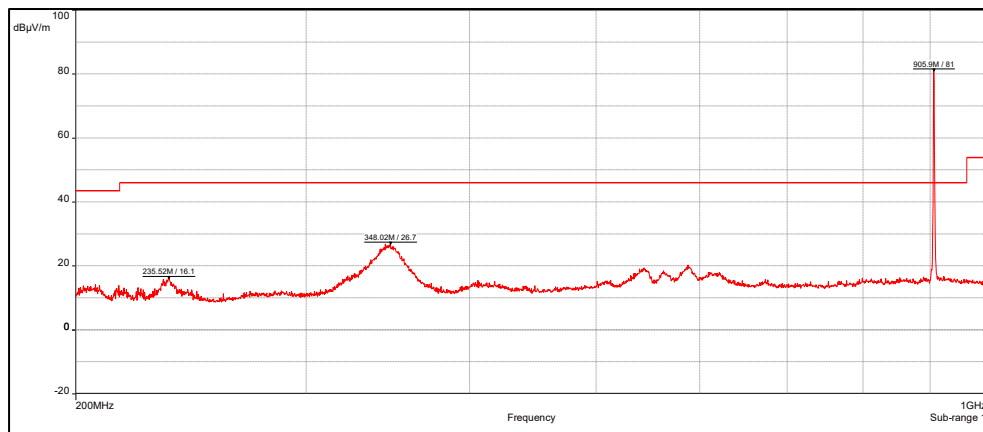

Channel Frequency 200MHz – 1GHz

Polarization Vertical

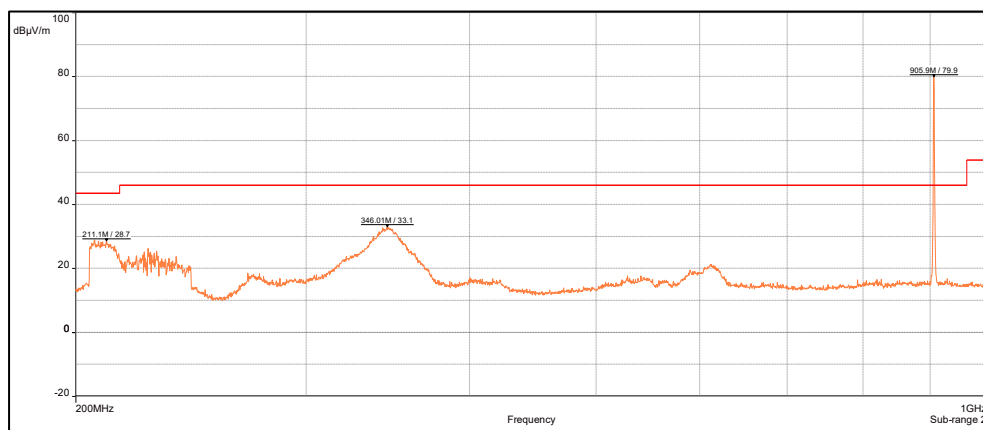

Channel Frequency 200MHz – 1GHz

Polarization Horizontal

Prüfbericht - Nr.:


Test Report No.:

IN25KPWW 001

Seite 31 von 44


Page 31 of 44

Channel Frequency: 914MHz

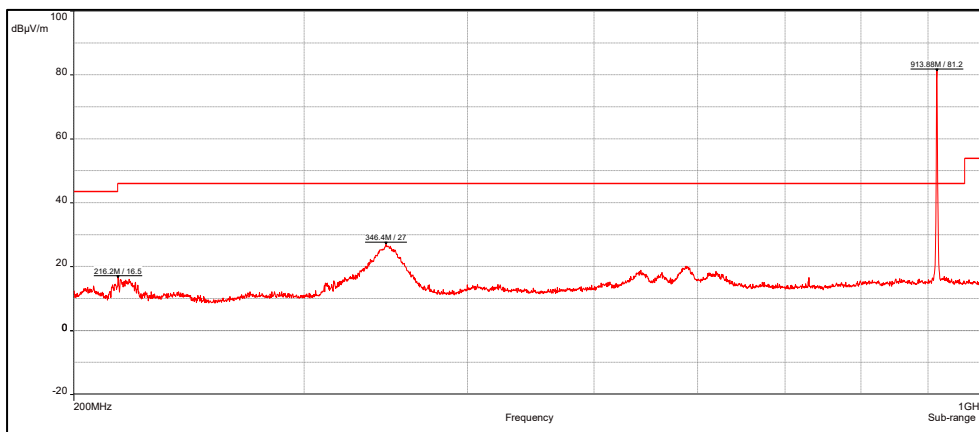

Channel Frequency 200MHz – 1GHz

Polarization Vertical

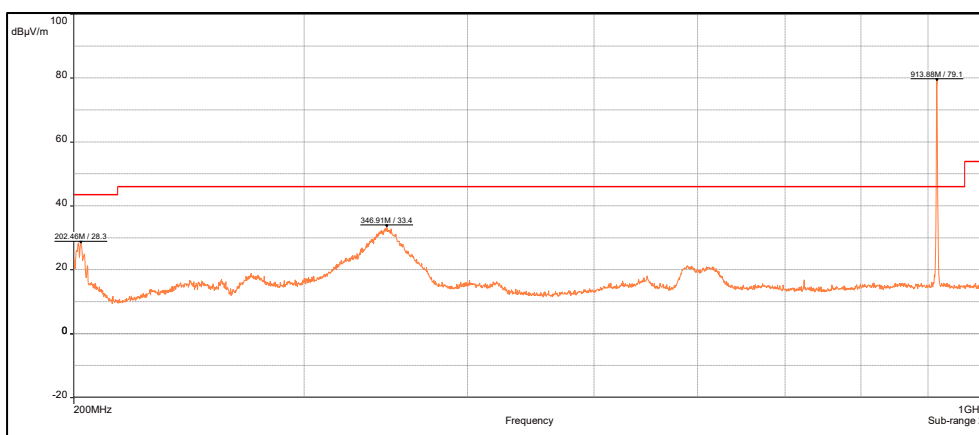

Channel Frequency 200MHz – 1GHz

Polarization Horizontal

Prüfbericht - Nr.:


Test Report No.:

IN25KPWW 001

Seite 32 von 44


Page 32 of 44

Channel Frequency: 924MHz

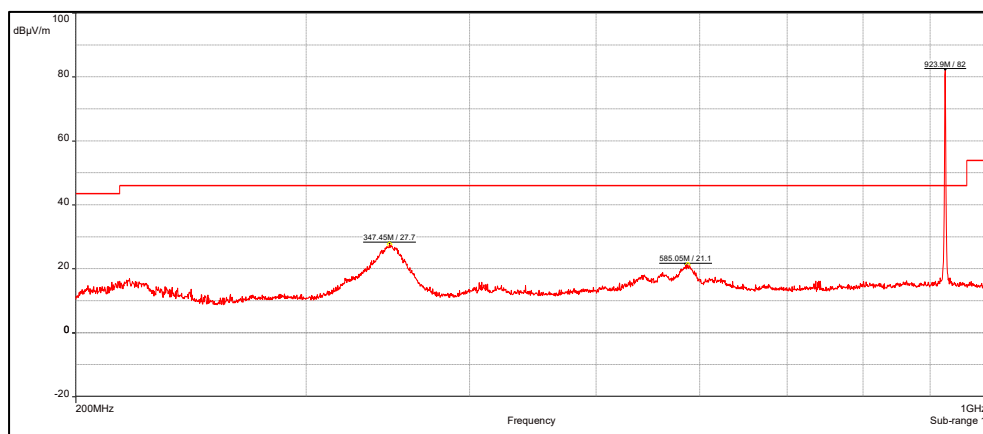

Channel Frequency 200MHz – 1GHz

Polarization Vertical

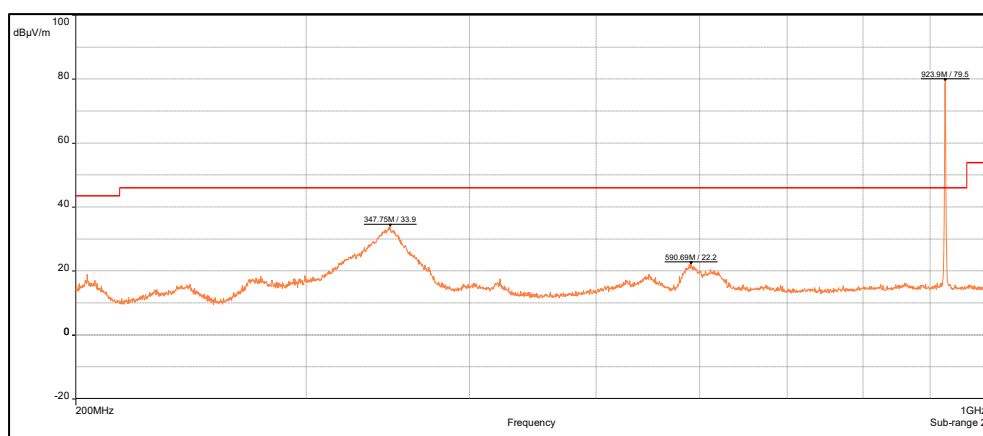

Channel Frequency 200MHz – 1GHz

Polarization Horizontal

Prüfbericht - Nr.:
Test Report No.:

IN25KPWW 001

Seite 33 von 44
Page 33 of 44

Table 9: Test results for the frequencies above 1GHz:

Channel Frequency: 906MHz

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
906	1812(Pk)	Vertical	46.24	74.00	-27.76
	1812(Av)		41.20	54.00	-12.80
	2718(Pk)		38.00	74.00	-36.00
	2718(Av)		25.75	54.00	-28.25
	3624(Pk)		51.59	74.00	-22.41
	3624(Av)		47.99	54.00	-6.01
	4530(Pk)		44.32	74.00	-29.68
	4530(Av)		33.71	54.00	-20.29
	5436(Pk)		44.00	74.00	-30.00
	5436(Av)		32.93	54.00	-21.07
	6342(Pk)		44.26	74.00	-29.74
	6342(Av)		31.66	54.00	-22.34
	7248(Pk)		49.51	74.00	-24.49
	7248(Av)		37.23	54.00	-16.77
	8154(Pk)		50.53	74.00	-23.47
	8154(Av)		37.44	54.00	-16.56
	1812(Pk)	Horizontal	43.72	74.00	-30.28
	1812(Av)		37.77	54.00	-16.23
	2718(Pk)		38.25	74.00	-35.75
	2718(Av)		27.29	54.00	-26.71
	3624(Pk)		53.66	74.00	-20.34
	3624(Av)		50.64	54.00	-3.36
	4530(Pk)		42.74	74.00	-31.26
	4530(Av)		31.57	54.00	-22.43
	5436(Pk)		43.25	74.00	-30.75
	5436(Av)		31.58	54.00	-22.42
	6342(Pk)		44.47	74.00	-29.53
	6342(Av)		31.79	54.00	-22.21
	7248(Pk)		48.45	74.00	-25.55
	7248(Av)		38.10	54.00	-15.90
	8154(Pk)		49.57	74.00	-24.43
	8154(Av)		37.32	54.00	-16.68

Pk: Peak Detector;
Av: Average Detect

Prüfbericht - Nr.:

Test Report No.:

IN25KPWW 001

Seite 34 von 44

Page 34 of 44

Channel Frequency: 916MHz

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
916	1828(Pk)	Vertical	45.57	74.00	-28.43
	1828(Av)		39.87	54.00	-14.13
	2742(Pk)		38.87	74.00	-35.13
	2742(Av)		27.18	54.00	-26.82
	3656(Pk)		52.20	74.00	-21.80
	3656(Av)		48.20	54.00	-5.80
	4570(Pk)		45.34	74.00	-28.66
	4570(Av)		36.28	54.00	-17.72
	5484(Pk)		45.41	74.00	-28.59
	5484(Av)		32.99	54.00	-21.01
	6398(Pk)		44.66	74.00	-29.34
	6398(Av)		32.45	54.00	-21.55
	7312(Pk)		49.00	74.00	-25.00
	7312(Av)		37.38	54.00	-16.62
	8226(Pk)		51.00	74.00	-23.00
	8226(Av)		37.93	54.00	-16.07
	1828(Pk)	Horizontal	46.37	74.00	-27.63
	1828(Av)		40.66	54.00	-13.34
	2742(Pk)		39.24	74.00	-34.76
	2742(Av)		26.97	54.00	-27.03
	3656(Pk)		52.04	74.00	-21.96
	3656(Av)		48.01	54.00	-5.99
	4570(Pk)		43.59	74.00	-30.41
	4570(Av)		31.89	54.00	-22.11
	5484(Pk)		44.32	74.00	-29.68
	5484(Av)		31.87	54.00	-22.13
	6398(Pk)		44.79	74.00	-29.21
	6398(Av)		32.29	54.00	-21.71
	7312(Pk)		49.69	74.00	-24.31
	7312(Av)		38.89	54.00	-15.11
	8226(Pk)		50.21	74.00	-23.79
	8226(Av)		37.87	54.00	-16.13

Pk: Peak Detector;

Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN25KPWW 001

Seite 35 von 44

Page 35 of 44

Channel Frequency: 924MHz

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
924	1848(Pk)	Vertical	45.41	74.00	-28.59
	1848(Av)		39.11	54.00	-14.89
	2772(Pk)		37.78	74.00	-36.22
	2772(Av)		26.41	54.00	-27.59
	3696(Pk)		52.30	74.00	-21.70
	3696(Av)		47.38	54.00	-6.62
	4620(Pk)		46.81	74.00	-27.19
	4620(Av)		39.41	54.00	-14.59
	5544(Pk)		46.28	74.00	-27.72
	5544(Av)		35.44	54.00	-18.56
	6468(Pk)		45.11	74.00	-28.89
	6468(Av)		33.09	54.00	-20.91
	7392(Pk)		48.66	74.00	-25.34
	7392(Av)		36.92	54.00	-17.08
	8316(Pk)		49.48	74.00	-24.52
	8316(Av)		37.10	54.00	-16.90
	1848(Pk)	Horizontal	45.26	74.00	-28.74
	1848(Av)		39.56	54.00	-14.44
	2772(Pk)		39.21	74.00	-34.79
	2772(Av)		26.77	54.00	-27.23
	3696(Pk)		51.33	74.00	-22.67
	3696(Av)		46.21	54.00	-7.79
	4620(Pk)		44.36	74.00	-29.64
	4620(Av)		34.78	54.00	-19.22
	5544(Pk)		44.75	74.00	-29.25
	5544(Av)		33.09	54.00	-20.91
	6468(Pk)		45.11	74.00	-28.89
	6468(Av)		33.61	54.00	-20.39
	7392(Pk)		49.28	74.00	-24.72
	7392(Av)		38.67	54.00	-15.33
	8316(Pk)		48.72	74.00	-25.28
	8316(Av)		36.80	54.00	-17.20

Pk: Peak Detector

Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:


IN25KPWW 001

Seite 36 von 44

Page 36 of 44


Test Plots:

Channel Frequency 906MHz

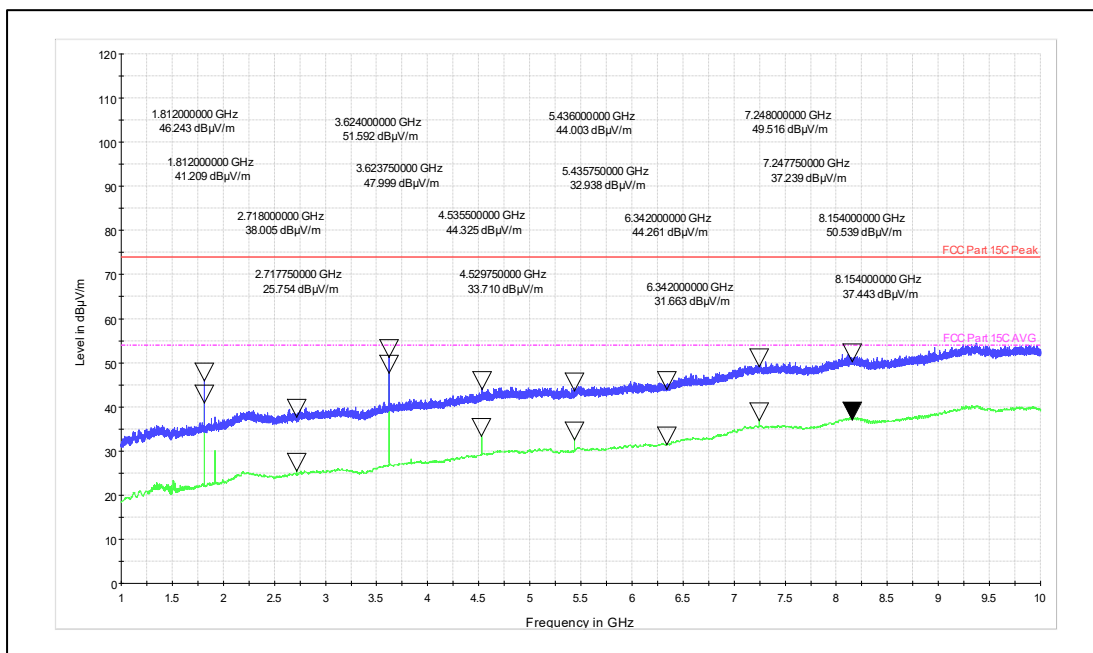

Channel Frequency: 1GHz – 10GHz


Polarization: Vertical

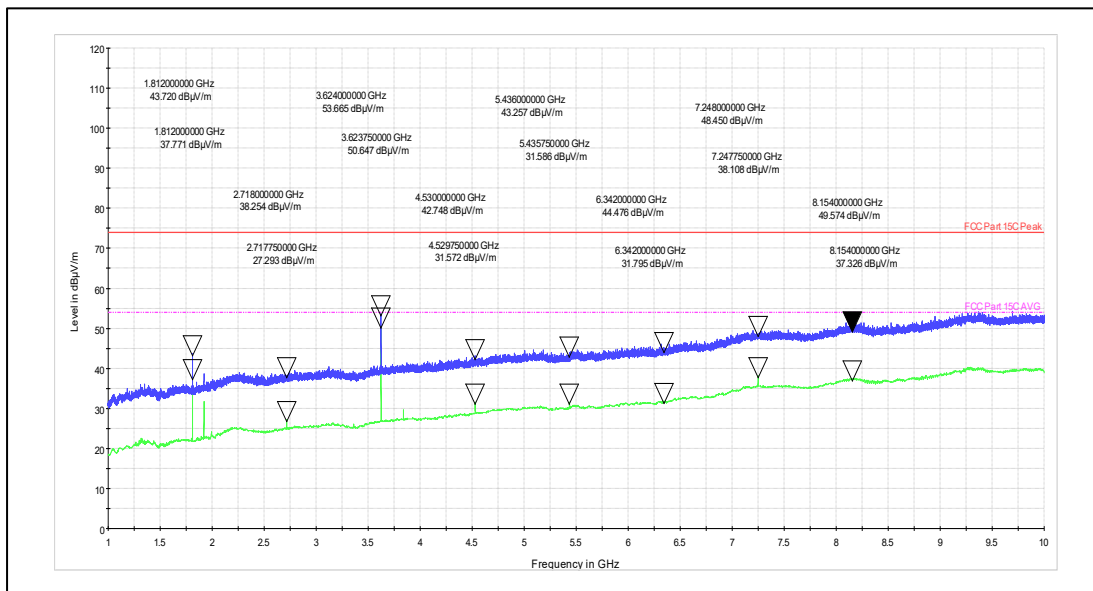

Channel Frequency: 1GHz -10GHz


Polarization: Horizontal

Channel Frequency 916MHz

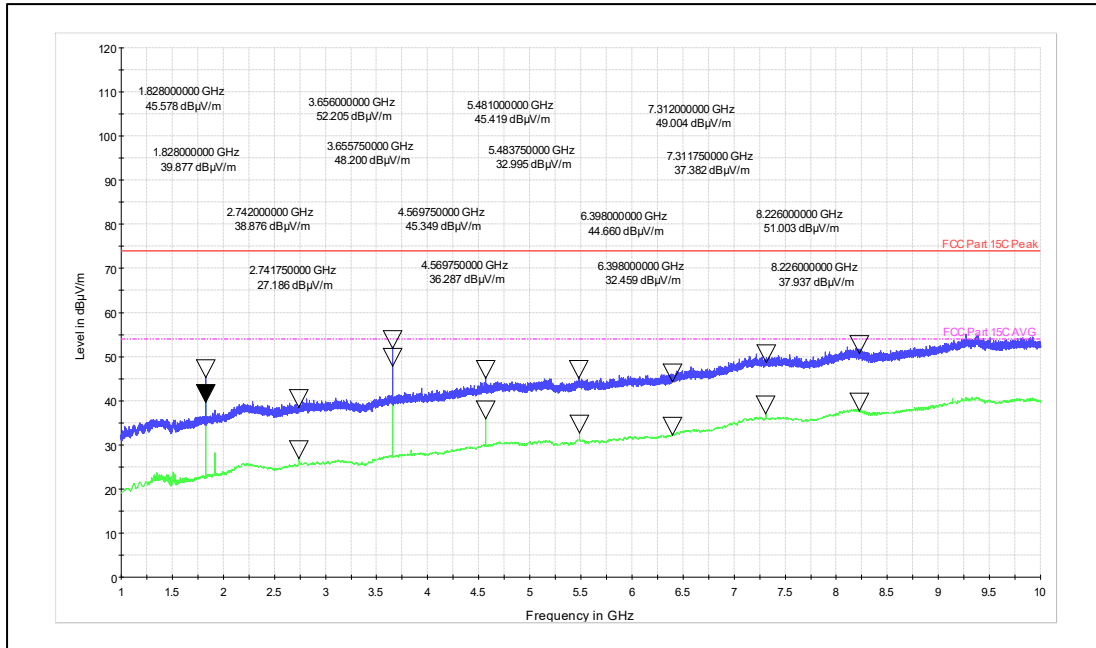

Channel Frequency: 1GHz – 10GHz


Polarization: Vertical

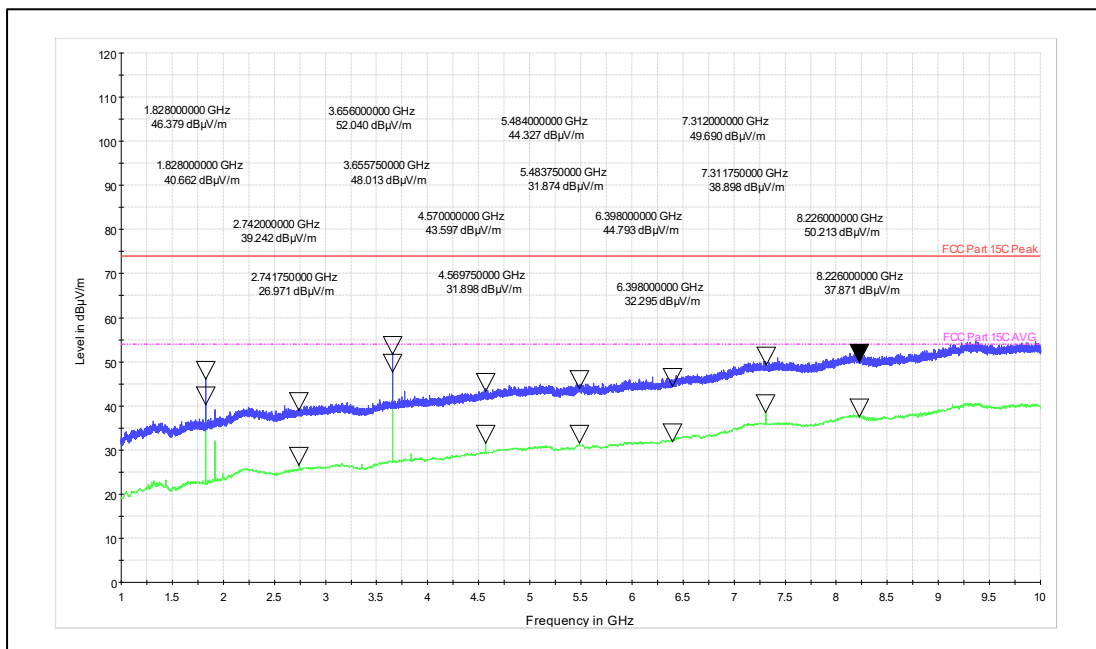

Channel Frequency: 1GHz -10GHz


Polarization: Horizontal

Channel Frequency 924MHz

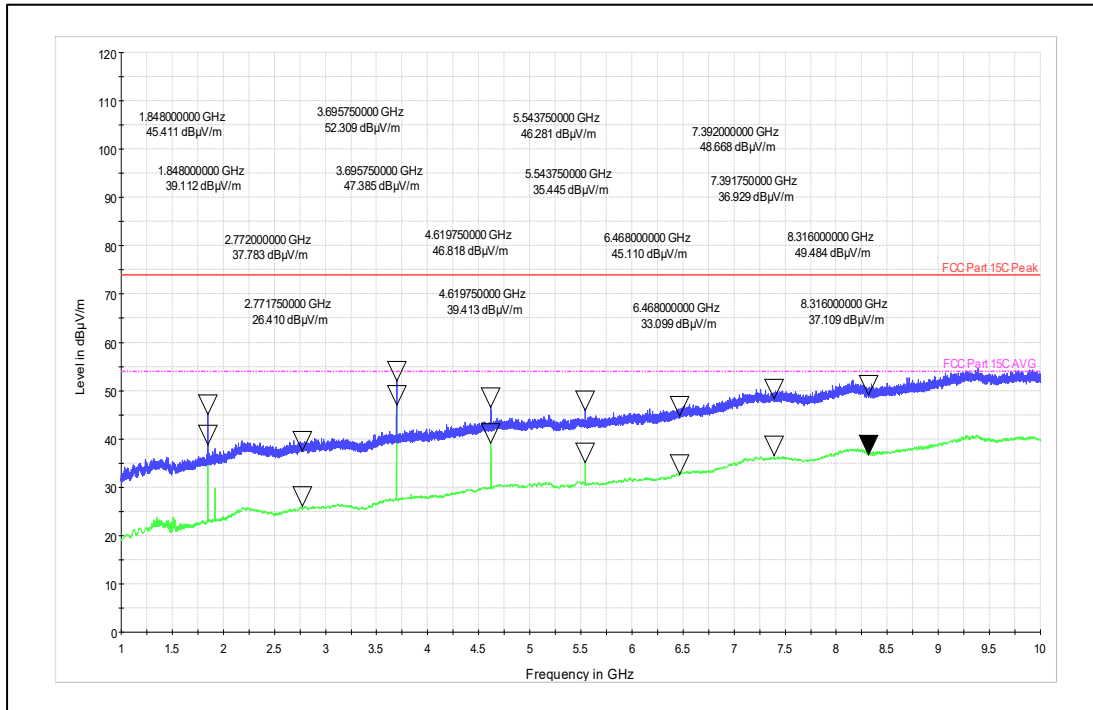

Channel Frequency: 1GHz – 10GHz

Polarization: Vertical

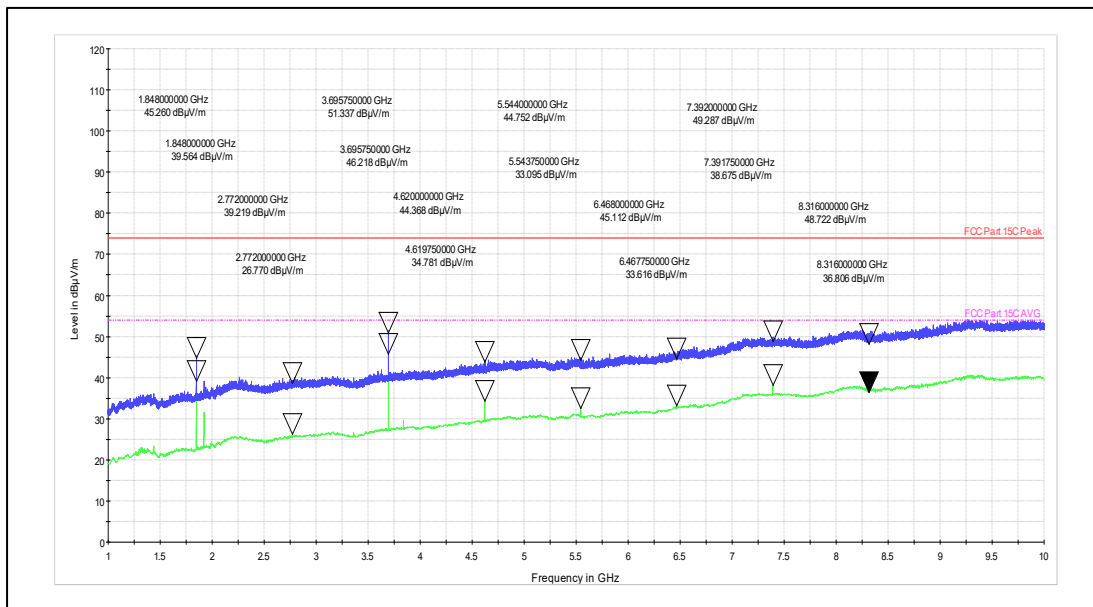


Channel Frequency: 1GHz -10GHz

Polarization: Horizontal

7.6 Simultaneous Operation for BLE and LoRa


Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
906	1812(Pk)	Vertical	30.95	74.00	-43.05
	1812(Av)		18.59	54.00	-35.41
	2718(Pk)		36.53	74.00	-37.47
	2718(Av)		24.65	54.00	-29.35
	3624(Pk)		43.29	74.00	-30.71
	3624(Av)		37.11	54.00	-16.89
	4530(Pk)		45.78	74.00	-28.22
	4530(Av)		35.25	54.00	-18.75
	1812(Pk)	Horizontal	30.96	74.00	-43.04
	1812(Av)		18.31	54.00	-35.69
	2718(Pk)		37.36	74.00	-36.64
	2718(Av)		24.88	54.00	-29.12
	3624(Pk)		44.73	74.00	-29.27
	3624(Av)		38.39	54.00	-15.61
	4530(Pk)		41.90	74.00	-32.10
	4530(Av)		30.70	54.00	-23.30
2402	4804(Pk)	Vertical	49.96	74.00	-24.04
	4804(Av)		40.32	54.00	-13.68
	7206(Pk)		54.32	74.00	-19.68
	7206(Av)		42.94	54.00	-11.06
	4804(Pk)	Horizontal	49.03	74.00	-24.97
	4804(Av)		39.20	54.00	-14.80
	7206(Pk)		50.59	74.00	-23.41
	7206(Av)		39.31	54.00	-14.69

Test Plots:

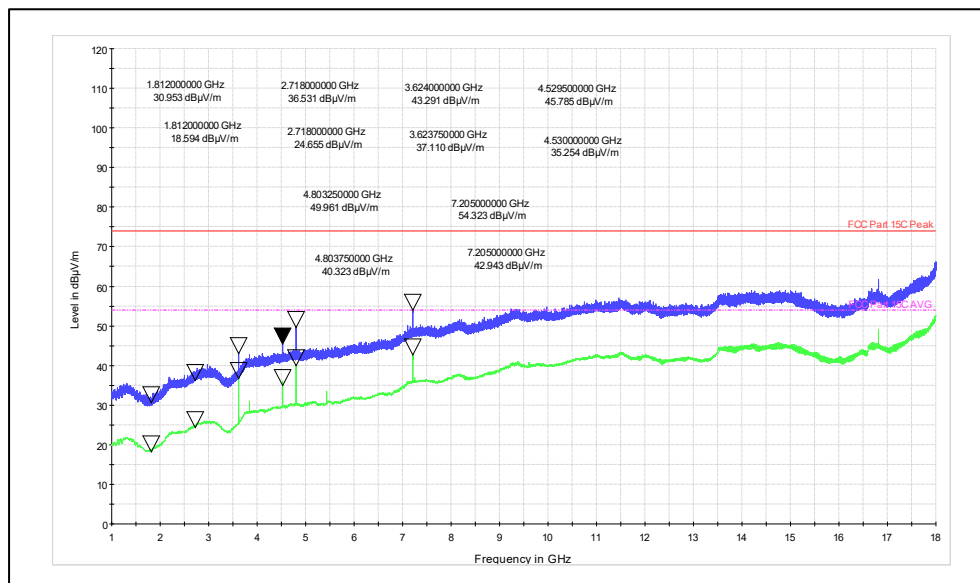

Polarization: Vertical

Frequency range: 1GHz to 18GHz

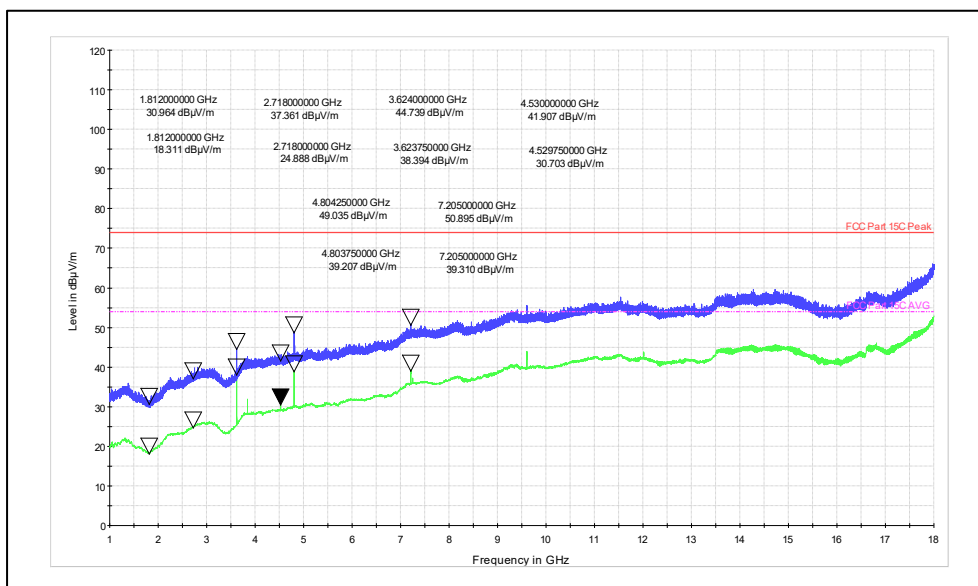

Polarization: Horizontal

Frequency range: 1GHz to 18GHz

Prüfbericht - Nr.:
Test Report No.:

IN25KPWW 001

Seite 41 von 44
Page 41 of 44

8 AC Powerlines Conducted Emission

Result

Pass

Test Specification : FCC Part 15 Section 15.207/RSS Gen Issue 5 Section 8.8
Test Method : ANSI C63.10-2020
ANSI C63.10-2020/Cor1-2023
Testing Location : Screened room
Measurement Bandwidth : 9kHz
Frequency Range : 150kHz – 30MHz
Supply Voltage : 110VAC,60Hz
Test Method : Refer TEST METHODOLOGY

Table 10: Limits for Conducted power line emission

Frequency of emission (MHz)	QP Limit (dBμV)	AV Limit (dBμV)
0.15 – 0.5	66 – 56*	56 – 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency

Test Conditions:

Temperature (Norm) = +22.3°C Voltage = 110VAC through mains Relative humidity: 57%

Prüfbericht - Nr.:

Test Report No.:


IN25KPWW 001

Seite 42 von 44

Page 42 of 44

Test Plot:

Trace	Frequency	Level (dBµV)	Phase	Detector	Delta Limit/dB
1	1.314000000 MHz	40.40		Quasi Peak	-5.60
1	874.000000000 kHz	37.00		Quasi Peak	-9.00
1	1.246000000 MHz	35.46		Quasi Peak	-10.54
1	1.754000000 MHz	35.44		Quasi Peak	-10.56
1	1.386000000 MHz	31.56		Quasi Peak	-14.44
1	946.000000000 kHz	30.31		Quasi Peak	-15.69
2	1.314000000 MHz	23.37		Average	-32.63
2	878.000000000 kHz	19.29		Average	-36.71
2	298.000000000 kHz	23.47		Average	-36.83
2	1.246000000 MHz	16.17		Average	-39.83
2	1.382000000 MHz	15.90		Average	-40.10
2	946.000000000 kHz	10.19		Average	-45.81

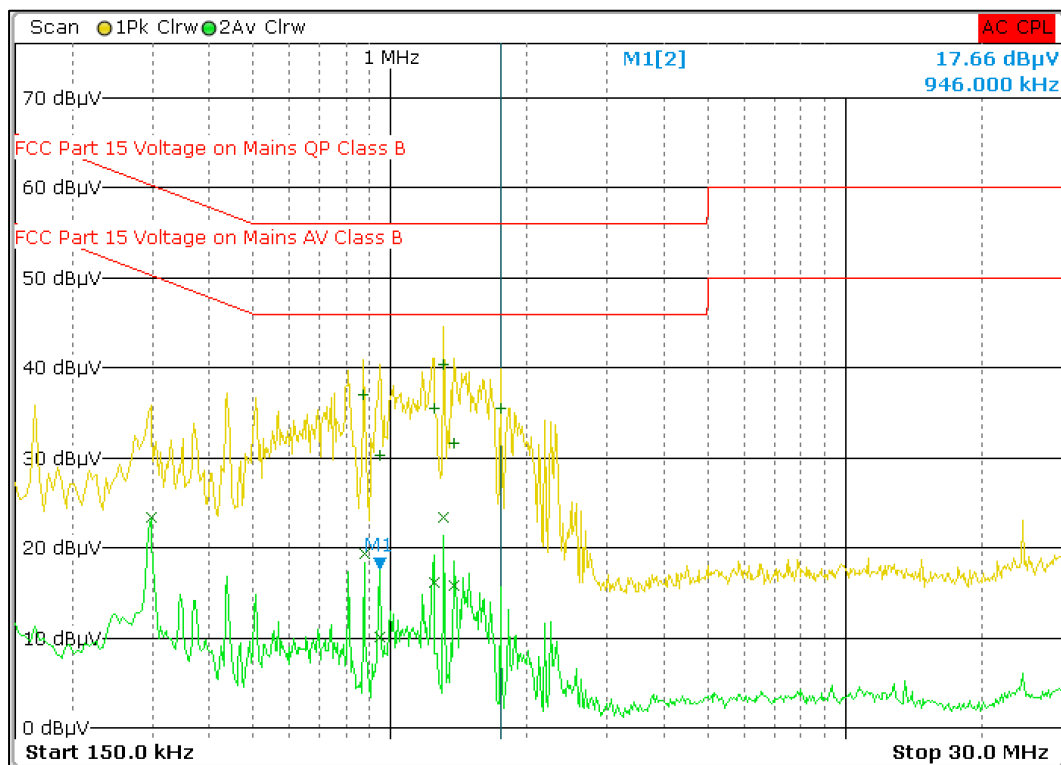


Prüfbericht - Nr.:
Test Report No.:

IN25KPWW 001

Seite 43 von 44
Page 43 of 44

Trace	Frequency	Level (dBµV)	Phase	Detector	Delta Limit/dB
1	1.314000000 MHz	39.39		Quasi Peak	-6.61
1	1.250000000 MHz	37.09		Quasi Peak	-8.91
1	1.438000000 MHz	36.09		Quasi Peak	-9.91
1	878.000000000 kHz	35.12		Quasi Peak	-10.88
1	1.750000000 MHz	34.84		Quasi Peak	-11.16
1	810.000000000 kHz	32.43		Quasi Peak	-13.57
2	1.314000000 MHz	21.79		Average	-34.21
2	1.378000000 MHz	18.29		Average	-37.71
2	1.250000000 MHz	17.69		Average	-38.31
2	1.754000000 MHz	17.61		Average	-38.39
2	874.000000000 kHz	16.98		Average	-39.02
2	298.000000000 kHz	21.27		Average	-39.03

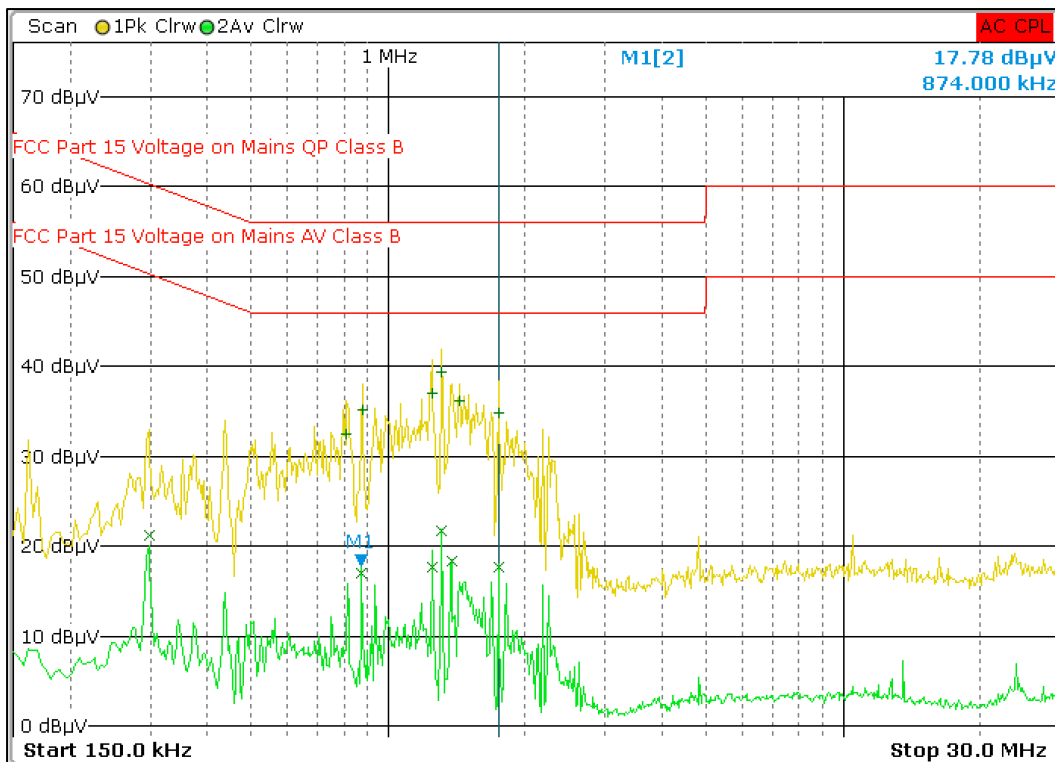

9 LIST OF TABLES

Table 1: List of test and measurement instruments	7
Table 2: Instrument application Software versions	7
Table 3: Ratings and System Details as declared by Client*	8
Table 4: Measurement Uncertainty	9
Table 5: List of Sub-GHz Center frequencies	10
Table 6: Transmitter limits for Radiated emission	28
Table 7: Test results for frequency range 30MHz – 200MHz	29
Table 8: Test results for frequency range 200MHz – 1GHz	30
Table 9: Test results for the frequencies above 1GHz:	33
Table 10: Limits for Conducted power line emission	41

10 List of Figures

Figure 1: Frequency Range 9 kHz- 30 MHz	13
Figure 2: Frequency Range 30 MHz – 200 MHz	13
Figure 3: Frequency Range 200 MHz - 1GHz	14
Figure 4: Frequency Range above 1 GHz	14

End of test report