


REVISIONS


REV	DESCRIPTION	DATE	APPROVE
A	NEW RELEASE	09/04/20	SAM SUN

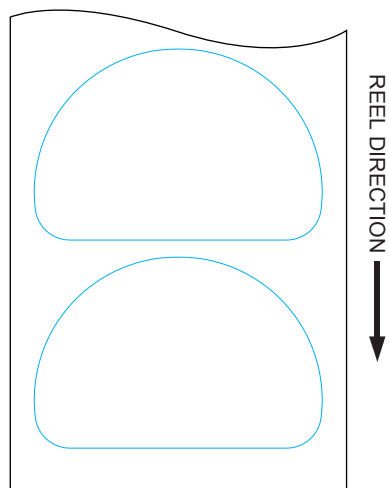

NOTES:

- MATERIAL: WHITE PET, T=0.075
ADHESIVE: 網紋背膠
FINISH: 上霧PP, T=0.025
- COLOR:
A. 原材白 B. 請見圖面
- 捲狀出貨, 不加虛刀
- 離型紙左右間距各 3 ± 0.5 MM, 上下間距各 3.0 ± 0.3 MM
- 被貼物材質: PC
- UL APPROVED, PGJ12, UL INDOOR
須搭配碳帶 XX THERMAL TRANSFER RIBBONS
- TEMPERATURE RESISTANT= 80°C.
- TEST REQUIREMENTS

	TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	附著力測試	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5 % is affected.

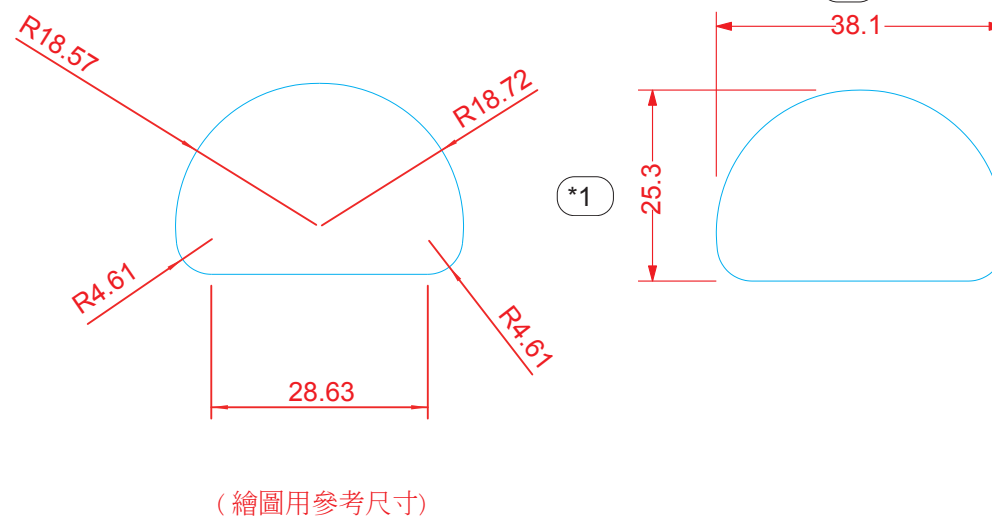


(繪圖用參考尺寸)

■ DIELINE
■ ON LINE PRINT (HARD COPY)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE:
INTEGRAL DIMENSIONS ± 0.2
1 PLACE DECIMAL ± 0.2
ANGULAR DIMENSIONS $\pm 2^\circ$
HOLES UNDER $\varnothing 5.00$ ± 0.2

THIRD ANGLE PROJECTION



WNC
Wistron NeWeb Corp.


啟碁科技股份有限公司

20 Park Avenue II, Hsinchu Science Park,
Hsinchu 308, Taiwan, R.O.C.
Tel: 886-3-6667799 Fax: 886-3-5788726



DWG TITLE

LABEL, PR, LVX5

DRAWN	AMANDA LAI	09/04/20	SIZE	DWG NO.	REV
ENGR	AMANDA LAI	09/04/20	A4	4L.LVX50.001	A
APVD	SAM SUN	09/04/20	SCALE	1/1	SHEET
					1 OF 1

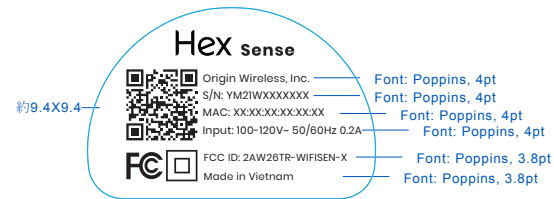

置入圖檔時，尺寸比例參考:

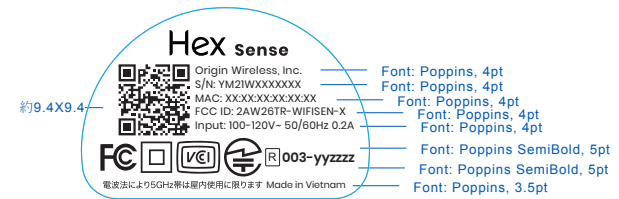

置入圖檔時，尺寸比例參考:

