

FCC Appendix RF Test Data for 5.3GWIFI

Product Name: Smart Diagnostic System

Test Model: P902

Environmental Conditions


Temperature:	23.8 ° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Zoey Cao
Supervised by:	Eric Wang

1. -26dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5260	Ant0	27.068	---	Pass
NVNT	a	5300	Ant0	26.032	---	Pass
NVNT	a	5320	Ant0	26.063	---	Pass
NVNT	n20	5260	Ant0	29.083	---	Pass
NVNT	n20	5300	Ant0	27.49	---	Pass
NVNT	n20	5320	Ant0	28.007	---	Pass
NVNT	n40	5270	Ant0	47.172	---	Pass
NVNT	n40	5310	Ant0	43.557	---	Pass
NVNT	ac20	5260	Ant0	27.189	---	Pass
NVNT	ac20	5300	Ant0	29.07	---	Pass
NVNT	ac20	5320	Ant0	27.736	---	Pass
NVNT	ac40	5270	Ant0	56.191	---	Pass
NVNT	ac40	5310	Ant0	41.89	---	Pass
NVNT	ac80	5290	Ant0	86.504	---	Pass

Test Graphs


-26dB Bandwidth NVNT a 5260MHz Ant0

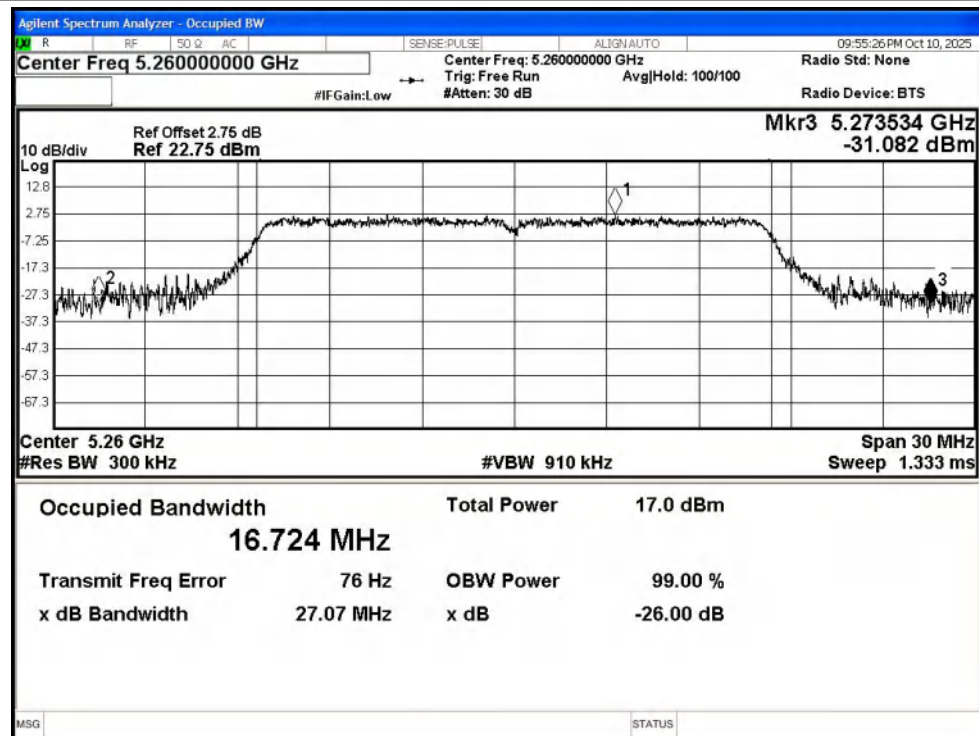


-26dB Bandwidth NVNT a 5300MHz Ant0

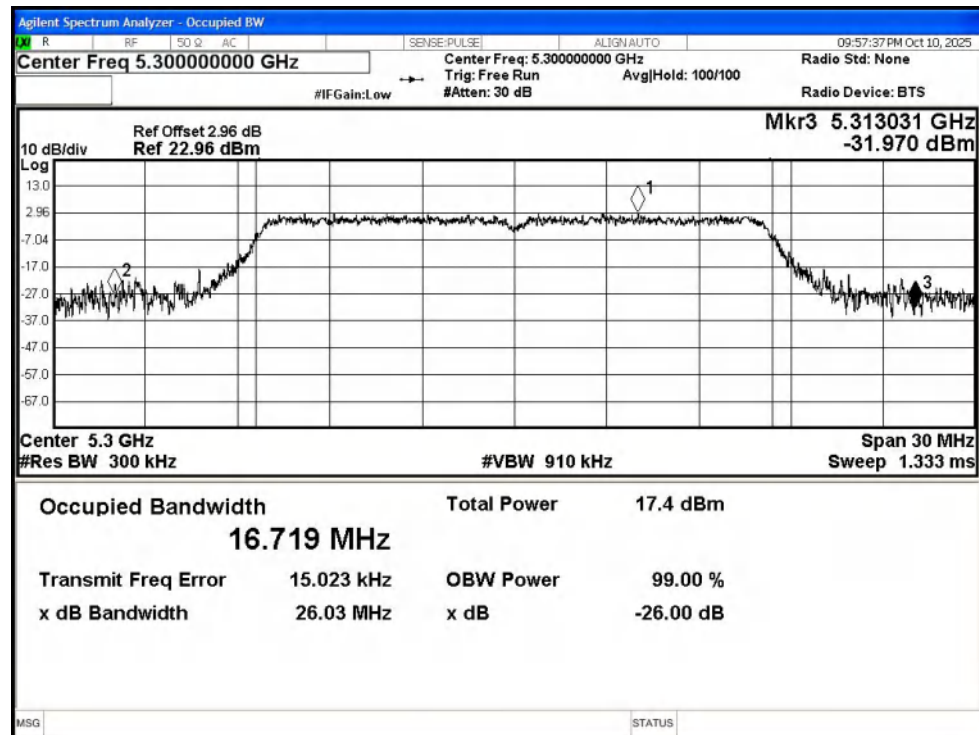


-26dB Bandwidth NVNT a 5320MHz Ant0

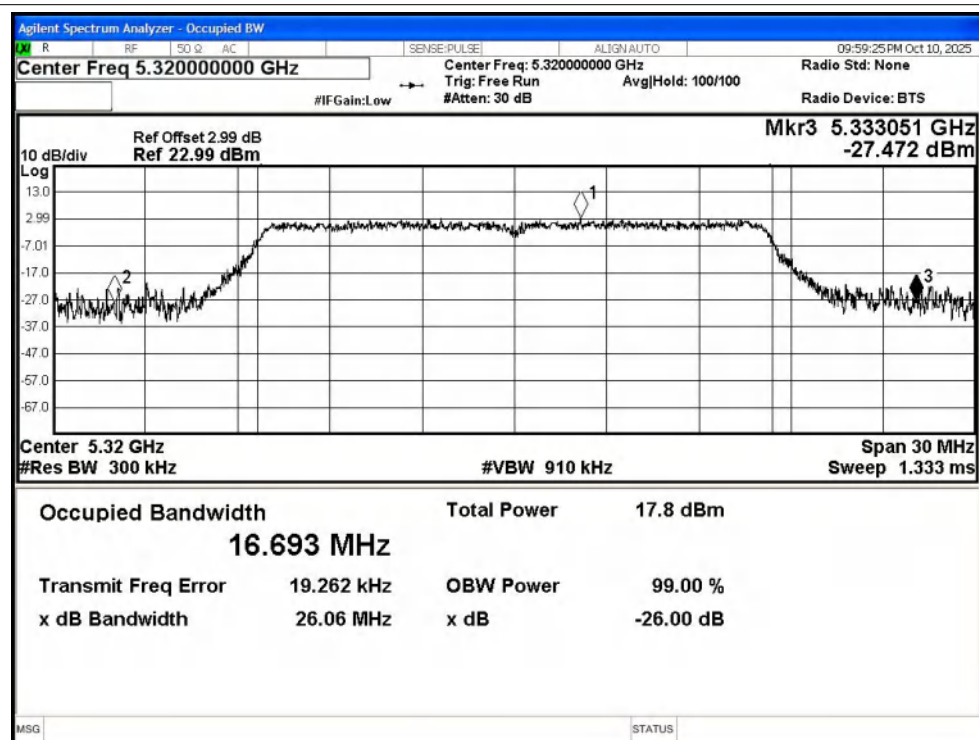


-26dB Bandwidth NVNT n20 5260MHz Ant0

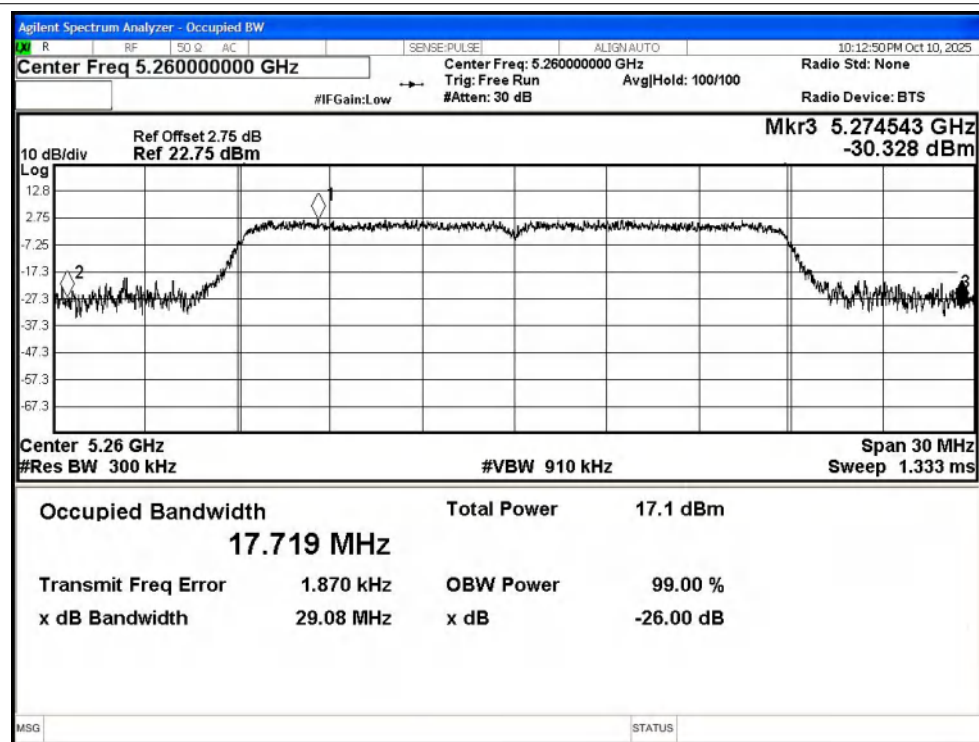


-26dB Bandwidth NVNT n20 5300MHz Ant0

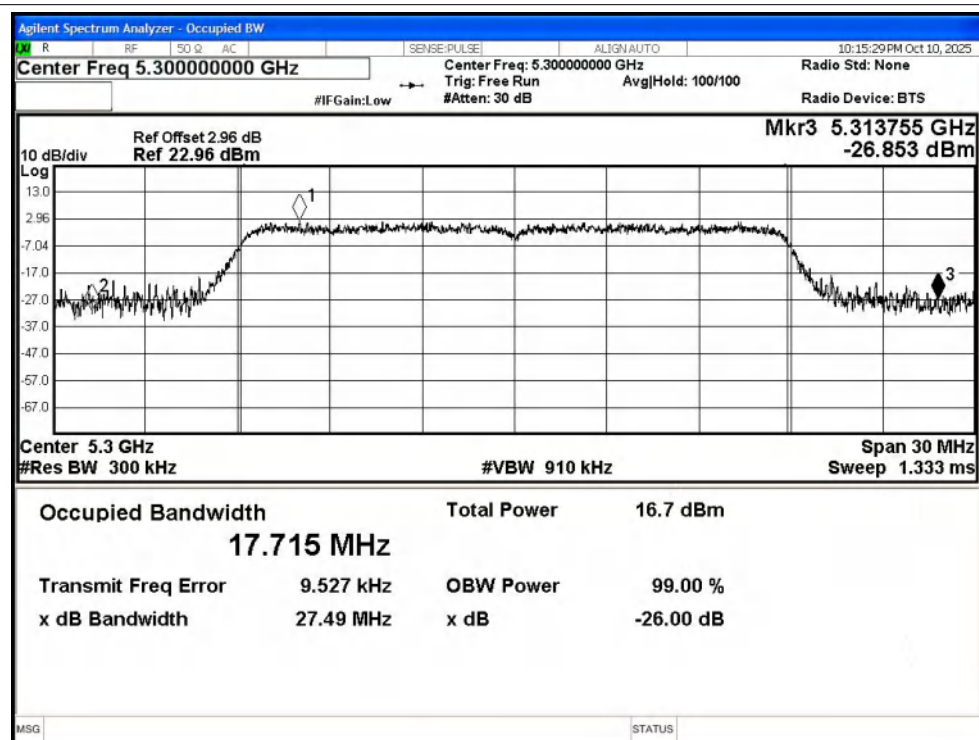


-26dB Bandwidth NVNT n20 5320MHz Ant0

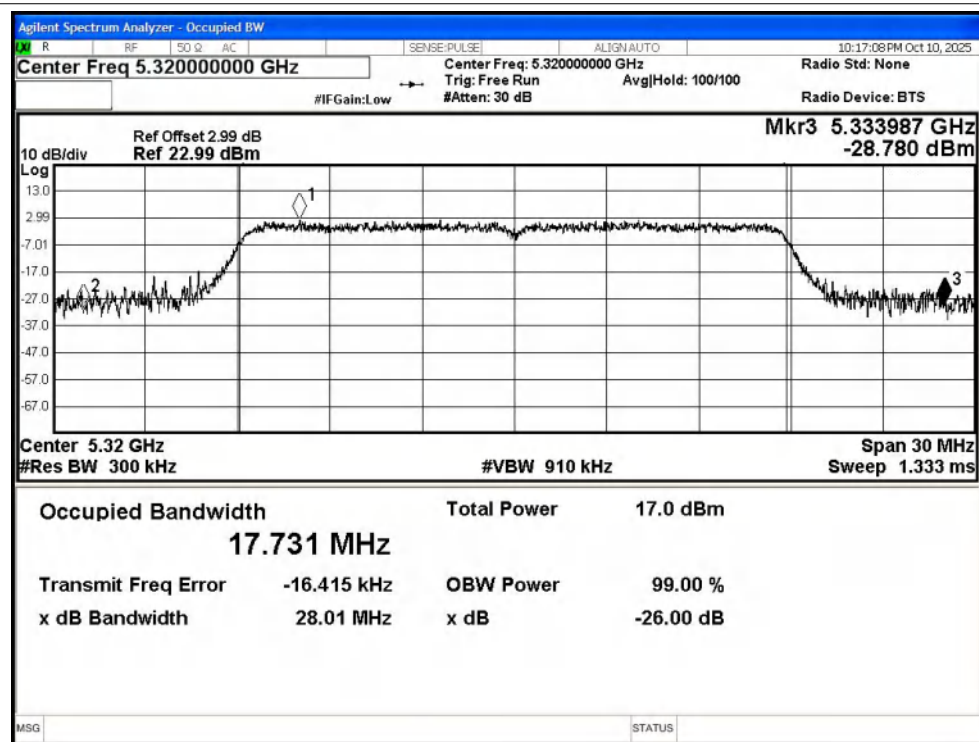


-26dB Bandwidth NVNT n40 5270MHz Ant0

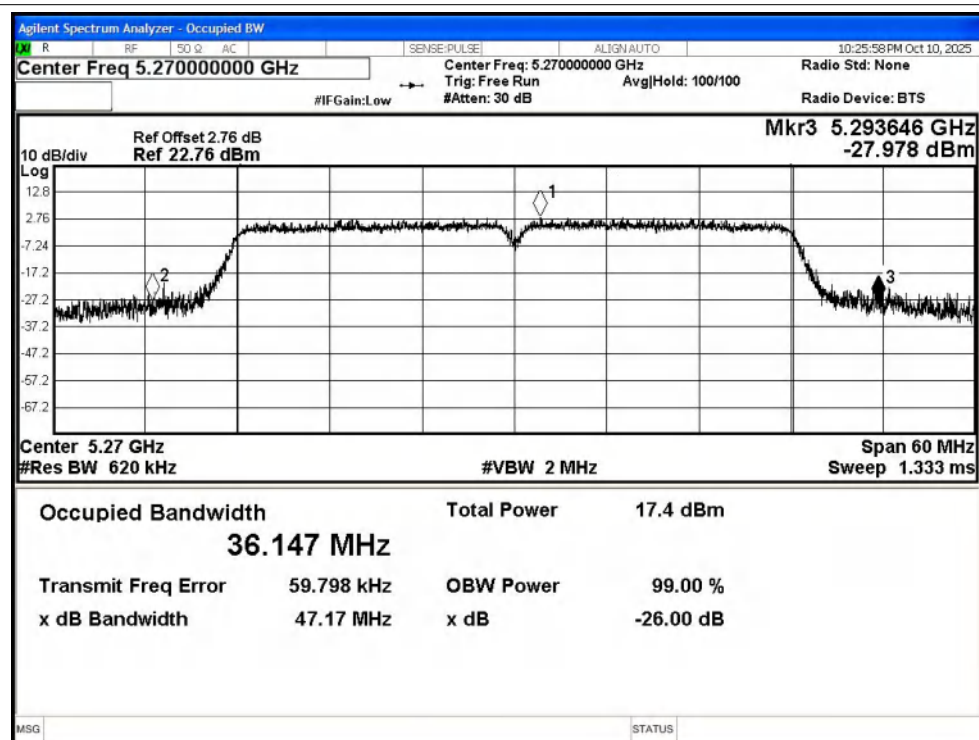


-26dB Bandwidth NVNT n40 5310MHz Ant0

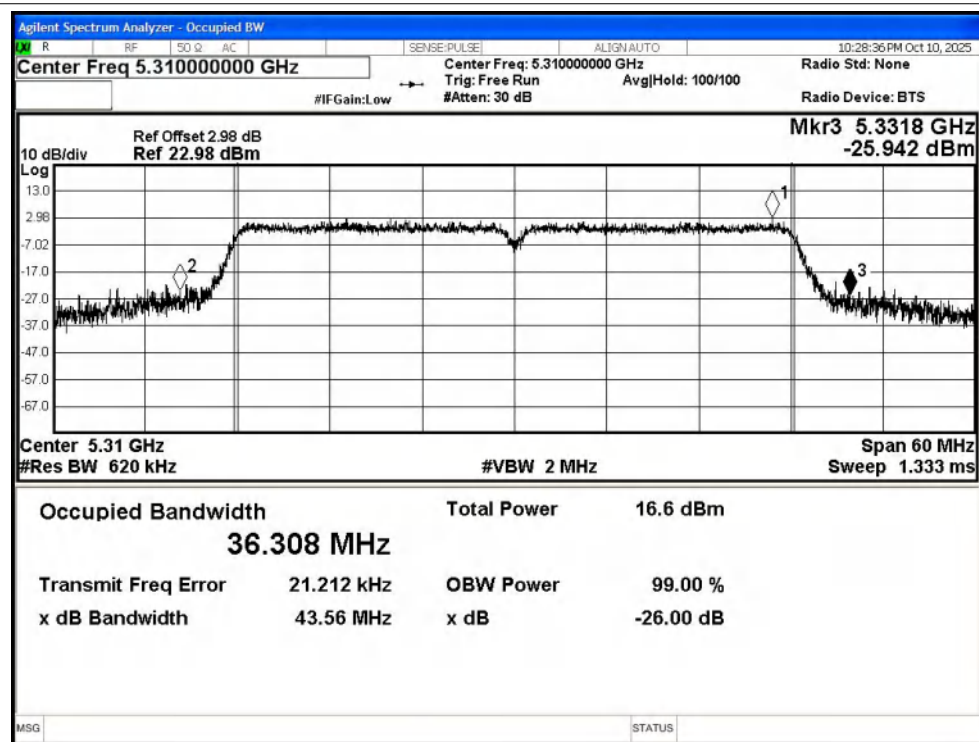


-26dB Bandwidth NVNT ac20 5260MHz Ant0

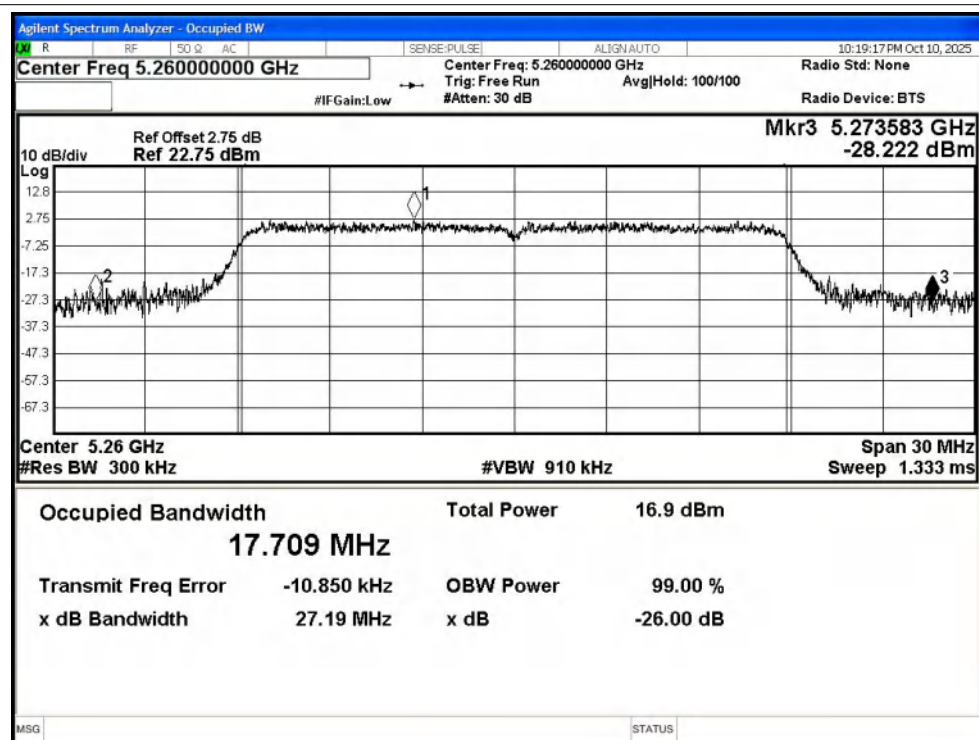


-26dB Bandwidth NVNT ac20 5300MHz Ant0

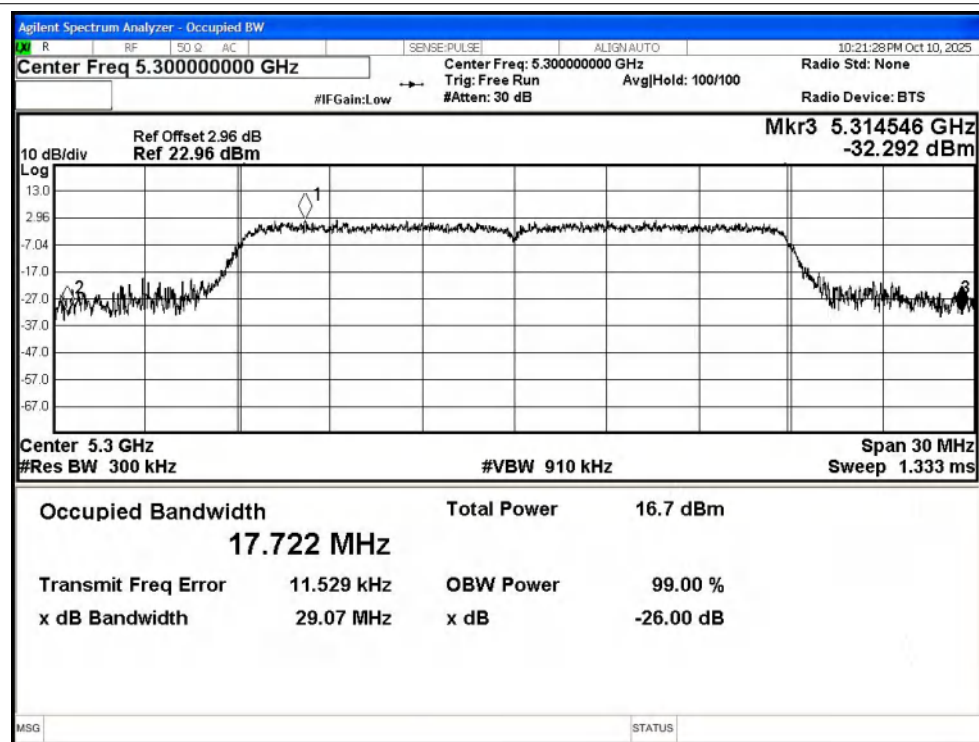


-26dB Bandwidth NVNT ac20 5320MHz Ant0

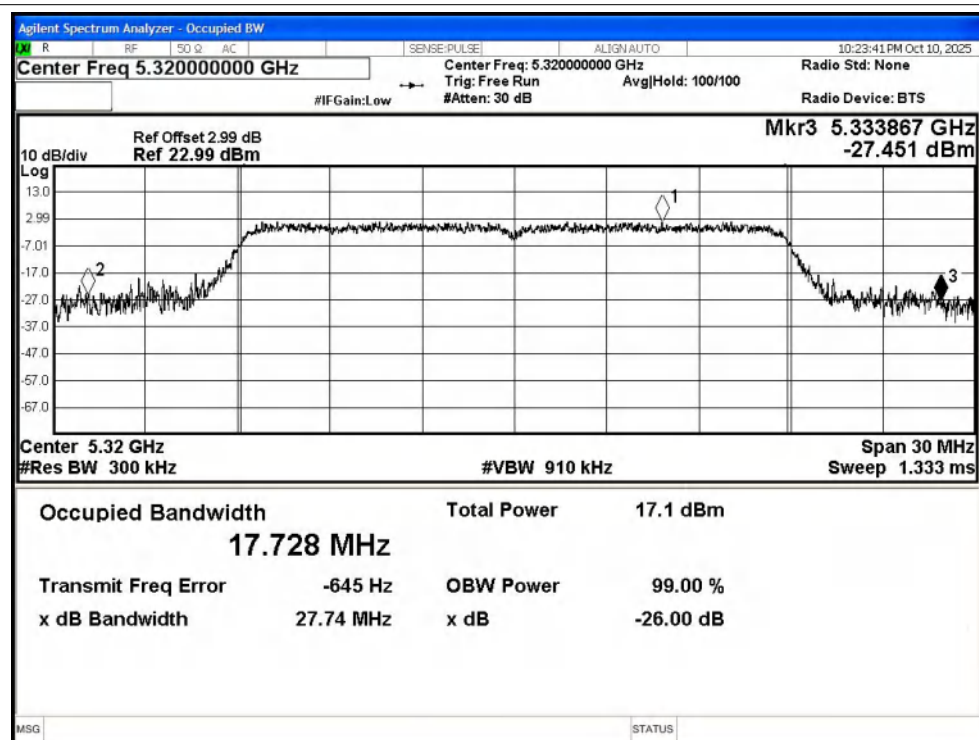


-26dB Bandwidth NVNT ac40 5270MHz Ant0

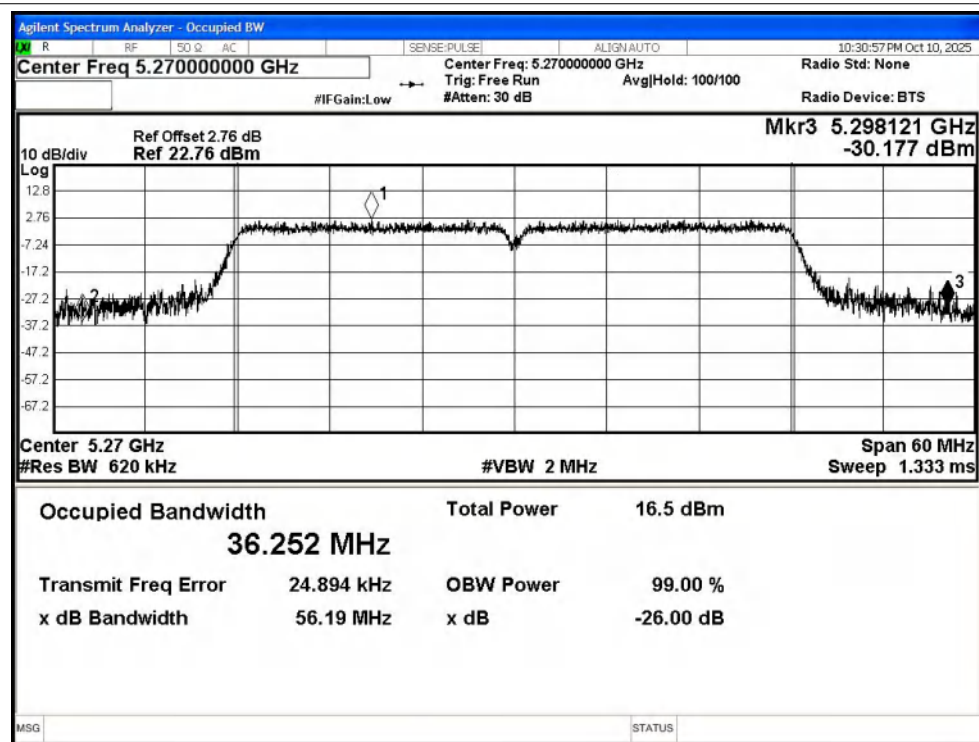

-26dB Bandwidth NVNT ac40 5310MHz Ant0

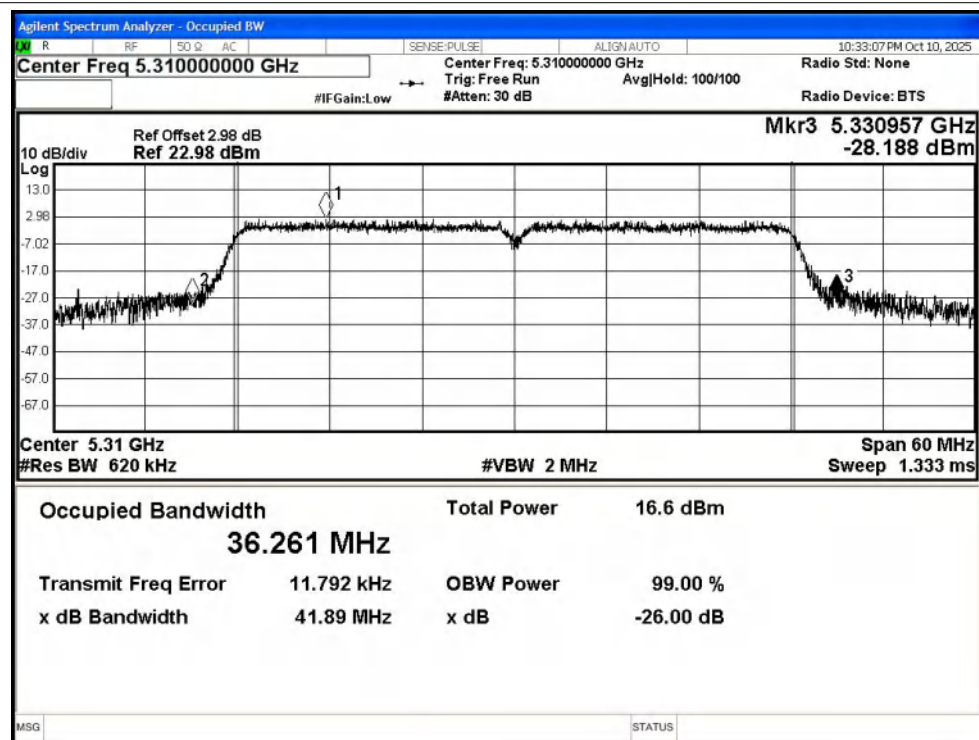

-26dB Bandwidth NVNT ac80 5290MHz Ant0

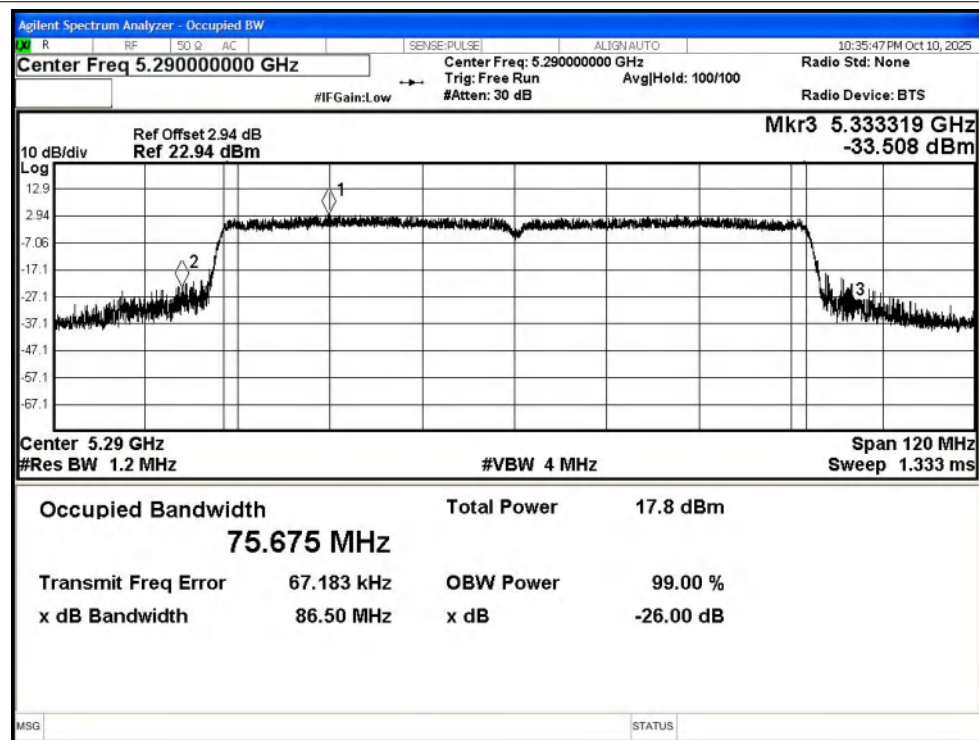

2. Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant0	11.24	0.24	11.48	24	Pass
NVNT	a	5300	Ant0	11.76	0.24	12.00	24	Pass
NVNT	a	5320	Ant0	12.11	0.24	12.35	24	Pass
NVNT	n20	5260	Ant0	11.6	0.12	11.72	24	Pass
NVNT	n20	5300	Ant0	11.3	0.12	11.42	24	Pass
NVNT	n20	5320	Ant0	11.59	0.12	11.71	24	Pass
NVNT	n40	5270	Ant0	11.31	0.24	11.55	24	Pass
NVNT	n40	5310	Ant0	10.35	0.24	10.59	24	Pass
NVNT	ac20	5260	Ant0	11.38	0.12	11.50	24	Pass
NVNT	ac20	5300	Ant0	11.28	0.12	11.40	24	Pass
NVNT	ac20	5320	Ant0	11.61	0.12	11.73	24	Pass
NVNT	ac40	5270	Ant0	10.42	0.24	10.66	24	Pass
NVNT	ac40	5310	Ant0	10.37	0.24	10.61	24	Pass
NVNT	ac80	5290	Ant0	10.92	0.47	11.39	24	Pass

3. Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant0	0.81	0.24	1.05	11	Pass
NVNT	a	5300	Ant0	1.5	0.24	1.74	11	Pass
NVNT	a	5320	Ant0	1.44	0.24	1.68	11	Pass
NVNT	n20	5260	Ant0	0.78	0.12	0.90	11	Pass
NVNT	n20	5300	Ant0	0.41	0.12	0.53	11	Pass
NVNT	n20	5320	Ant0	0.74	0.12	0.86	11	Pass
NVNT	n40	5270	Ant0	-2.58	0.24	-2.34	11	Pass
NVNT	n40	5310	Ant0	-3.58	0.24	-3.34	11	Pass
NVNT	ac20	5260	Ant0	0.78	0.12	0.90	11	Pass
NVNT	ac20	5300	Ant0	0.34	0.12	0.46	11	Pass
NVNT	ac20	5320	Ant0	0.69	0.12	0.81	11	Pass
NVNT	ac40	5270	Ant0	-3.68	0.24	-3.44	11	Pass
NVNT	ac40	5310	Ant0	-3.51	0.24	-3.27	11	Pass
NVNT	ac80	5290	Ant0	-5.96	0.47	-5.49	11	Pass

Test Graphs


PSD NVNT a 5260MHz Ant0

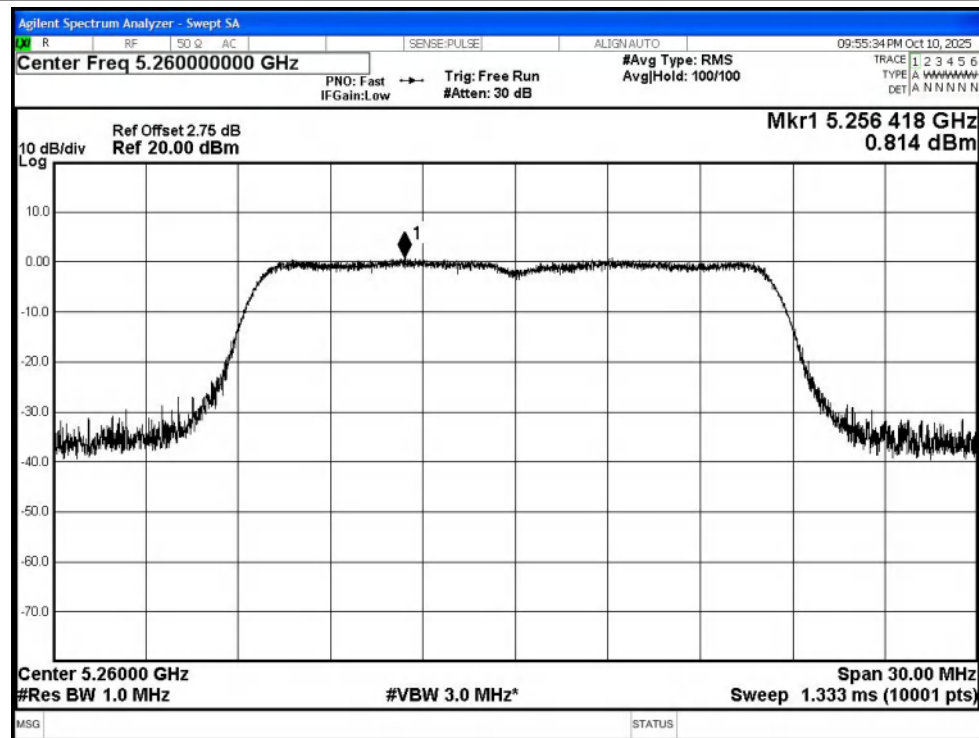


PSD NVNT a 5300MHz Ant0

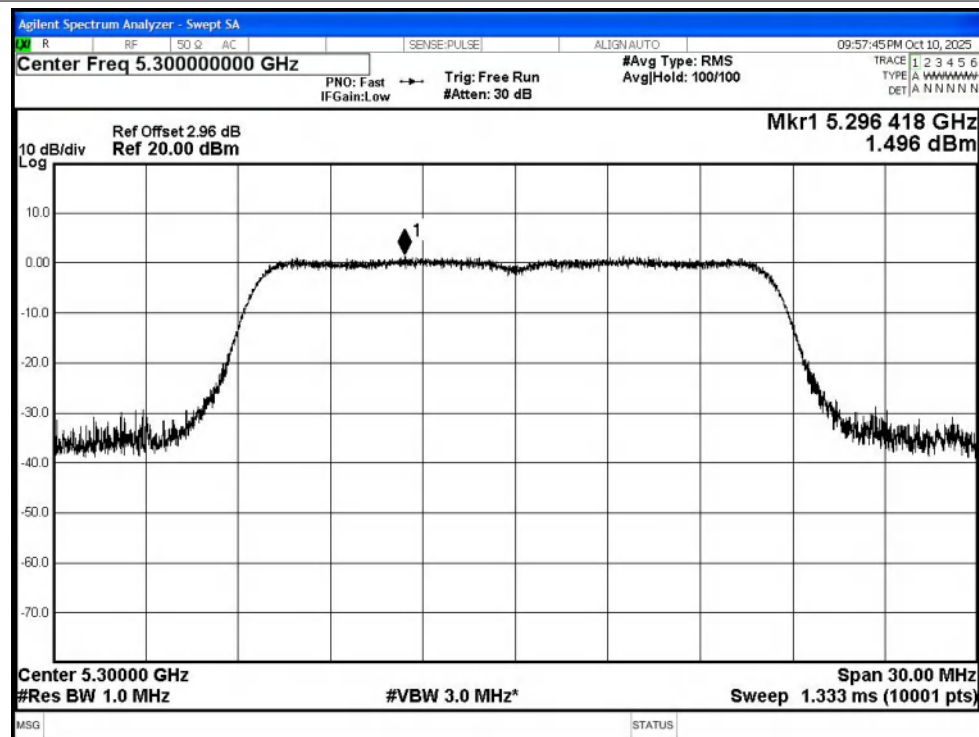


PSD NVNT a 5320MHz Ant0

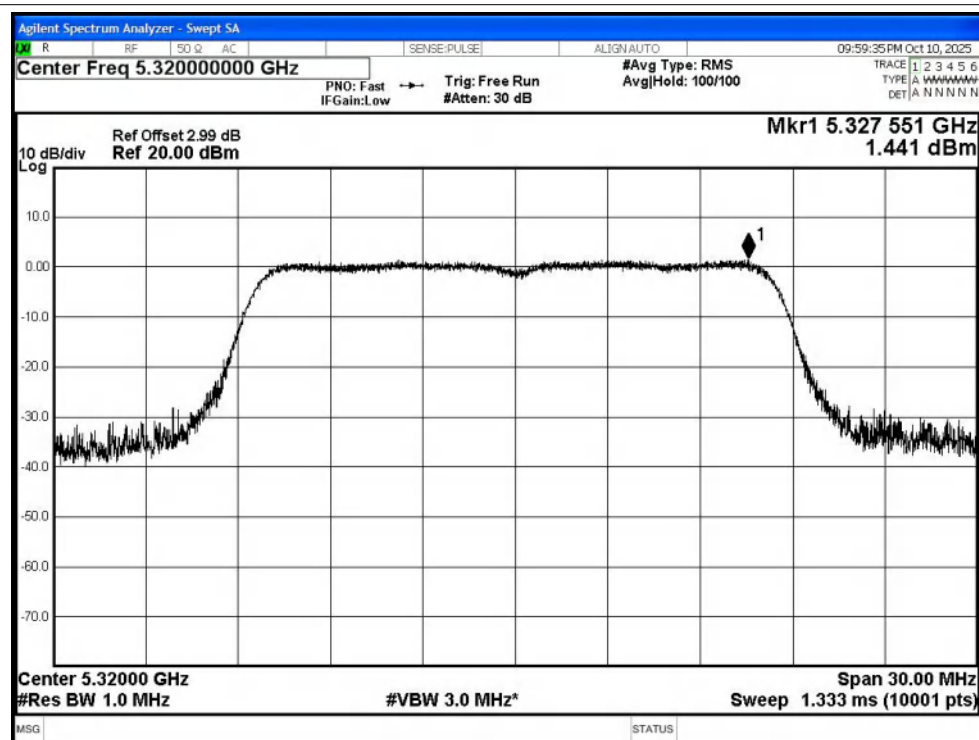


PSD NVNT n20 5260MHz Ant0

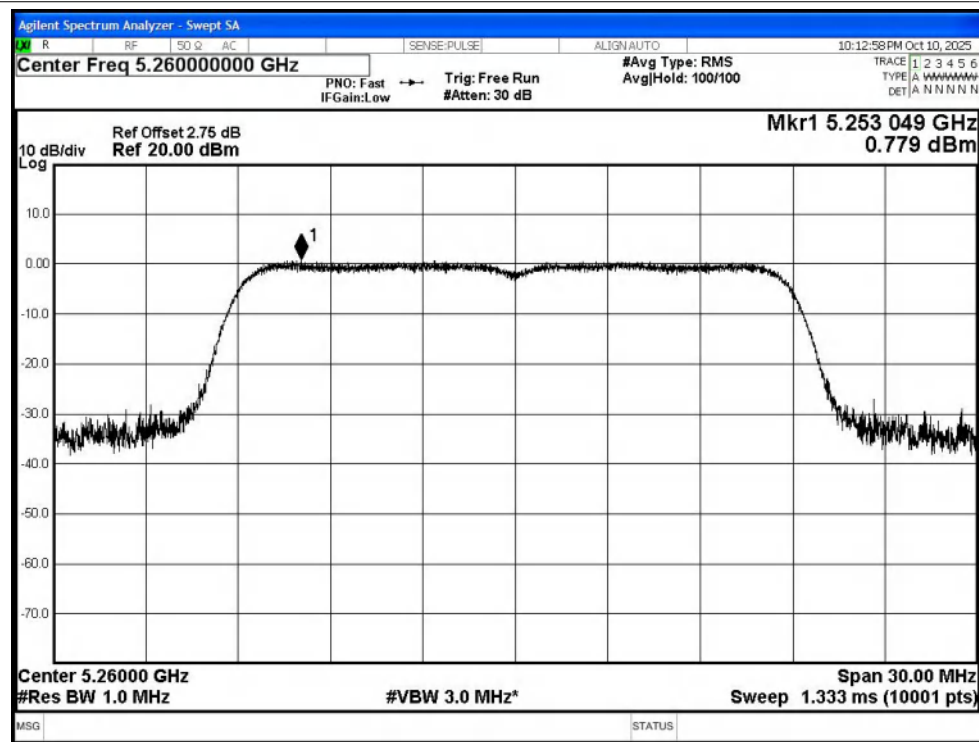


PSD NVNT n20 5300MHz Ant0

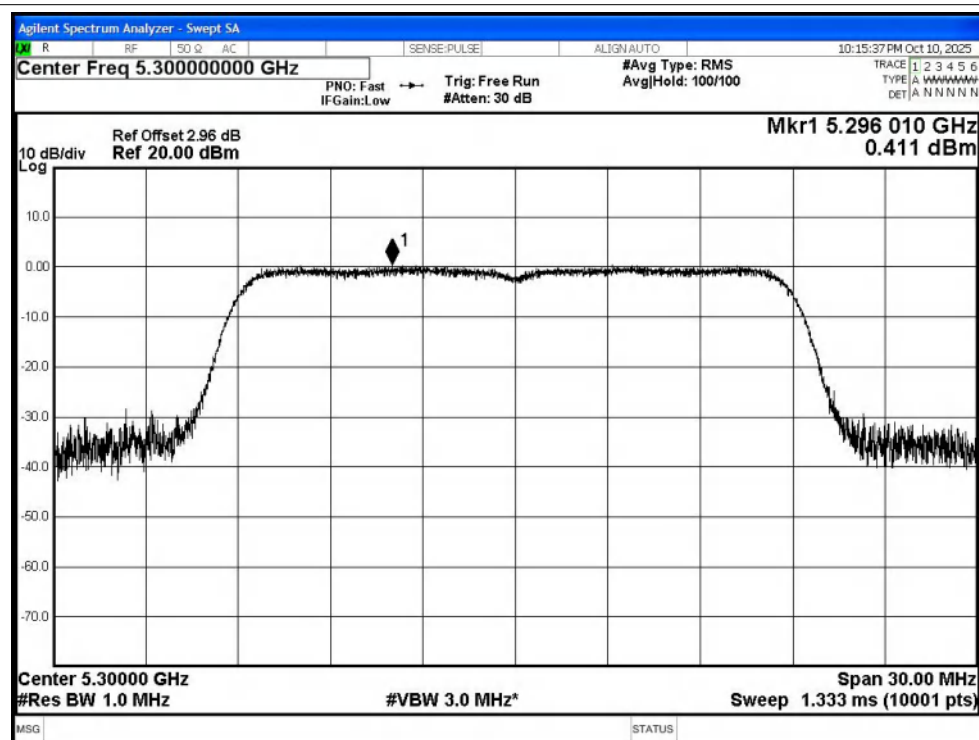


PSD NVNT n20 5320MHz Ant0

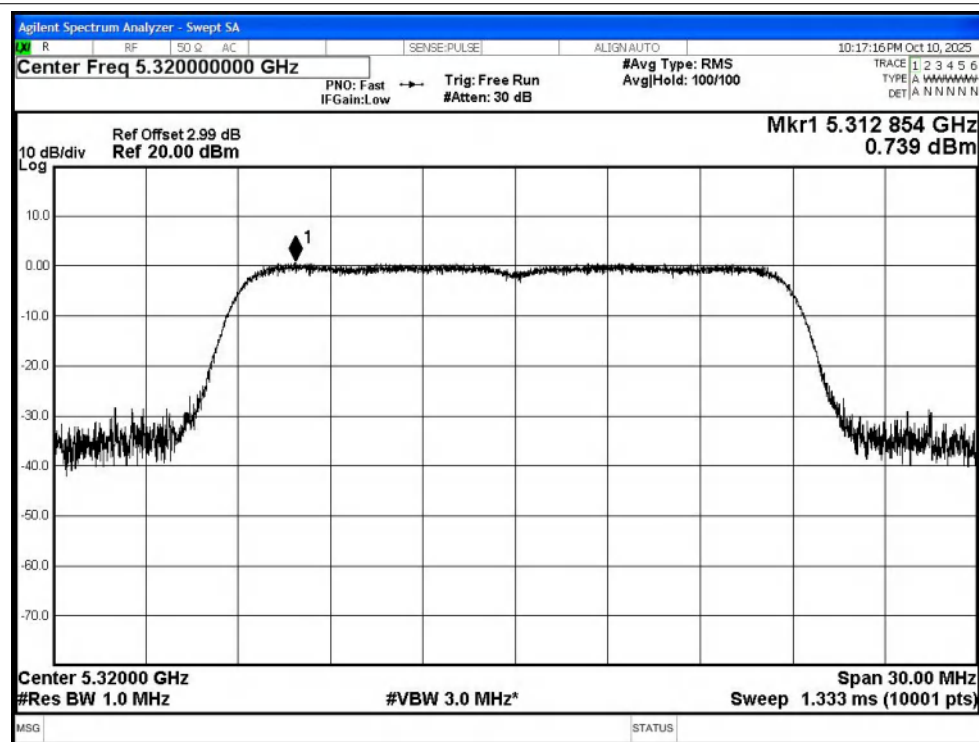


PSD NVNT n40 5270MHz Ant0

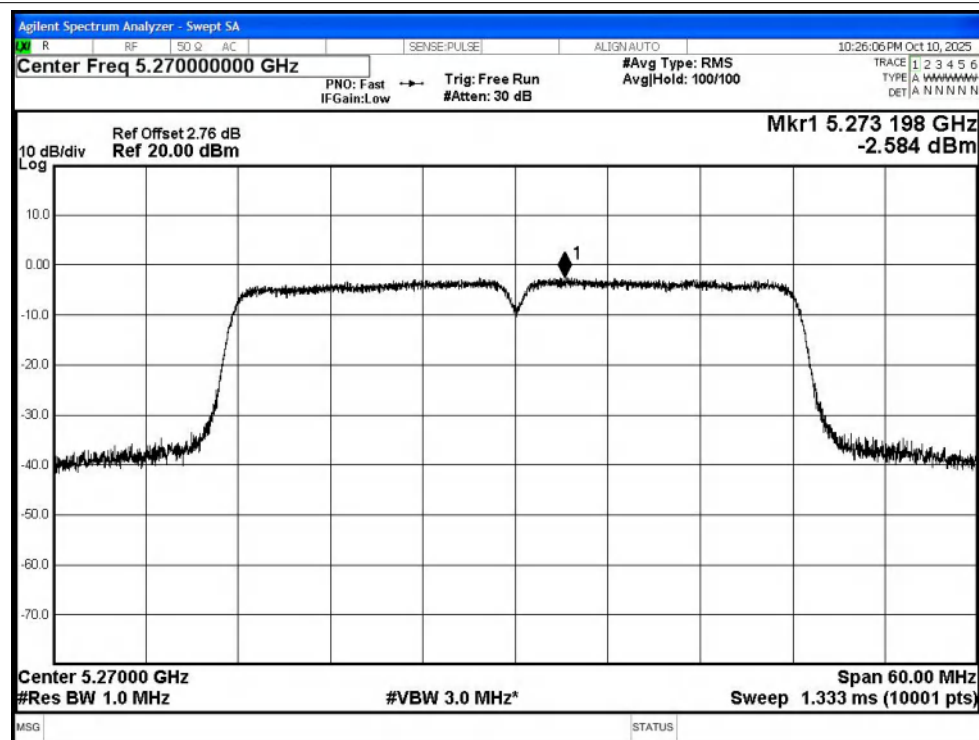


PSD NVNT n40 5310MHz Ant0

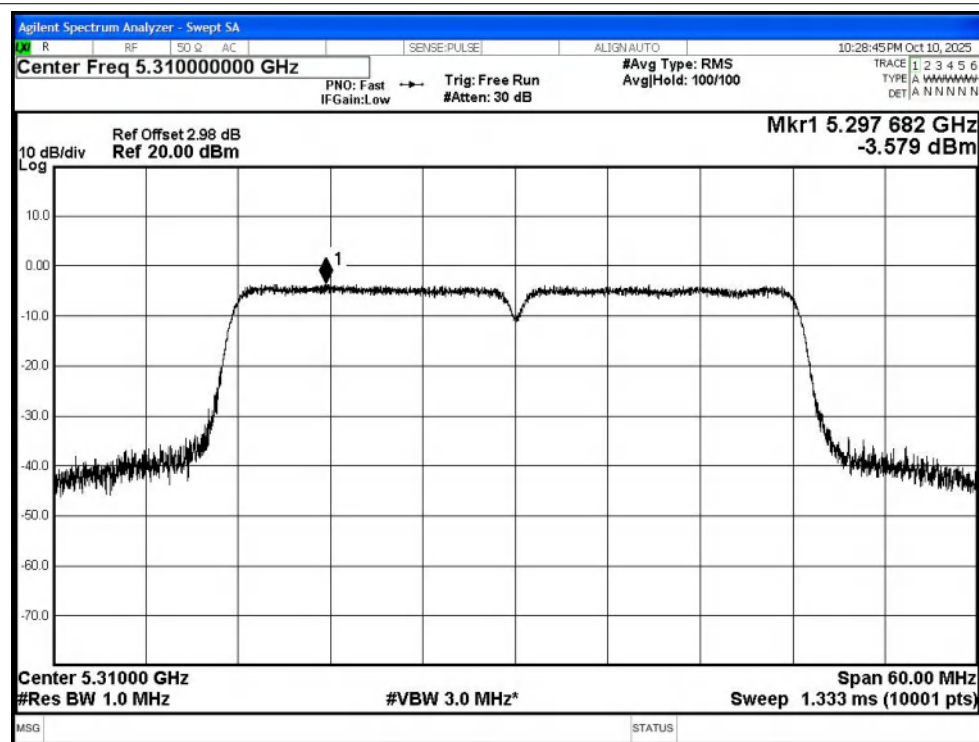


PSD NVNT ac20 5260MHz Ant0

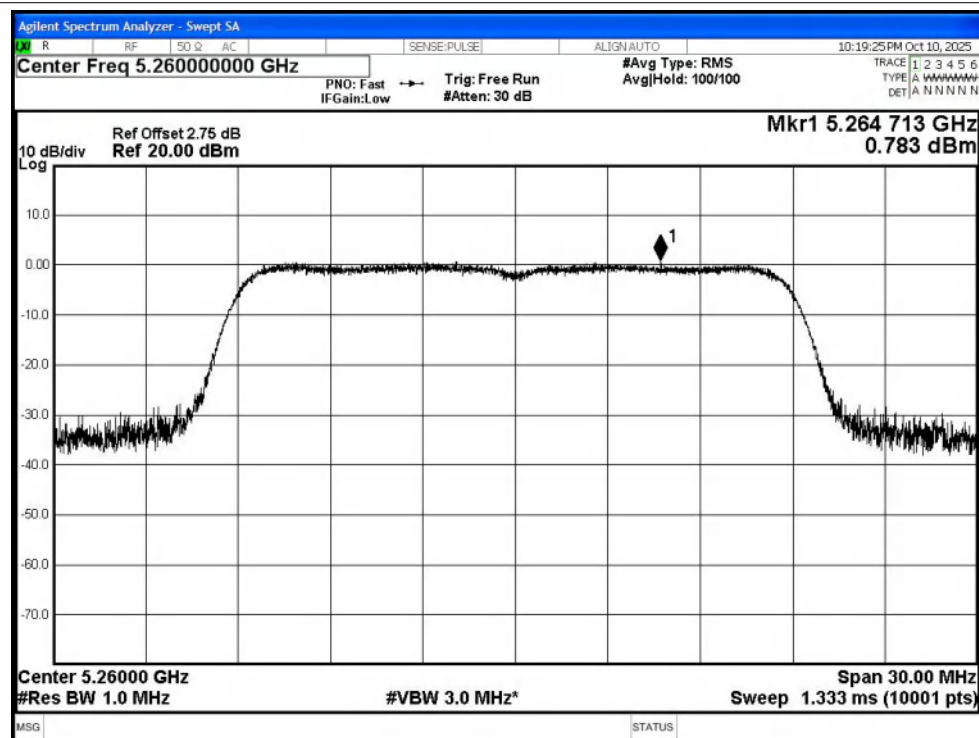


PSD NVNT ac20 5300MHz Ant0

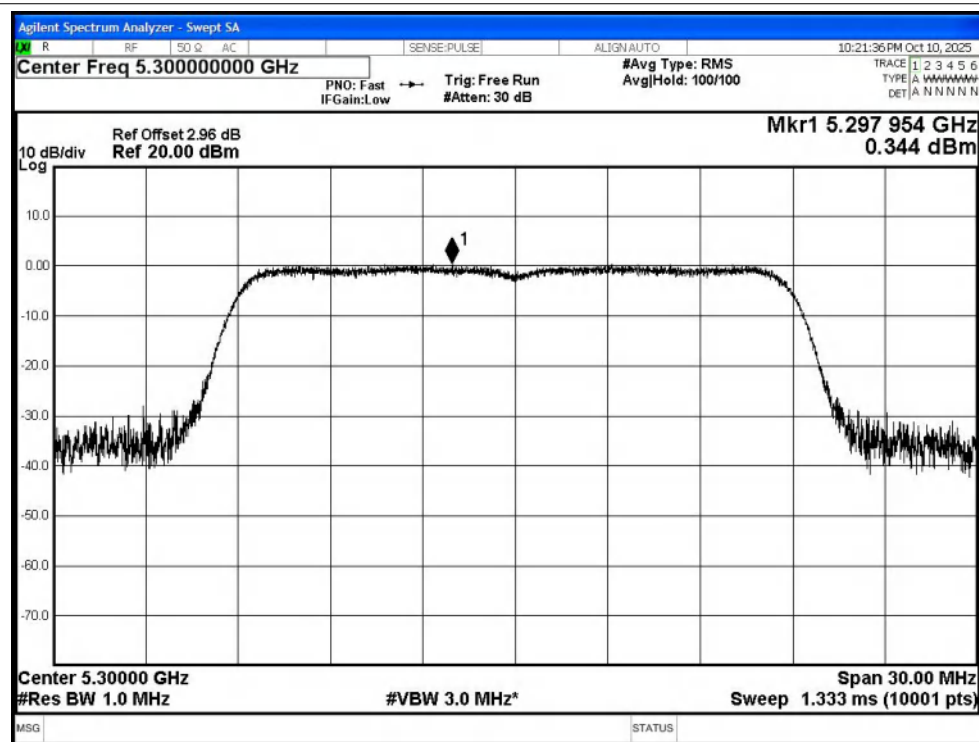


PSD NVNT ac20 5320MHz Ant0

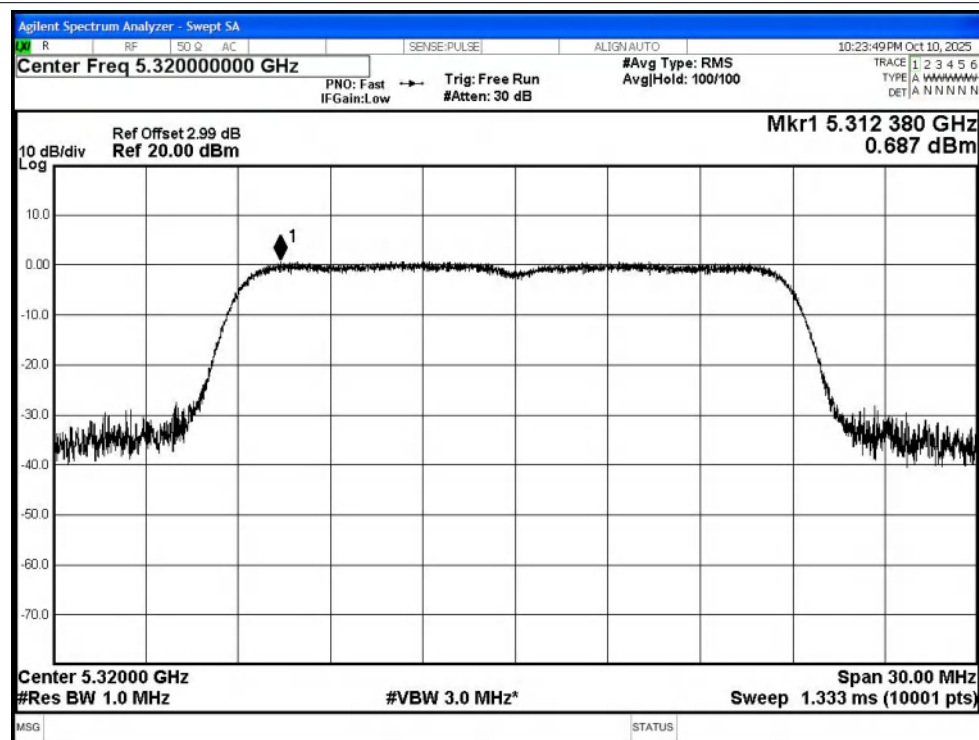


PSD NVNT ac40 5270MHz Ant0

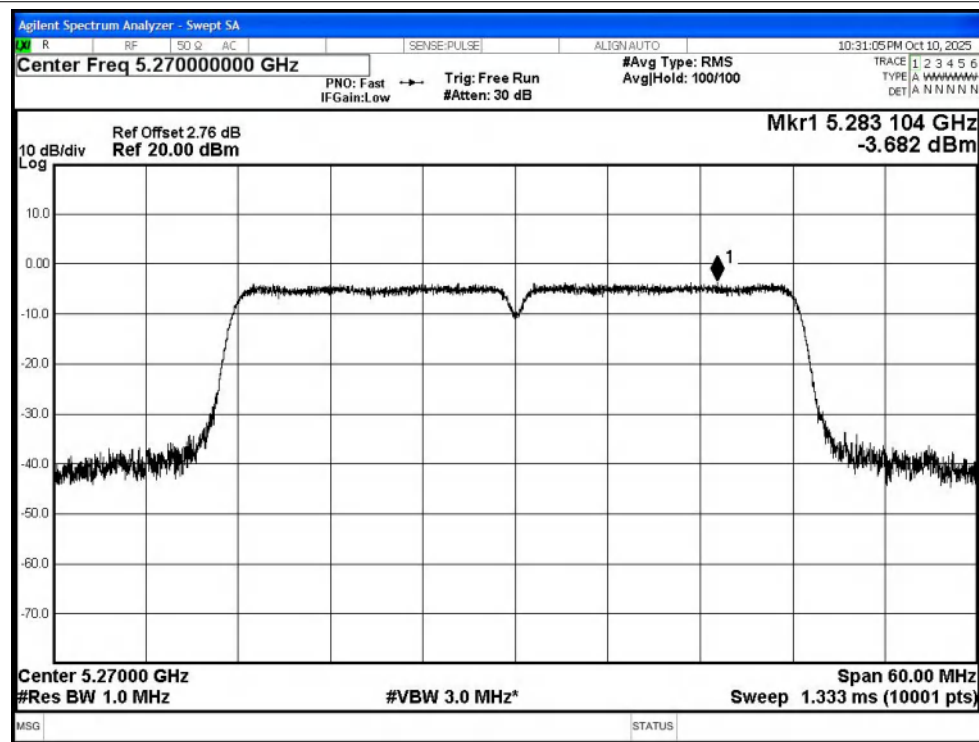

PSD NVNT ac40 5310MHz Ant0

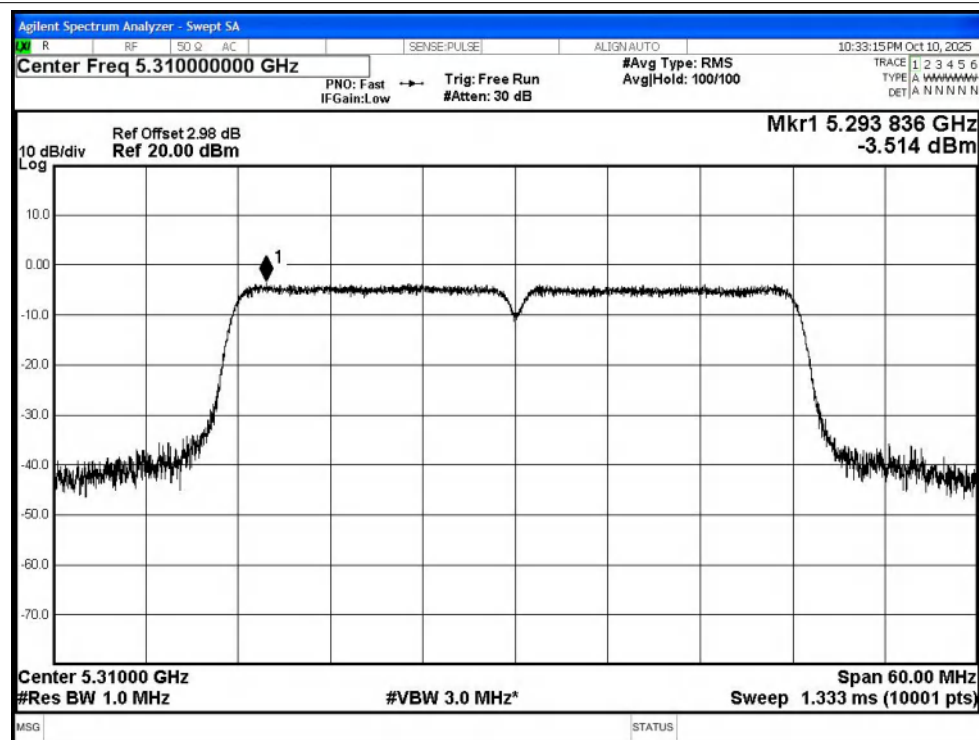

PSD NVNT ac80 5290MHz Ant0

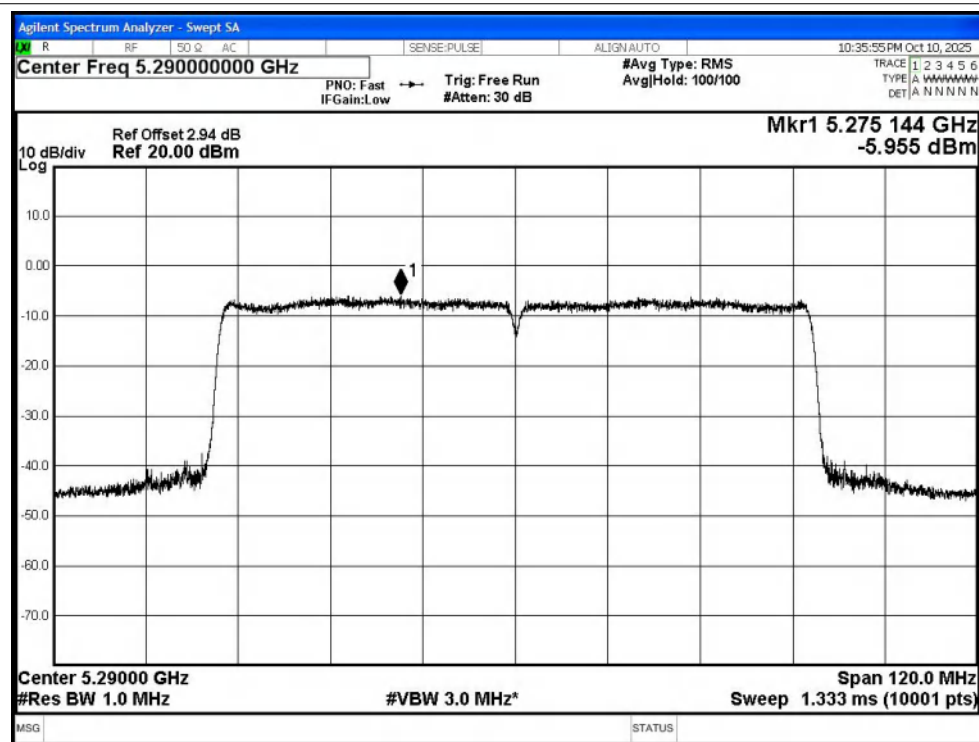

4. Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5260	Ant0	4500	-50.66	2	-	46.57	Peak	68.2	Pass
NVNT	a	5260	Ant0	4500	-58.86	2	0.24	38.61	Average	54	Pass
NVNT	a	5260	Ant0	4922.76	-46.9	2	-	50.33	Peak	68.2	Pass
NVNT	a	5260	Ant0	5065.5	-57.01	2	0.24	40.46	Average	54	Pass
NVNT	a	5260	Ant0	5150	-49.2	2	-	48.03	Peak	68.2	Pass
NVNT	a	5260	Ant0	5150	-57.57	2	0.24	39.9	Average	54	Pass
NVNT	a	5320	Ant0	5350	-46.34	2	-	50.89	Peak	68.2	Pass
NVNT	a	5320	Ant0	5350	-56.97	2	0.24	40.5	Average	54	Pass
NVNT	a	5320	Ant0	5350.8	-56.24	2	0.24	41.23	Average	54	Pass
NVNT	a	5320	Ant0	5460	-49.8	2	-	47.43	Peak	68.2	Pass
NVNT	a	5320	Ant0	5460	-58.11	2	0.24	39.36	Average	54	Pass
NVNT	n20	5260	Ant0	4500	-51.27	2	-	45.96	Peak	68.2	Pass
NVNT	n20	5260	Ant0	4500	-58.94	2	0.12	38.41	Average	54	Pass
NVNT	n20	5260	Ant0	5089.68	-46.13	2	-	51.1	Peak	68.2	Pass
NVNT	n20	5260	Ant0	5140.38	-57.05	2	0.12	40.3	Average	54	Pass
NVNT	n20	5260	Ant0	5150	-49.84	2	-	47.39	Peak	68.2	Pass
NVNT	n20	5260	Ant0	5150	-57.58	2	0.12	39.77	Average	54	Pass
NVNT	n20	5320	Ant0	5350	-42.58	2	-	54.65	Peak	68.2	Pass
NVNT	n20	5320	Ant0	5350	-56.11	2	0.12	41.24	Average	54	Pass
NVNT	n20	5320	Ant0	5351.2	-55.85	2	0.12	41.5	Average	54	Pass
NVNT	n20	5320	Ant0	5460	-49.93	2	-	47.3	Peak	68.2	Pass
NVNT	n20	5320	Ant0	5460	-58.13	2	0.12	39.22	Average	54	Pass
NVNT	n40	5270	Ant0	4500	-50.13	2	-	47.1	Peak	68.2	Pass
NVNT	n40	5270	Ant0	4500	-58.89	2	0.24	38.58	Average	54	Pass
NVNT	n40	5270	Ant0	4928.49	-47.29	2	-	49.94	Peak	68.2	Pass
NVNT	n40	5270	Ant0	4806.18	-56.64	2	0.24	40.83	Average	54	Pass
NVNT	n40	5270	Ant0	5150	-49.61	2	-	47.62	Peak	68.2	Pass
NVNT	n40	5270	Ant0	5150	-58.05	2	0.24	39.42	Average	54	Pass
NVNT	n40	5310	Ant0	5350	-47.38	2	-	49.85	Peak	68.2	Pass
NVNT	n40	5310	Ant0	5350	-56.25	2	0.24	41.22	Average	54	Pass
NVNT	n40	5310	Ant0	5350.2	-44.41	2	-	52.82	Peak	68.2	Pass
NVNT	n40	5310	Ant0	5351.2	-55.84	2	0.24	41.63	Average	54	Pass
NVNT	n40	5310	Ant0	5460	-50.8	2	-	46.43	Peak	68.2	Pass
NVNT	n40	5310	Ant0	5460	-57.85	2	0.24	39.62	Average	54	Pass
NVNT	ac20	5260	Ant0	4500	-49.64	2	-	47.59	Peak	68.2	Pass
NVNT	ac20	5260	Ant0	4500	-59.31	2	0.12	38.04	Average	54	Pass
NVNT	ac20	5260	Ant0	5070.18	-46.53	2	-	50.7	Peak	68.2	Pass
NVNT	ac20	5260	Ant0	5108.4	-56.91	2	0.12	40.44	Average	54	Pass
NVNT	ac20	5260	Ant0	5150	-50.12	2	-	47.11	Peak	68.2	Pass


NVNT	ac20	5260	Ant0	5150	-57.85	2	0.12	39.5	Average	54	Pass
NVNT	ac20	5320	Ant0	5350	-46.08	2	-	51.15	Peak	68.2	Pass
NVNT	ac20	5320	Ant0	5350	-56.73	2	0.12	40.62	Average	54	Pass
NVNT	ac20	5320	Ant0	5350.2	-43.47	2	-	53.76	Peak	68.2	Pass
NVNT	ac20	5320	Ant0	5350.4	-55.97	2	0.12	41.38	Average	54	Pass
NVNT	ac20	5320	Ant0	5460	-51.51	2	-	45.72	Peak	68.2	Pass
NVNT	ac20	5320	Ant0	5460	-57.87	2	0.12	39.48	Average	54	Pass
NVNT	ac40	5270	Ant0	4500	-51.38	2	-	45.85	Peak	68.2	Pass
NVNT	ac40	5270	Ant0	4500	-59.4	2	0.24	38.07	Average	54	Pass
NVNT	ac40	5270	Ant0	4811.85	-46.7	2	-	50.53	Peak	68.2	Pass
NVNT	ac40	5270	Ant0	5069.43	-57.15	2	0.24	40.32	Average	54	Pass
NVNT	ac40	5270	Ant0	5150	-49.53	2	-	47.7	Peak	68.2	Pass
NVNT	ac40	5270	Ant0	5150	-58.09	2	0.24	39.38	Average	54	Pass
NVNT	ac40	5310	Ant0	5350	-45.81	2	-	51.42	Peak	68.2	Pass
NVNT	ac40	5310	Ant0	5350	-56.68	2	0.24	40.79	Average	54	Pass
NVNT	ac40	5310	Ant0	5350.2	-44.4	2	-	52.83	Peak	68.2	Pass
NVNT	ac40	5310	Ant0	5351.4	-56.02	2	0.24	41.45	Average	54	Pass
NVNT	ac40	5310	Ant0	5460	-49.73	2	-	47.5	Peak	68.2	Pass
NVNT	ac40	5310	Ant0	5460	-58.29	2	0.24	39.18	Average	54	Pass
NVNT	ac80	5290	Ant0	4500	-49.93	2	-	47.3	Peak	68.2	Pass
NVNT	ac80	5290	Ant0	4500	-59.23	2	0.47	38.47	Average	54	Pass
NVNT	ac80	5290	Ant0	5144.67	-42.38	2	-	54.85	Peak	68.2	Pass
NVNT	ac80	5290	Ant0	5149.02	-54.72	2	0.47	42.98	Average	54	Pass
NVNT	ac80	5290	Ant0	5150	-45.14	2	-	52.09	Peak	68.2	Pass
NVNT	ac80	5290	Ant0	5150	-55.11	2	0.47	42.59	Average	54	Pass
NVNT	ac80	5290	Ant0	5350	-44.62	2	-	52.61	Peak	68.2	Pass
NVNT	ac80	5290	Ant0	5350	-56.05	2	0.47	41.65	Average	54	Pass
NVNT	ac80	5290	Ant0	5350.25	-44.36	2	-	52.87	Peak	68.2	Pass
NVNT	ac80	5290	Ant0	5351.5	-55.86	2	0.47	41.84	Average	54	Pass
NVNT	ac80	5290	Ant0	5460	-46.47	2	-	50.76	Peak	68.2	Pass
NVNT	ac80	5290	Ant0	5460	-58.45	2	0.47	39.25	Average	54	Pass

[illegible]


The screenshot shows the Agilent Spectrum Analyzer interface. The top status bar indicates "Agilent Spectrum Analyzer - Swept SA". The main display area shows a spectrum plot with a peak labeled "Mkr1 5.324 2 GHz" at a level of "-9.294 dBm". The plot has a vertical scale of "10 dB/div" and a horizontal scale of "Log". The center frequency is set to "Center Freq 5.400000000 GHz". Other parameters visible include "Ref Offset 2.99 dB", "Ref 20.00 dBm", "PNO: Fast IF Gain: Low", "Trig: Free Run #Atten: 30 dB", "#Avg Type: RMS", and "Avg/Hold: 100/100". The bottom status bar shows "Start 5.3000 GHz", "Res BW 1.0 MHz", "#VBW 3.0 MHz*", "Stop 5.5000 GHz", and "Sweep 1.000 ms (1001 pts)".

MKR	MODE	FREQ	LEVEL
1	N	f	-9.294 dBm

Restrict Band NVNT n40 5270MHz Ant0 Peak

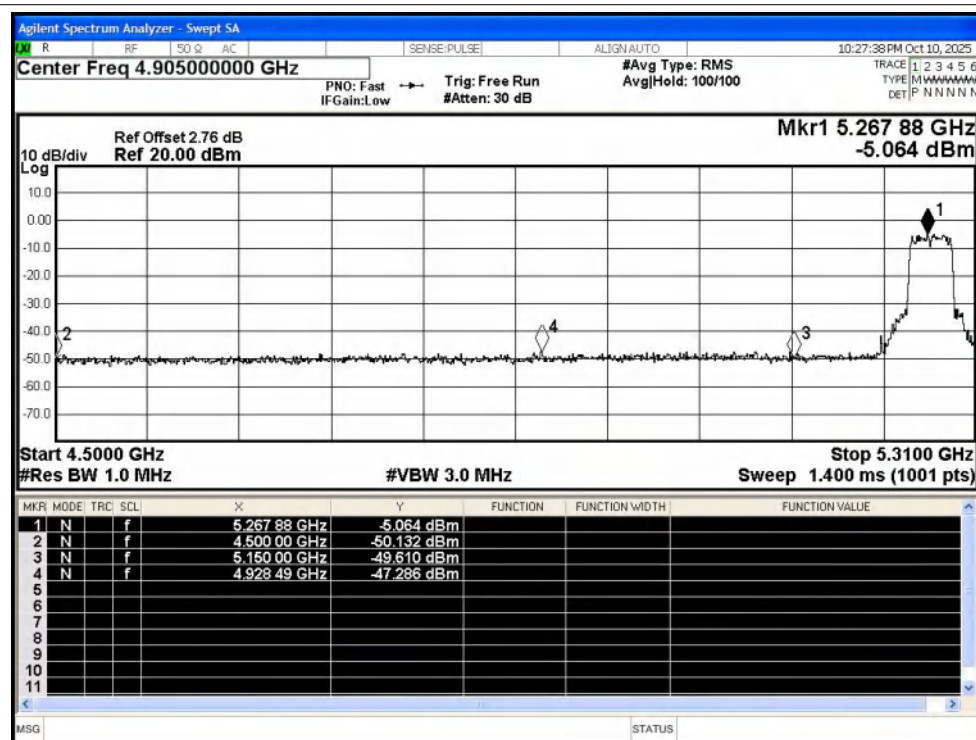

Restrict Band NVNT n40 5270MHz Ant0 Average

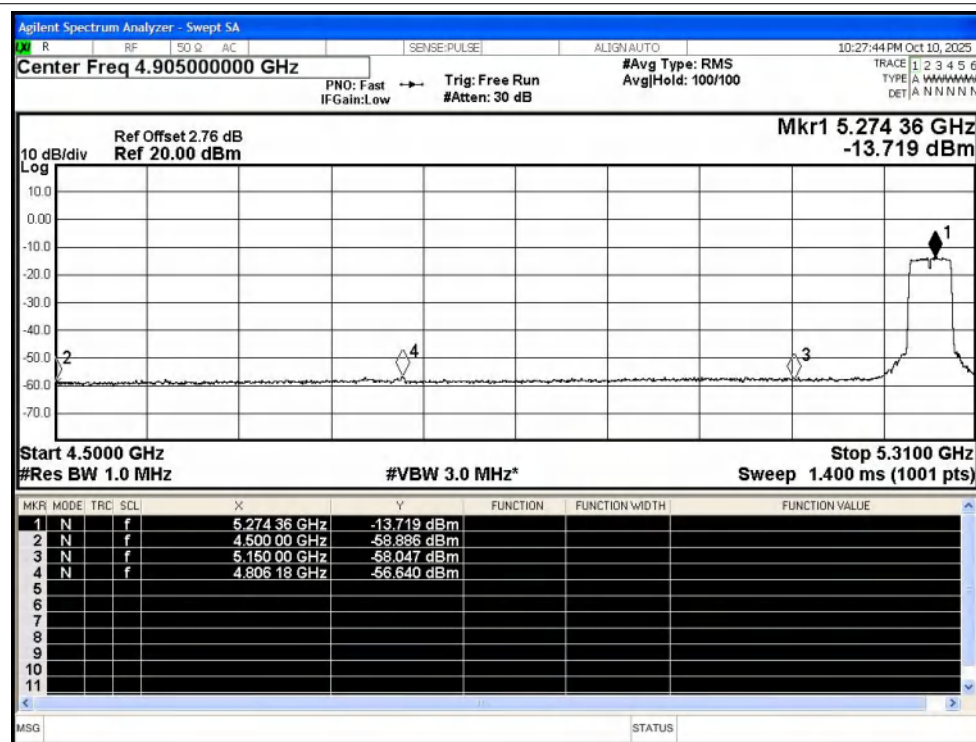

Agilent Spectrum Analyzer - Swept SA

R RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 10:20:27 PM Oct 10, 2025

Center Freq 4.890000000 GHz

PNO: Fast IFGain:Low Trig: Free Run #Atten: 30 dB #Avg Type: RMS Avg/Hold: 100/100

Ref Offset 2.75 dB Ref 20.00 dBm Mkr1 5.262 84 GHz -1.763 dBm

10 dB/div Log

Start 4.5000 GHz Stop 5.2800 GHz
#Res BW 1.0 MHz #VBW 3.0 MHz Sweep 1.333 ms (1001 pts)

MKR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	f	5.262 84 GHz	-1.763 dBm		
2	N	f	4.500 00 GHz	-49.637 dBm		
3	N	f	5.150 00 GHz	-50.119 dBm		
4	N	f	5.070 18 GHz	-46.529 dBm		
5						
6						
7						
8						
9						
10						
11						

Agilent Spectrum Analyzer - Swept SA

R	RF	SQ O AC	SENSE:PULSE	ALIGN:AUTO	10:20:32 PM Oct 10, 2025
---	----	---------	-------------	------------	--------------------------

Center Freq 4.890000000 GHz

PNO: Fast IFGain:Low Trig: Free Run #Atten: 30 dB #Avg Type: RMS Avg/Hold: 100/100

Ref Offset 2.75 dB
Ref 20.00 dBm

Mkr1 5.256 60 GHz
-10.602 dBm

MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	f	5.256 60 GHz	-10.602 dBm			
2	N	f	4.500 00 GHz	-59.314 dBm			
3	N	f	5.150 00 GHz	-57.847 dBm			
4	N	f	5.108 40 GHz	-56.906 dBm			

Start 4.5000 GHz Stop 5.2800 GHz
#Res BW 1.0 MHz #VBW 3.0 MHz*
Sweep 1.333 ms (1001 pts)

Restrict Band NVNT ac20 5320MHz Ant0 Peak

Agilent Spectrum Analyzer - Swept SA

Center Freq 5.400000000 GHz

Ref Offset 2.99 dB
Ref 20.00 dBm

Mkr1 5.326 0 GHz
-1.038 dBm

Start 5.3000 GHz
#Res BW 1.0 MHz

#VBW 3.0 MHz

Stop 5.5000 GHz
Sweep 1.000 ms (1001 pts)


MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N		f	5.326 0 GHz	-1.038 dBm			
2	N		f	5.350 0 GHz	-46.075 dBm			
3	N		f	5.460 0 GHz	-51.513 dBm			
4	N		f	5.350 2 GHz	-43.465 dBm			

[illegible]

Restrict Band NVNT ac80 5290MHz Ant0 Peak



Restrict Band NVNT ac80 5290MHz Ant0 Average

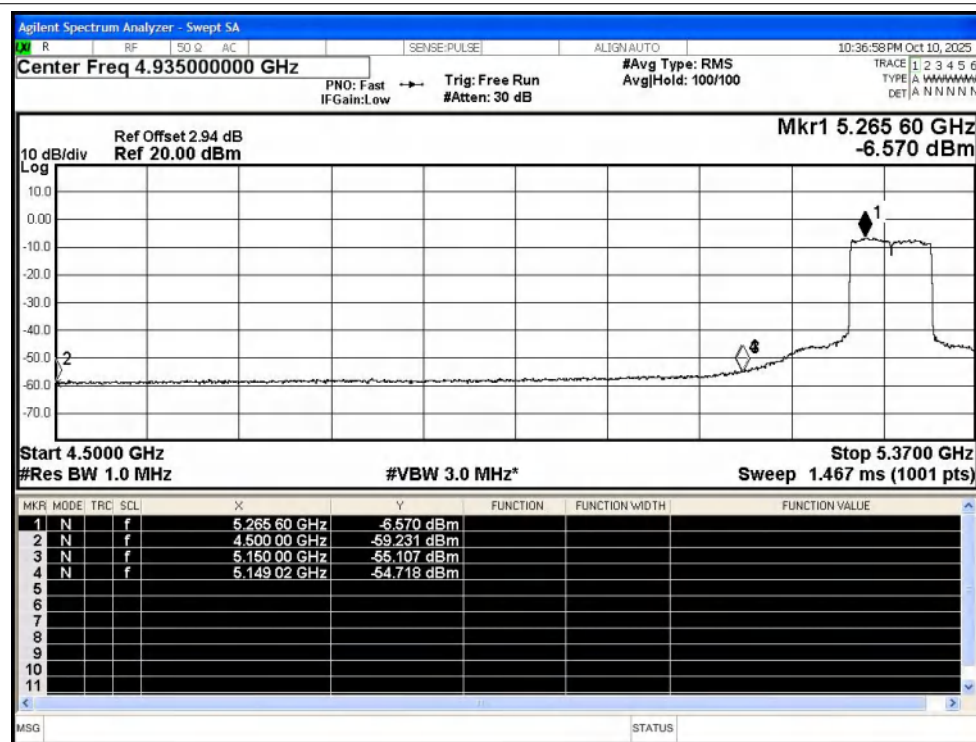

Restrict Band NVNT ac80 5290MHz Ant0 Peak

Agilent Spectrum Analyzer - Sweep SA

Center Freq 5.335000000 GHz

Ref Offset 2.94 dB
Ref 20.00 dBm

Mkr1 5.276 75 GHz
-7.666 dBm

Start 5.2100 GHz
#Res BW 1.0 MHz

Stop 5.4600 GHz
Sweep 1.000 ms (1001 pts)

#VBW 3.0 MHz

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N		f	5.276 75 GHz	-7.666 dBm			
2	N		f	5.350 00 GHz	-44.615 dBm			
3	N		f	5.460 00 GHz	-46.474 dBm			
4	N		f	5.350 25 GHz	-44.360 dBm			
5								
6								
7								
8								
9								
10								
11								

10 dB/div
Log

Ref Offset 2.94 dB
Ref 20.00 dBm

Mkr1 5.276 75 GHz
-7.666 dBm

Start 5.2100 GHz
#Res BW 1.0 MHz

Stop 5.4600 GHz
Sweep 1.000 ms (1001 pts)

#VBW 3.0 MHz

1

2

3

MSG


STATUS

[illegible]


5. Frequency Stability

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	a	5260	Ant0	5260	0	0	25	Pass
NVNT	a	5300	Ant0	5299.98	-20000	-3.77	25	Pass
NVNT	a	5320	Ant0	5319.98	-20000	-3.76	25	Pass
NVNT	n20	5260	Ant0	5259.98	-20000	-3.8	25	Pass
NVNT	n20	5300	Ant0	5300	0	0	25	Pass
NVNT	n20	5320	Ant0	5319.98	-20000	-3.76	25	Pass
NVNT	n40	5270	Ant0	5270	0	0	25	Pass
NVNT	n40	5310	Ant0	5309.96	-40000	-7.53	25	Pass
NVNT	ac20	5260	Ant0	5259.98	-20000	-3.8	25	Pass
NVNT	ac20	5300	Ant0	5299.96	-40000	-7.55	25	Pass
NVNT	ac20	5320	Ant0	5319.98	-20000	-3.76	25	Pass
NVNT	ac40	5270	Ant0	5270	0	0	25	Pass
NVNT	ac40	5310	Ant0	5310	0	0	25	Pass
NVNT	ac80	5290	Ant0	5290	0	0	25	Pass


Freq. Stability NVNT a 5260MHz Ant0

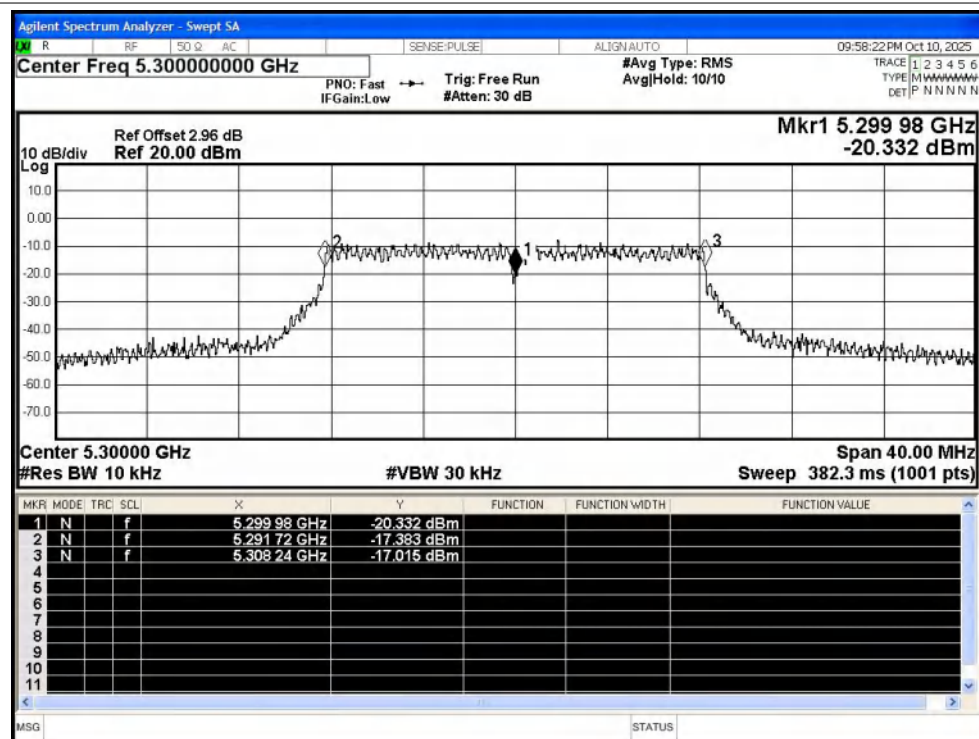


Freq. Stability NVNT a 5320MHz Ant0

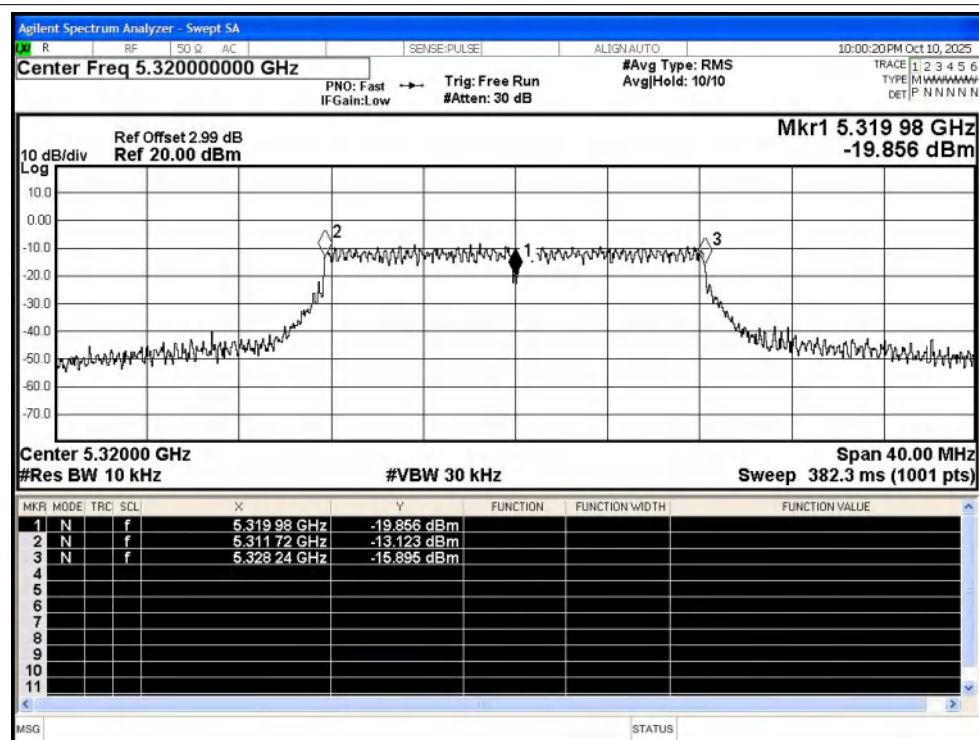


Freq. Stability NVNT n20 5260MHz Ant0

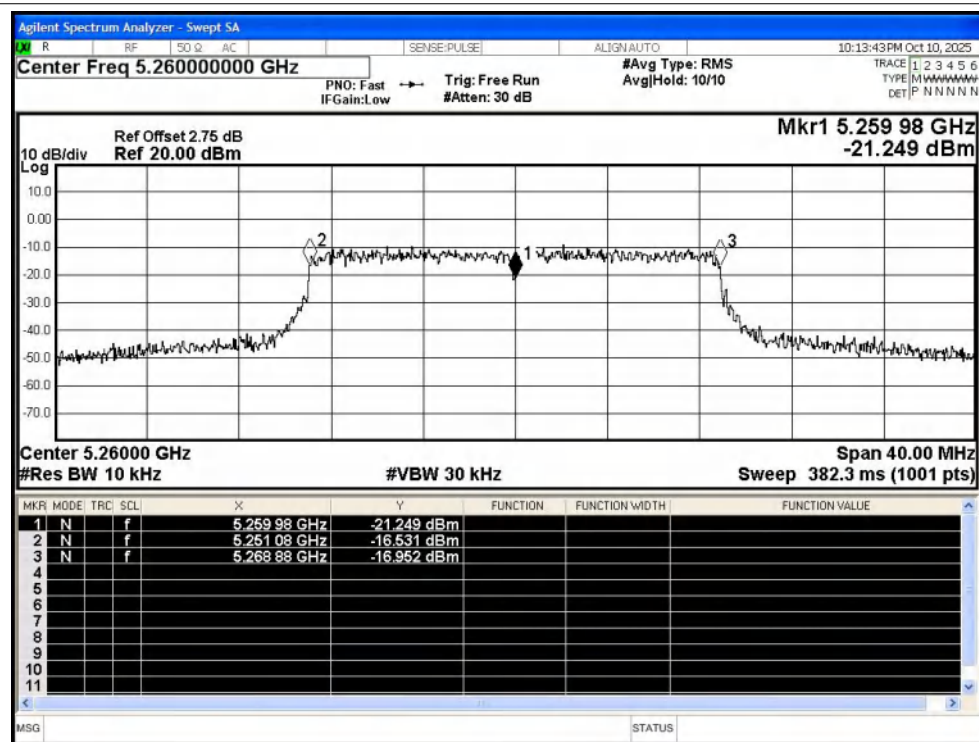


Freq. Stability NVNT n20 5300MHz Ant0

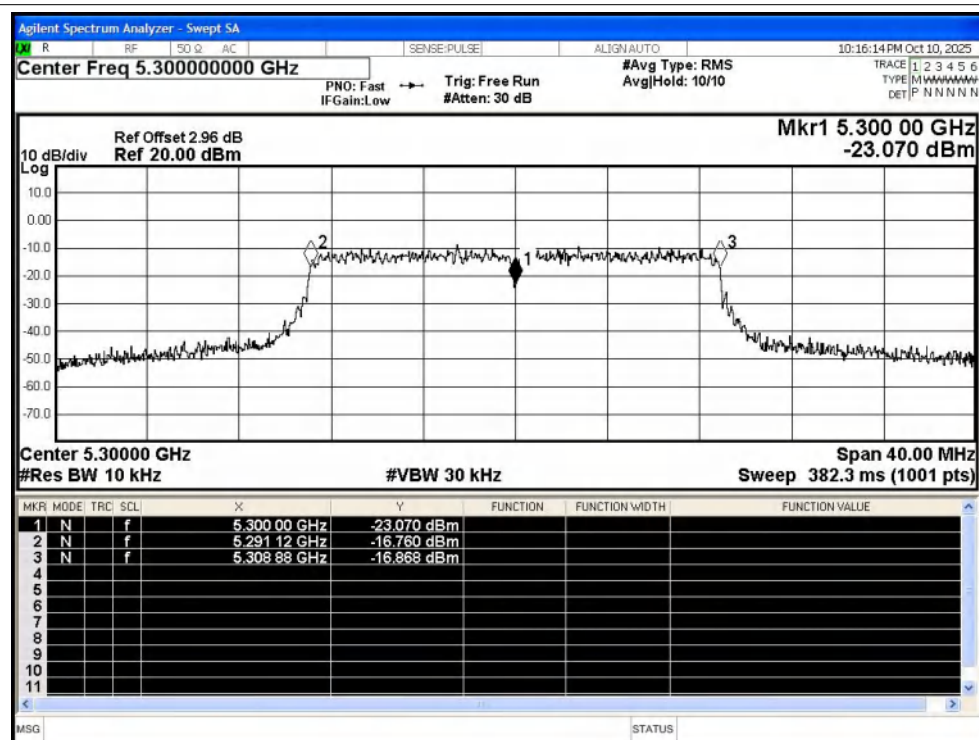


Freq. Stability NVNT n20 5320MHz Ant0

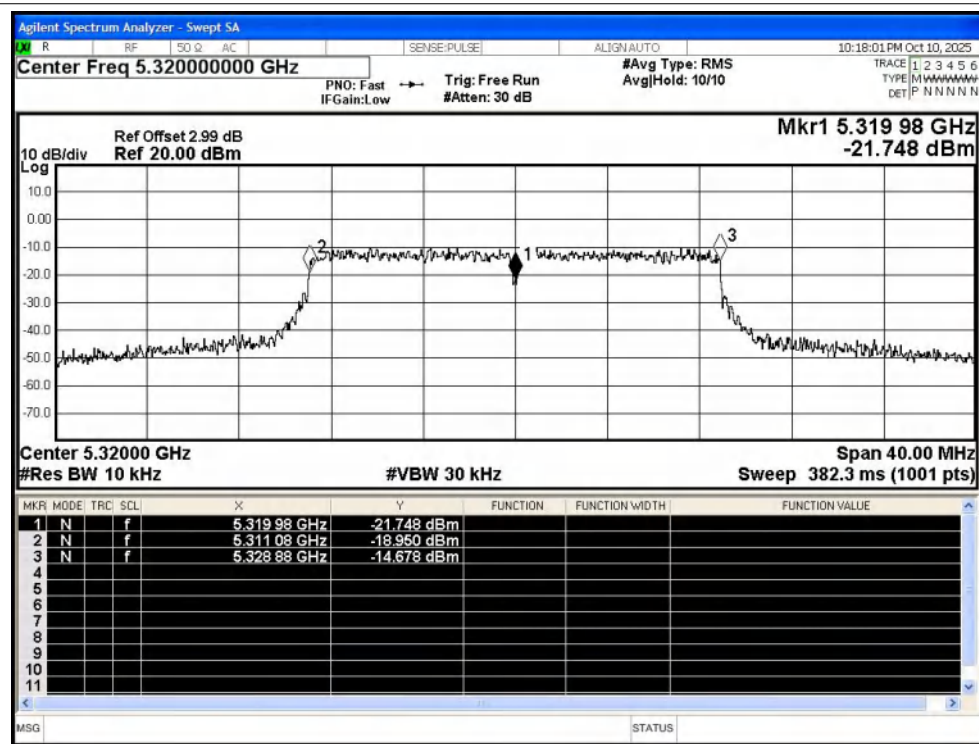


Freq. Stability NVNT n40 5270MHz Ant0

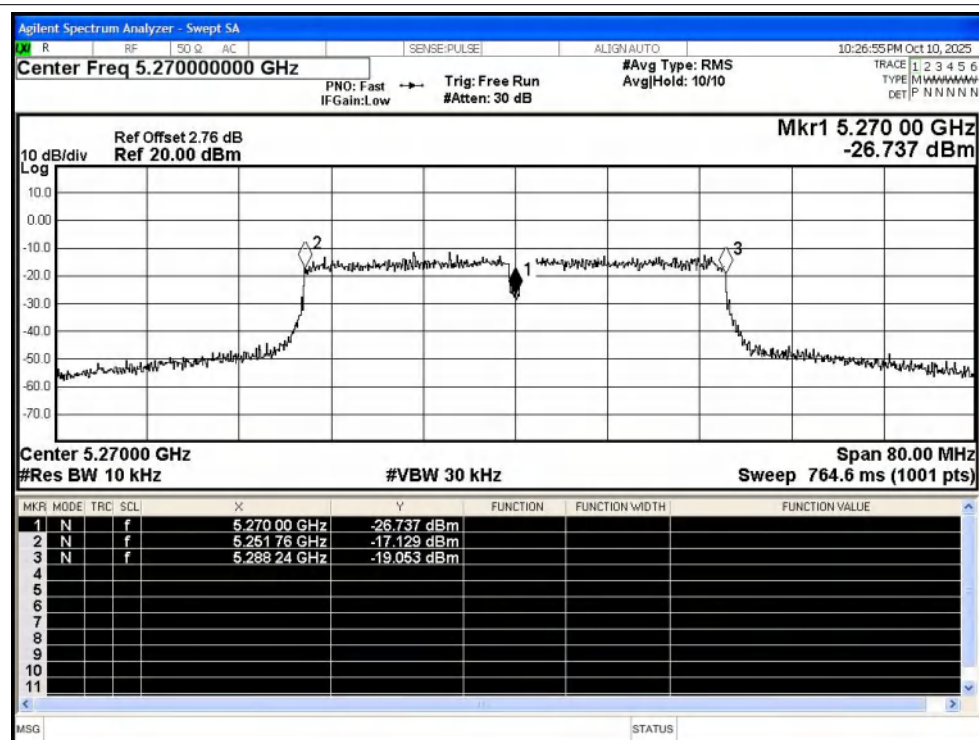


Freq. Stability NVNT n40 5310MHz Ant0

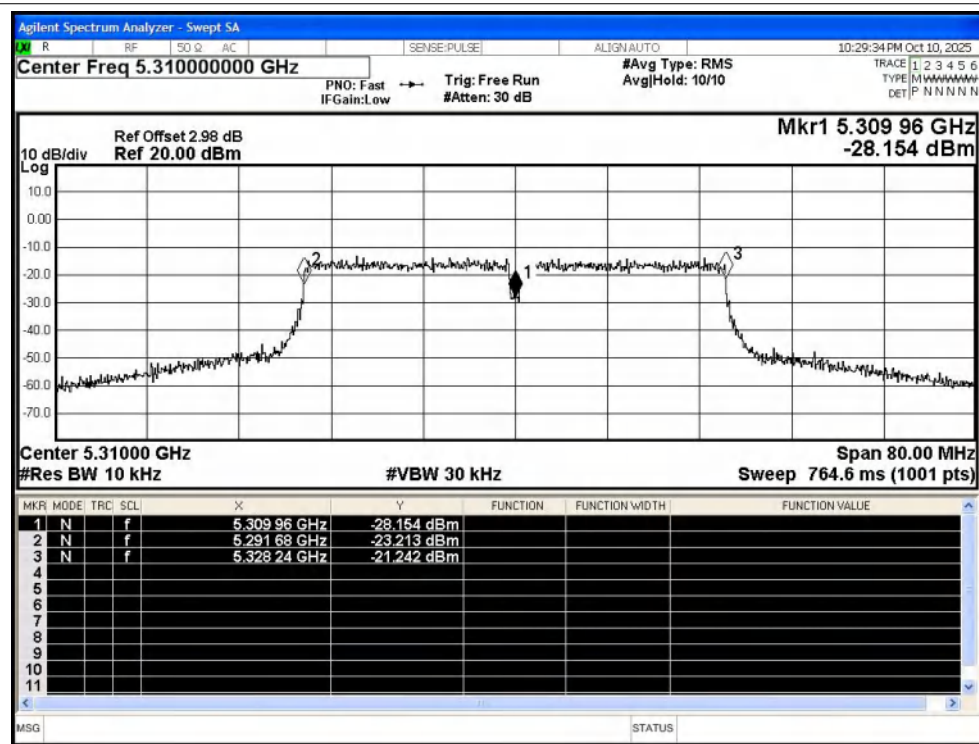

Freq. Stability NVNT ac20 5260MHz Ant0

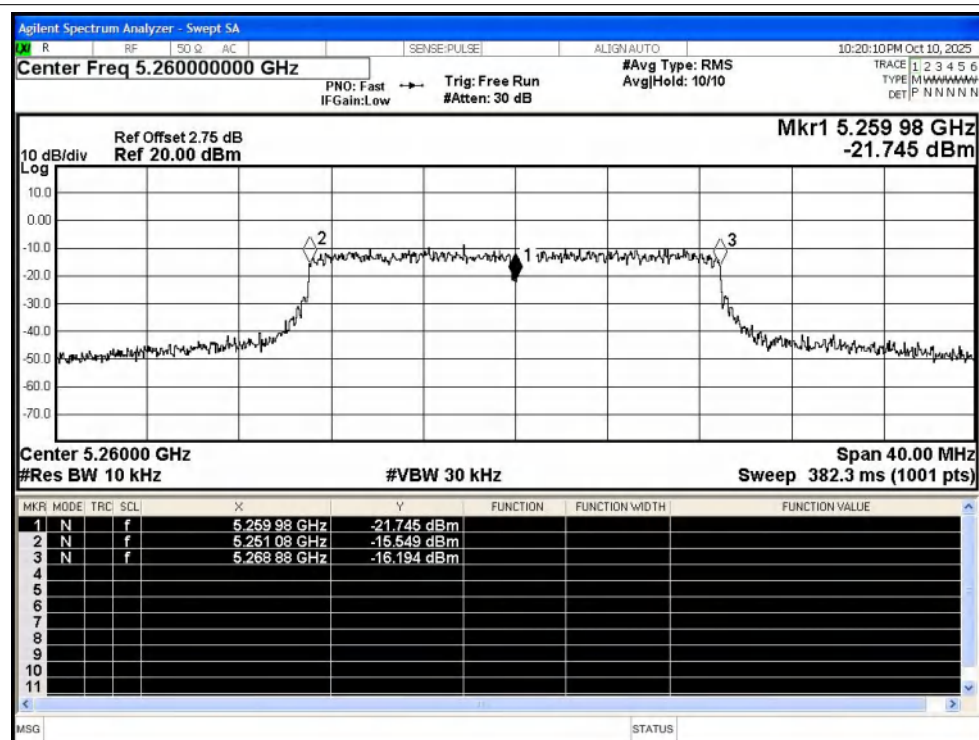


Freq. Stability NVNT ac20 5300MHz Ant0

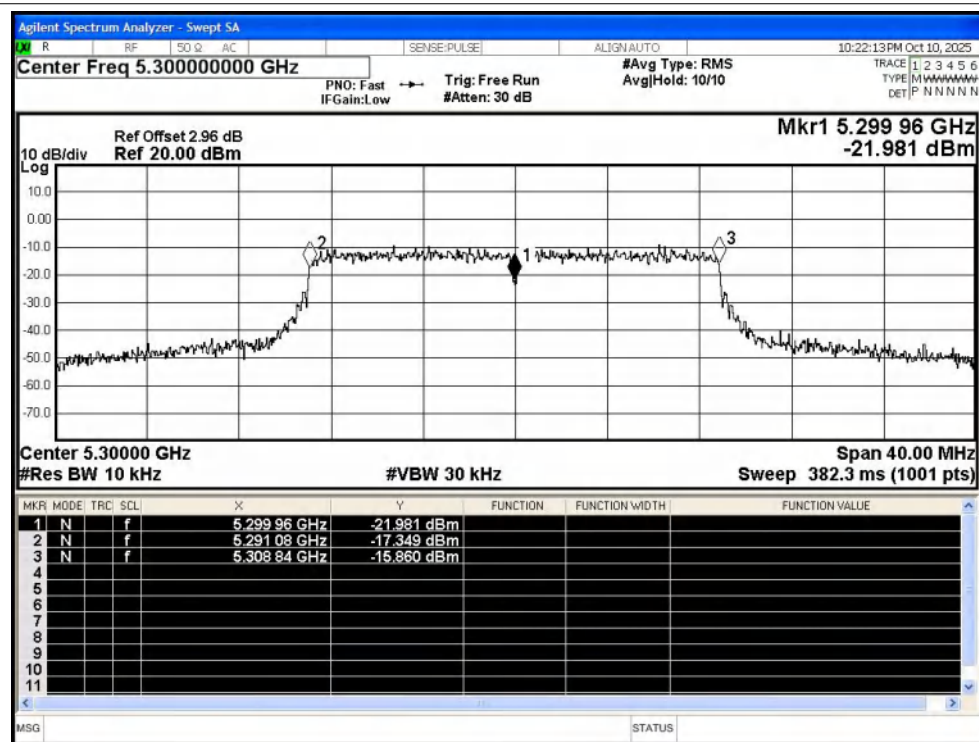


[illegible][illegible]

Freq. Stability NVNT ac40 5310MHz Ant0

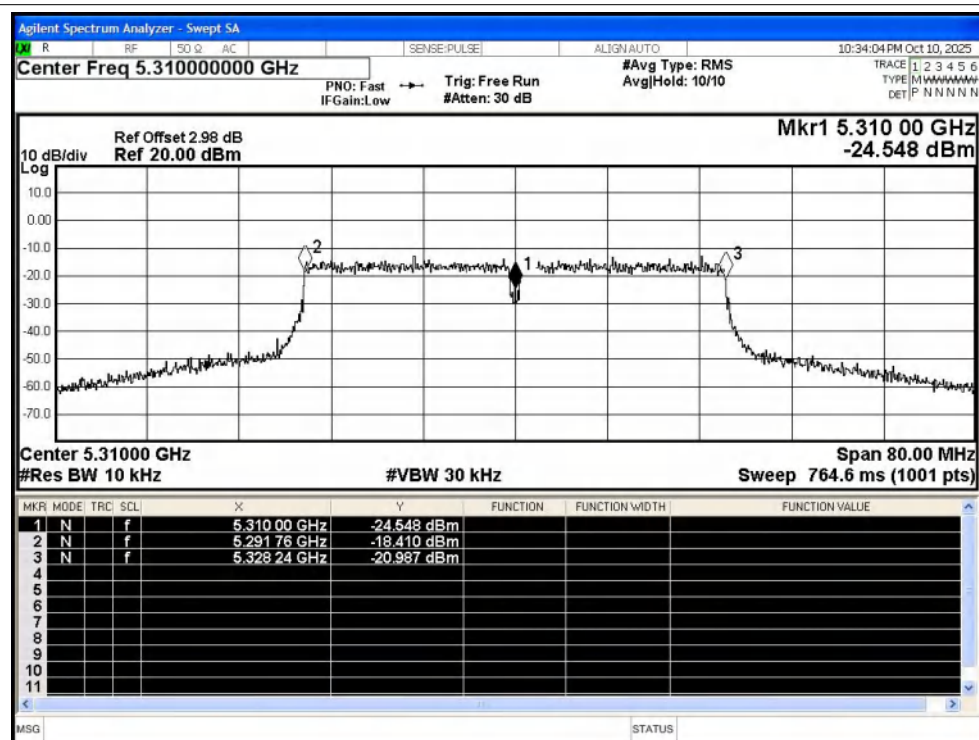


Freq. Stability NVNT ac80 5290MHz Ant0

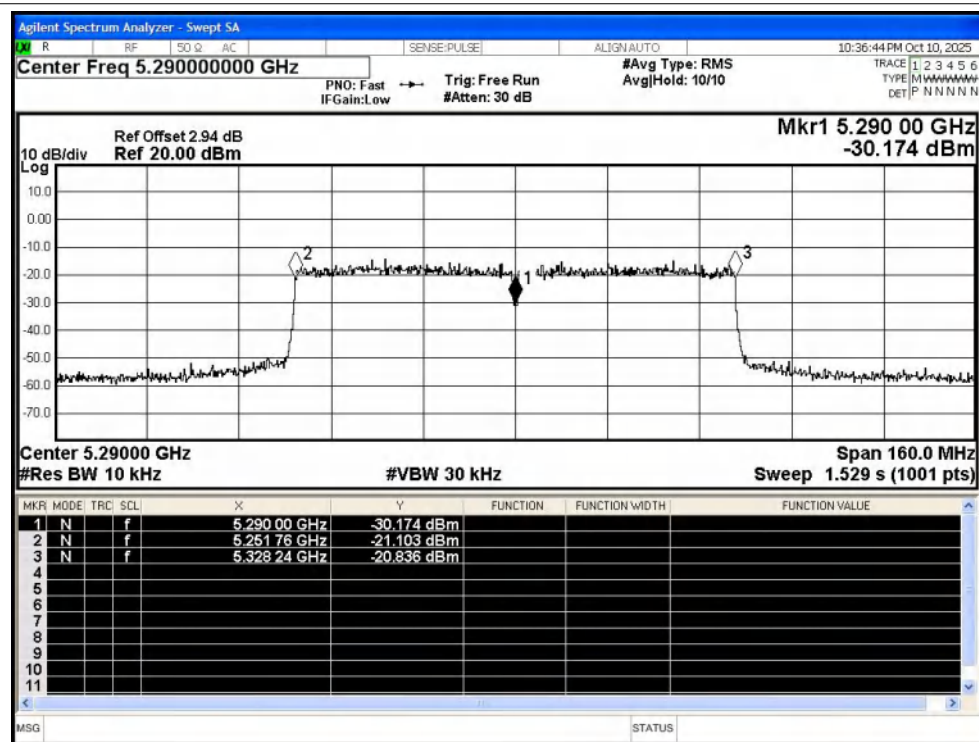

6. Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5260	Ant0	94.65	0.24	0.91
NVNT	a	5300	Ant0	94.65	0.24	0.91
NVNT	a	5320	Ant0	94.65	0.24	0.91
NVNT	n20	5260	Ant0	97.29	0.12	0.44
NVNT	n20	5300	Ant0	97.29	0.12	0.44
NVNT	n20	5320	Ant0	97.29	0.12	0.44
NVNT	n40	5270	Ant0	94.71	0.24	0.9
NVNT	n40	5310	Ant0	94.71	0.24	0.9
NVNT	ac20	5260	Ant0	97.34	0.12	0.44
NVNT	ac20	5300	Ant0	97.34	0.12	0.44
NVNT	ac20	5320	Ant0	97.3	0.12	0.44
NVNT	ac40	5270	Ant0	94.72	0.24	0.9
NVNT	ac40	5310	Ant0	94.72	0.24	0.9
NVNT	ac80	5290	Ant0	89.65	0.47	1.86

Duty Cycle NVNT a 5260MHz Ant0

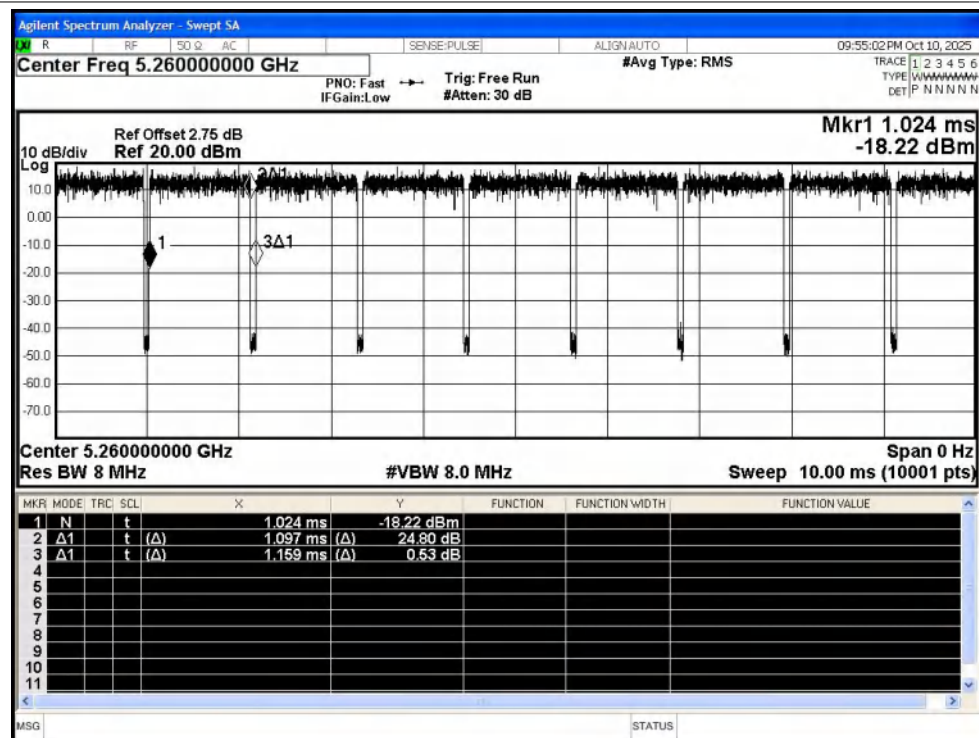[illegible]

Duty Cycle NVNT a 5320MHz Ant0

Agilent Spectrum Analyzer - Sweep SA

Center Freq 5.32000000 GHz

Ref Offset 2.99 dB
Ref 20.00 dBm

Mkr1 895.0 μ s
-3.26 dBm

Center 5.32000000 GHz
Res BW 8 MHz

#VBW 8.0 MHz

Sweep 10.00 ms (10001 pts)

Span 0 Hz

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	t		895.0 μ s	-3.26 dBm			
2	Δ 1	t	(Δ)	1.097 ms	-1.95 dB			
3	Δ 1	t	(Δ)	1.159 ms	-1.11 dB			
4								
5								
6								
7								
8								
9								
10								
11								

MSG


STATUS

[illegible]


[illegible][illegible]

[illegible][illegible]

Duty Cycle NVNT ac20 5260MHz Ant0

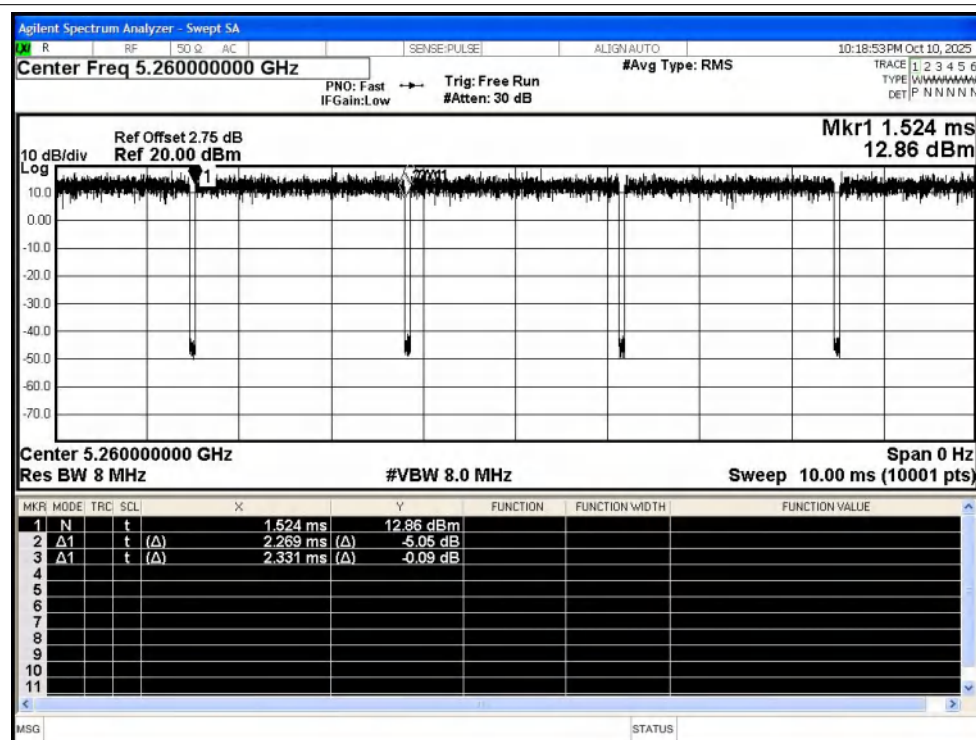


Duty Cycle NVNT ac20 5300MHz Ant0

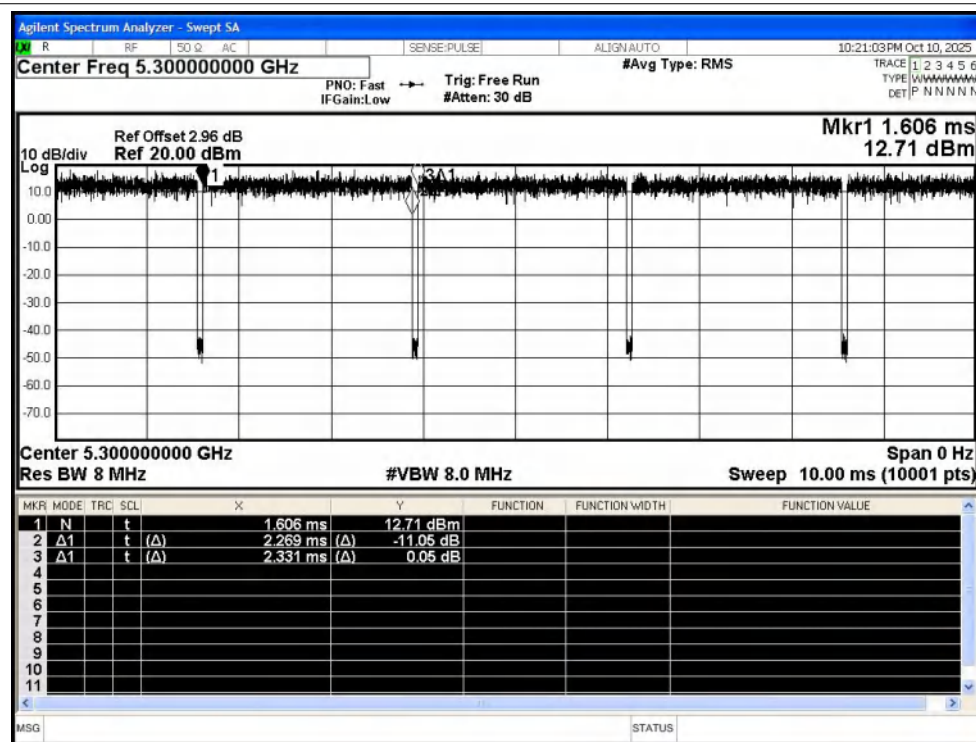

[illegible][illegible]

Duty Cycle NVNT ac40 5310MHz Ant0

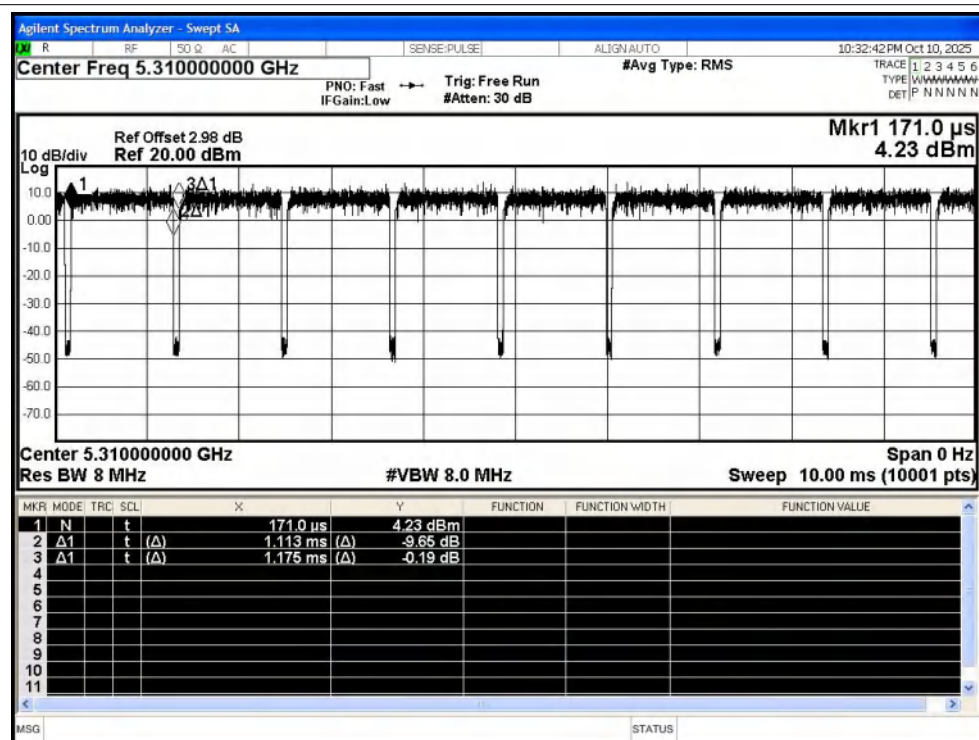

Duty Cycle NVNT ac80 5290MHz Ant0

