

REXING[®]

DT2

User Manual

The information in this manual is subject to change without notice.

Rexing All Rights Reserved

www.rexingusa.com

REV09022025

Activate Your

18-Month Warranty

& Unlock Exclusive Perks!

Activate within 30 days of purchase to
extend your limited 12-month warranty to 18 months
and unlock bonus rewards just for registered users.

Scan the QR to register &
discover your exclusive perks.

SCAN
ME!



<https://www.rexingusa.com/productreg/>

Overview

Thank you for choosing **REXING!**

We hope you love your new products as much as we do. If you need assistance, or have any suggestions to improve it, please contact us.

 **care@rexingusa.com**

 **(877) 740-8004**

Our support team will respond to you as soon as possible.

Always a surprise with Rexing

Check us out here.

- <https://www.facebook.com/rexingusa/>
- <https://www.instagram.com/rexingdashcam/>
- <https://www.rexingusa.com/support/registration/>

 Facebook



 Instagram




 Site




 Product Support




Package Contents

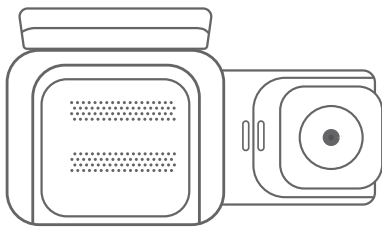


1

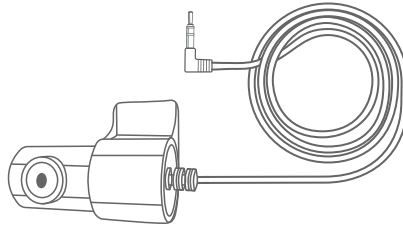

2



3




4




9




10




5




6



7




8




11

-
- | | |
|---------------------------------------|---------------------------|
| 1. Rexing DT2 Dash Cam | 7. Cable Management Tool |
| 2. Rear camera with rear camera cable | 8. Users Manual |
| 3. Card Reader | 9. 32GB SD Card |
| 4. 3M Adhesive | 10. Warning Sticker |
| 5. Cable Clips | 11. Electrostatic Sticker |
| 6. Car Charger | |
-

Camera Overview

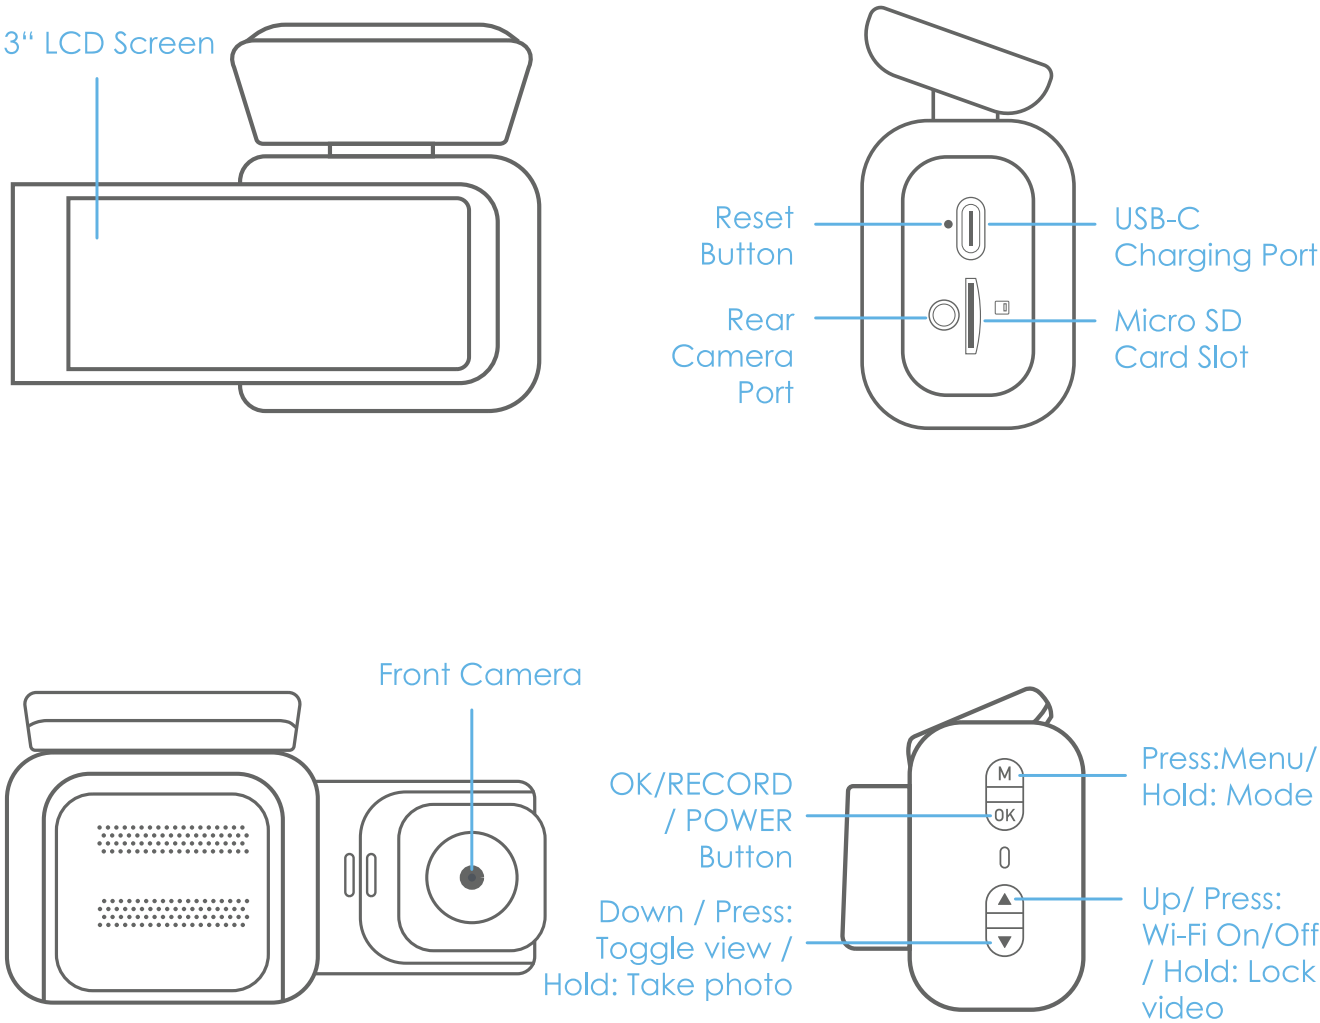

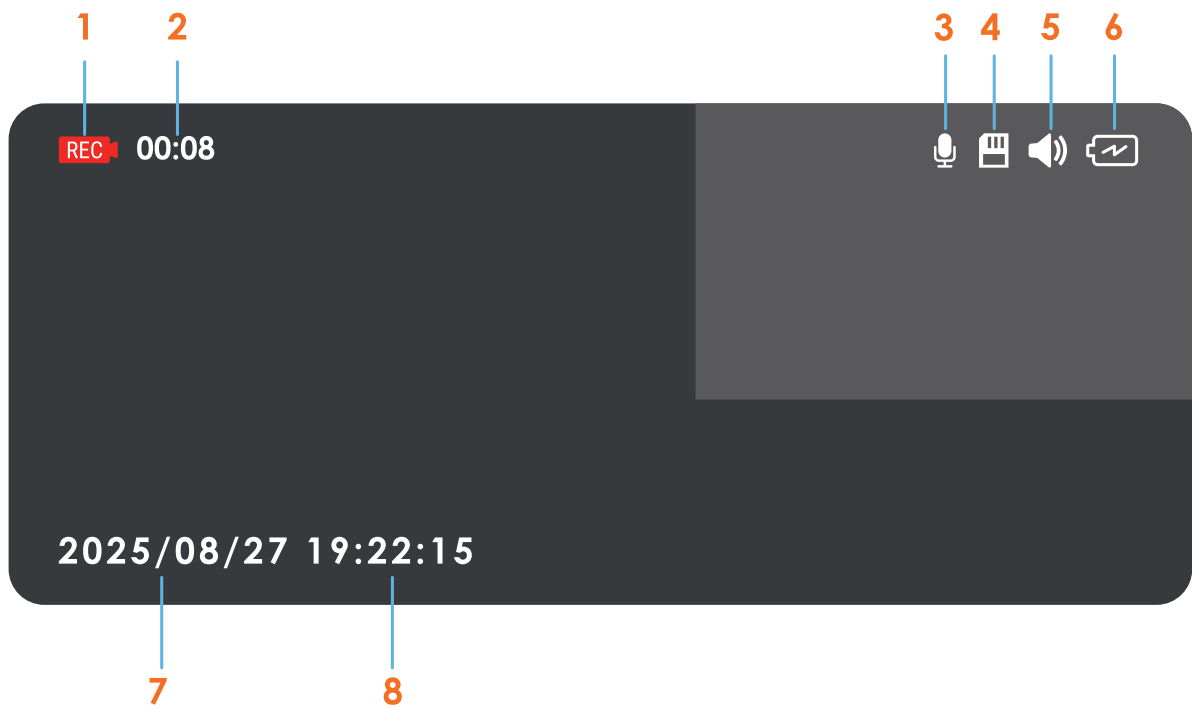

-
- | | |
|----------------------------------|----------------------|
| 1. Recording (On) | 5. Volume |
| 2. Recording Time (Current Clip) | 6. Power (Connected) |
| 3. Mic (On) | 7. Current Date |
| 4. Memory Card (Inserted) | 8. Current Time |
-

*** Please connect a Smart Hardwire Kit or an Intelligent Hardwire Kit to activate the parking monitor feature.

Get Started

Step 1

Installing Adhesive Mount

Place the 3M adhesive on the mount plate and properly orient the mount piece to the roof and hood line of the vehicle.

Step 2

Installing the Electrostatic Stickers

2.1 Prepare Your Windshield


Thoroughly cleanse your windshield with either water or alcohol. Follow this by wiping it dry using a clean, dry cloth to ensure a spotless surface.

2.2 Position the Sticker

Next, carefully peel off the protective film from the electrostatic sticker. Attach the sticker to the windshield, ideally behind the rear-view mirror. This position is recommended to avoid obstructing your view while you're on the road.

2.3 Secure the Mount and Camera

Now, remove the 3M tape from the mount. Once done, you can proceed to fix both the mount and camera onto the previously positioned electrostatic stickers.


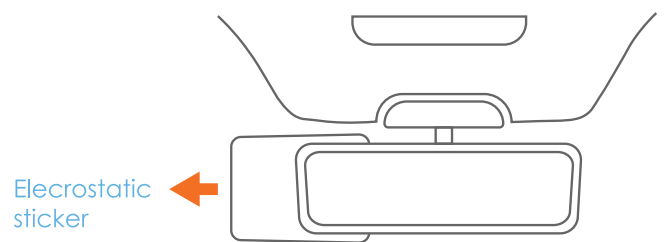


Note: Be sure to handle each component with care and follow the guidelines in their respective order. This is to ensure optimal performance of the sticker, the mount, and the camera.

Step 3

Mount the Rear Camera

Mount the rear camera as shown below. Use the included rear camera cable to connect the rear camera to the front camera.

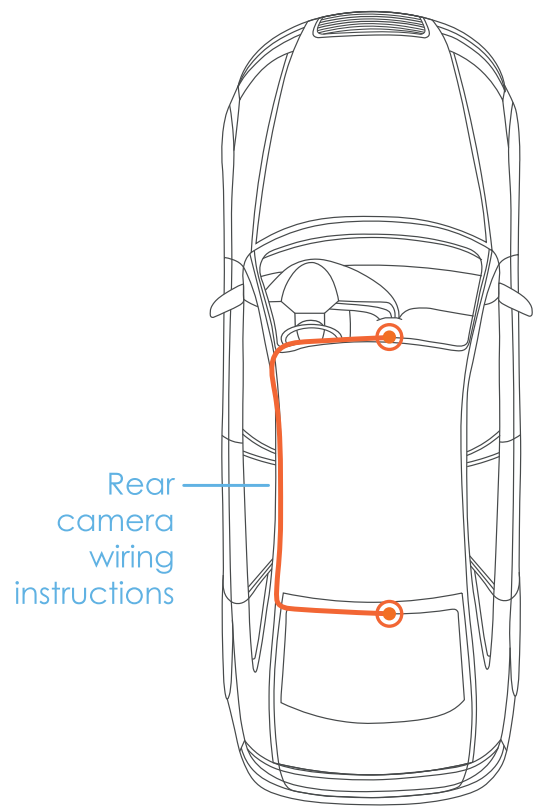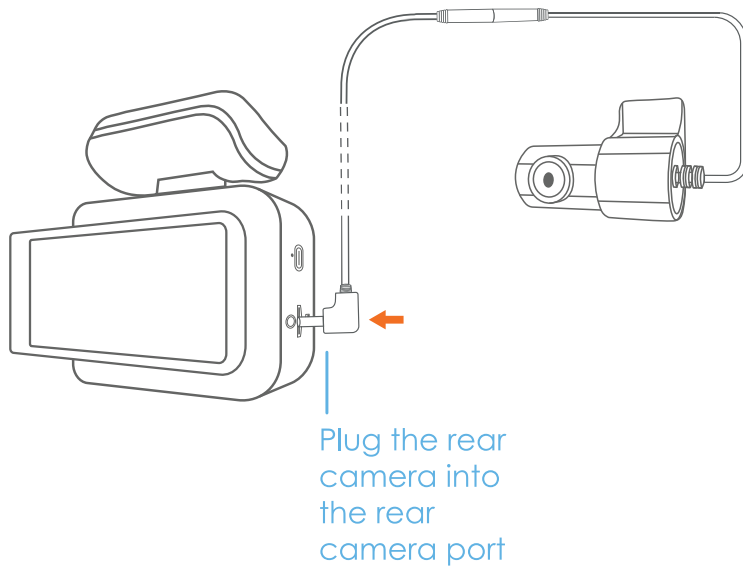



Step 4

Insert the Memory Card

The Rexing DT2 accepts Class 10/ UHS-1 or higher Micro SD memory cards up to 128GB. You will need to insert a memory card before recording.

Before inserting or removing a memory card, ensure you've powered down the device.

Gently push the memory card in until you hear a click, and allow the spring release to push the card out.

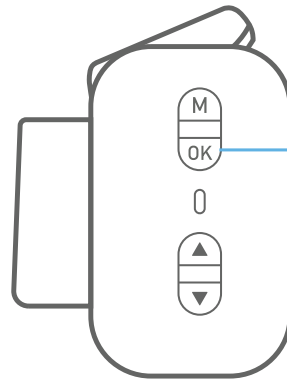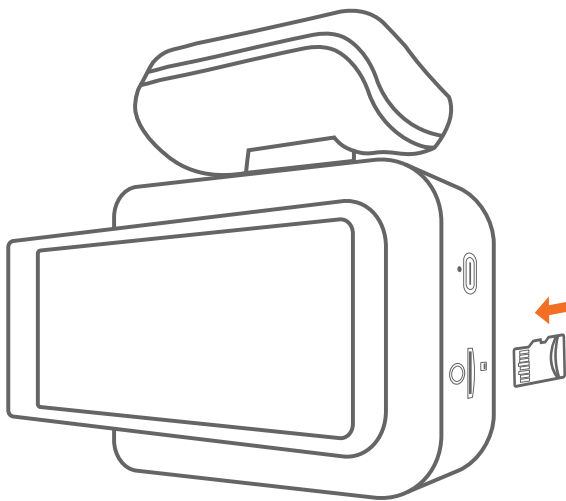


Hold the OK button for about 3 seconds to turn the power off first

Step 5

Power on the Camera and Format the Memory Card

Power the camera by connecting the charger to the car cigarette lighter and the camera.

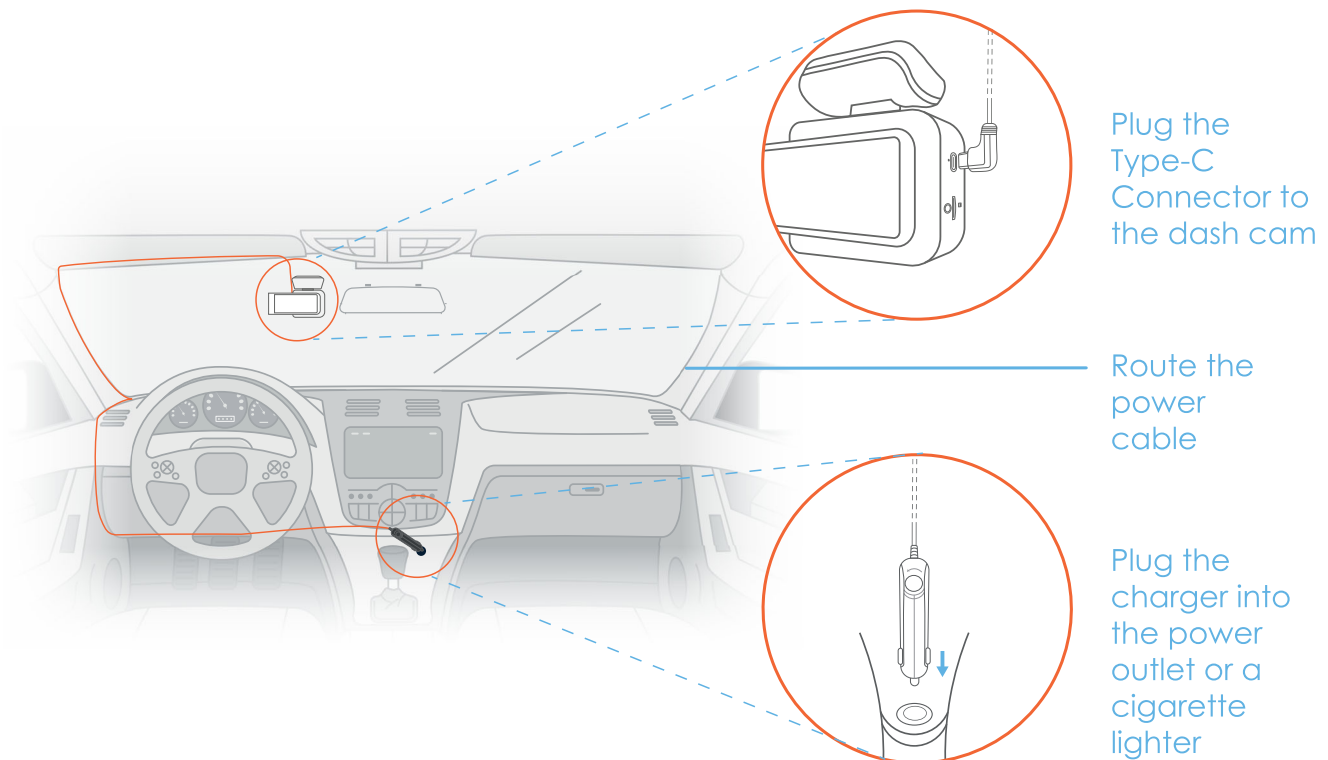

The camera will shut down after 3 seconds when it's disconnect from the power source and it should begin recording automatically the next time it is powered on.


To ensure the DT2 records to your memory card properly and without error, we strongly recommend you to **format the card within the camera when you're using the dash cam for the first time.**

Note:


Always remember backup important data stored on the memory card before formatting.

To format the memory card, first press the **OK** button to stop recording. Then press the **MENU** button twice to enter the Setup Settings. Use the **▲** and **▼** buttons and toggle to the Format. Press the **OK** button to confirm the format.

Press the **MENU** button twice

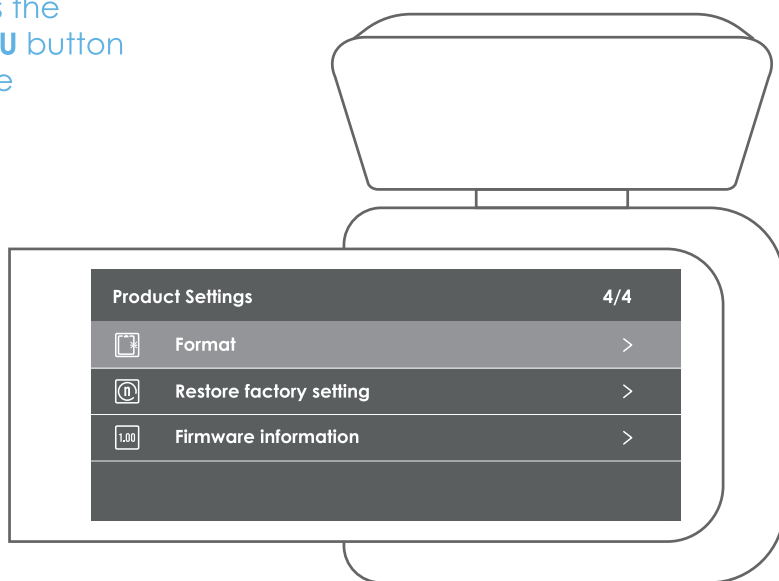

Press the **OK** button to confirm formatting the memory card

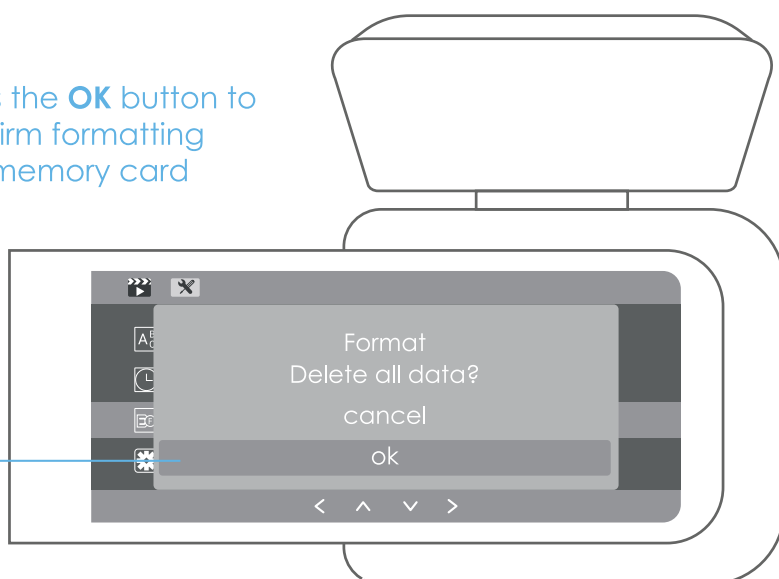


Basic Operation

Device Power

The device is automatically powered on when plugged into a 12V accessory socket or cigarette lighter and receives a charge (i.e.: the vehicle is started).

To turn the device on manually, press and hold the **OK** button until the welcome screen appears.

The camera will automatically start recording when power on.

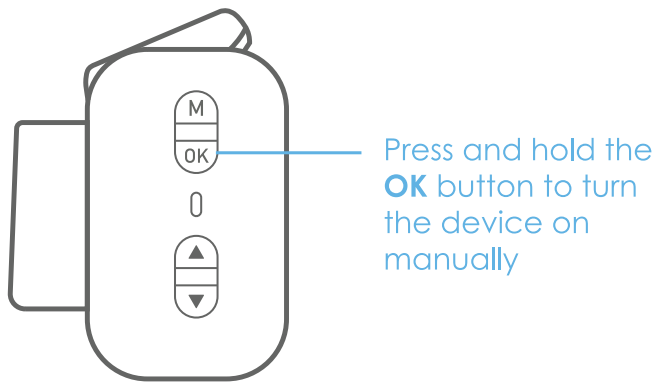


Menu Settings

Power the camera on, then press the **OK** button to stop recording. Press the **MENU** button and switch among video mode, image mode and playback mode.

Press the **MENU** button once to enter the Video Settings, or press the **MENU** button twice to enter the Setup Settings menu.


Press the **OK** button
to enter the desired
setting menu

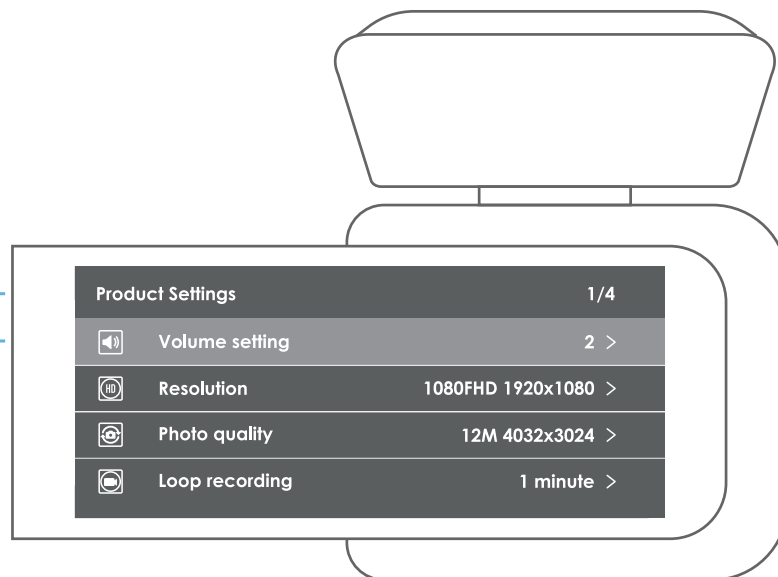

Press **UP/DOWN**
Button to select
settings

Video Recording

The camera will automatically start recording when the device receives a charge. The LED lights and the red dot will blink when the device is recording. Press the **OK** button to stop recording.

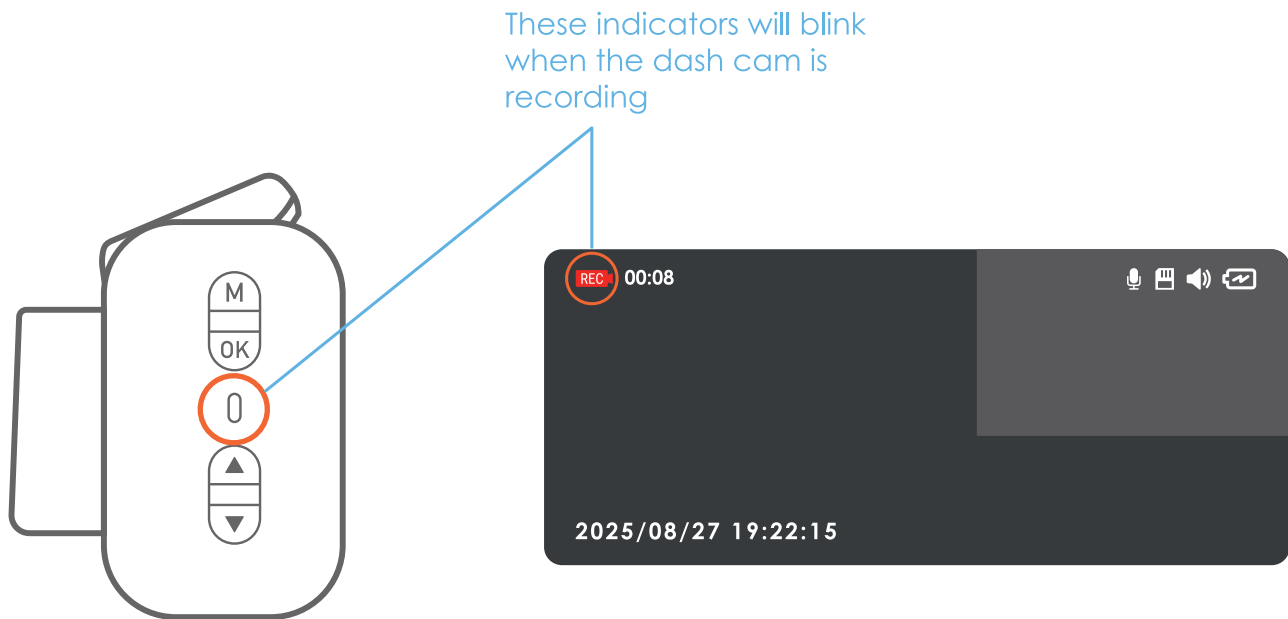

Rexing Connect App

Easily download the app by scanning the QR code below or search via the App Store or Google Play



Wi-Fi Connect Troubleshooting

If you bring up the Rexing Connect app and cannot connect your phone to the dash cam please go to <https://www.rexingusa.com/wifi-connect/> OR scan the QR code below.



Wi-Fi Connect

Step 1



With the dash cam powered on, Wi-Fi enters standby mode automatically. If Wi-Fi is off, press the **UP** button to activate it.



Step 2

On your mobile device, navigate to your Wi-Fi settings. Connect to your dash cam's Wi-Fi by tapping its name (DT2_XXXXXX) when it appears. Enter your dash cam's Wi-Fi password (default: 12345678) if you are prompted to do so.


Note: On some mobile devices, you may have to try to connect more than once. To ensure you've successfully connected, your mobile device's screen should resemble the examples shown.

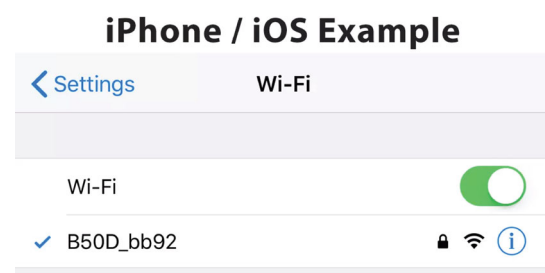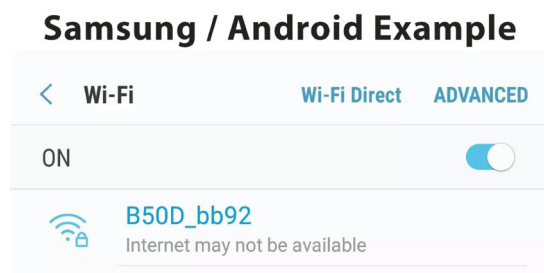

Step 3

Once you're connected to the dash cam, open the Rexing Connect app on your mobile device.

Please select "Keep Trying Wi-Fi" if you see the notification on the right.

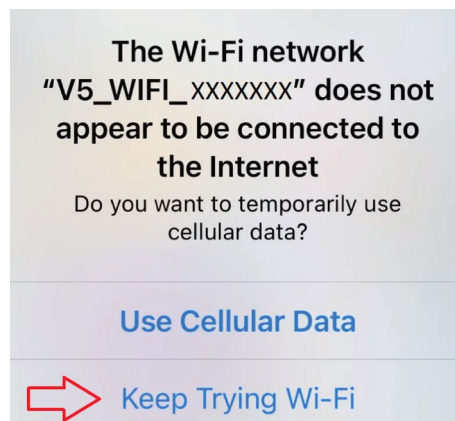

Step 4


In the app, hit the "Connect" button to connect to your dash cam, allowing you to access live view and view/download your recordings.

Note: Turn off your phone's Wi-Fi to disconnect. The dash cam's Wi-Fi will automatically turn off after 5 minutes of inactivity.


Video Playback

To playback a video on the device, press the **OK** button to stop recording. Press and hold the **MENU** button twice to enter the Playback mode. Use the **▲** and **▼** buttons to toggle to the desired video. Press the **OK** button to play.

During playback, use the **OK** (pause), **▼** (fast forward) and **▲** (rewind) buttons to control the video playback.

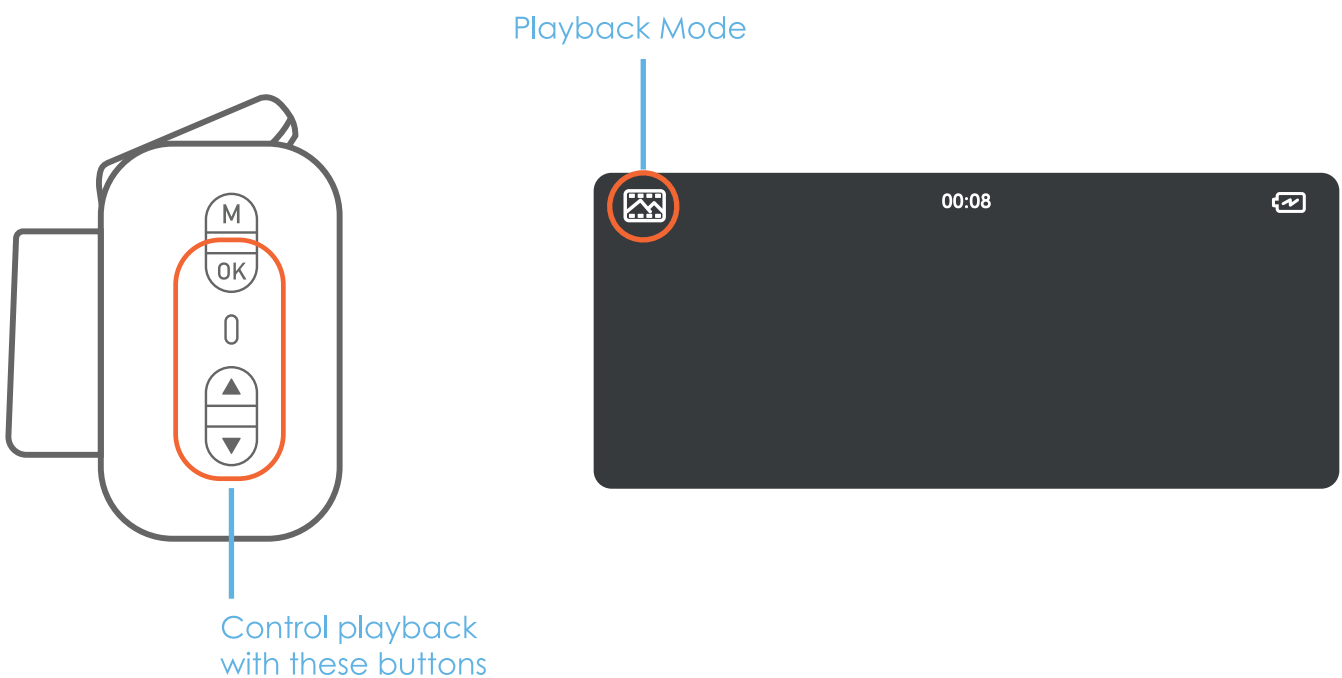

To playback a video by using an SD card reader, remove the memory card and insert it into an SD card adapter. Place the adapter in the computer.

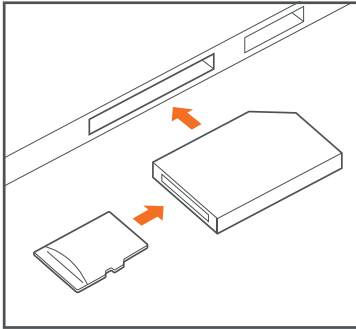

You can also use a USB card reader to transfer the files directly.


Parking Monitor (Parking Surveillance Mode)

Parking monitor provides surveillance on your parked vehicle. When the engine is off, the hardwire kit is used to provide continuous power and protect your car battery from being discharged.

Vibration Detection

To enable the Parking Monitor, you'll need to connect it with a Smart Hardwire Kit or an OBD Smart Hardwire Kit (sold separately).

Note: The OBD Smart Hardwire Kit only needs to be connected to the OBD port and does not require connection to the fuse box.

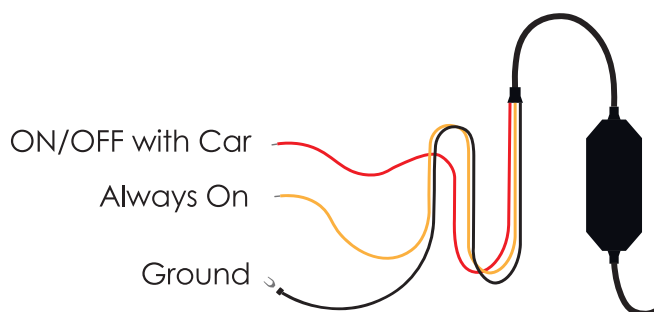

This feature will allow the dash cam to switch to parking mode automatically if the vehicle's engine turns off and switch back to the normal recording after the vehicle's engine turns on.

Gravity Sensing Record:

The Gravity Sensing detects significant or sudden movement (such as an impact or collision), it will trigger an event recording.

Please DO NOT ENABLE the Parking Monitor function in the settings of the dash cam WITHOUT connecting a smart hardwire kit. They may cause a malfunction.

Please go to <https://www.rexingusa.com/hwk-install/>

to watch a video tutorial about the installation or scan the QR code below.



Taking and Reviewing Photos

To take a photo, Hold Down button to take a photo.

To view/delete a photo, stop video recording and enter the Playback Mode. Toggle through the videos and photos to the one you want to view/delete. Press the **MENU** button once and toggle to the Delete option. Press the **OK** Button and select Delete Current or Delete All.

Warranty & Support

Warranty

The Rexing DT2 comes with a full 12-month warranty. If you register your product on our official site (<https://www.rexingusa.com/support/registration>), you can extend the warranty to 18 months.

Support

If you have any questions regarding your product, please do not hesitate to contact us at care@rexingusa.com, or call us at (877) 740-8004. Queries are typically answered within 12-24 hours.

Your opinion matters

Rexing is firmly committed to always improving our products, services, and user experience. If you have any thoughts on how we can do even better, we welcome your constructive feedback and suggestions.

Connect with us today at care@rexingusa.com

Thank you for choosing Rexing!

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.