
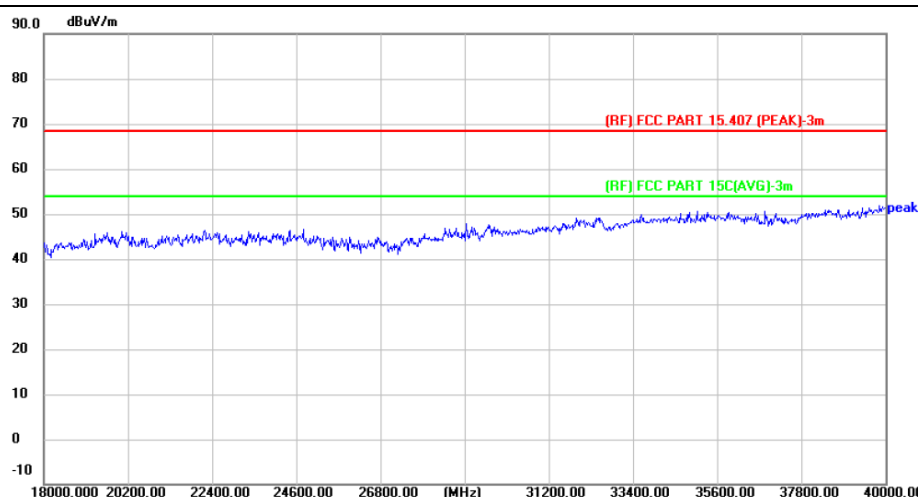


Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11a Mode 5500MHz		

Horizontal

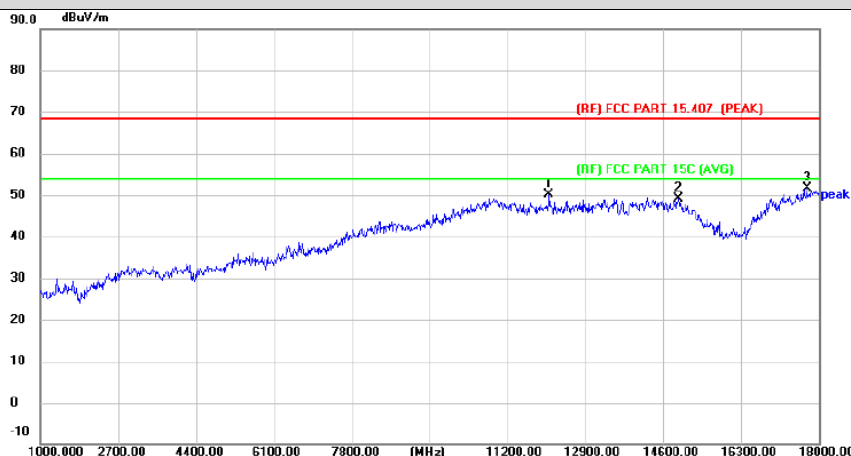



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	12101.000	40.76	9.39	50.15	68.30	-18.15	peak	P
2	14923.000	37.85	11.36	49.21	68.30	-19.09	peak	P
3 *	17728.000	35.49	16.15	51.64	68.30	-16.66	peak	P


Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.




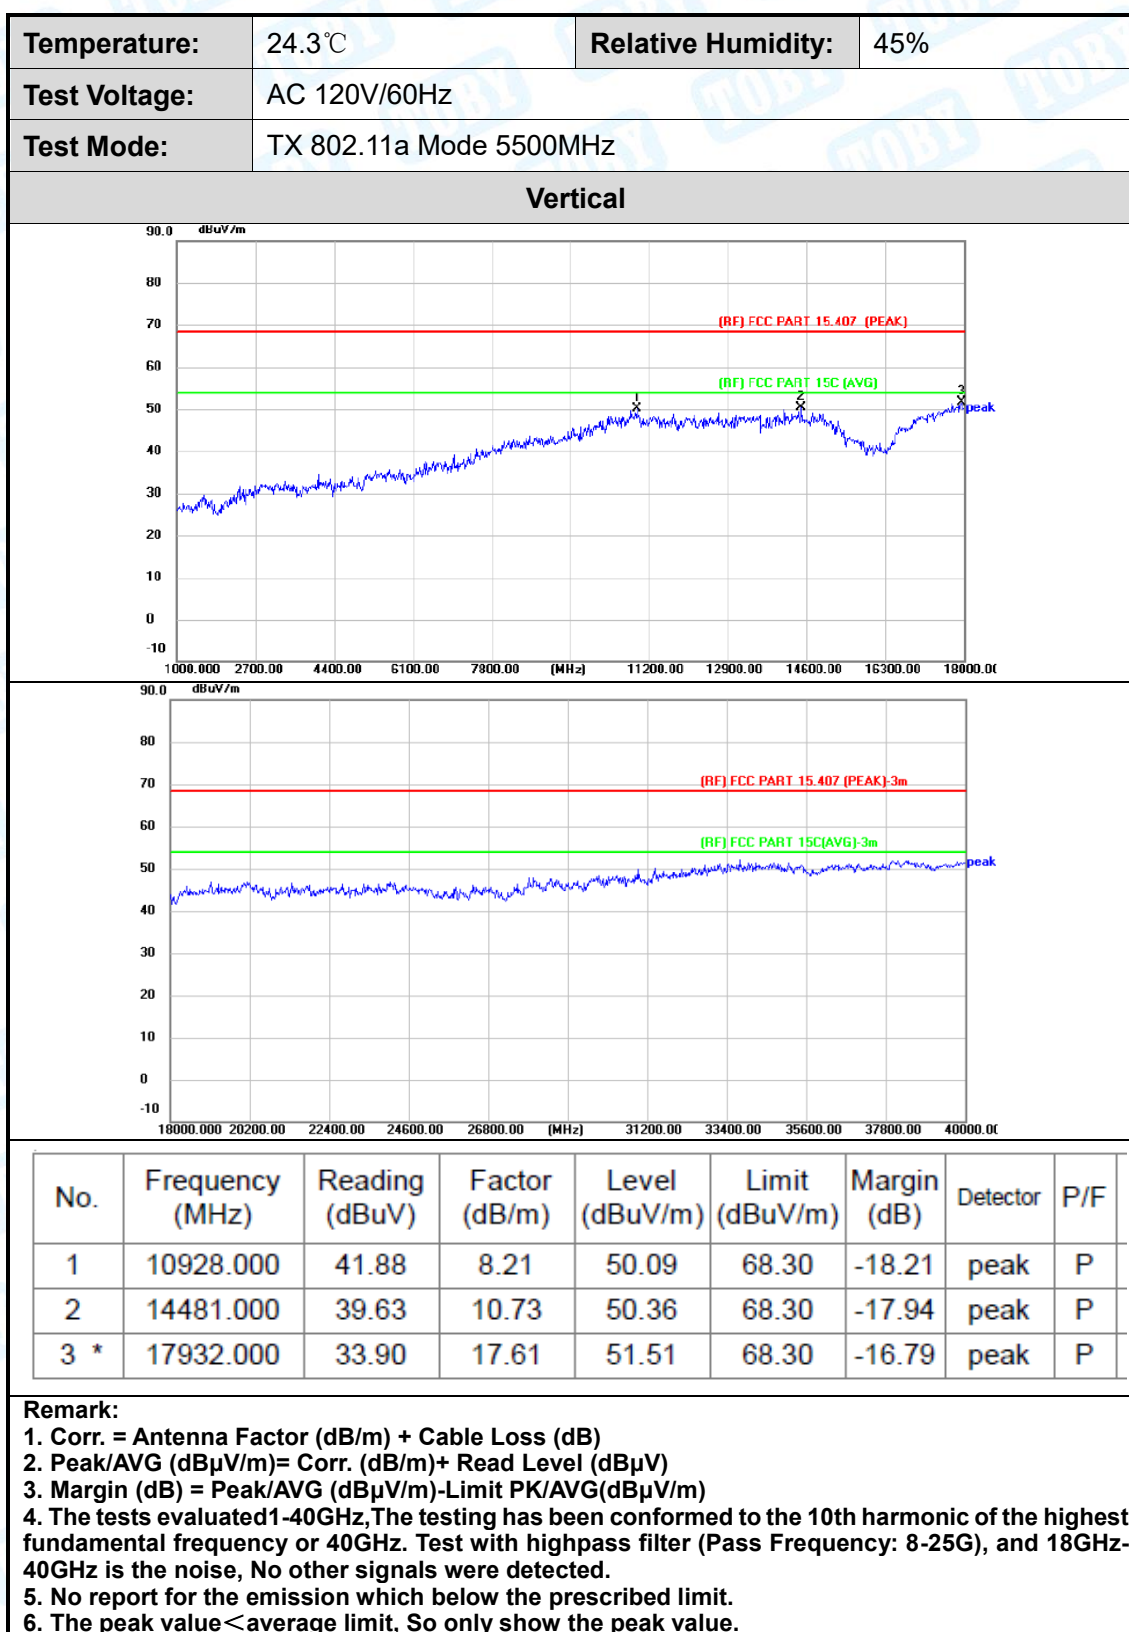


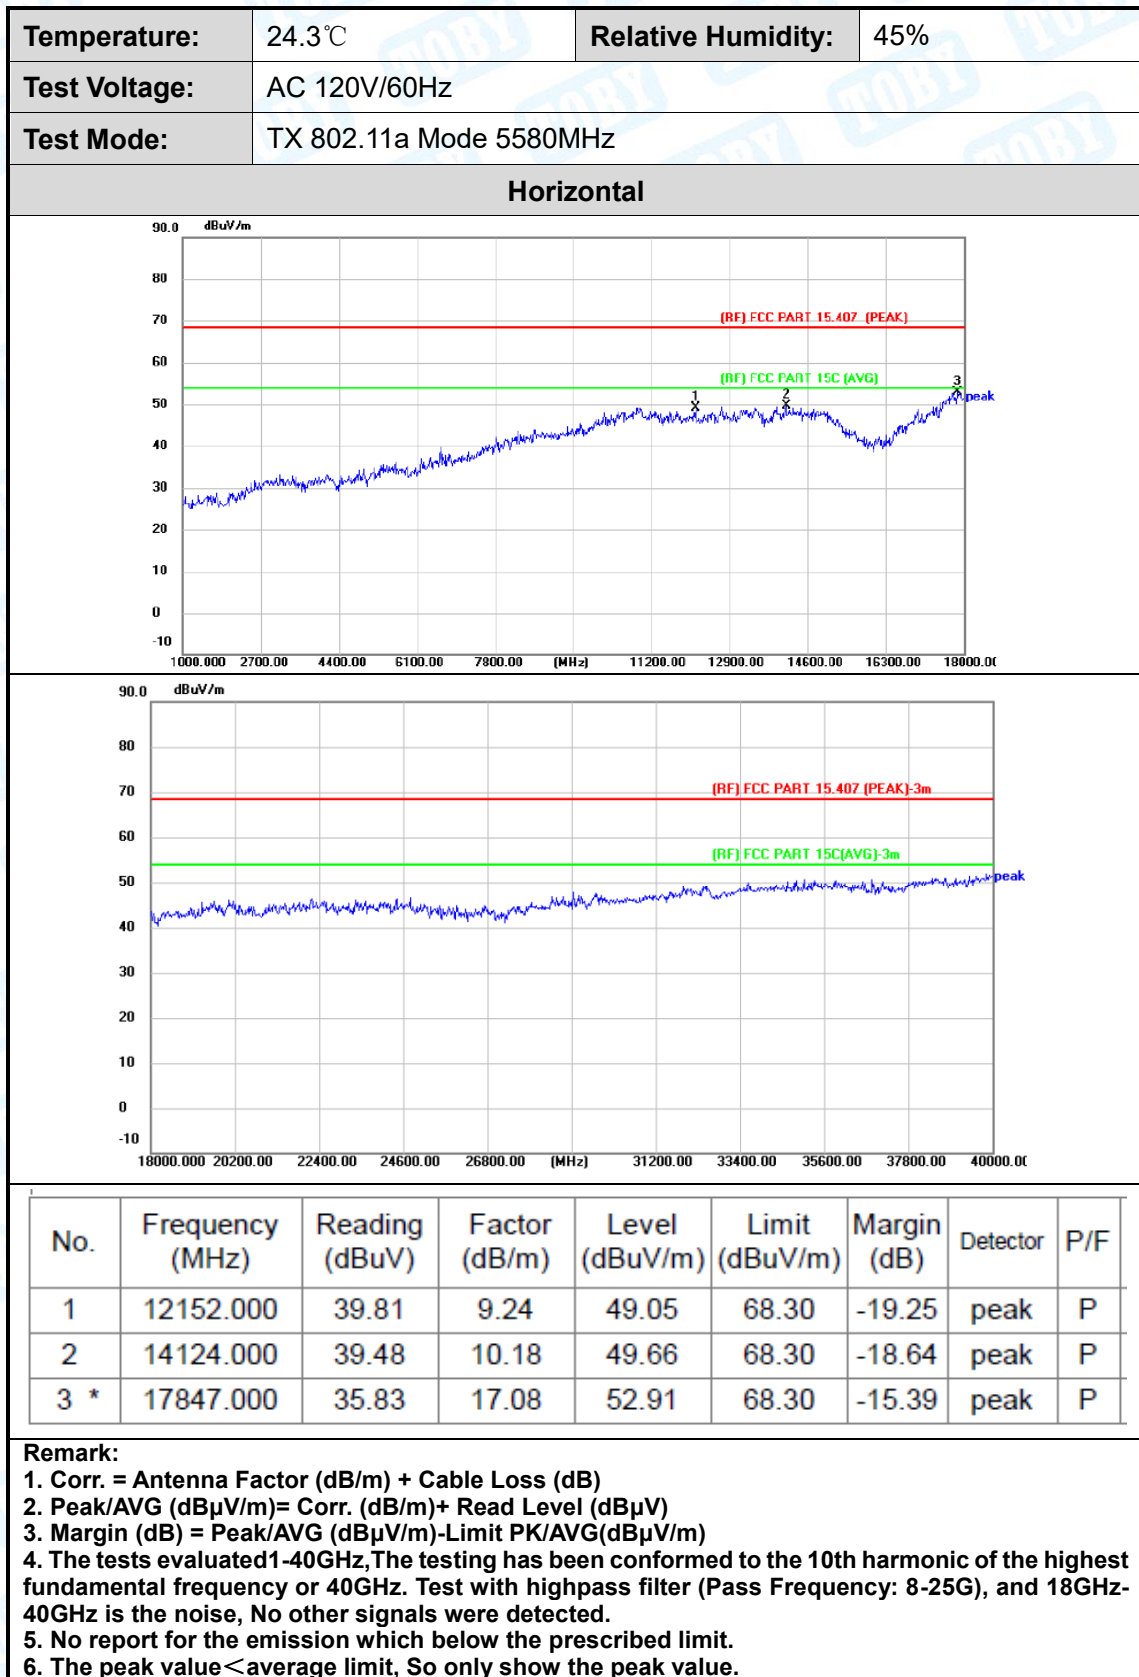


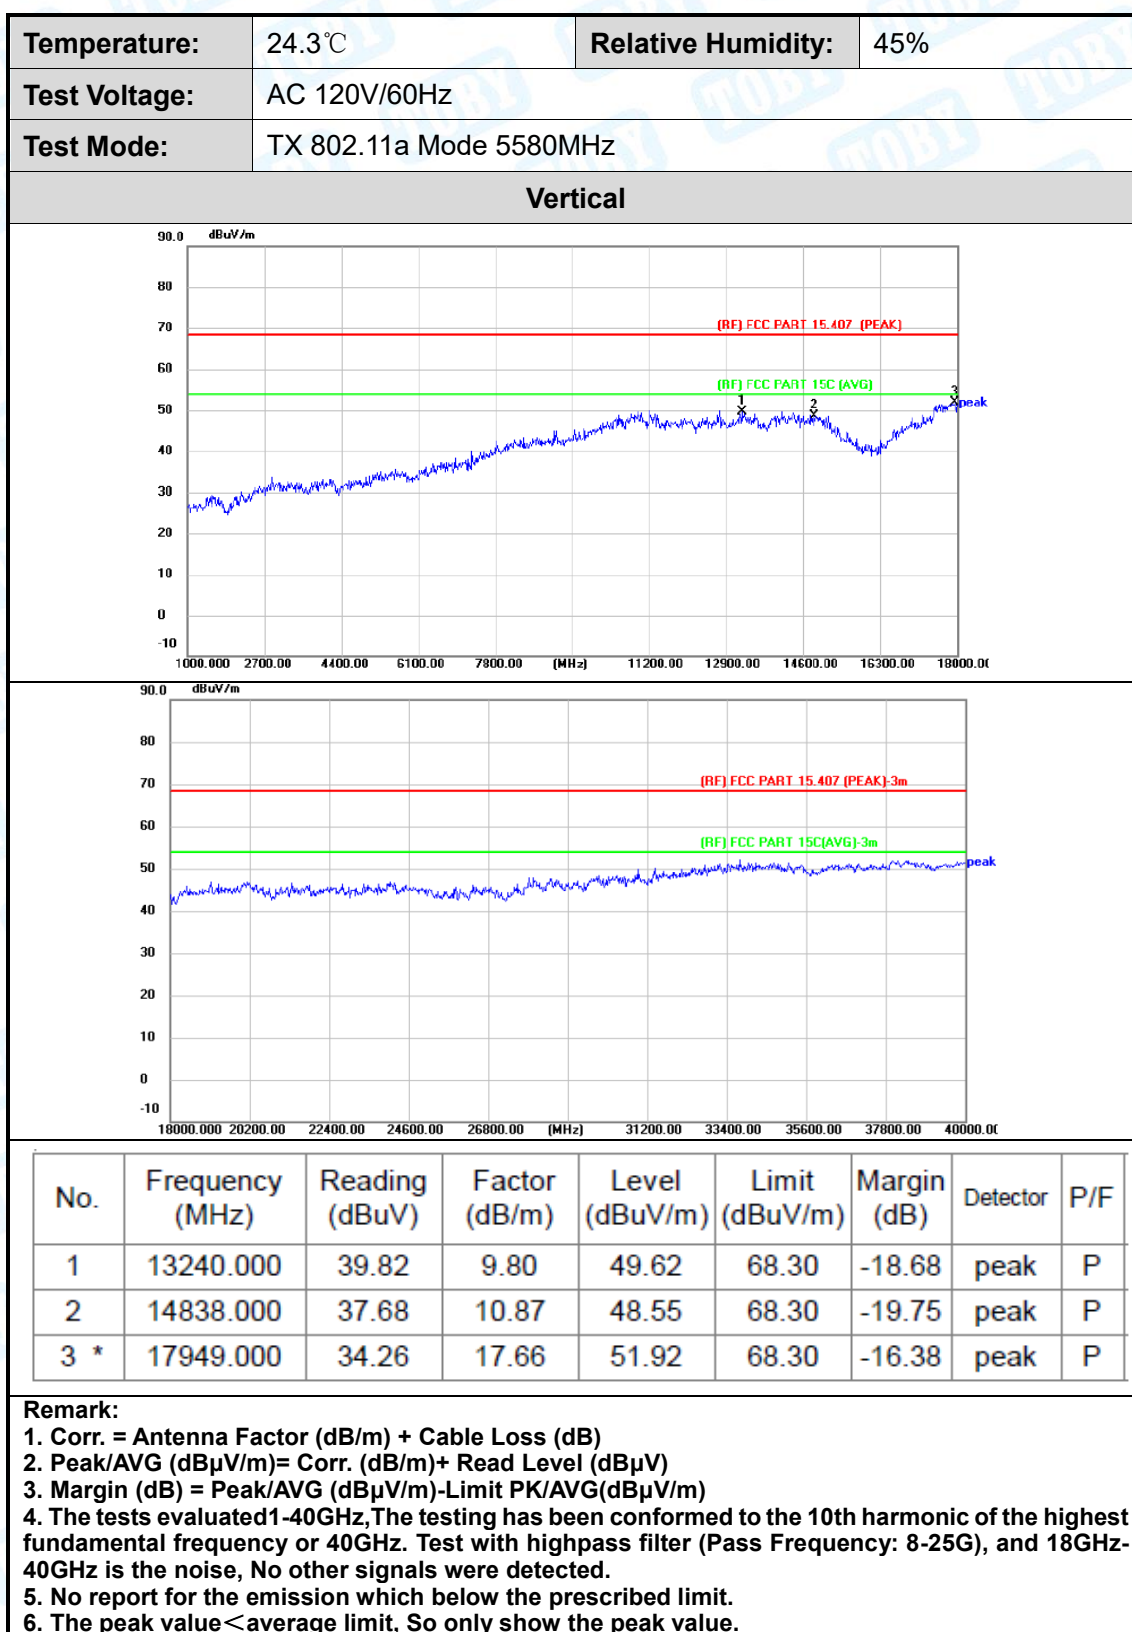


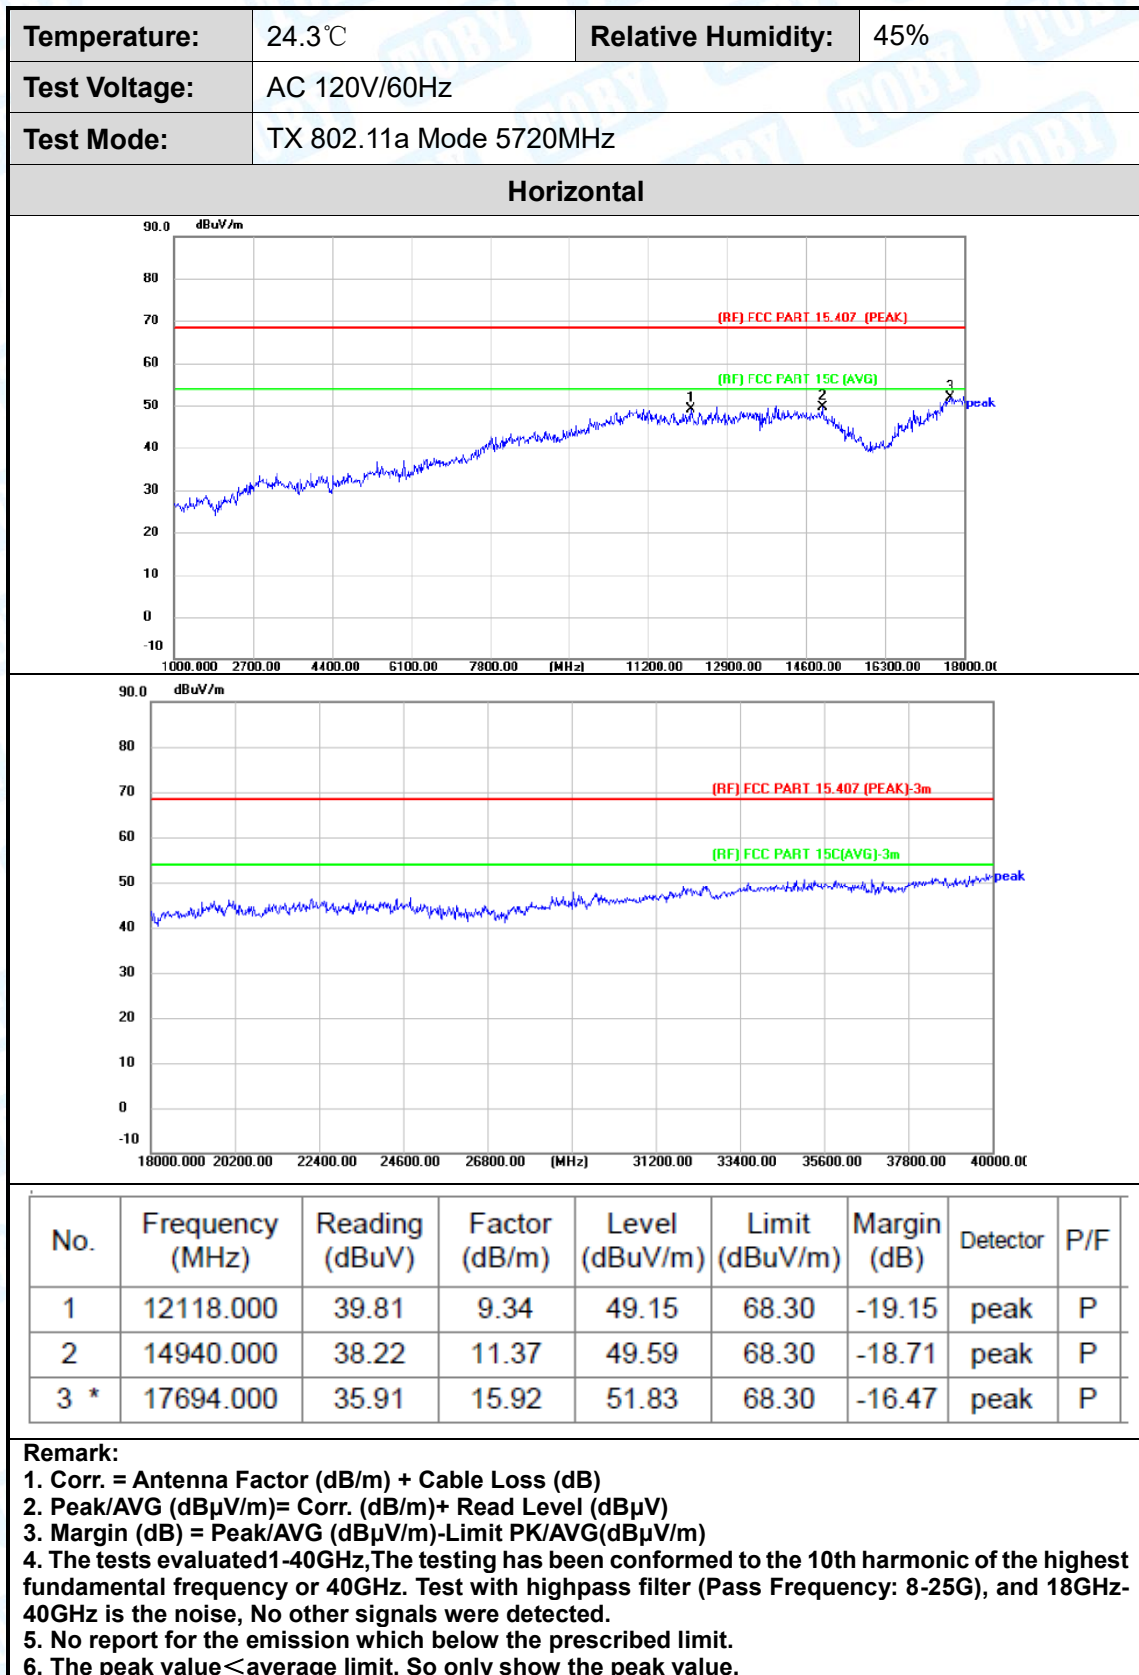


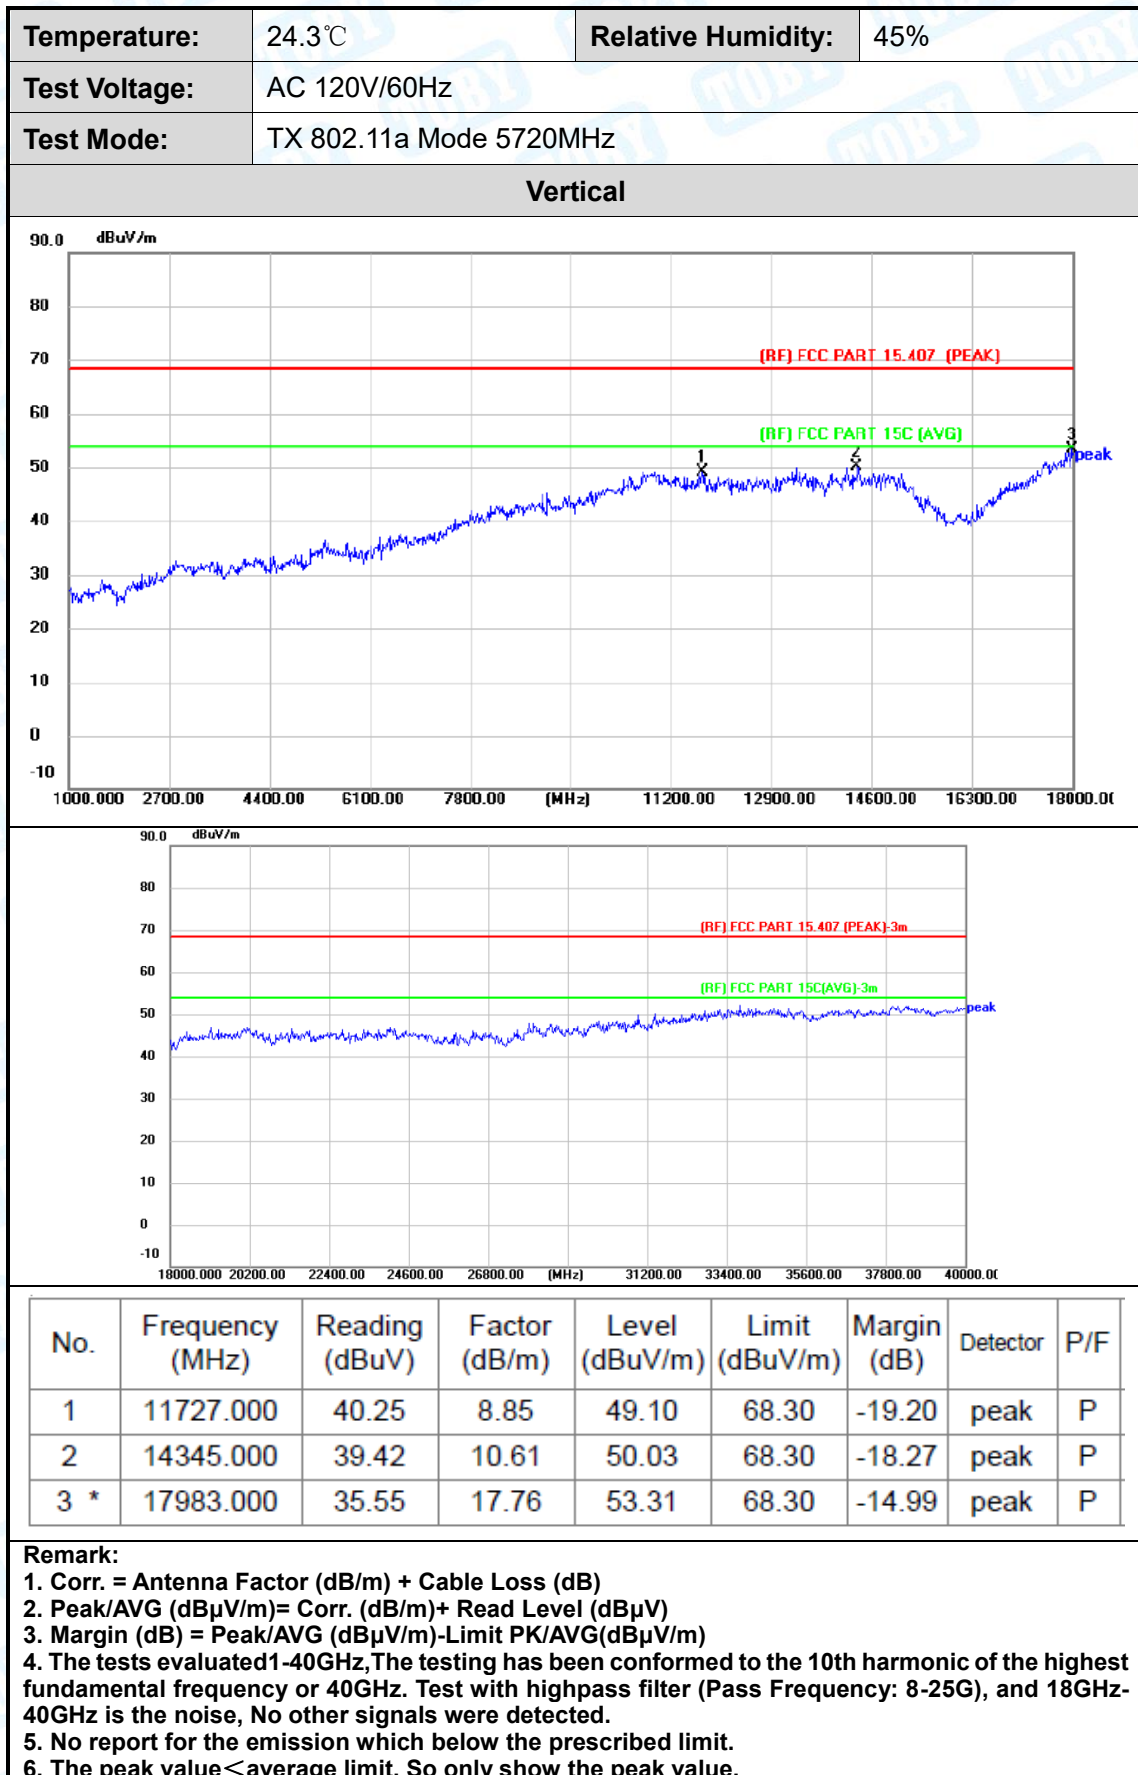


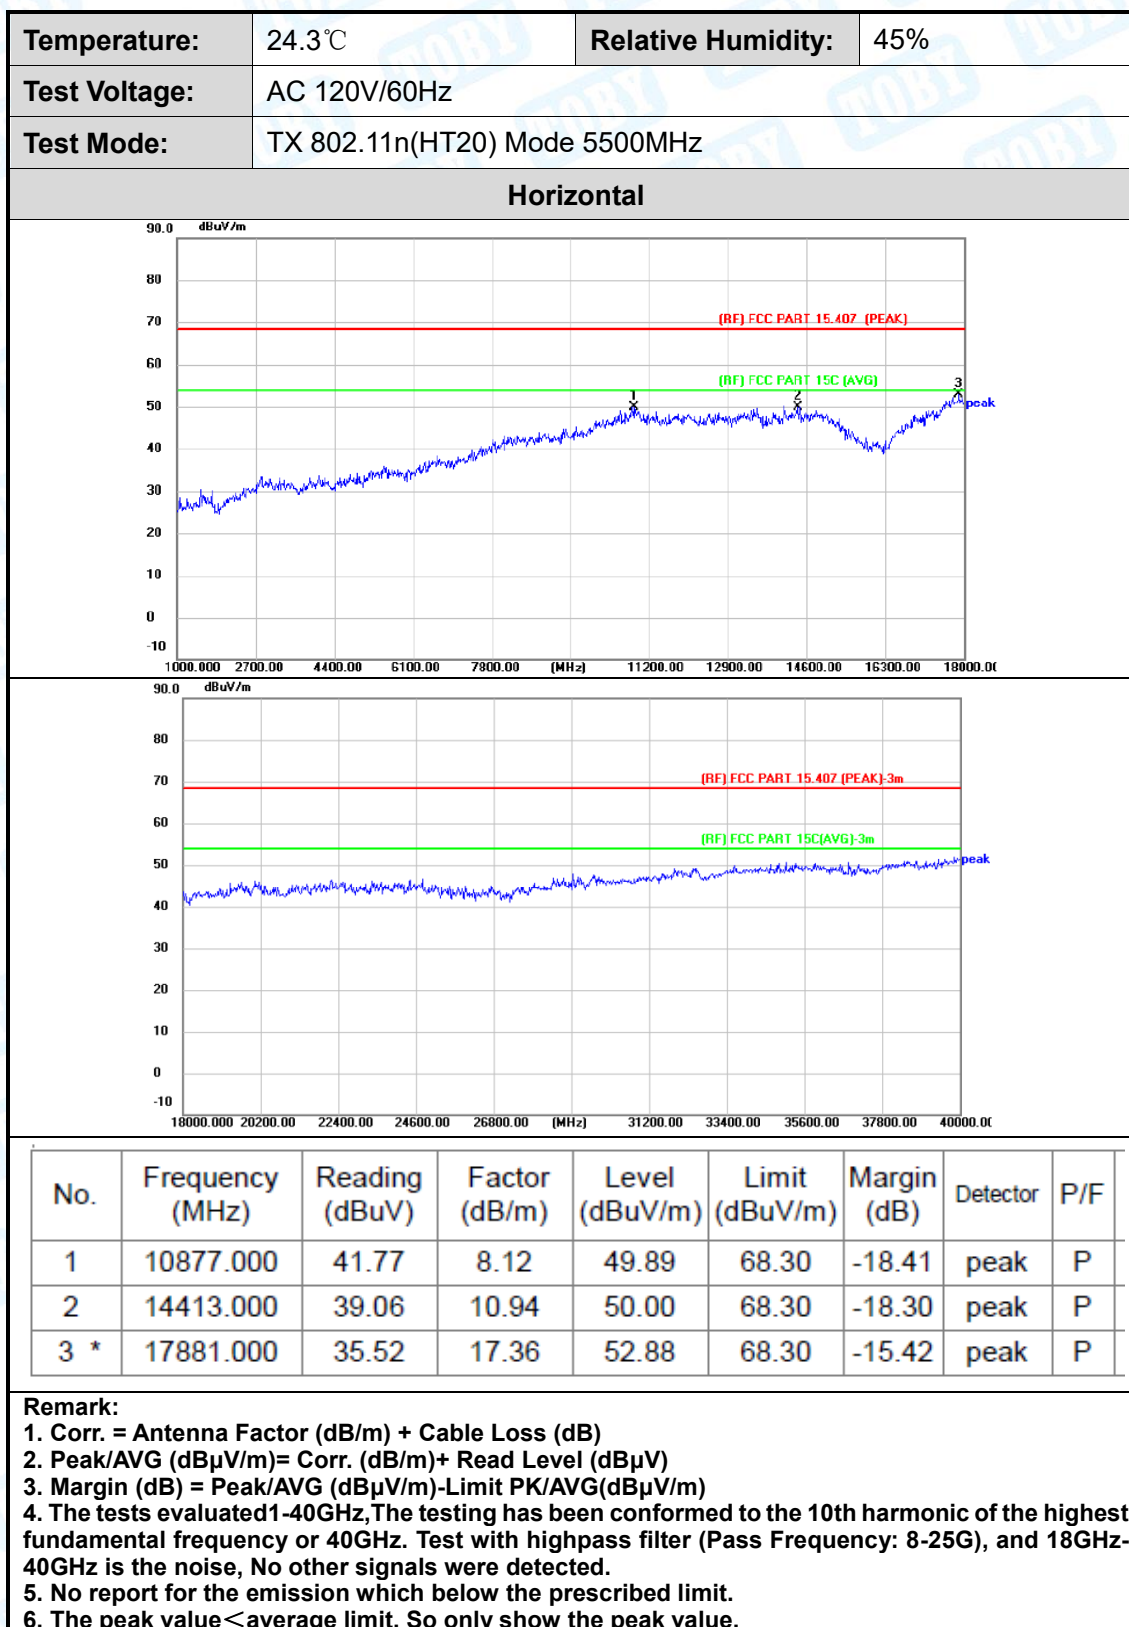


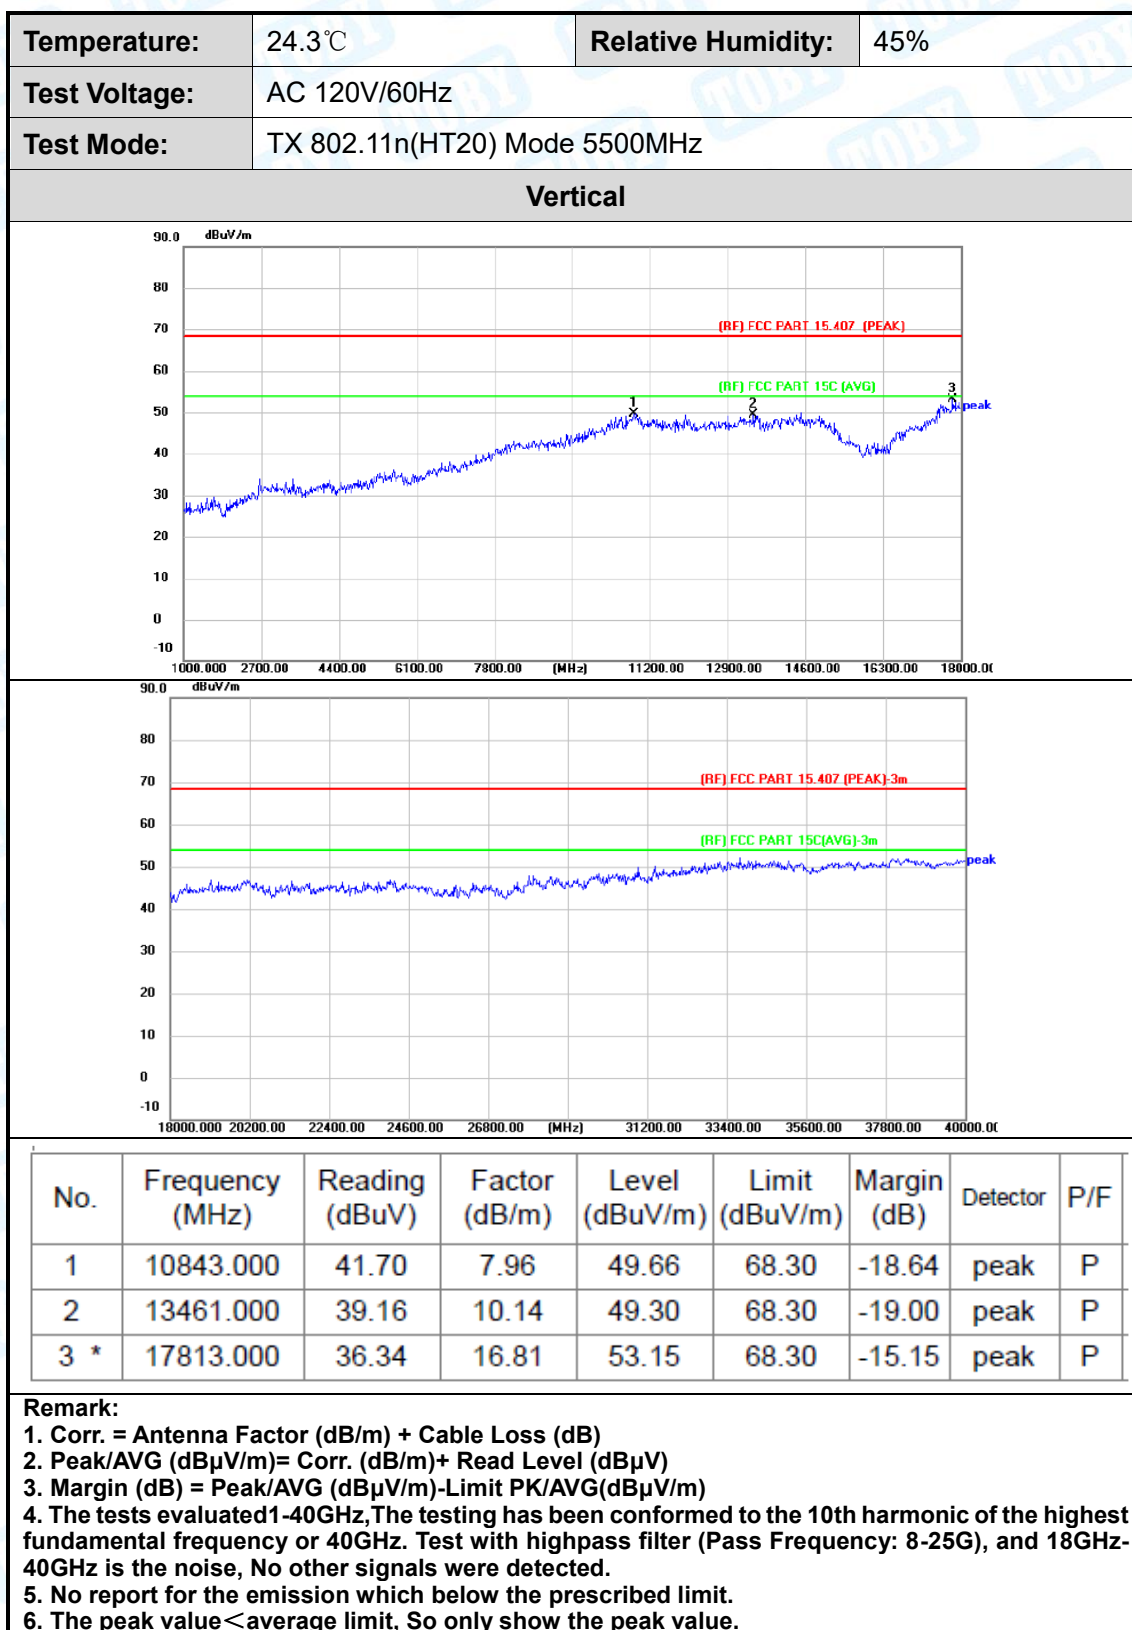


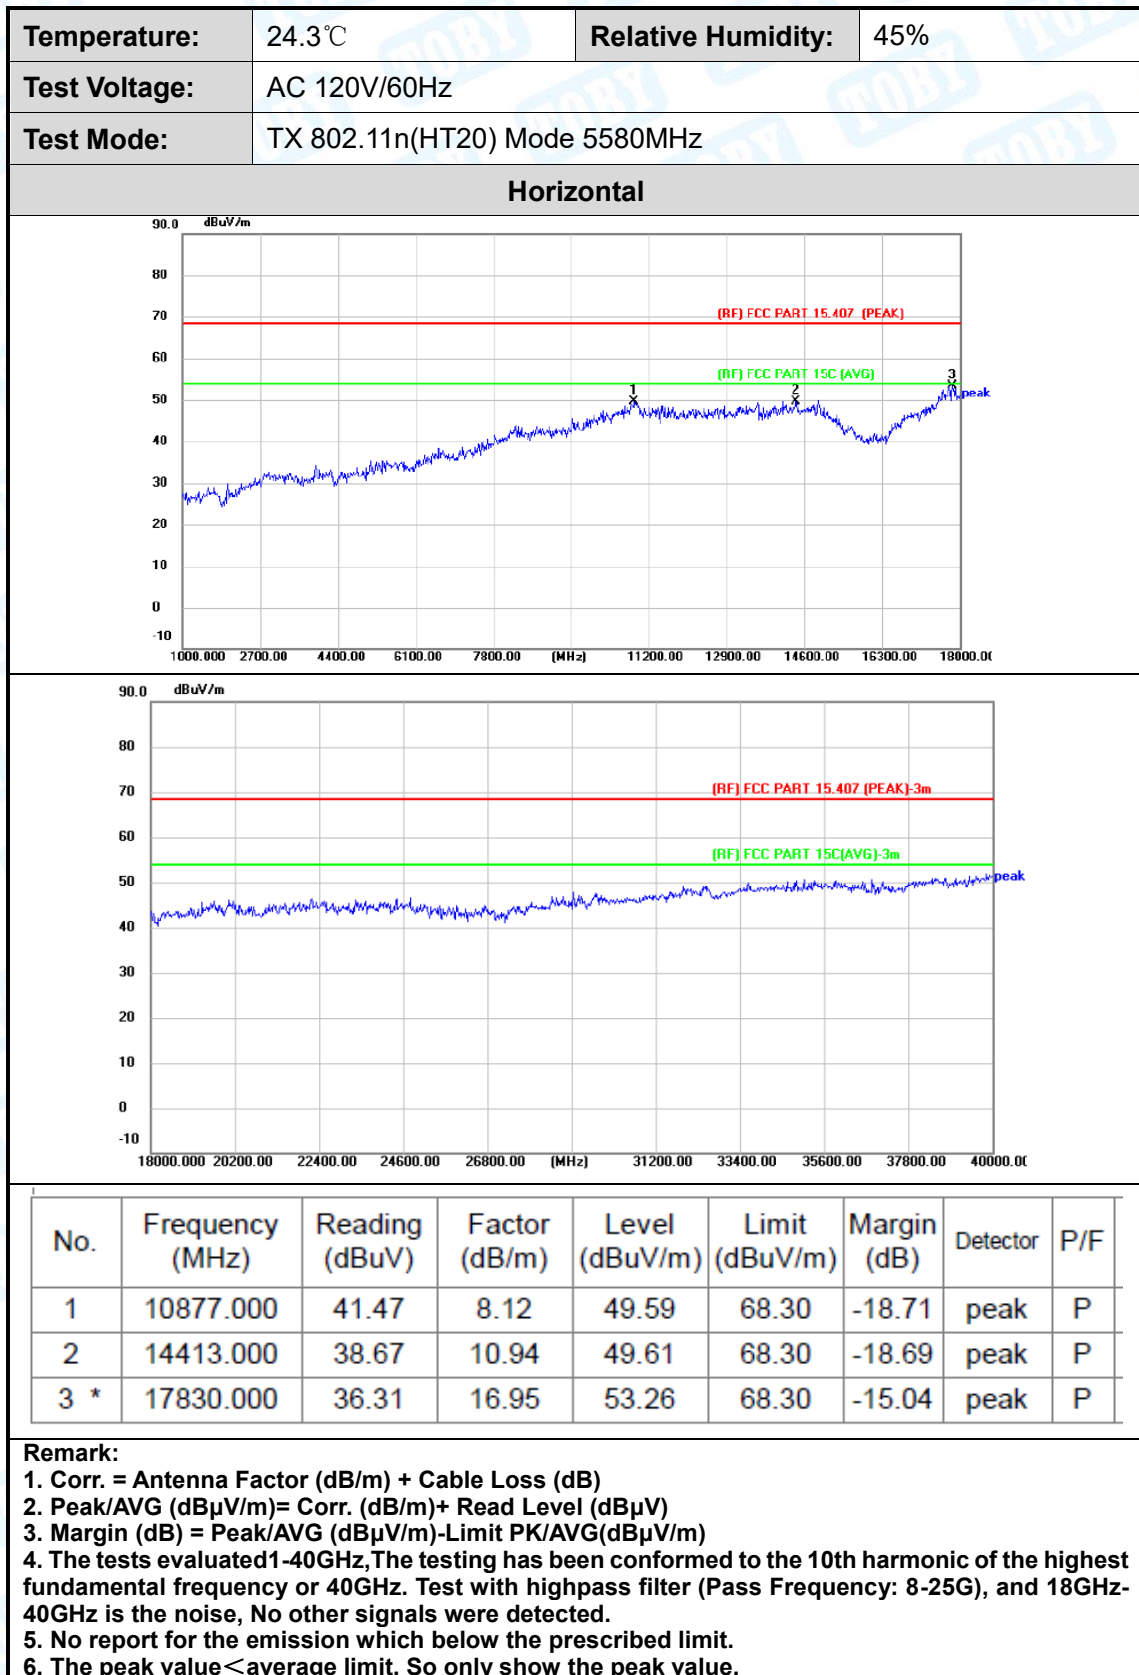


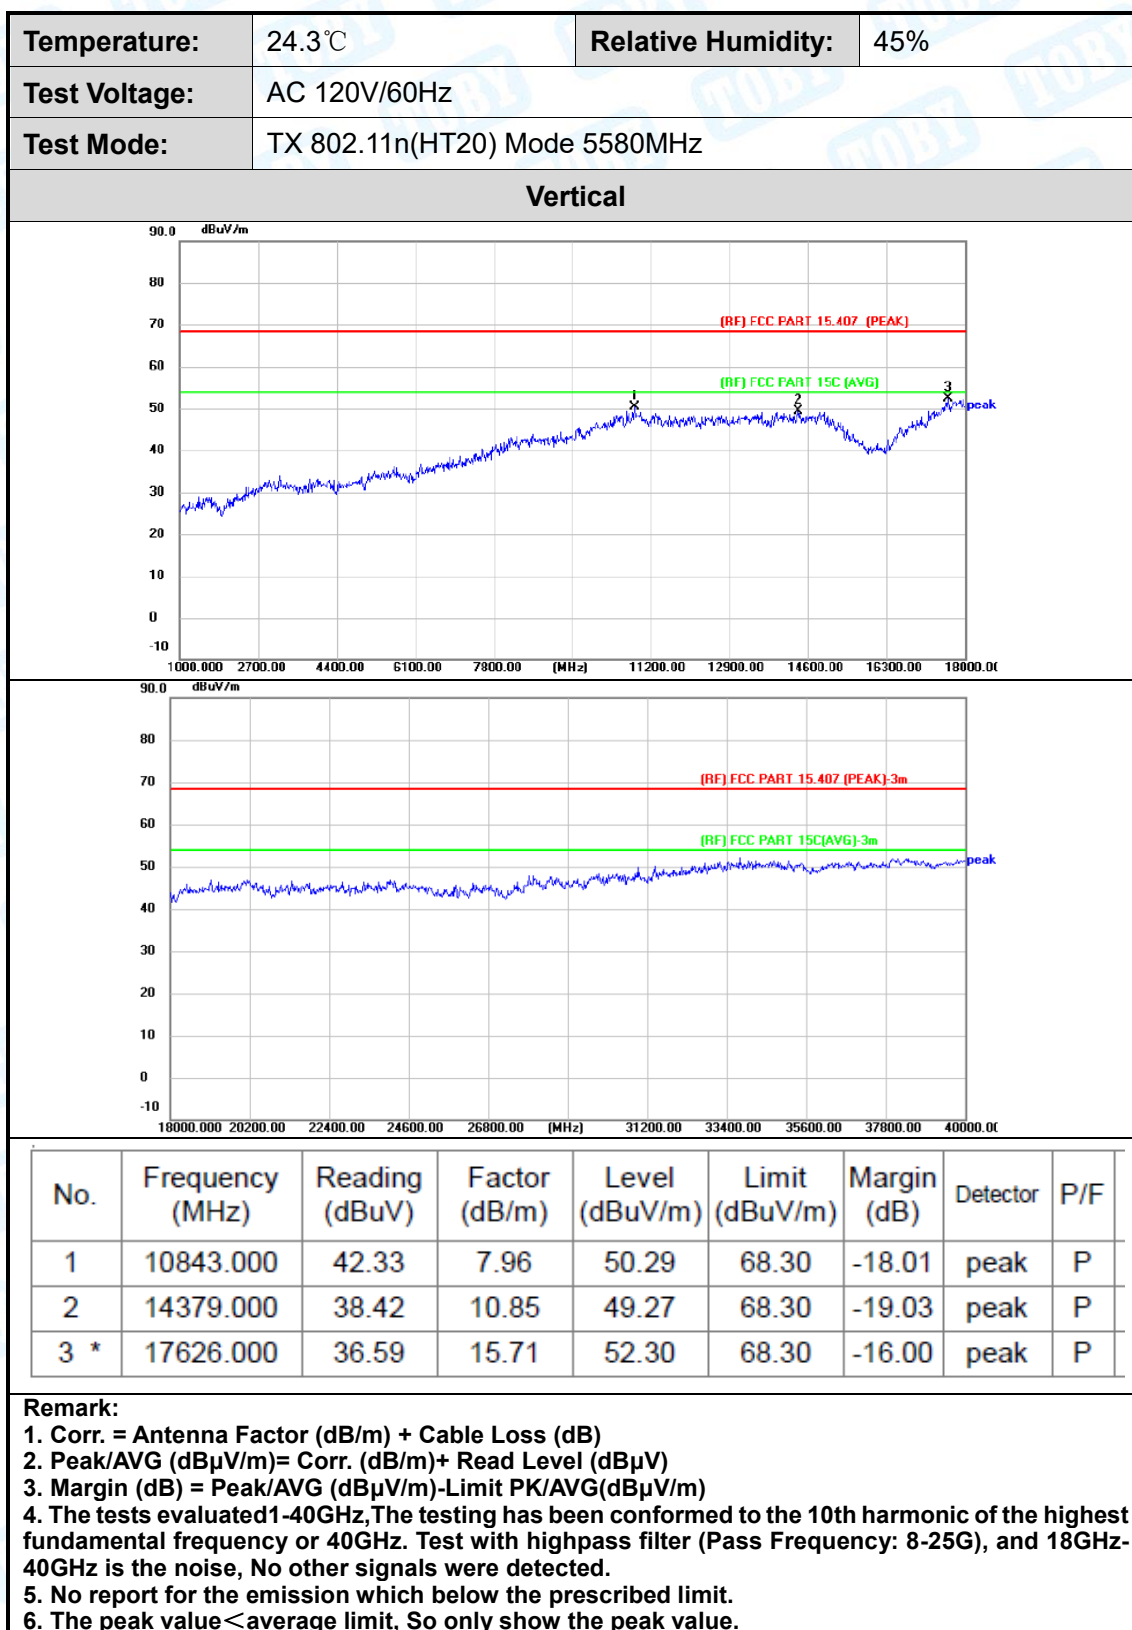


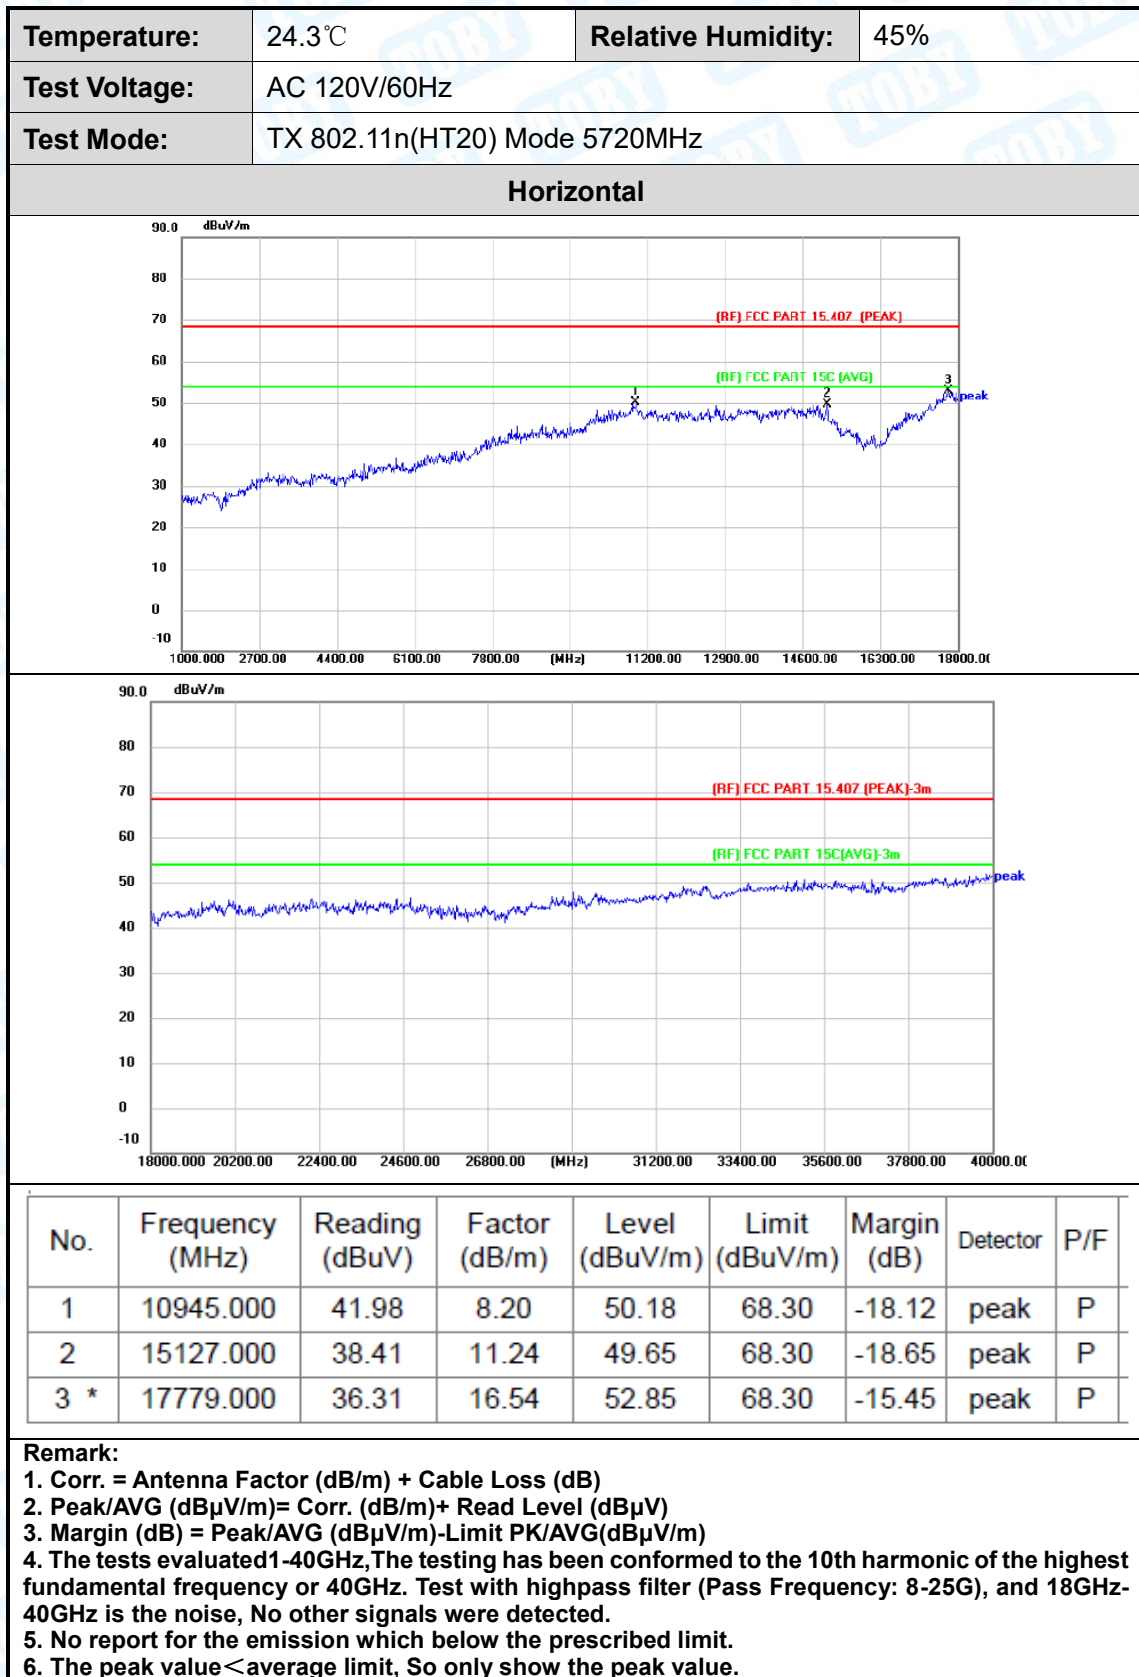


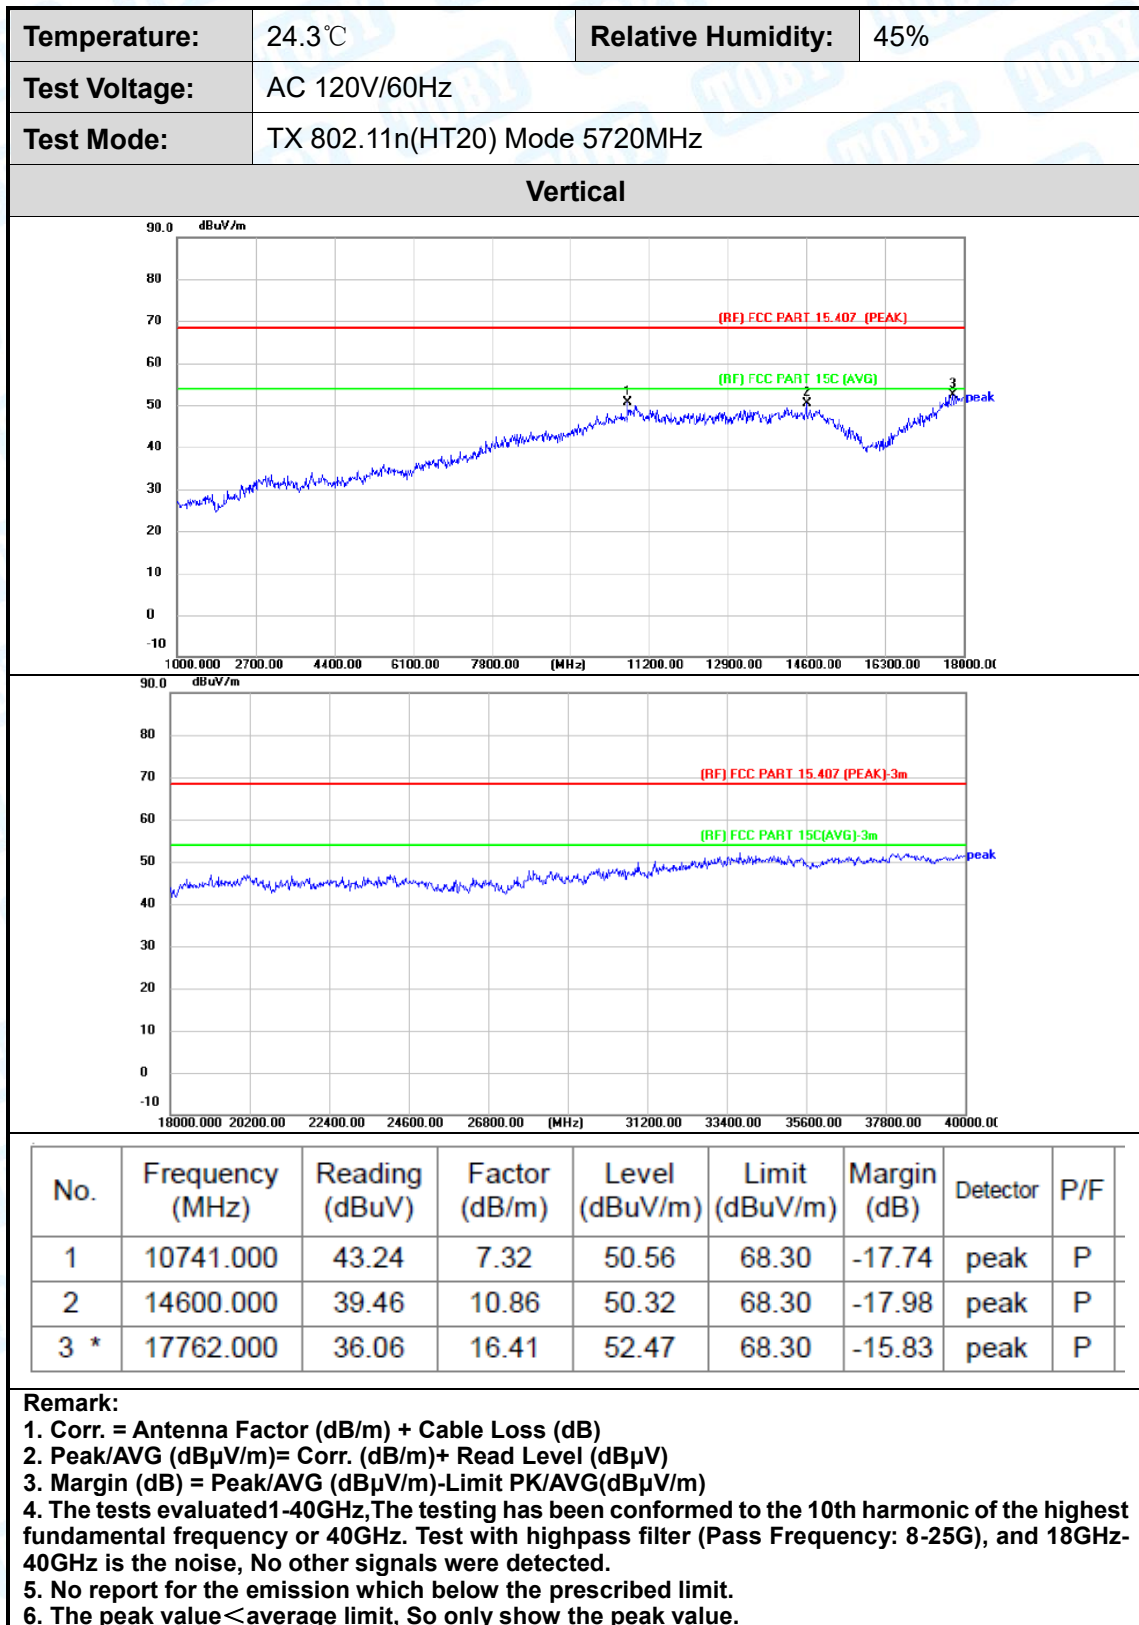


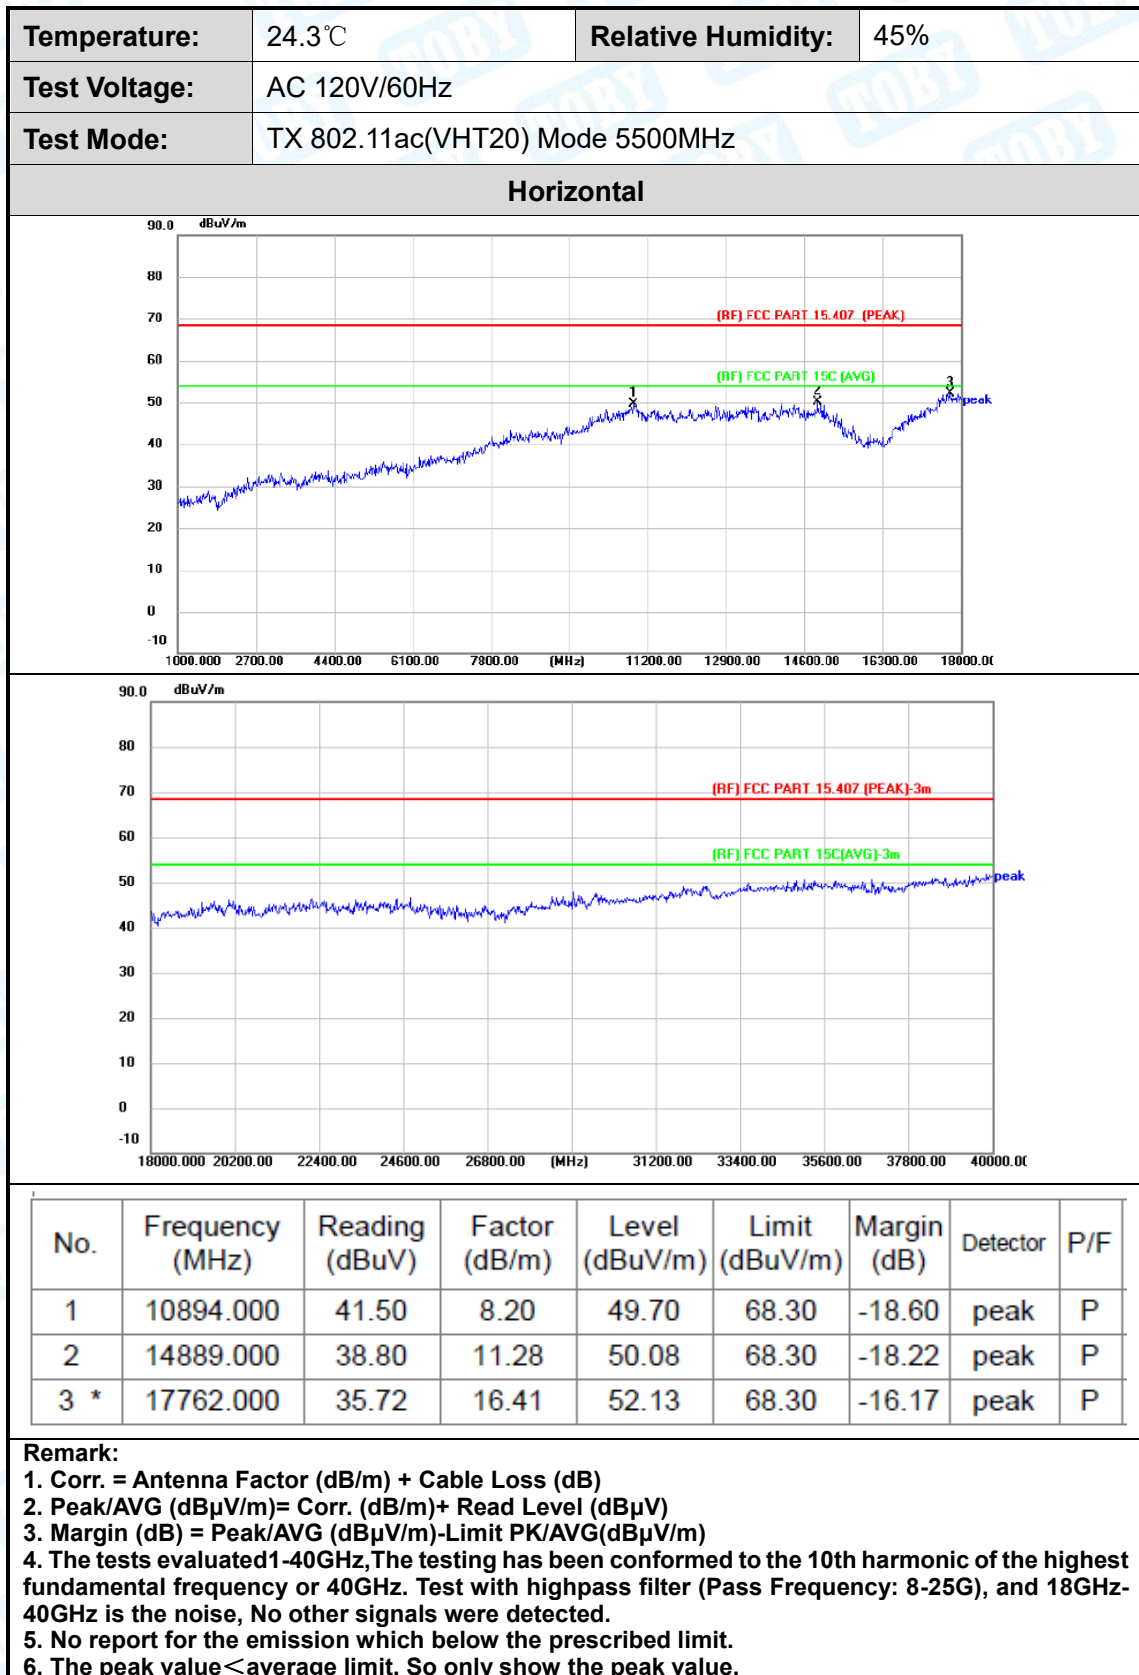


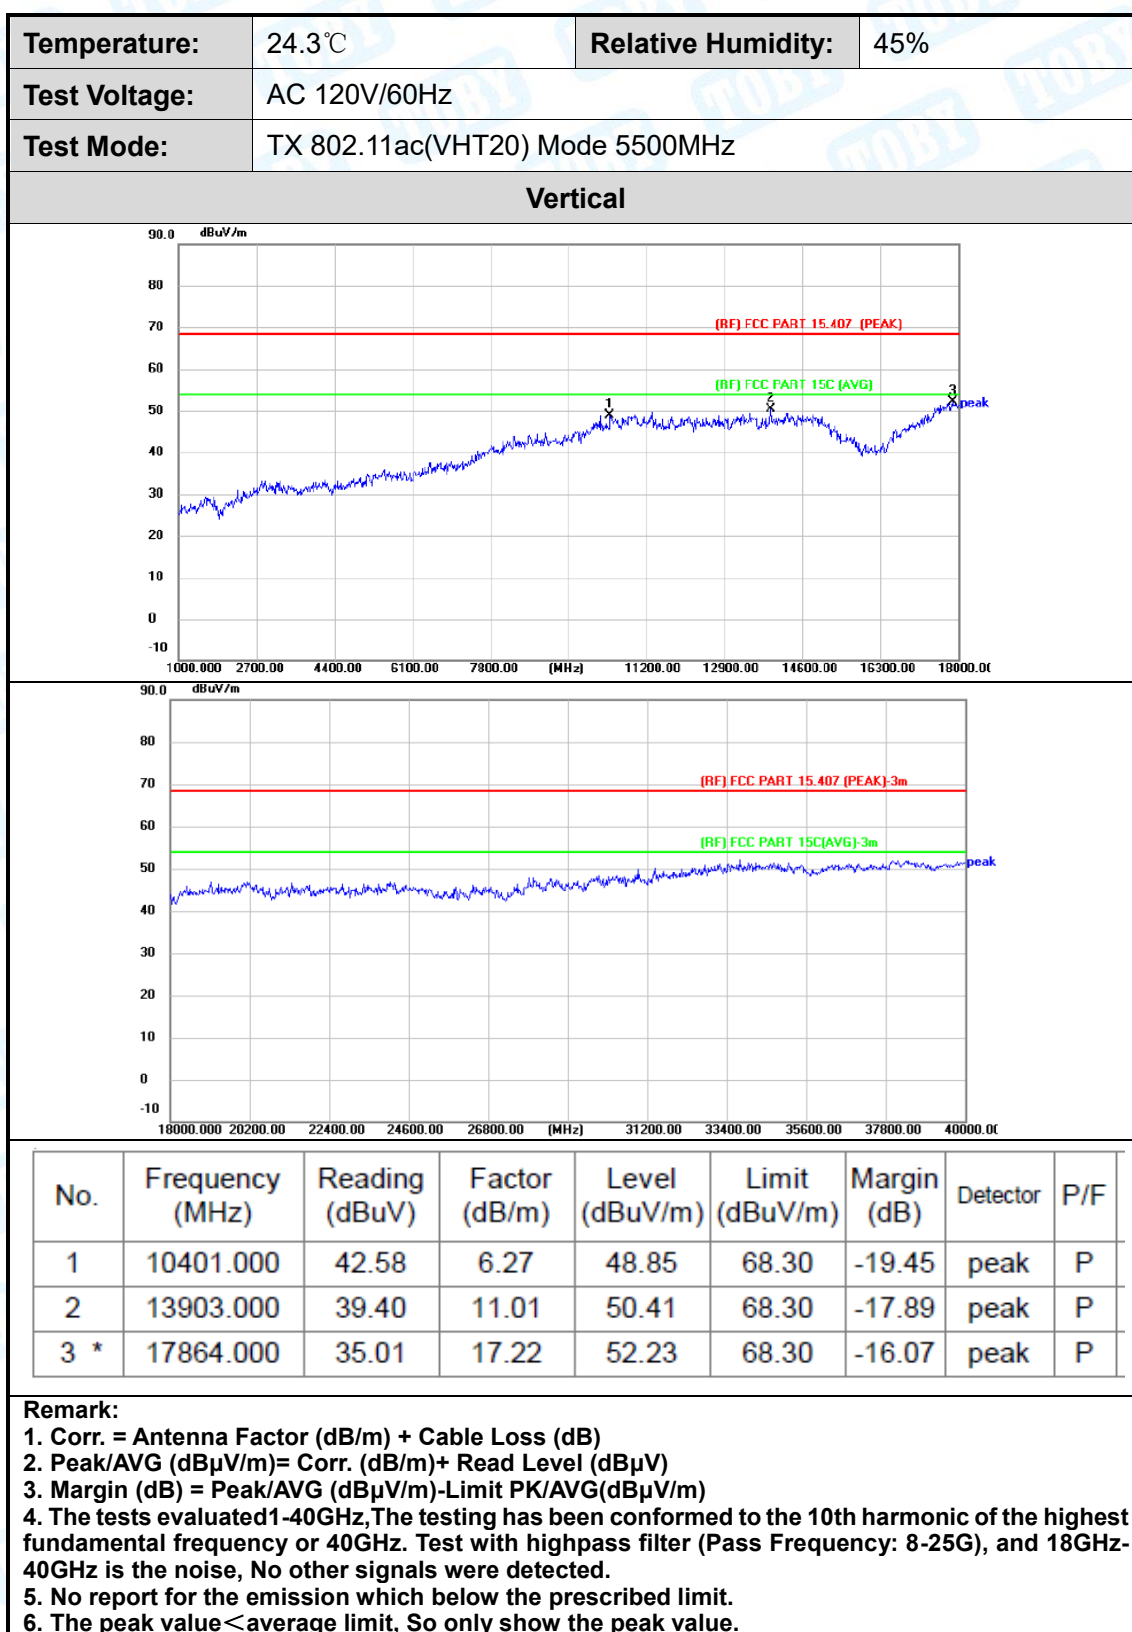


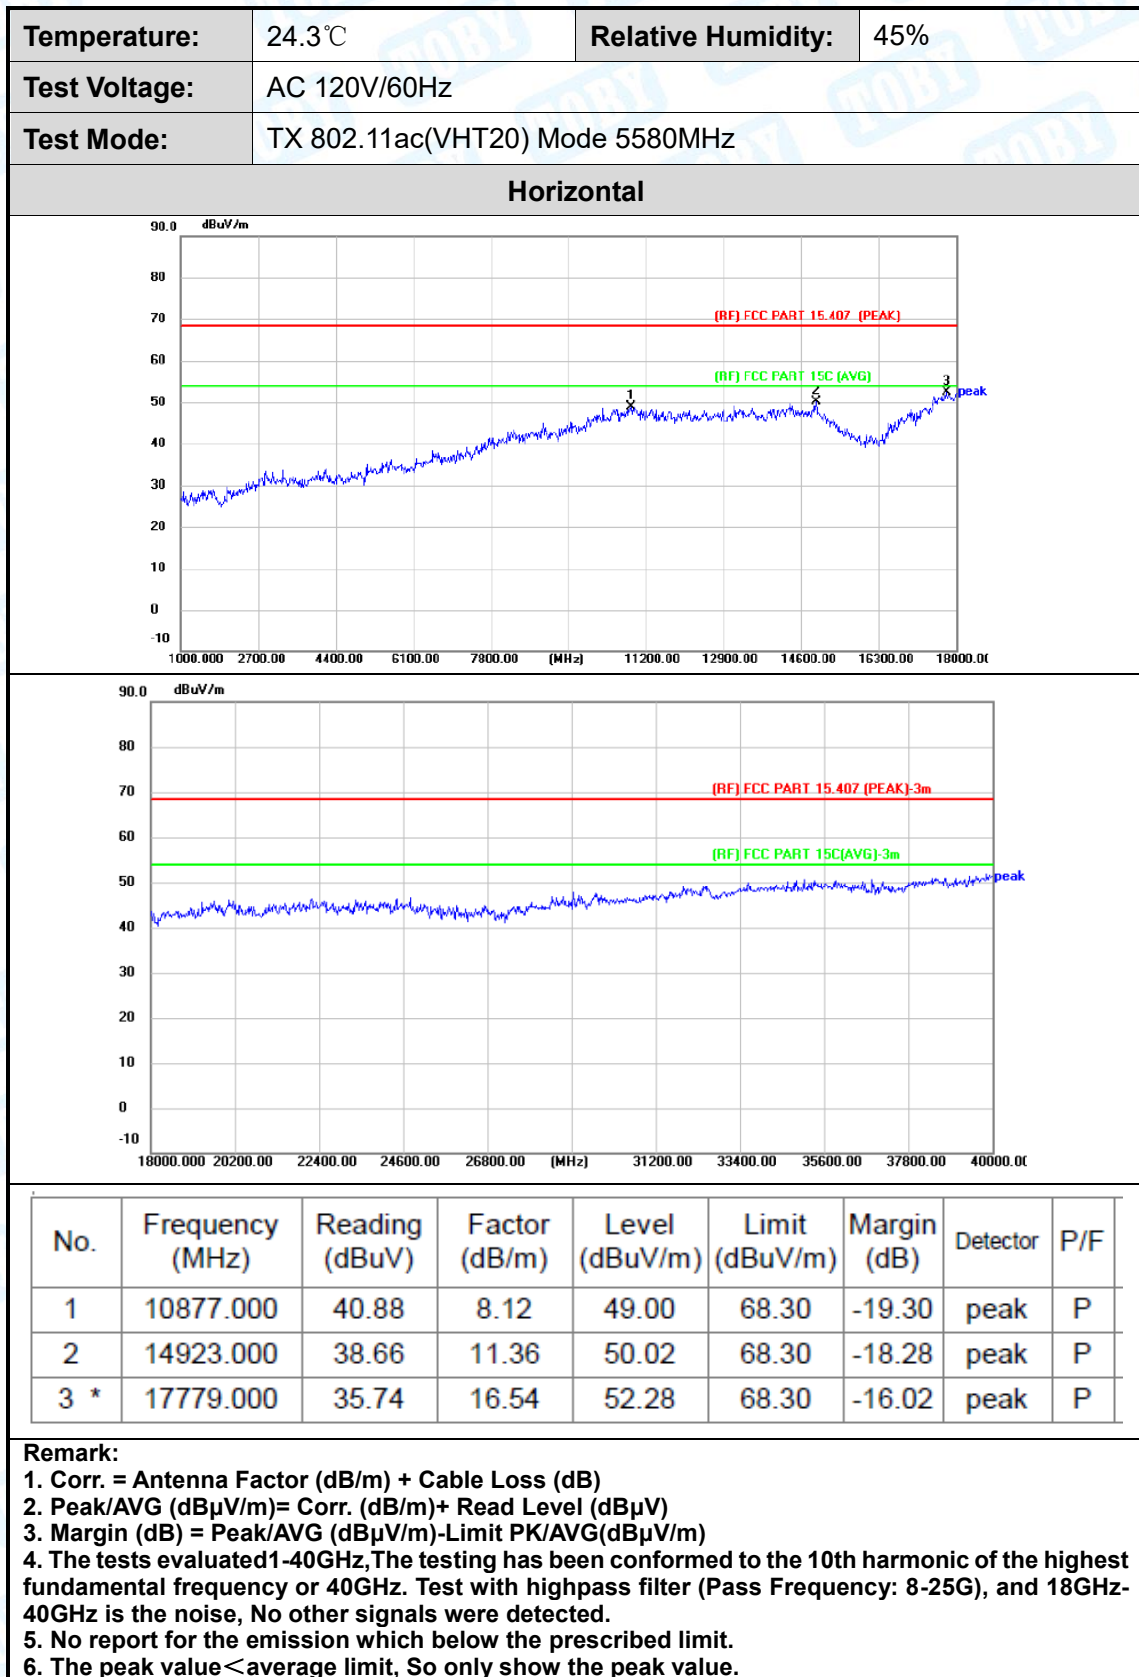


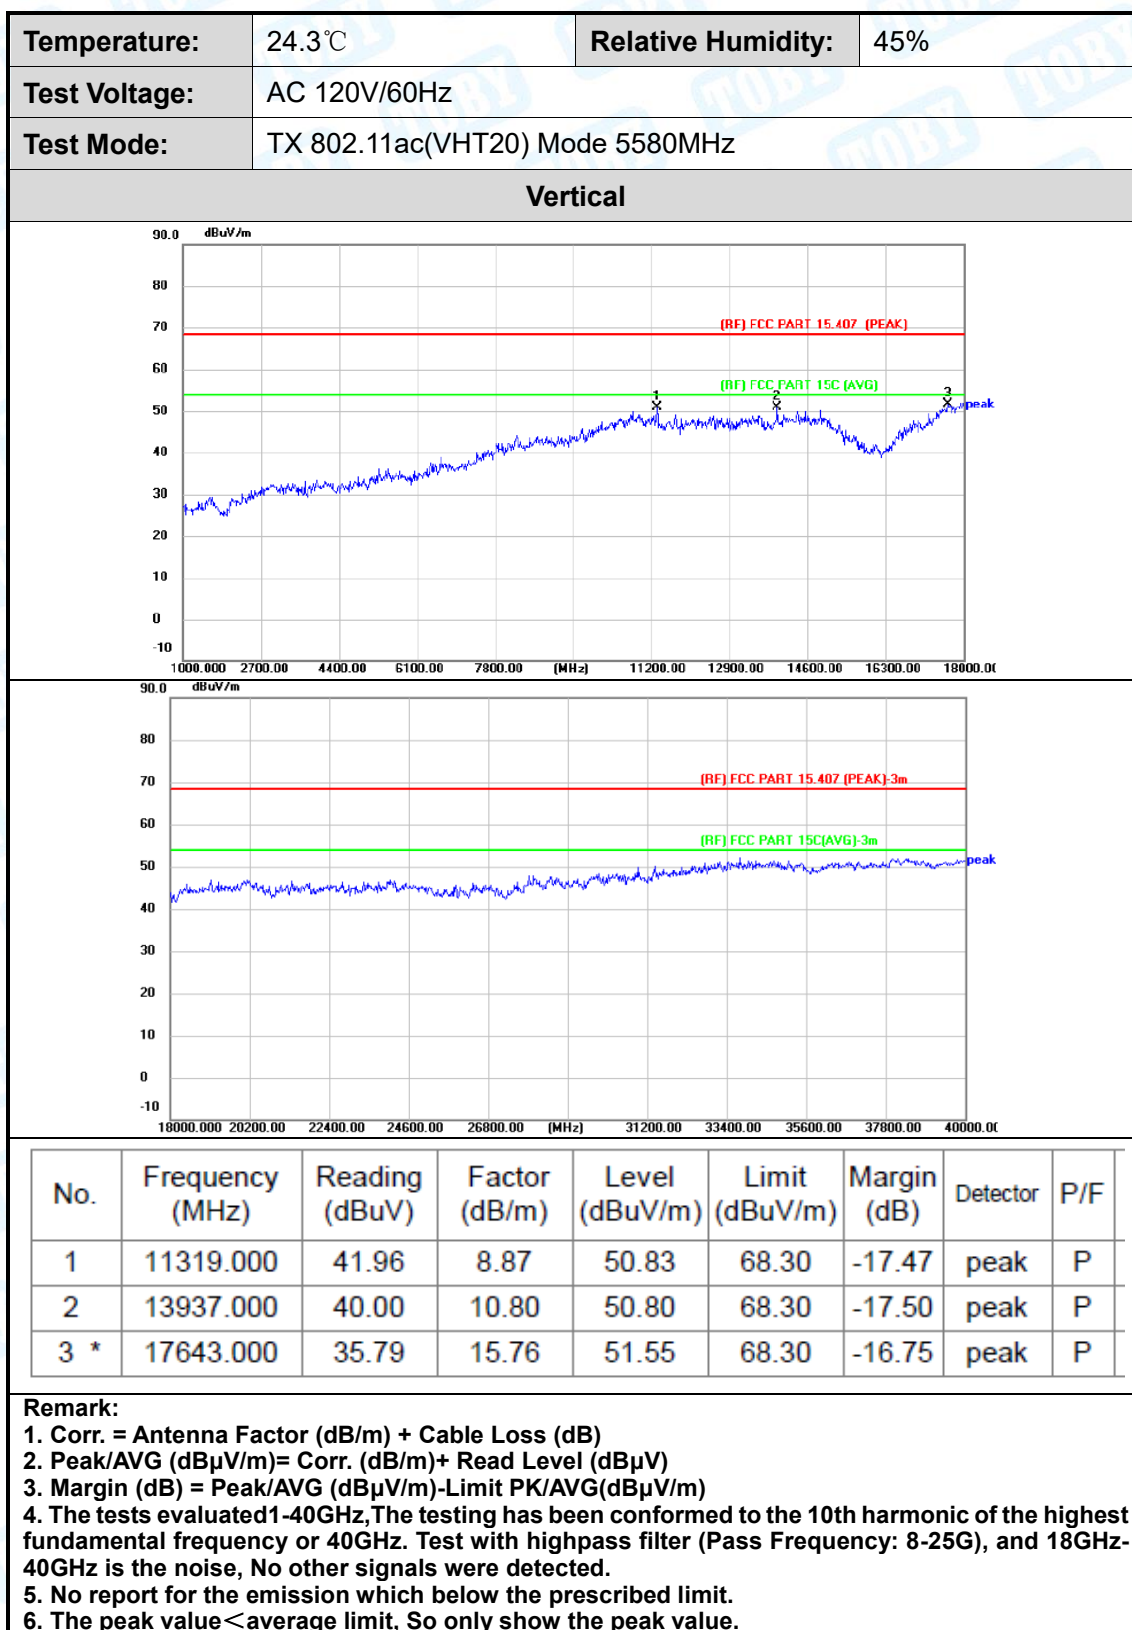


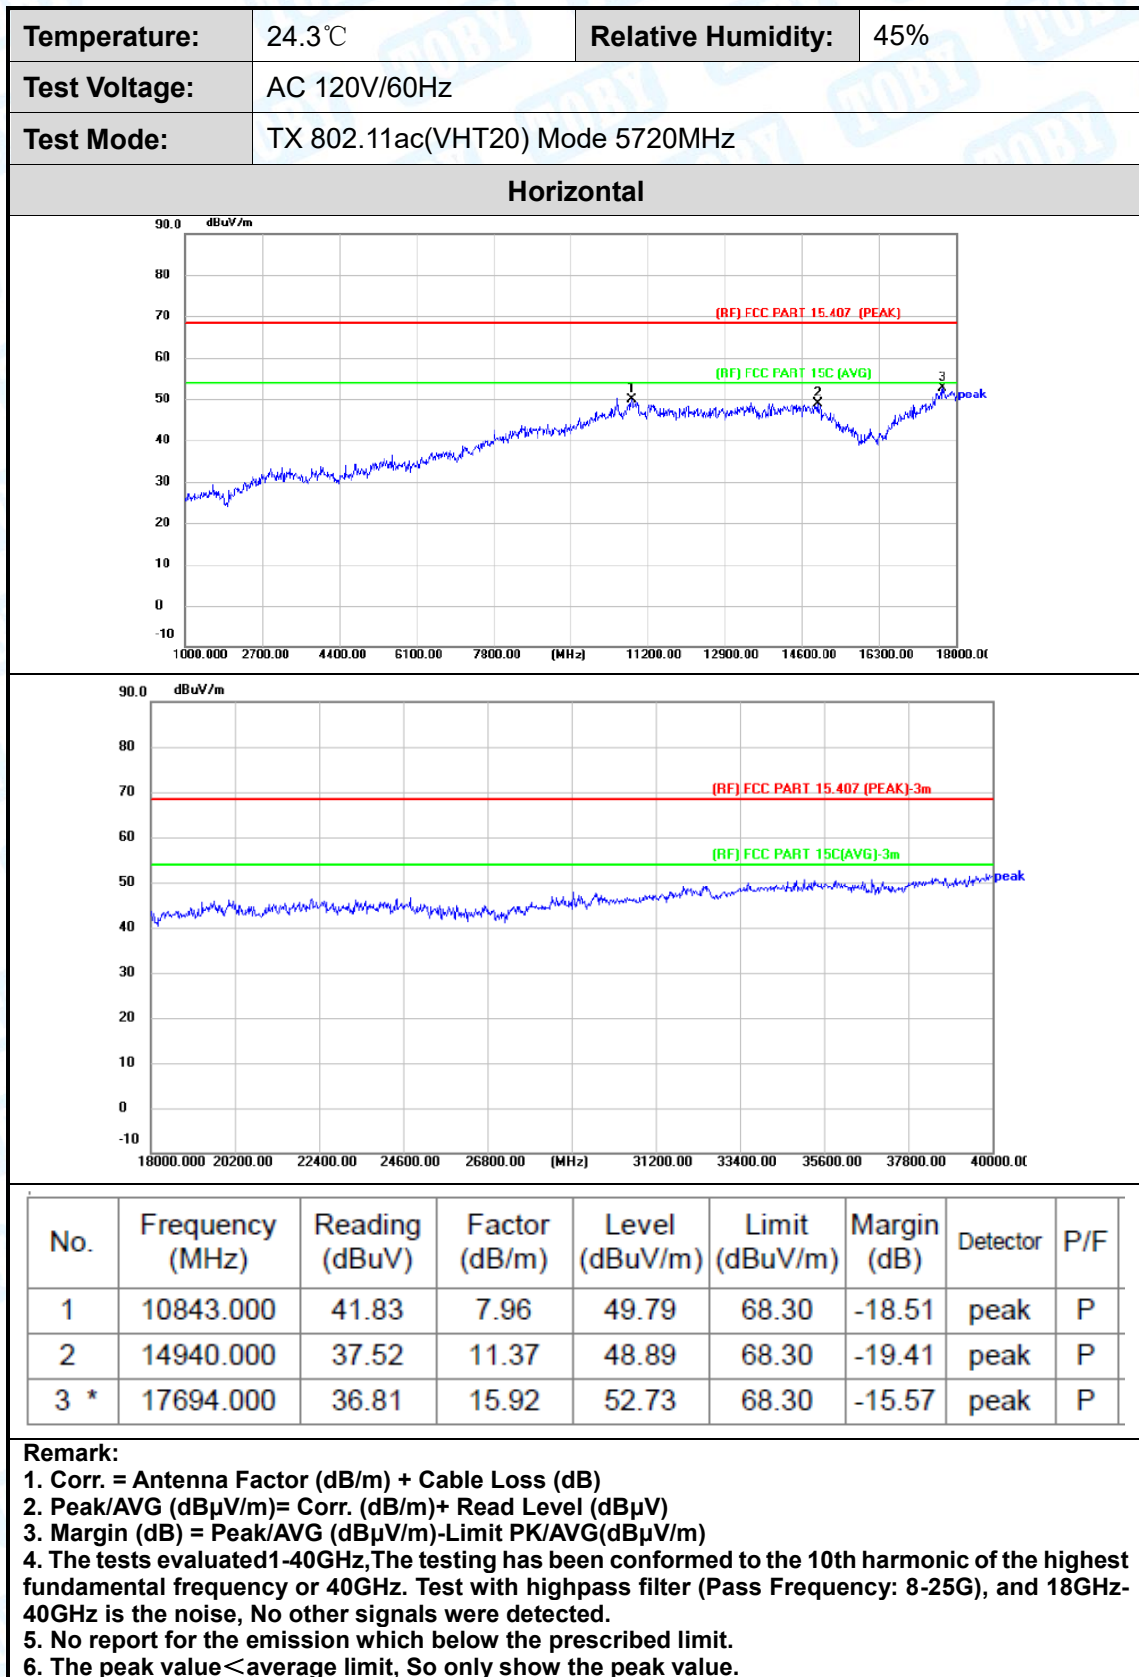


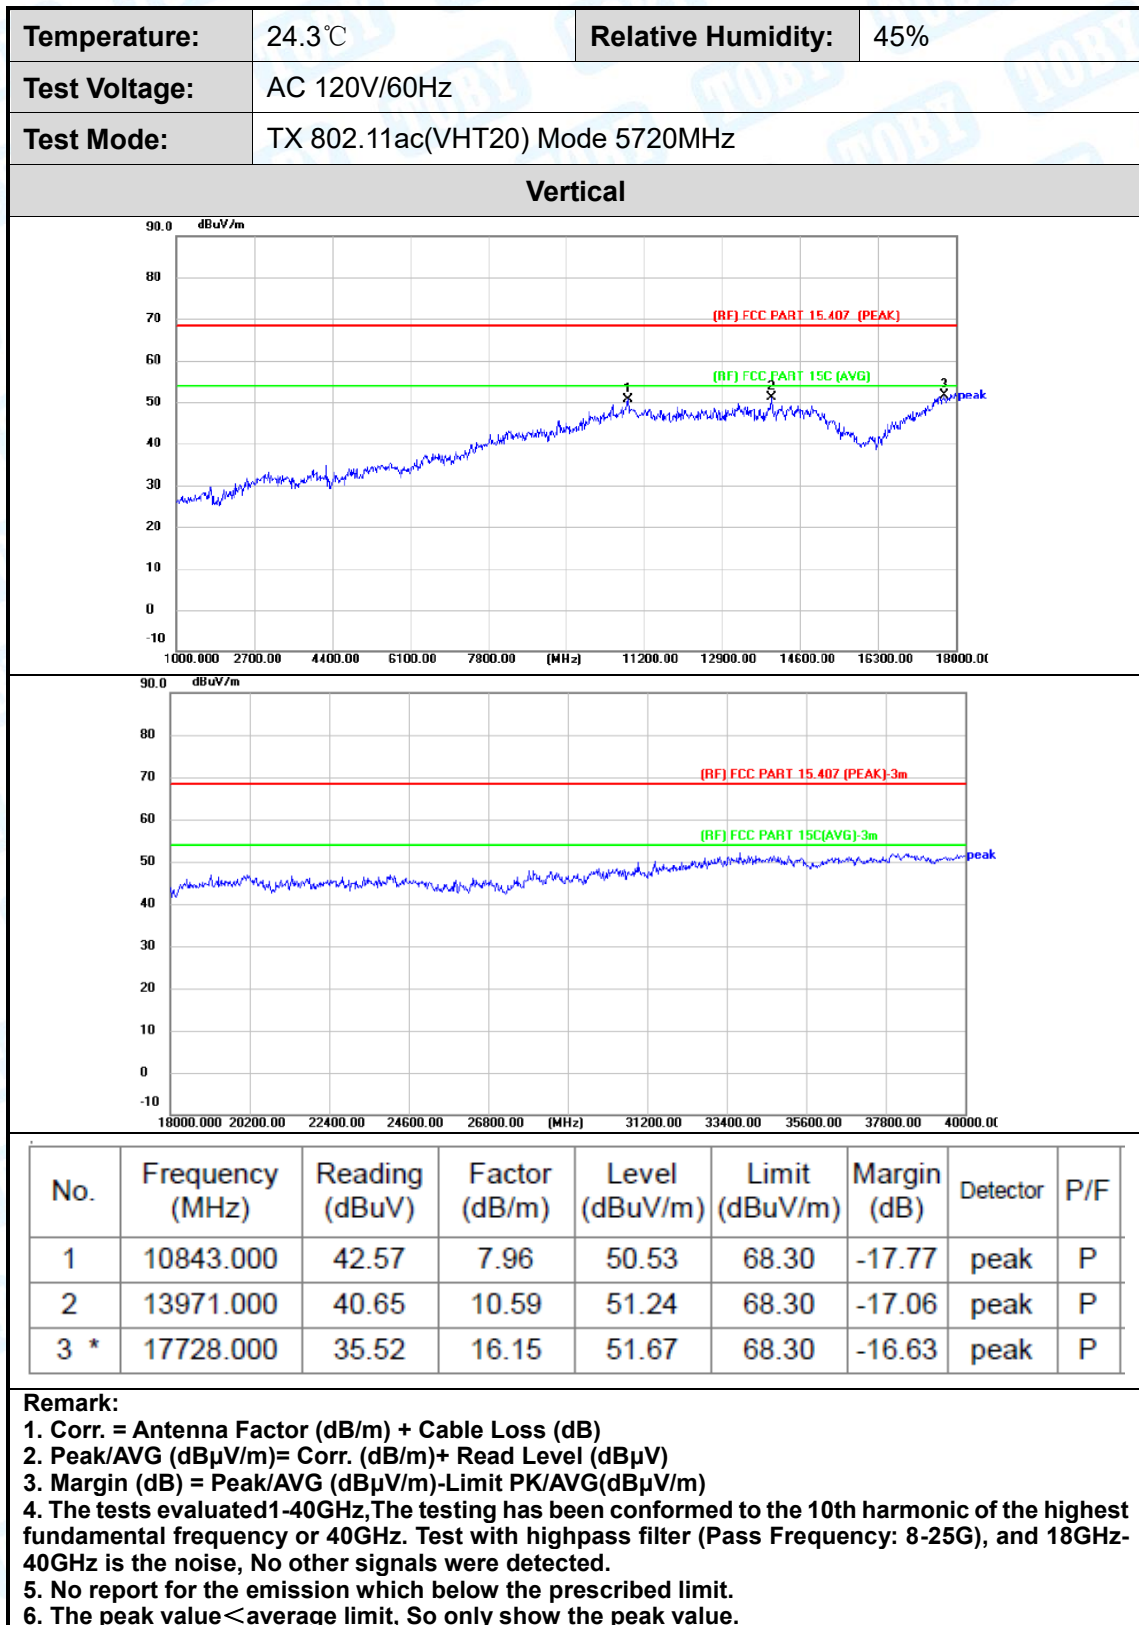


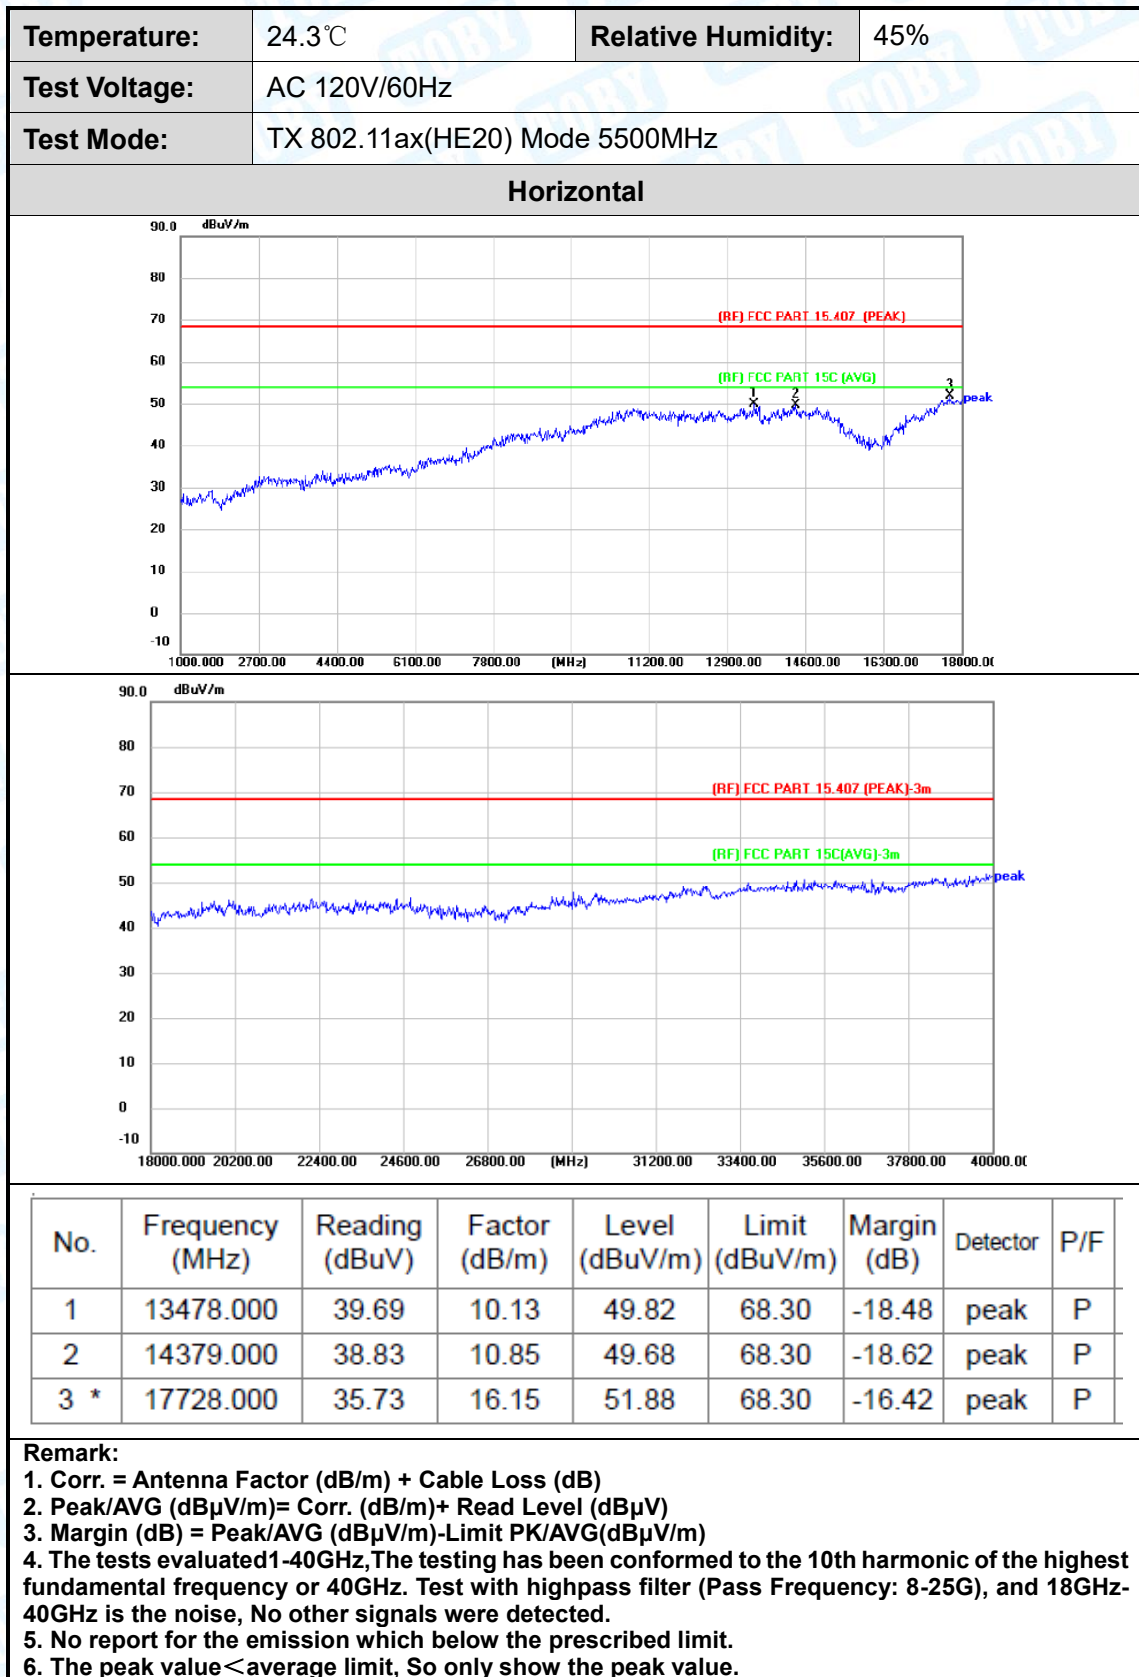


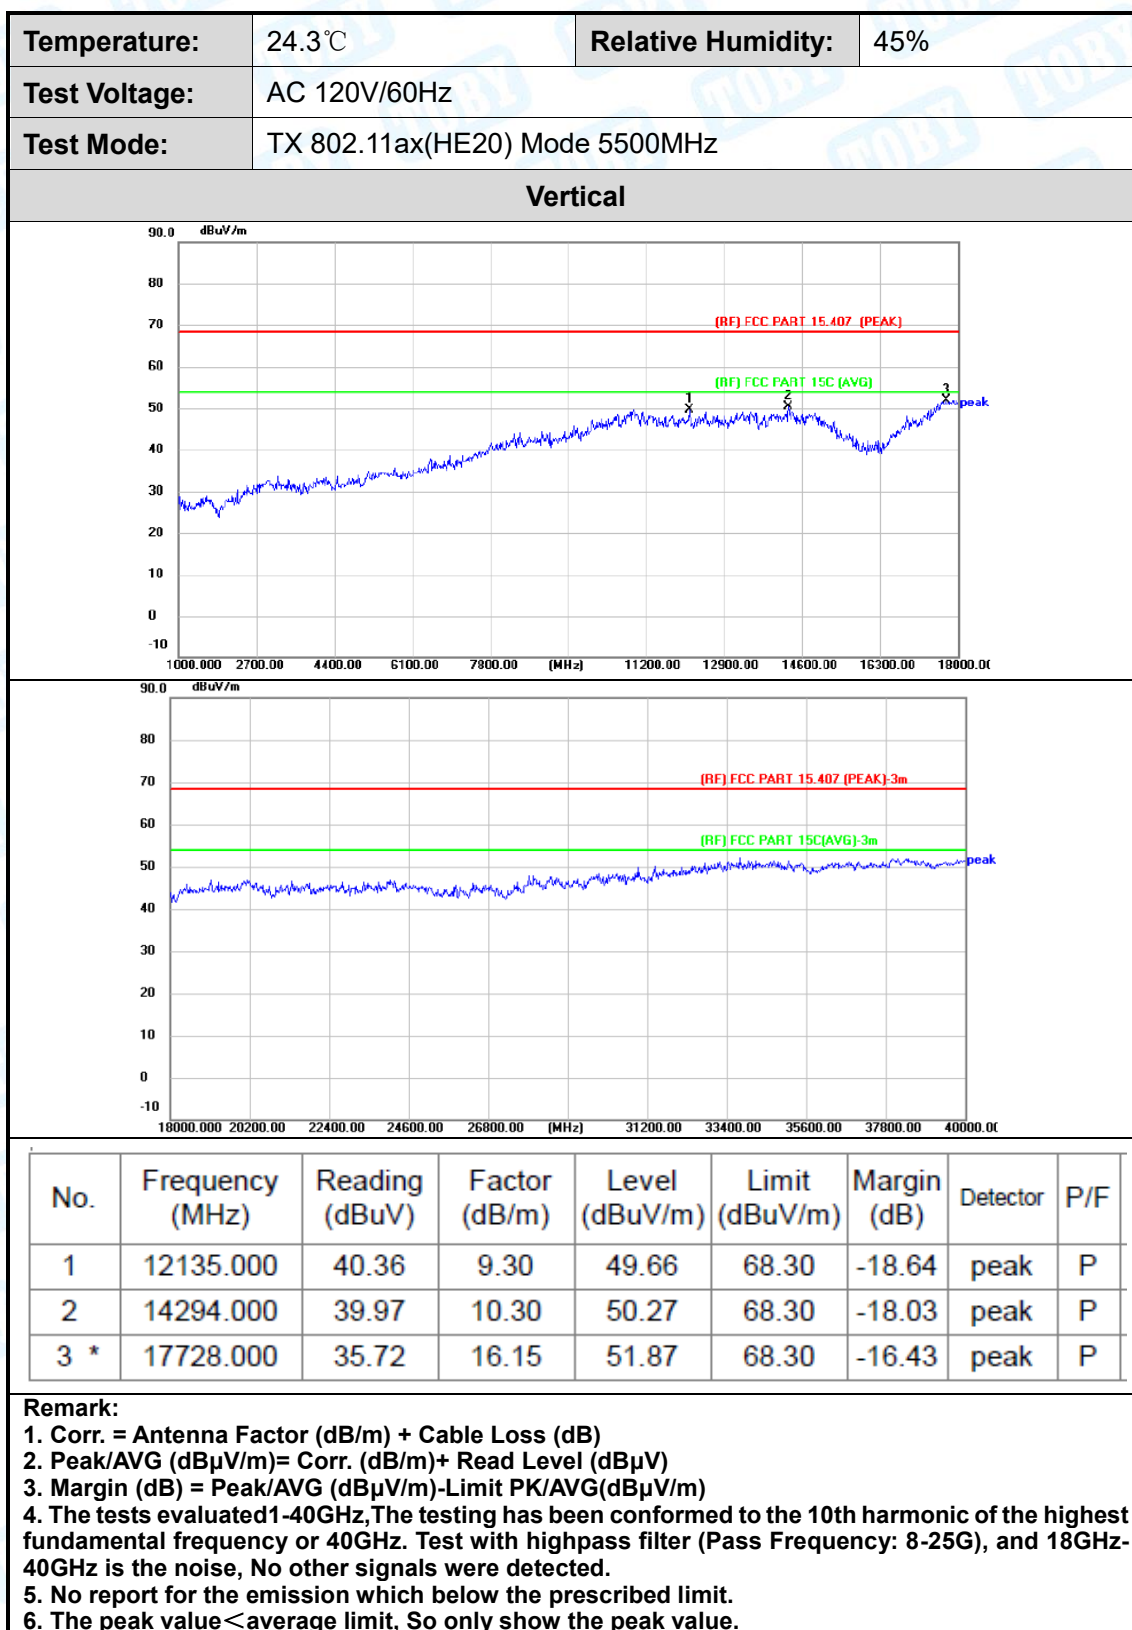

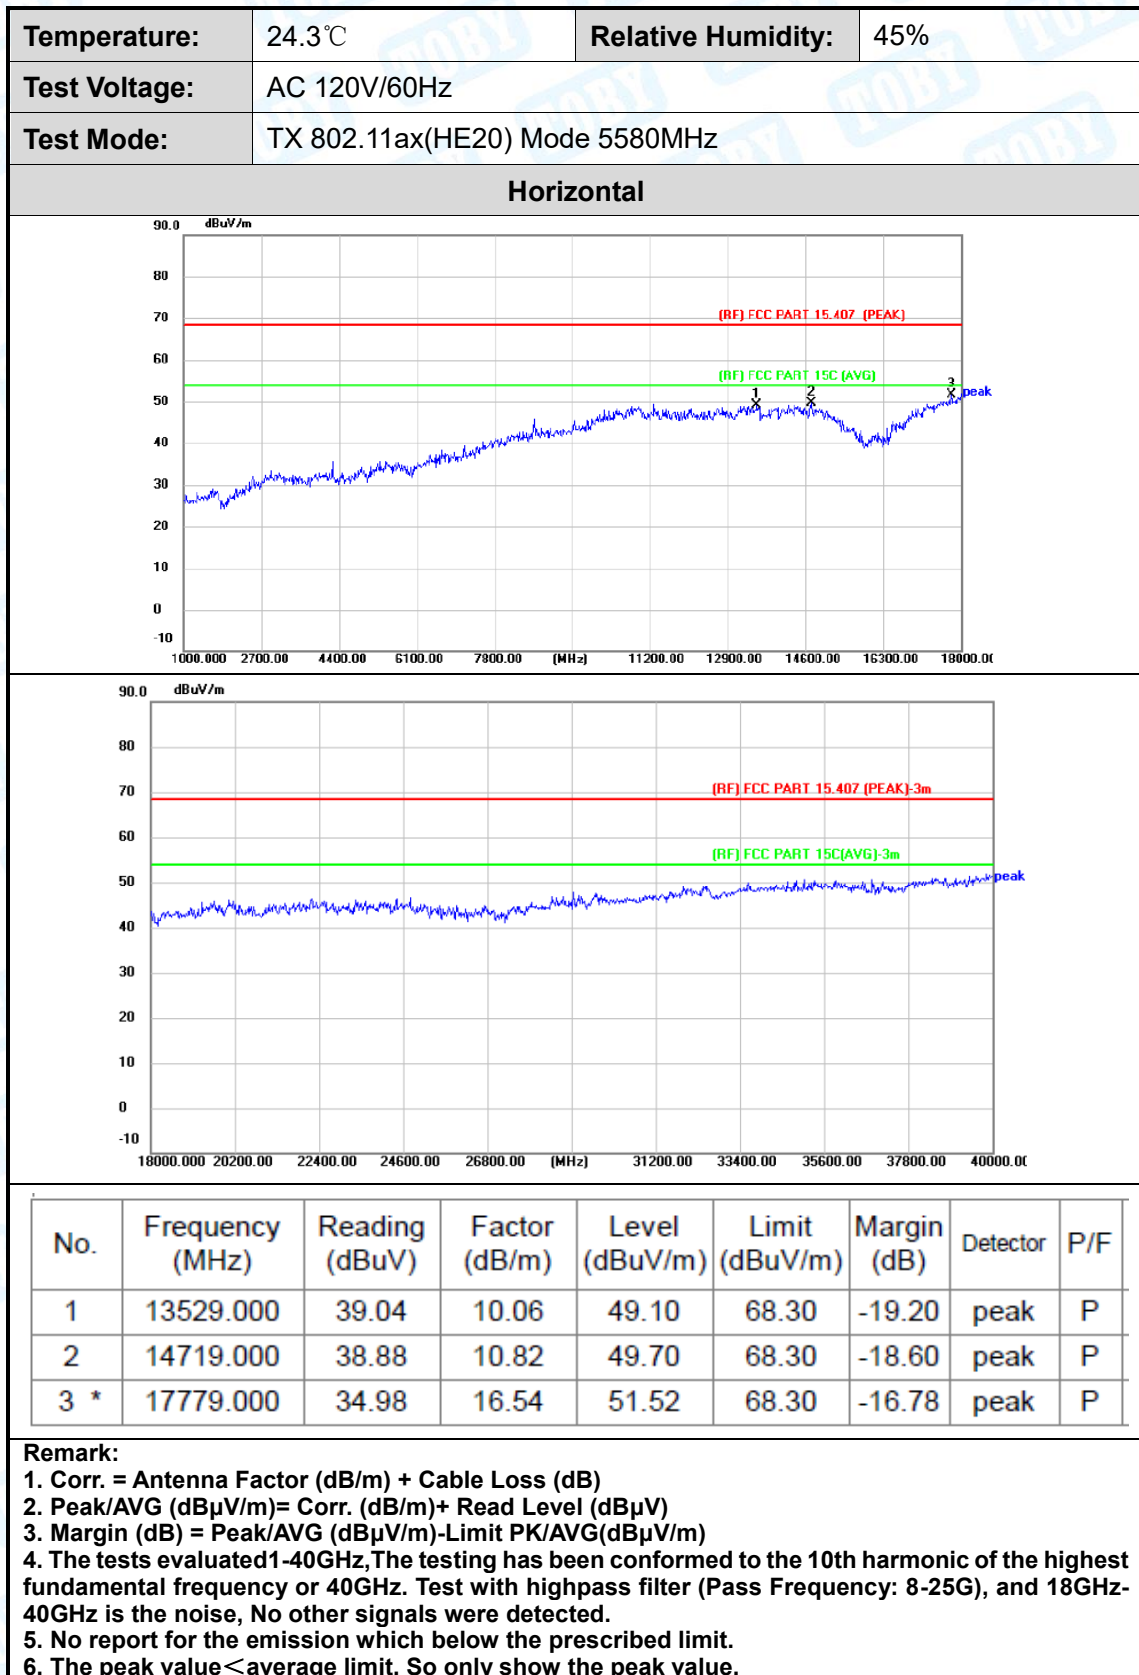


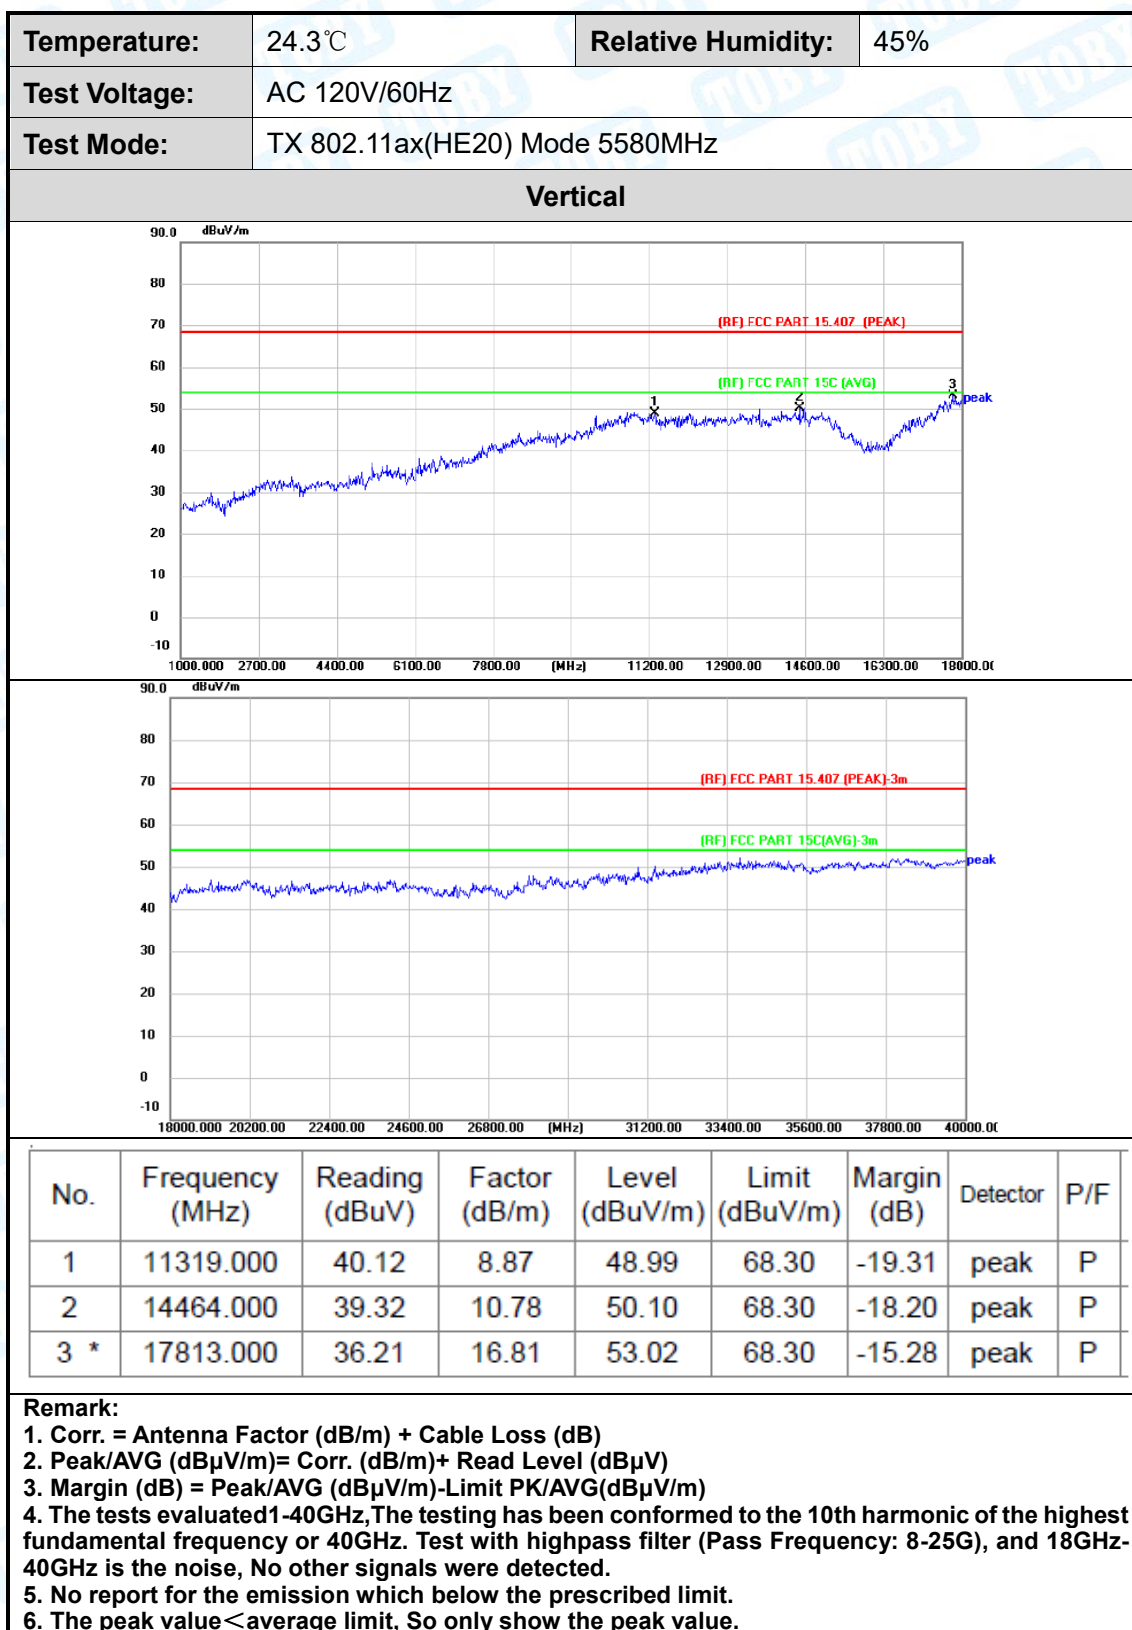


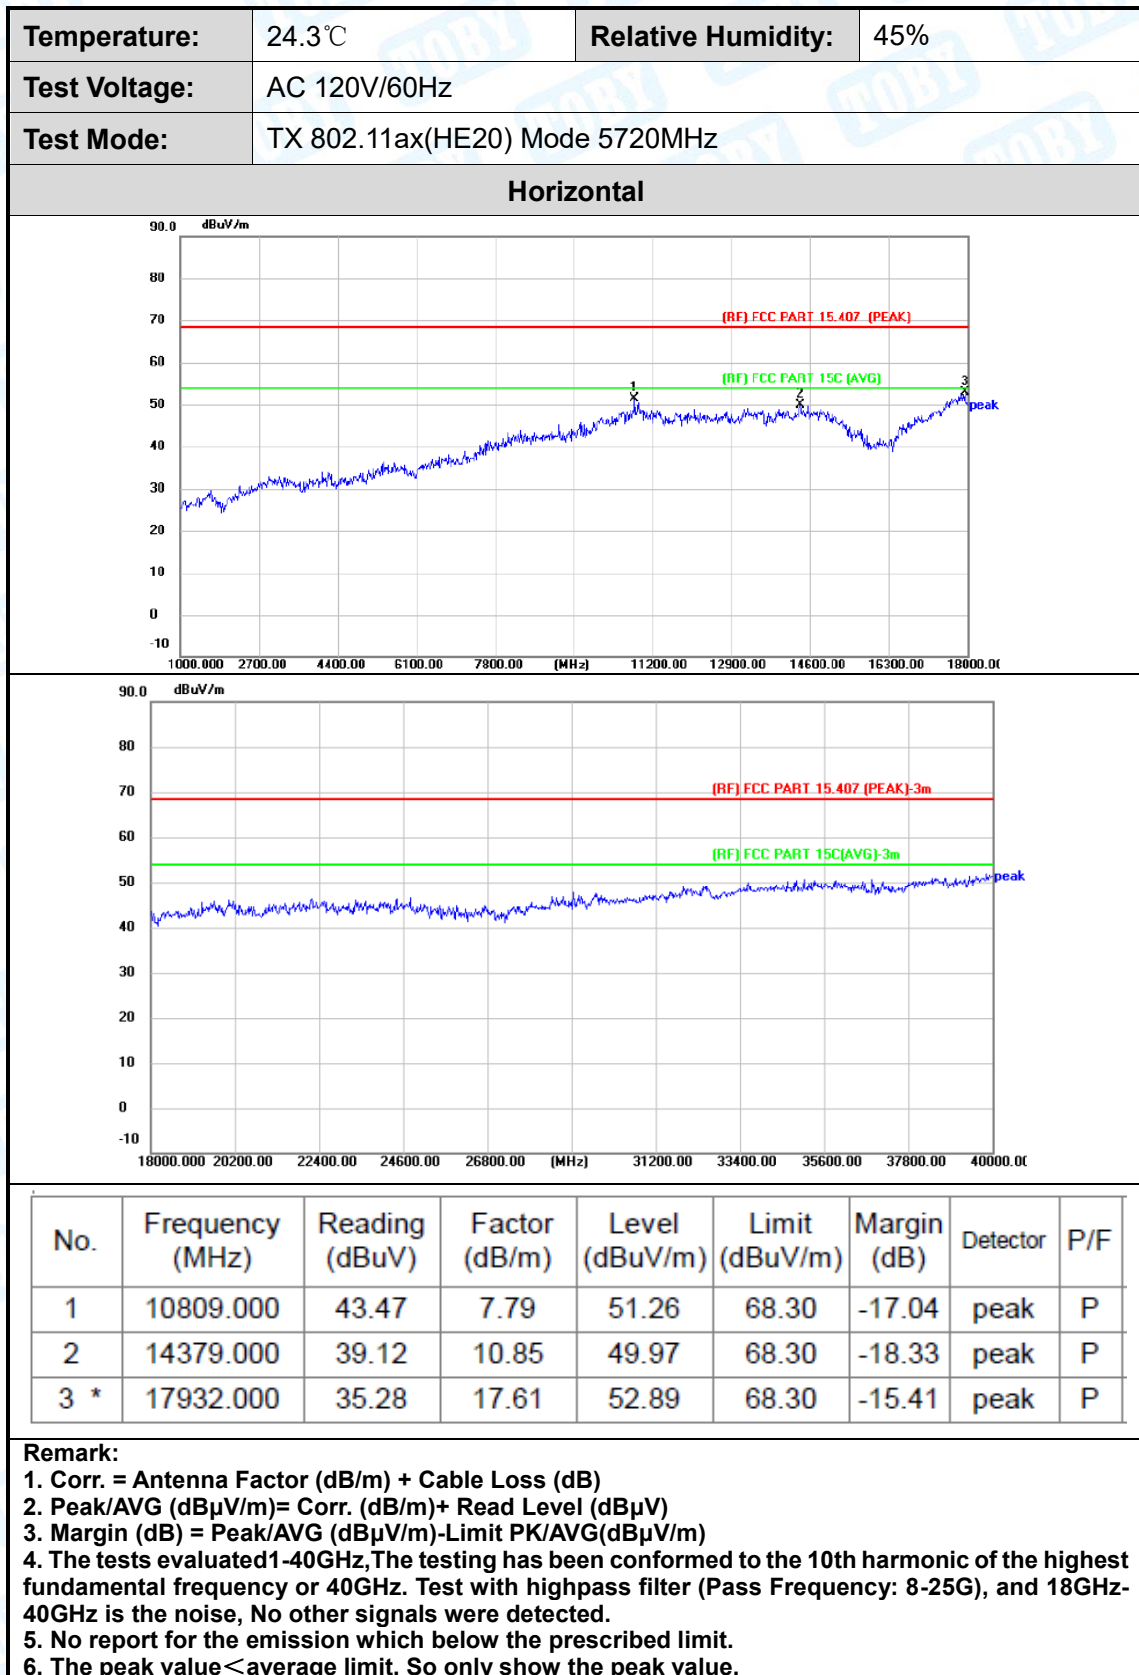

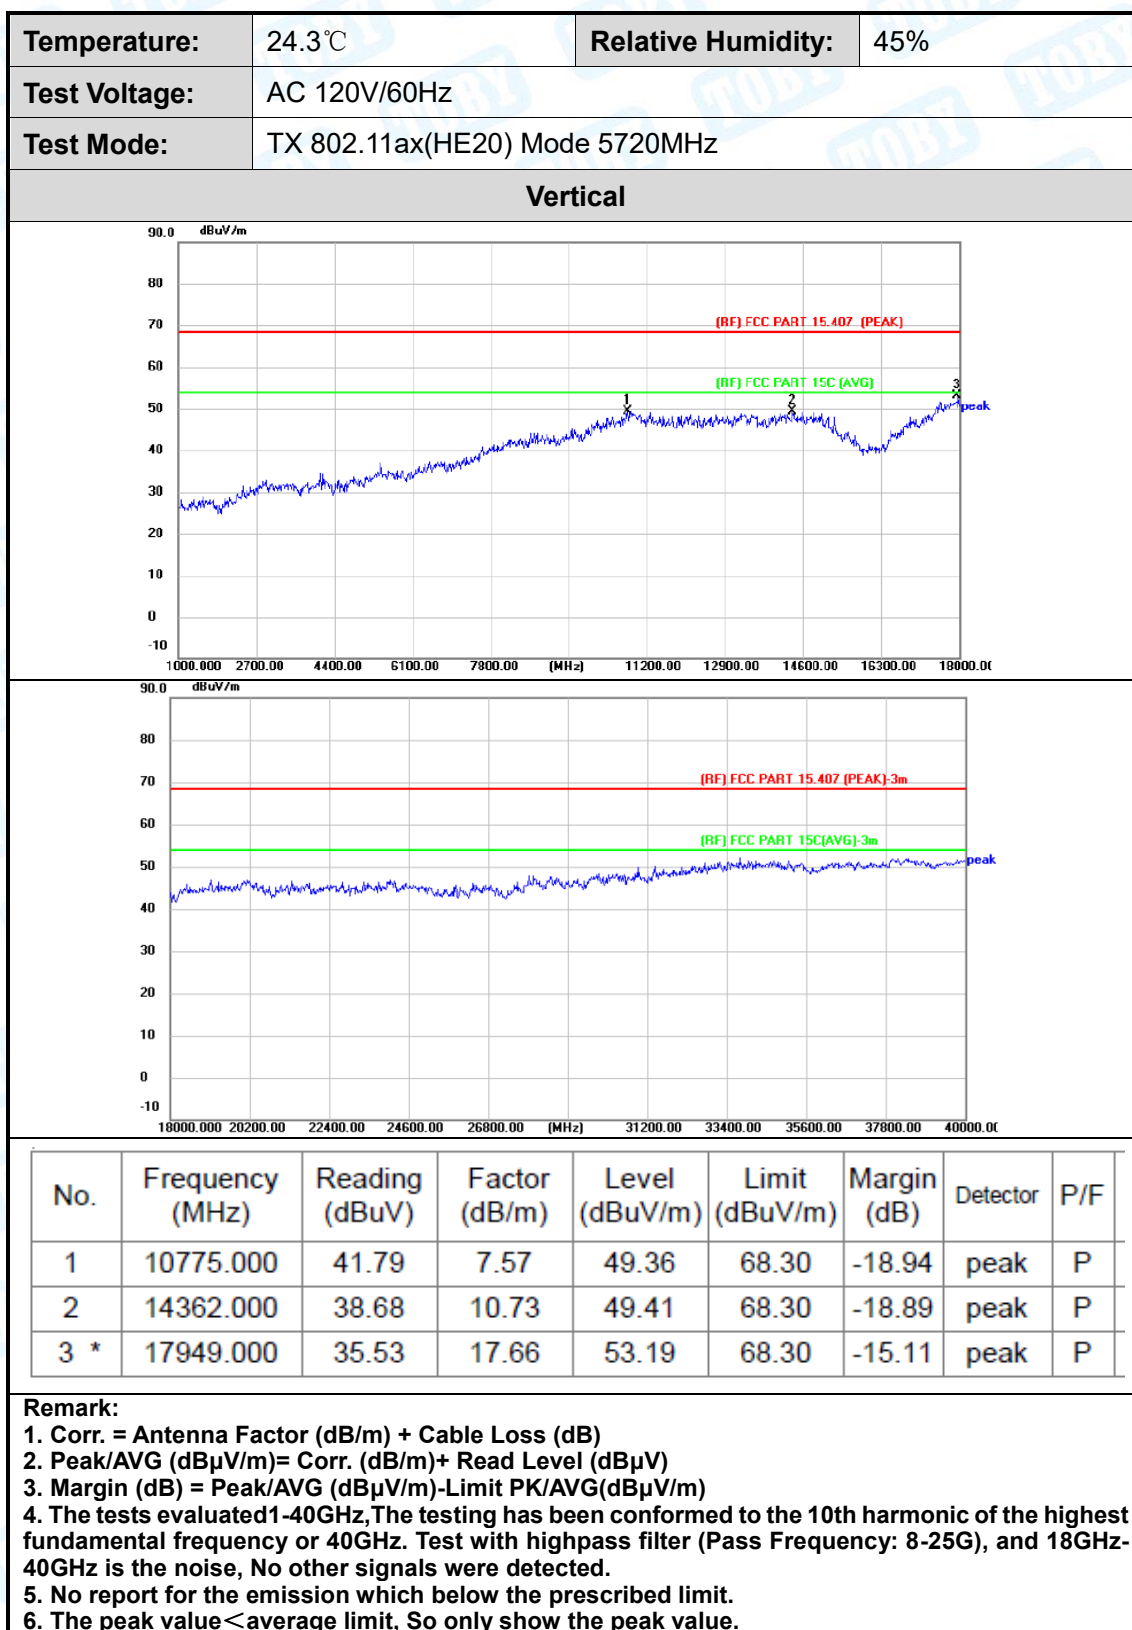

Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11a Mode 5745MHz		

Horizontal

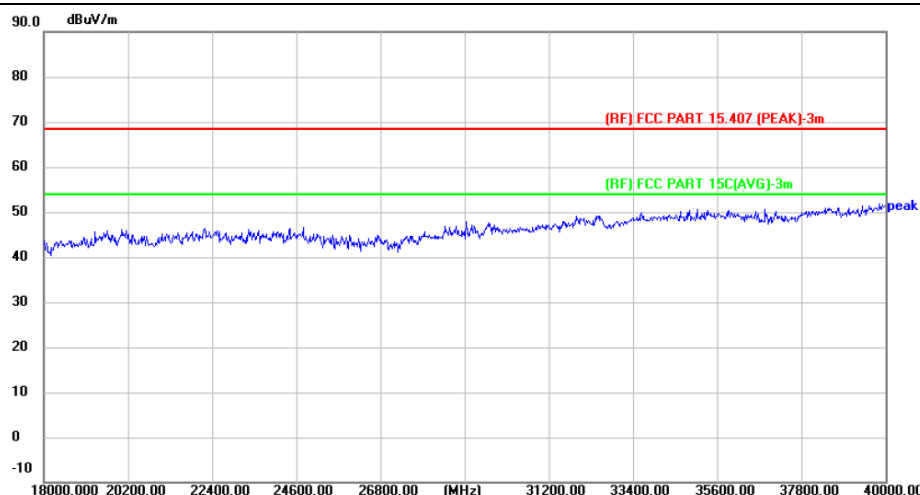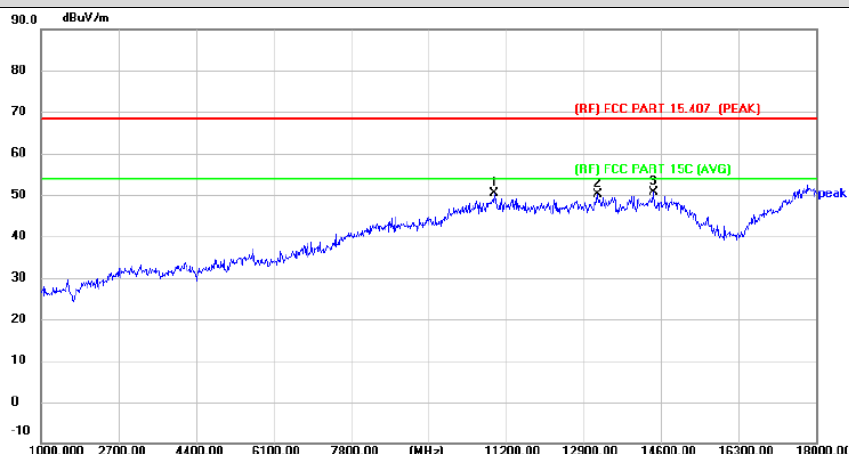



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10928.000	42.23	8.21	50.44	68.30	-17.86	peak	P
2	13206.000	40.26	9.80	50.06	68.30	-18.24	peak	P
3 *	14430.000	39.83	10.89	50.72	68.30	-17.58	peak	P


Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.




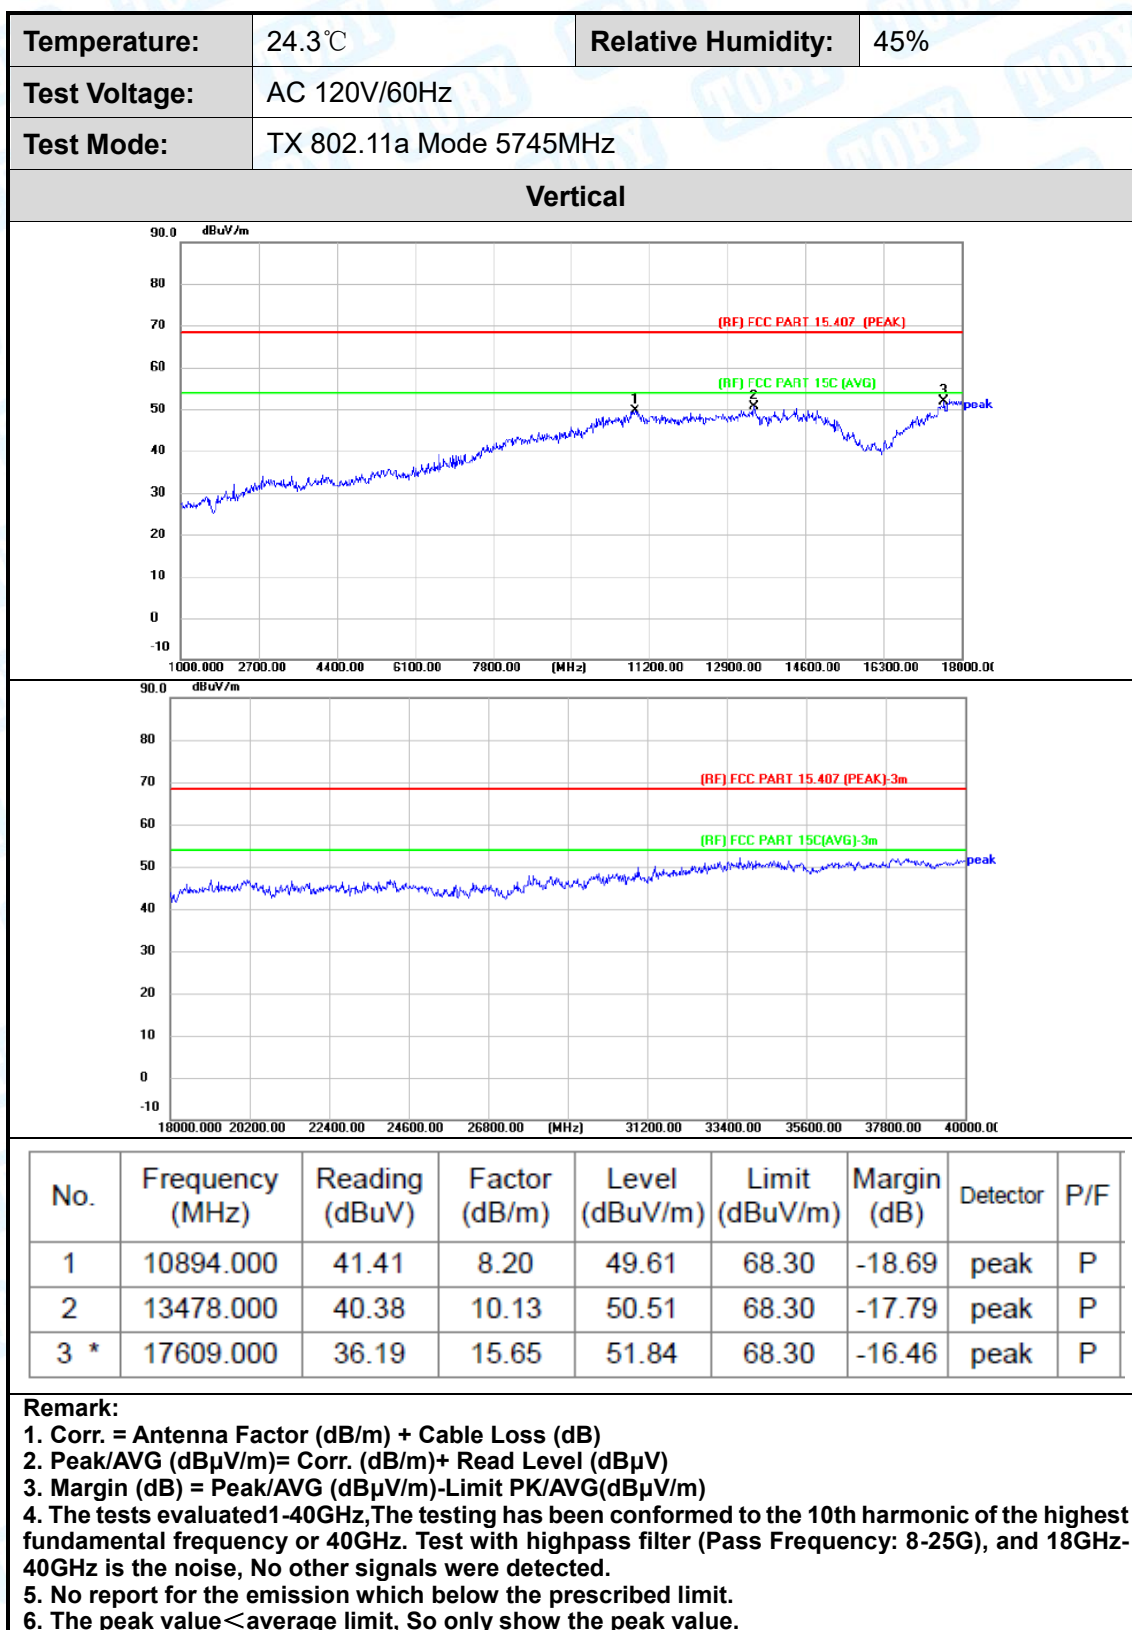


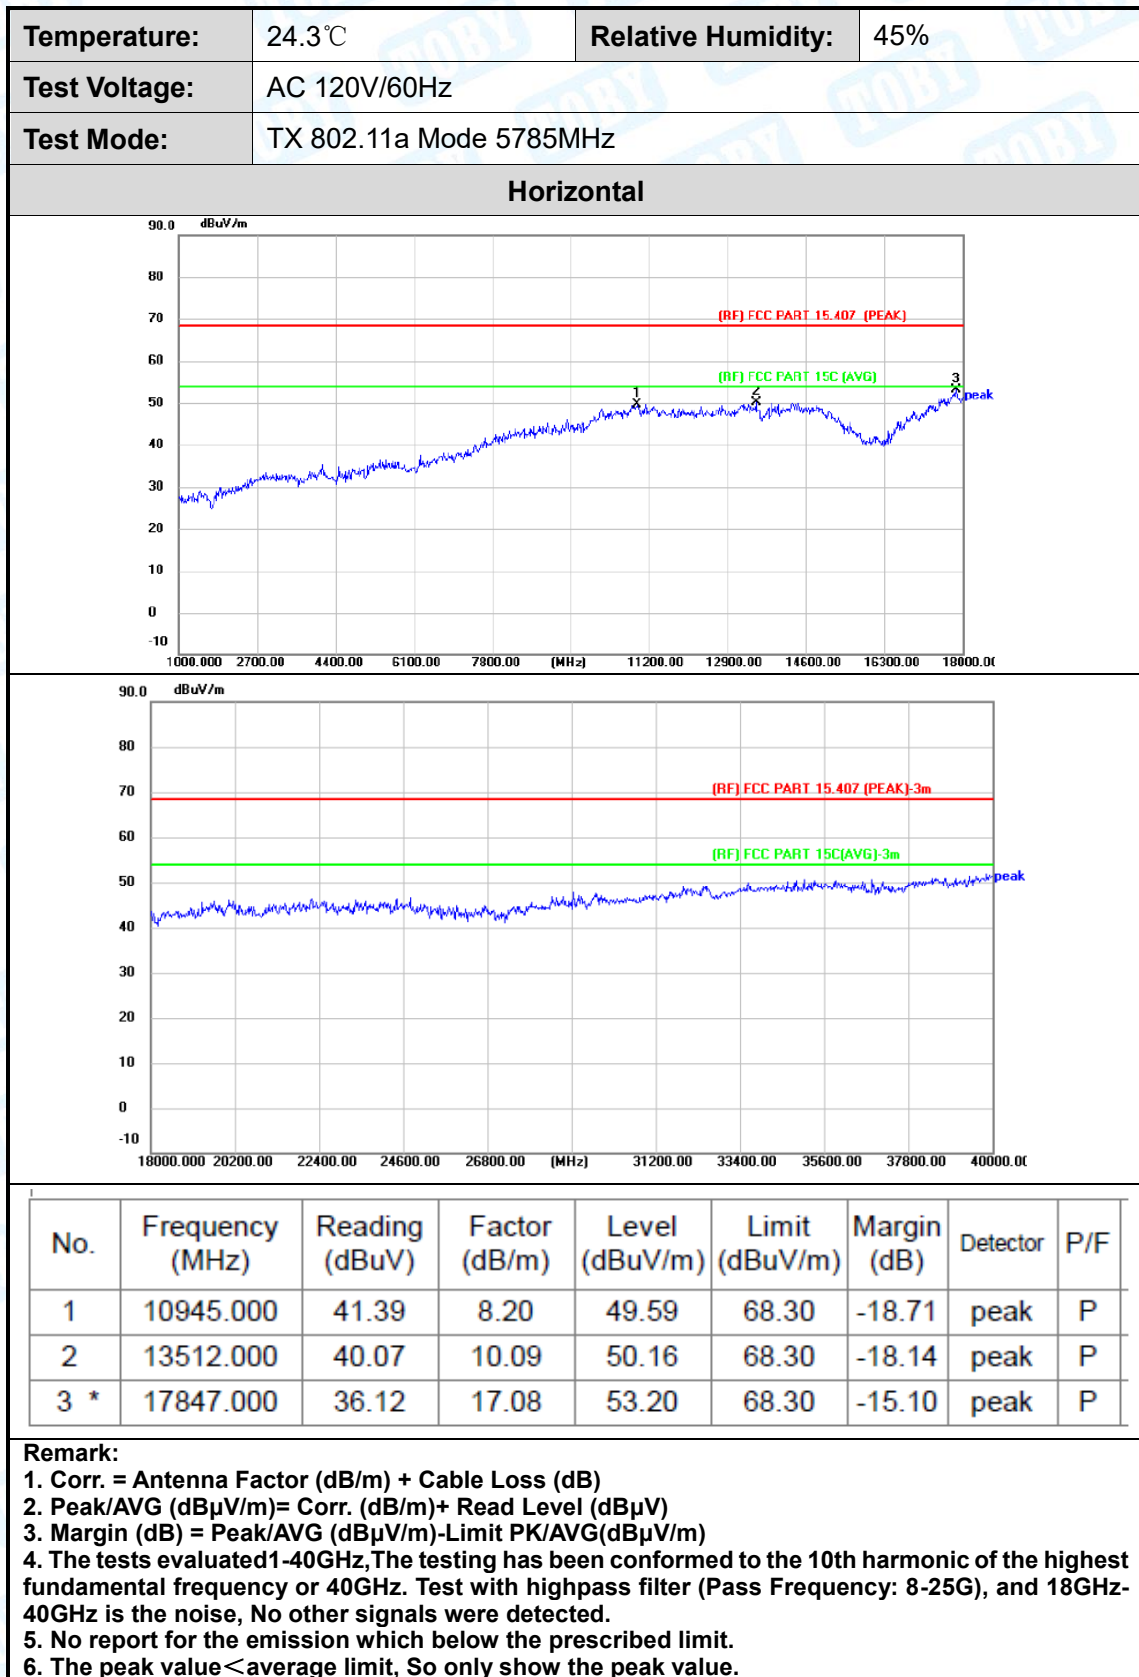


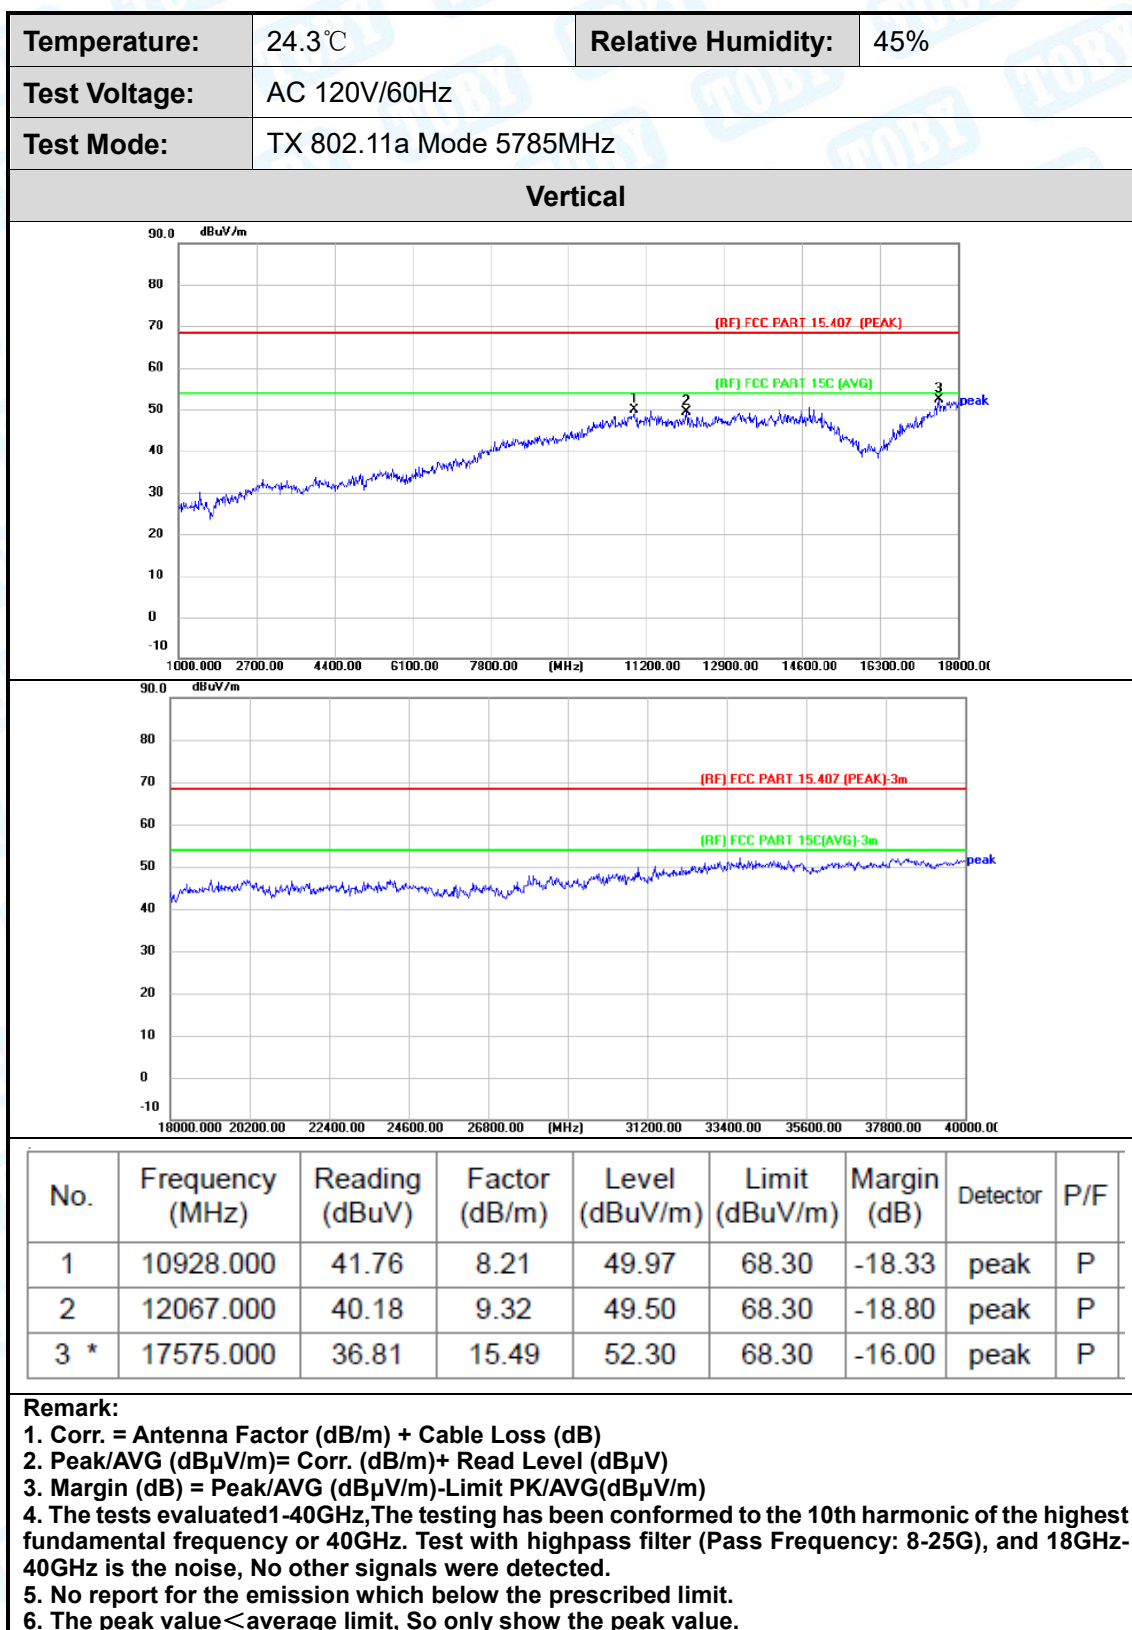


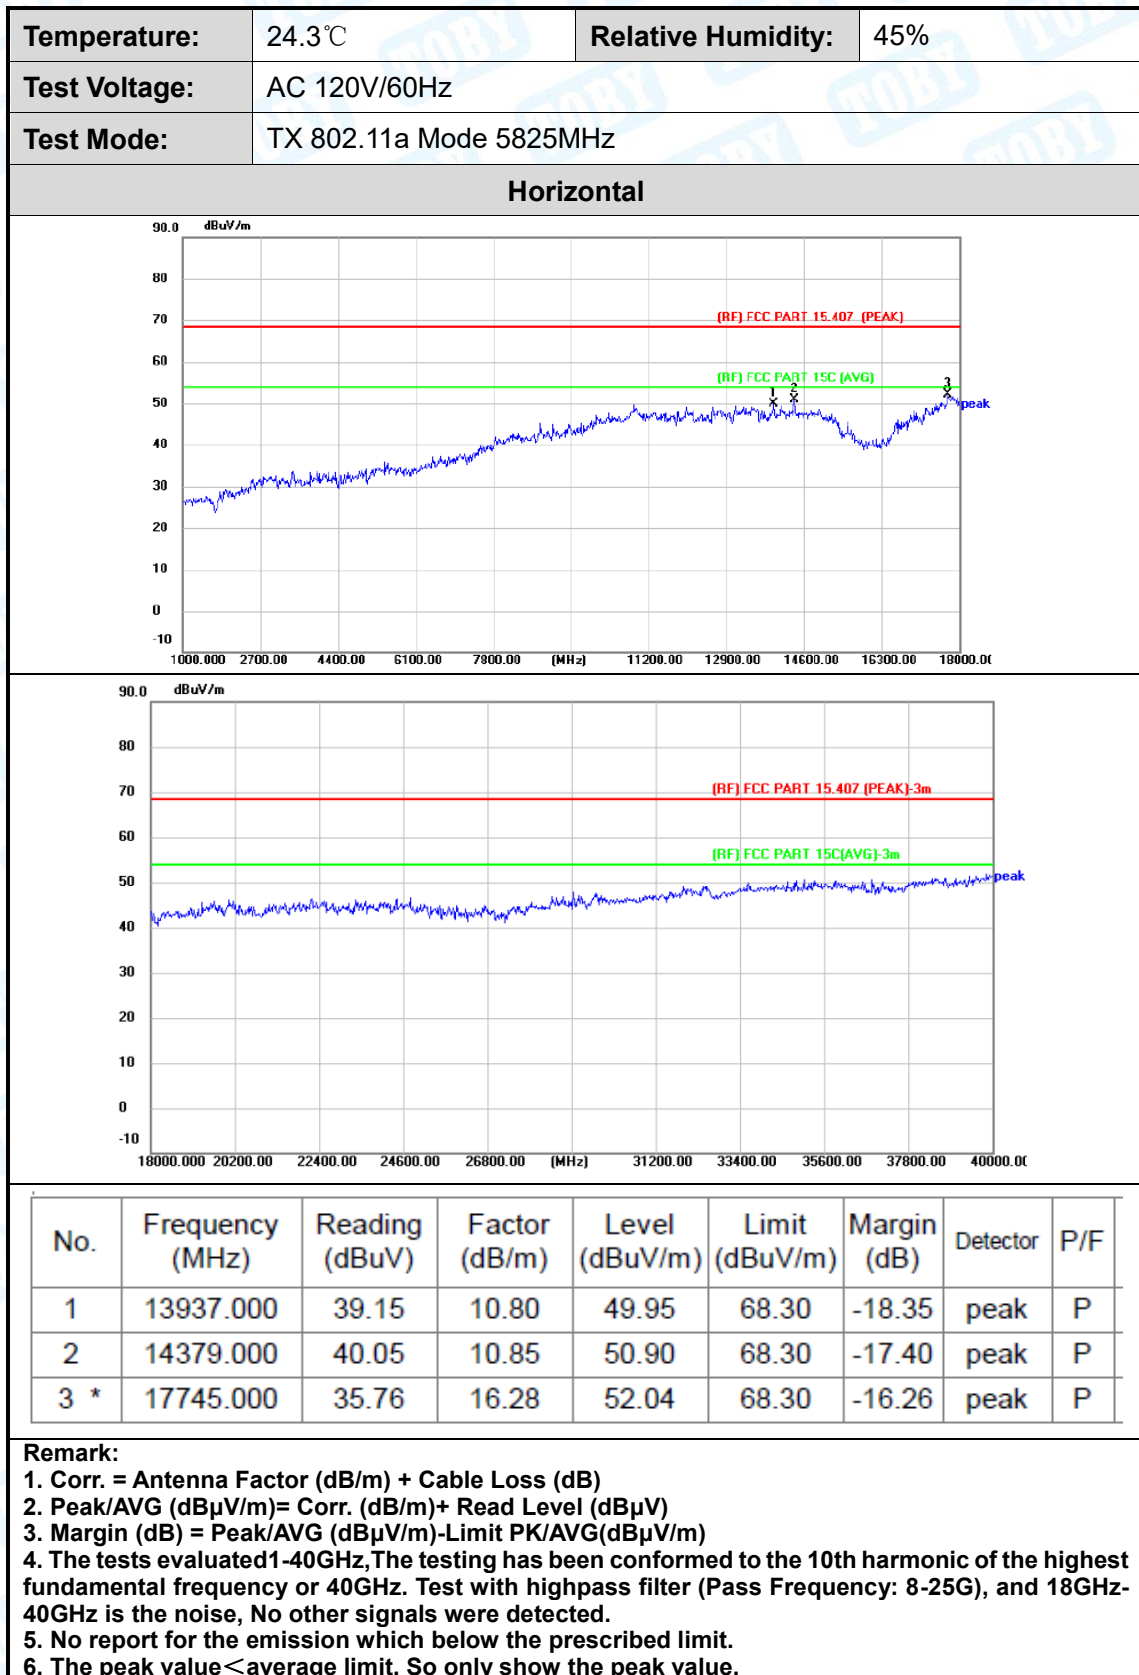


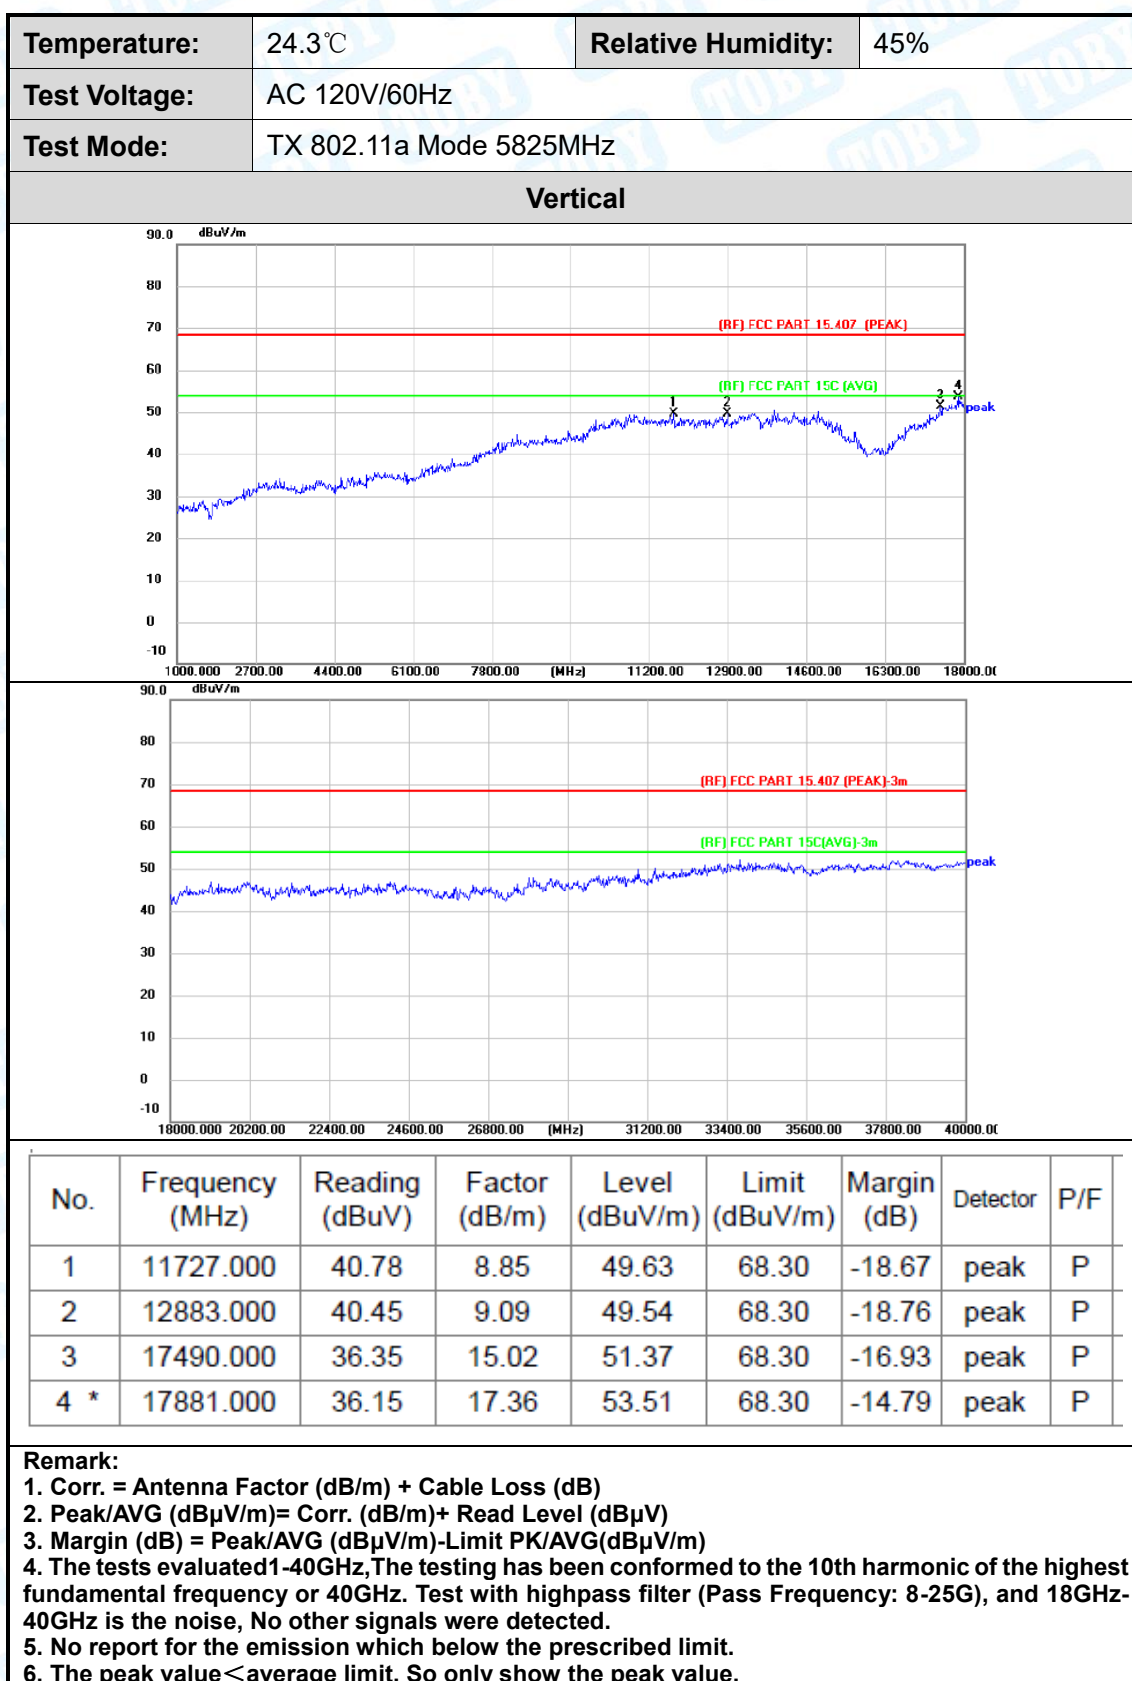

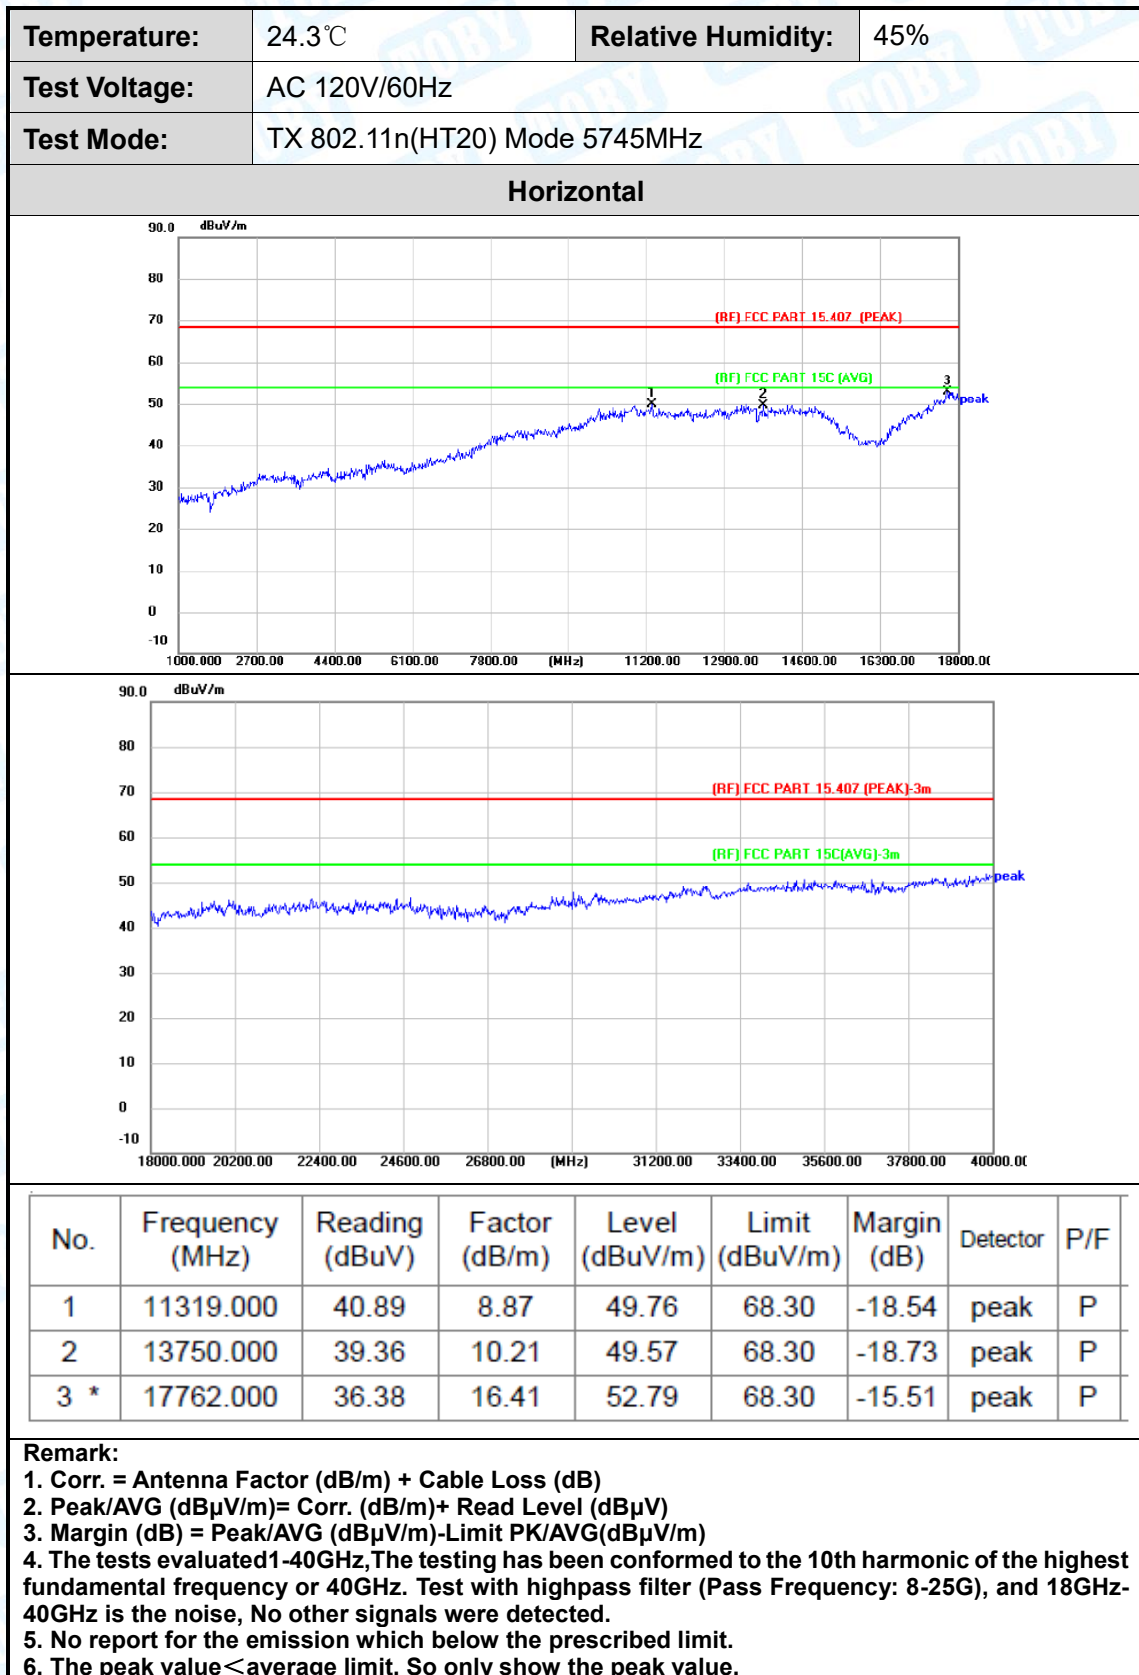


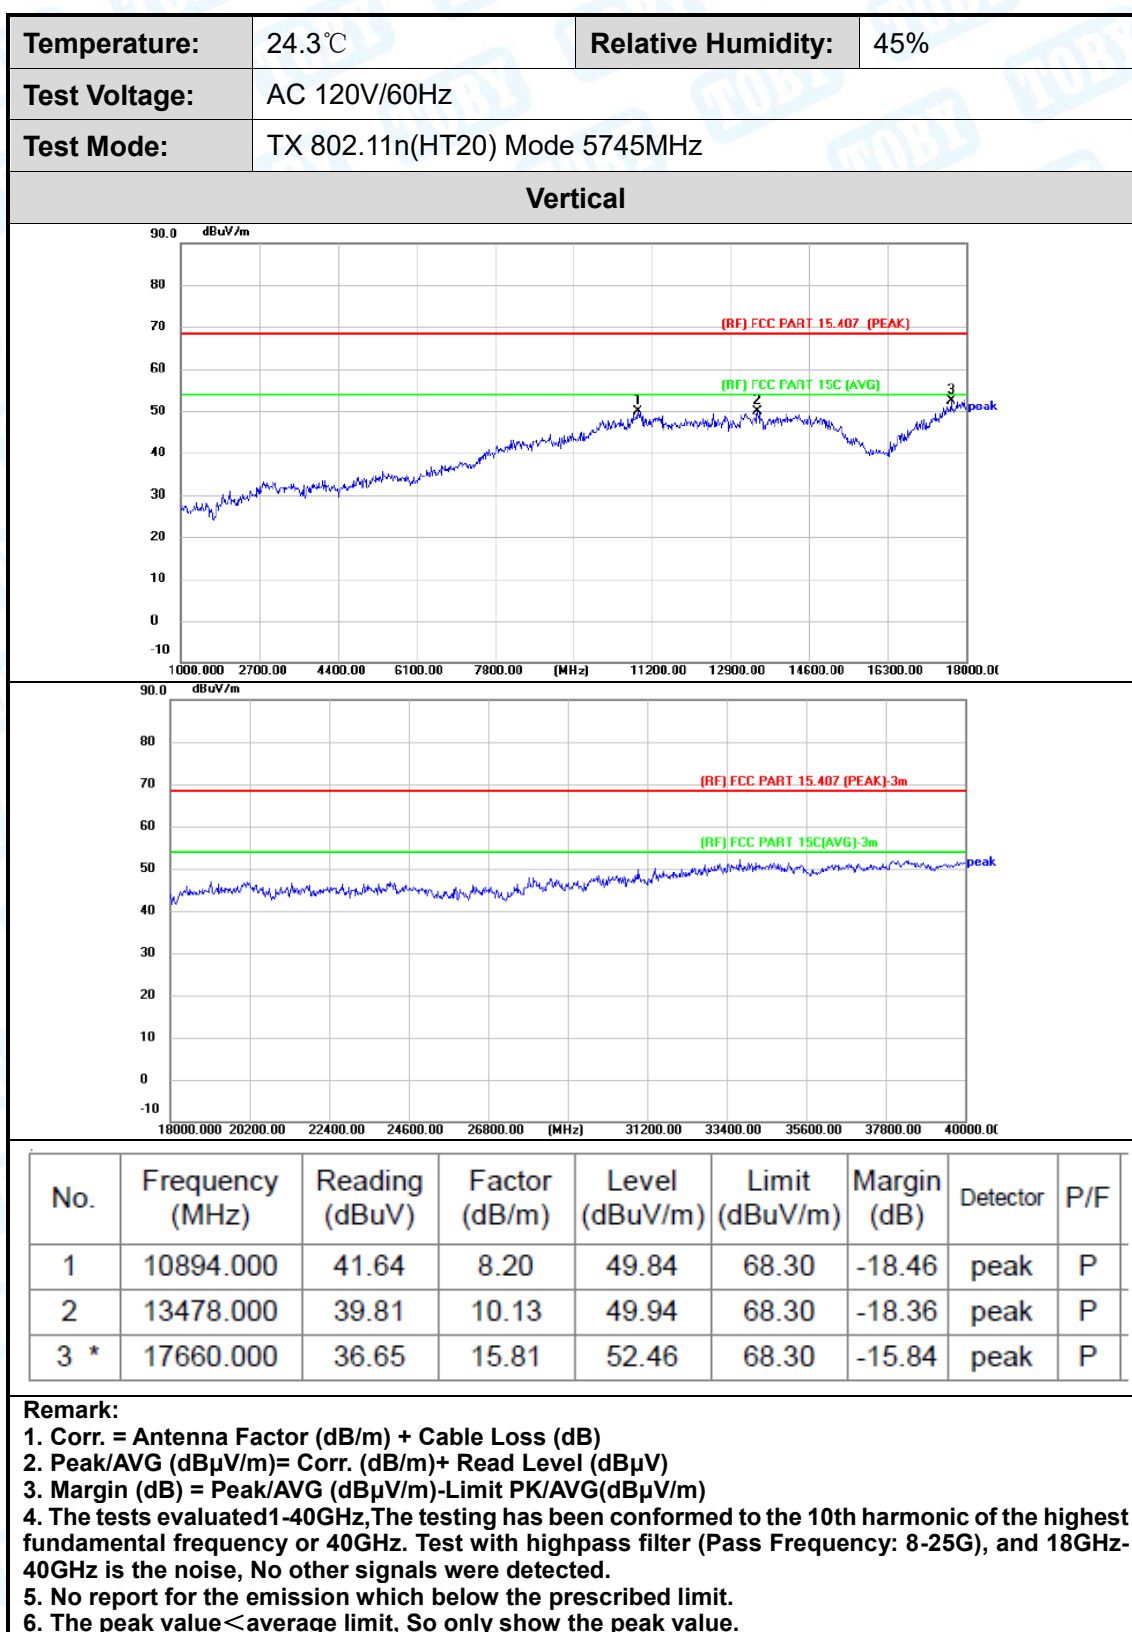


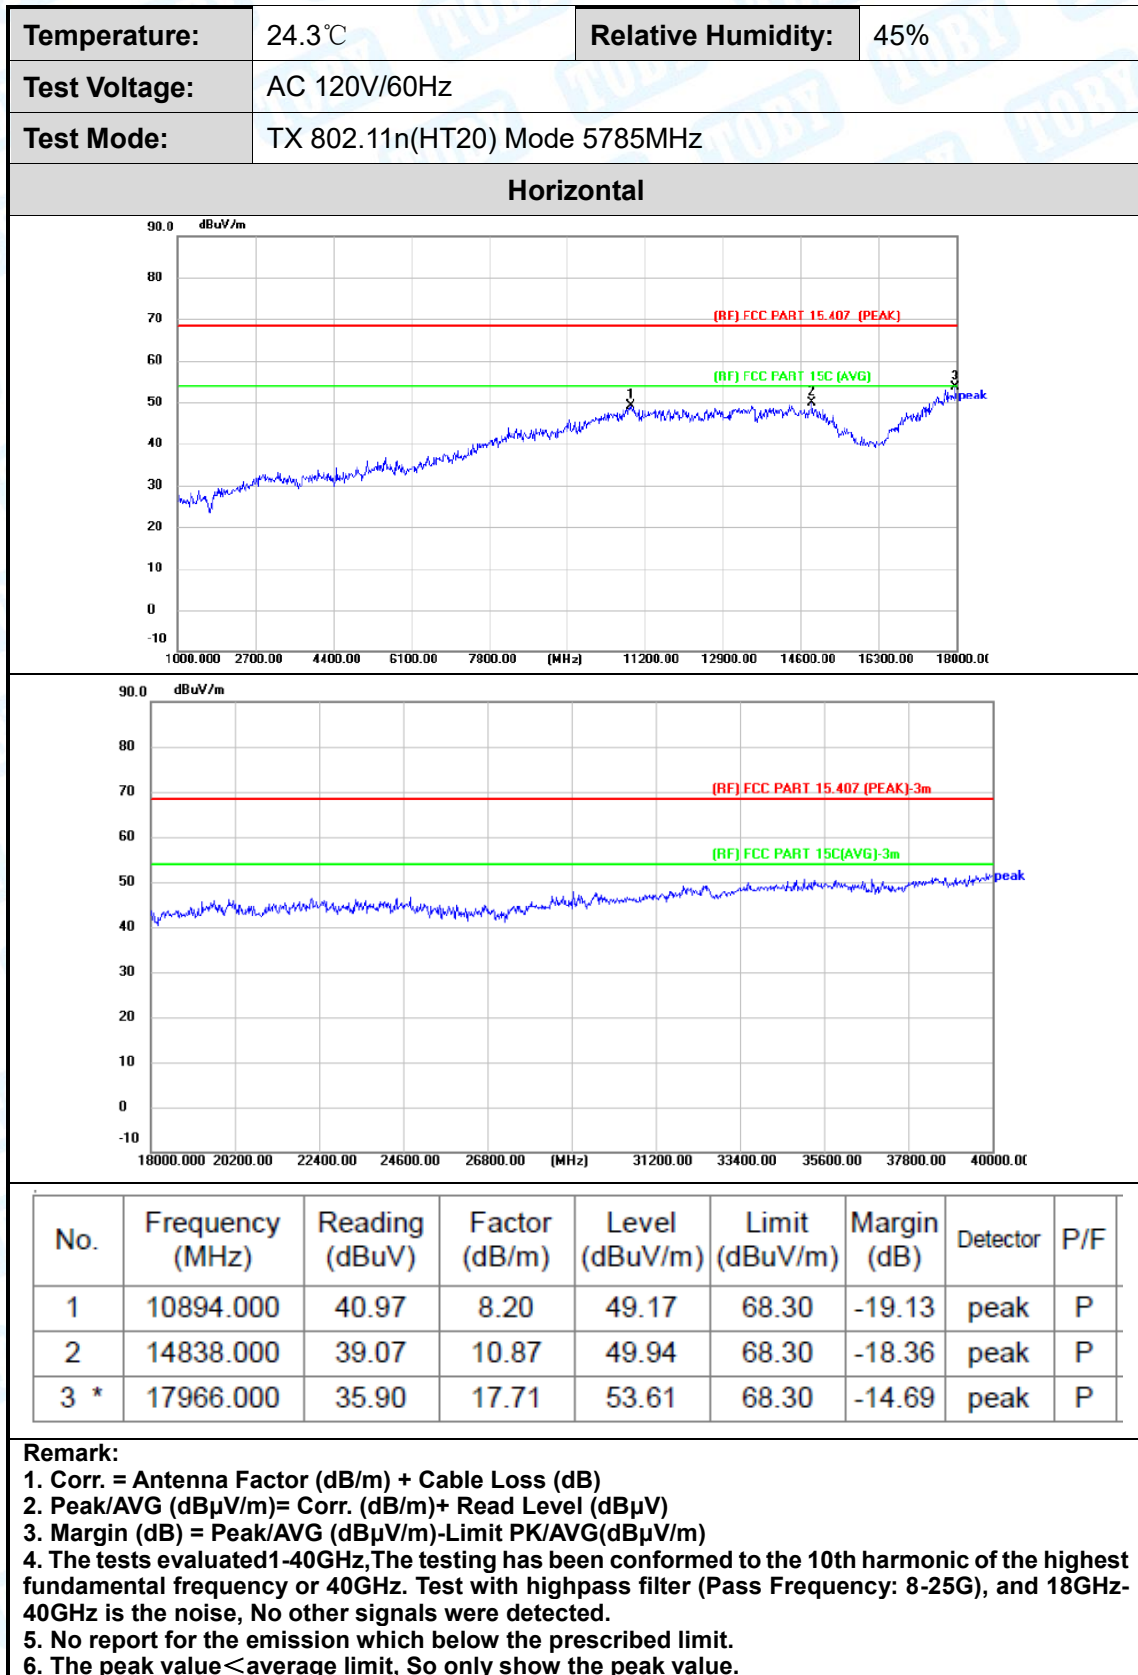

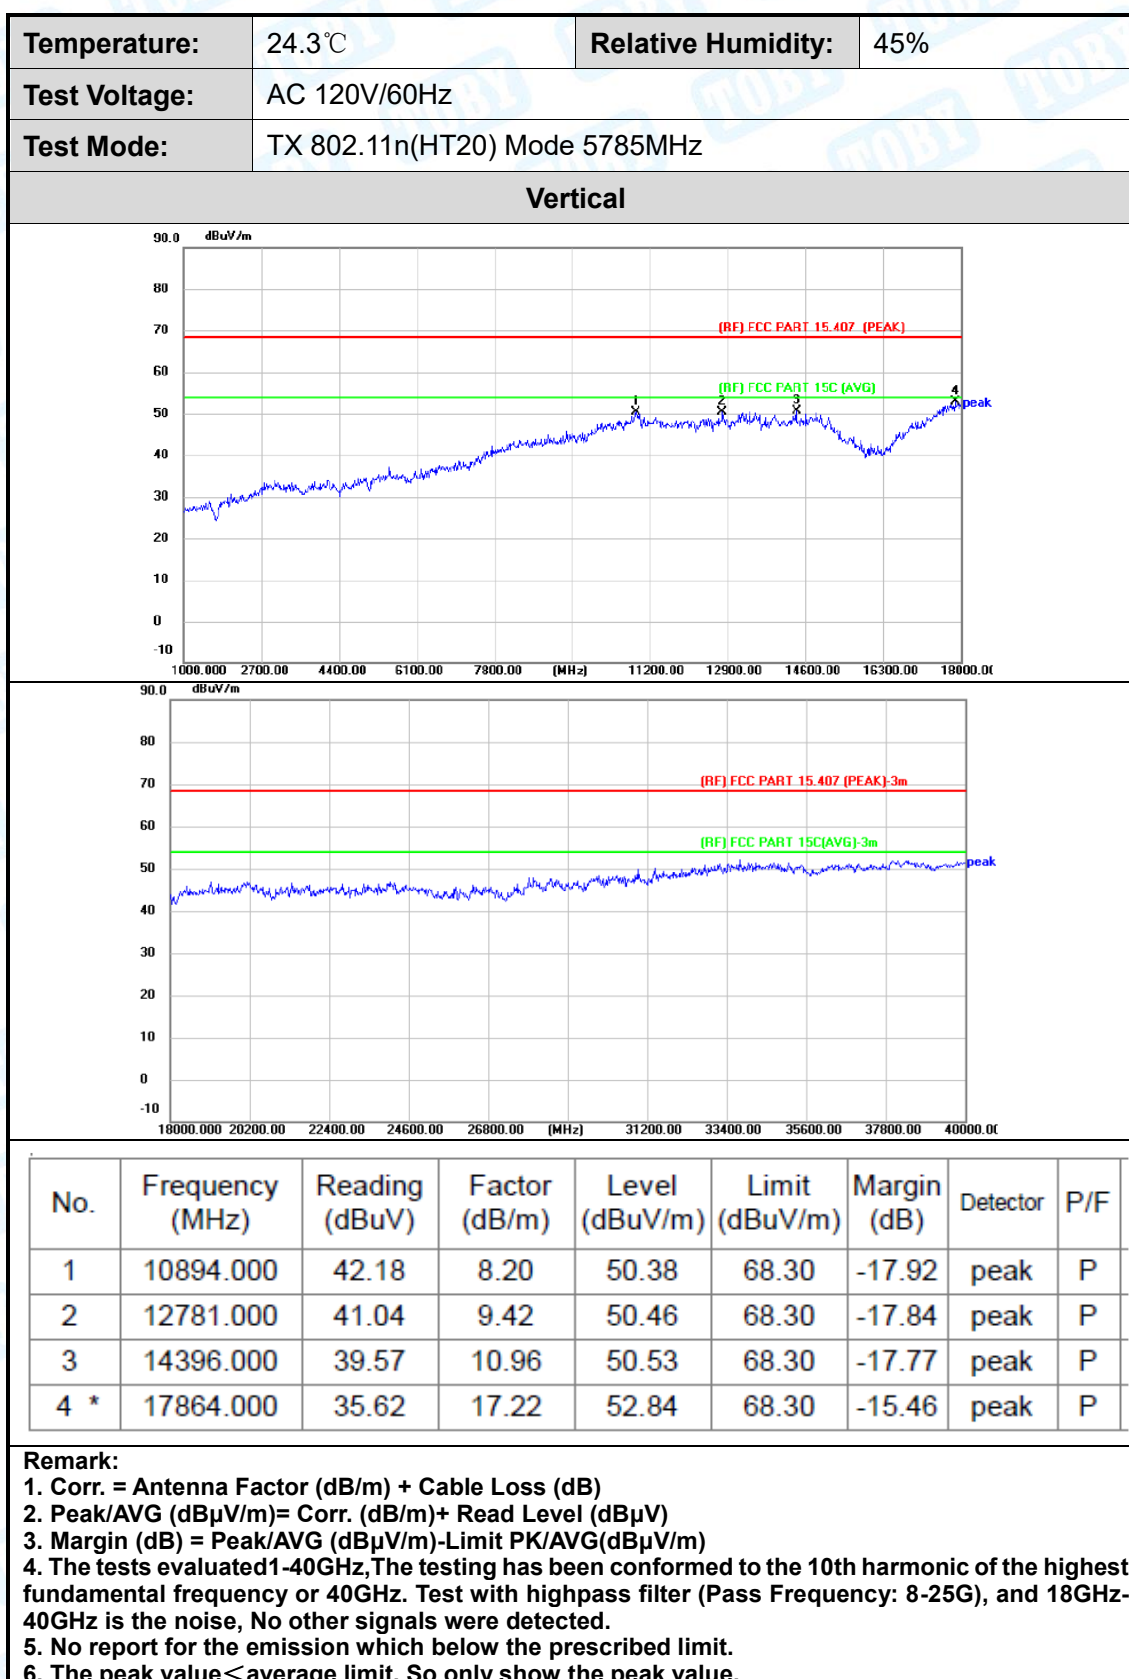

Temperature:	24.3℃	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT20) Mode 5825MHz		

Horizontal

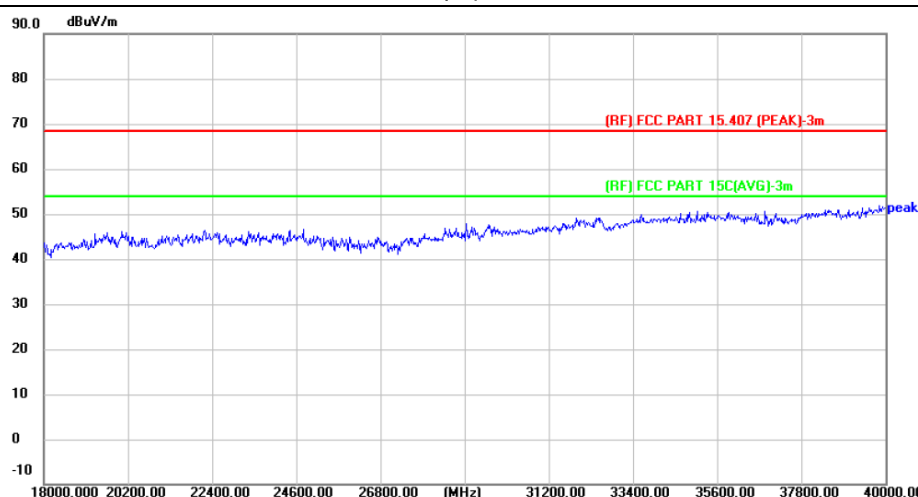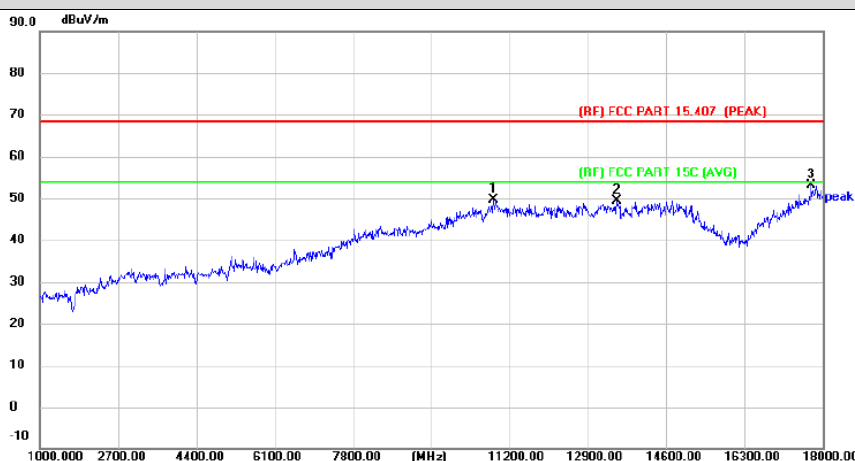



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10843.000	41.56	7.96	49.52	68.30	-18.78	peak	P
2	13512.000	39.38	10.09	49.47	68.30	-18.83	peak	P
3 *	17745.000	36.78	16.28	53.06	68.30	-15.24	peak	P


Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.




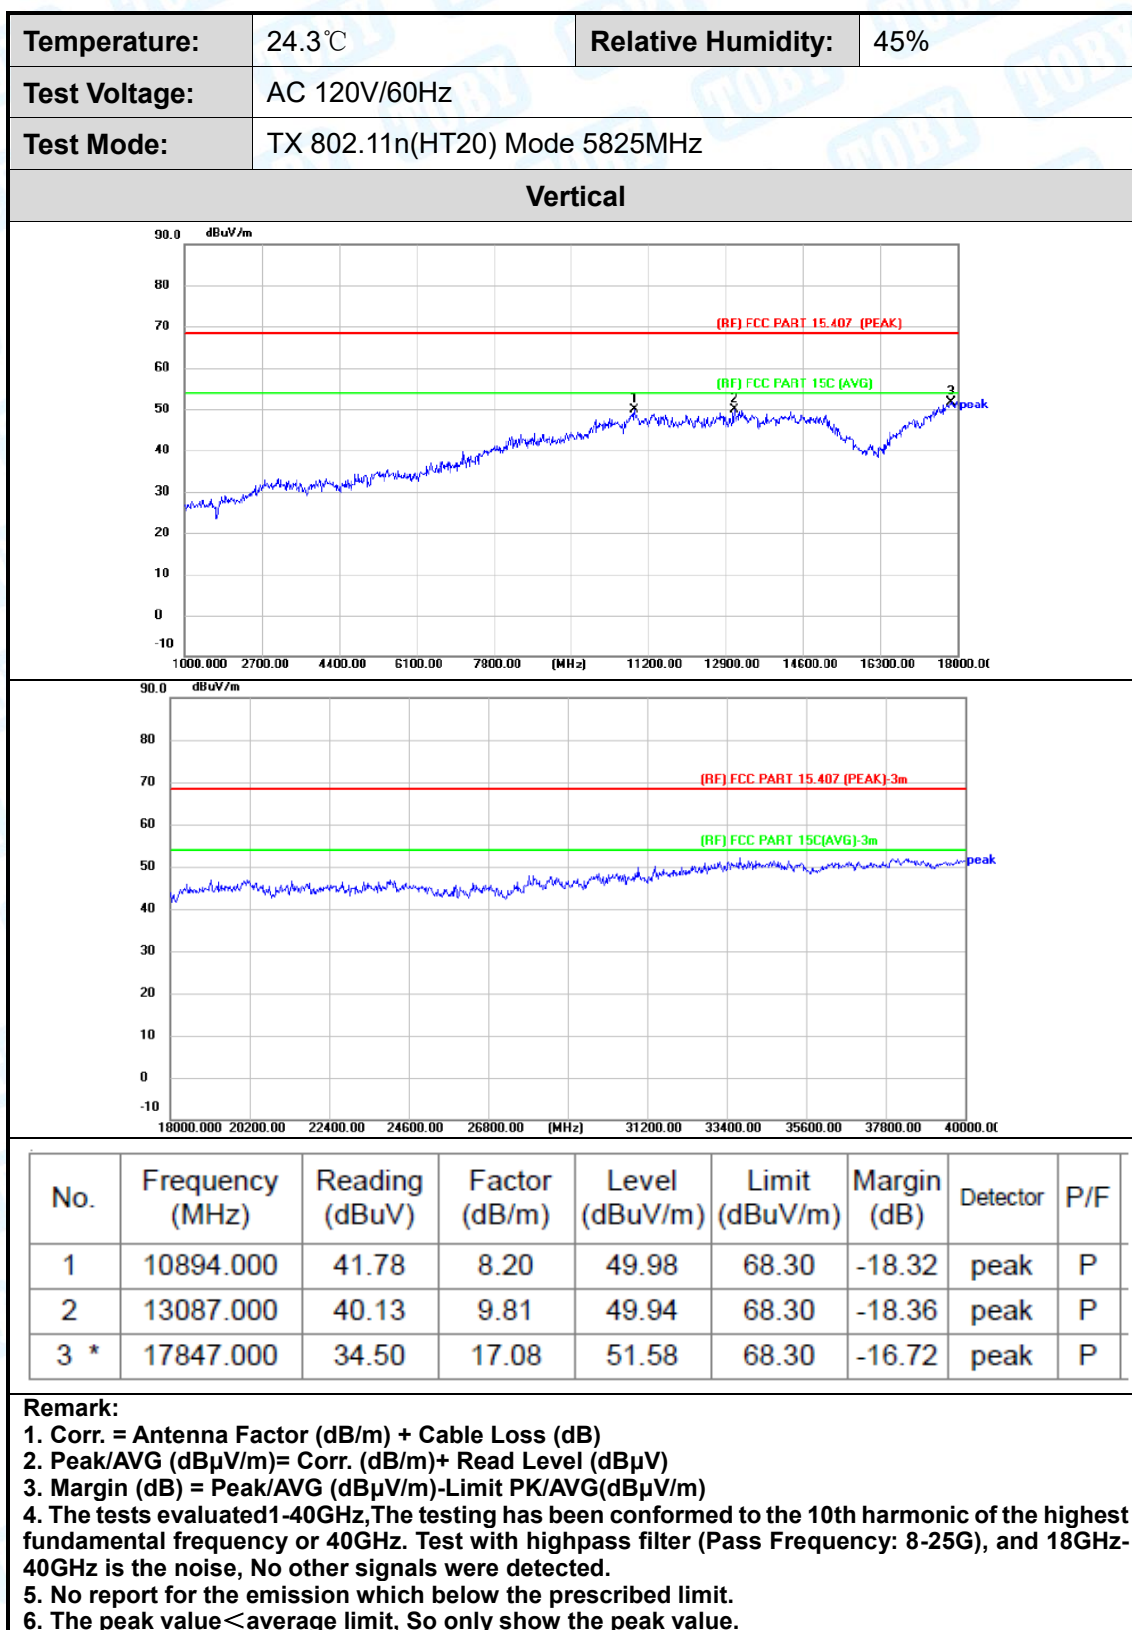


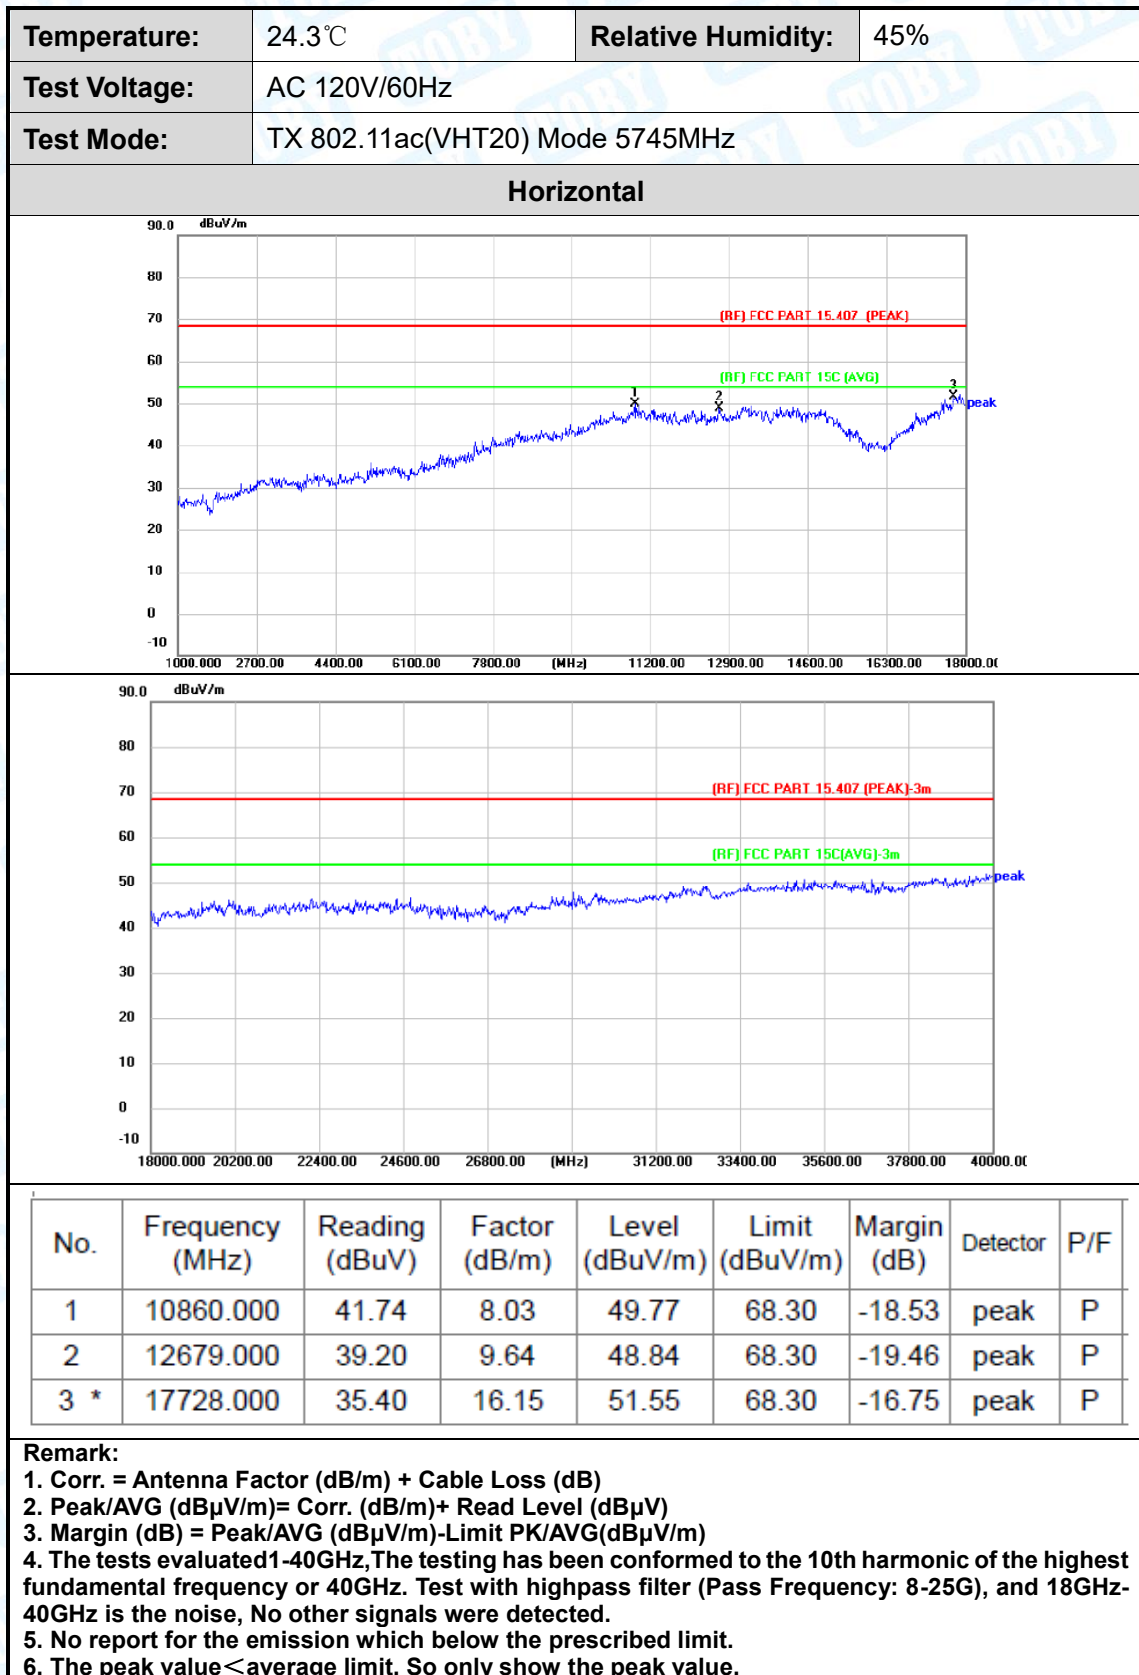


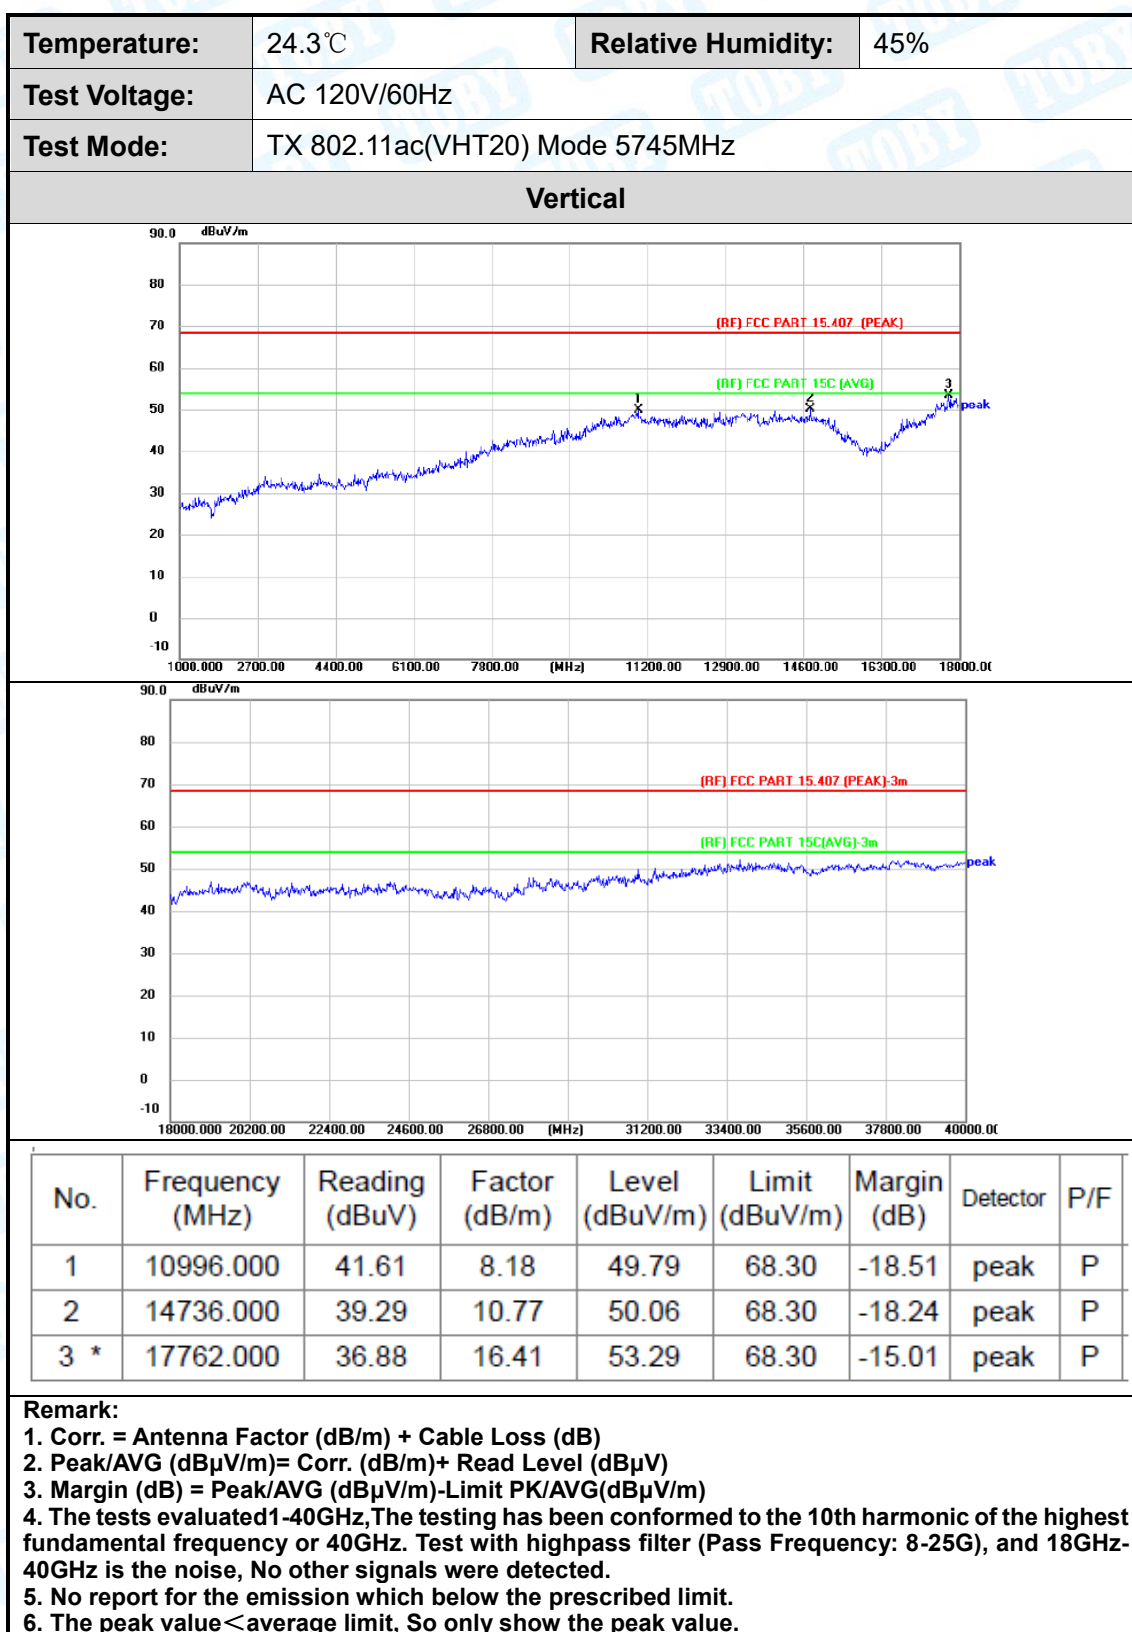


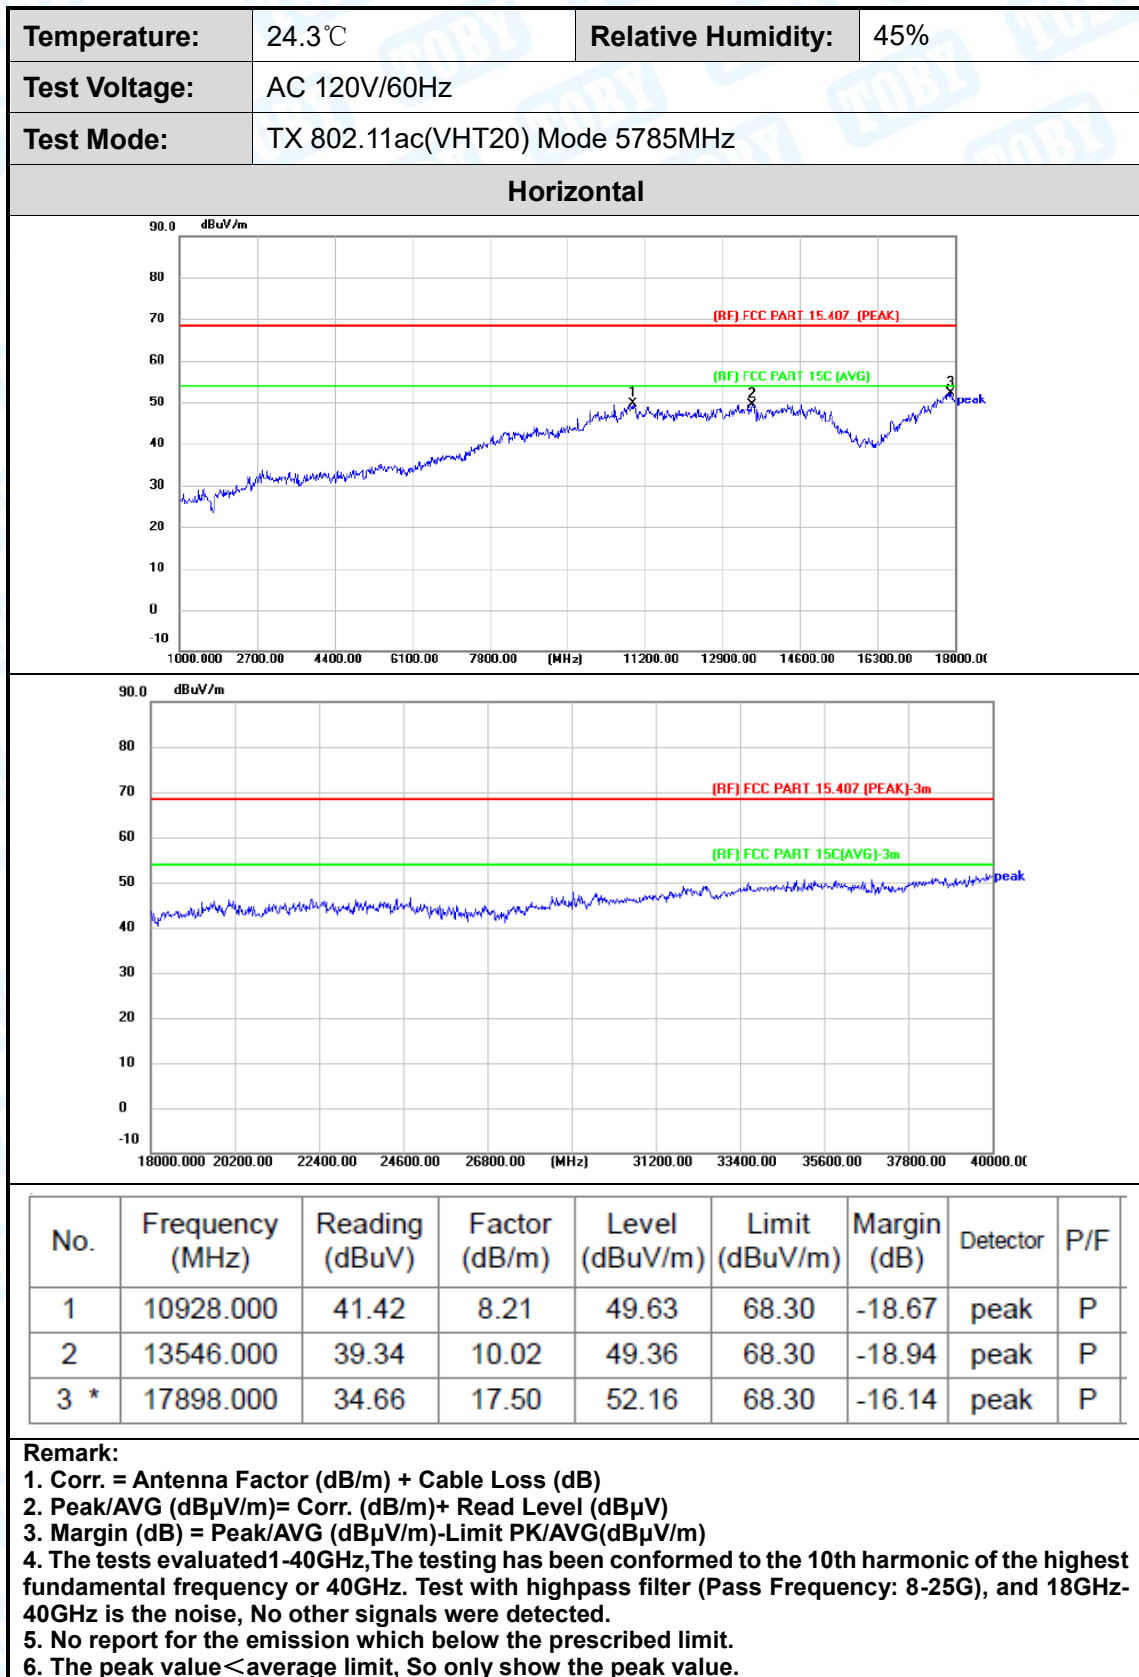


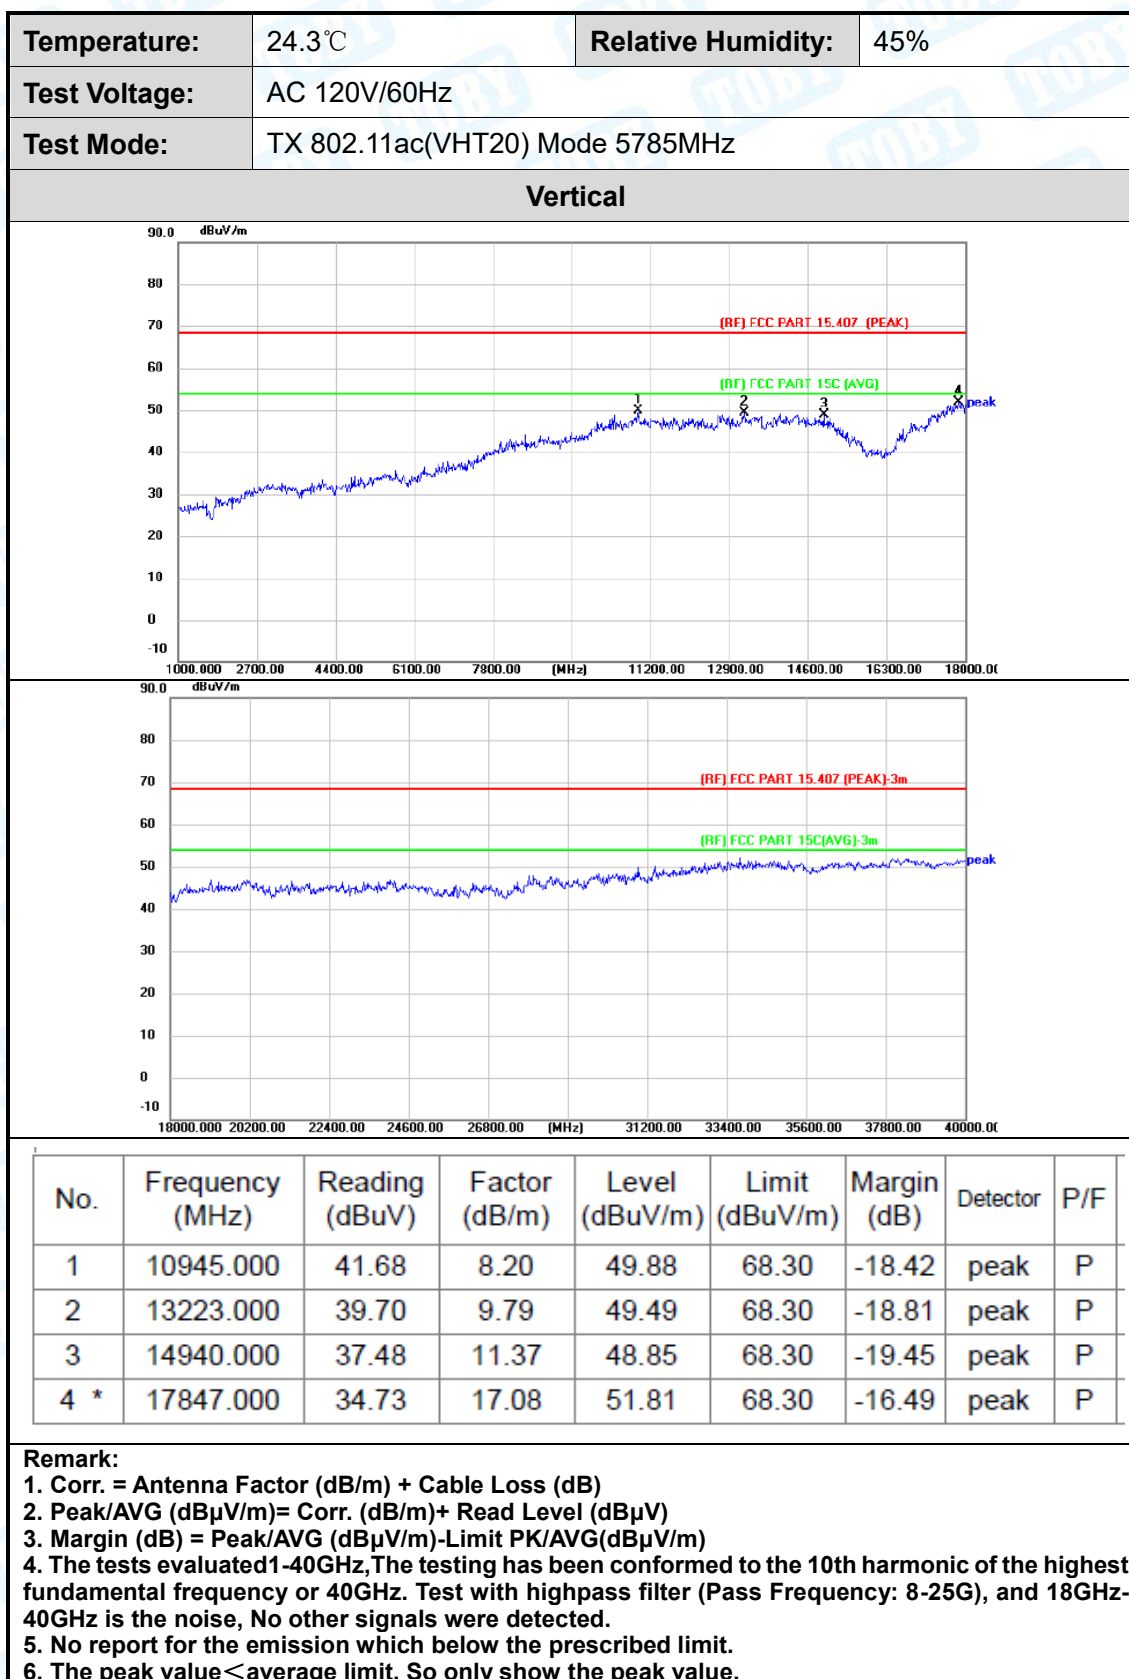


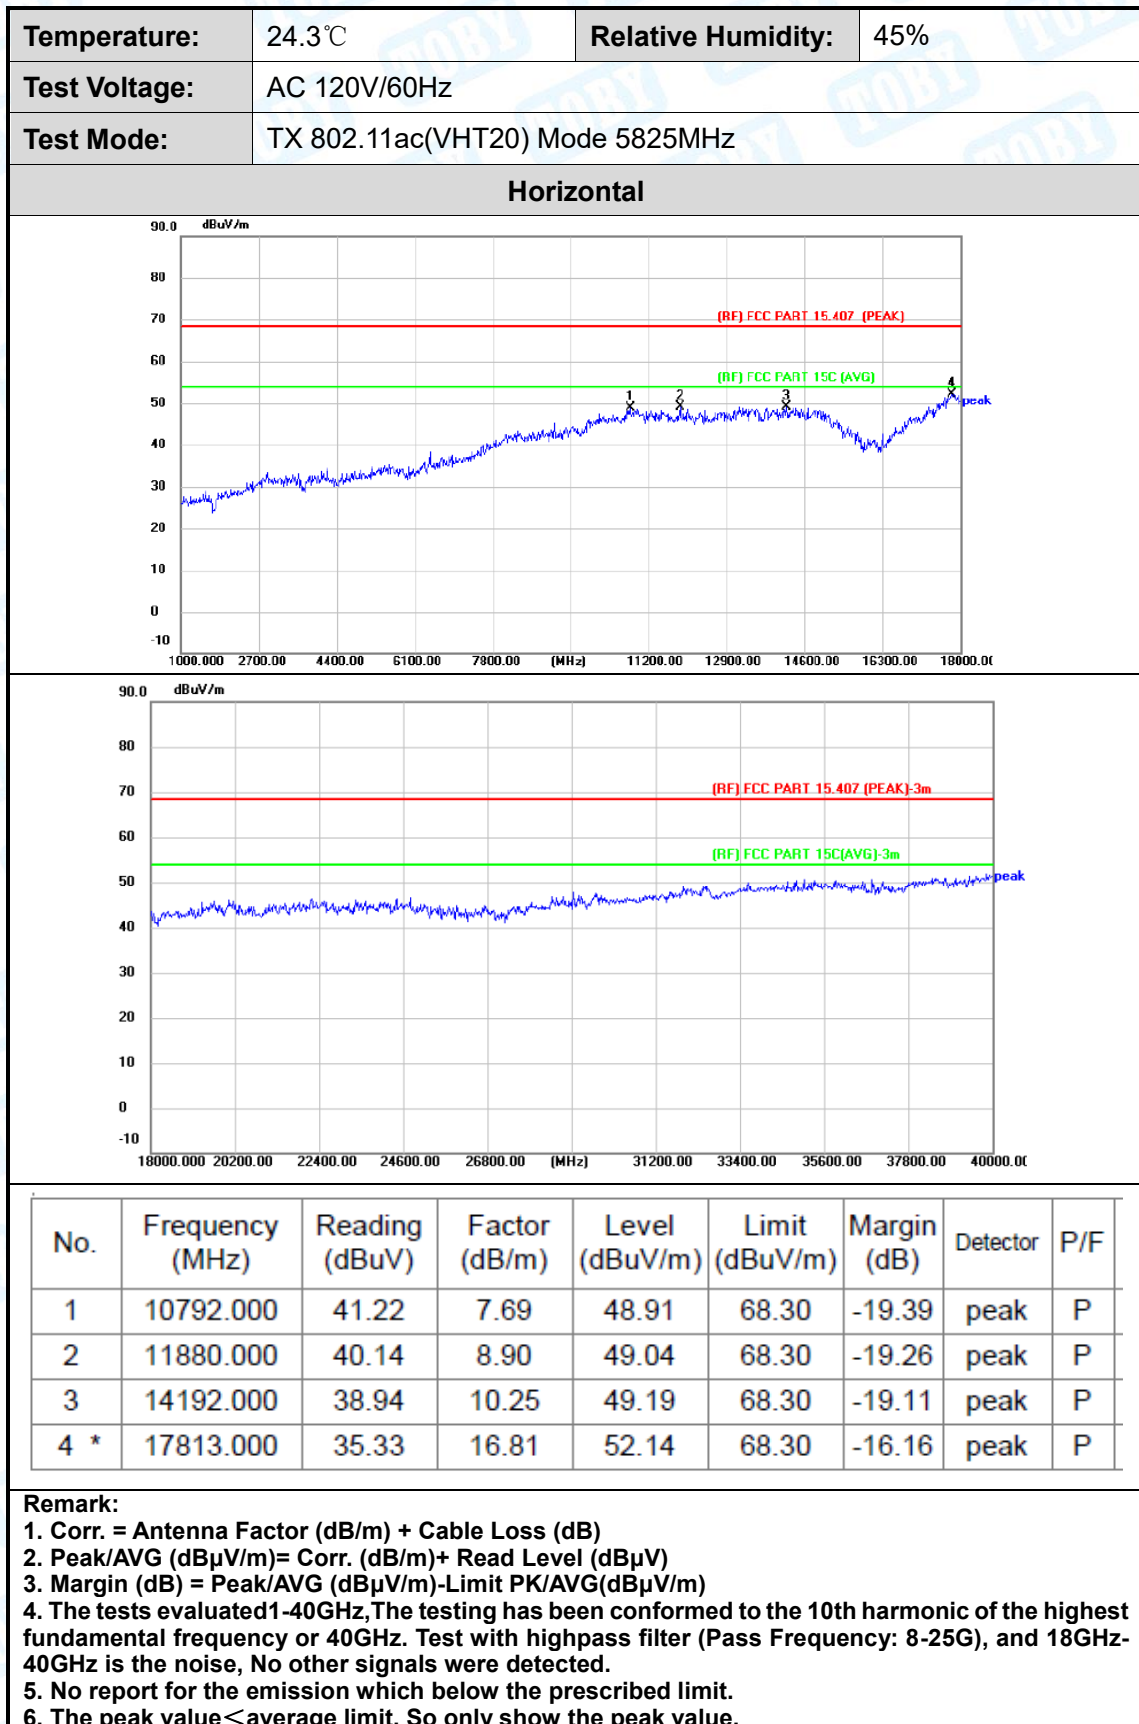


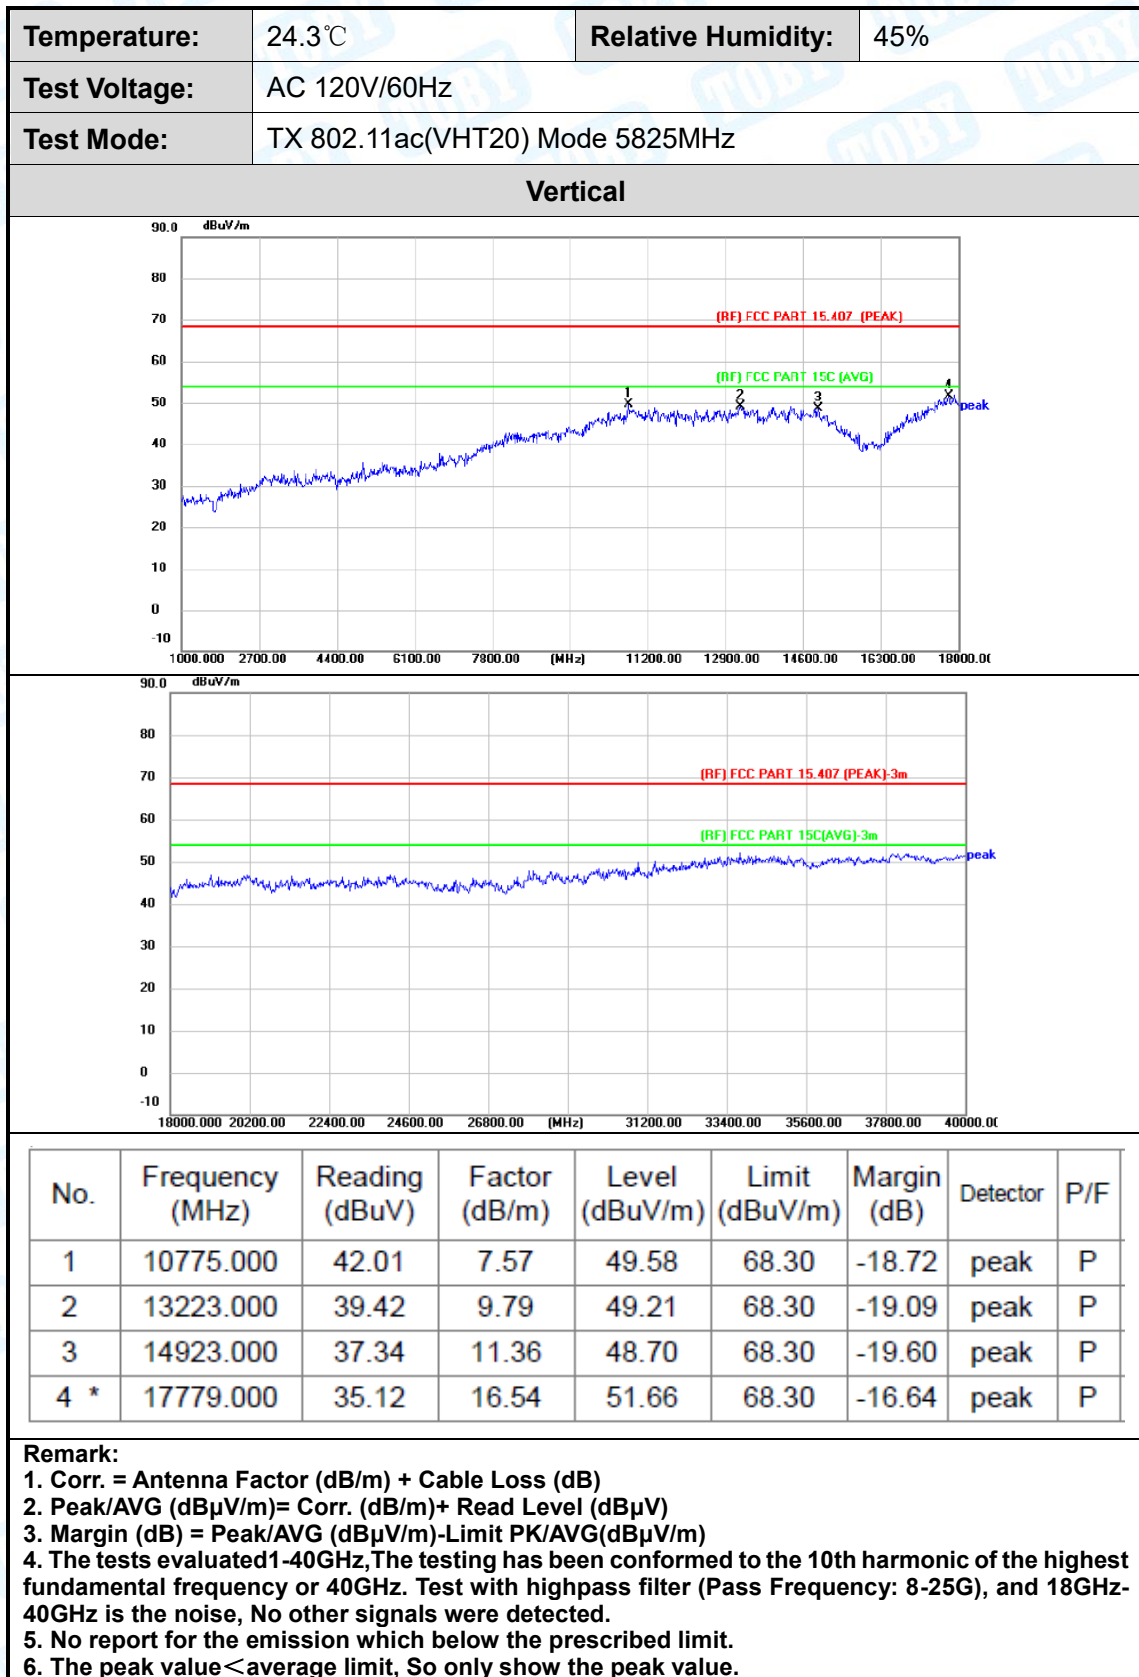


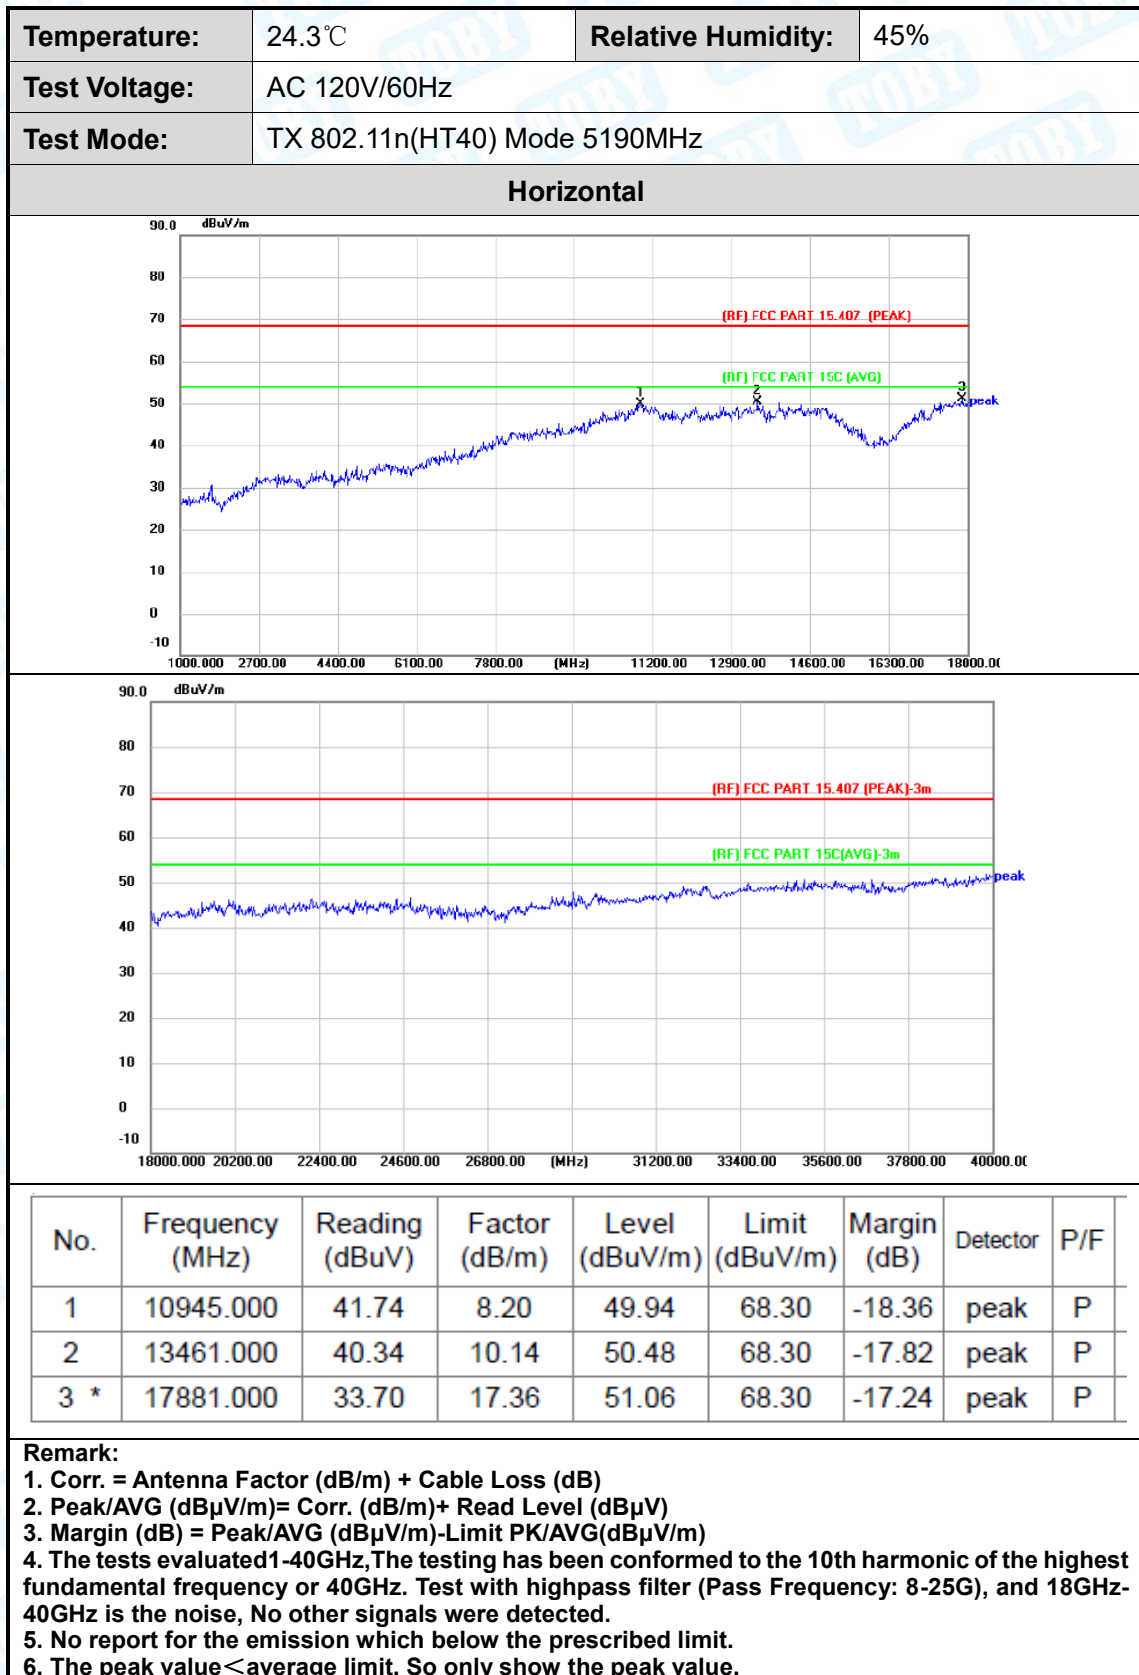


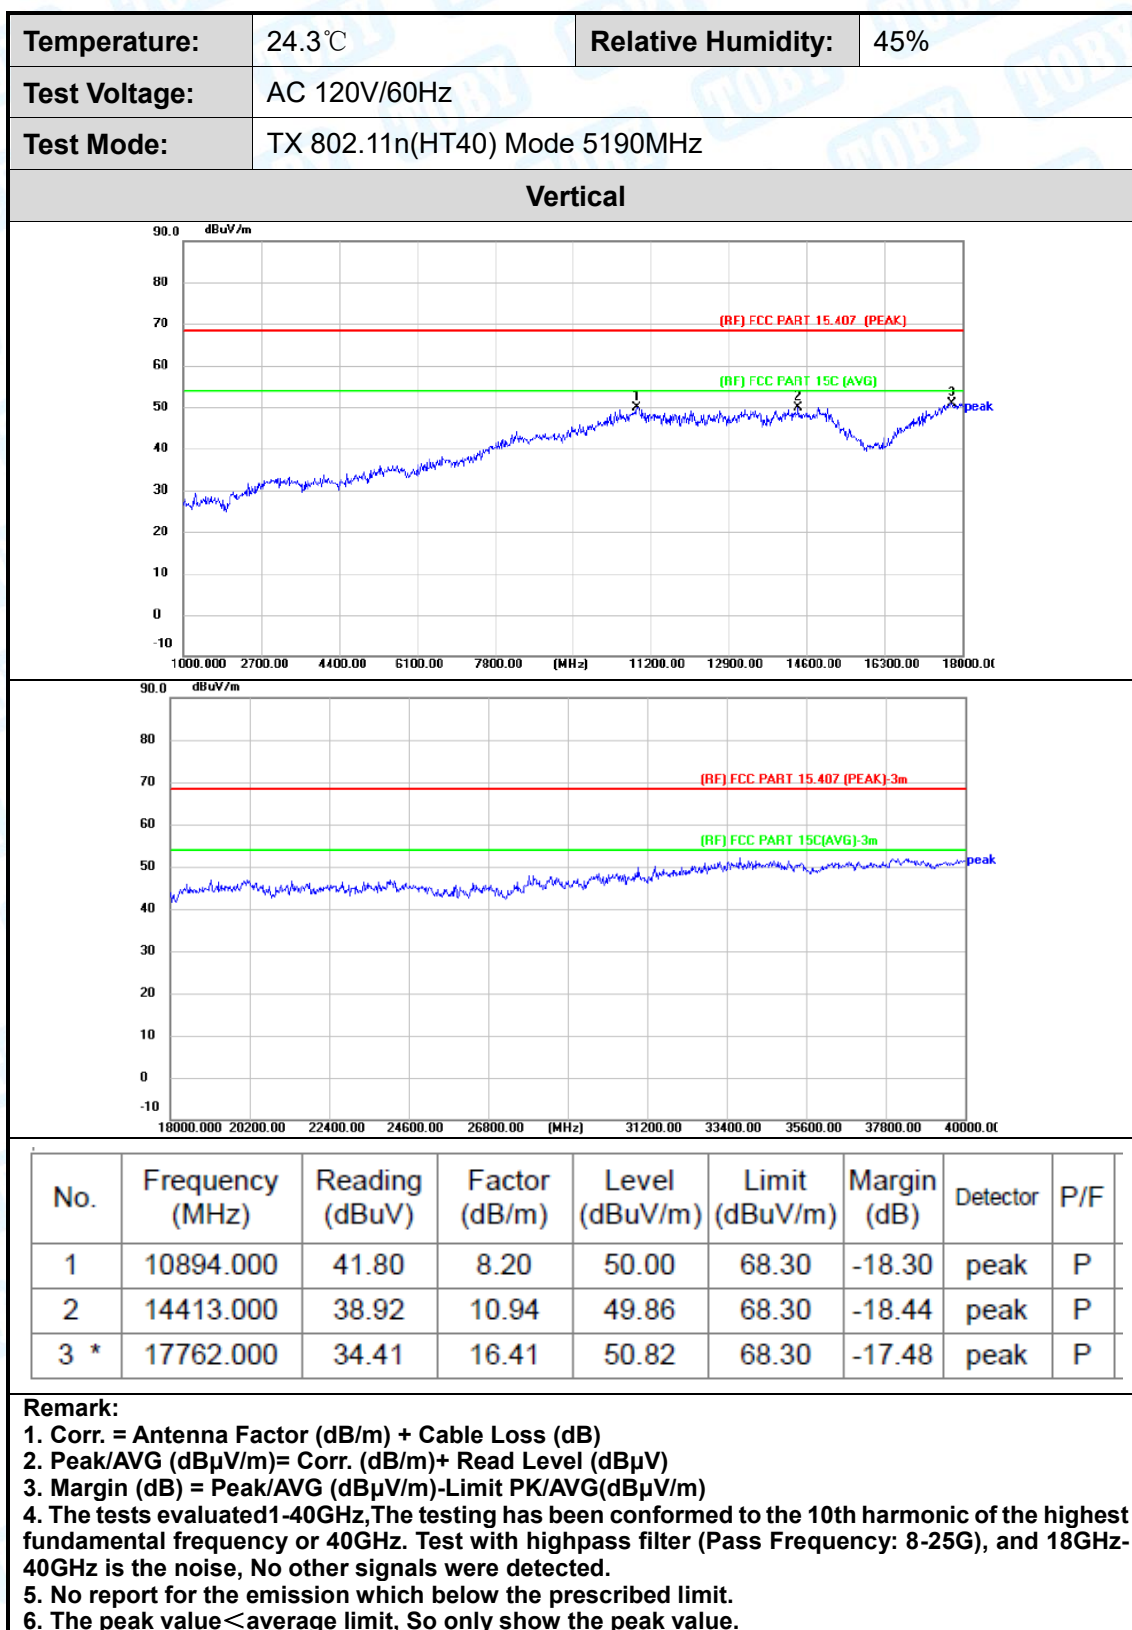


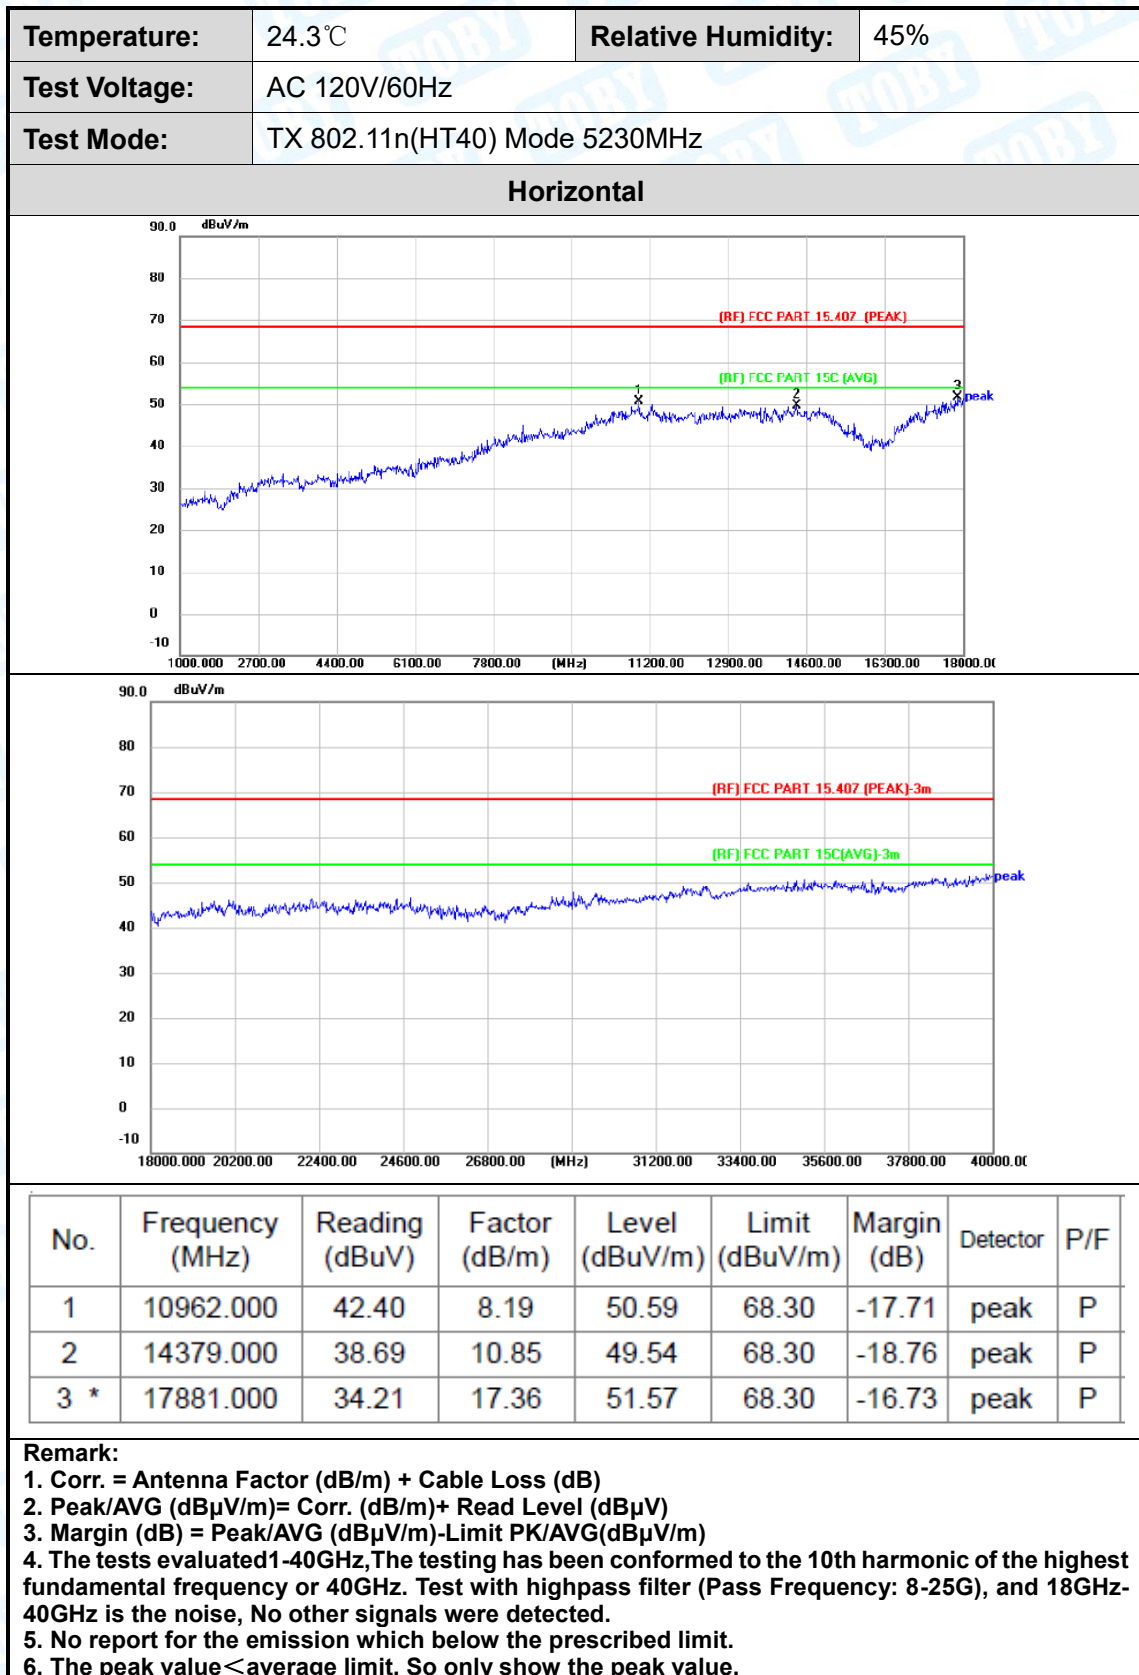


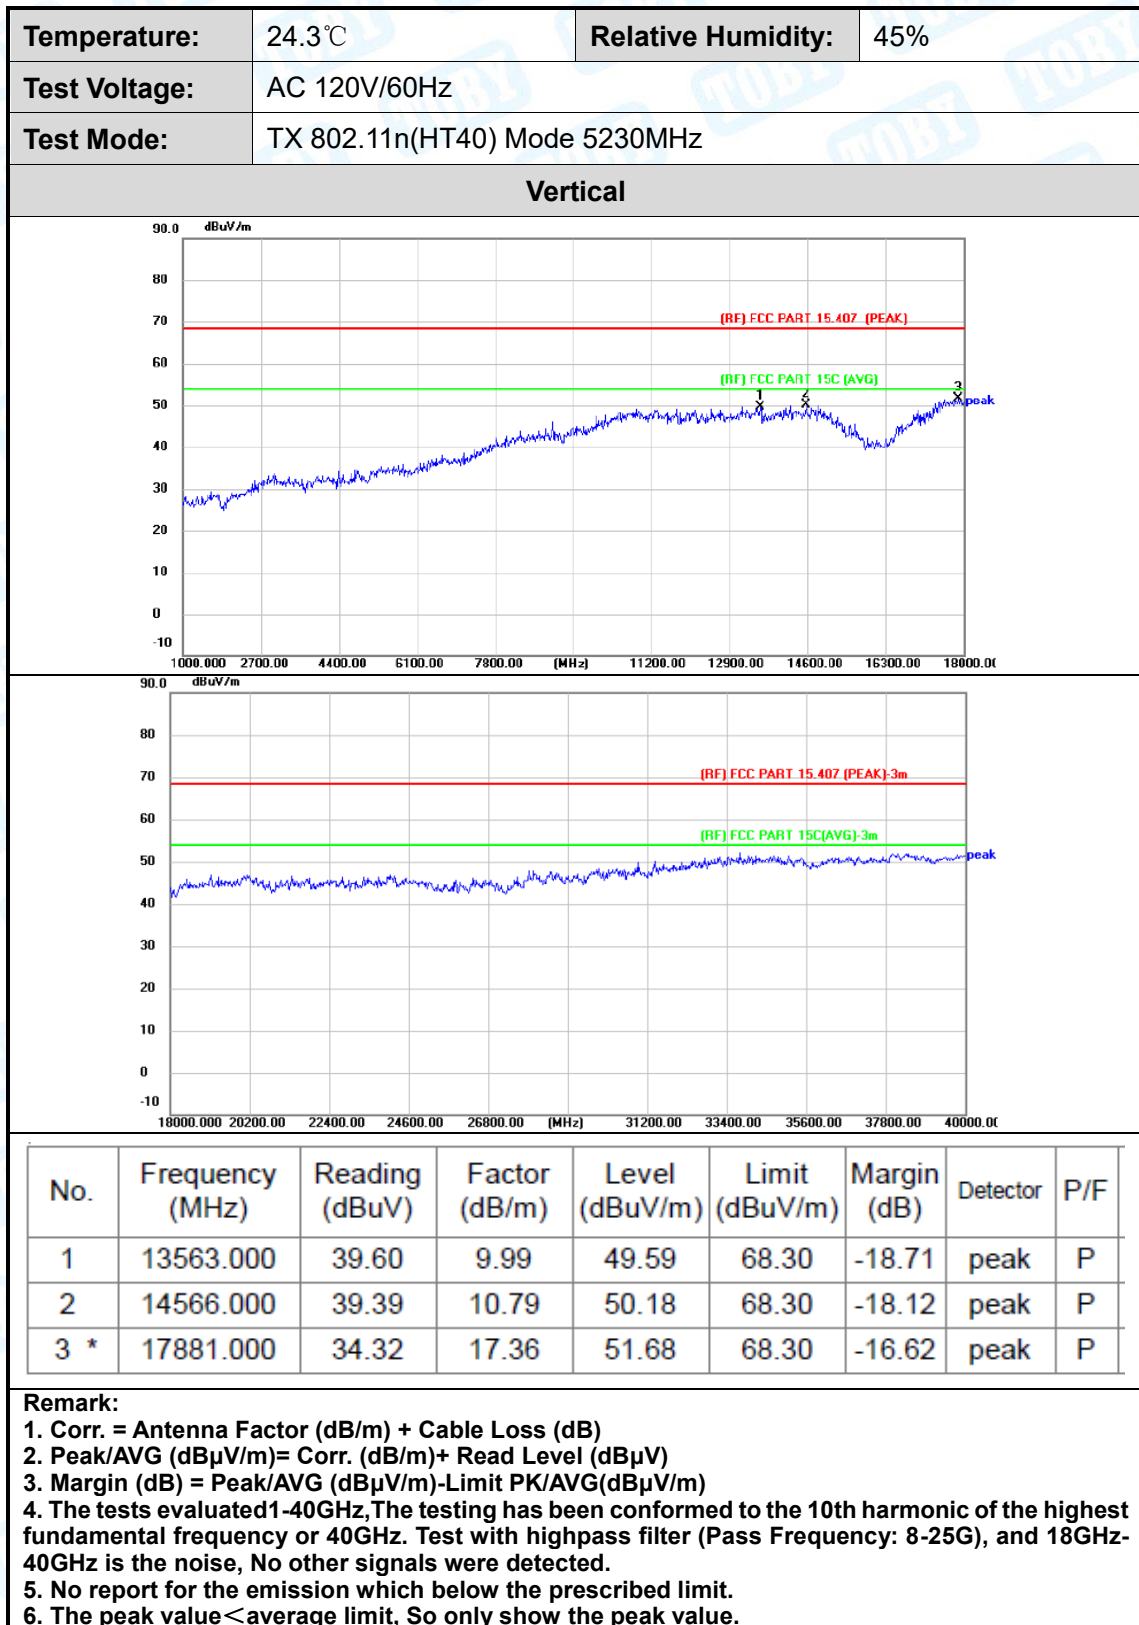


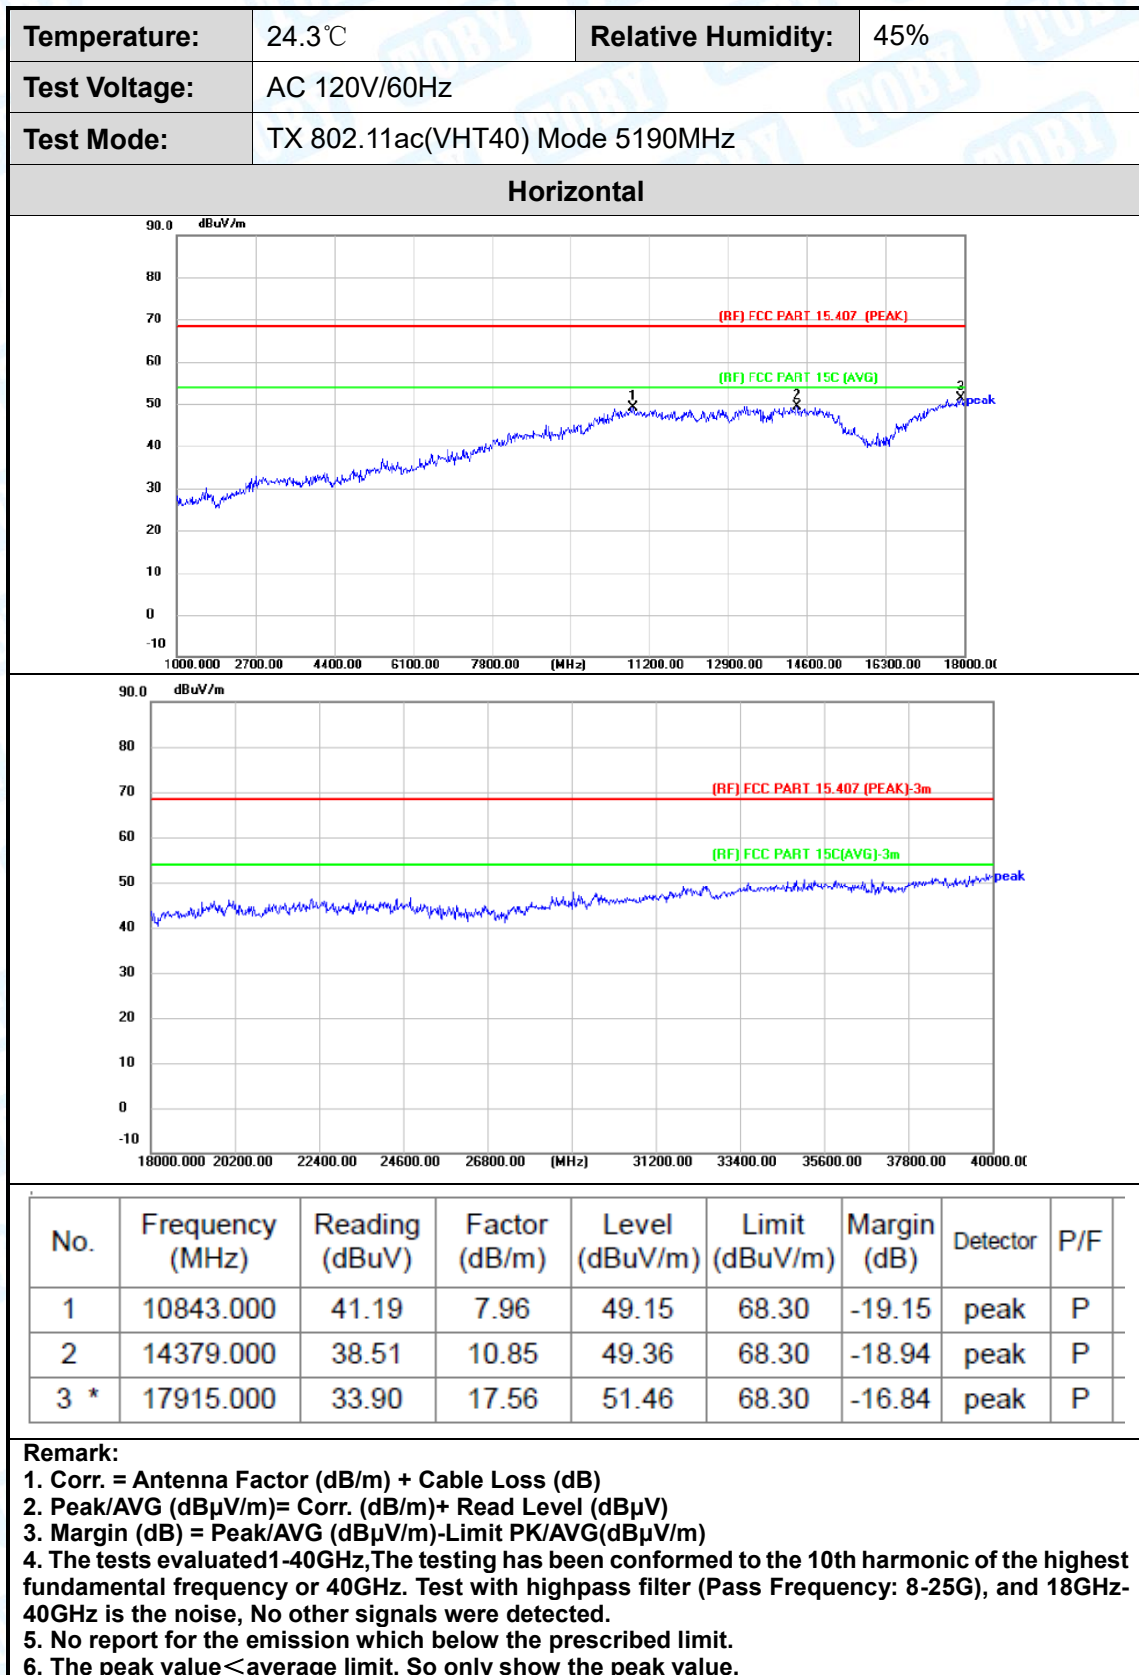


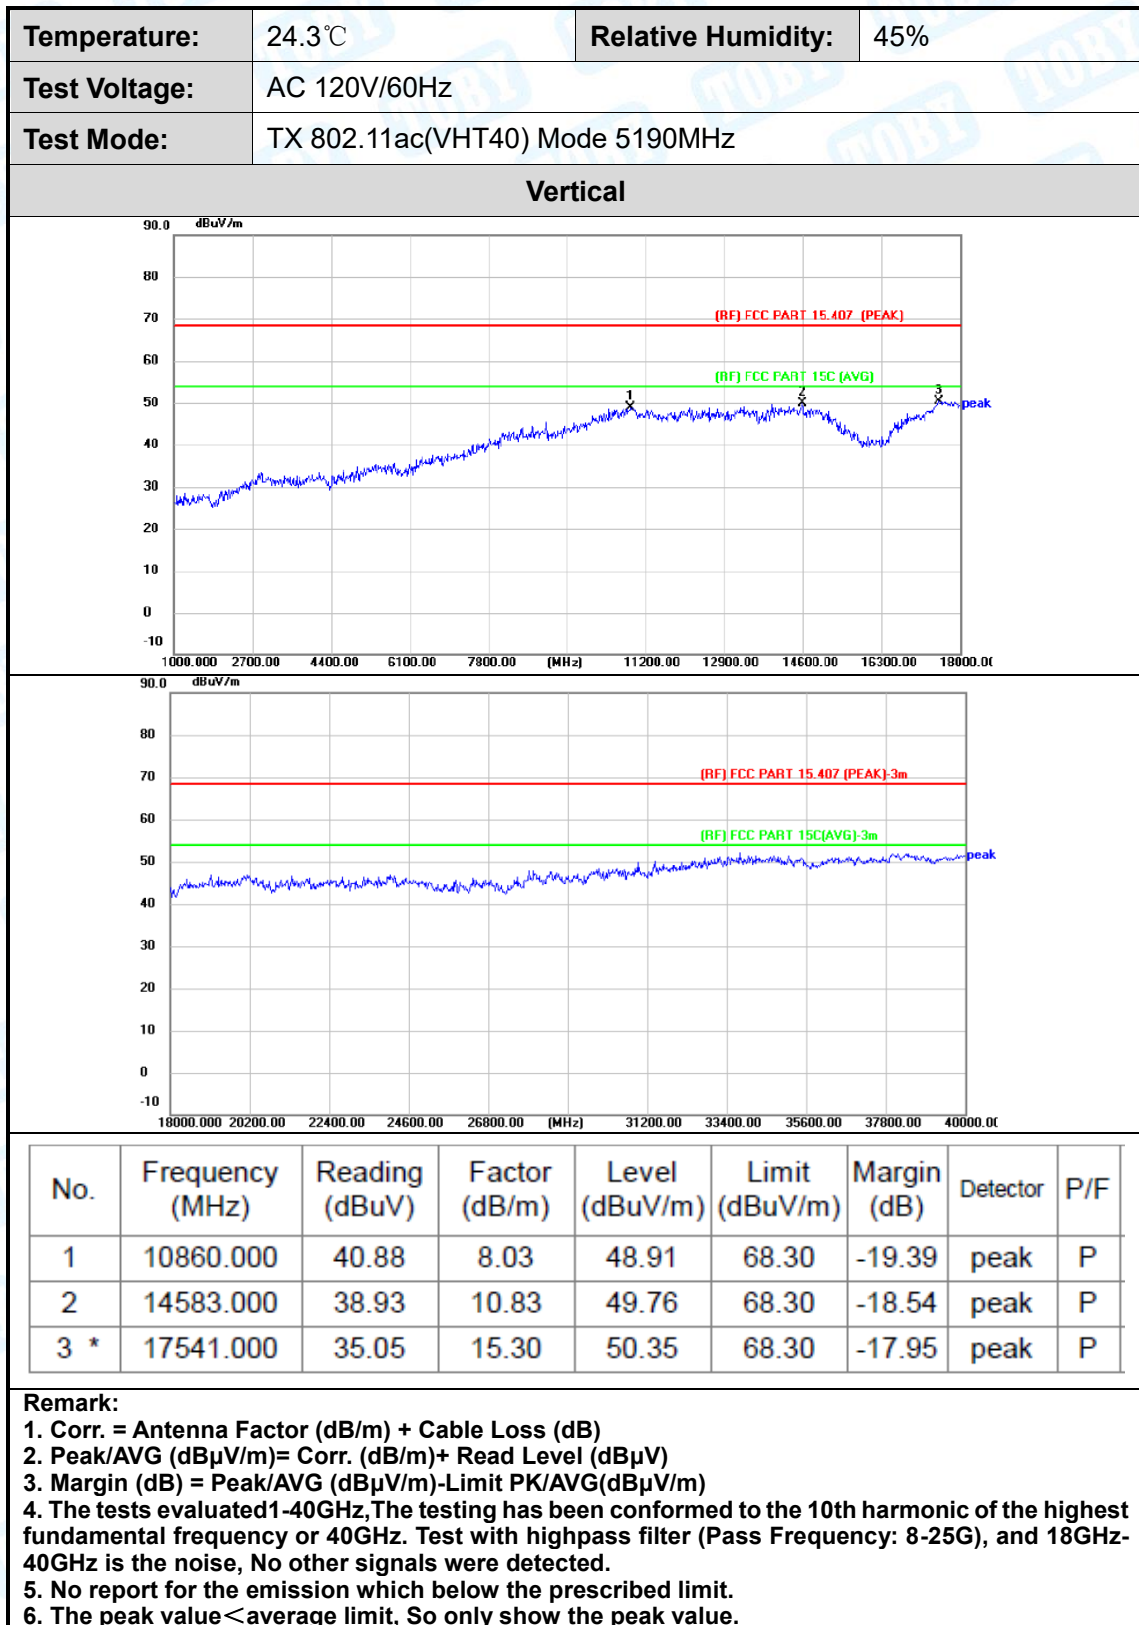


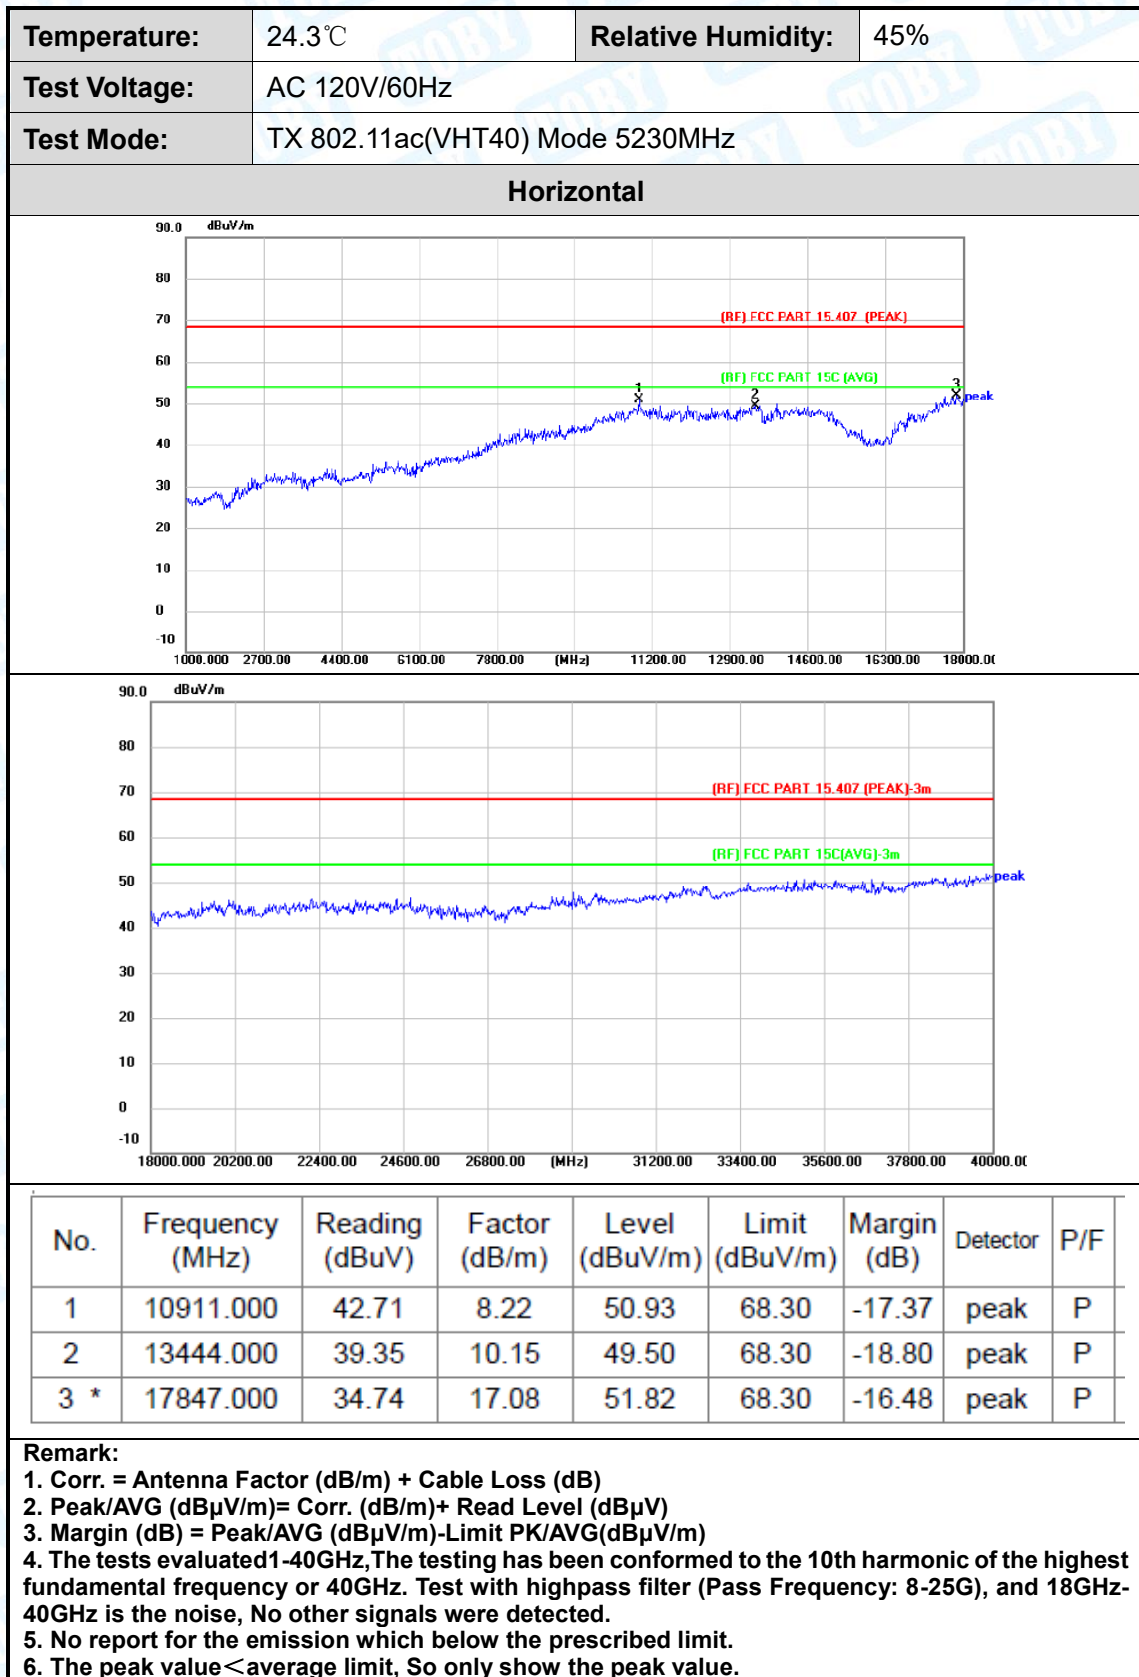


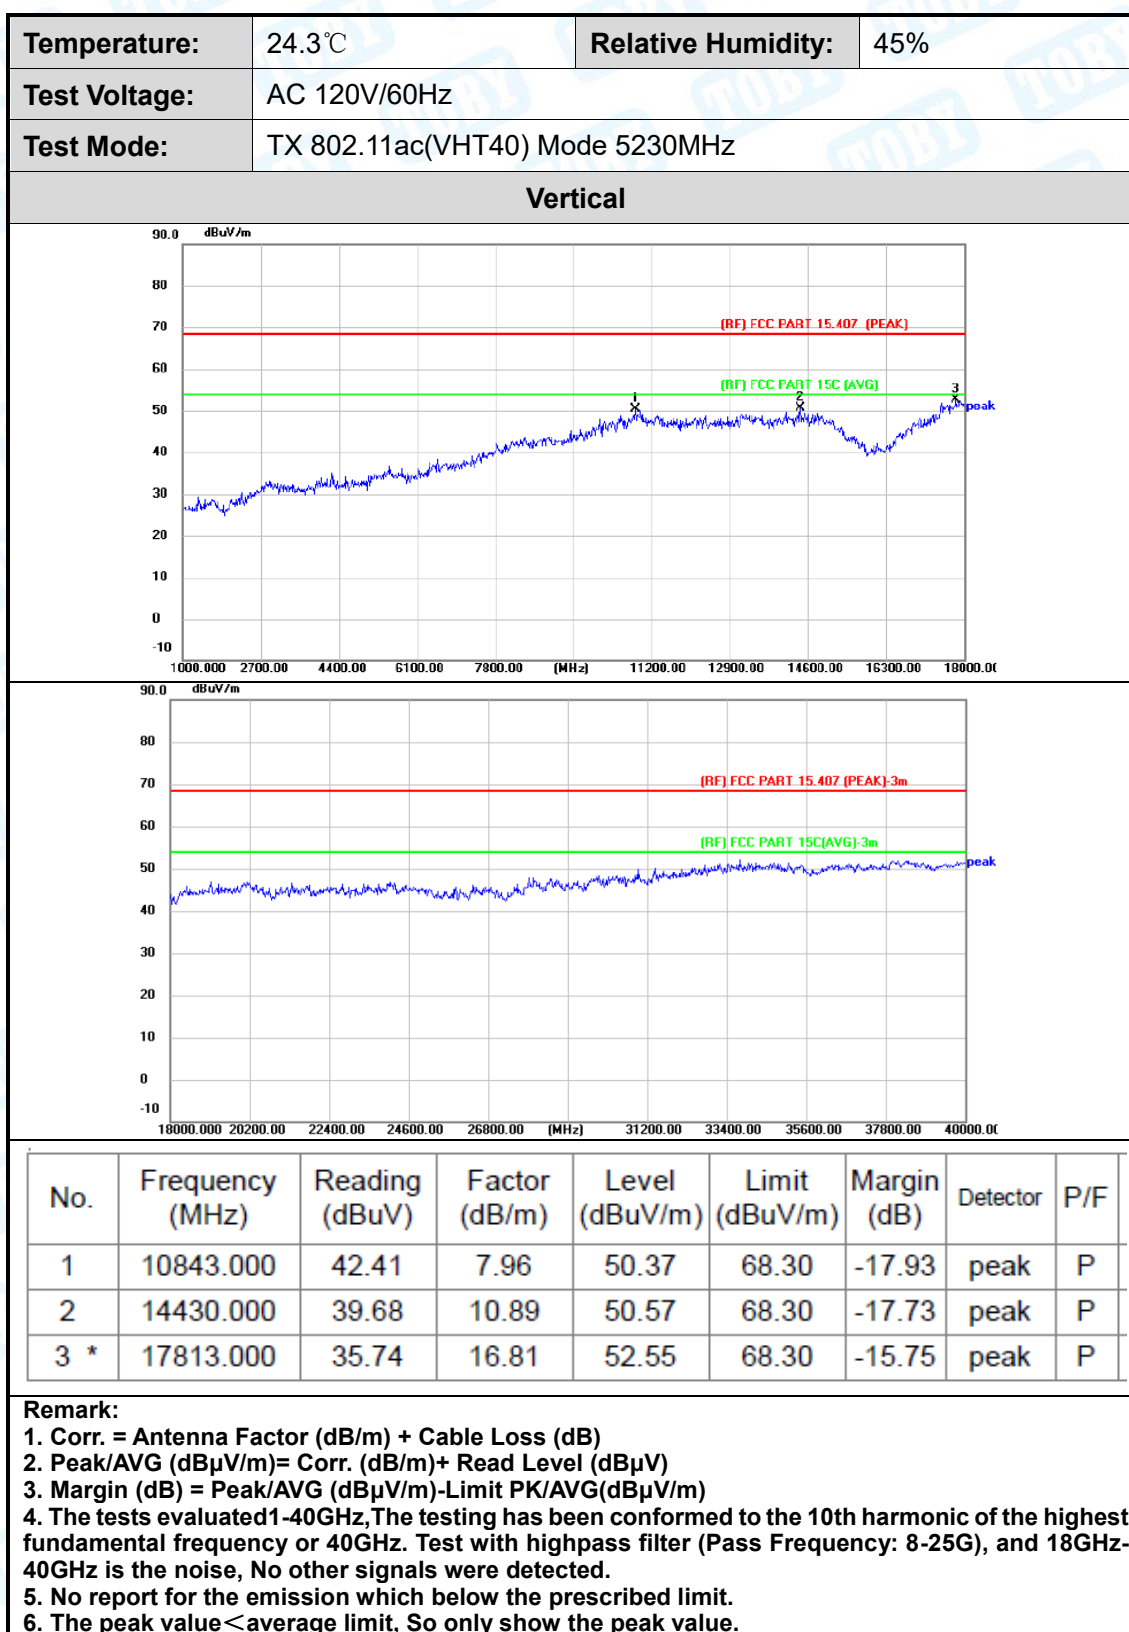


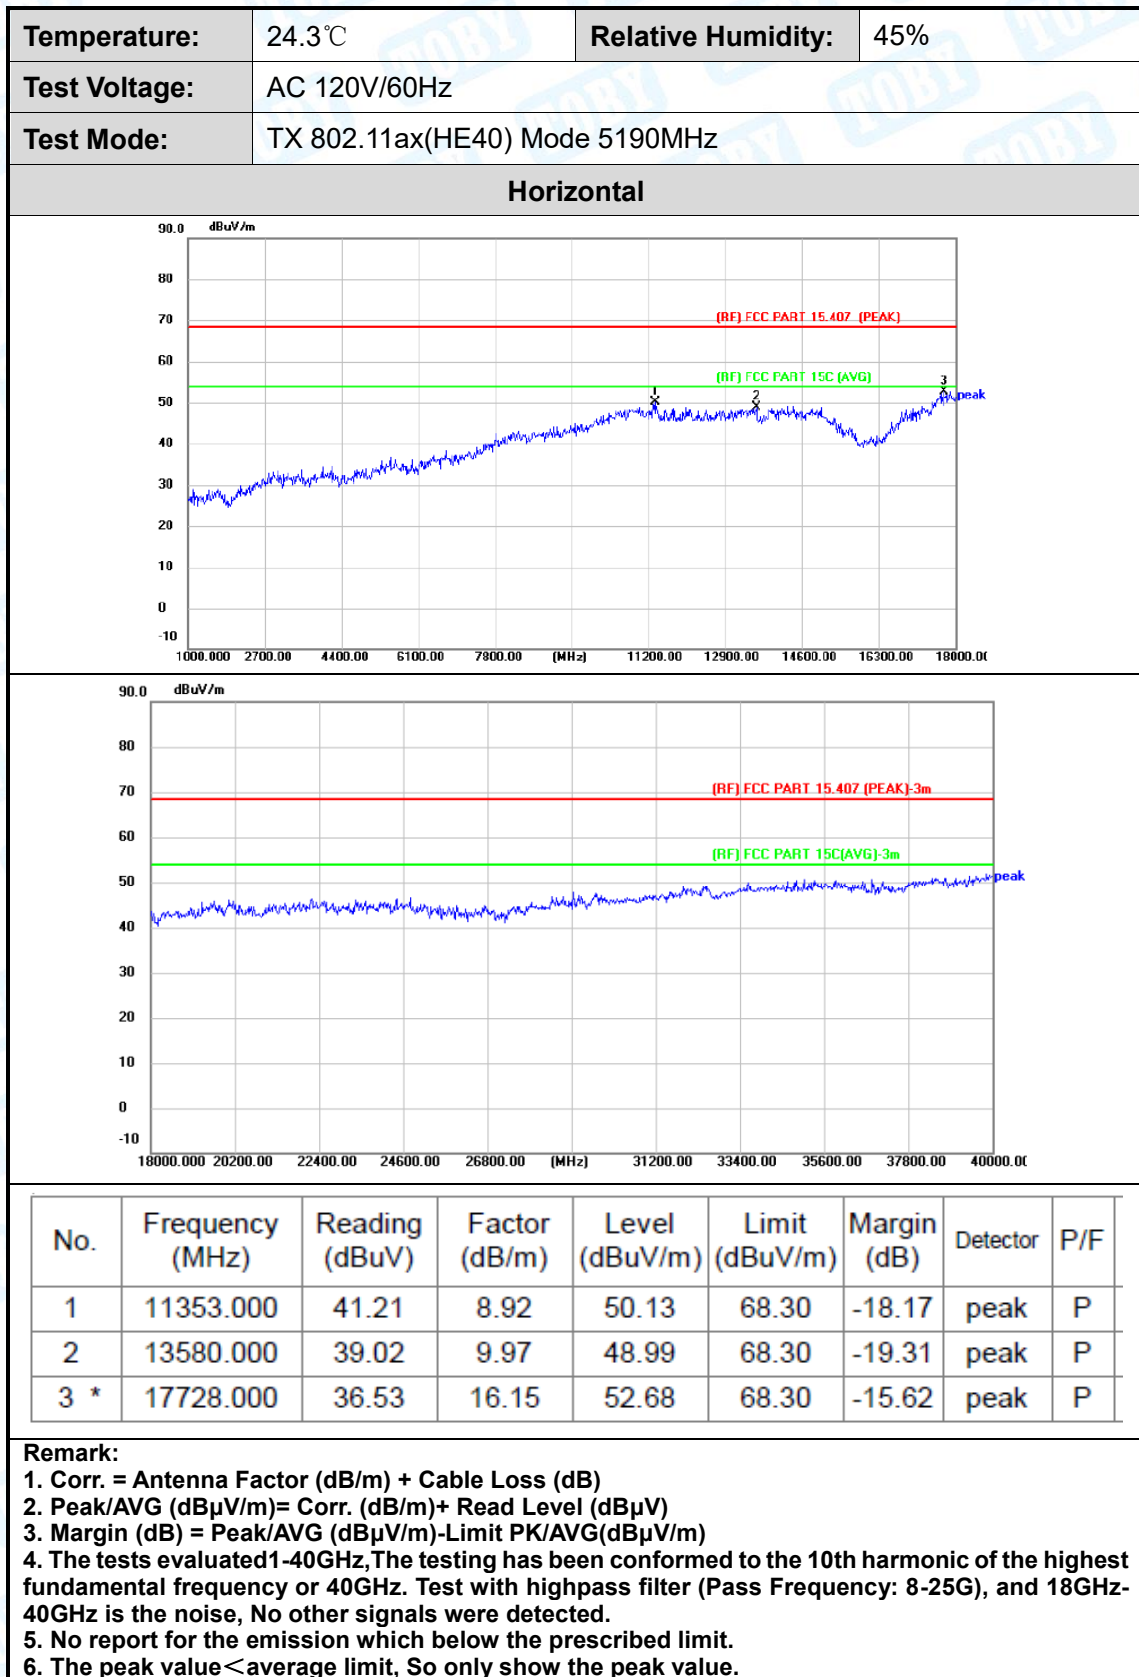


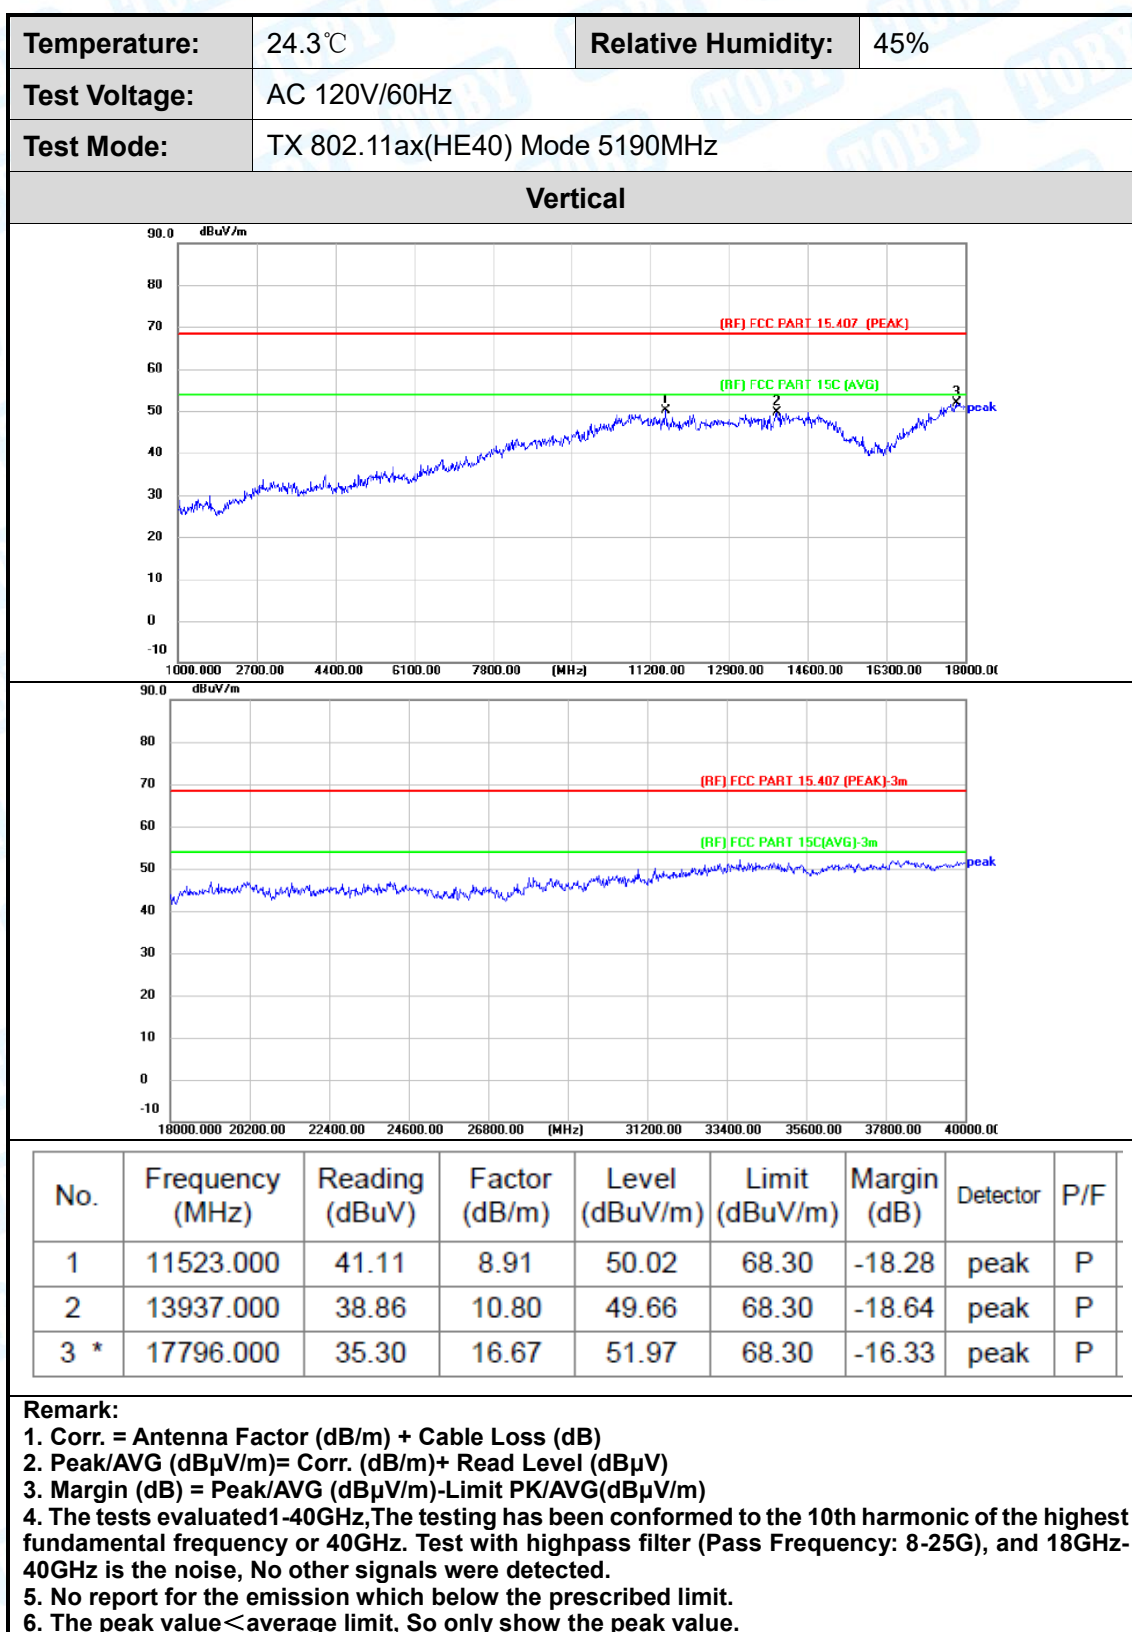


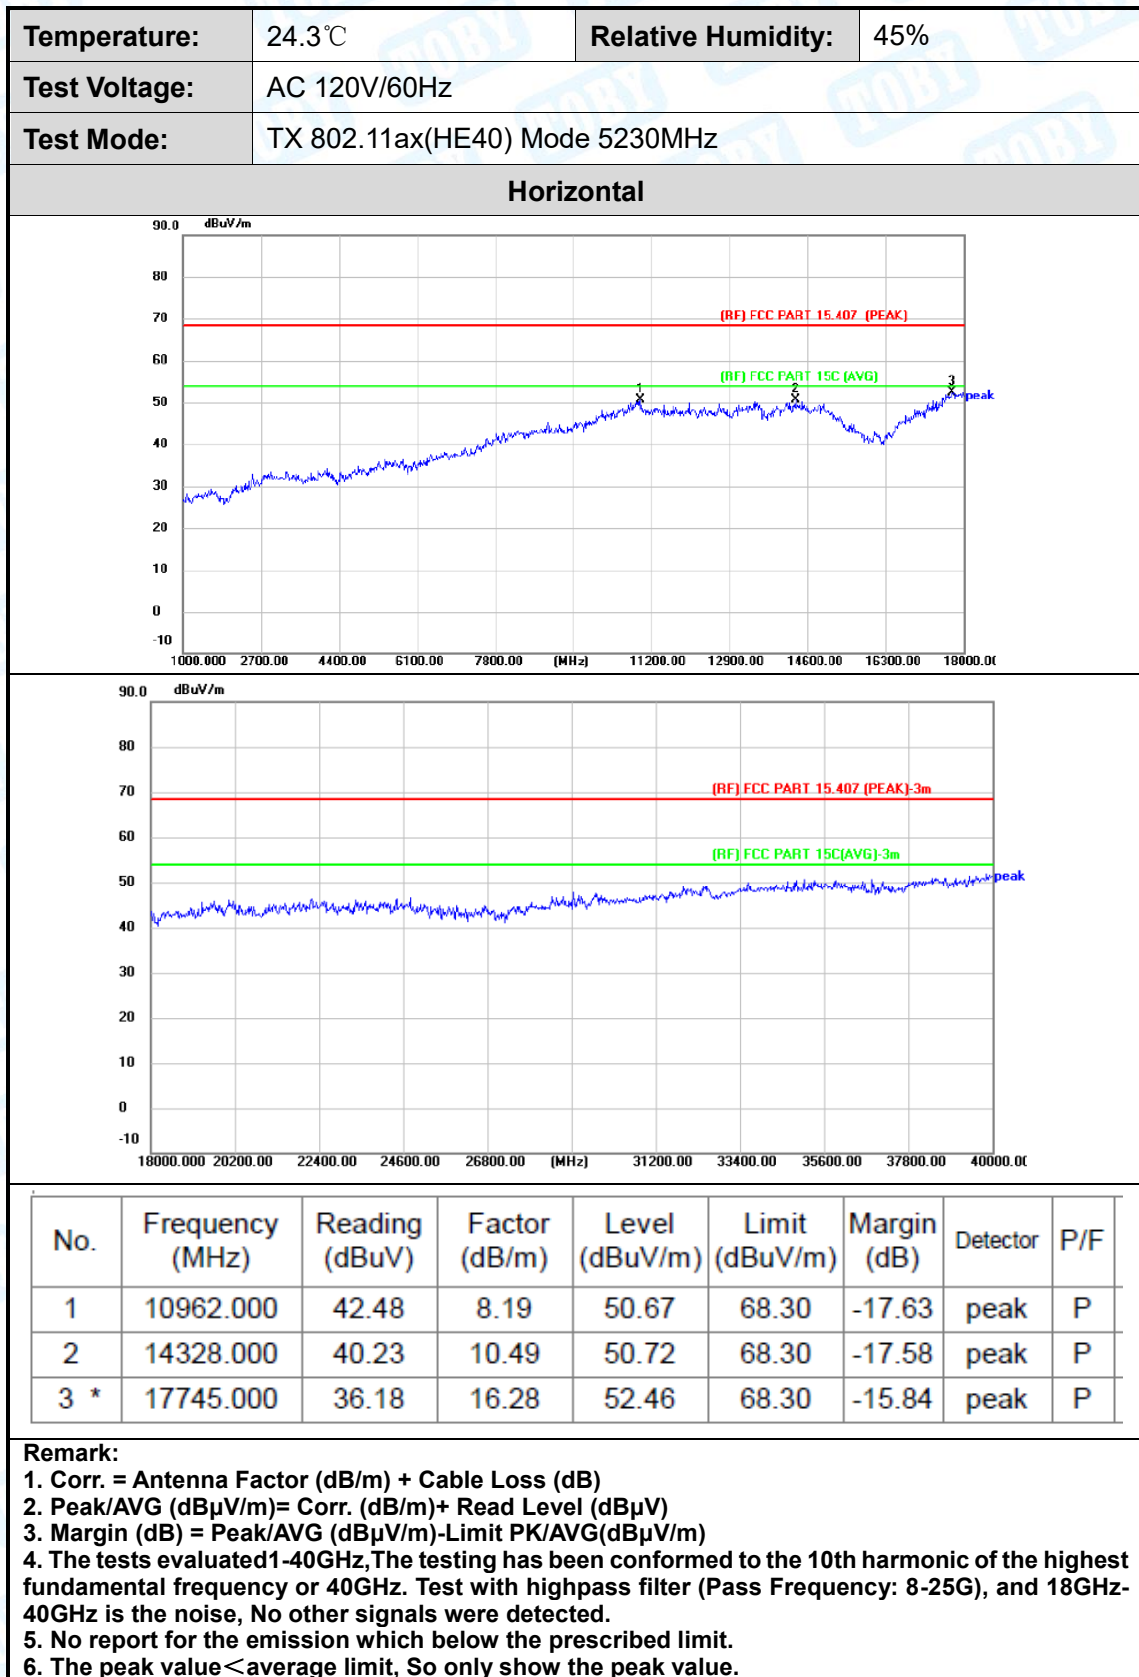


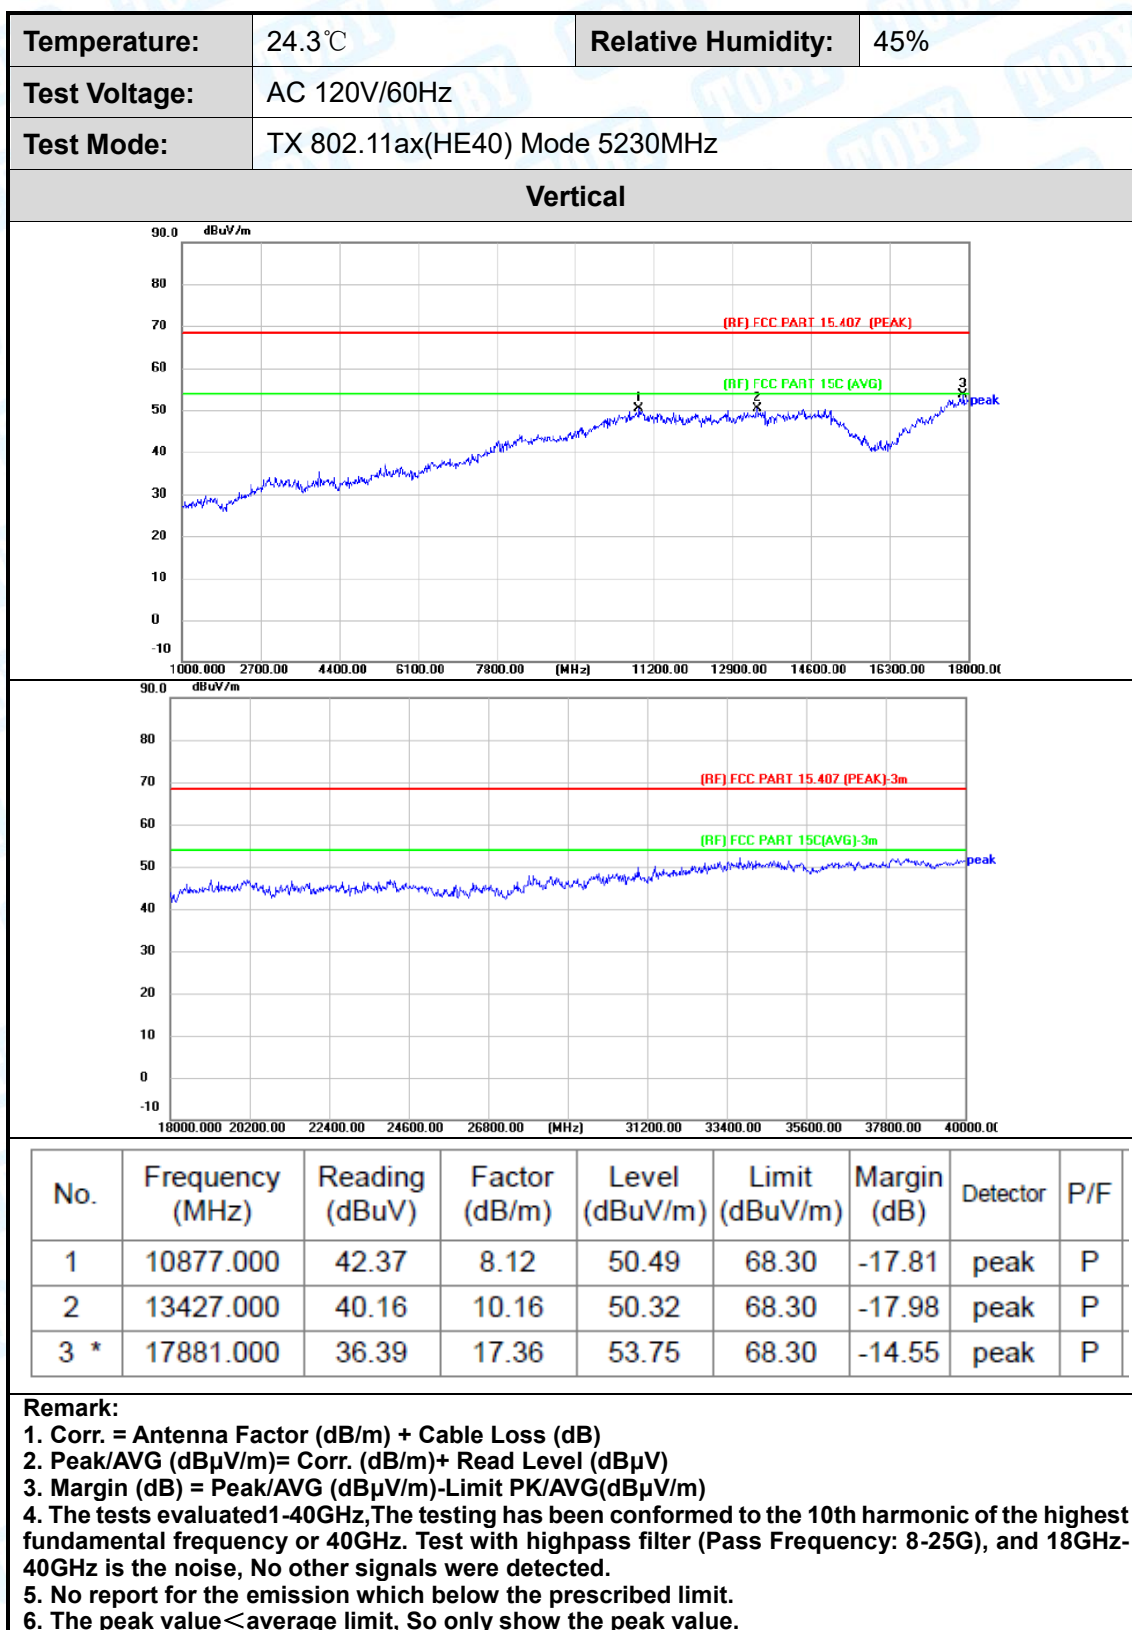


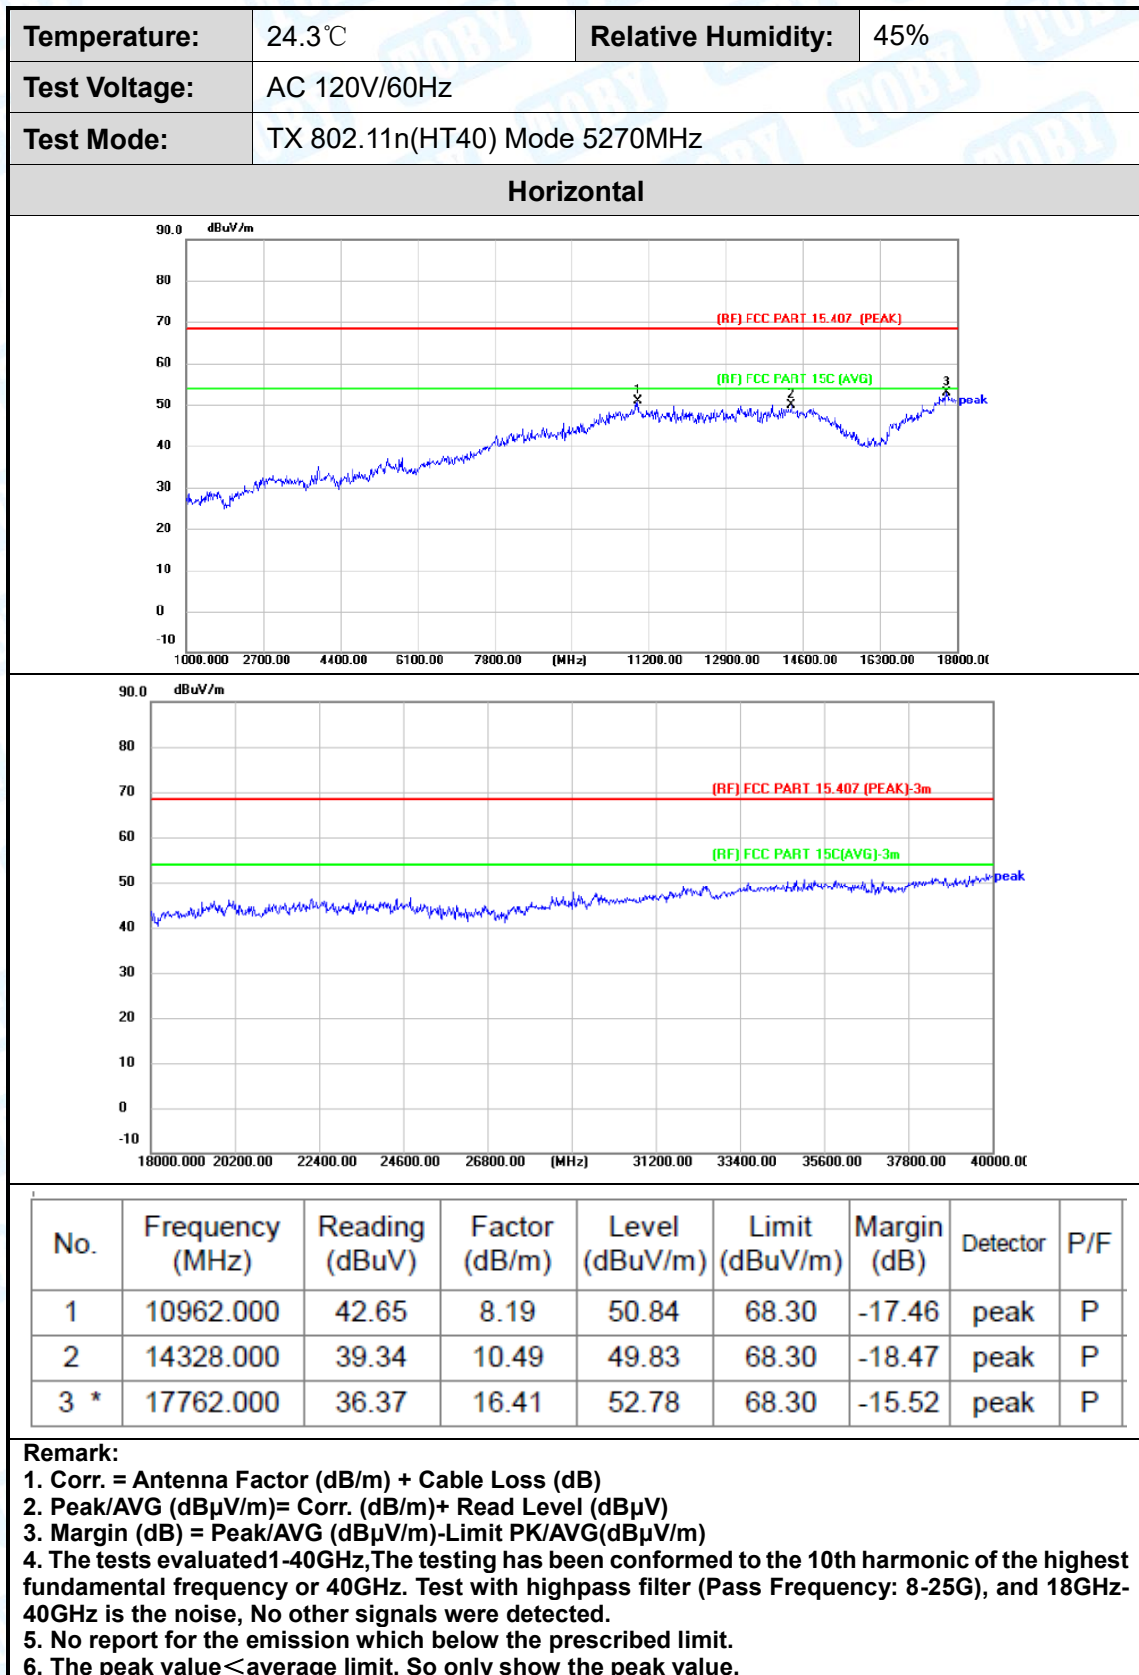


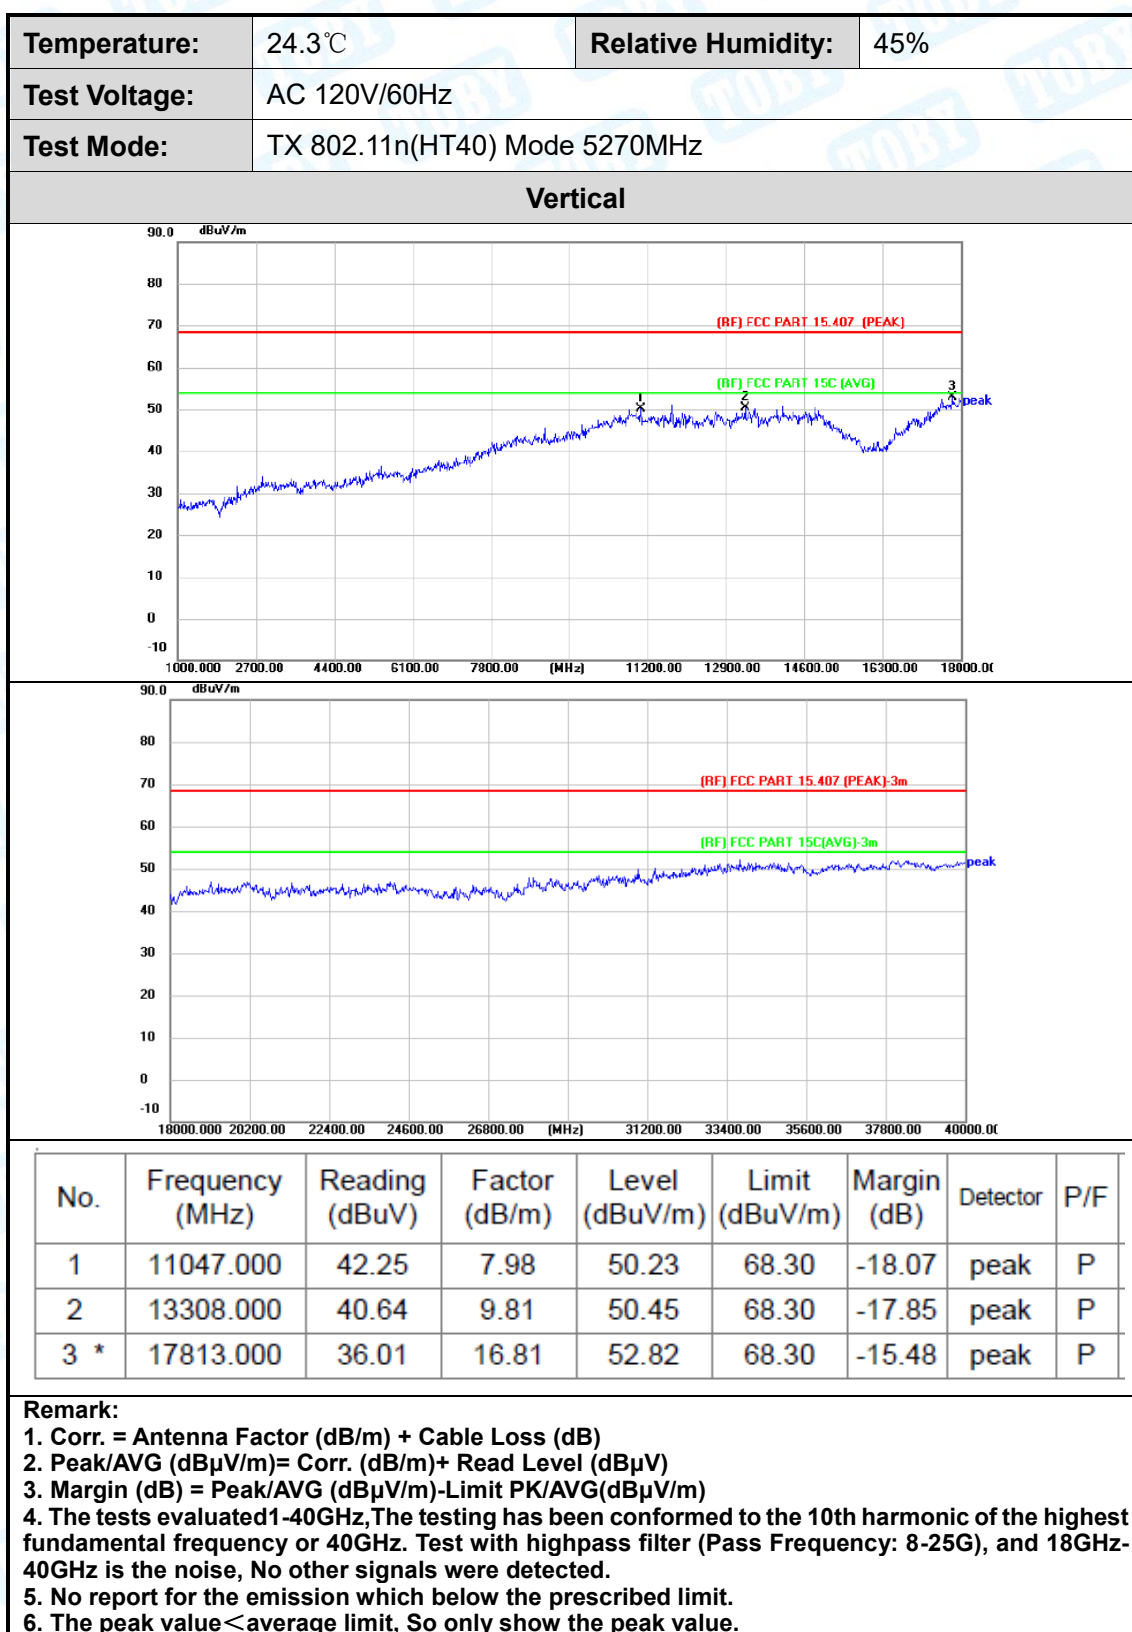


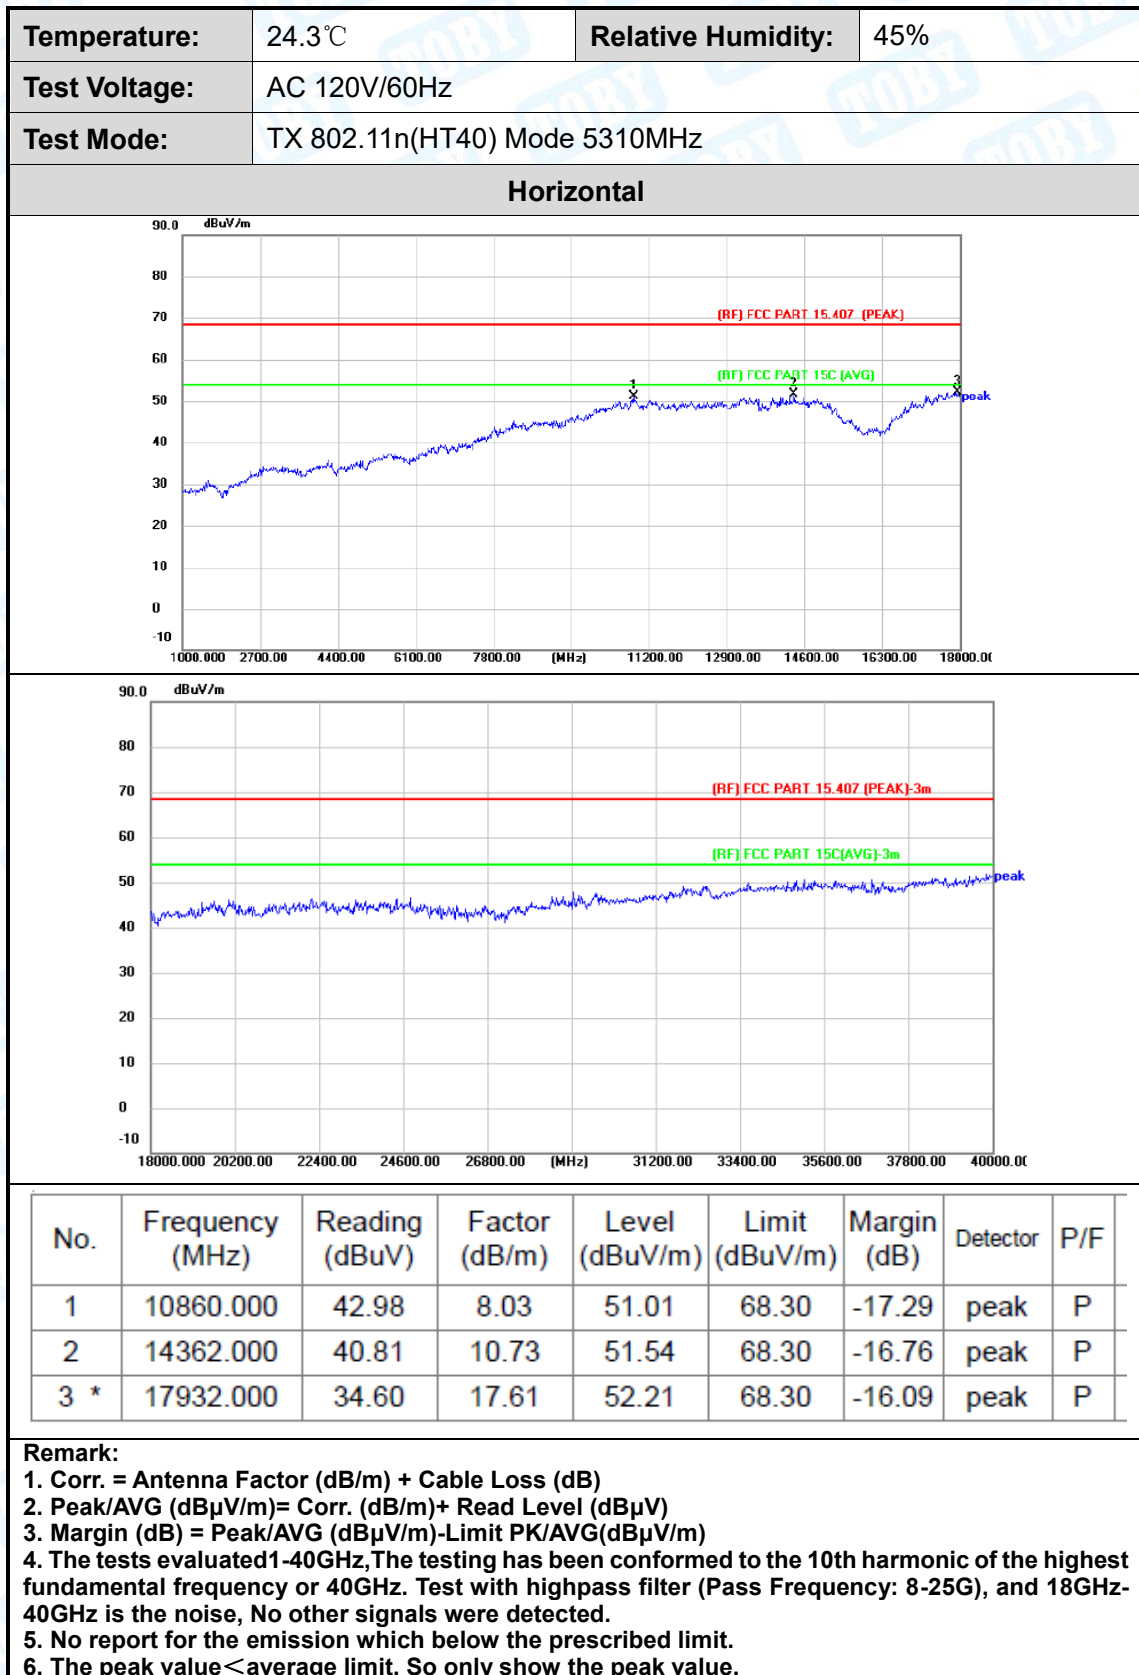


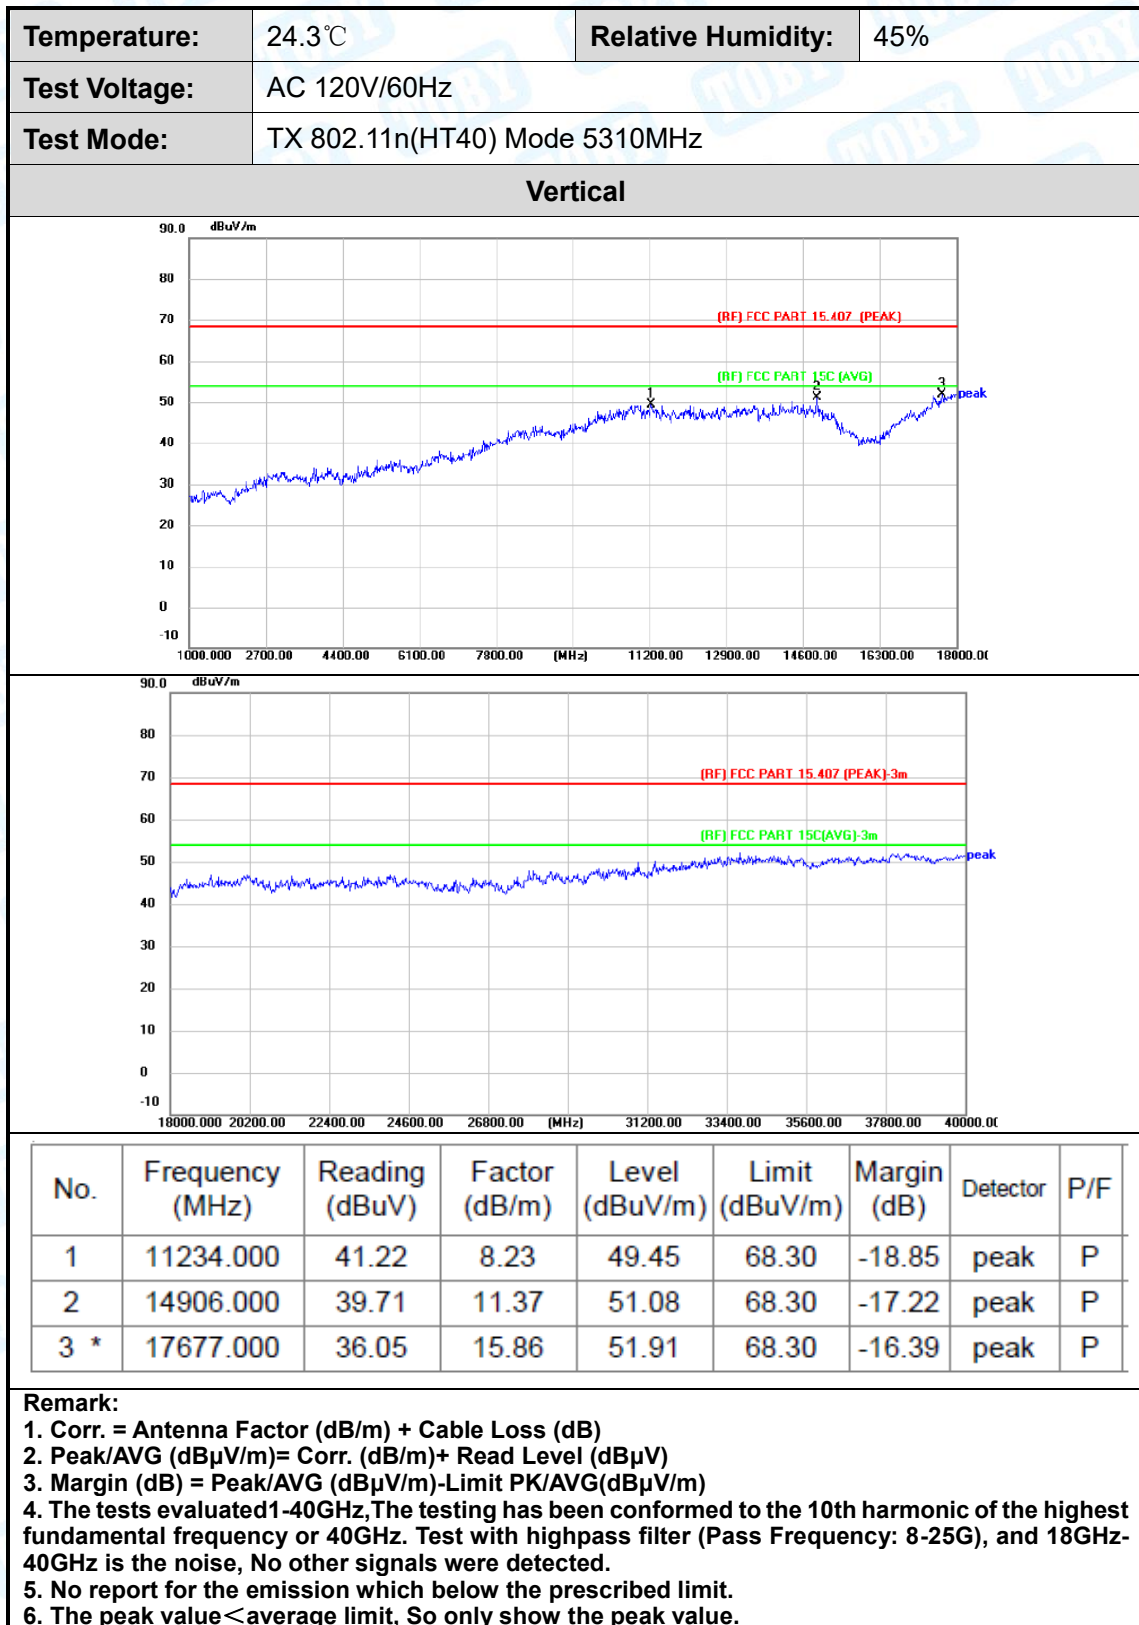


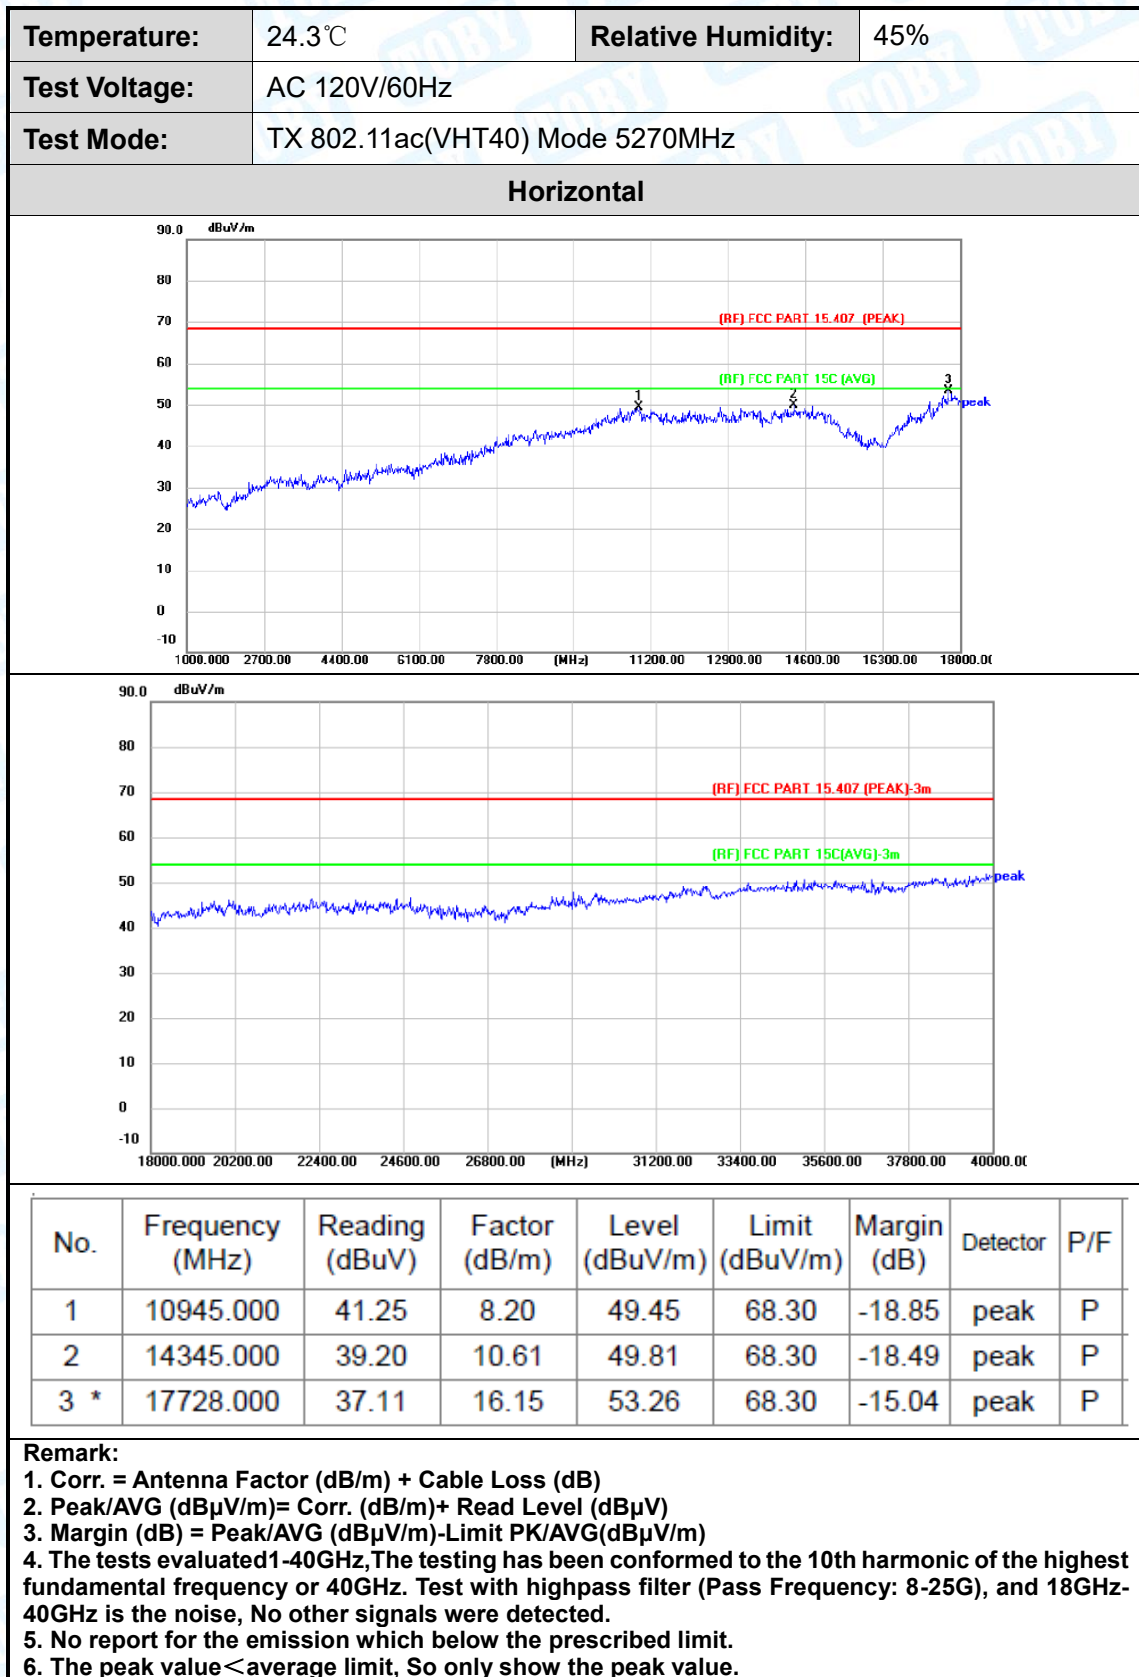


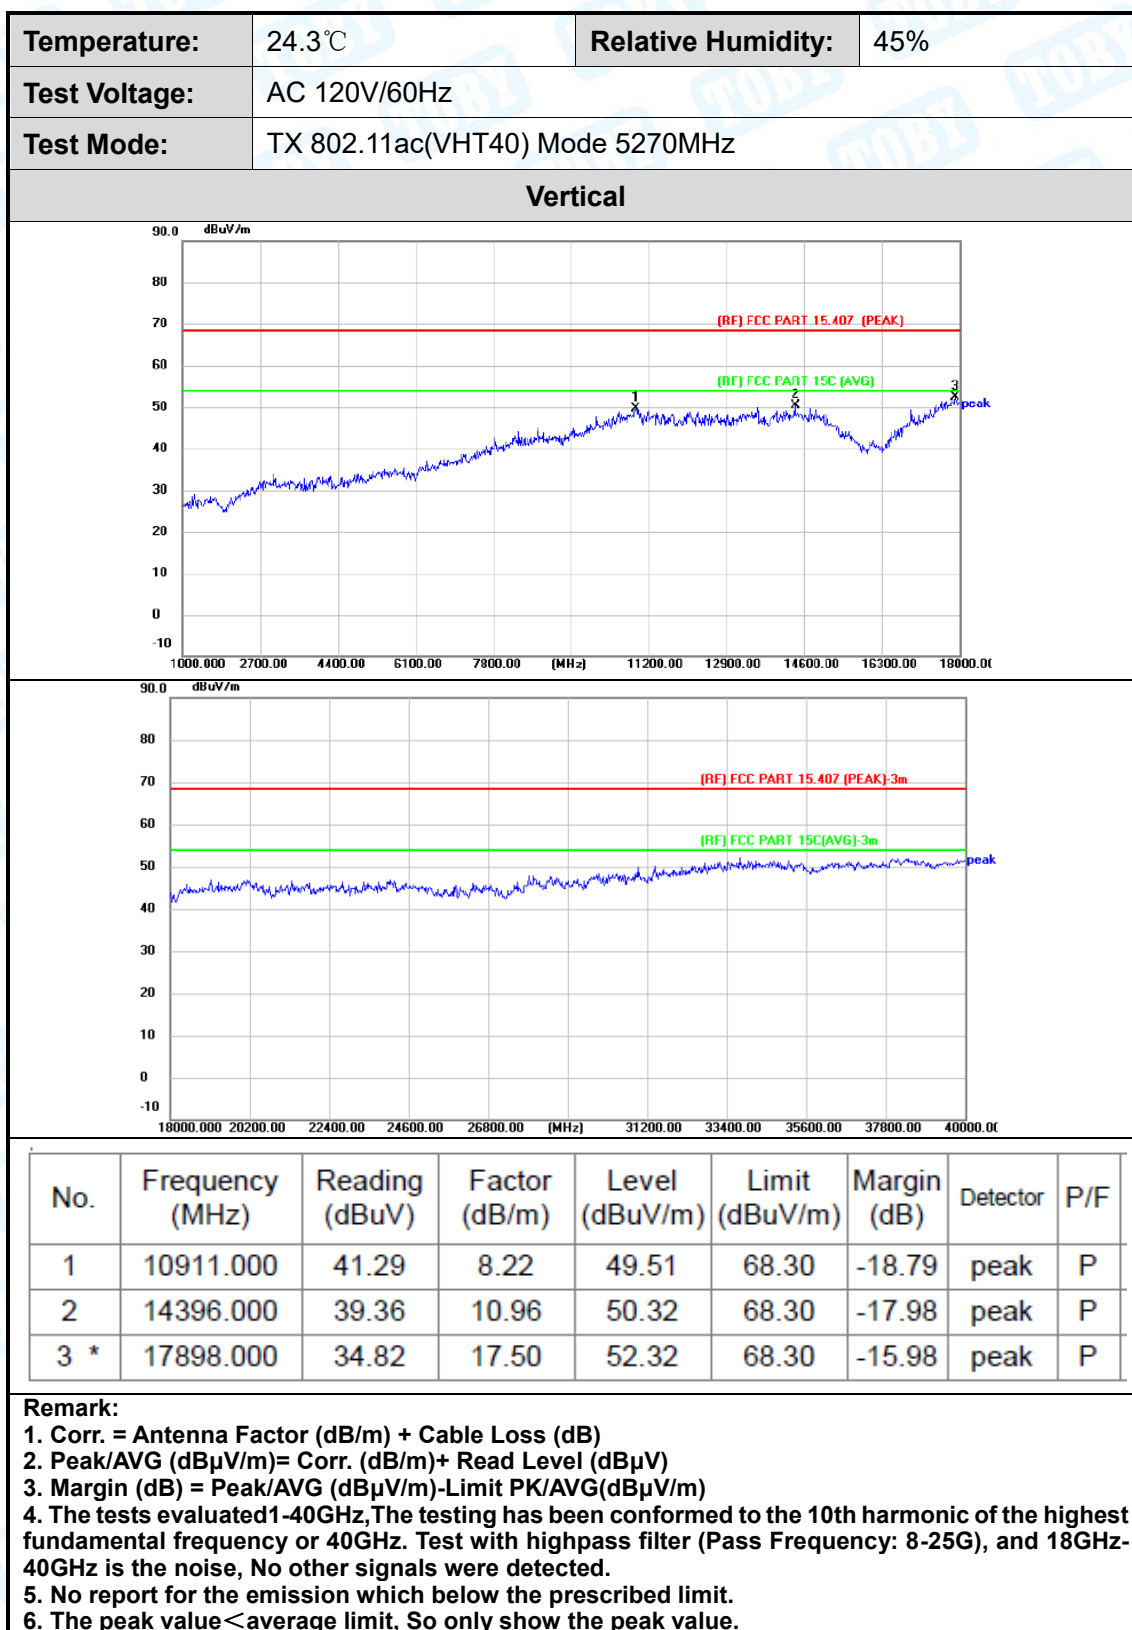


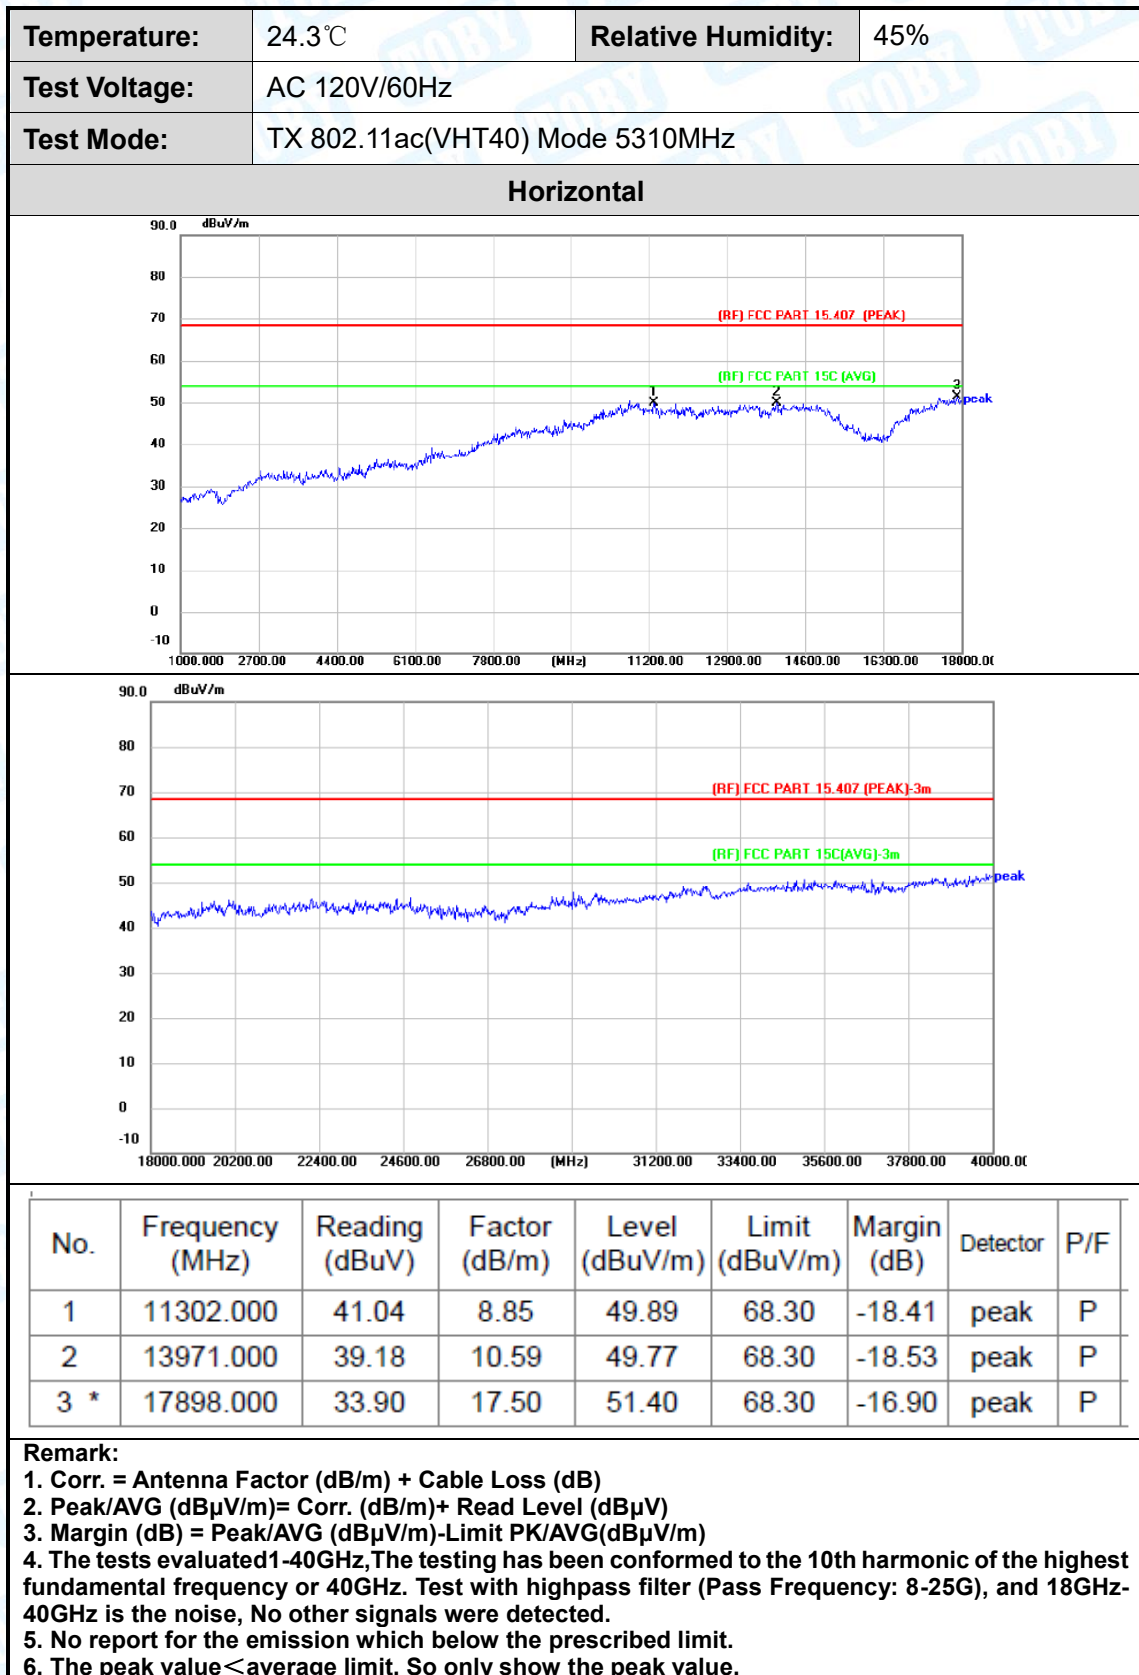


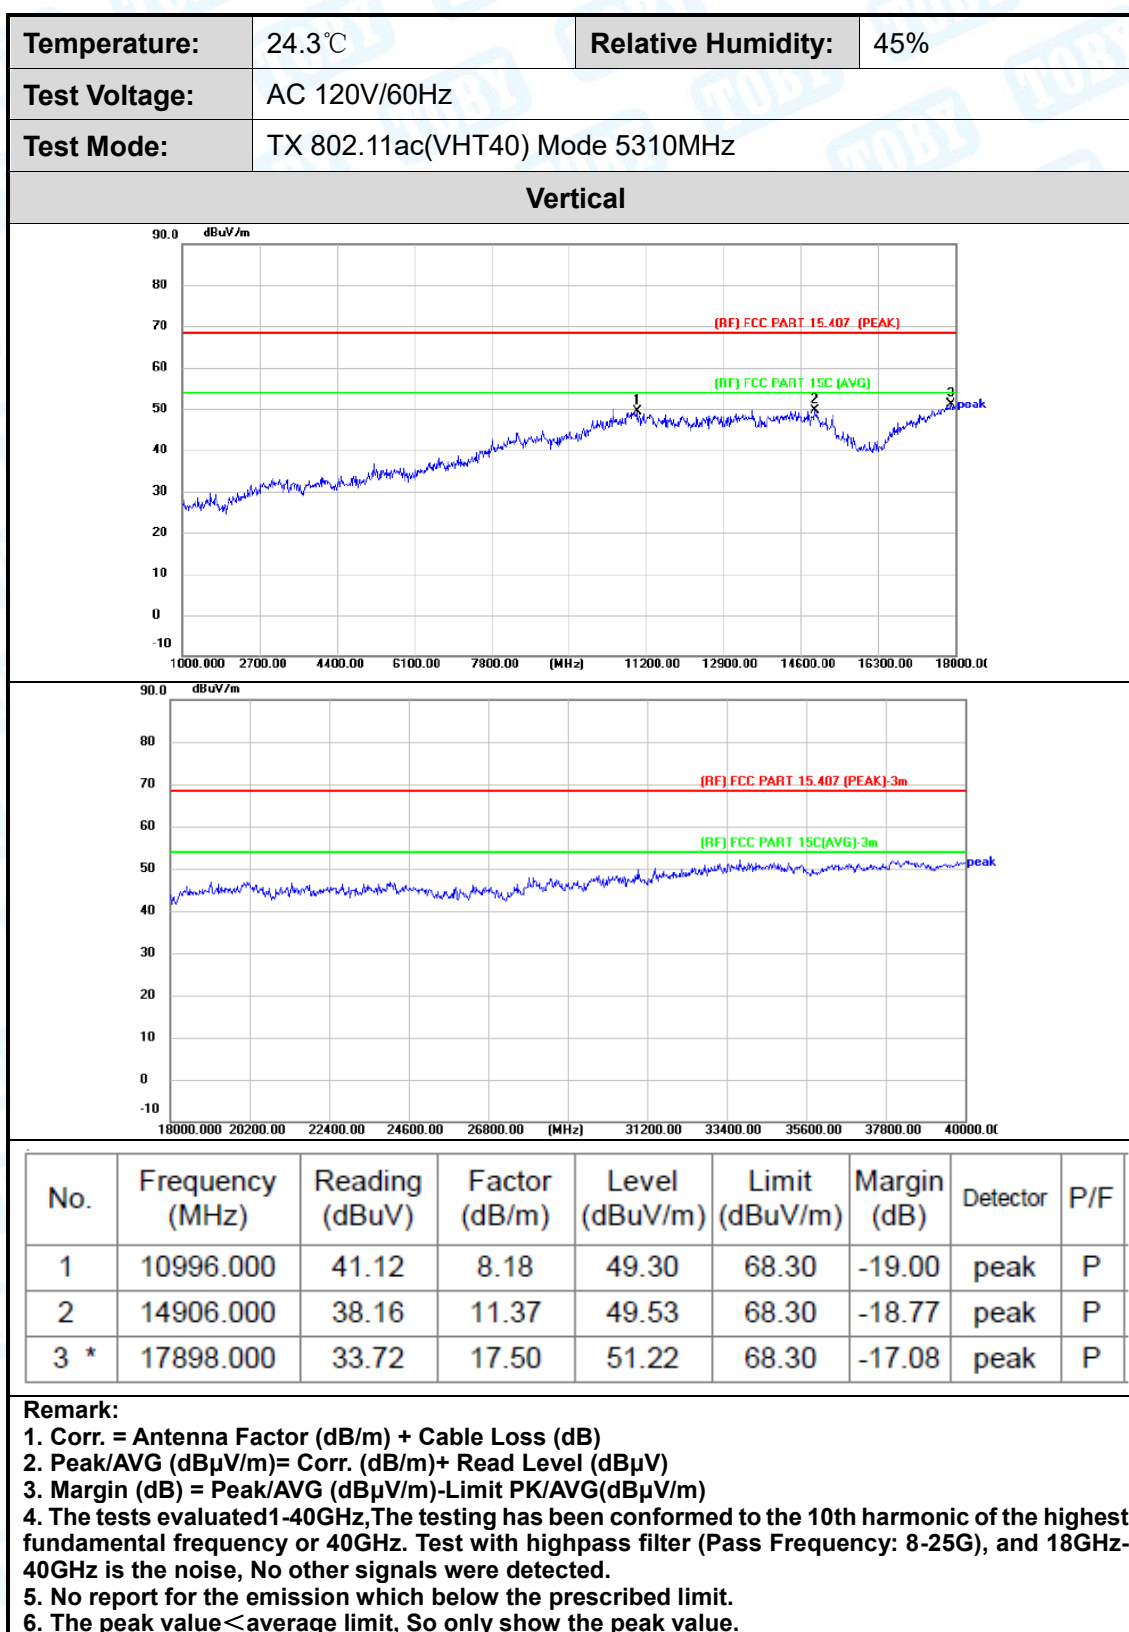

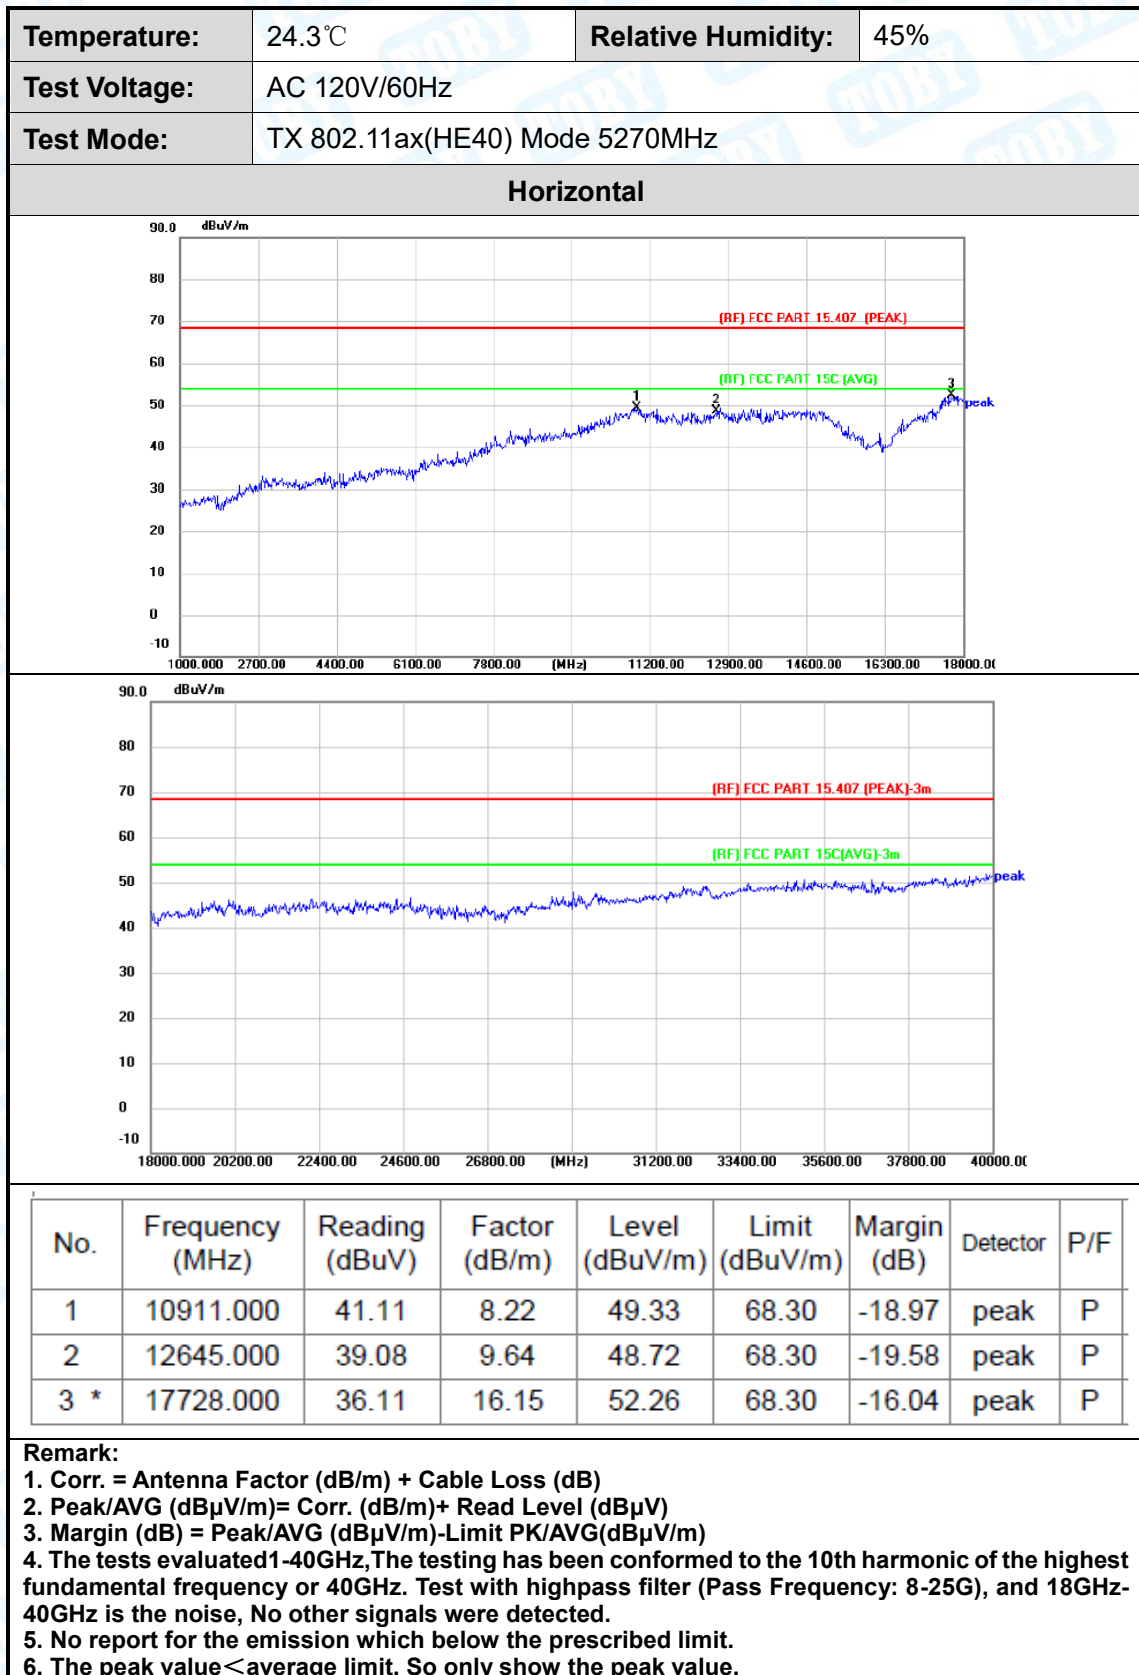


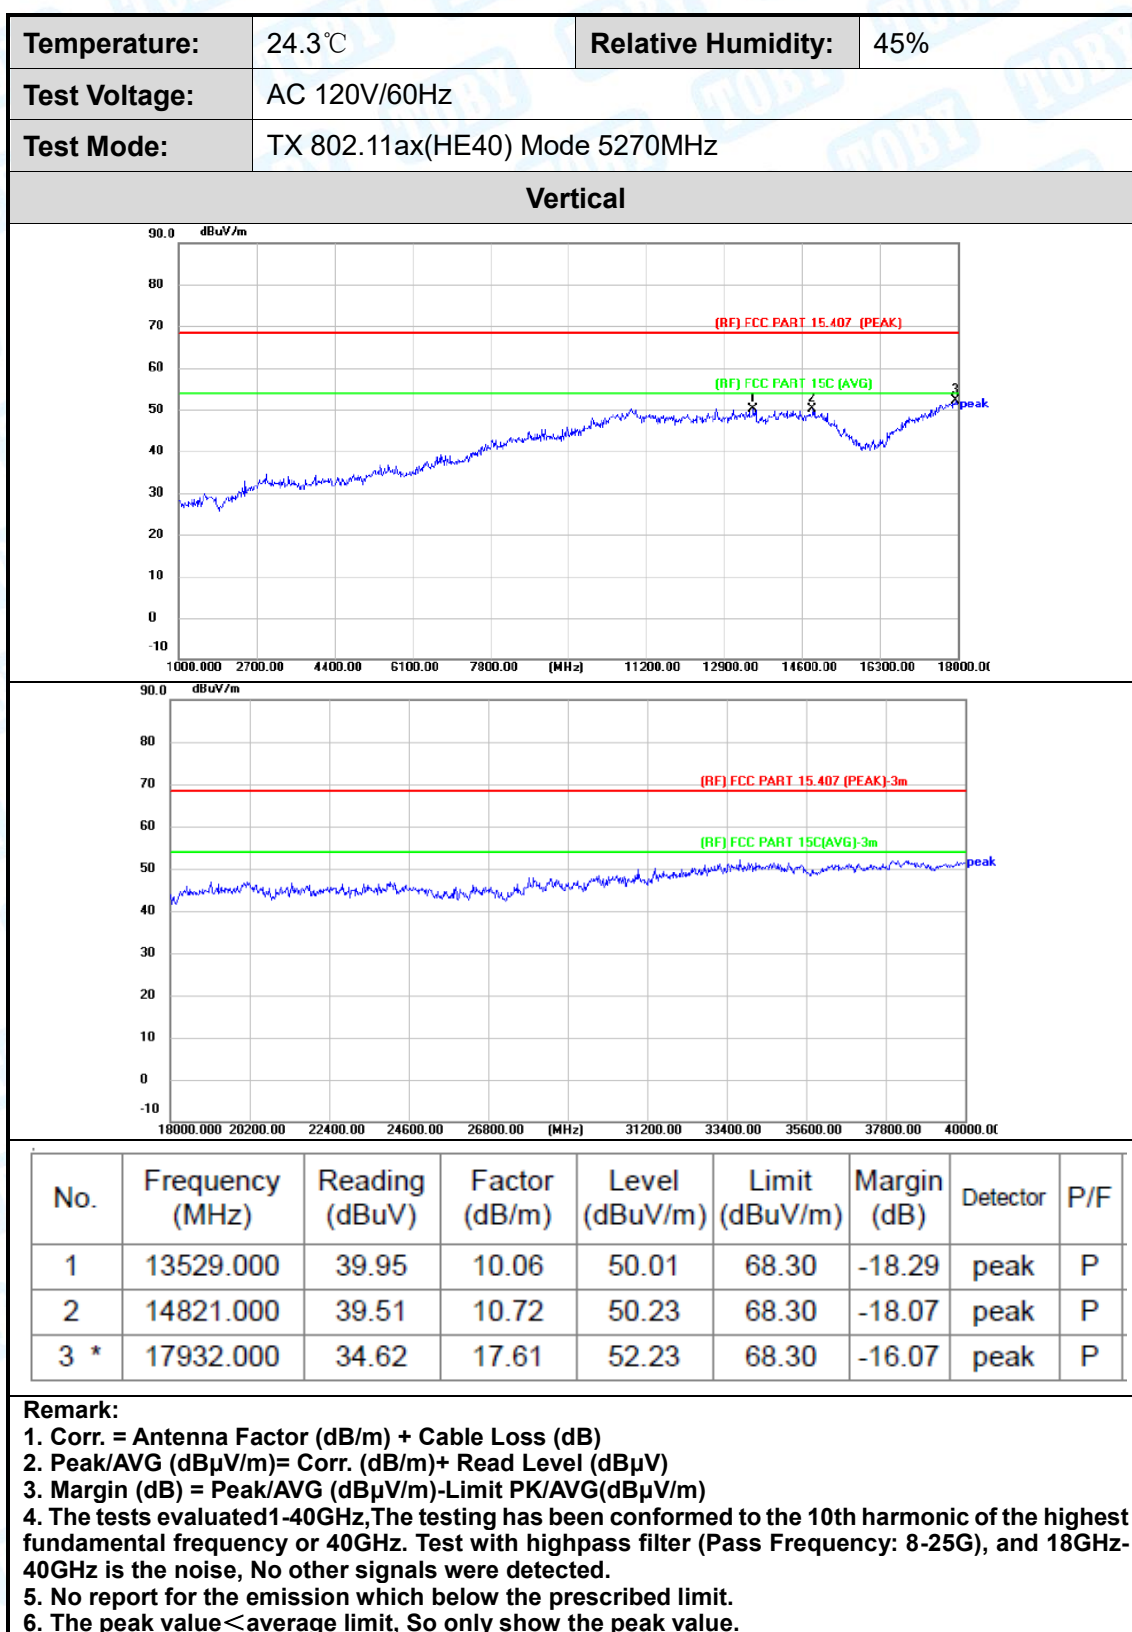


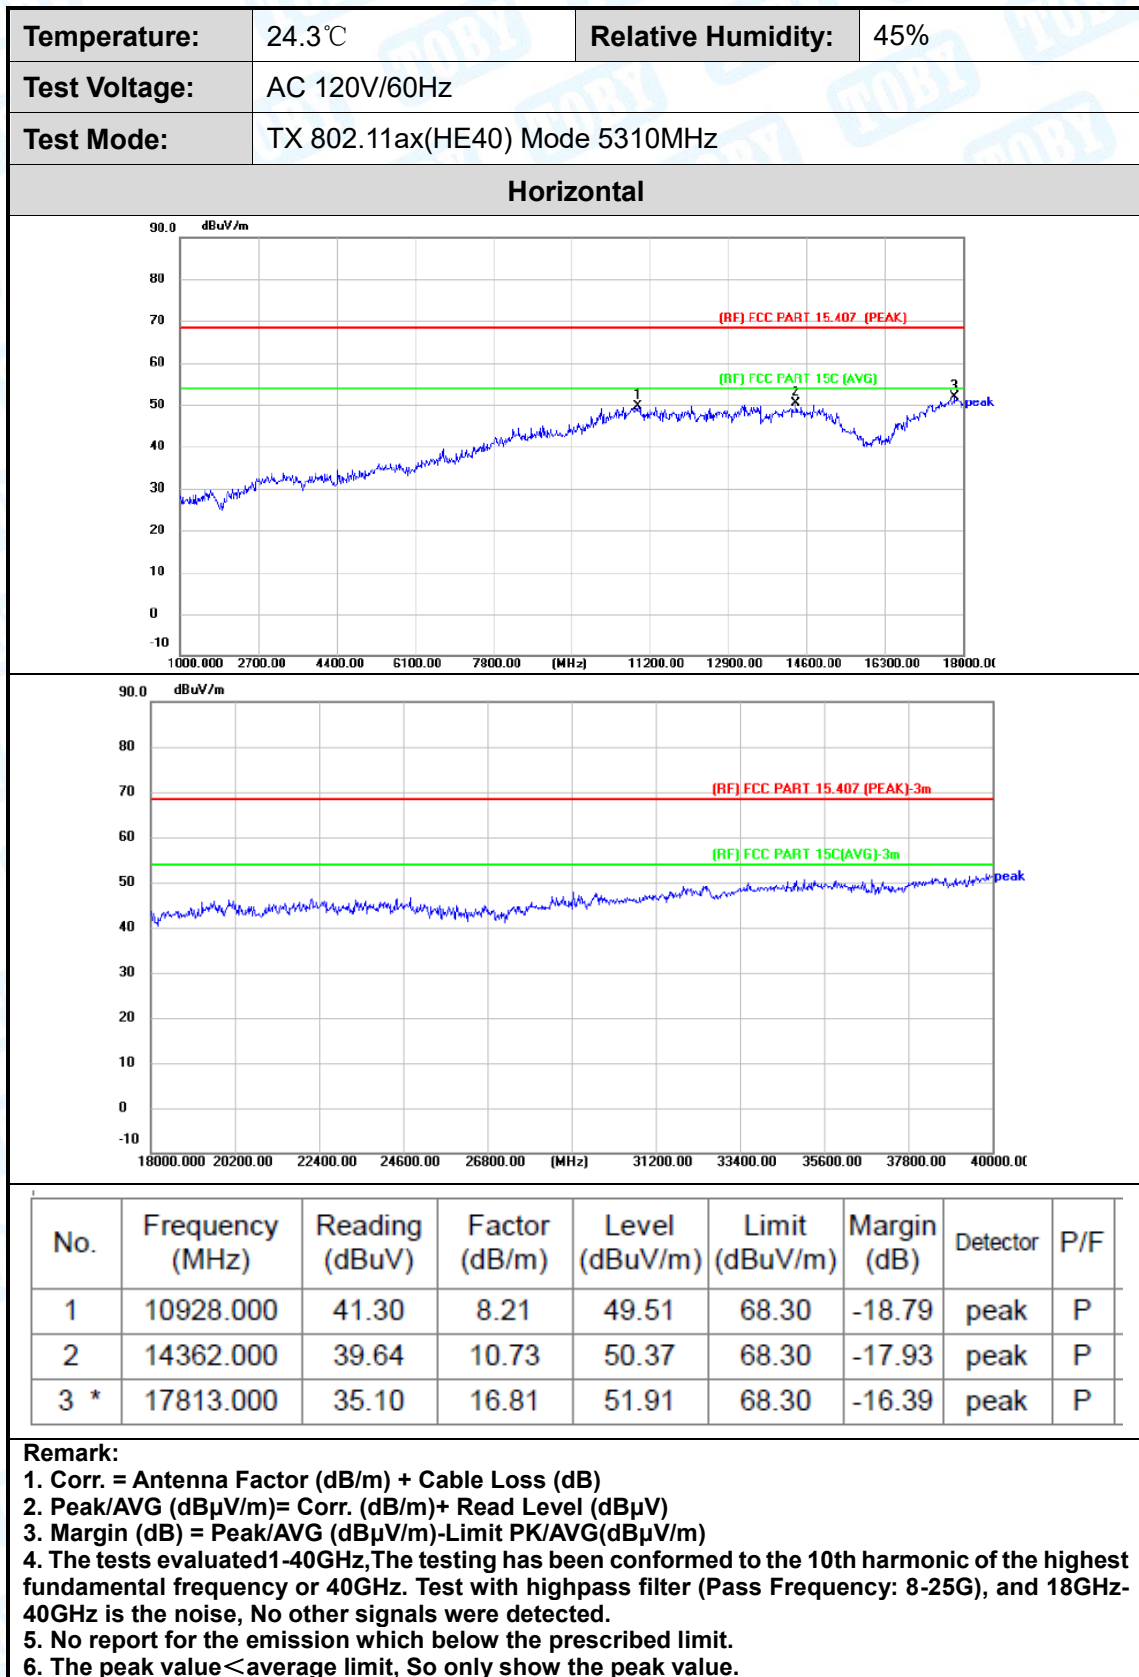

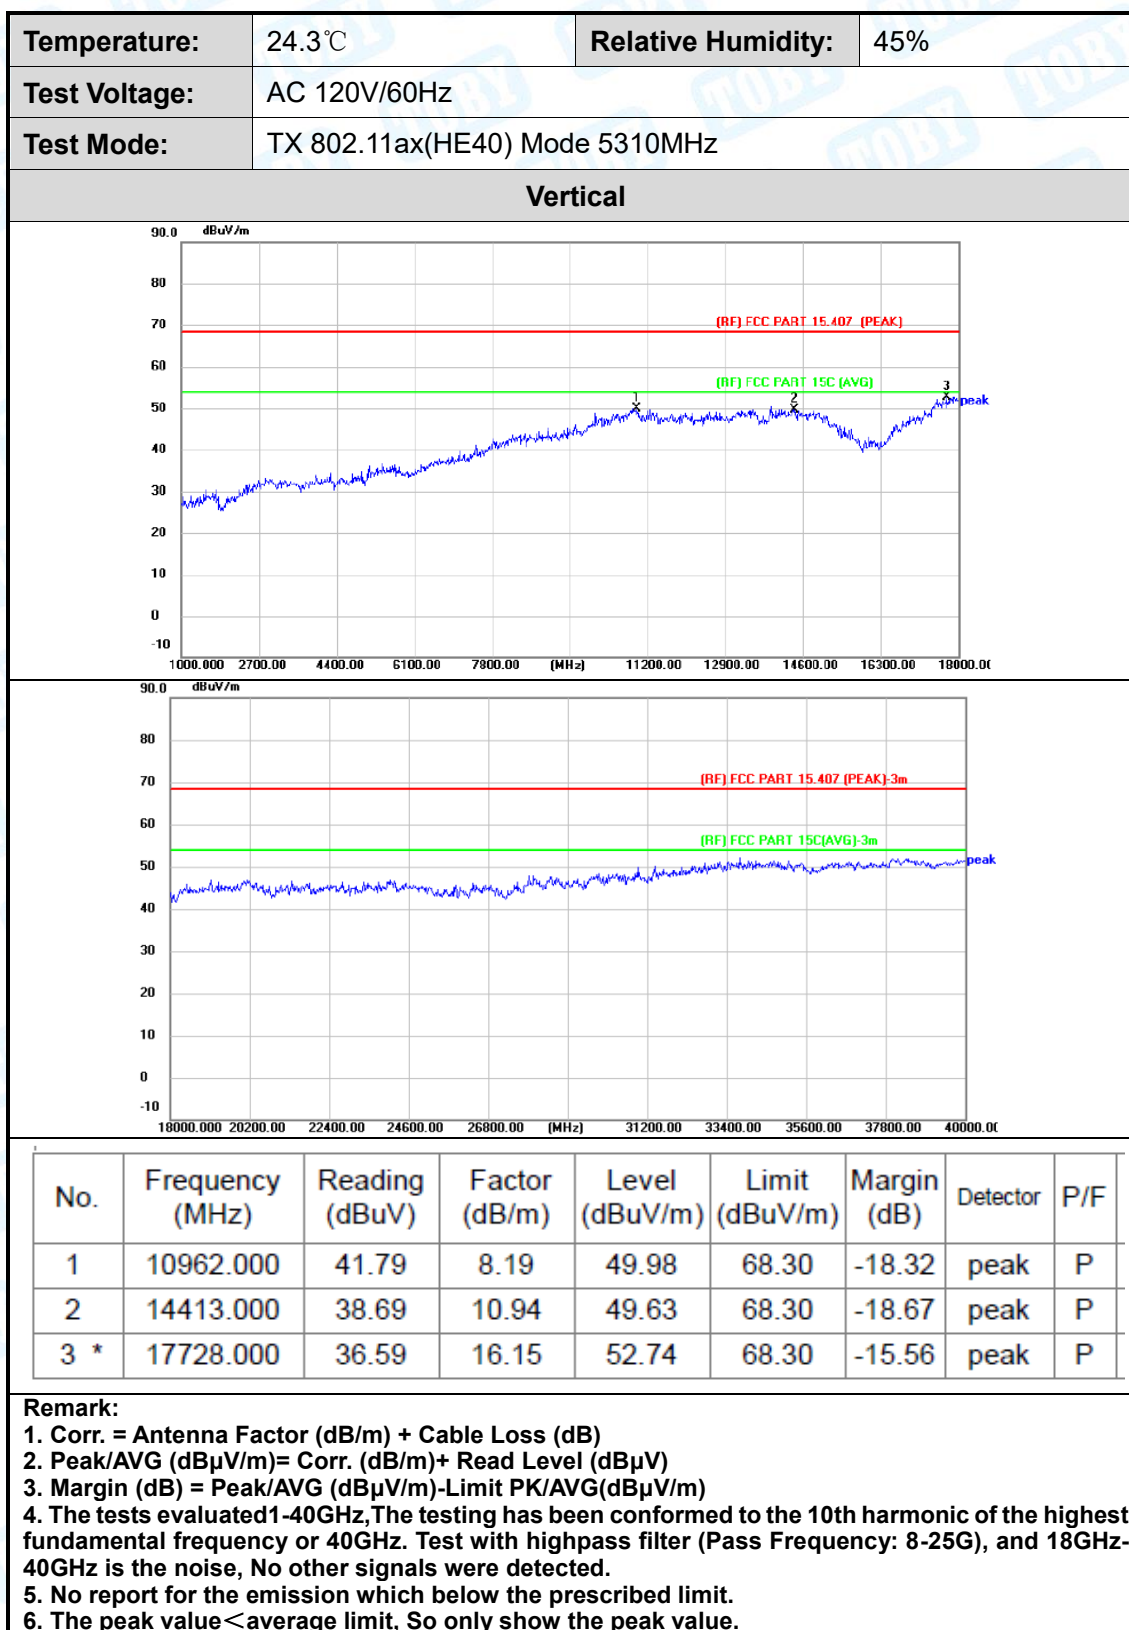

Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT40) Mode 5510MHz		

Horizontal

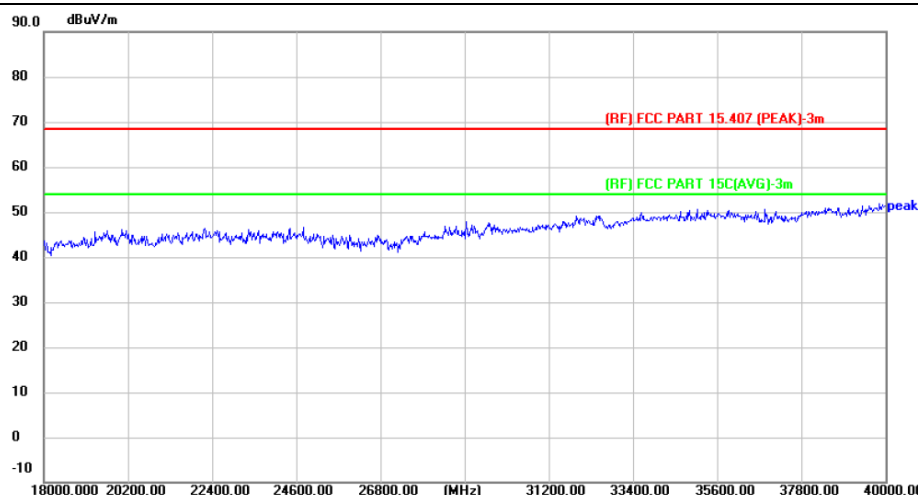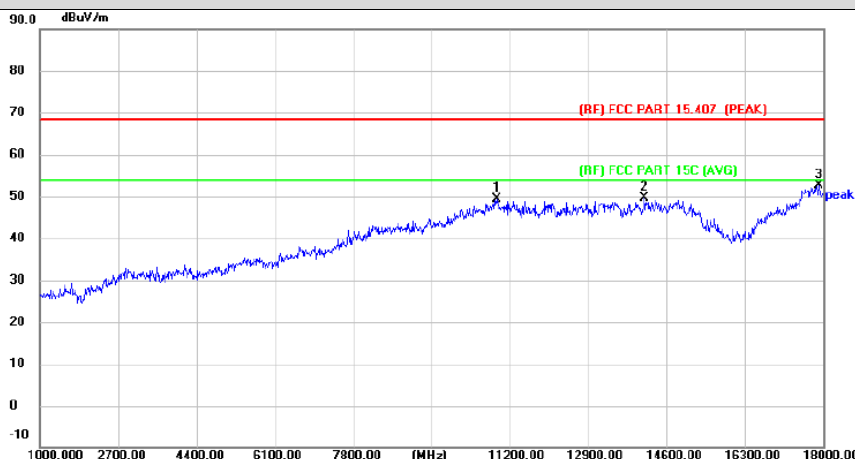



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10911.000	41.07	8.22	49.29	68.30	-19.01	peak	P
2	14107.000	39.42	10.16	49.58	68.30	-18.72	peak	P
3 *	17898.000	35.10	17.50	52.60	68.30	-15.70	peak	P


Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.




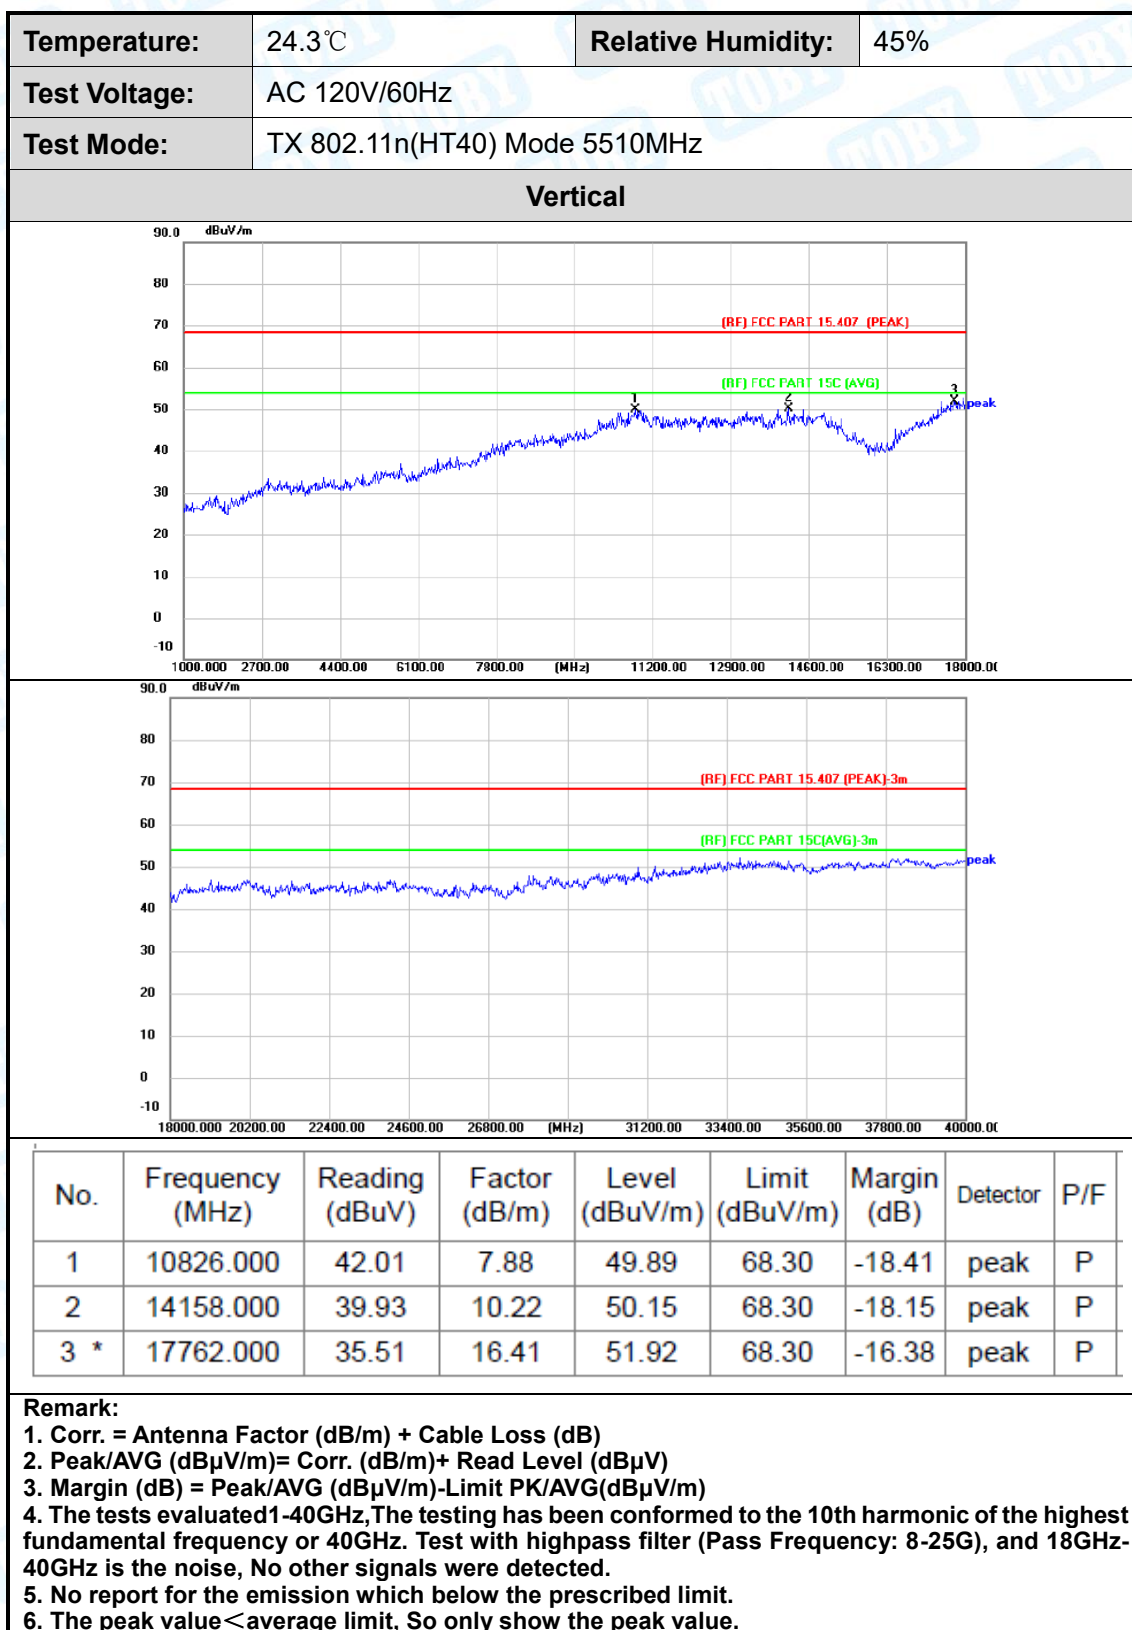


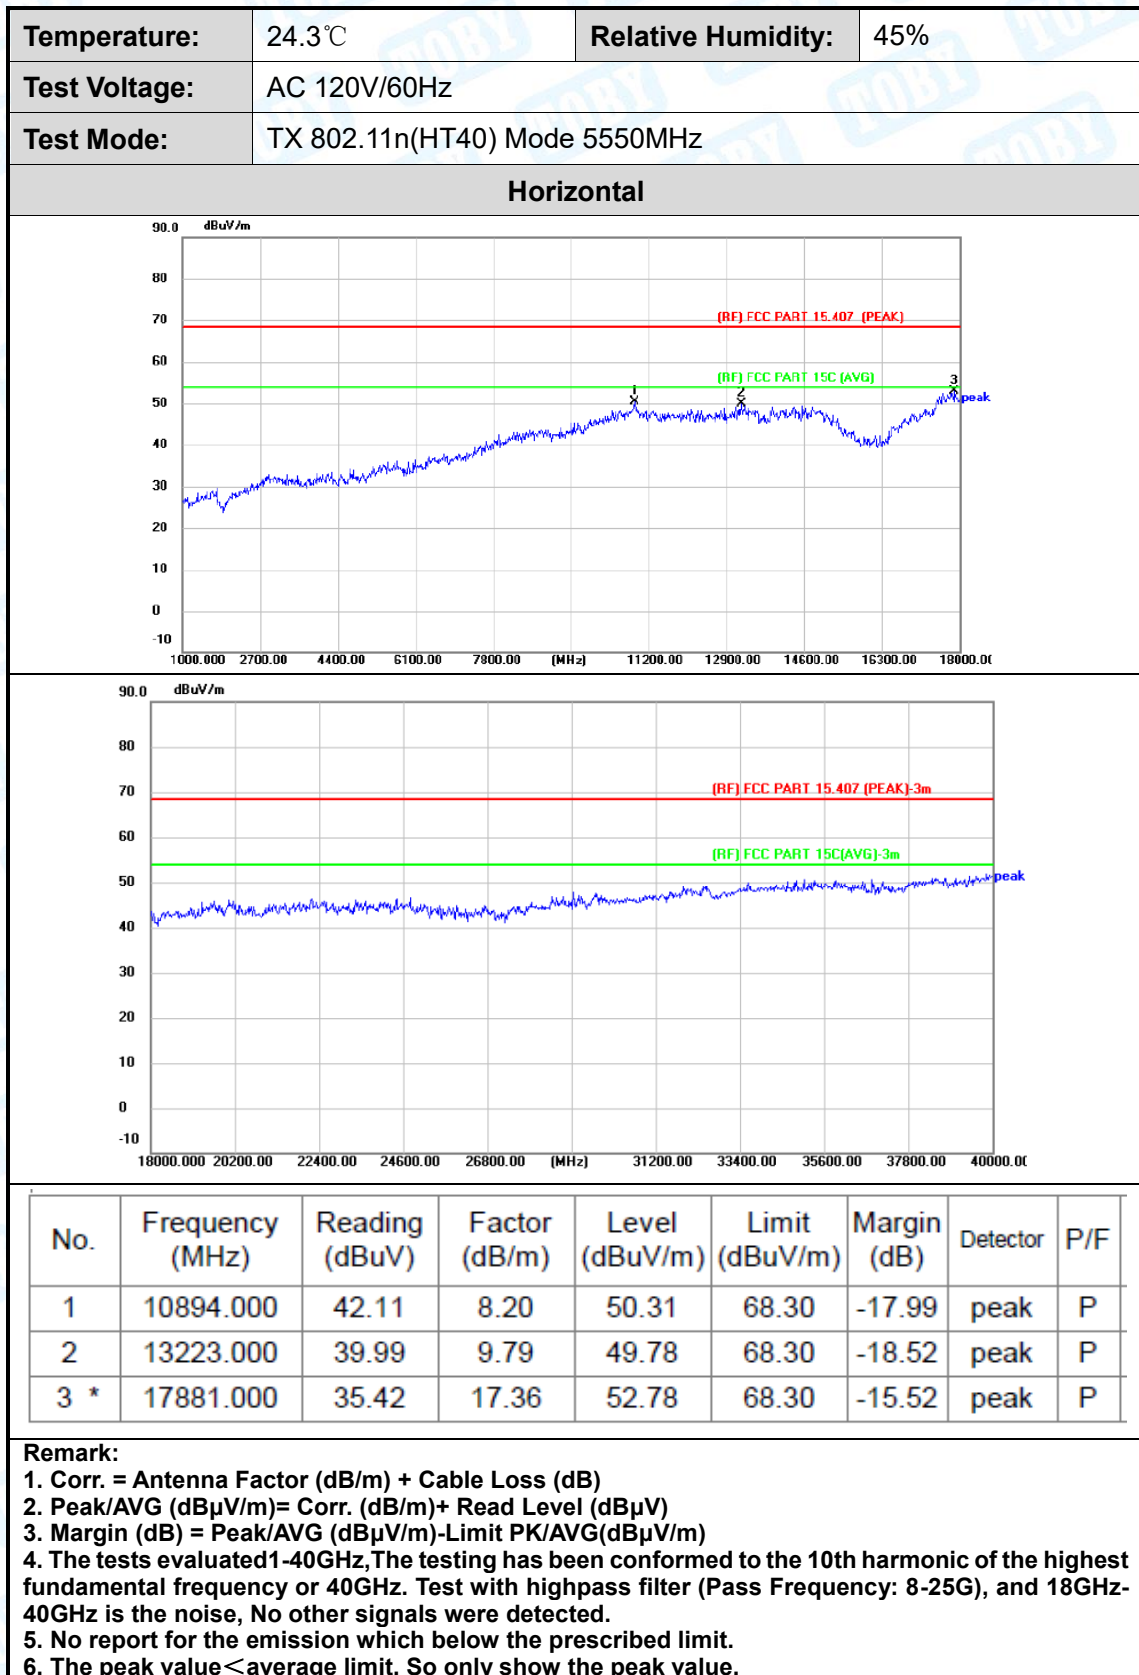


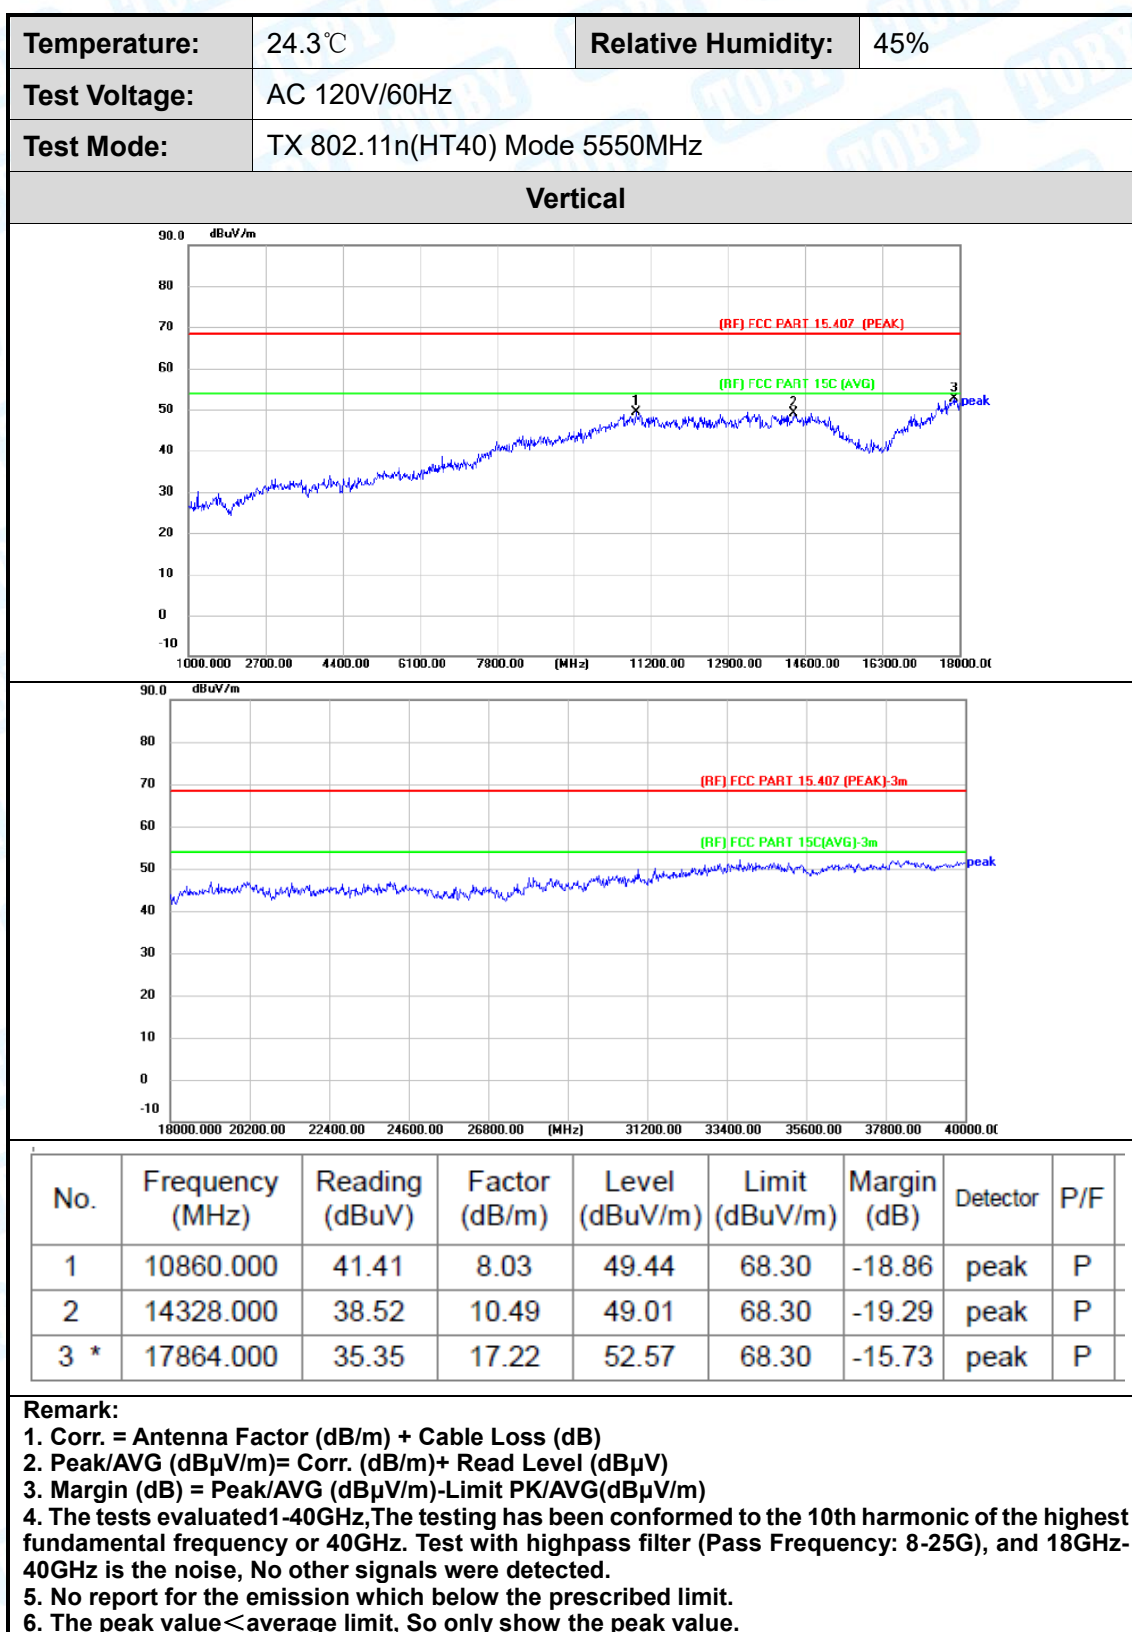


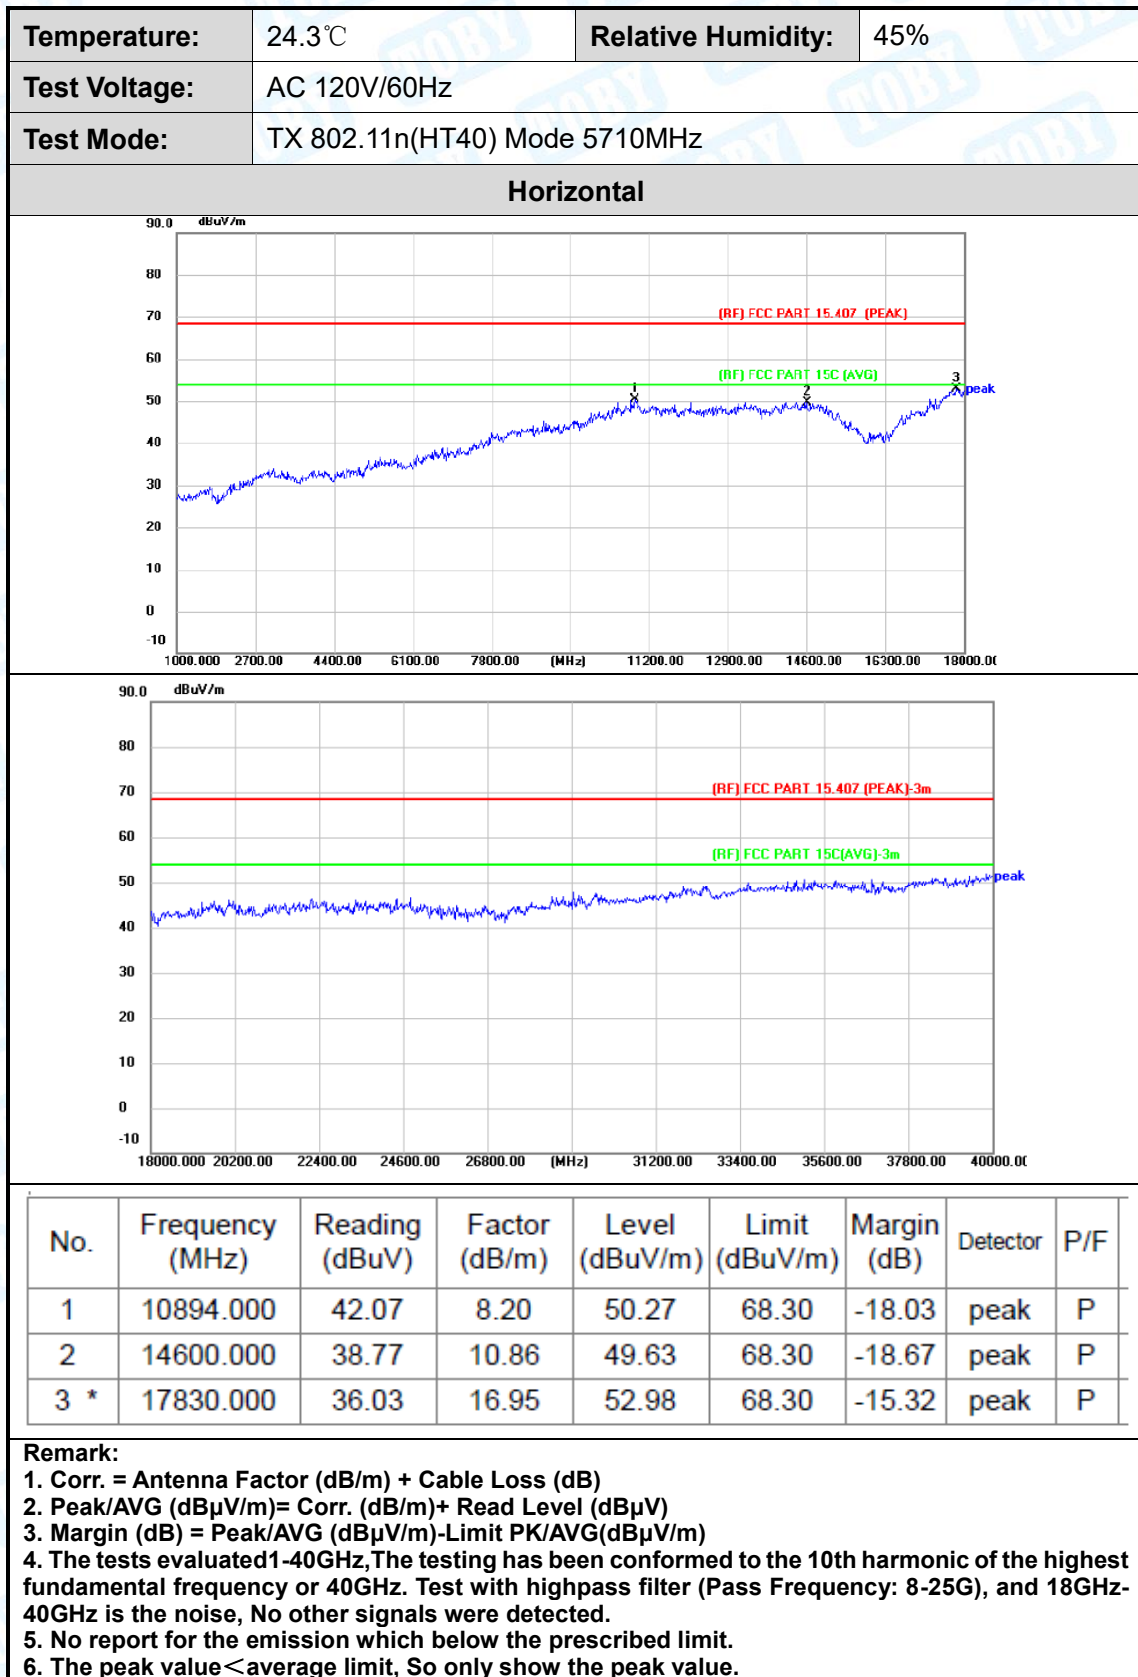


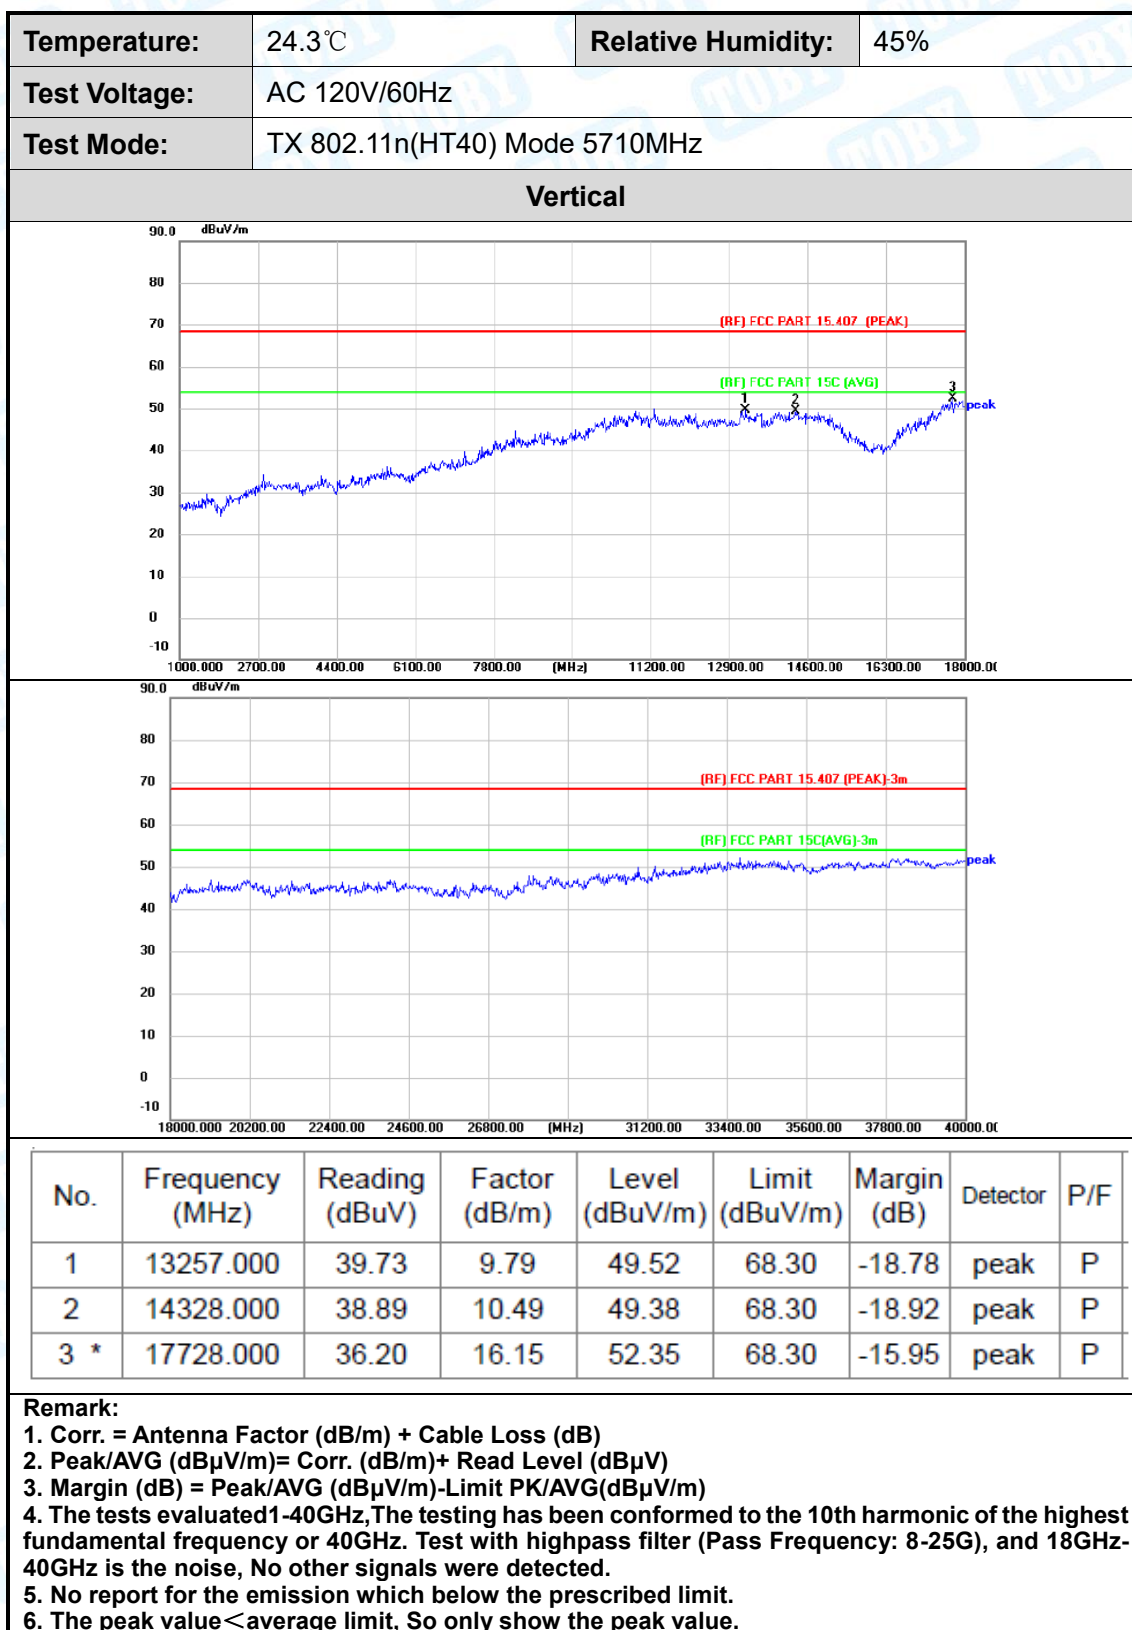


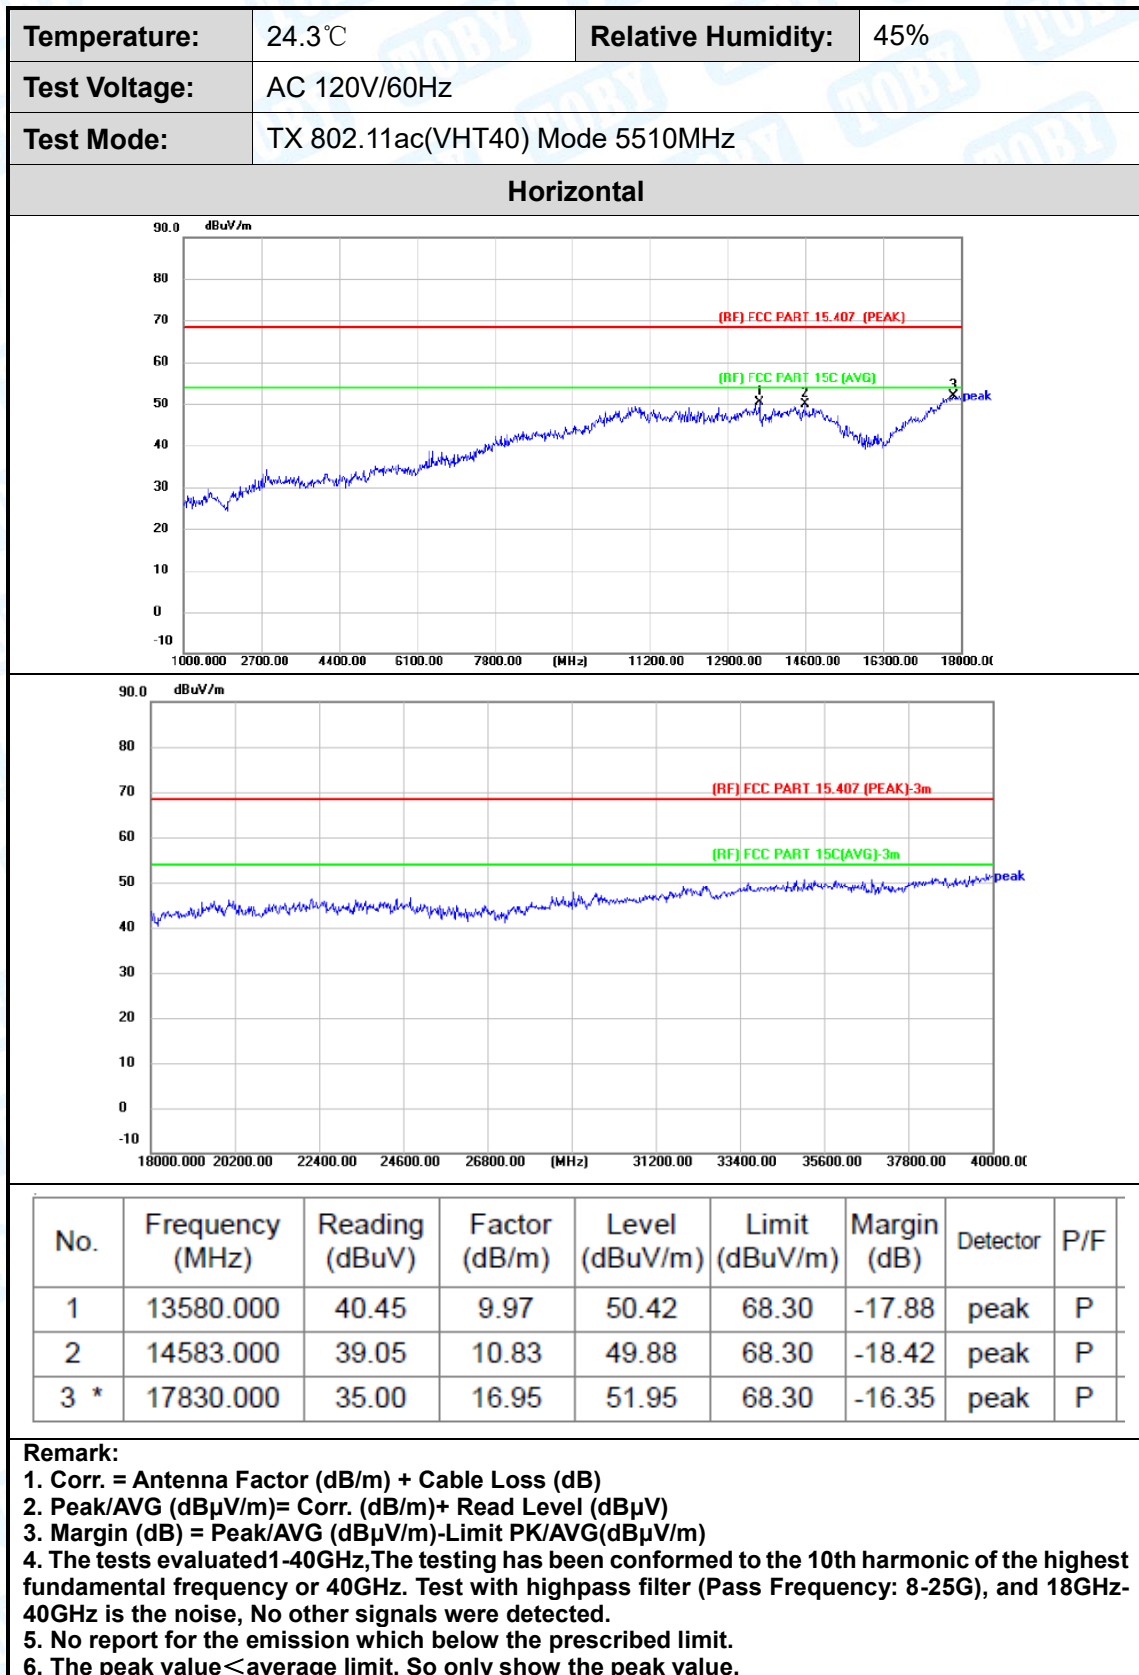


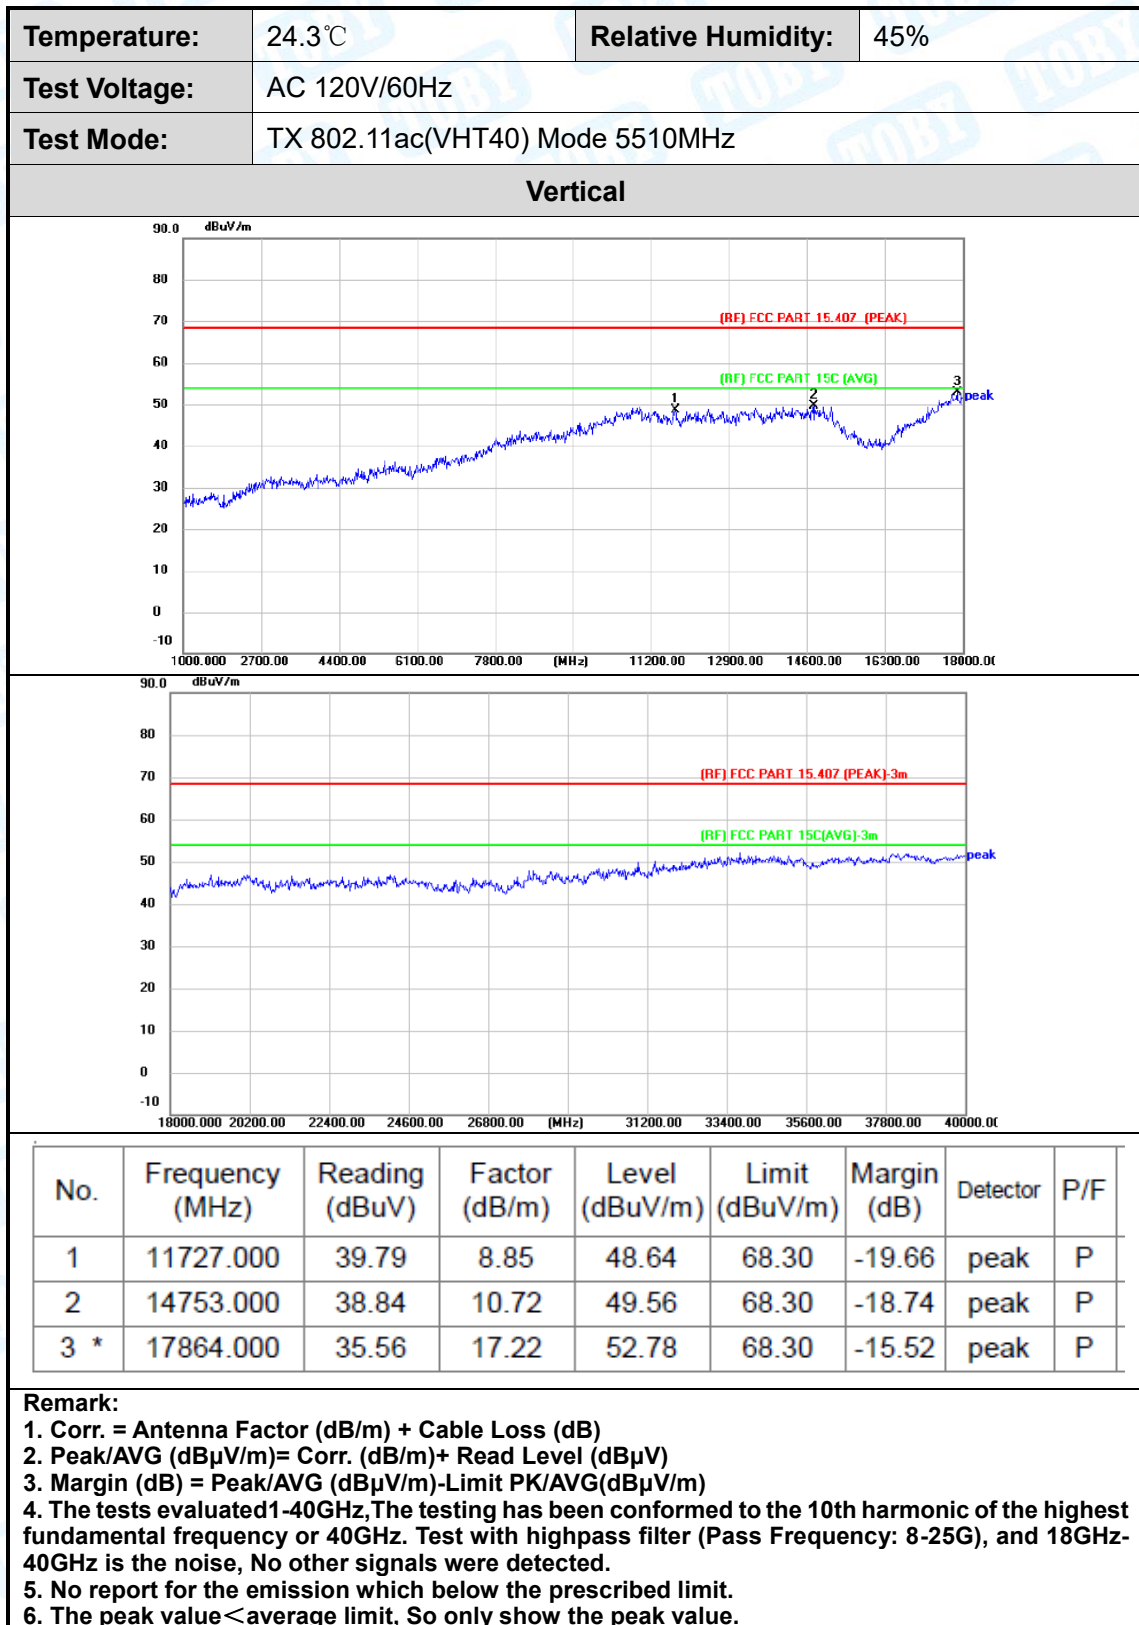


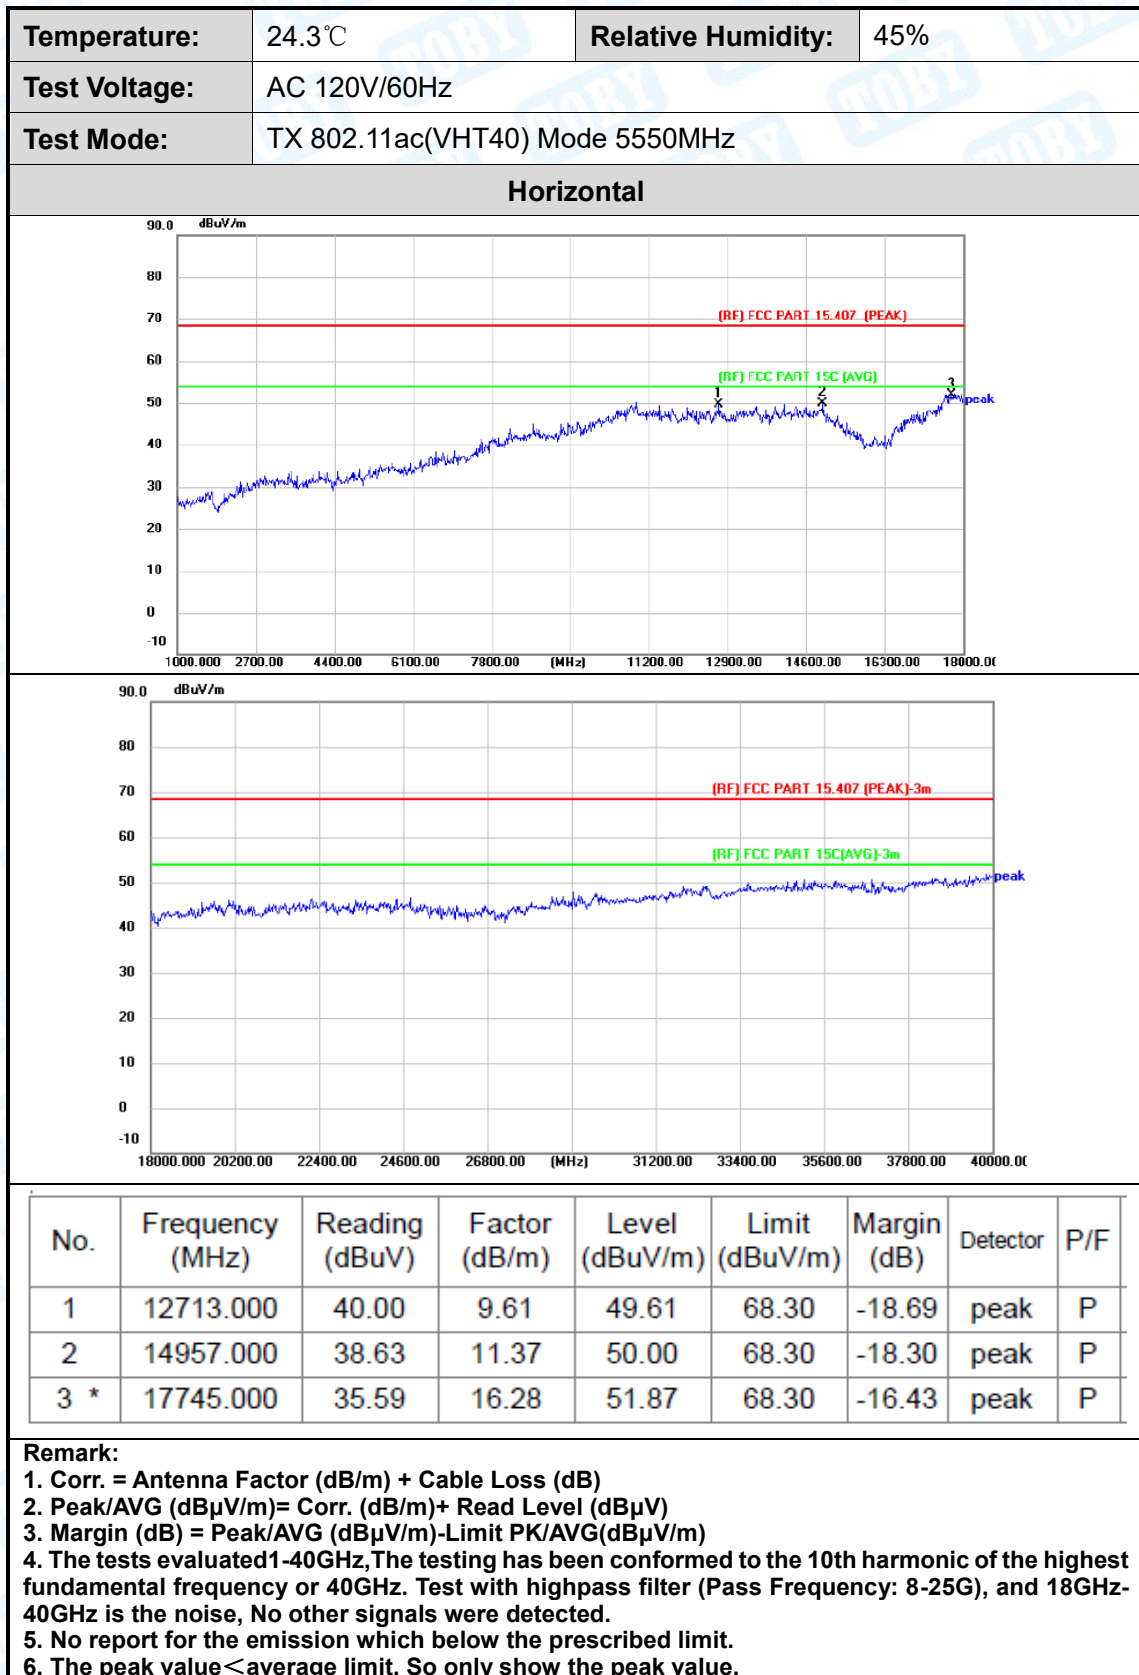


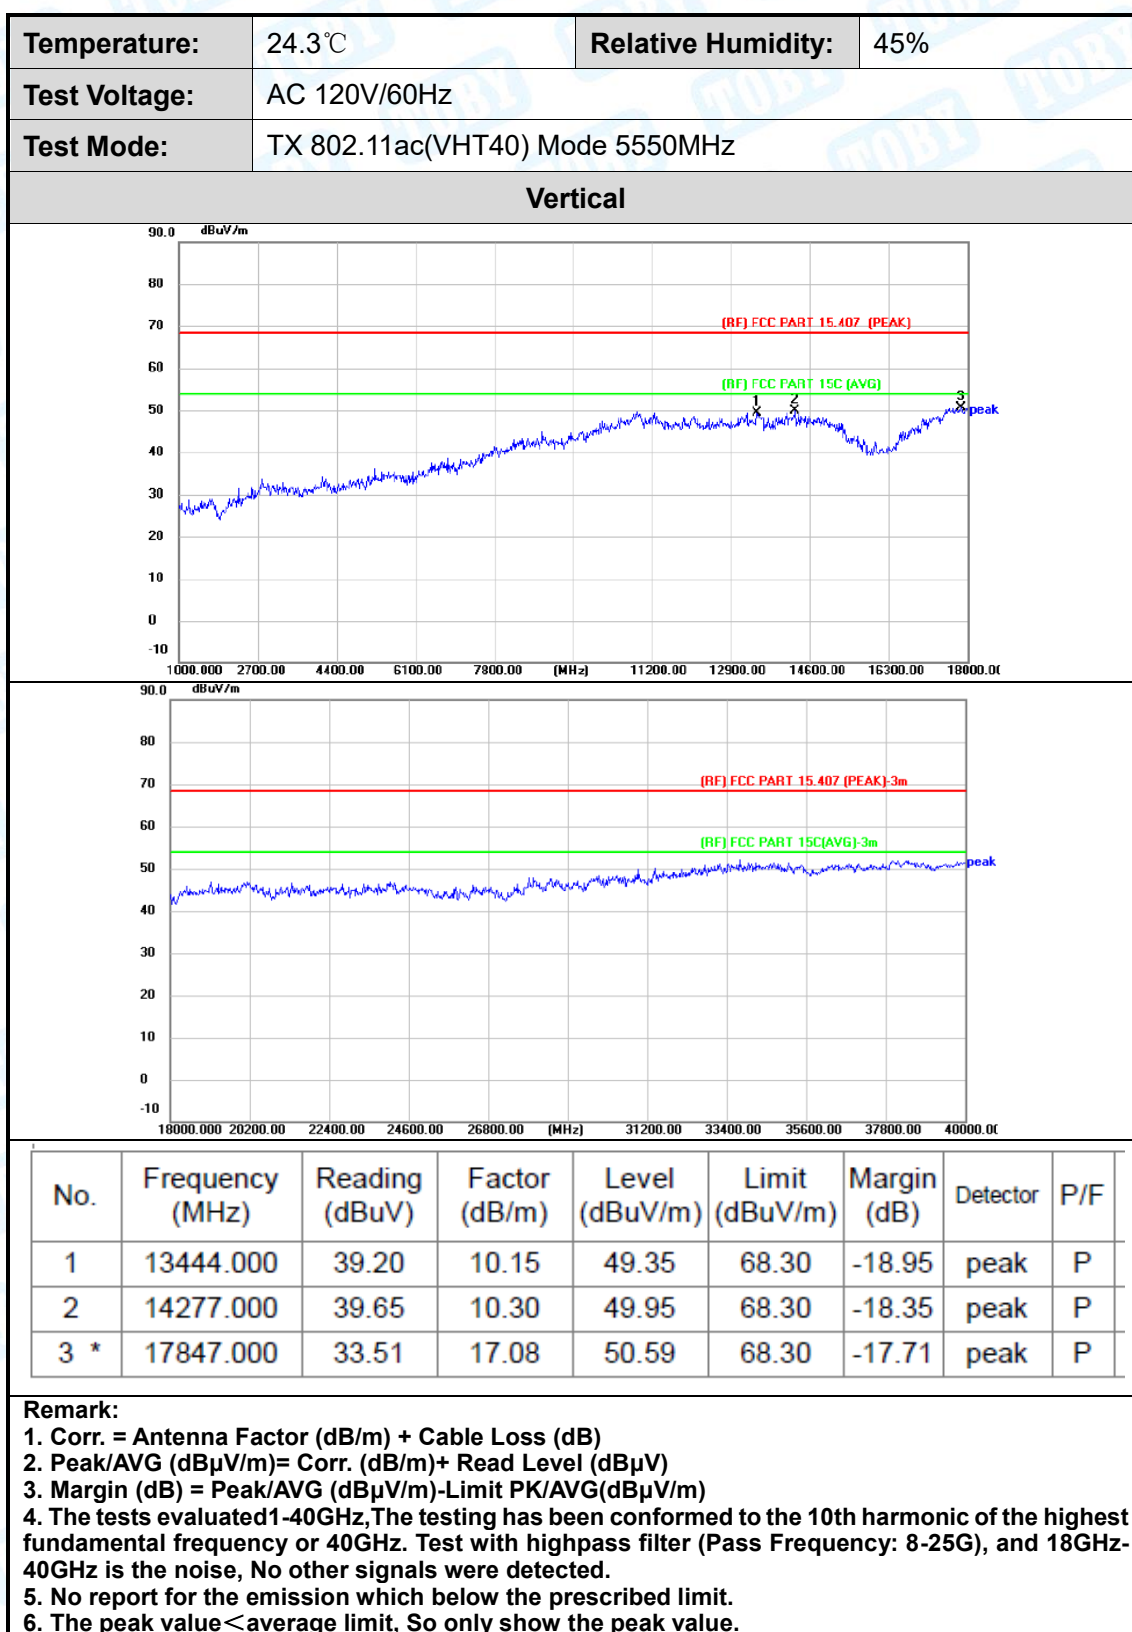


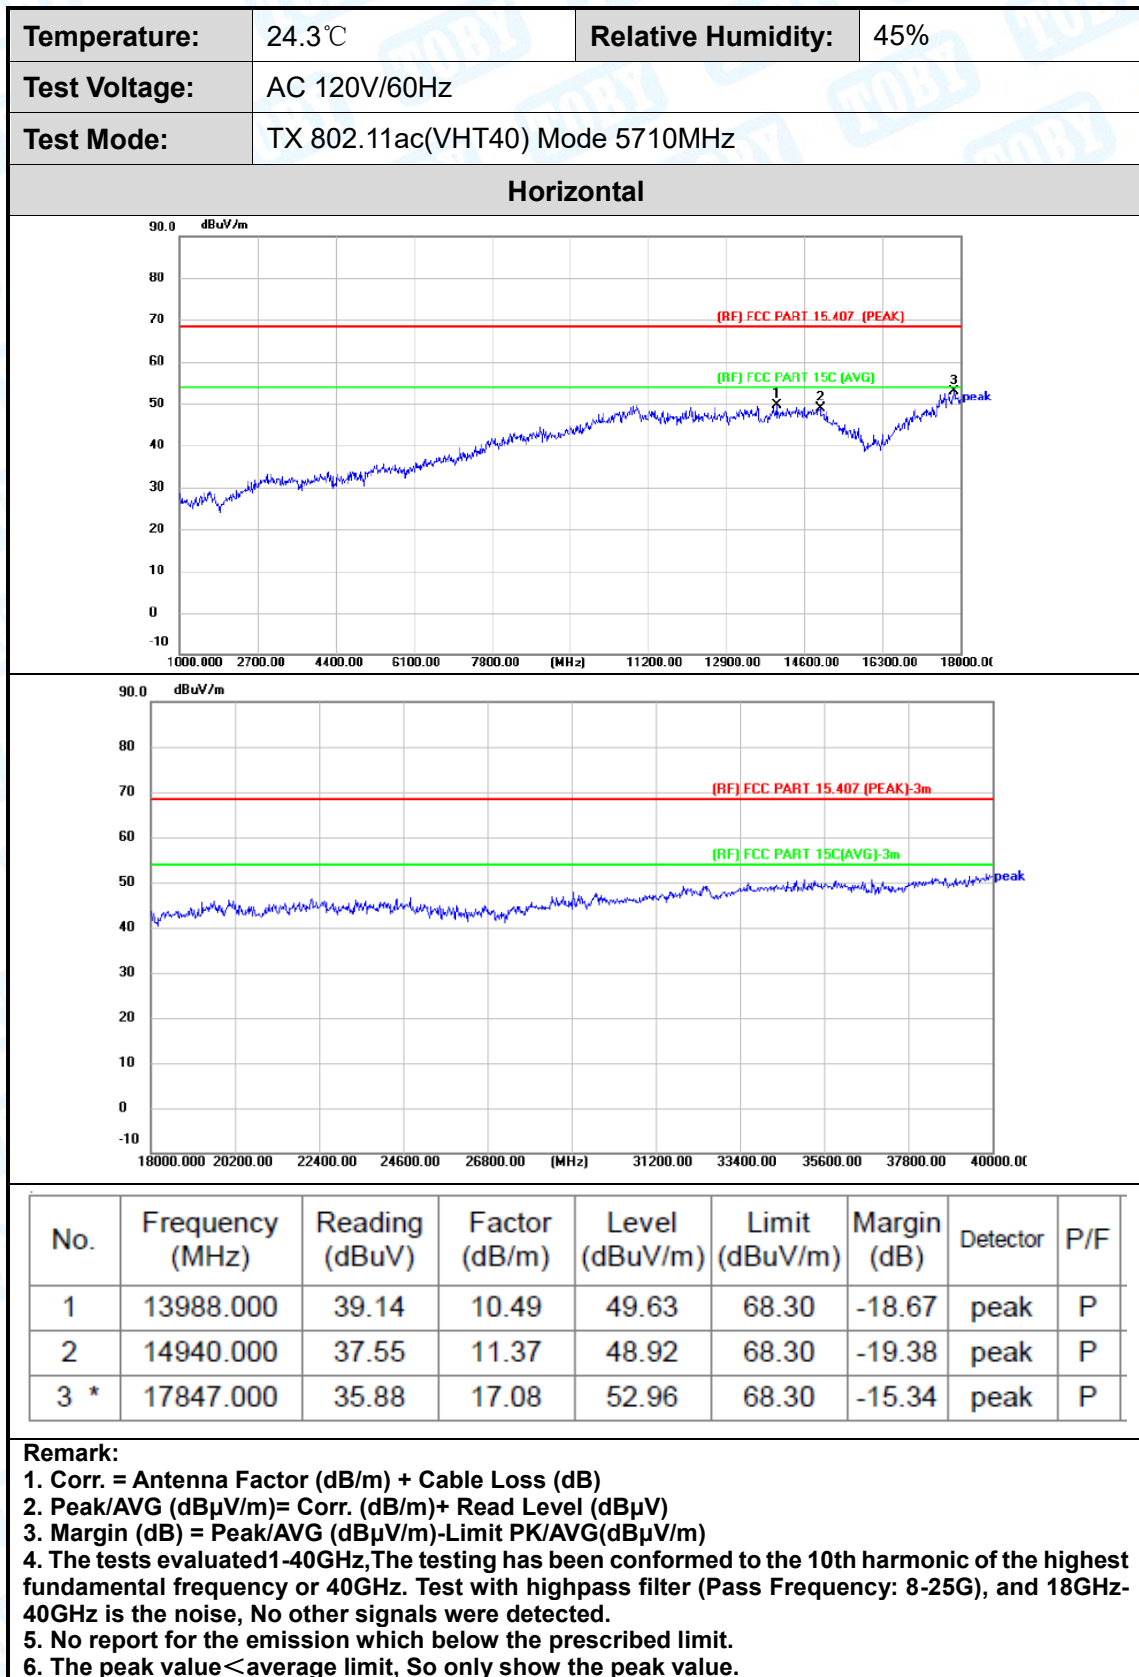


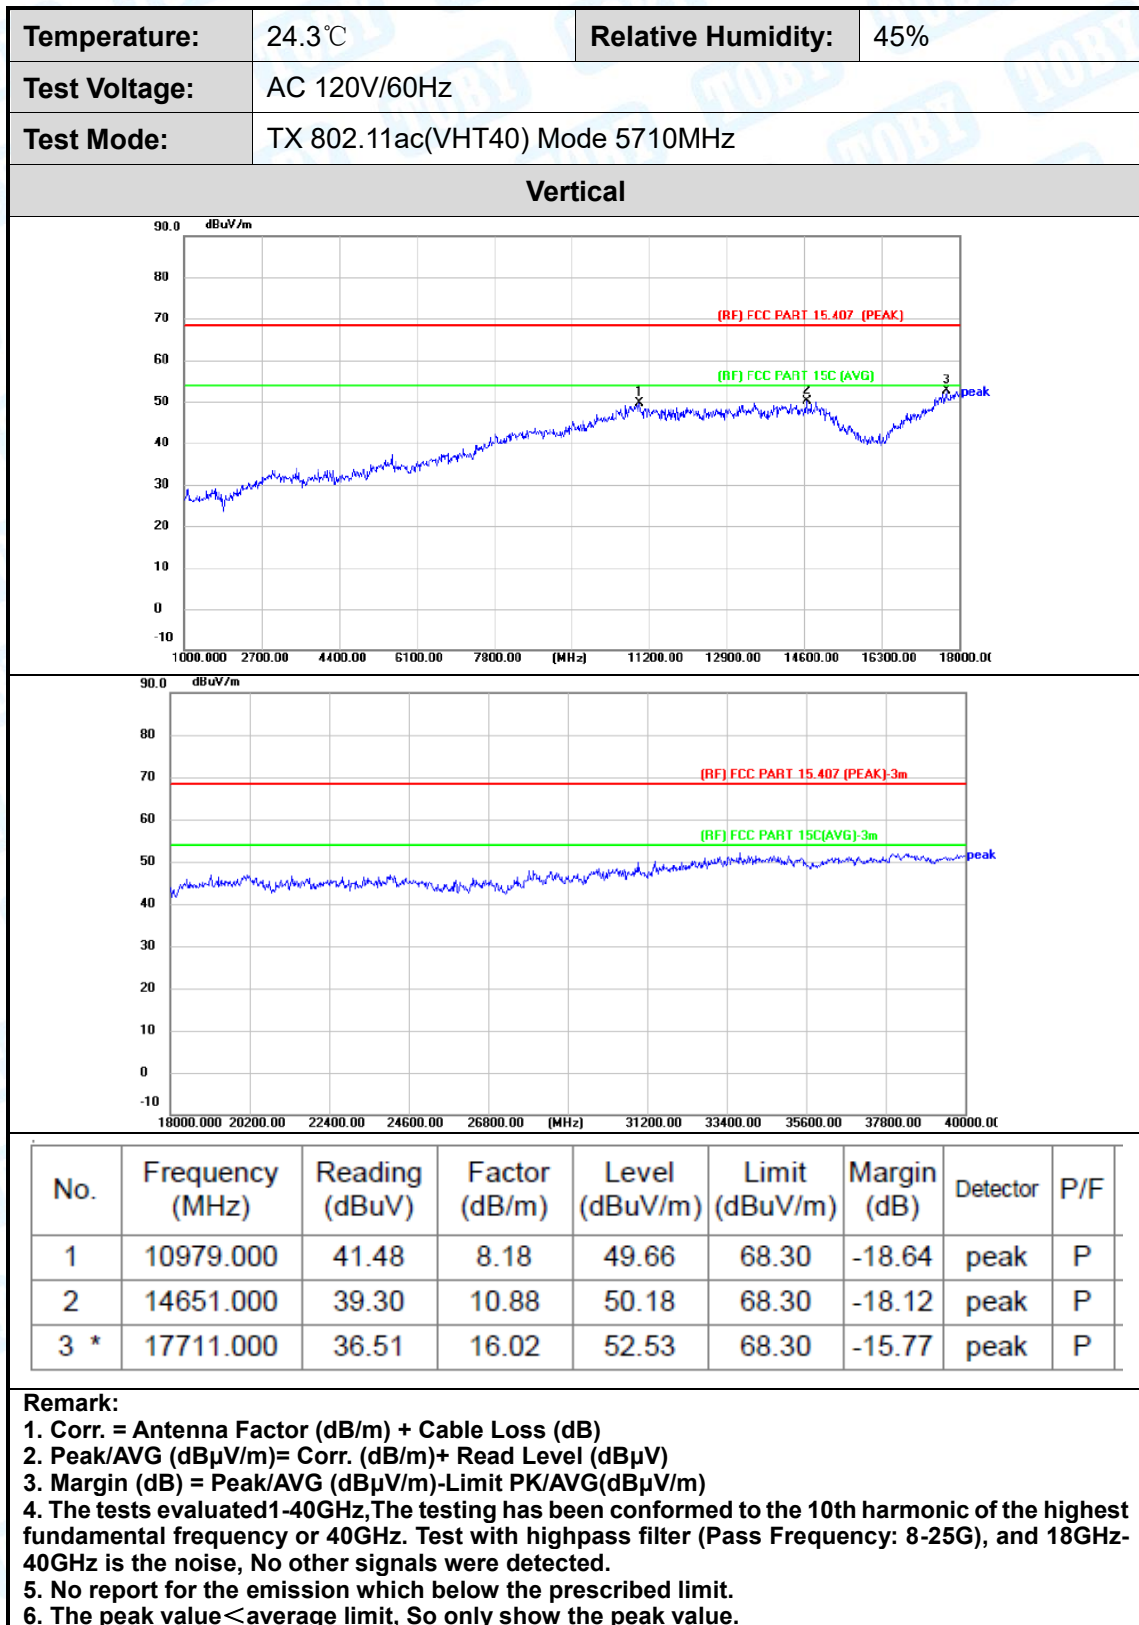


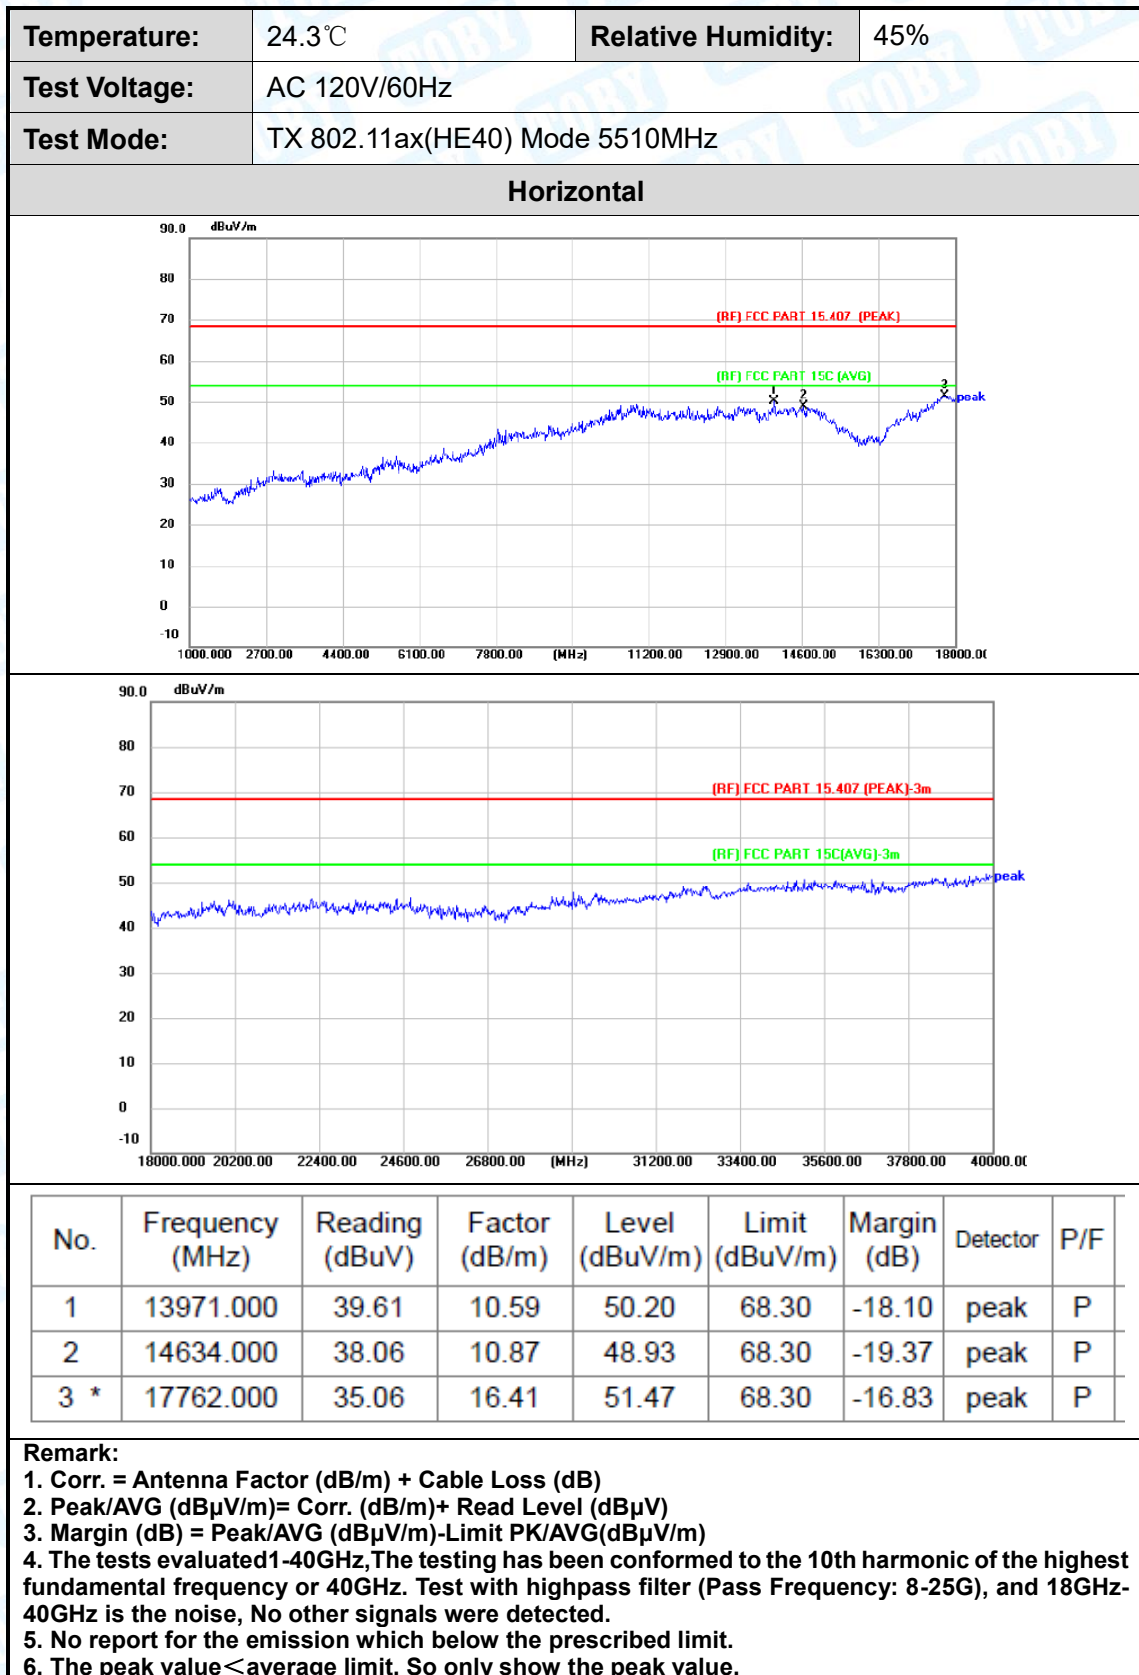


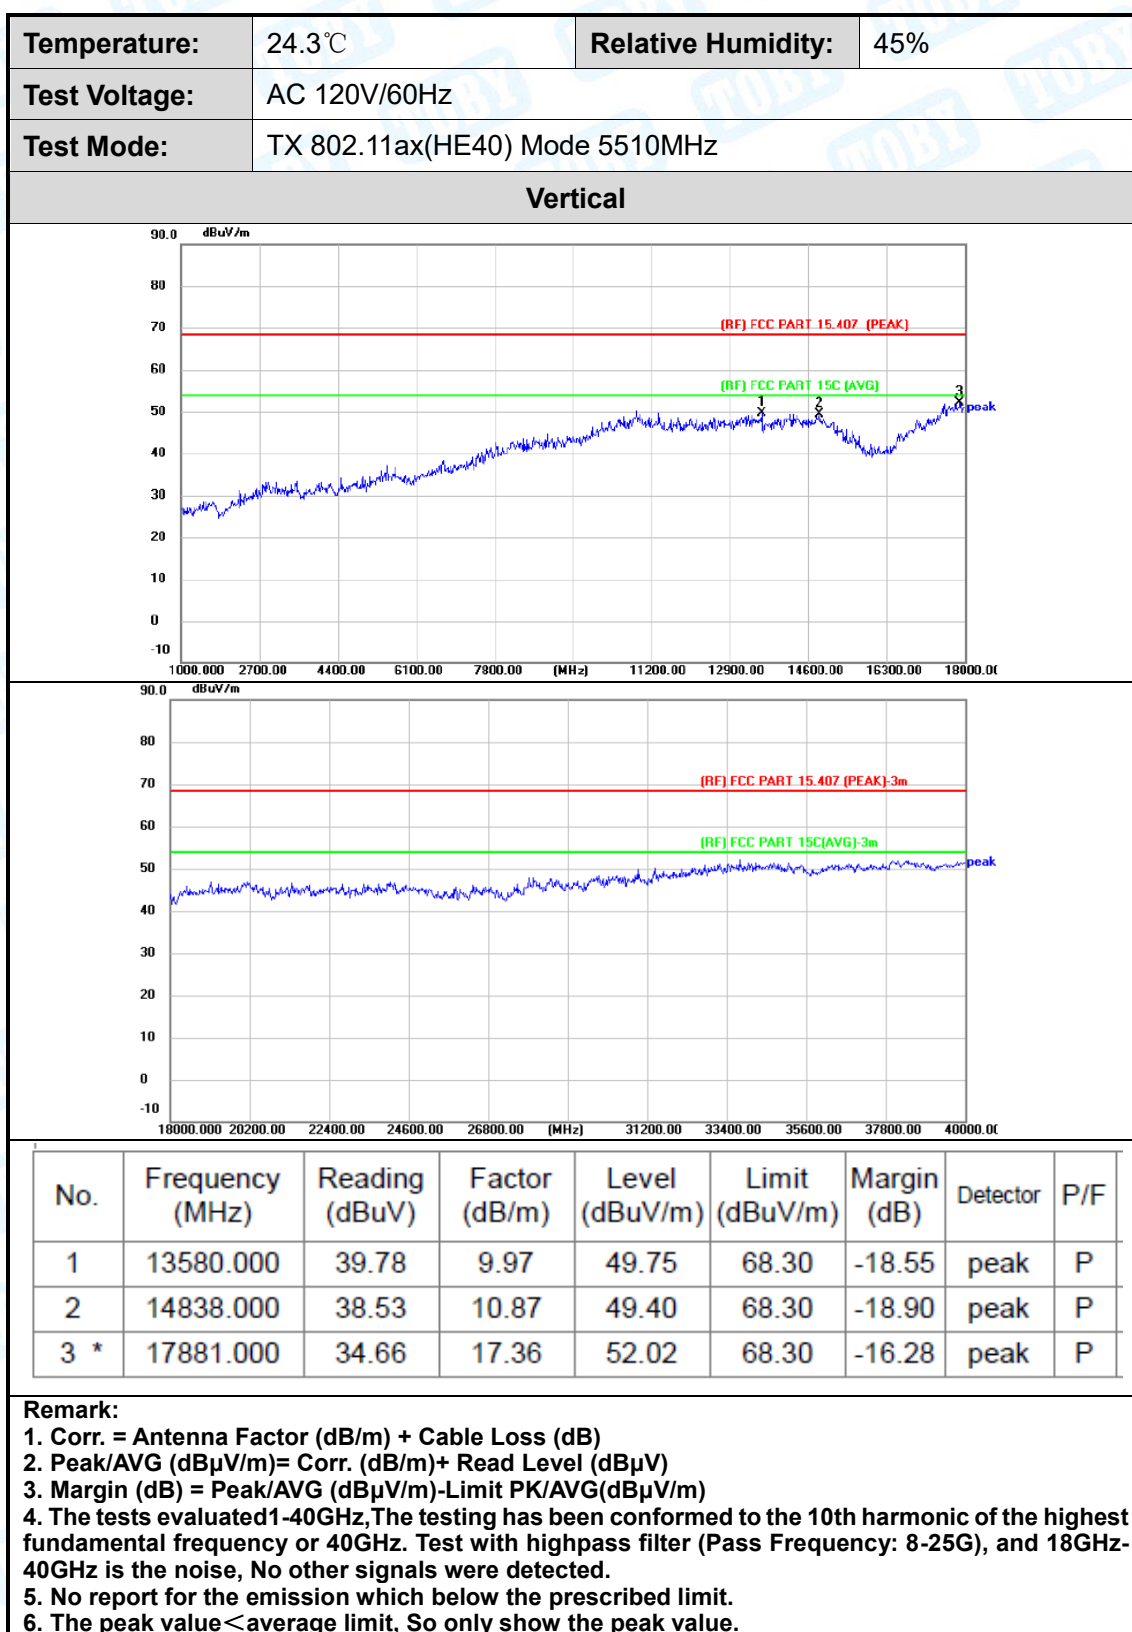


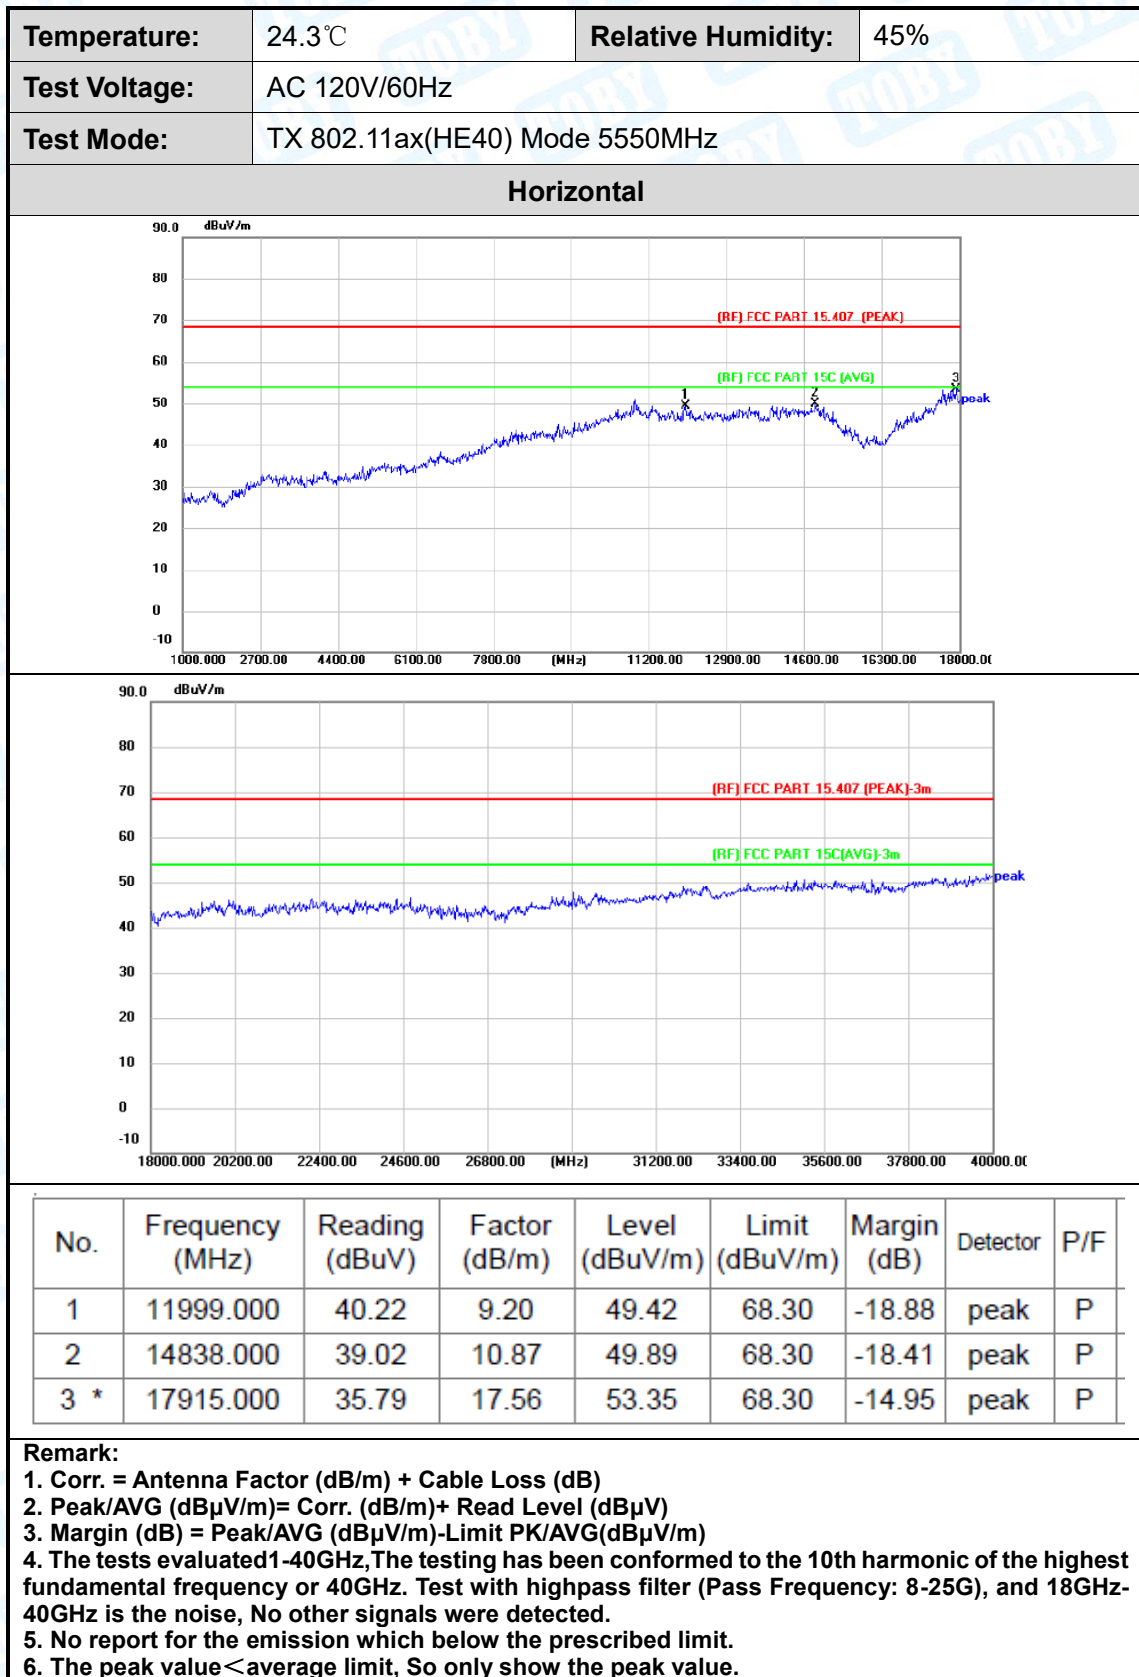



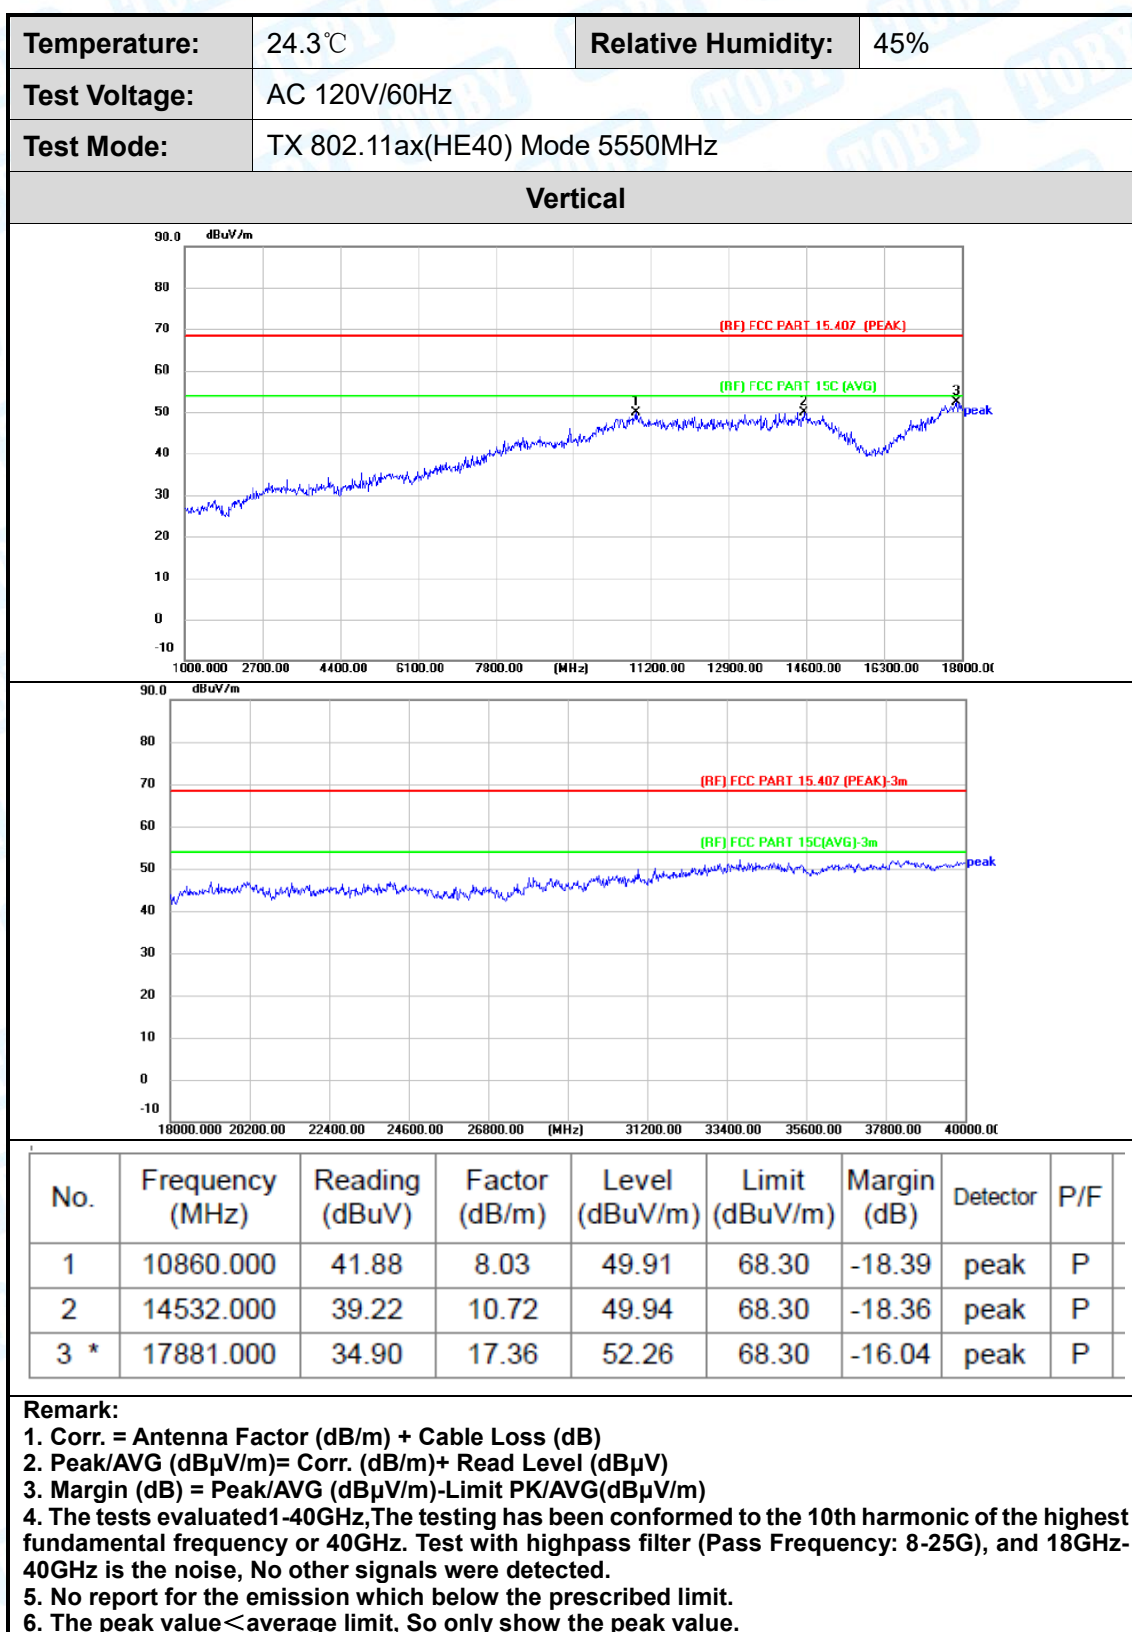


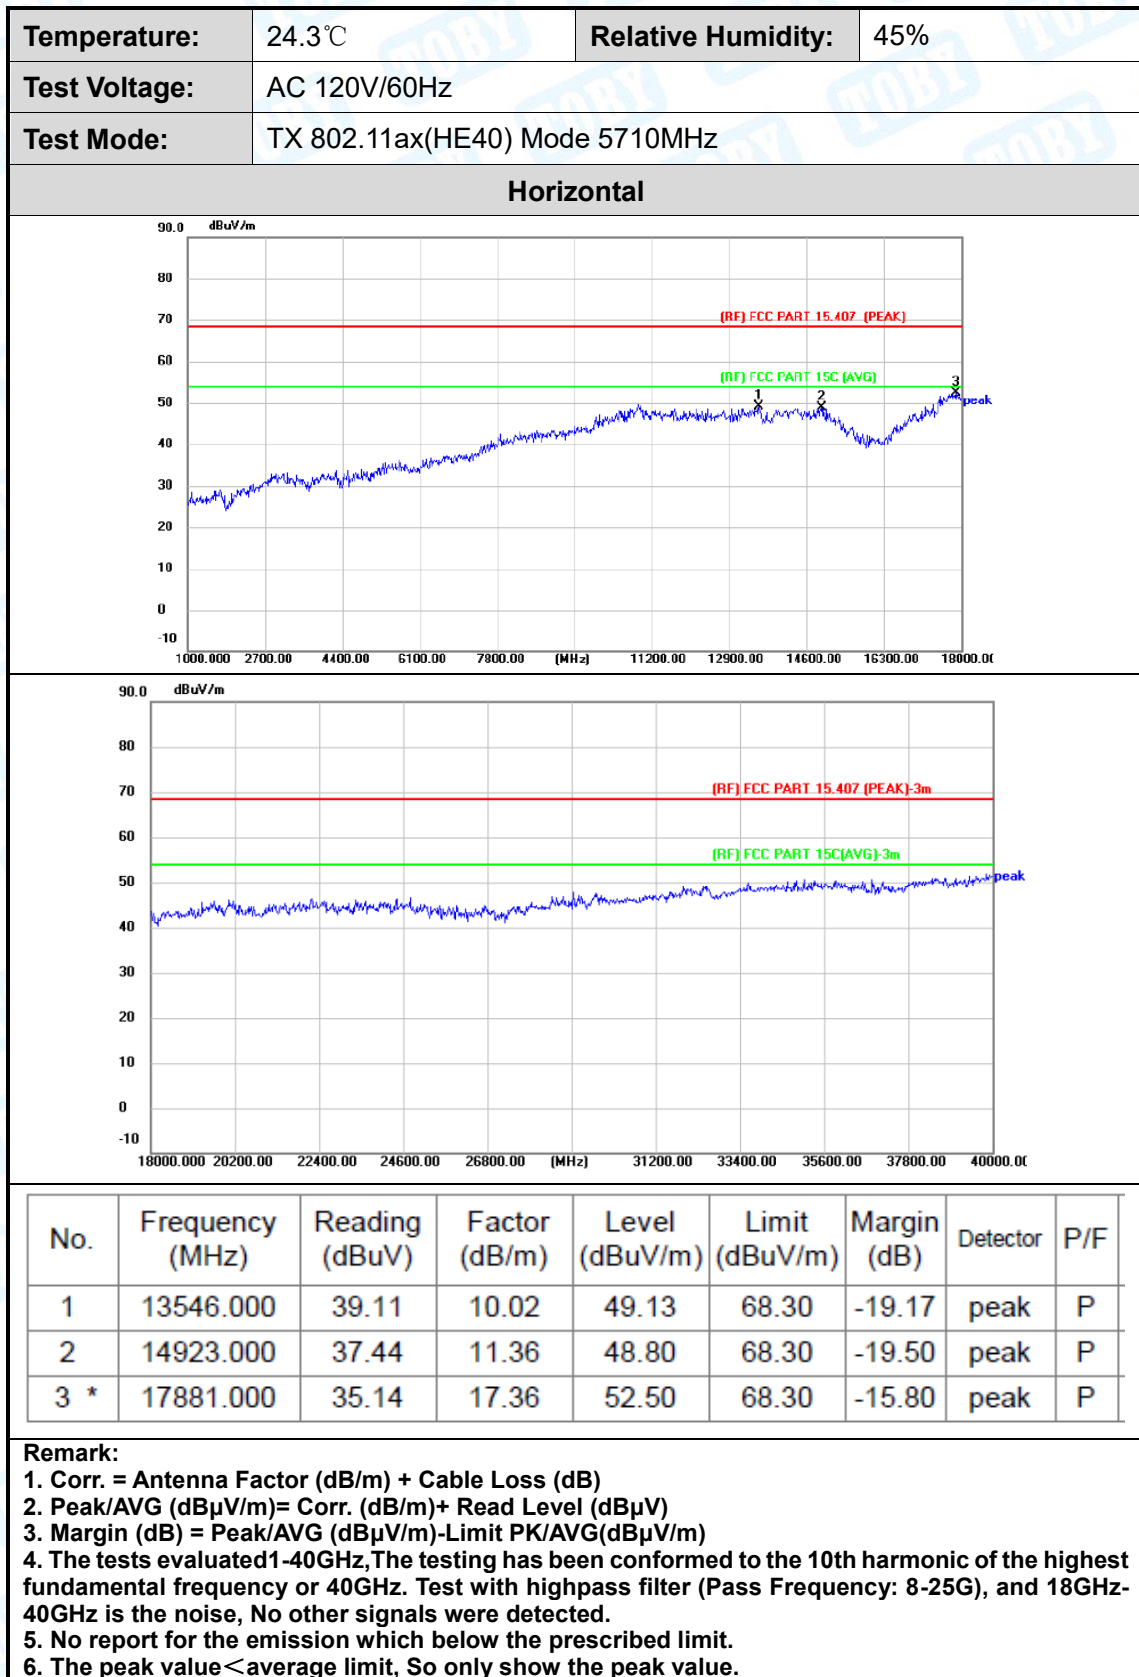

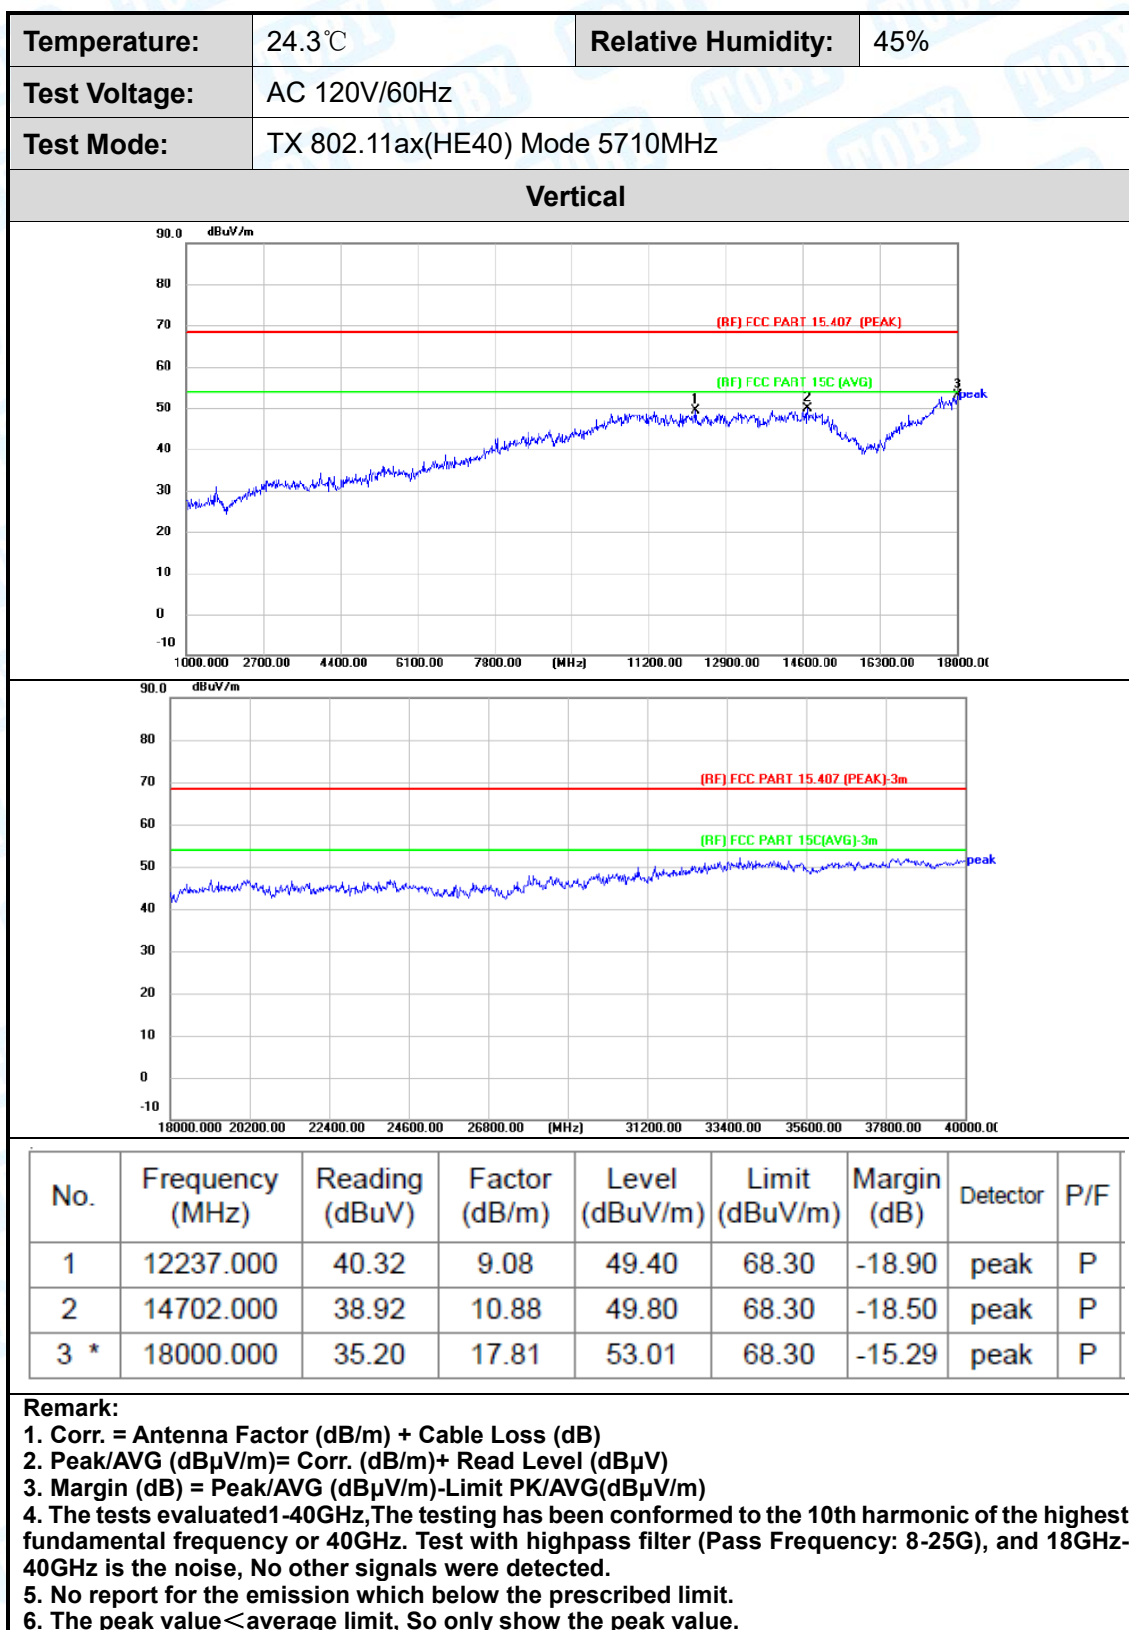


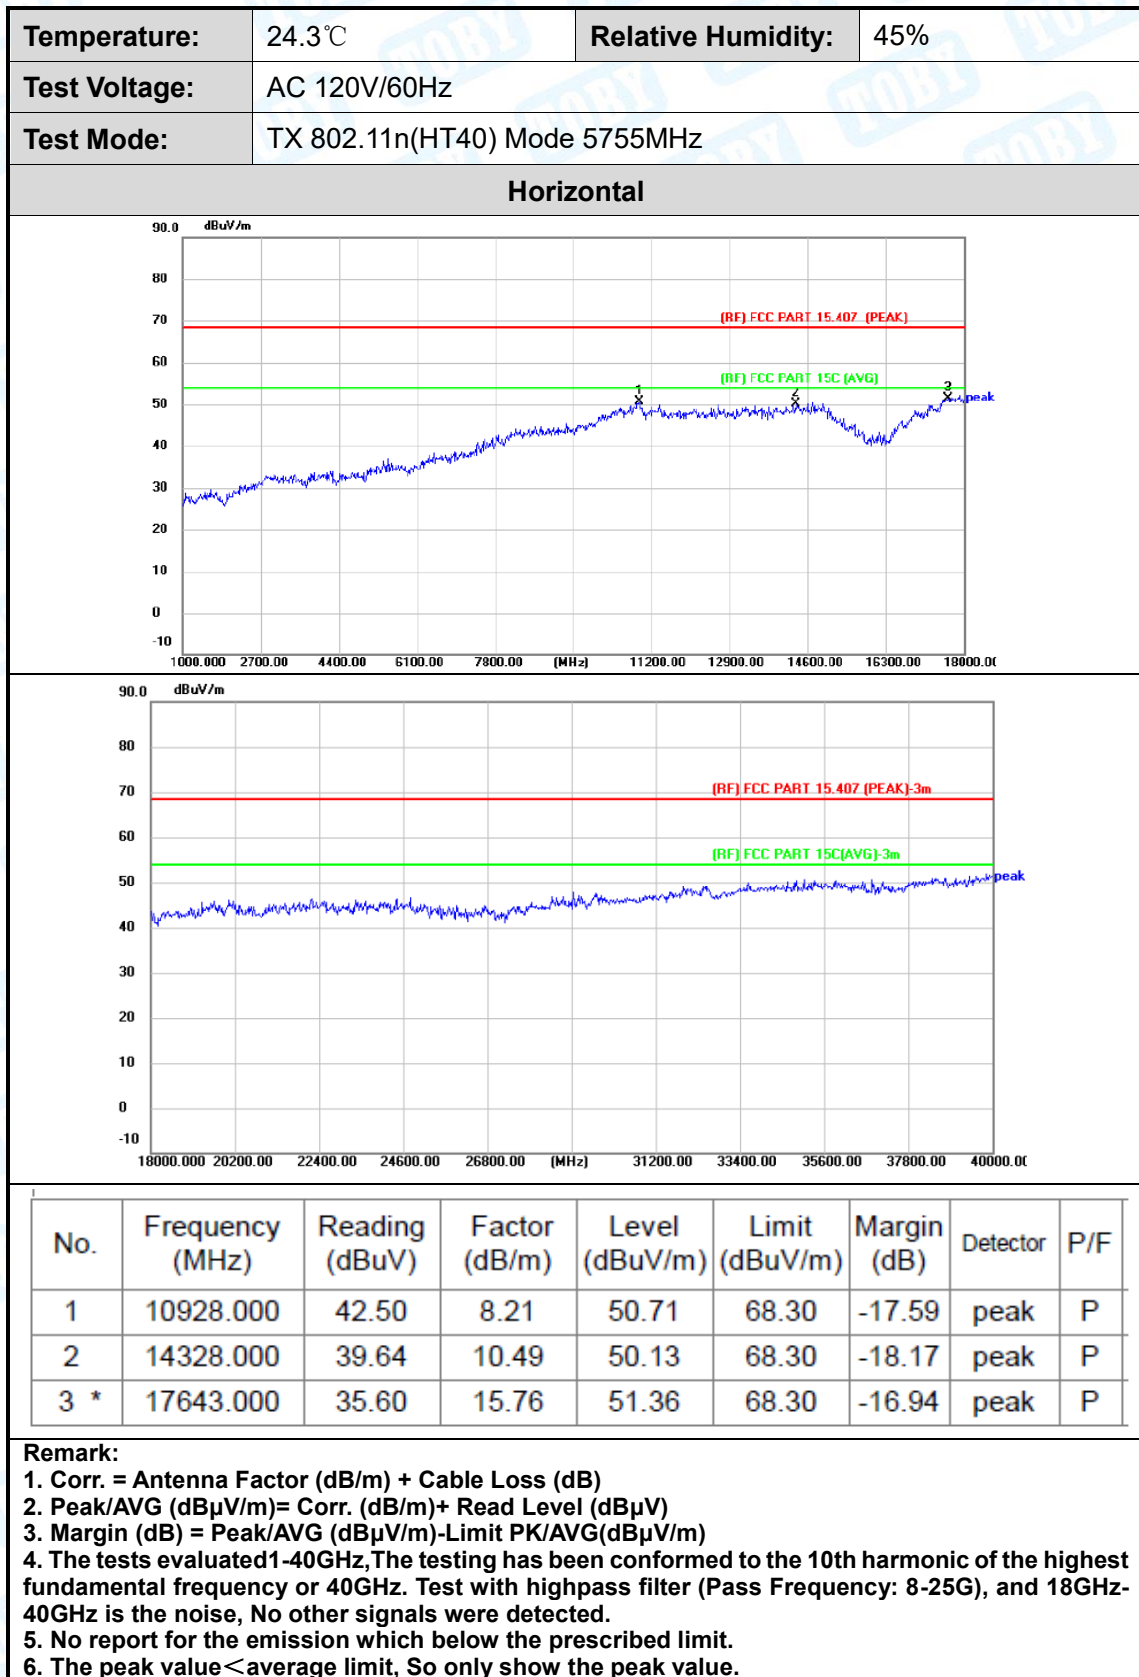


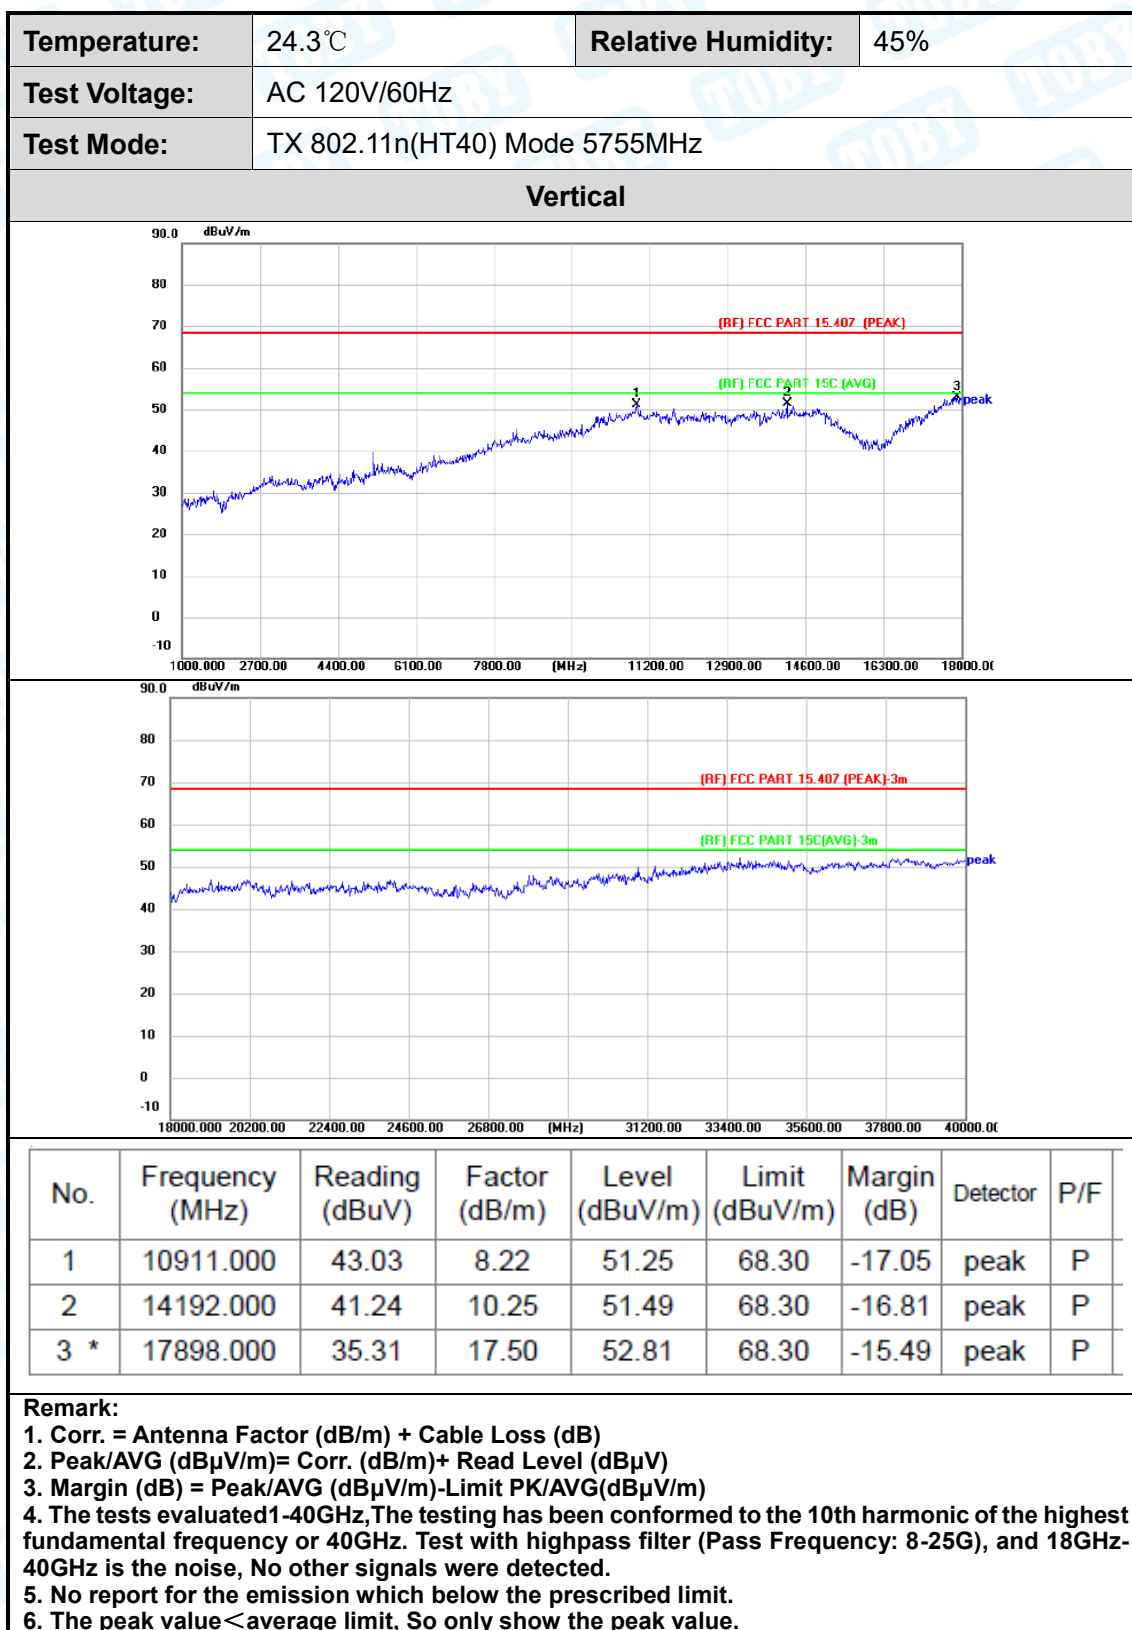


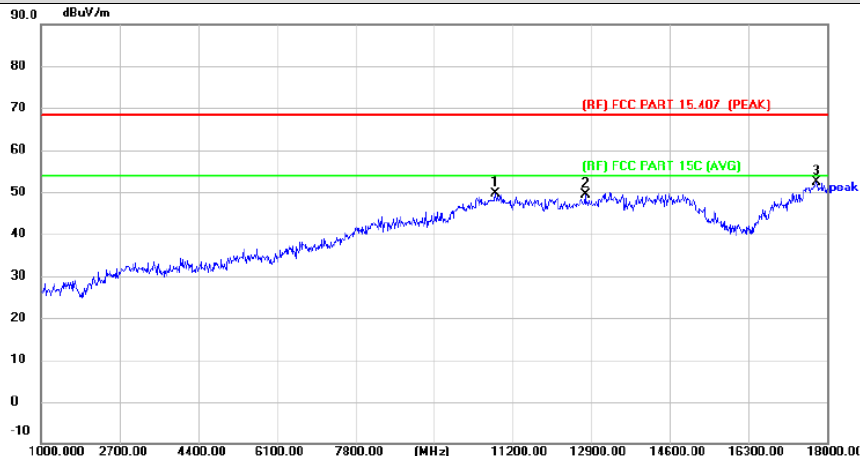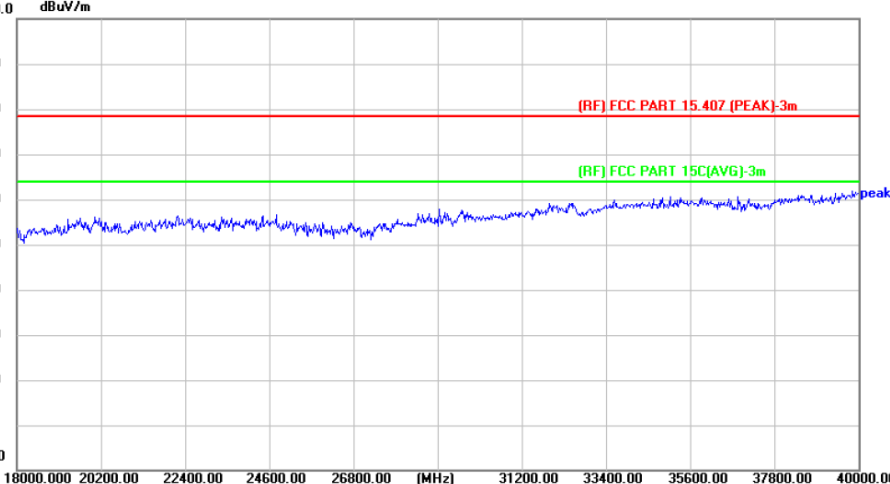
Temperature:	24.3℃	Relative Humidity:	45%					
Test Voltage:	AC 120V/60Hz							
Test Mode:	TX 802.11n(HT40) Mode 5795MHz							
Horizontal								
								
								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10826.000	41.70	7.88	49.58	68.30	-18.72	peak	P
2	12764.000	39.94	9.46	49.40	68.30	-18.90	peak	P
3 *	17762.000	35.93	16.41	52.34	68.30	-15.96	peak	P
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected. 5. No report for the emission which below the prescribed limit. 6. The peak value<average limit, So only show the peak value.								




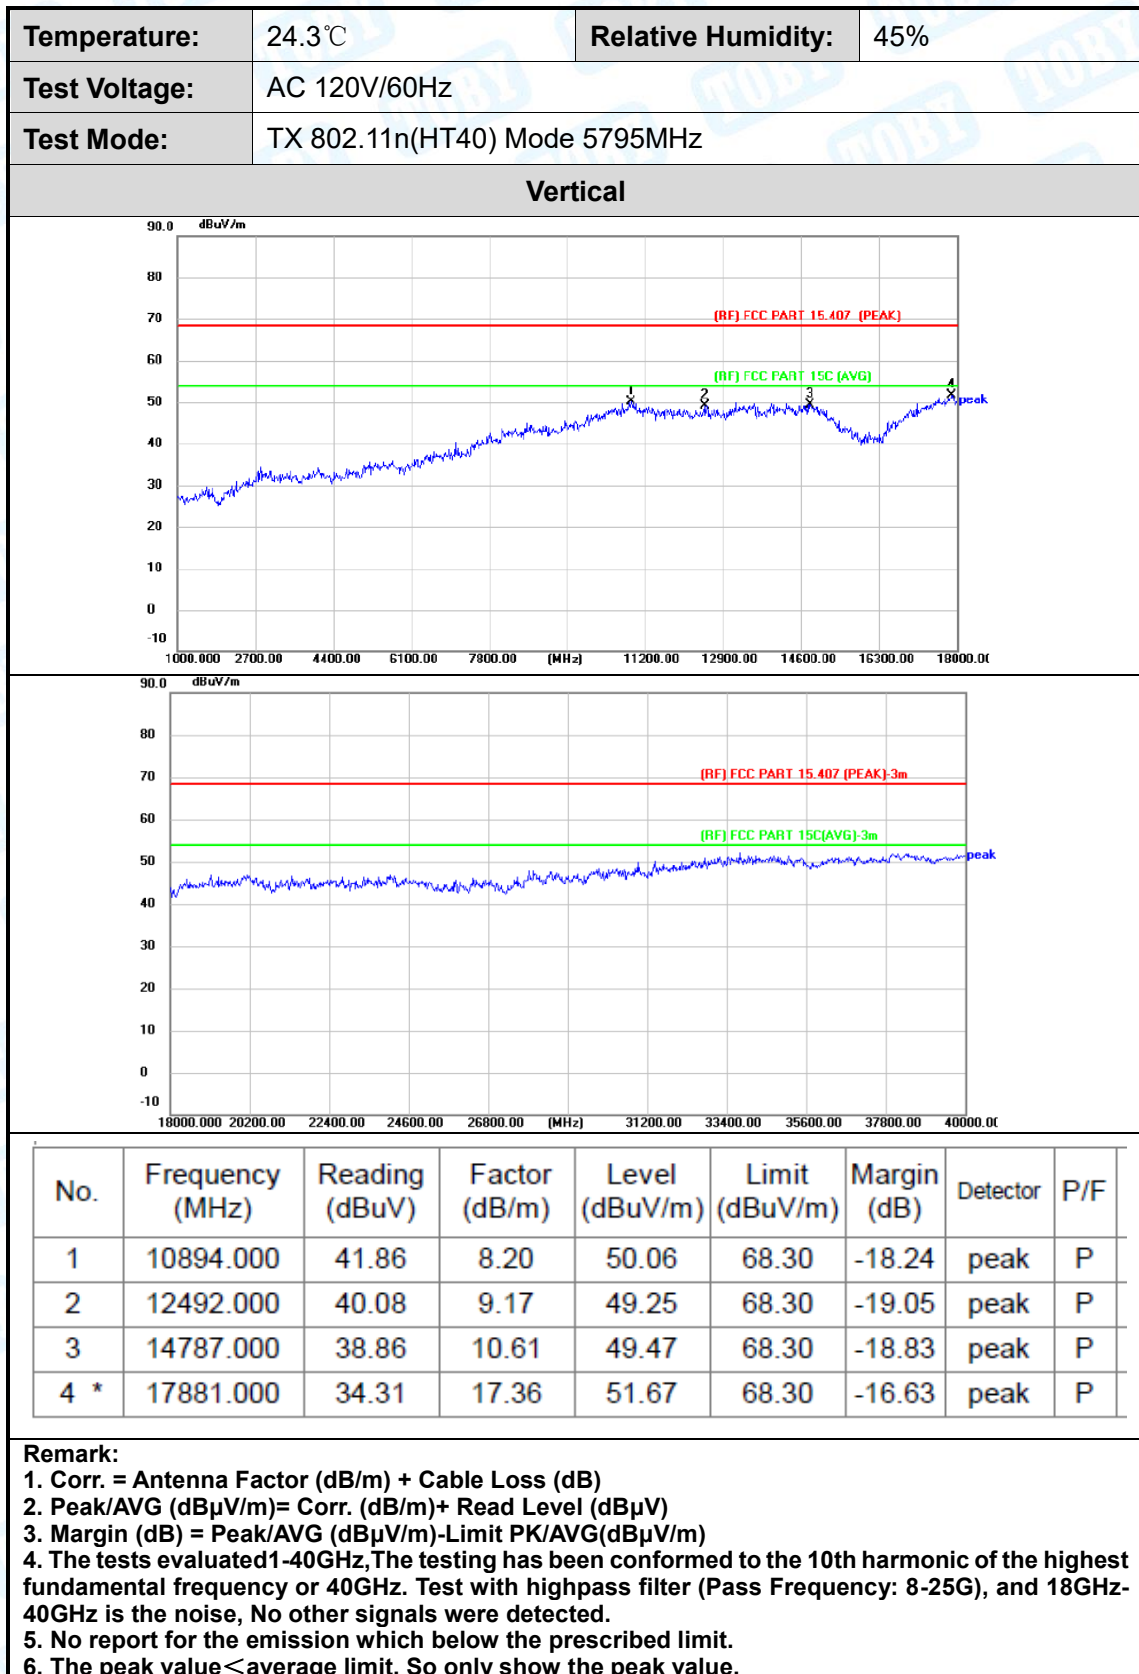


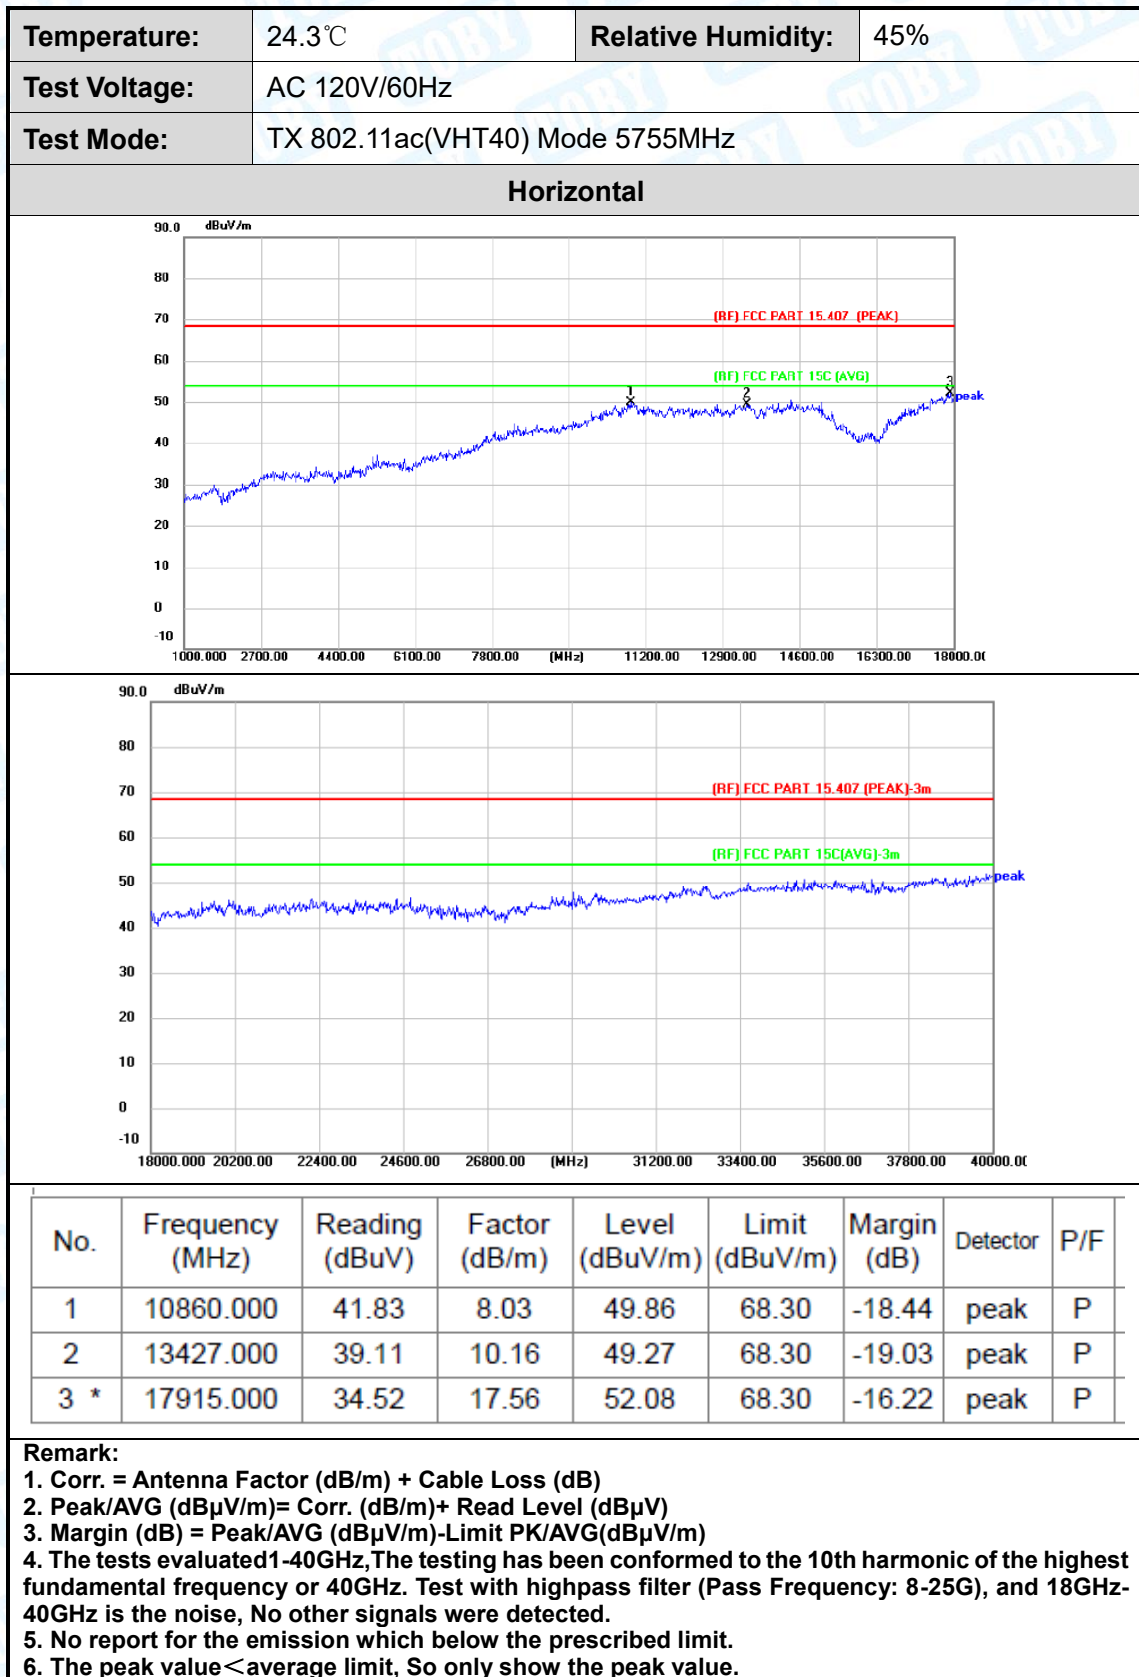


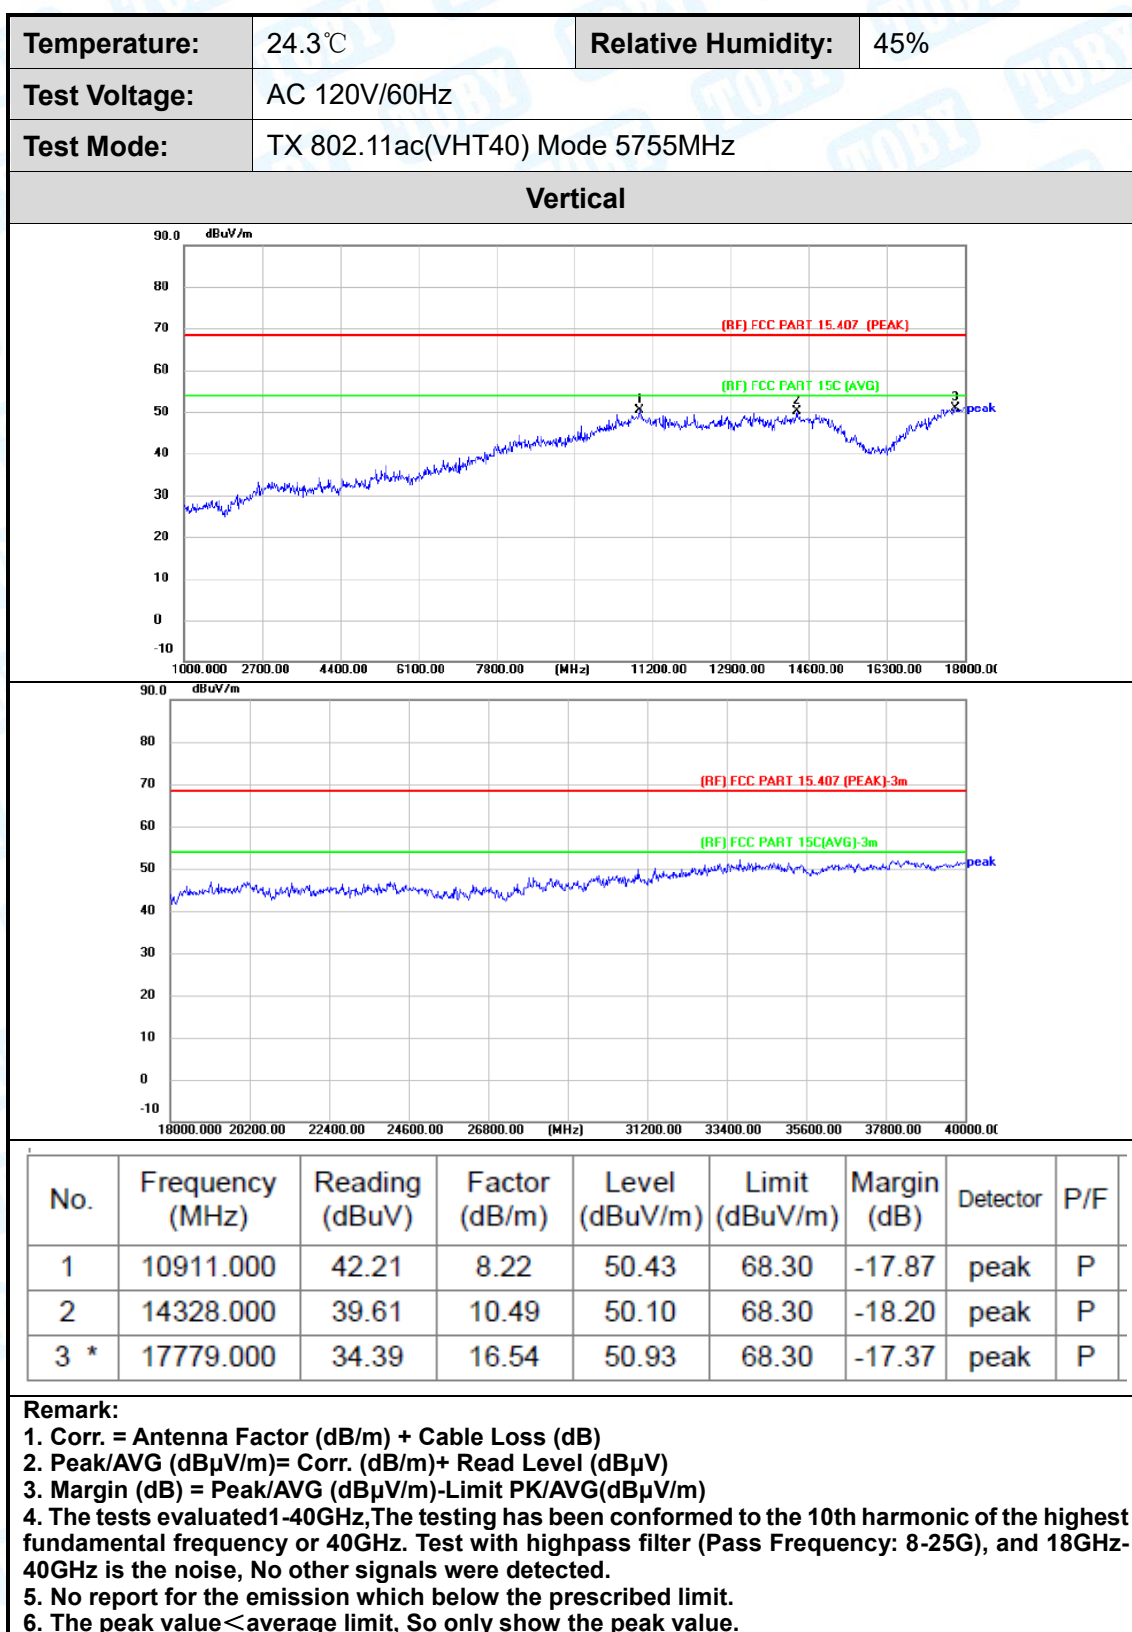


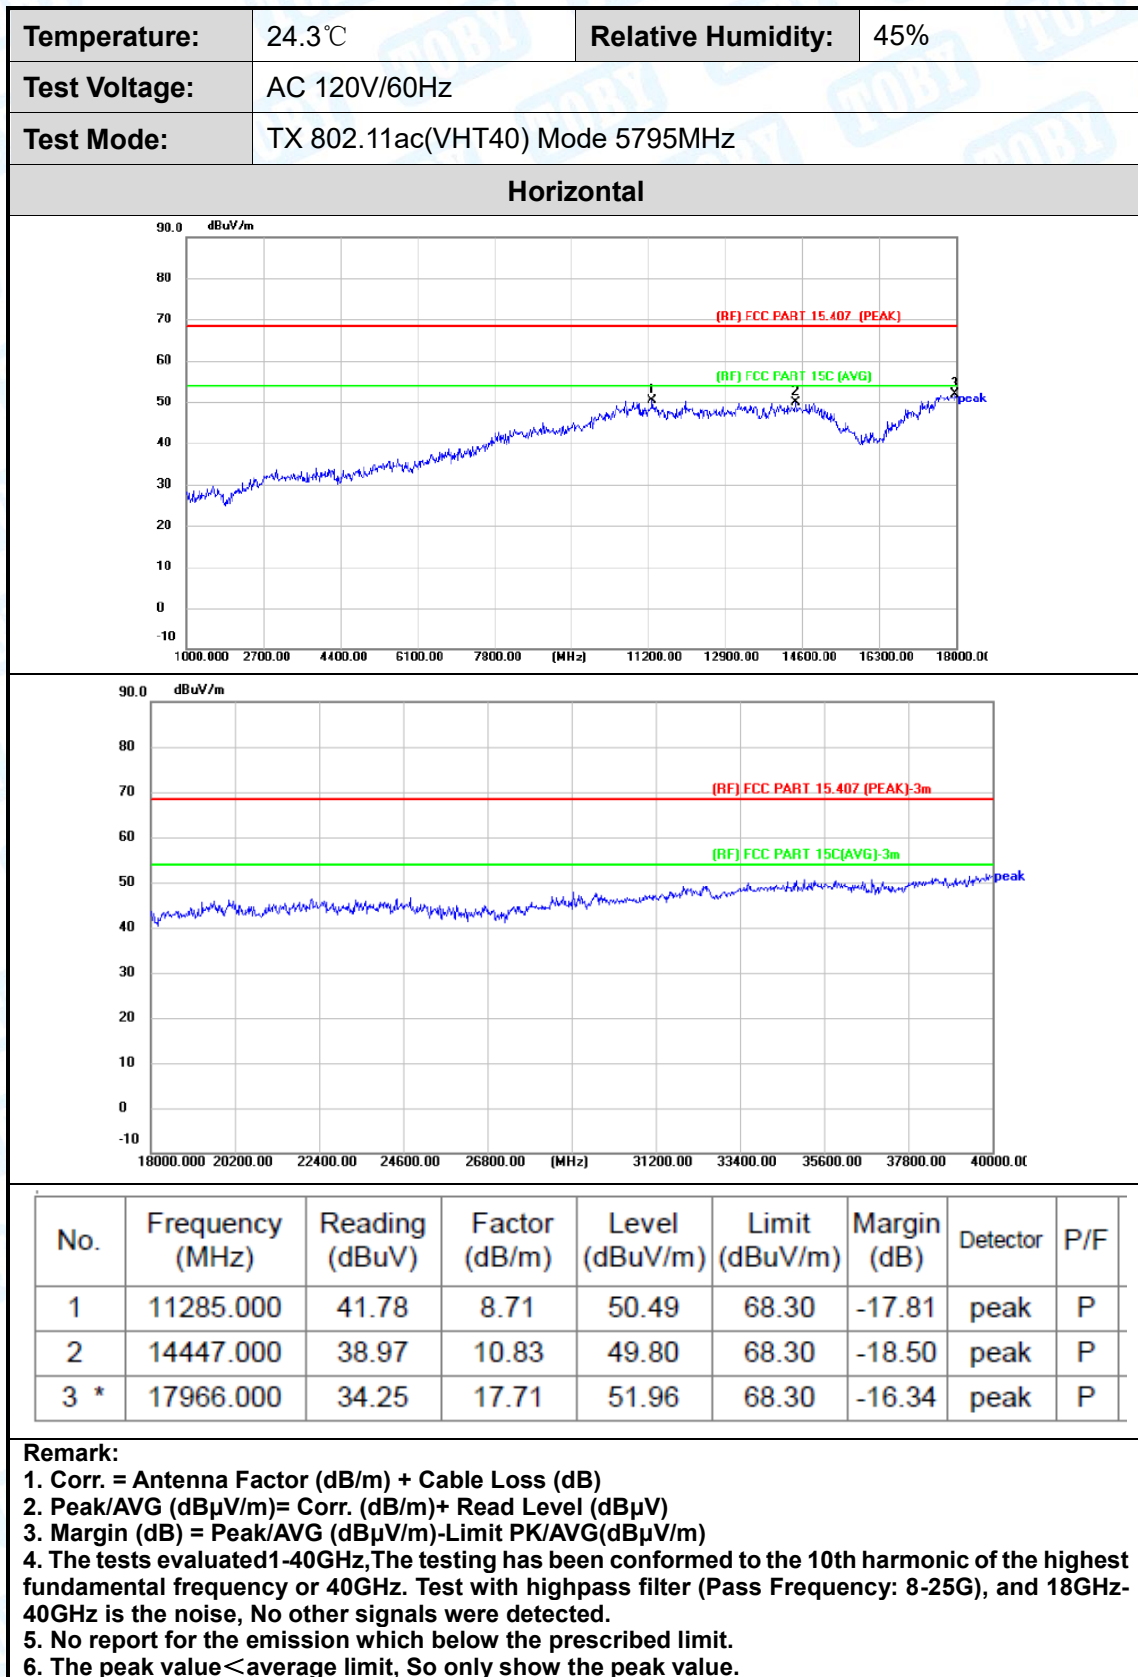


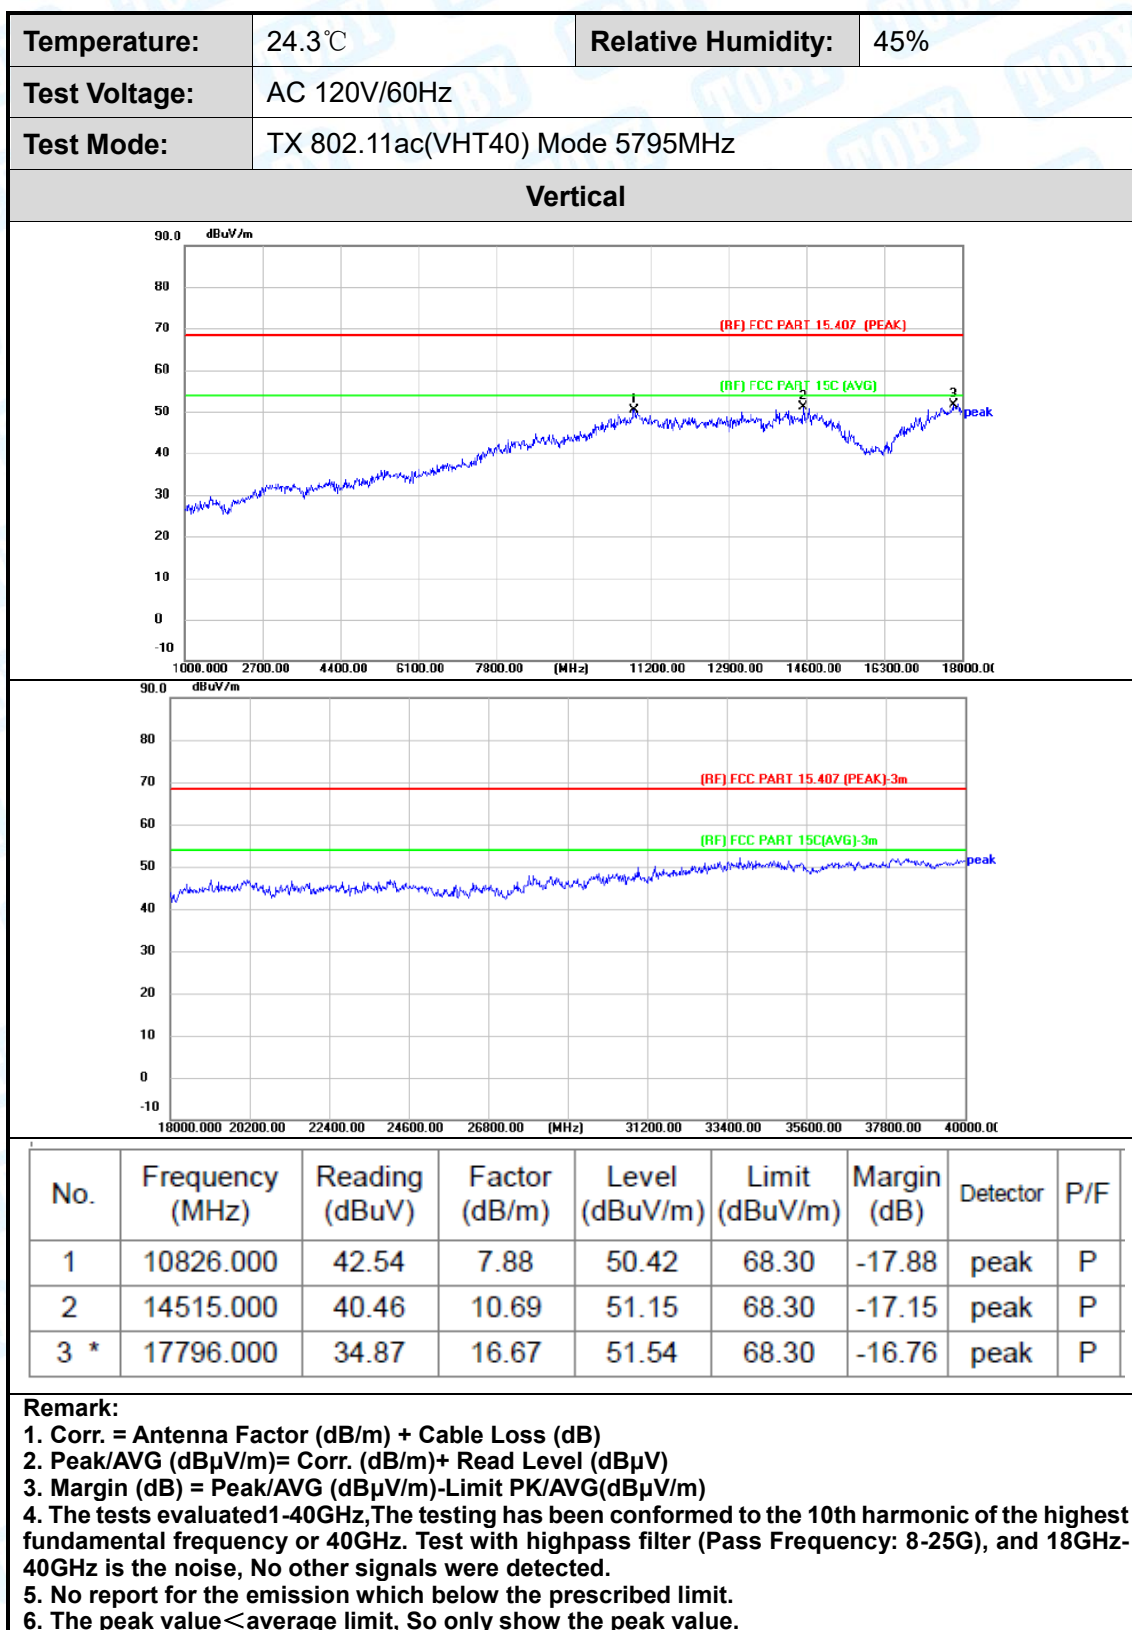


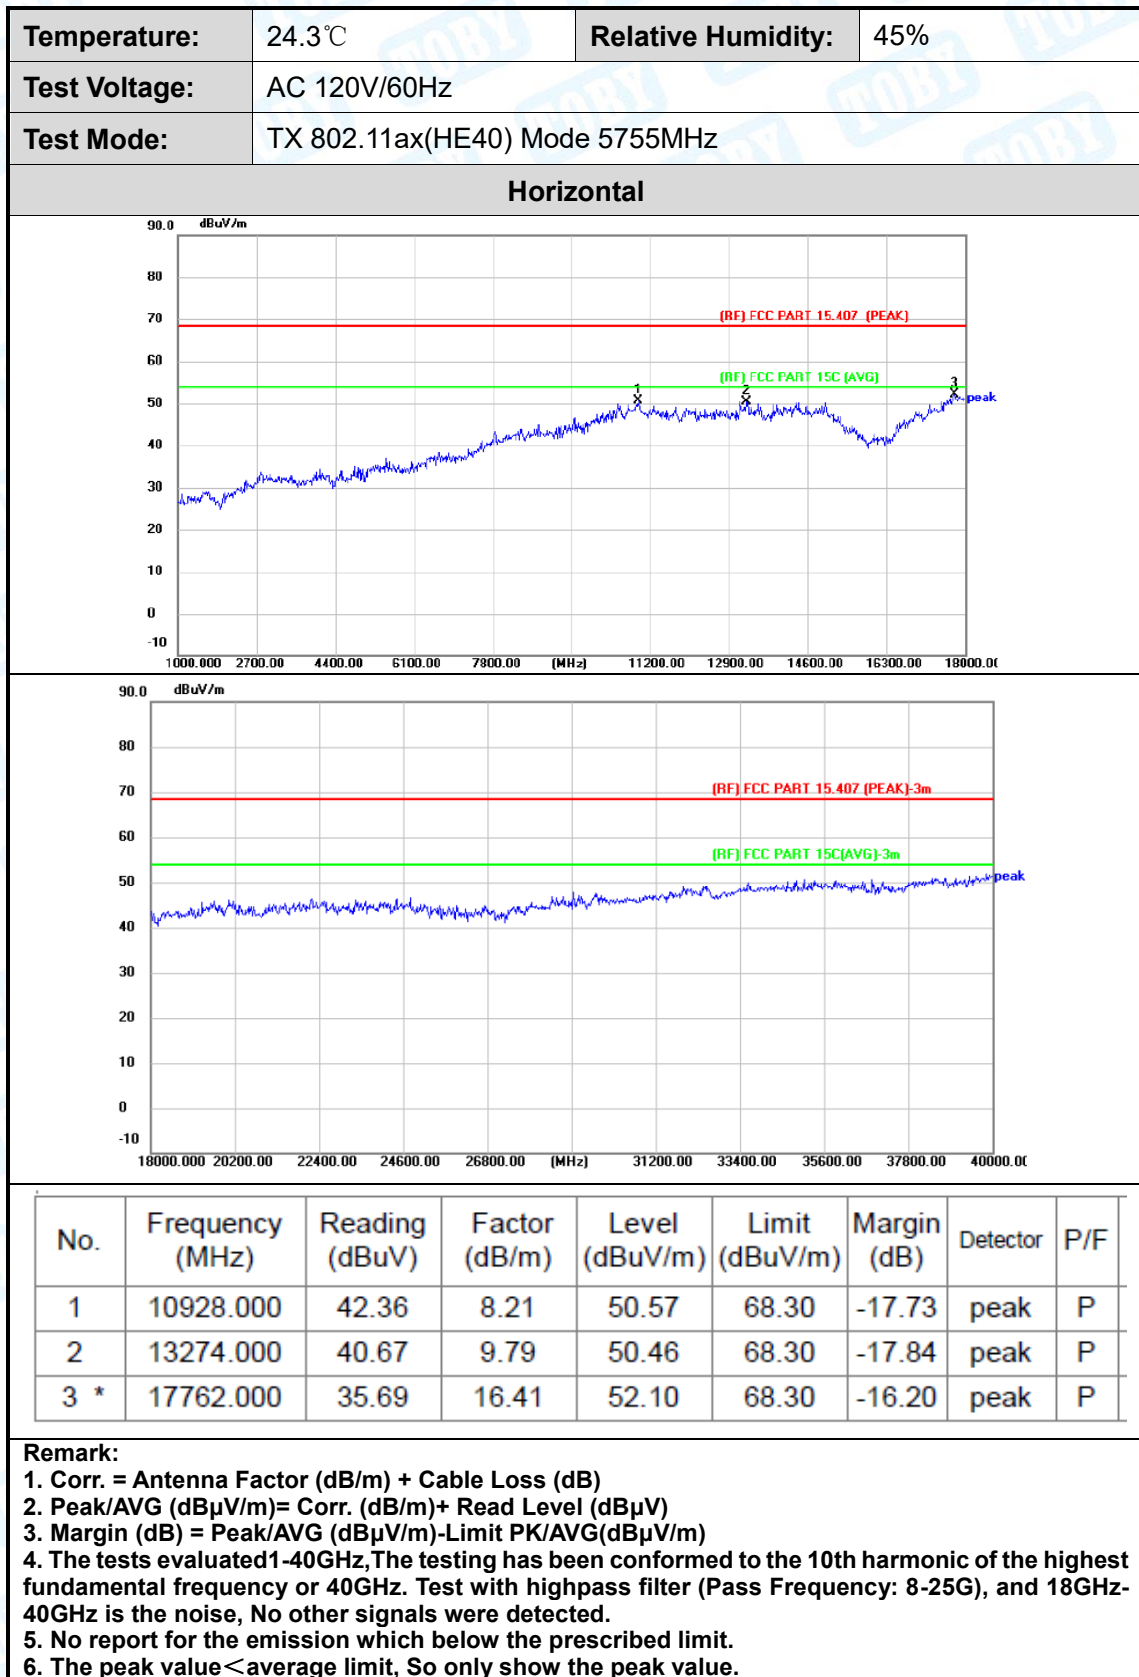

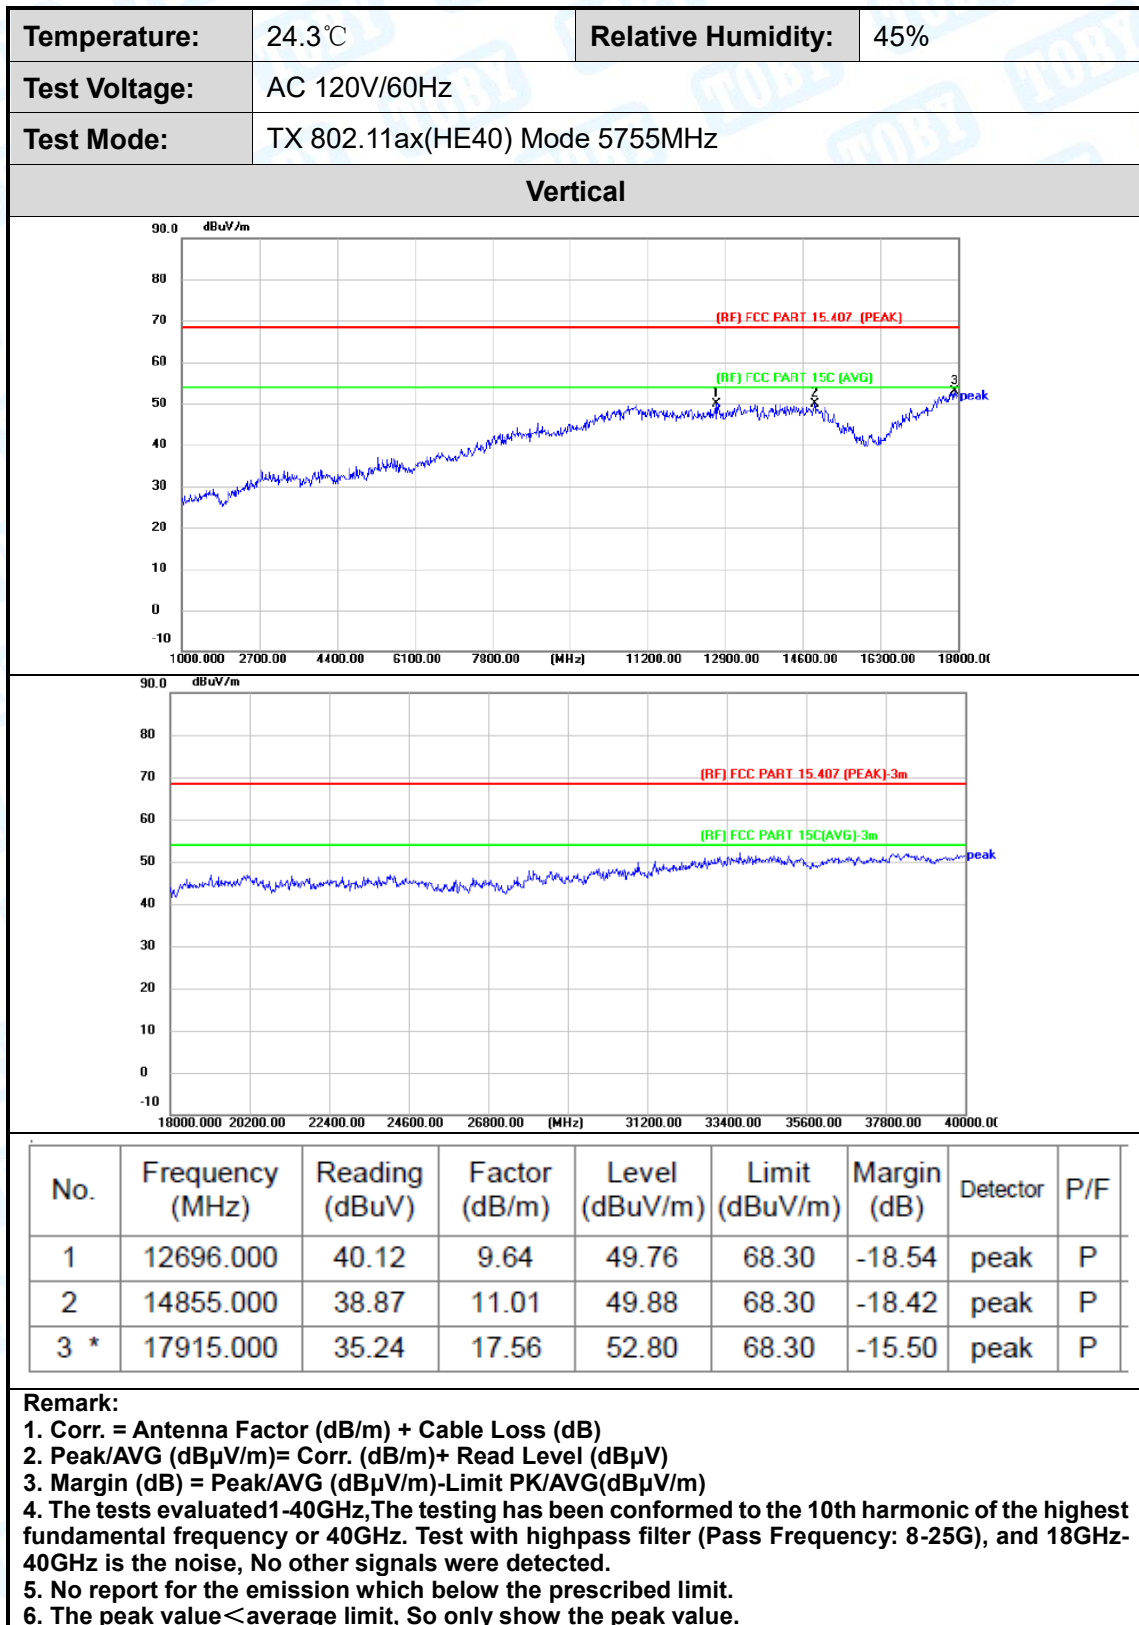

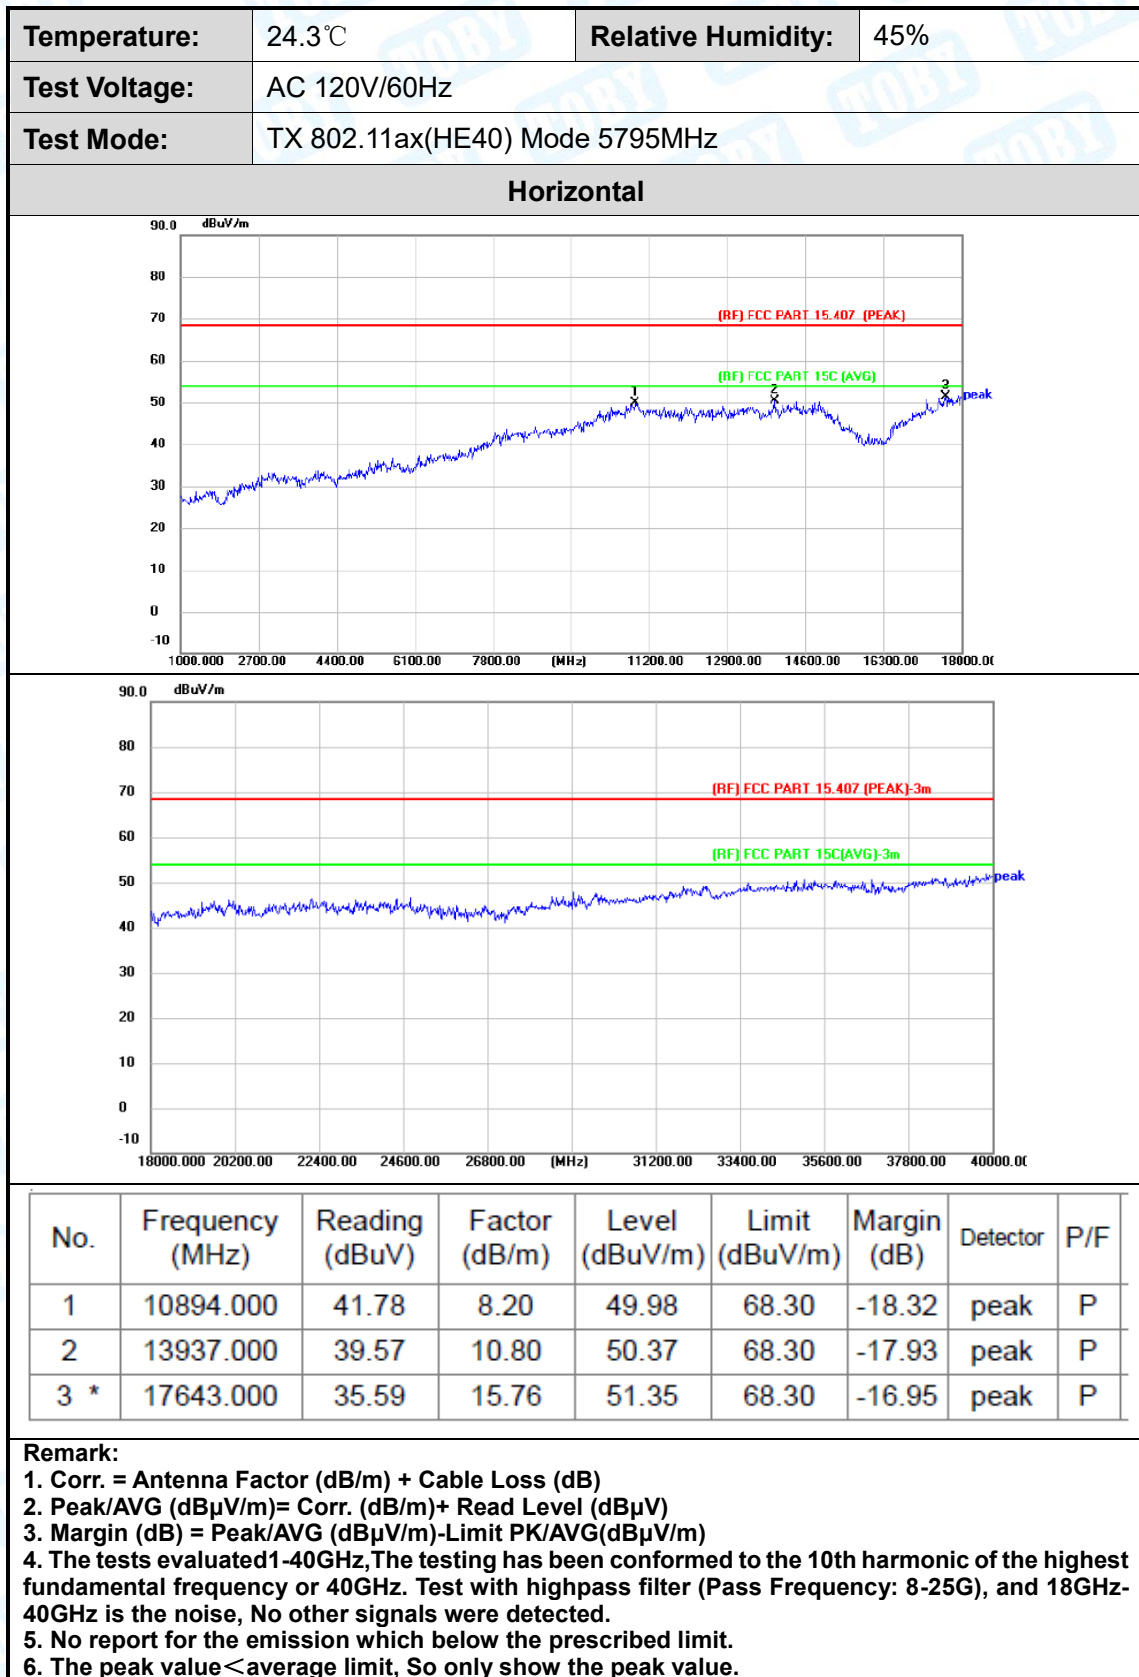

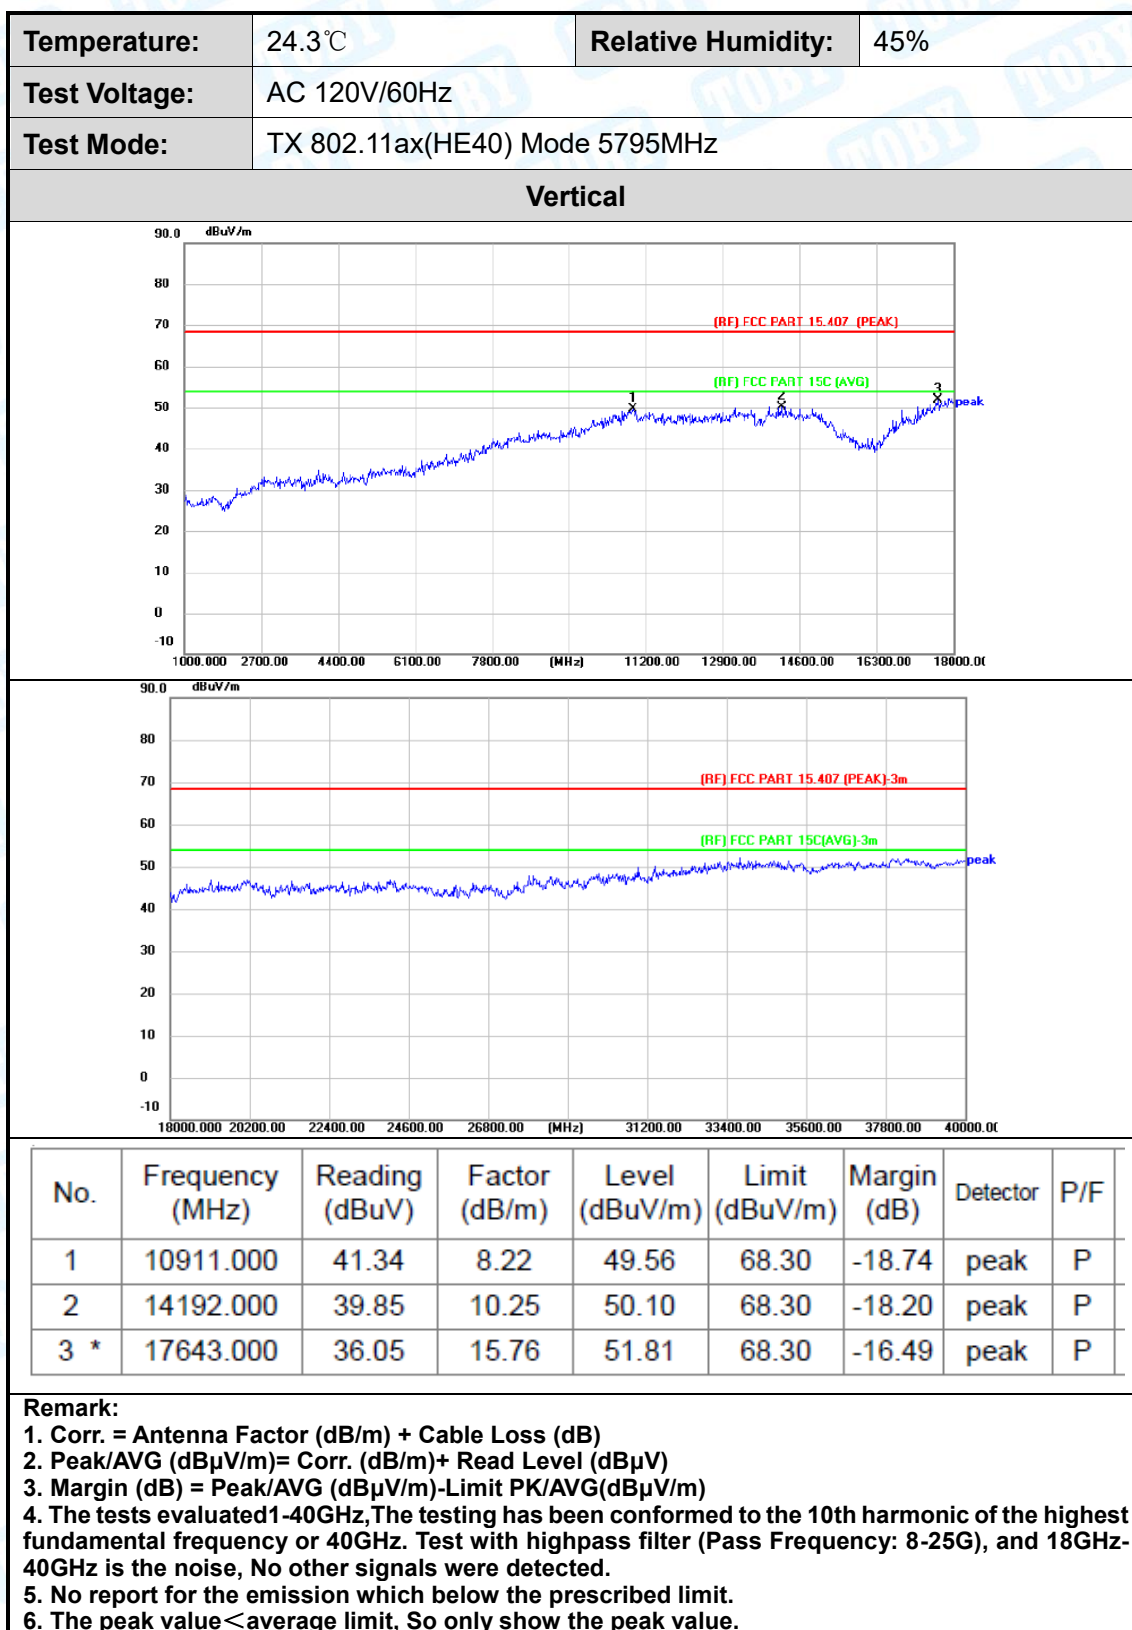

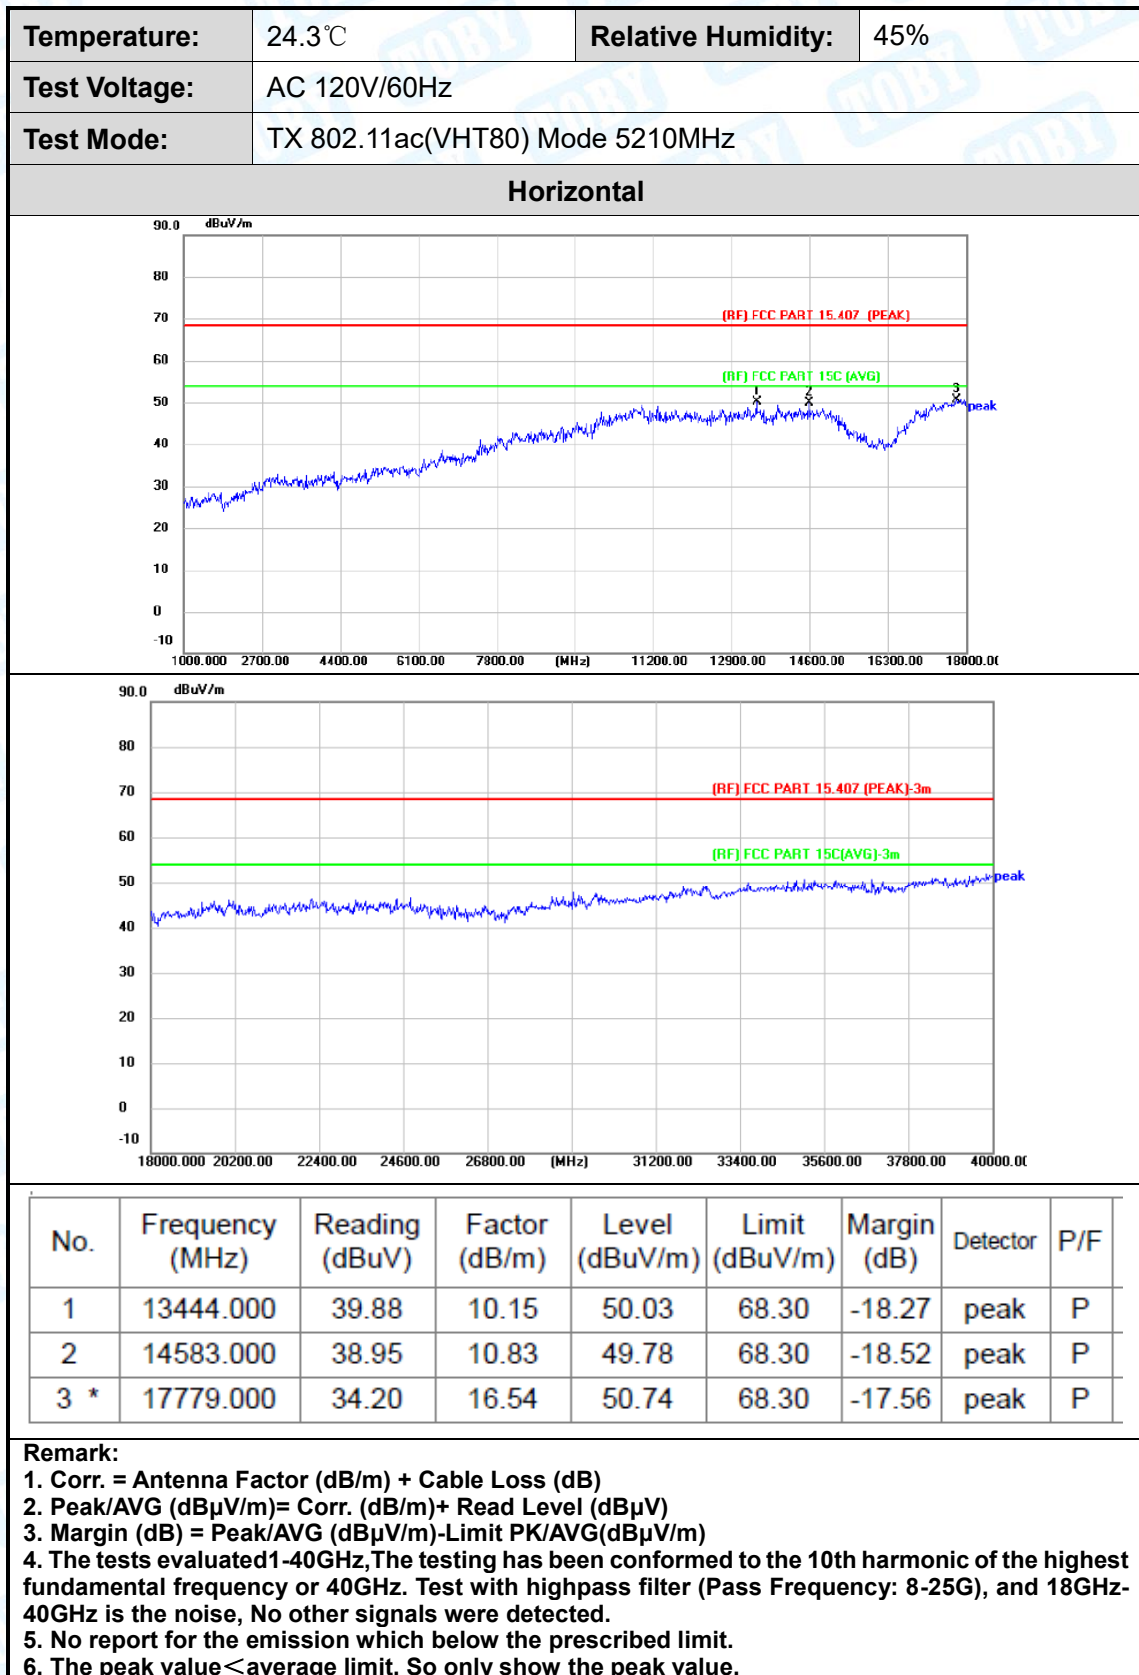

Temperature:	24.3℃	Relative Humidity:	45%					
Test Voltage:	AC 120V/60Hz							
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz							
Vertical								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10979.000	42.42	8.18	50.60	68.30	-17.70	peak	P
2	14107.000	39.77	10.16	49.93	68.30	-18.37	peak	P
3 *	17915.000	34.89	17.56	52.45	68.30	-15.85	peak	P
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected. 5. No report for the emission which below the prescribed limit. 6. The peak value<average limit, So only show the peak value.								



