

承认书

SPECIFICATION FOR APPROVAL

客户名称 (CUSTOMER): 好斯美科技有限公司
ShenZhen Hasmine Technology Co., Ltd

客户料号 (CUSTOMER P/N): A.02.026.0056

品名 (DESCRIPTION): P601 Coil

规格 (SPECIFICATION): nanocrystalline coil/41.5/0.3mm/add 20*0.8 magnetic sheet

Outgoing line length:30.5+2/-1MM /Sensitivity 8.1UH±5%

日期 (DATE): 2025-10-10

备注:



ShenZhen Hasmine Technology Co., Ltd Acknowledgement, signature, verification, and seal

Department	confirm/date	check/date	approve/date	(official seal)
engineer				
purchase				
QC				

Note:

深圳市鸿日昇威科技有限公司

HRSW ELECTRONICS CO.,LTD

ADD: 2nd Floor, Building 1, No. 48,

Huanguan Middle Road, Guanlan, Longhua New


District, Shenzhen TEL: 15112254520 /

page 3/1

13682412162

SPECIFICATION FOR APPROVAL

1. 结构图 MECHANICAL DIMENSION (UNIT:mm)

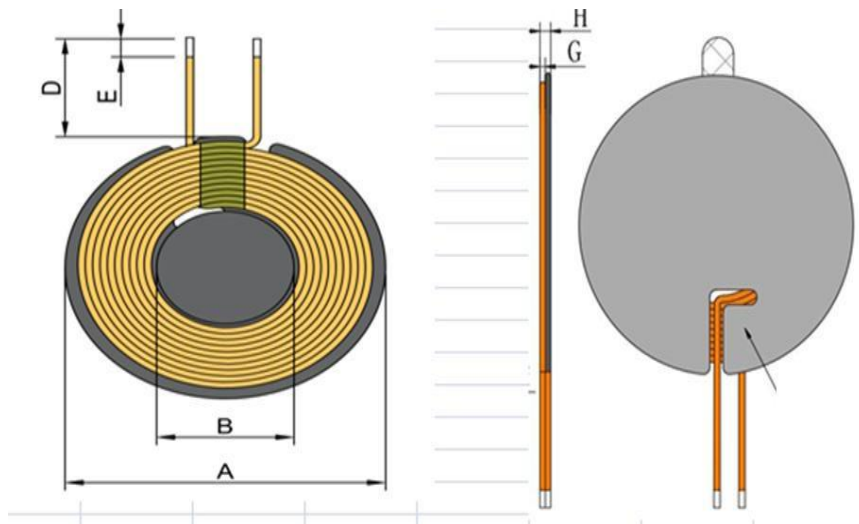


Note:

1. Check add 20*0.8MM Small magnetic sheet
2. Remove the adhesive thickness on the back 1.2MM (Outgoing position1.5MM)
3. gum

A	B	G	D	E	H		
41.5±0.5	21.5±0.5	0.3±0.2	30.5+2/-1	2MM-4MM	1.25MAX		

2. 原理图 SCHEMATICS:



START WINDING

3. WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	wrie 0.08*65 2UEW	11TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	magnetic sheet	DCR		Operating Tem.	HI-POT
TEST	Coil and	S-F		Normal Tem.	
COND	100KHz, 0. 25V	AT 25℃		Normal Tem.	
SPEC	8. 1uH±5%	70mΩ Max		0-80℃	

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	Wrie 0.08*65S	Wrie 0.08*65S	NANJINGJINNINGCO,LTD	
2	Lead-free solder bar	Lead-free solder bar	QIAODO	
3	magnetic sheet	41.5*0..3 nanocrystalline coil	TAIYI CO.,LTD	
4	mucilage	3M adhesive	LIANCHENG CO.,LTD	
5	High temperature adhesive tape	3mmHigh temperature adhesive tape	CUDAK CO.,LTD	
6	3M adhesive	40*0.05	CUDAK CO.,LTD	
7				

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	
DRAWN BY		CHECKED BY	APPROVED BY
何伟华		韦立红	韦立红