

承认书

SPECIFICATION FOR APPROVAL

客户名称 (CUSTOMER) : ZLGD

客户料号 (PART NO.) : ZLGD A1-0572

品 名 (DESCRIPTION) : 线圈+磁片

规格 (SPECIFICATION) : 0.08*105P丝包线, $\varnothing 38.0 \times 11$, 电感量6.5uH, 隔磁片
 $\varnothing 43 \times 0.8$ (开线槽) 磁边起15MM

日 期 (DATE) : 20251106

本司确认 (TRX APPROVAL)		
制作	审核	承认日期
潘锡明	邱志辉	20251106
客户确认 (CUSTOMER APPROVAL)		
工程	批准	承认日期
确认结果 (Result): ☐ 合格 ☐ 不合格 ☐ 其它		

东莞市德弗力五金电子材料有限公司

Dongguan city DFL Electronic Technology Co.,LTD

No. 107, Xinfeng West Road, Shijie Town, Dongguan City

电话: 0769-86016320

传真: 0769-86372427


东莞市德弗力五金电子材料有限公司

Dongguan city DFL Electronic Technology Co.,LTD

SPECIFICATION

产品型号: DESC	ZLGD0-11*38.0 -15-FR	版本 Rev:A	Customer:	ZLGD
			Description:	线圈+磁片
			Date:	20251106

一、尺寸DIMENSION: (mm)

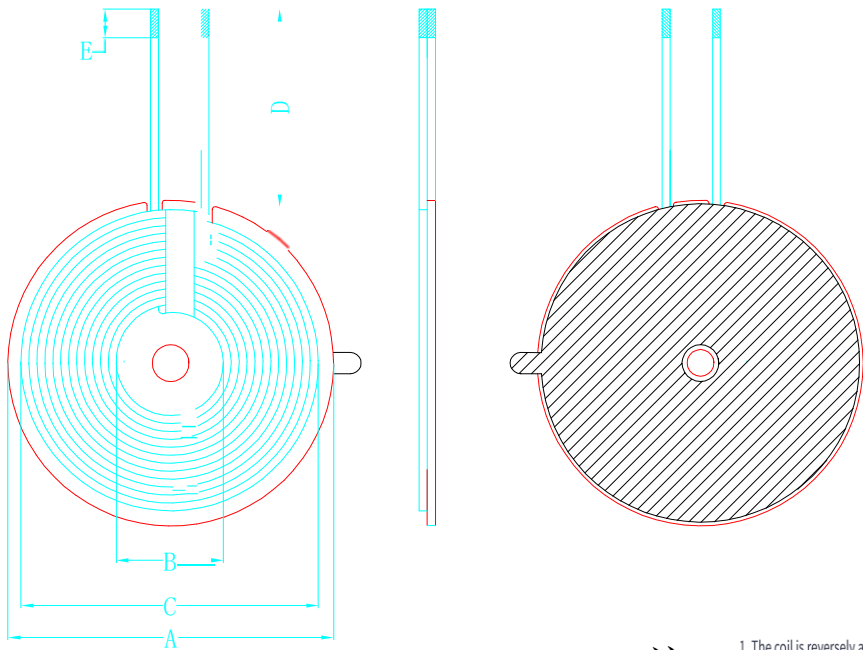

A	43.2- 1.0
B	11.0±1.0
C	38.0 +2.0
D	11.0 +3.0
E	3.5±1.5
F	
G	
H	
I	
J	
K	
L	

- 注:
1. The coil is reversely attached with hard magnetic materials, and the magnetic sheet has holes with double grooves
The coil is centered
 2. The back of the magnetic sheet is attached with white double-sided adhesive tape for ears
 3. Wrap 5mm high-temperature tape around the coil lead-out position
 4. The coil must not be loose

二、原理图 (schematic diagram:)
三、绕线参数(WindingSpecification:)

序号 NO.	端子 TERMINAL	线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1		0.08X105PSilk thread	13TS	逆时针

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10 ° C,湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.		6.5UH ±0.3	100KHZ/1.0V	SHDA 1062
2	IND.				
3	Q值				
4	DCR				

拟制/日期PREPARED BY/DATE	审核/日期CHECKED BY/DATE	客户/日期CUSTOMEU/DATE