


Above 1GHz Test Results

All the test modes completed for test. Only the worst result was reported as below:

For 1GHz to 18GHz

Antenna polarity: Horizontal

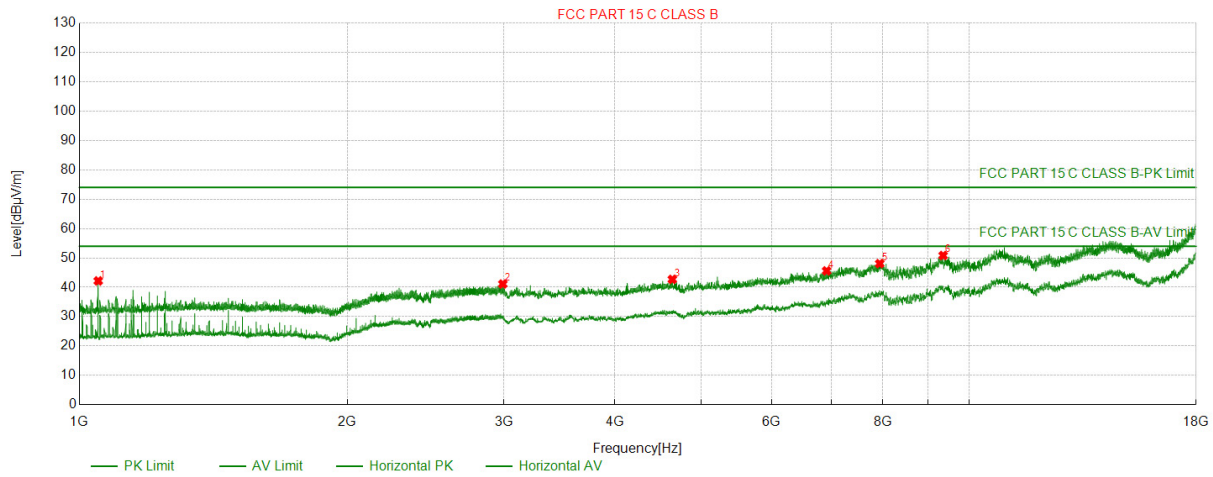


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1050.005	62.26	42.18	-20.08	74.00	31.82	150	164	Horizontal
2	2991.999	53.80	41.13	-12.67	74.00	32.87	150	359	Horizontal
3	4639.664	52.63	42.71	-9.92	74.00	31.29	150	245	Horizontal
4	6916.892	50.71	45.59	-5.12	74.00	28.41	150	1	Horizontal
5	7935.494	50.60	48.07	-2.53	74.00	25.93	150	270	Horizontal
6	9351.635	51.63	50.82	-0.81	74.00	23.18	150	86	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;
Margin = Limit – Level

Antenna polarity: Vertical

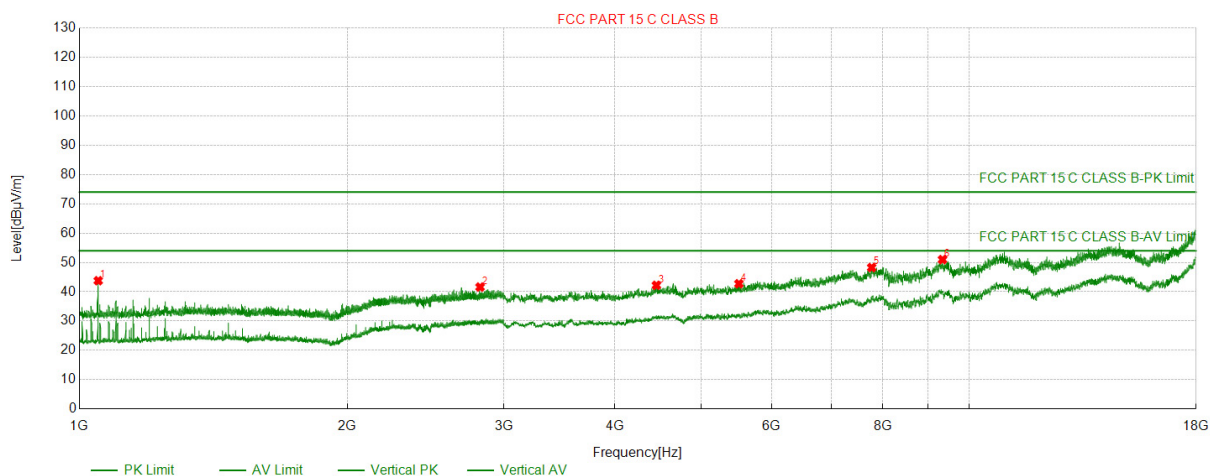


Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1050.005	63.86	43.78	-20.08	74.00	30.22	150	219	Vertical
2	2820.782	54.89	41.61	-13.28	74.00	32.39	150	285	Vertical
3	4452.145	52.81	42.20	-10.61	74.00	31.80	150	100	Vertical
4	5512.751	51.76	42.74	-9.02	74.00	31.26	150	358	Vertical
5	7773.477	51.32	48.26	-3.06	74.00	25.74	150	148	Vertical
6	9336.634	51.76	50.98	-0.78	74.00	23.02	150	336	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

For 18GHz to 26GHz


Antenna polarity: Horizontal

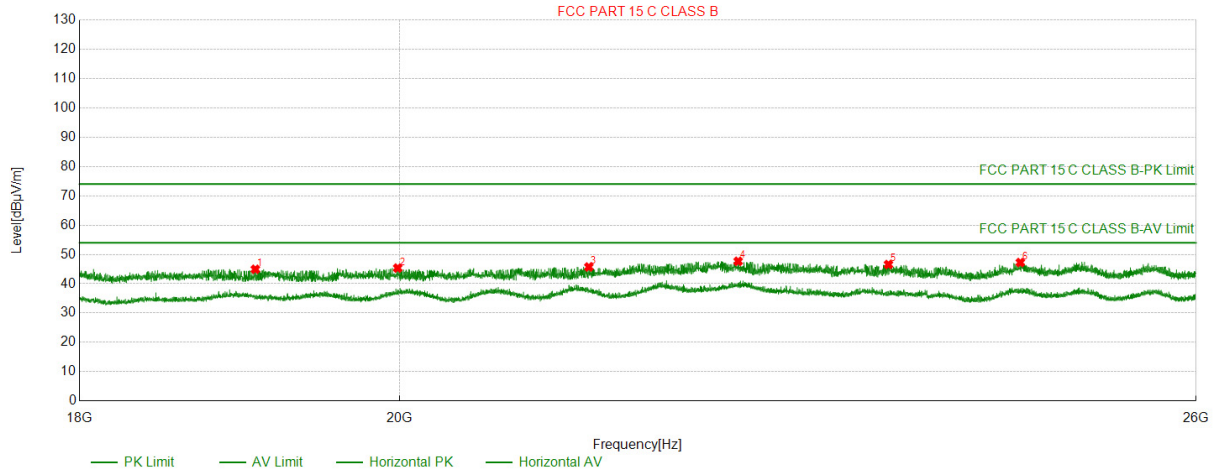

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	19073.707	39.17	44.94	5.77	74.00	29.06	150	340	Horizontal
2	19988.999	39.15	45.36	6.21	74.00	28.64	150	260	Horizontal
3	21287.529	40.45	45.73	5.28	74.00	28.27	150	140	Horizontal
4	22360.436	41.97	47.67	5.70	74.00	26.33	150	60	Horizontal
5	23494.949	40.90	46.58	5.68	74.00	27.42	150	100	Horizontal
6	24537.454	41.48	47.25	5.77	74.00	26.75	150	60	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

Antenna polarity: Vertical

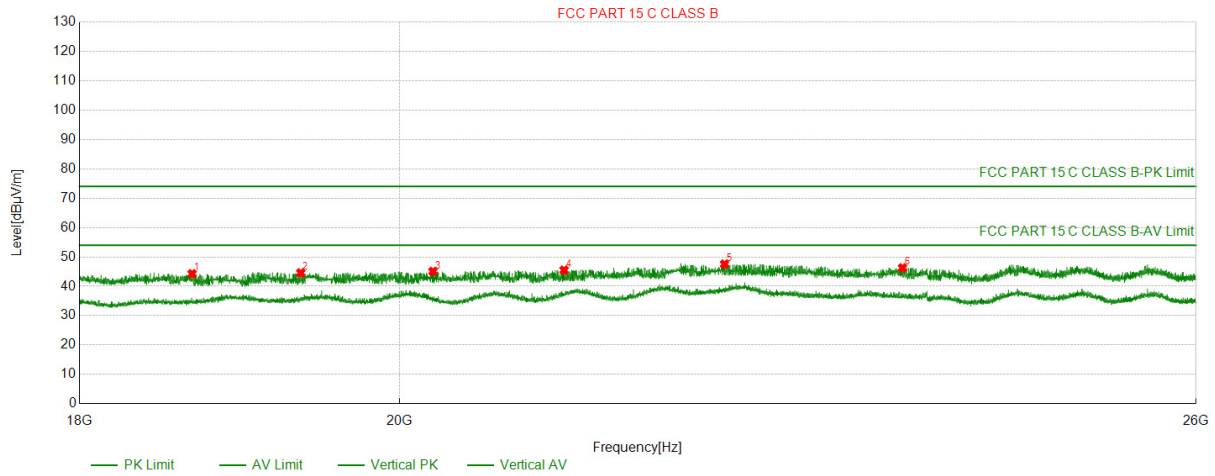

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18680.868	38.82	44.28	5.46	74.00	29.72	150	320	Vertical
2	19360.936	38.53	44.56	6.03	74.00	29.44	150	270	Vertical
3	20222.622	39.02	45.08	6.06	74.00	28.92	150	210	Vertical
4	21114.711	40.20	45.51	5.31	74.00	28.49	150	20	Vertical
5	22260.426	41.82	47.56	5.74	74.00	26.44	150	240	Vertical
6	23603.760	40.67	46.28	5.61	74.00	27.72	150	320	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

4.7 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is a FPC Antenna, need professional installation, not easy to remove. It conforms to the standard requirements. The directional gains of antenna used for transmitting is 2.54dBi.

WIFI ANTENNA

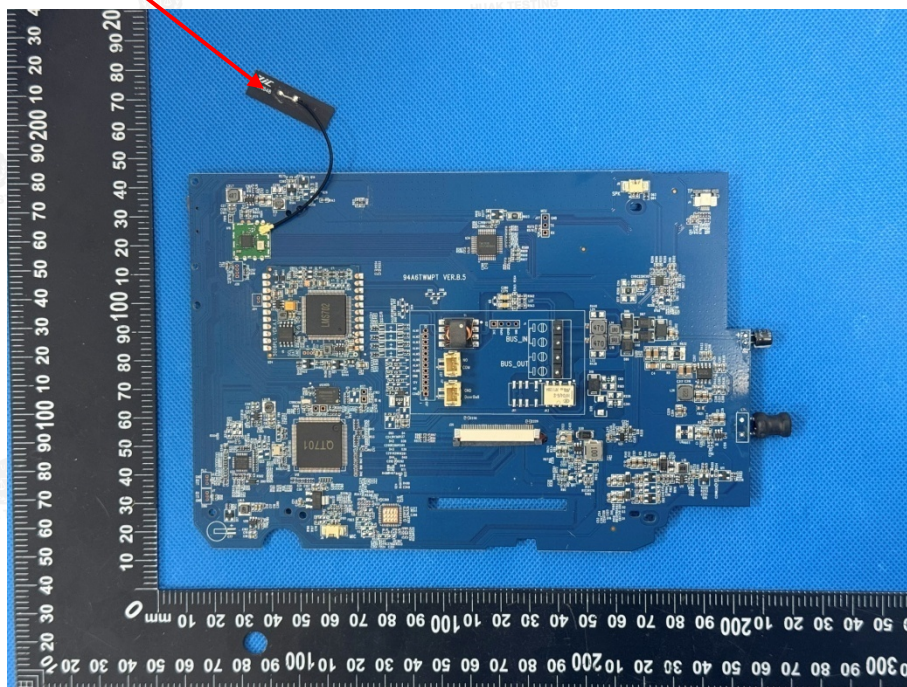




HUAKE TESTING

5. Test Setup Photos of the EUT

Radiated Emission

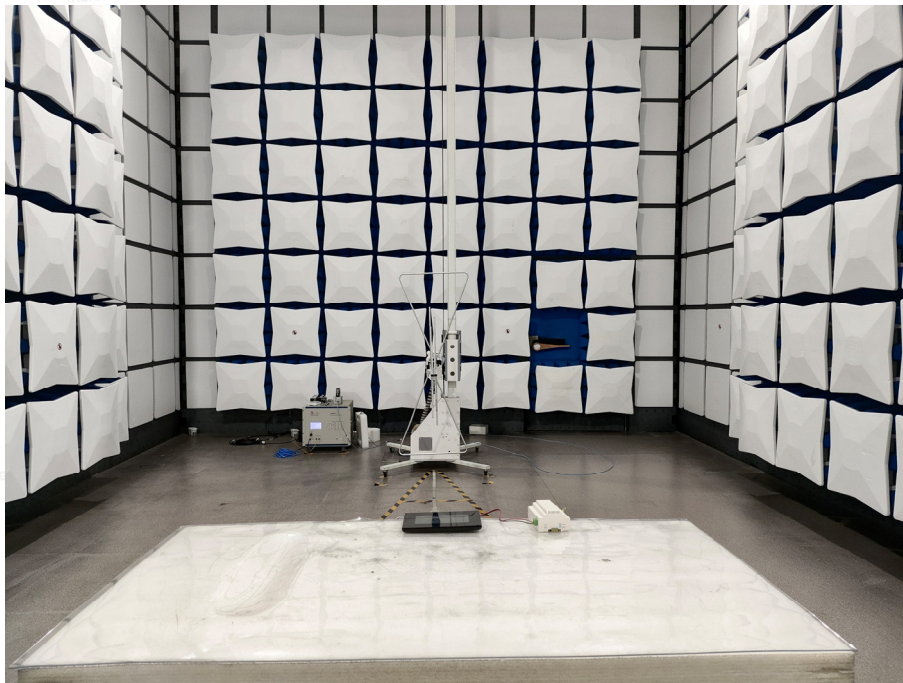


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

AC Conducted Emission



RF Conducted Emission

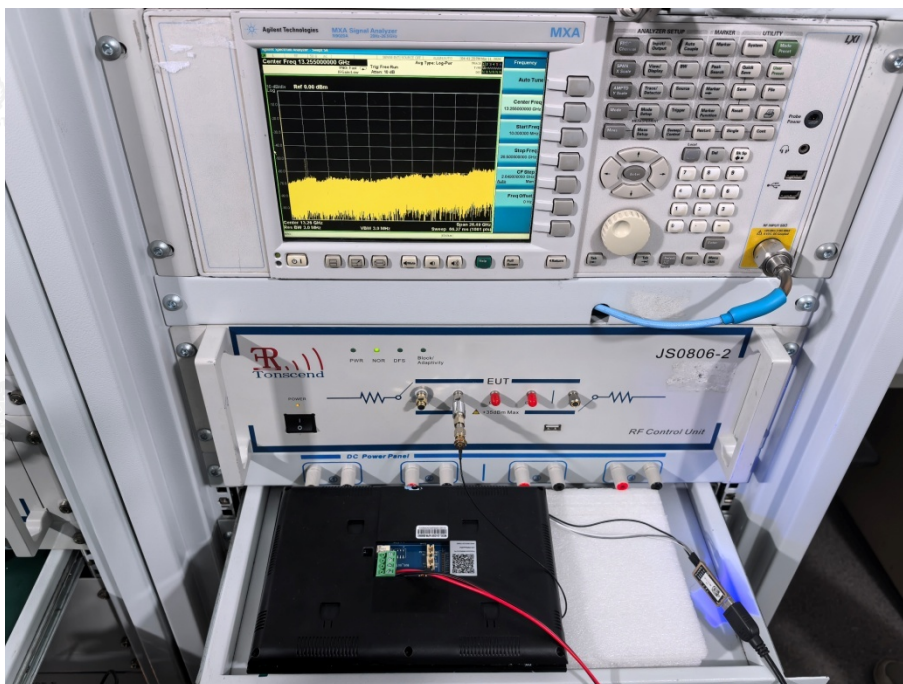



HUAKE TESTING

Page 52 of 52

Report No.: HK2604240454-E

6. Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China