


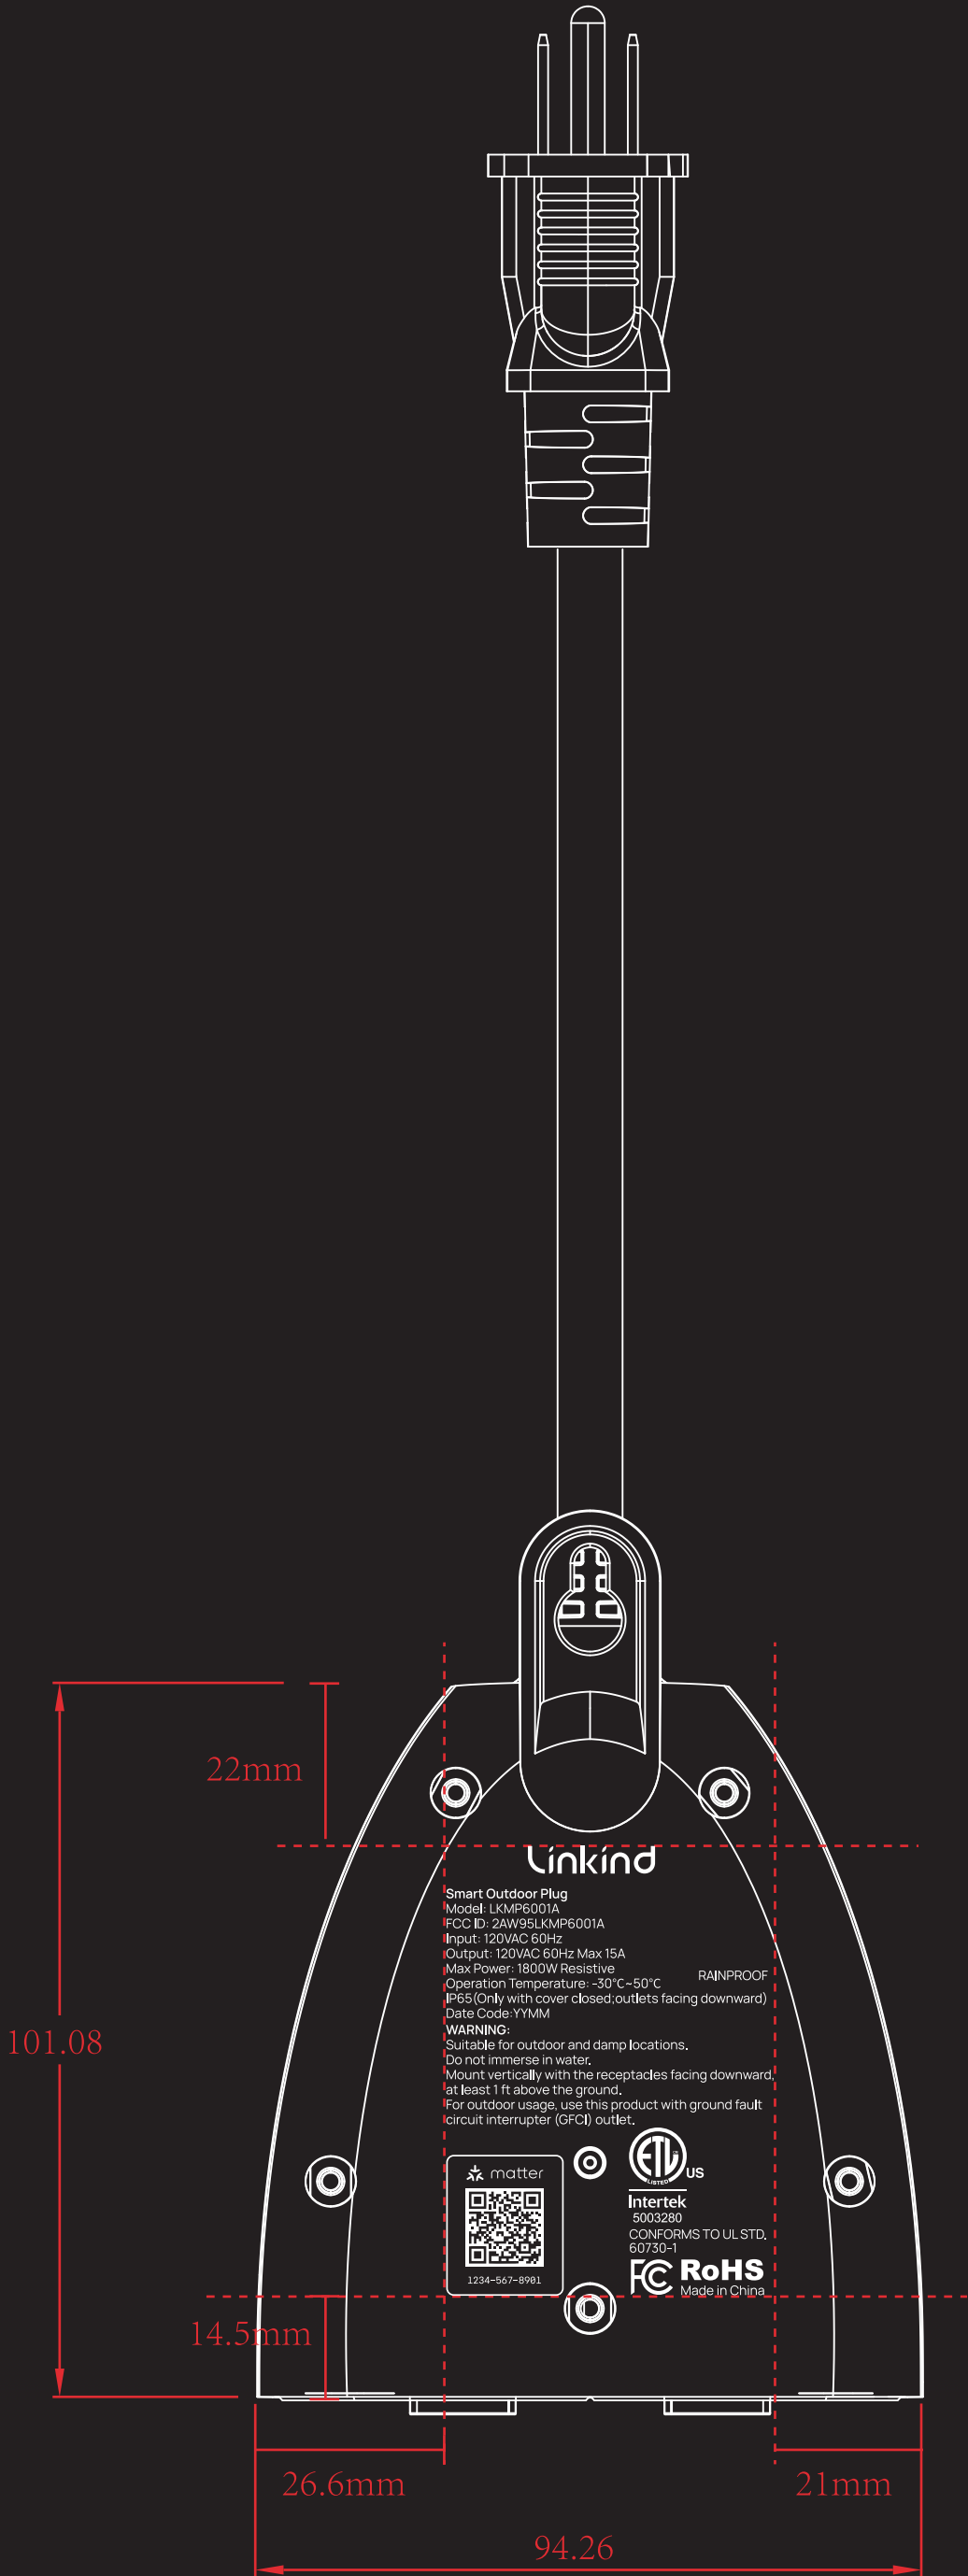

内容

Linkind

Smart Outdoor Plug

Model: LKMP6001A

FCC ID: 2AW95LKMP6001A

Input: 120VAC 60Hz

Output: 120VAC 60Hz Max 15A

Max Power: 1800W Resistive

Operation Temperature: -30°C~50°C

IP65 (Only with cover closed; outlets facing downward)

Date Code: YYMM

WARNING:

Suitable for outdoor and damp locations.

Do not immerse in water.

Mount vertically with the receptacles facing downward,

at least 1 ft above the ground.

For outdoor usage, use this product with ground fault

circuit interrupter (GFCI) outlet.

matter

1234-567-8981

ETL

US

Intertek

5003280

CONFORMS TO UL STD.

60730-1

FC

RoHS

Made in China

Intertek

5003280

CONFORMS TO UL STD.

60730-1

FC

RoHS

Made in China

YYMM为生产年月，如2605

QRcode

生成二维码

manualCode

变量参数

二维码宽度等于行数字宽度乘字

字体.CSADigits-Regular 8pt

位数(即图 为4-3-4 (宽度如图))

二维码左进距的距为 3mm

- 备注:
- 二维码生成格式: MT:Base -38编码内容
MT: 为固定值, Base -38编码内容需要通过:Version、Vendor ID、Product ID、Custom Flow、Discovery Capabilities Bitmask、Discriminator、Passcode、Padding、TLV Data、进行加密算出
 - manualCode数字码生成格式: 由11位纯数字组合而成(这串参数是变量, 位数参考XXXX-XXX-XXXX)
数字是由: VidPidPresentFlag、Discriminator、Discriminator、Passcode、校验码(Verhoeff) 加密计算得出。
 - 二维码大小: 10mm*10mm
 - 正文字体是 Manrope3 字体为 5pt YYMM 为批次信息, 按实际生产日期