


Linkind

Smart Pathway Lights LSP5

User Manual

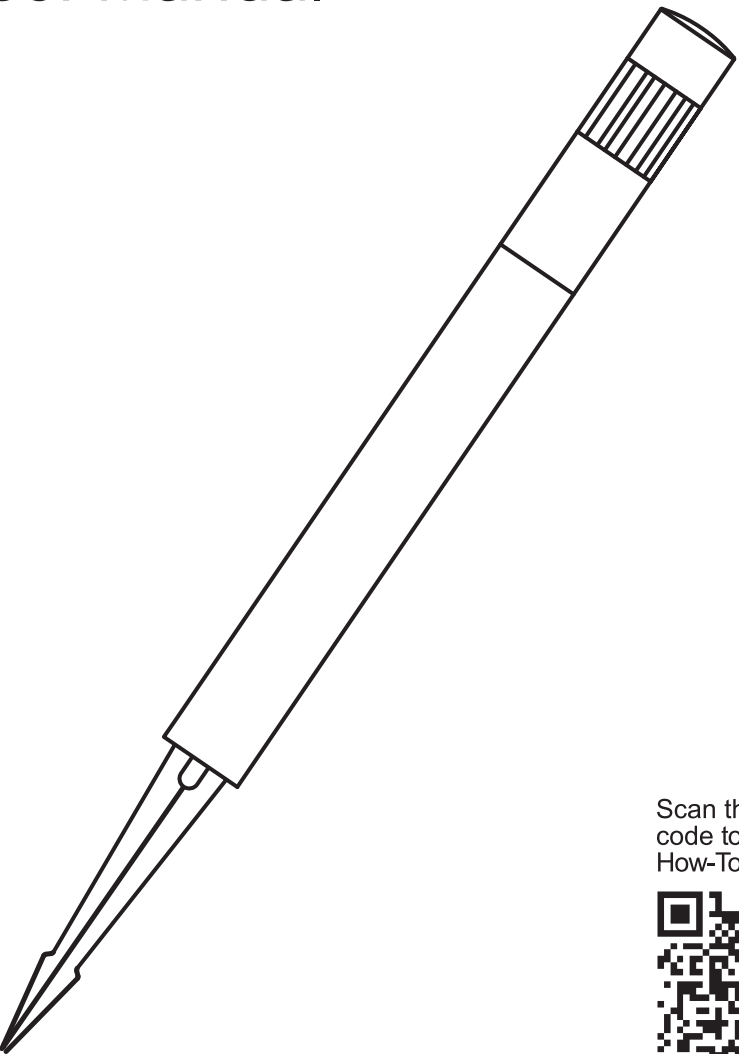

Scan the QR code to watch the How-To videos



Catalogue

READ AND SAVE THESE INSTRUCTIONS1

INTRODUCTION2

SPECIFICATION3

INSTALLING YOUR PATHWAY LIGHTS4

PAIRING YOUR DEVICE WITH THE AIDOT APP5

REFRESH THE NUMBER OF FIXTURES6

NEED HELP8

READ AND SAVE THESE INSTRUCTIONS

Safety Instructions

• This product is rated as IP66 Waterproof. It can be used outdoors but cannot be immersed in water.

• The power adapter is rated as IP44 Waterproof. It can be used outdoors but cannot be rinsed or immersed in water.

• Tighten up the waterproof cap before installing the pathway lights.

• The internal light sources of the light bars and strip light cannot be replaced. If the light sources sustain damage, the product should be replaced.


• Do not allow children to assemble and install this product without adult supervision.

• Avoid installing this product near major heat sources. External dimmers cannot be used with this product.

• Use this product with the provided power adapter only.

INTRODUCTION

Thank you for choosing Linkind Smart Pathway Lights. This product has IP66 waterproof rating and supports three control methods: button control, App control, and voice control. Color, brightness, etc. can be adjusted through AiDot App.

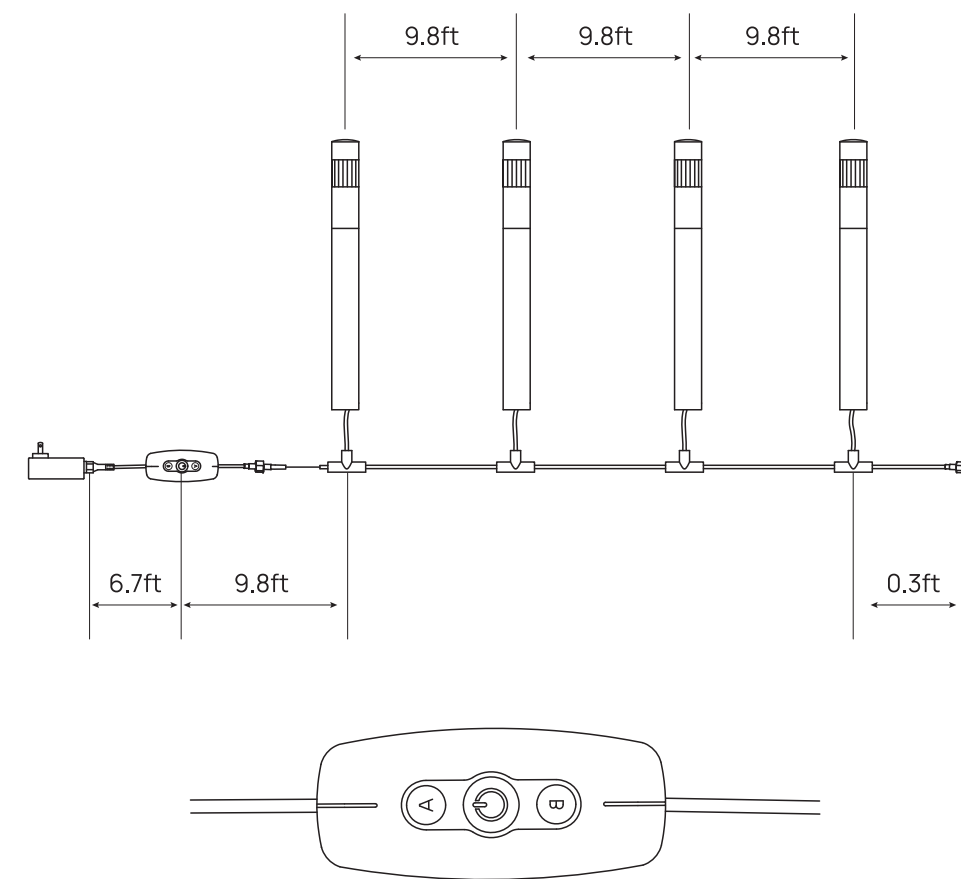

A

Switch colors

B

Switch scenes

⏻

Short press: On/Off
Press and hold for more than 5s: Reset the device

Indicator light

Flashing blue slowly: The device is in network configuration status.
Steady blue: The device is online
Off: The device is offline, or the device is not connected to power

Button A and Button B can configure more functions through the App, such as adjusting brightness, adjusting color temperature, random colors, countdown, etc.

SPECIFICATION

Power input (adapter)

120V AC 50/60Hz 0.8Amax

Power output (adapter)

DC24V 1.5A

Color

RGBWW

Color temperature

2700K-6500K

Lumens

200lm/per light

Number of lights

4

Length

39.4ft (9.8ft between lights)

Wireless Protocol

2.4GHz Wi-Fi& Bluetooth

Waterproof

Adapter (IP44)
Control Box (IP65)
Pathway Lights (IP66)

Operating temperature

-20~45°C / -4~113°F

1

2

3

Δ

5

3

8