


Case No. : <u>GTS20260730014-1-07</u>
Ambient Condition: <u>24</u> °C, <u>51</u> %RH
According Standard: ■Part15C
Test Date: <u>2026.8.12-2026.9.14</u> Test Engineer: <u>Evan ouyang</u>

AppendixB.1: DTS Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE	Ant1	2402	0.712	2401.644	2402.356	0.5	PASS
		2440	0.720	2439.632	2440.352	0.5	PASS
		2480	0.724	2479.632	2480.356	0.5	PASS

Test Graphs

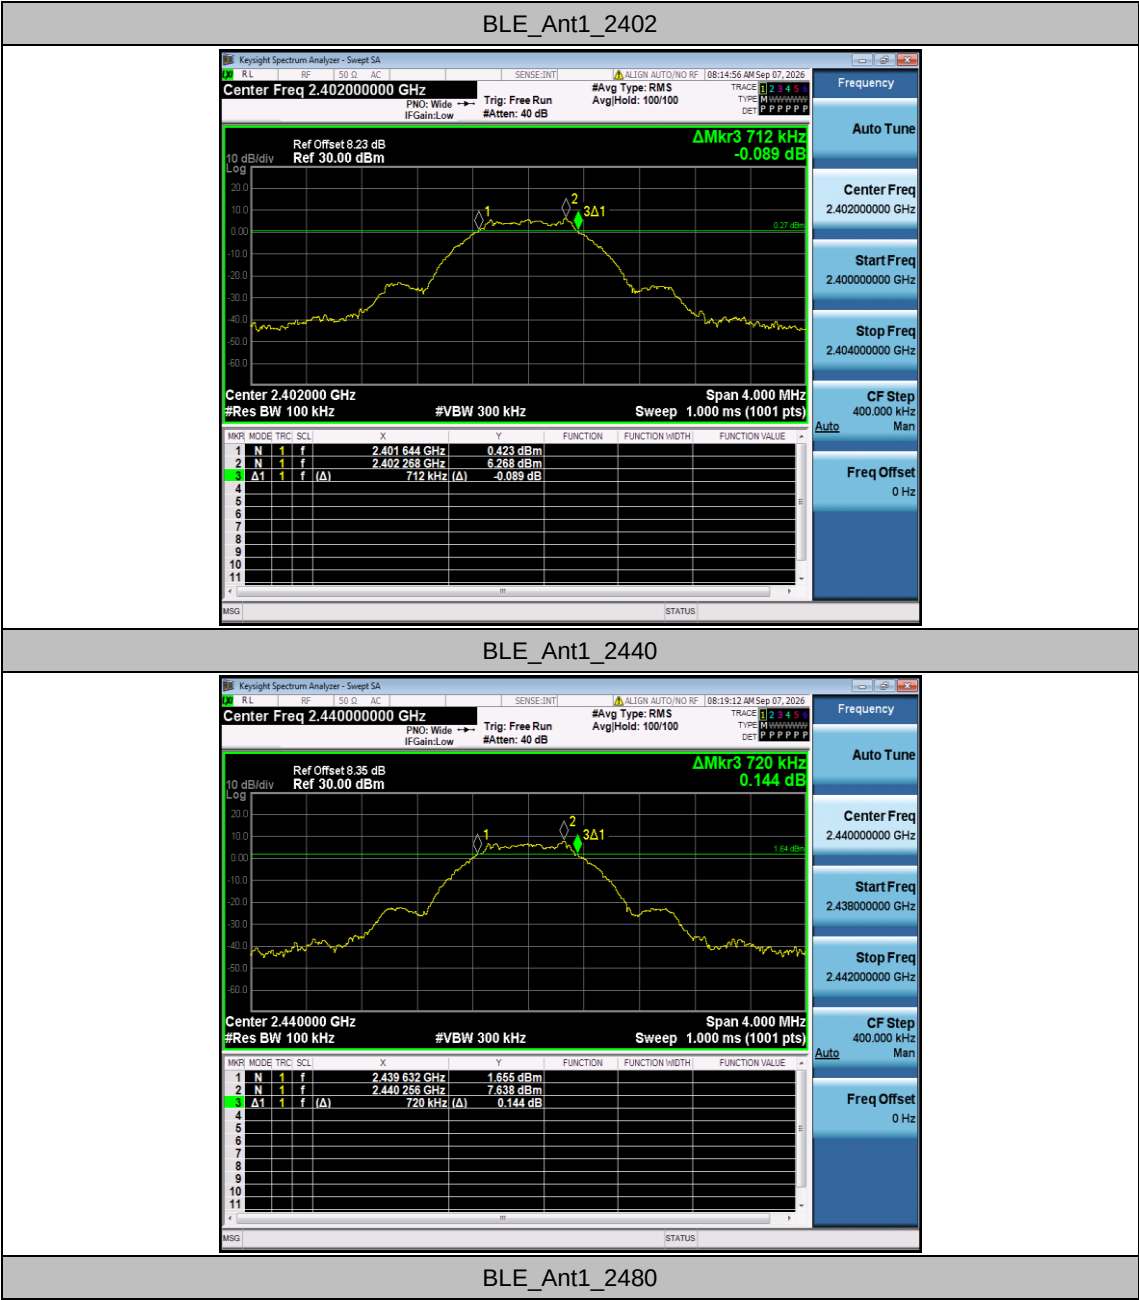


BLE_Ant1_2440

Frequency

Auto Tune

Center Freq
2.440000000 GHzStart Freq
2.438000000 GHzStop Freq
2.442000000 GHzCF Step
400.000 kHz
Auto ManFreq Offset
0 Hz

BLE_Ant1_2480

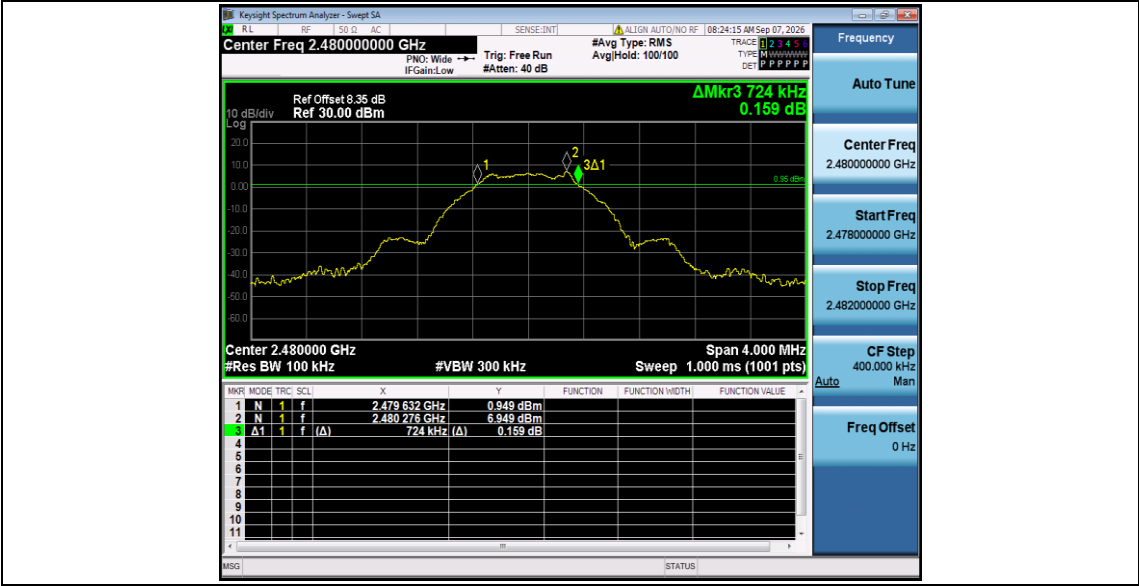


AppendixB.2: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE	Ant1	2402	1.0493	2401.4776	2402.5269	---	---
		2440	1.0529	2439.4728	2440.5257	---	---
		2480	1.0531	2479.4769	2480.5300	---	---

Test Graphs

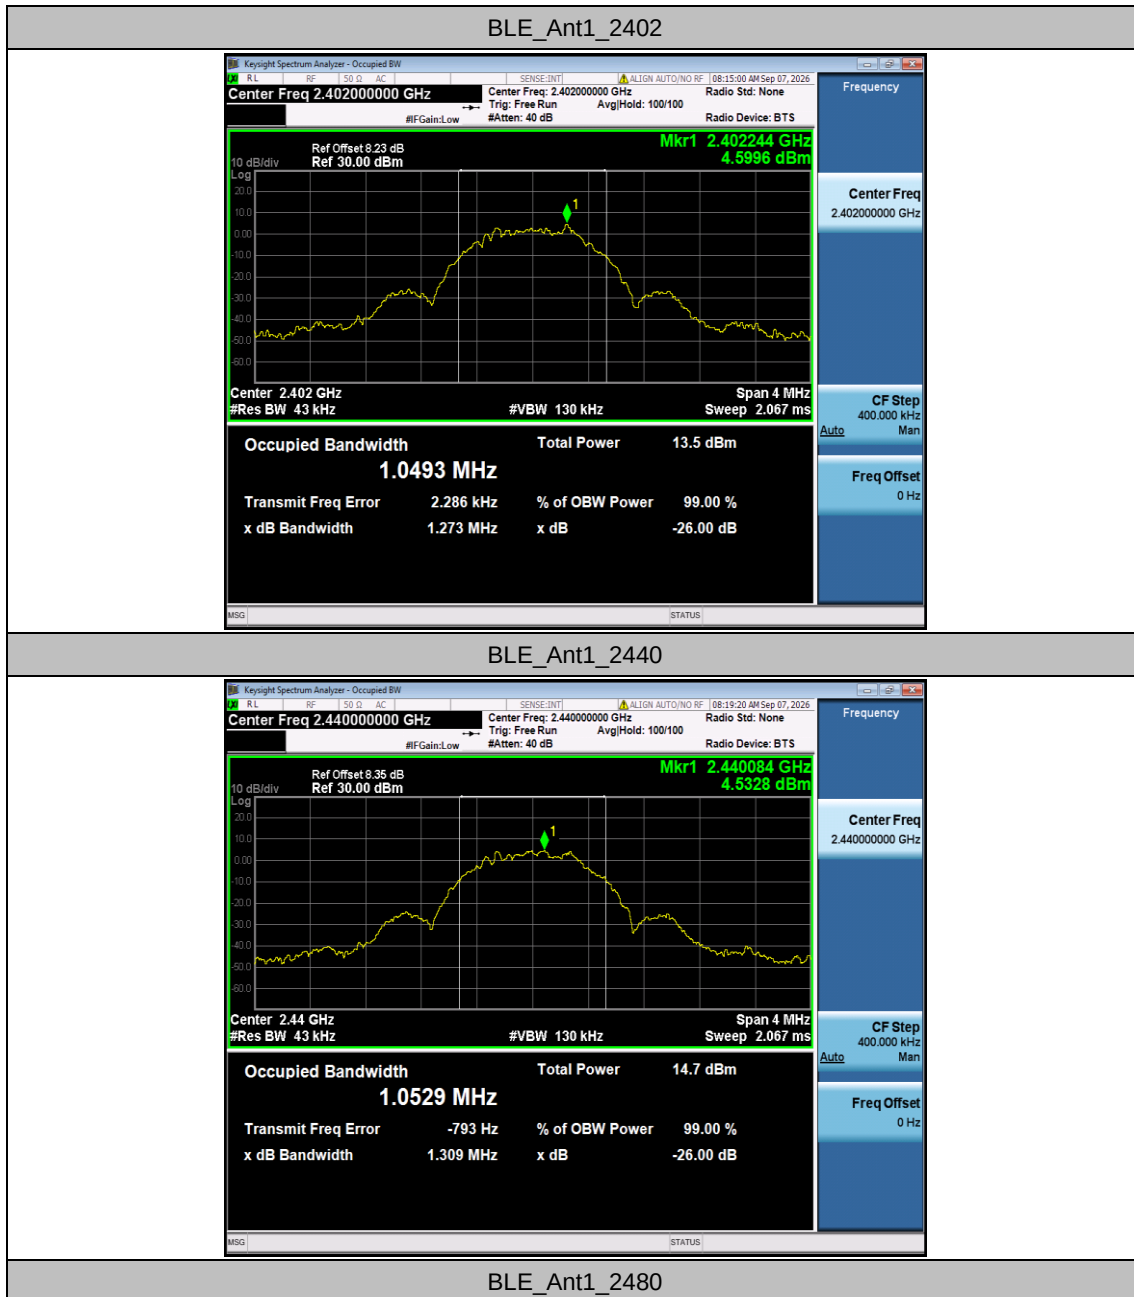



AppendixB.3: Maximum conducted output power

Test Result Peak

Left Ear:

TestMode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE	Ant1	2402	7.67	≤30	PASS
		2440	8.98	≤30	PASS
		2480	8.48	≤30	PASS

Right Ear:

TestMode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE	Ant1	2402	7.22	≤30	PASS
		2440	8.36	≤30	PASS
		2480	8.21	≤30	PASS

AppendixB.4: Maximum power spectral density

Test Result


TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE	Ant1	2402	-9.31	≤8.00	PASS
		2440	-7.91	≤8.00	PASS
		2480	-8.30	≤8.00	PASS

Appendix B.5: Band edge measurements

Test Result

TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant1	Low	2402	5.89	-46.98	≤-14.11	PASS
		High	2480	6.86	-49.91	≤-13.14	PASS

Test Graphs

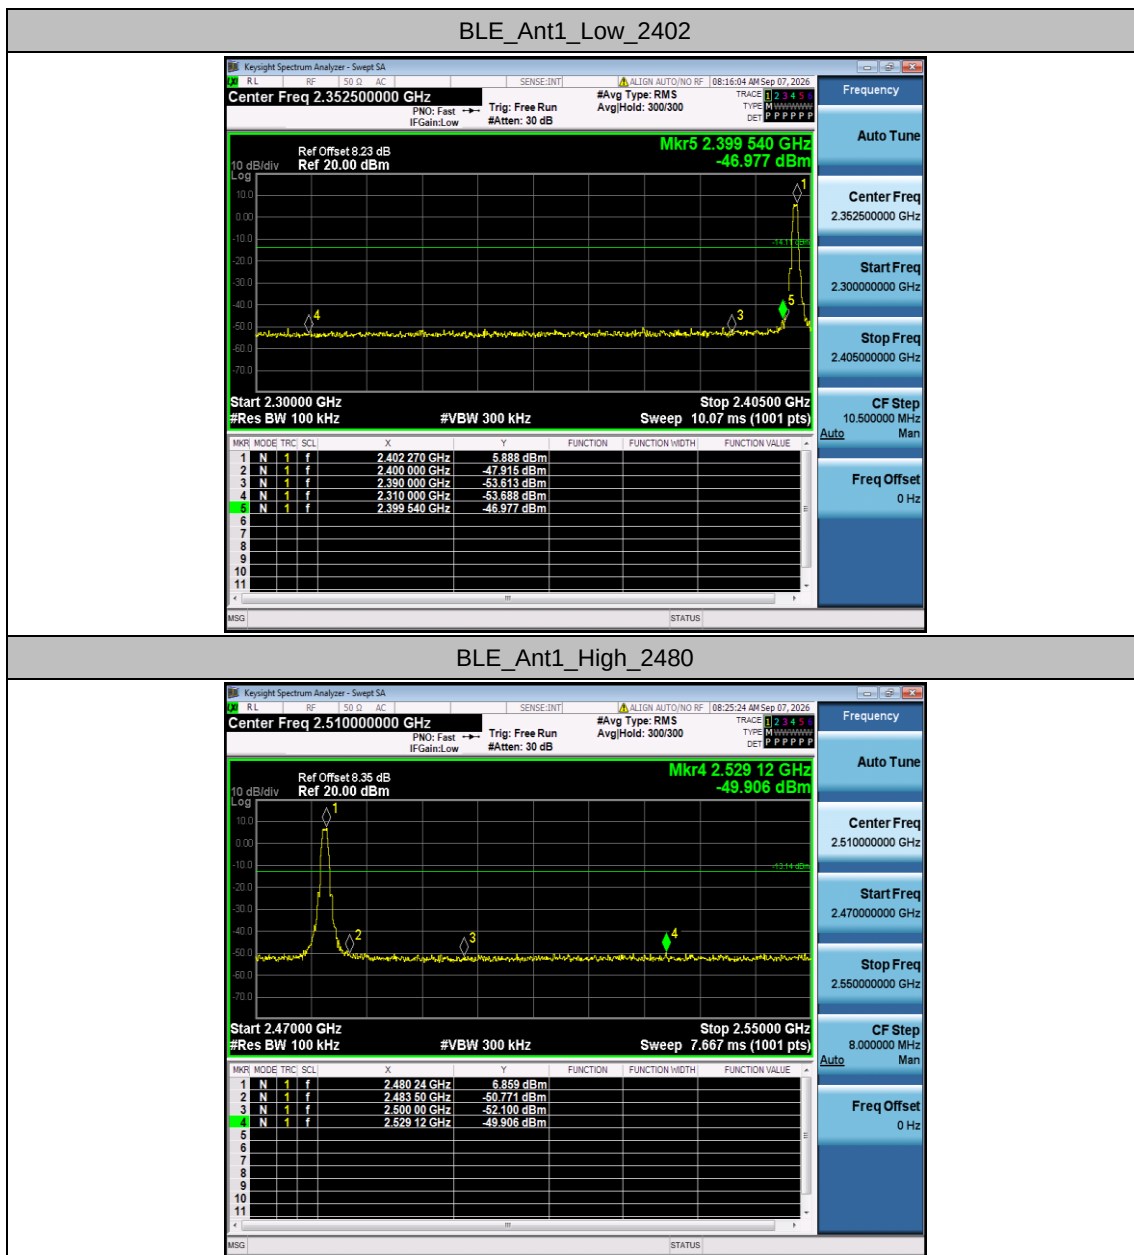


Appendix B.6: Conducted Spurious Emission

Test Result

TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant1	2402	Reference	6.44	6.44	---	PASS
			30~1000	6.44	-61.03	≤-13.56	PASS
			1000~26500	6.44	-48.51	≤-13.56	PASS
		2440	Reference	7.82	7.82	---	PASS
			30~1000	7.82	-61.49	≤-12.18	PASS
			1000~26500	7.82	-48.45	≤-12.18	PASS
		2480	Reference	7.31	7.31	---	PASS
			30~1000	7.31	-61.44	≤-12.69	PASS
			1000~26500	7.31	-47.82	≤-12.69	PASS

Test Graphs




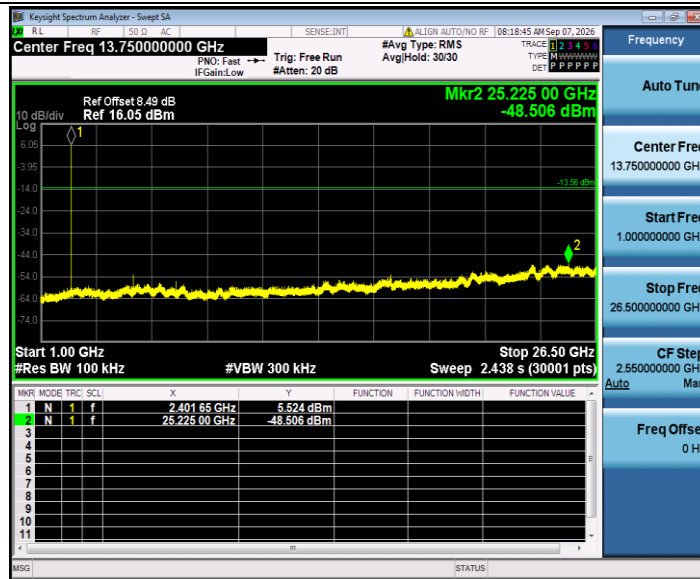


BLE_Ant1_2440_0~Reference



BLE_Ant1_2440_30~1000

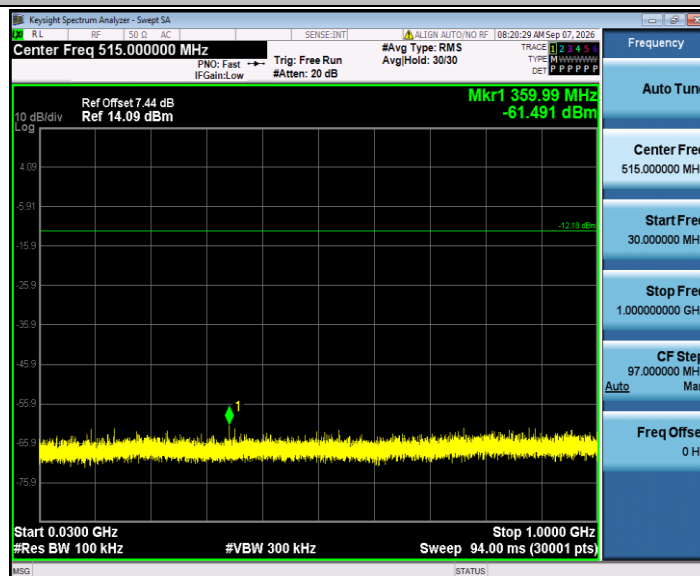



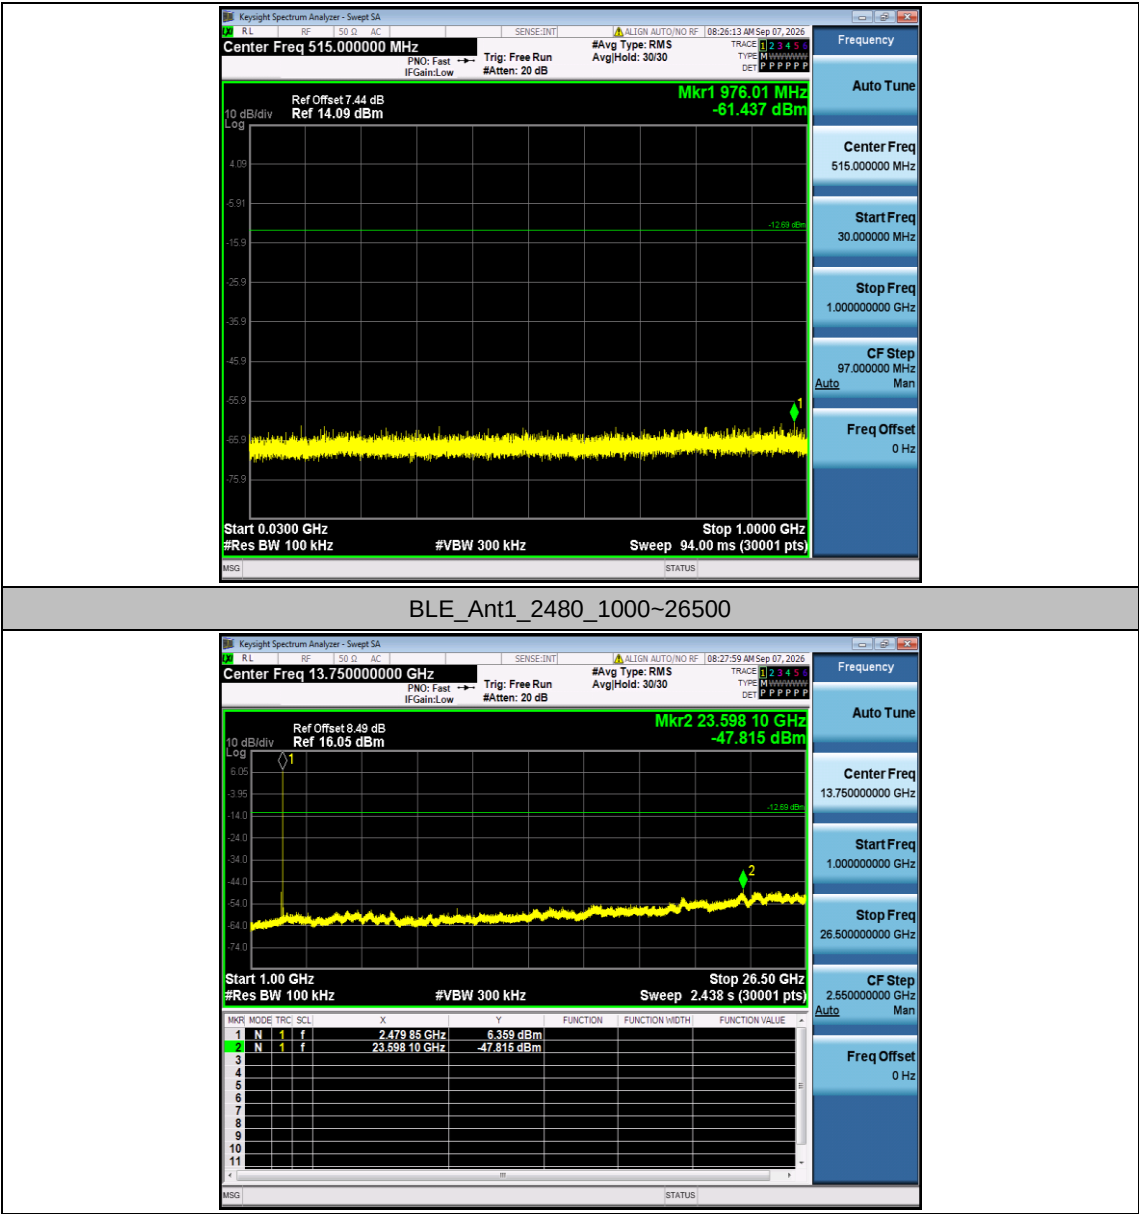



AppendixB.7: Duty Cycle

Test Result

TestMode	Antenna	Freq(MHz)	ON Time [ms]	Period [ms]	X	DC [%]	Duty Cycle Factor[dB]	1/T Factor[KHz]
BLE	Ant1	2402	2.14	2.51	0.8526	85.26	0.69	0.47
		2440	2.14	2.50	0.8560	85.60	0.68	0.47
		2480	2.14	2.50	0.8560	85.60	0.68	0.47

Test Graphs

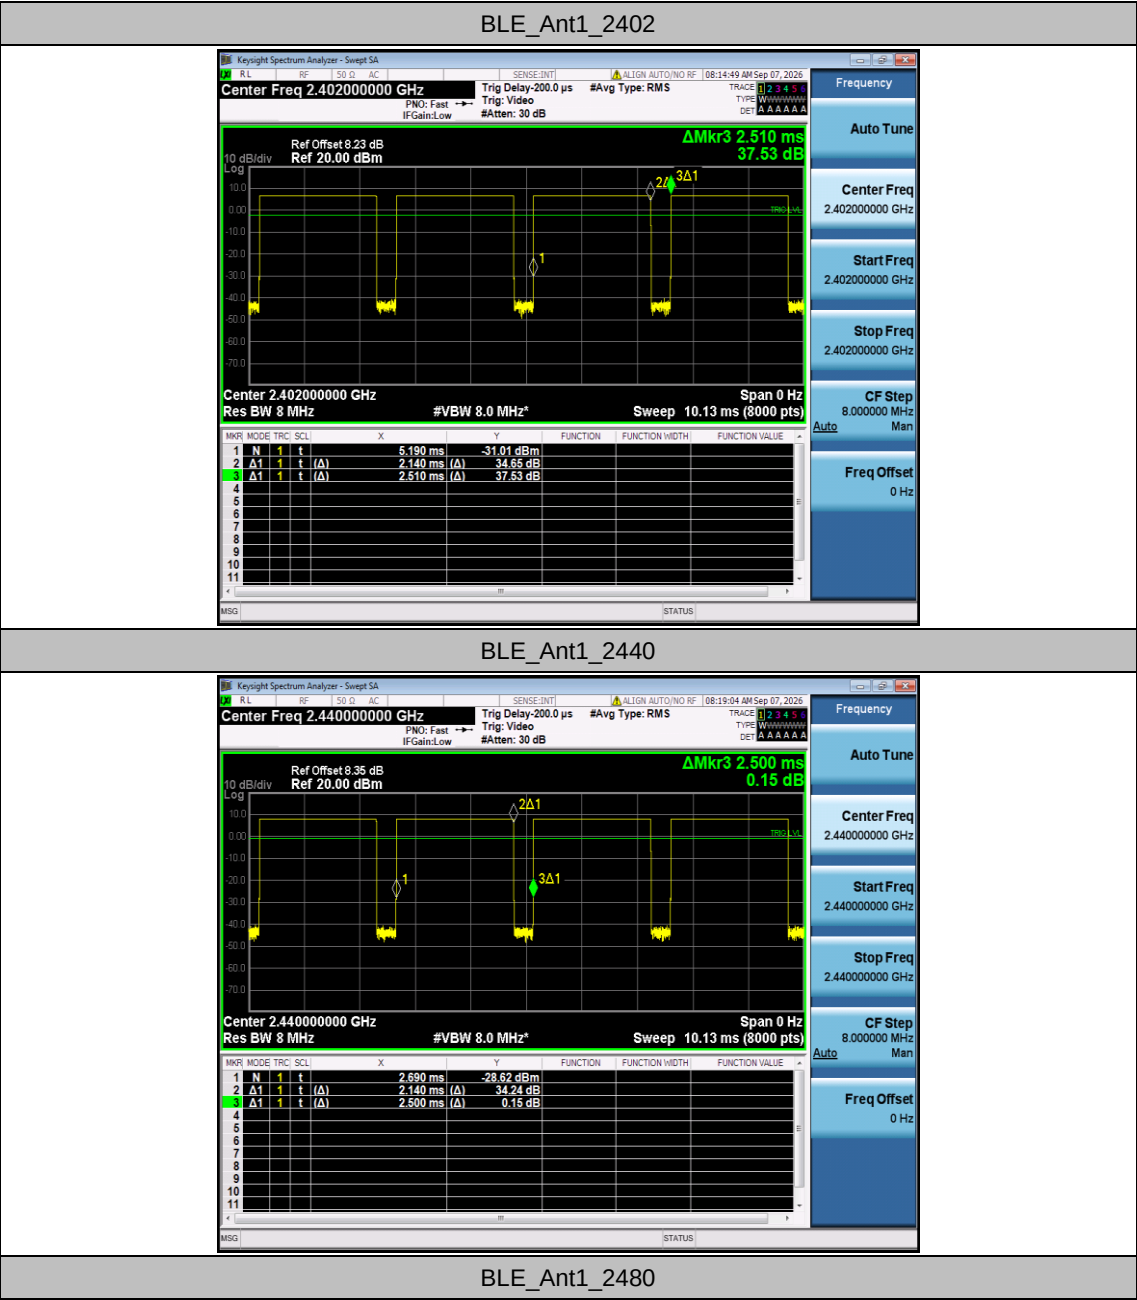

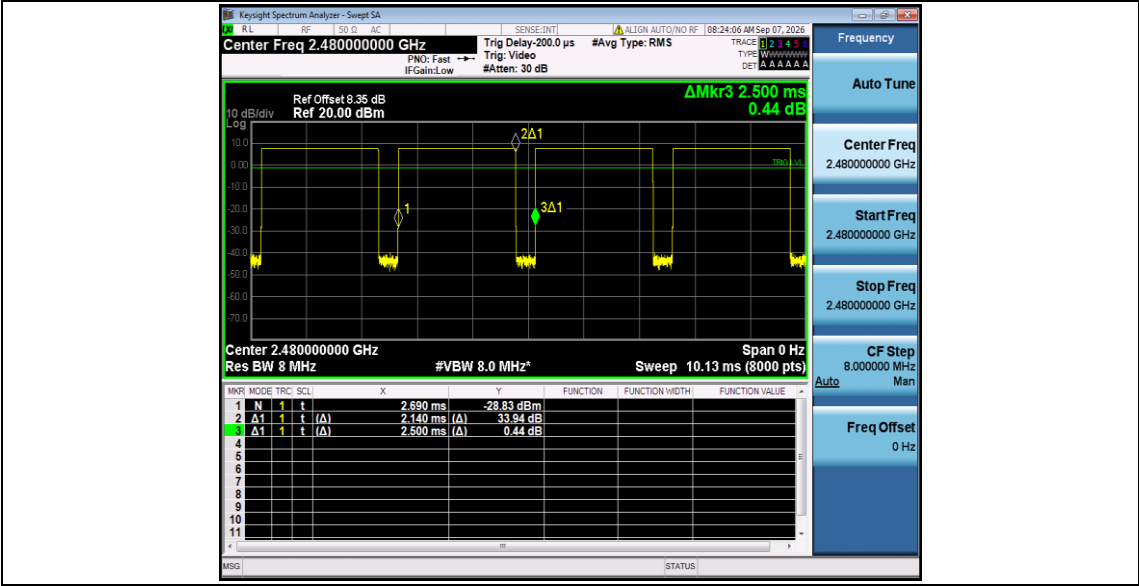

Appendix B.8: Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Freq(MHz)	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
BLE	Ant1	Low	2402	AV	2310.000	-49.95	≤-41.20	45.25	≤54	PASS
				AV	2388.515	-49.3	≤-41.20	45.90	≤54	PASS
				AV	2390.000	-49.33	≤-41.20	45.87	≤54	PASS
				Peak	2310.000	-42.77	≤-21.20	52.43	≤74	PASS
				Peak	2385.575	-39.6	≤-21.20	55.60	≤74	PASS
				Peak	2390.000	-42.16	≤-21.20	53.04	≤74	PASS
		High	2480	AV	2483.500	-45.54	≤-41.20	49.66	≤54	PASS
				AV	2483.520	-45.54	≤-41.20	49.66	≤54	PASS
				AV	2500.000	-49.03	≤-41.20	46.17	≤54	PASS
				Peak	2483.500	-39.79	≤-21.20	55.41	≤74	PASS
				Peak	2487.760	-38.57	≤-21.20	56.63	≤74	PASS
				Peak	2500.000	-42.82	≤-21.20	52.38	≤74	PASS

Note:

1. The Antenna Gain is compensated in the graph.
2. The Duty Cycle Factor and RBW Factor is compensated in the graph.
3. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

