



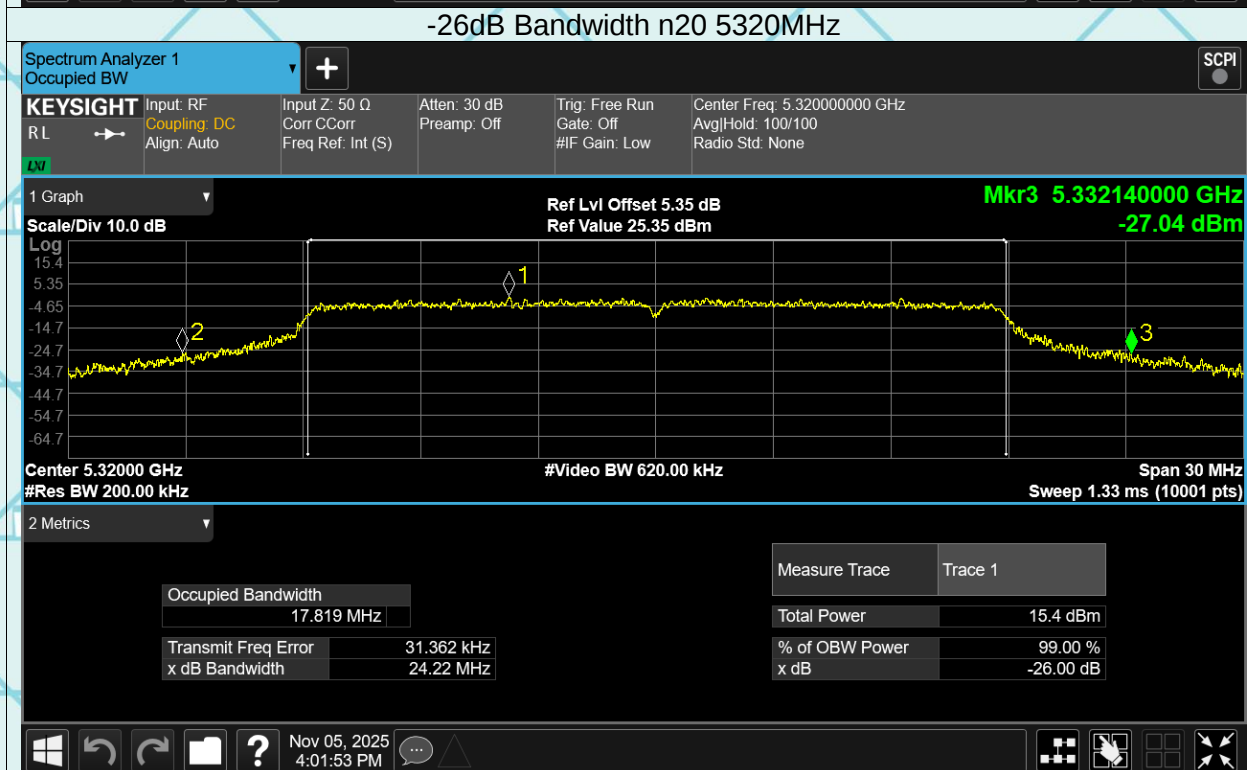
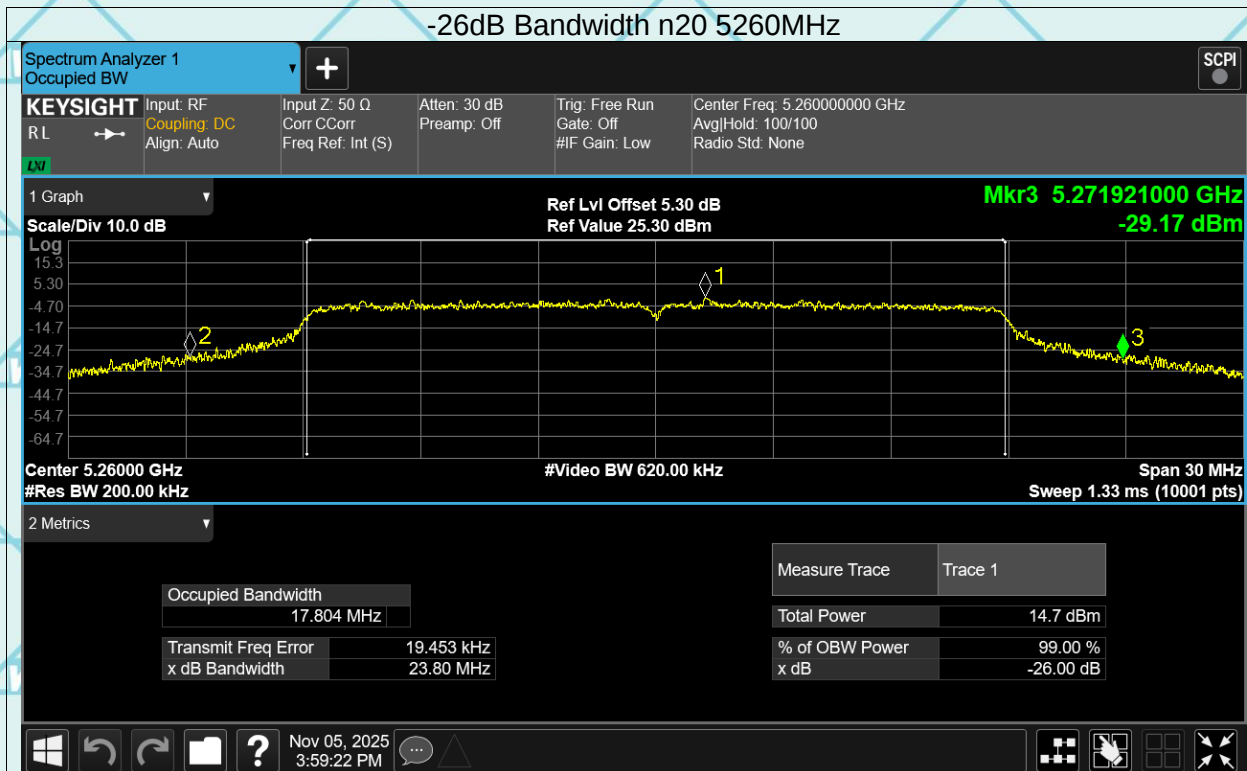
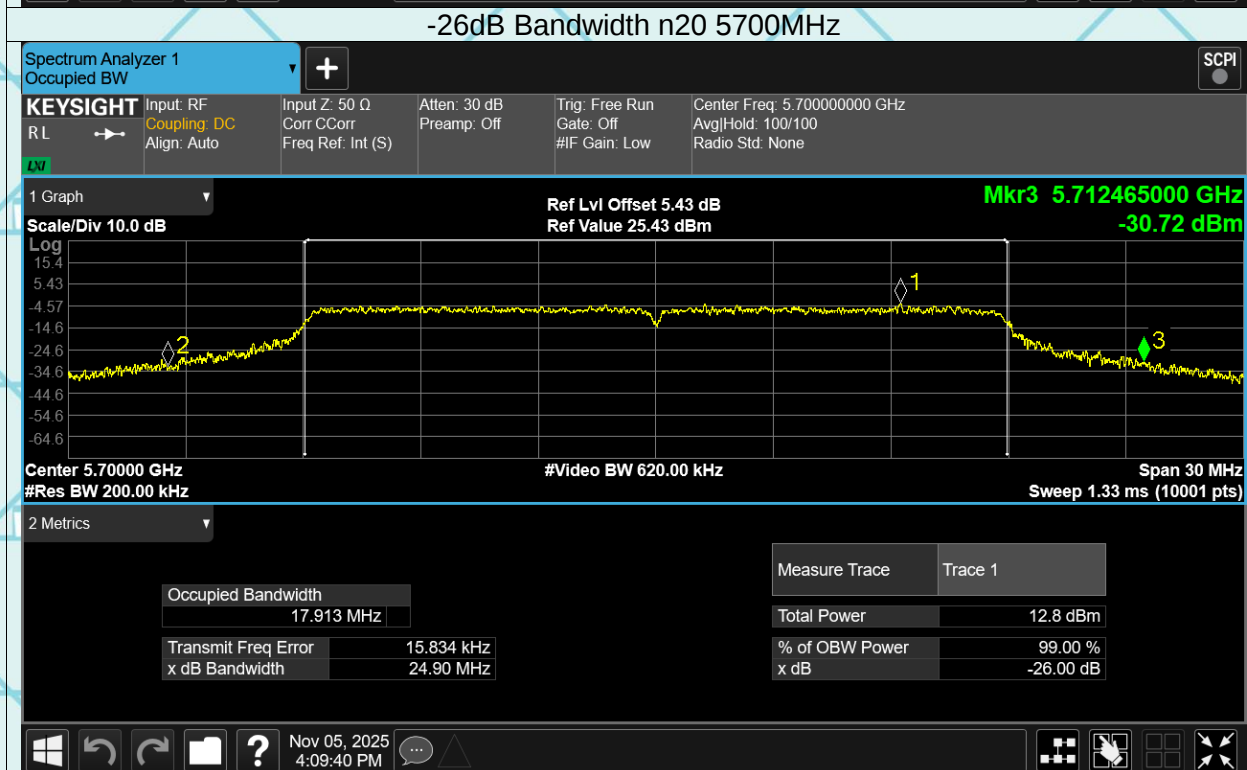


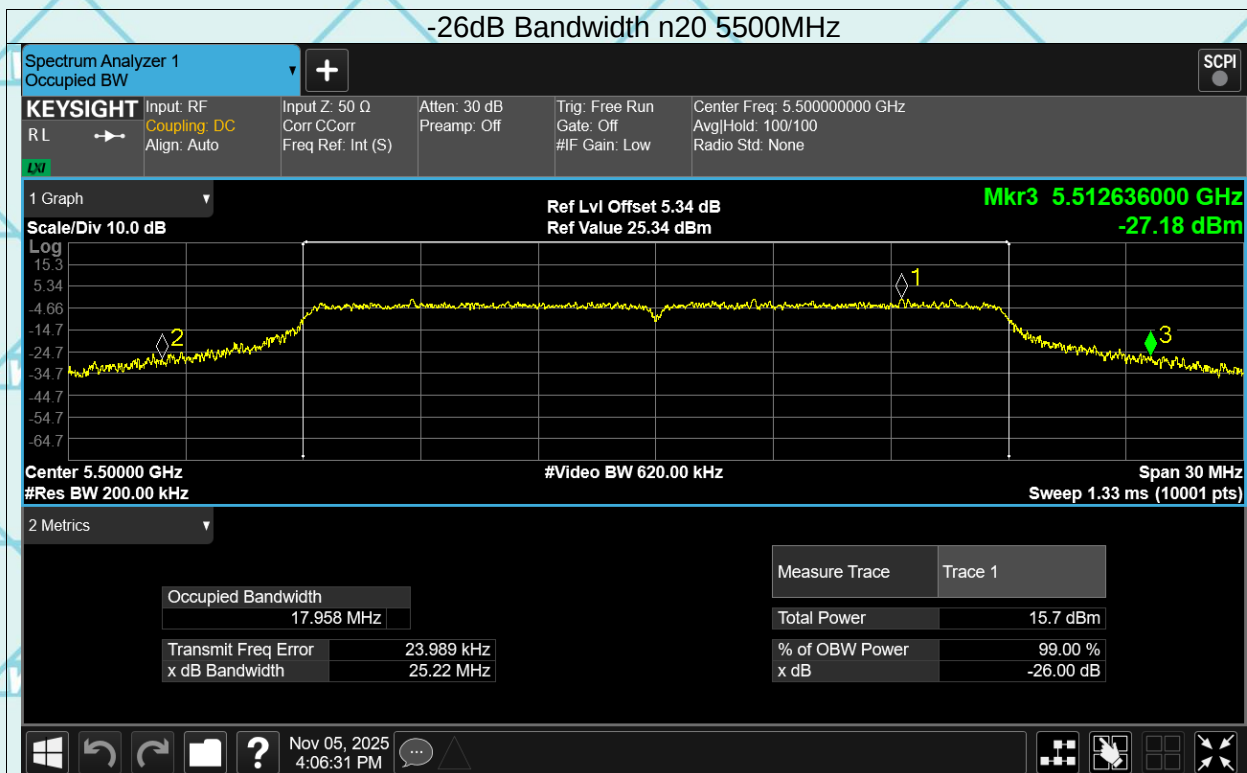

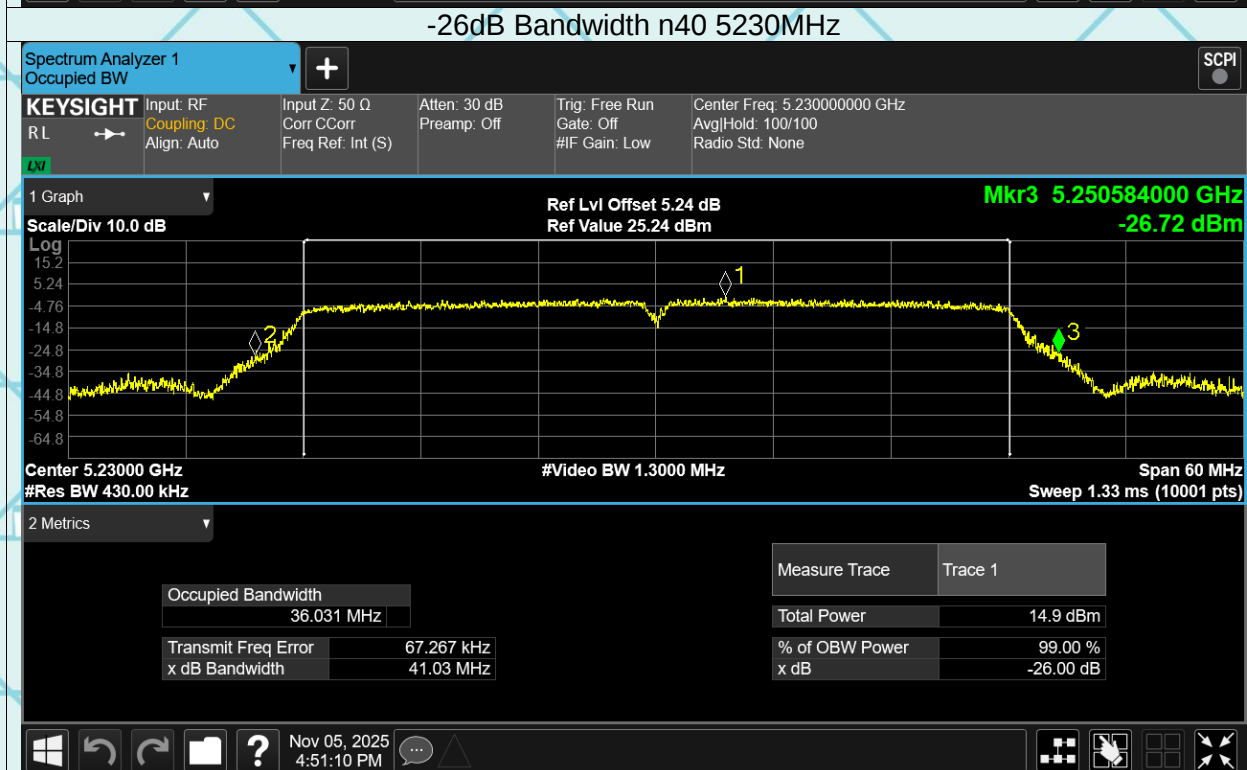



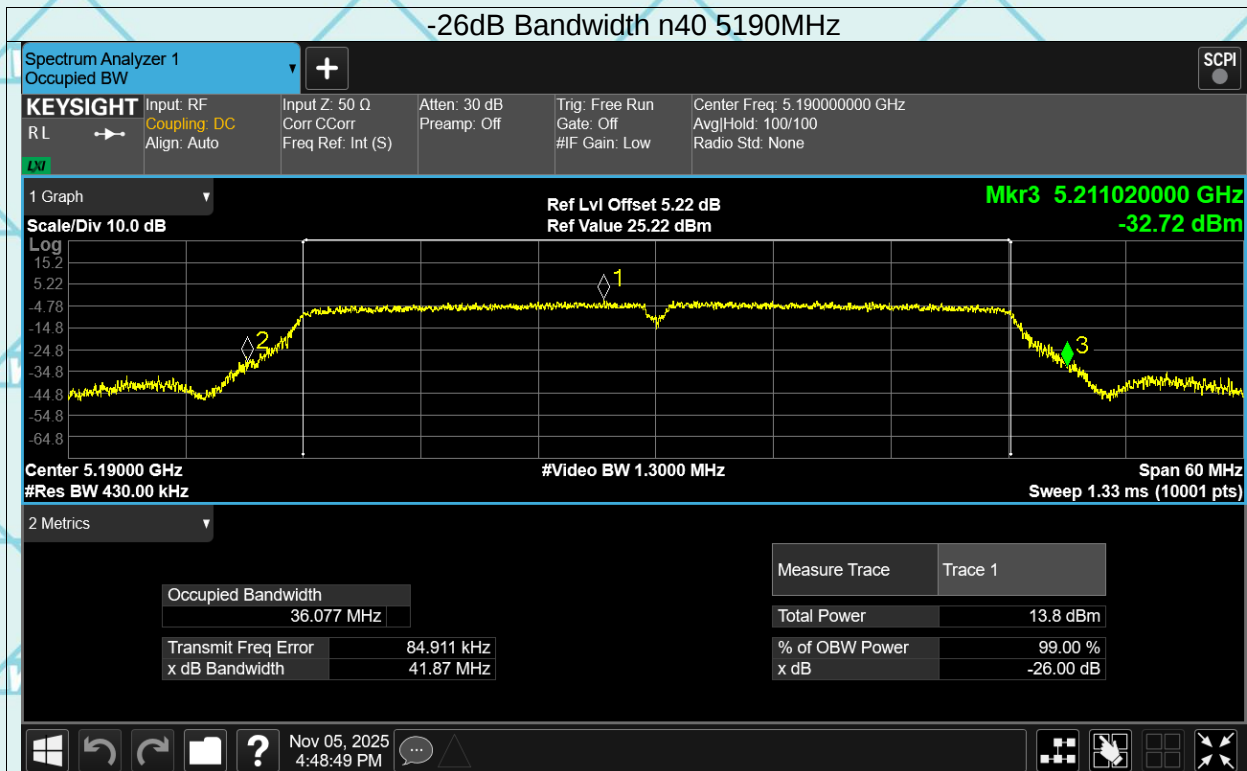




-26dB Bandwidth n40 5270MHz


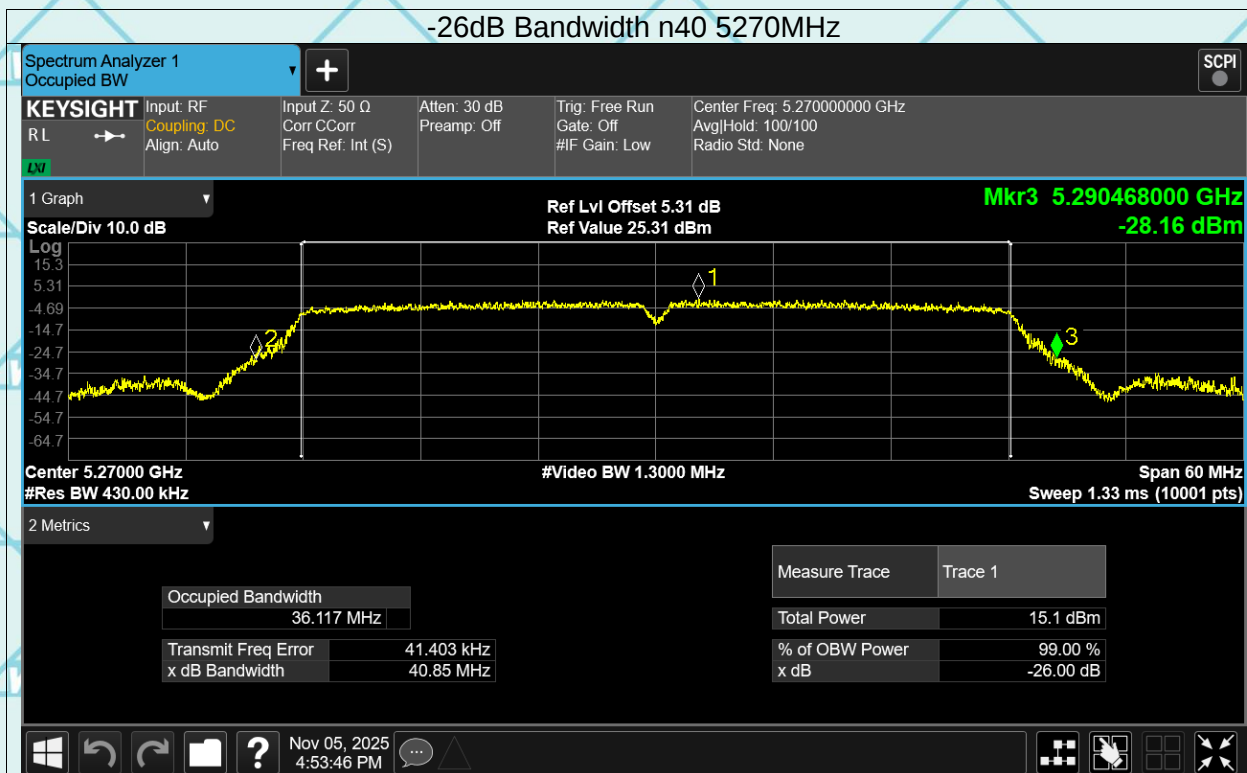




-26dB Bandwidth n40 5310MHz


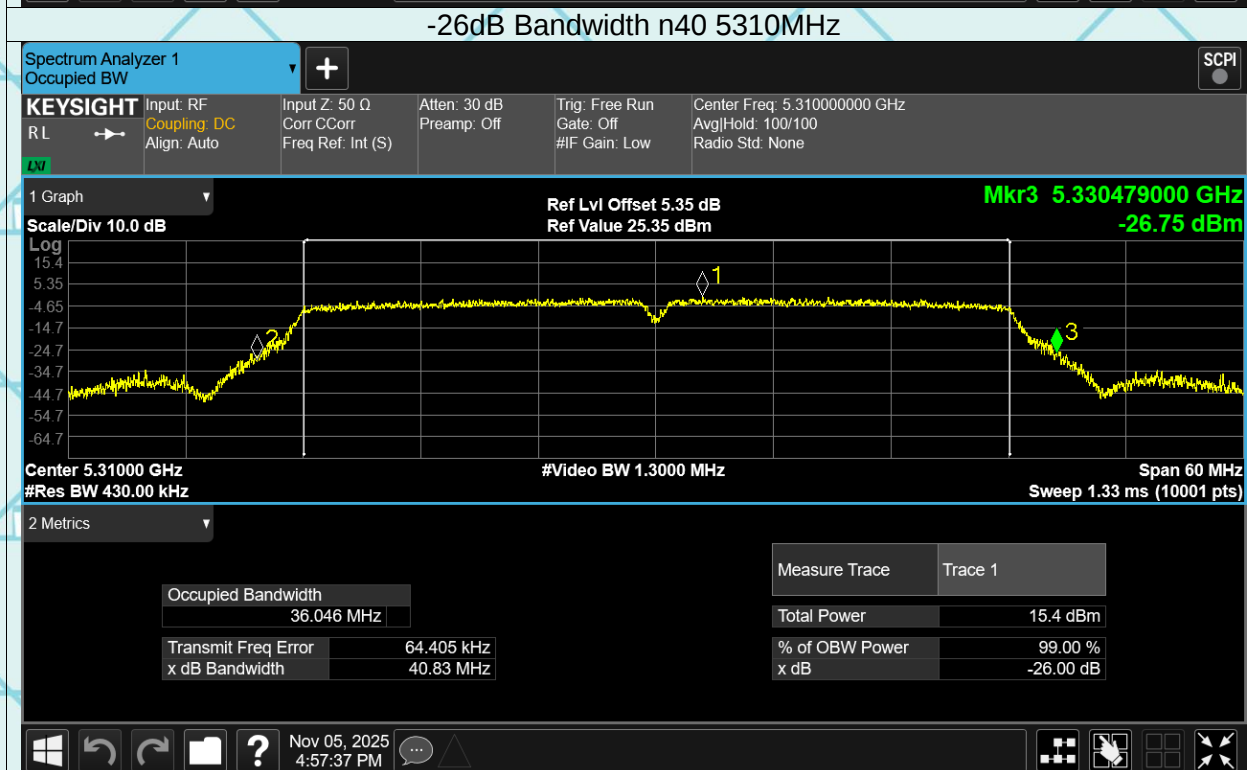


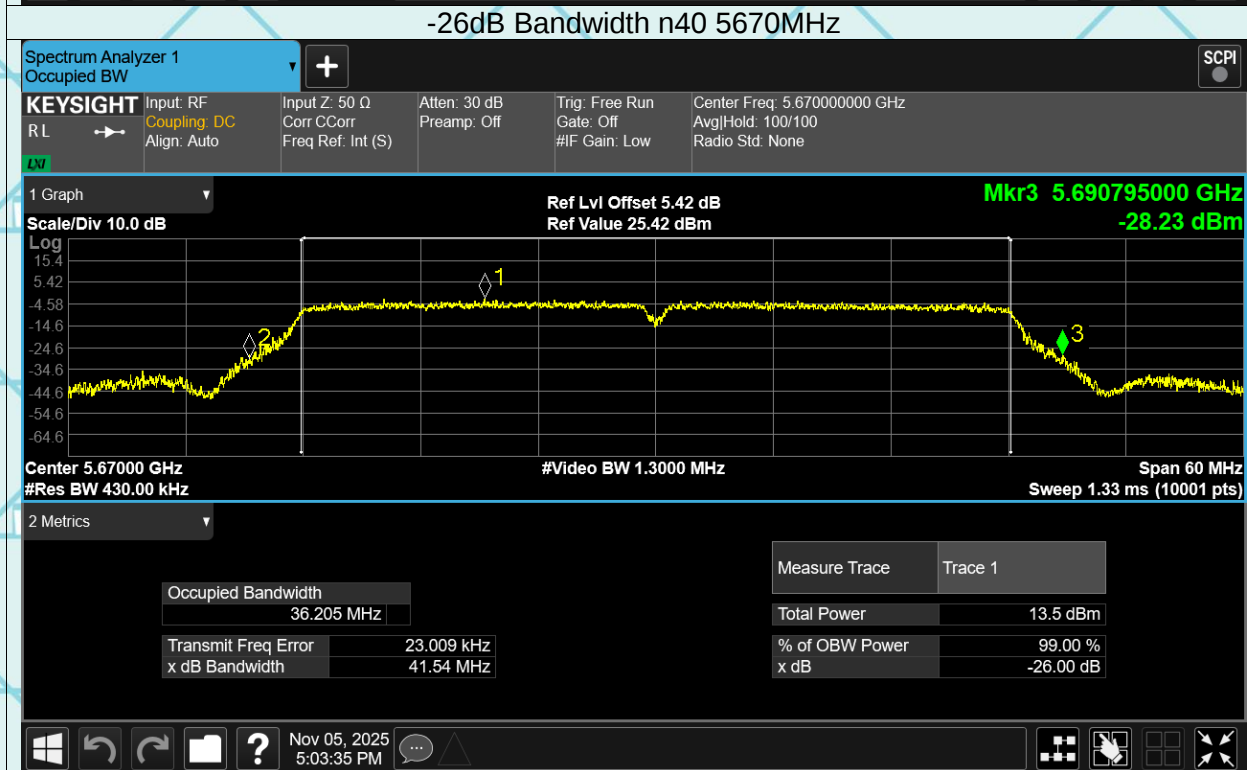
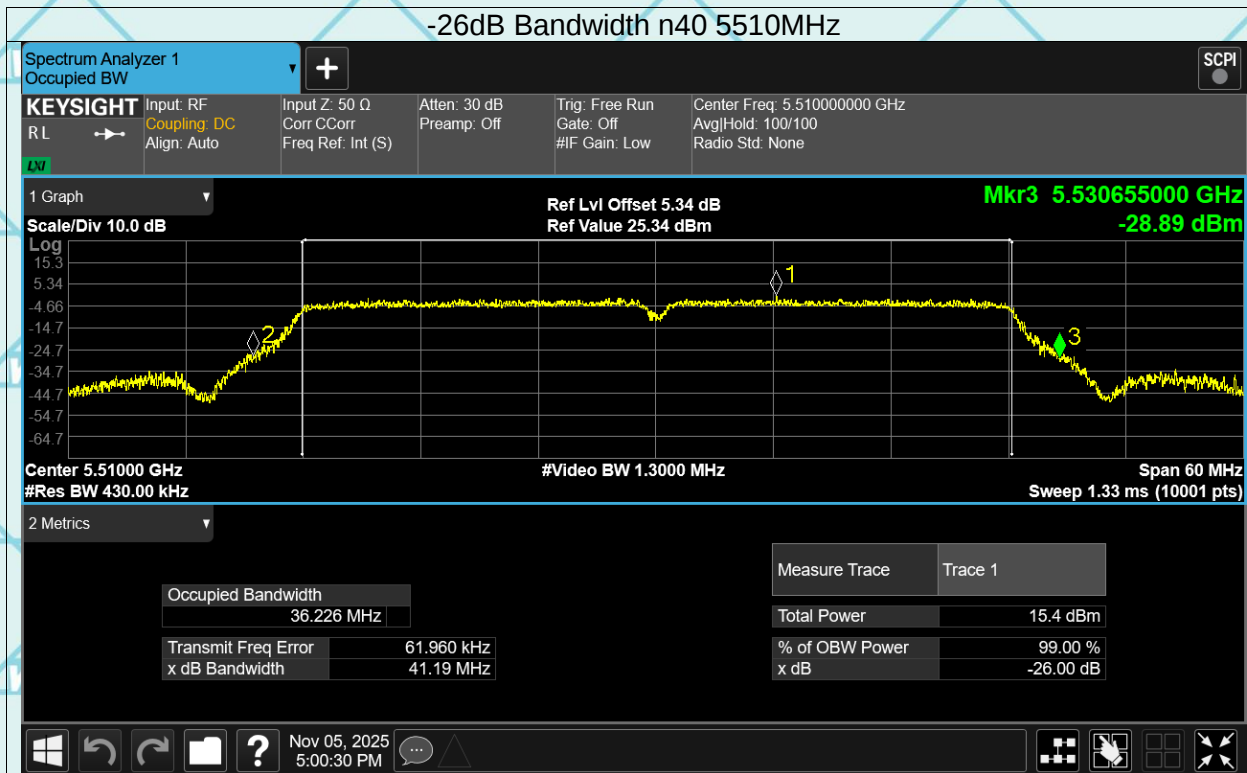


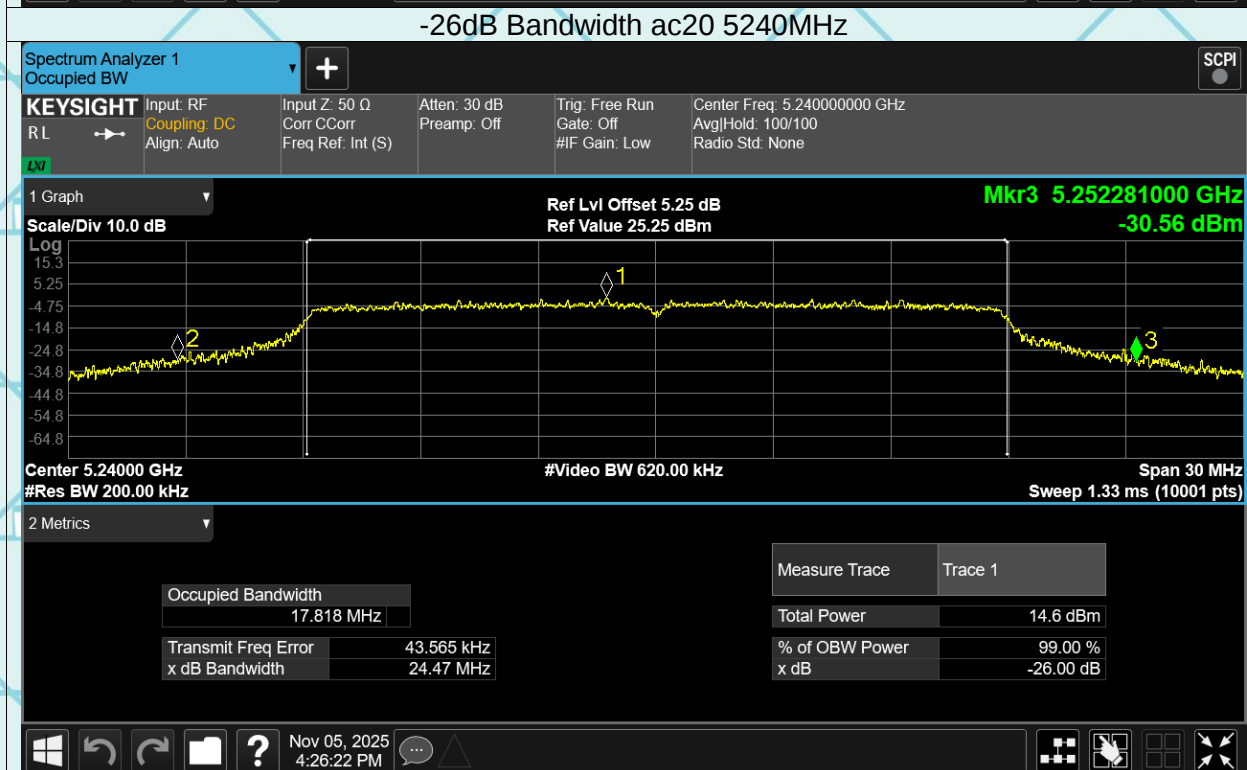
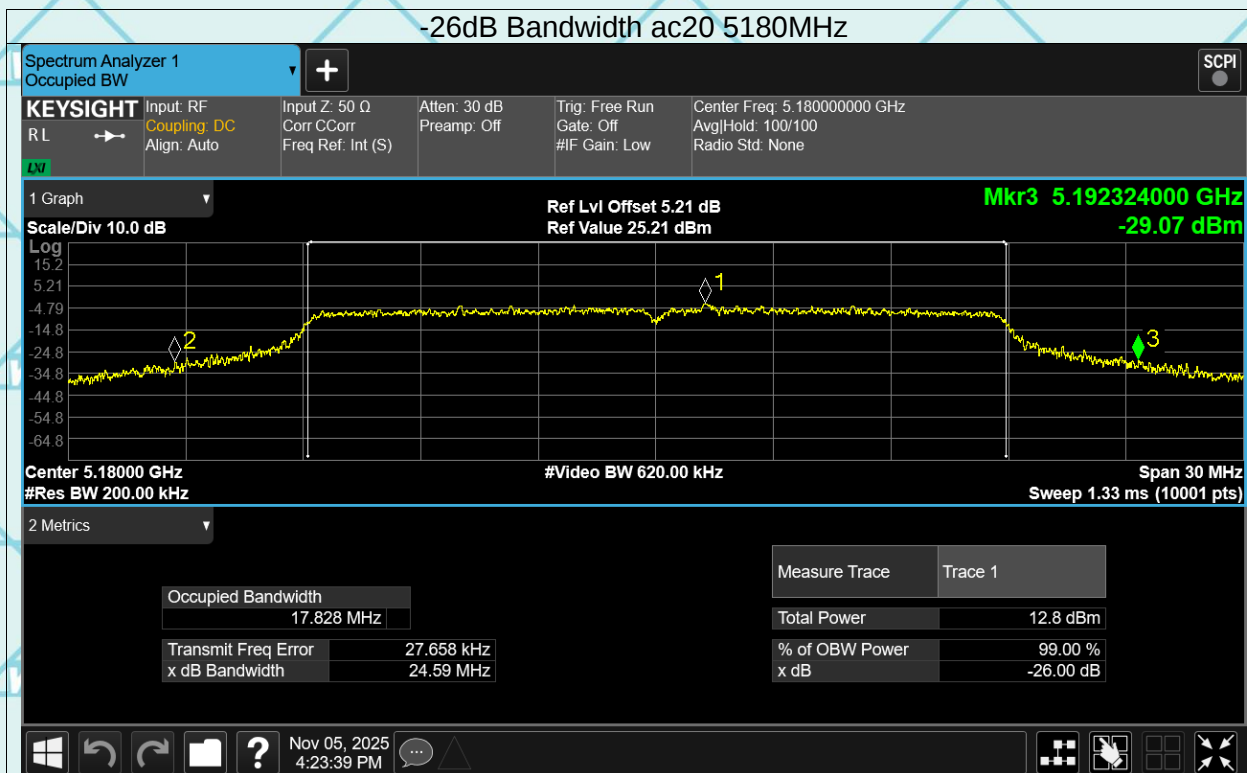


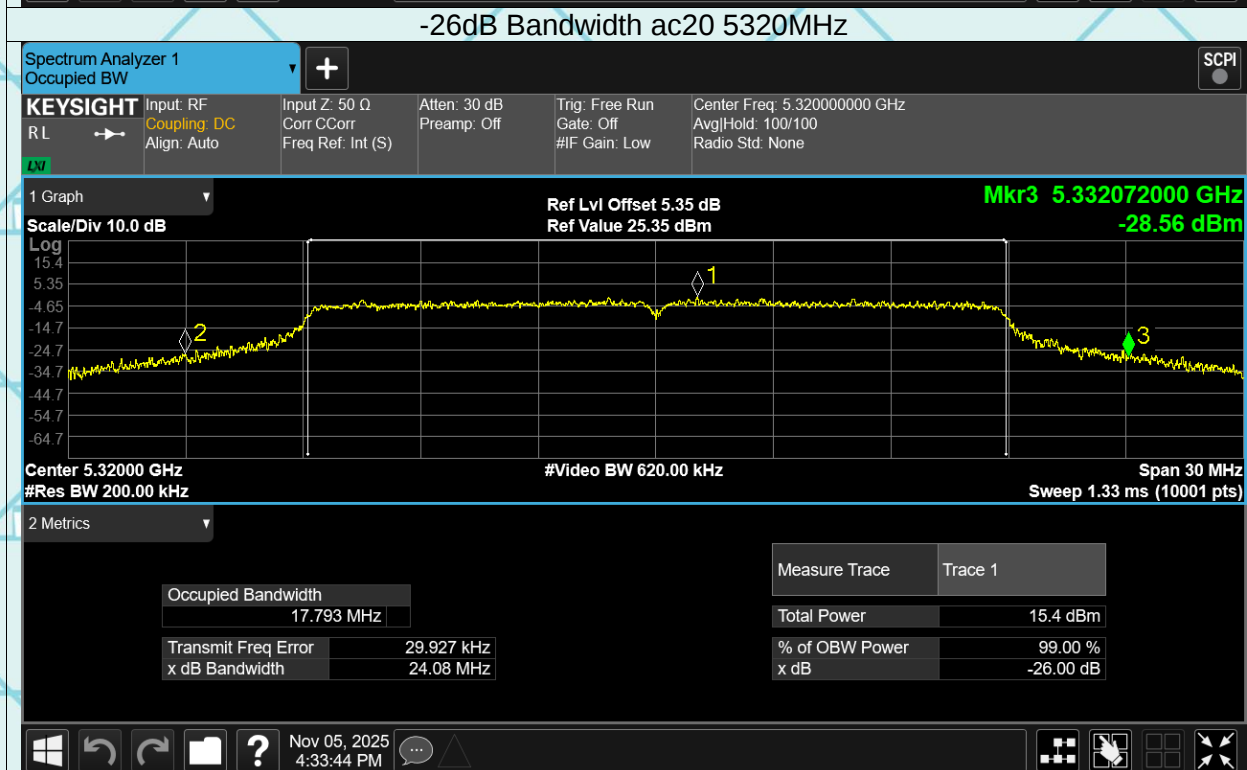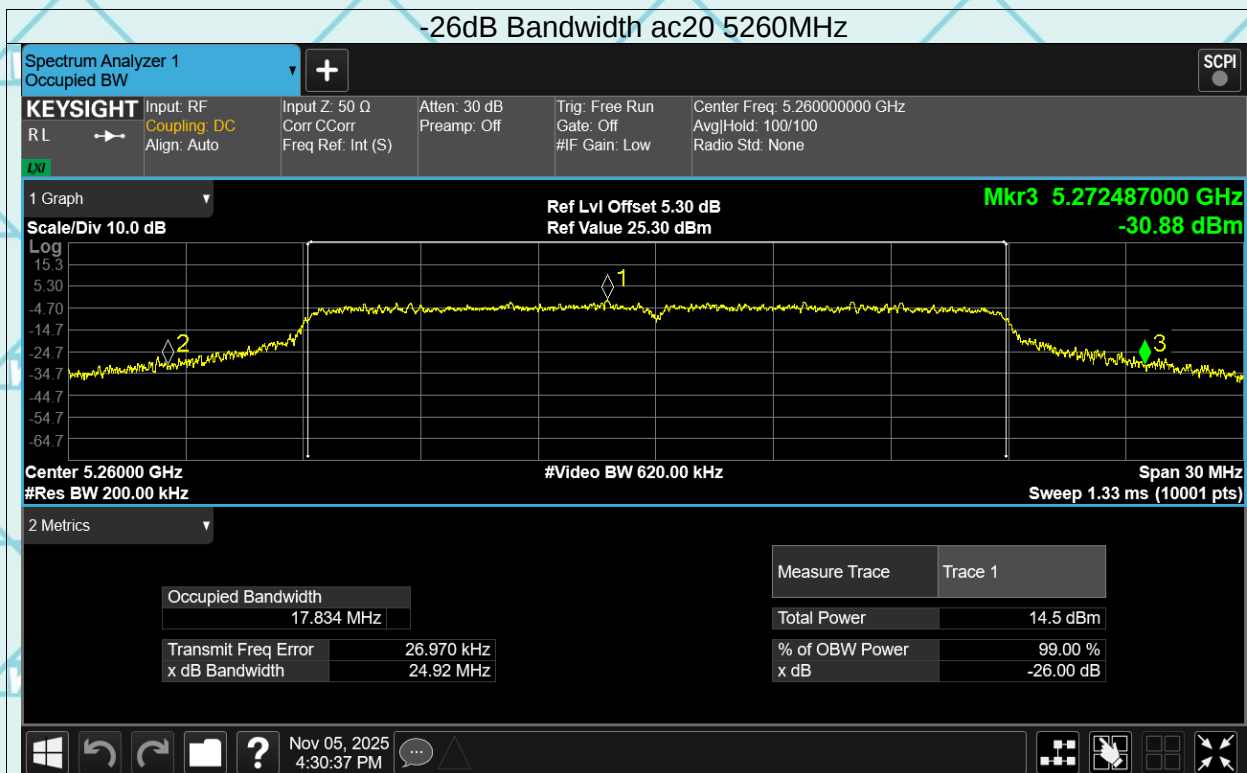

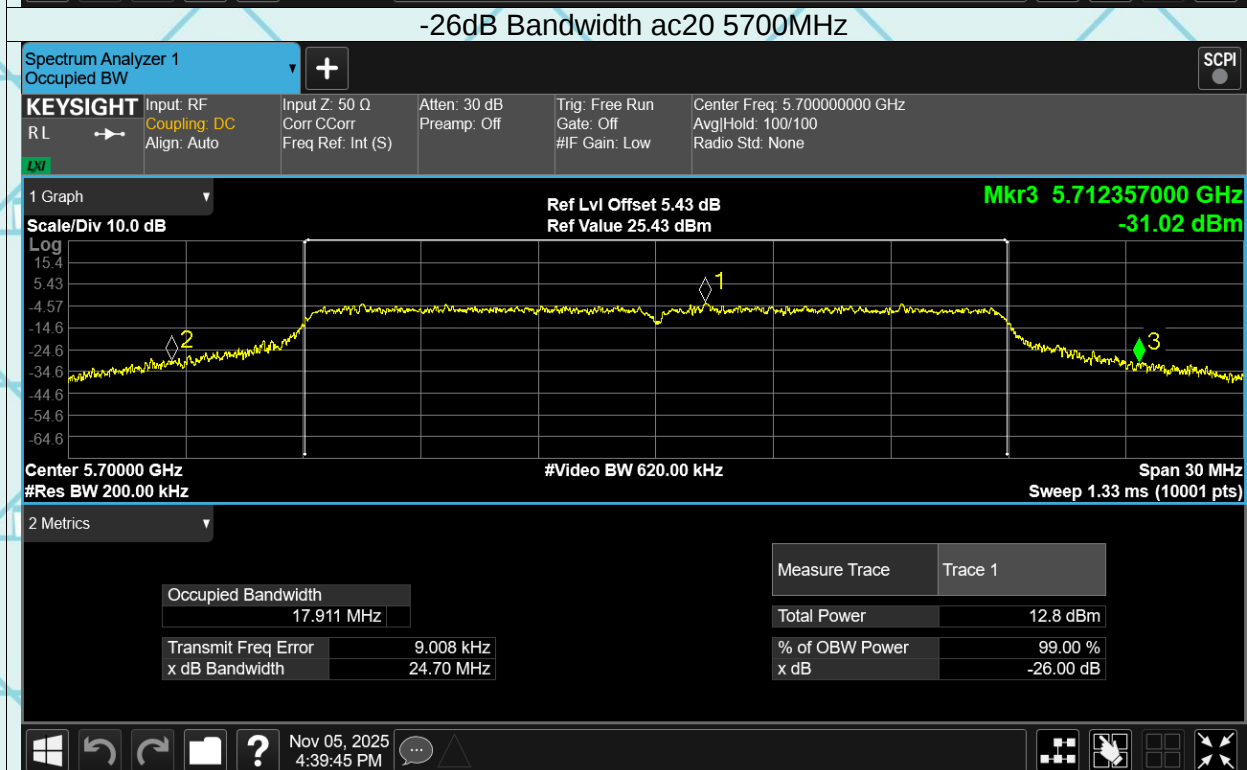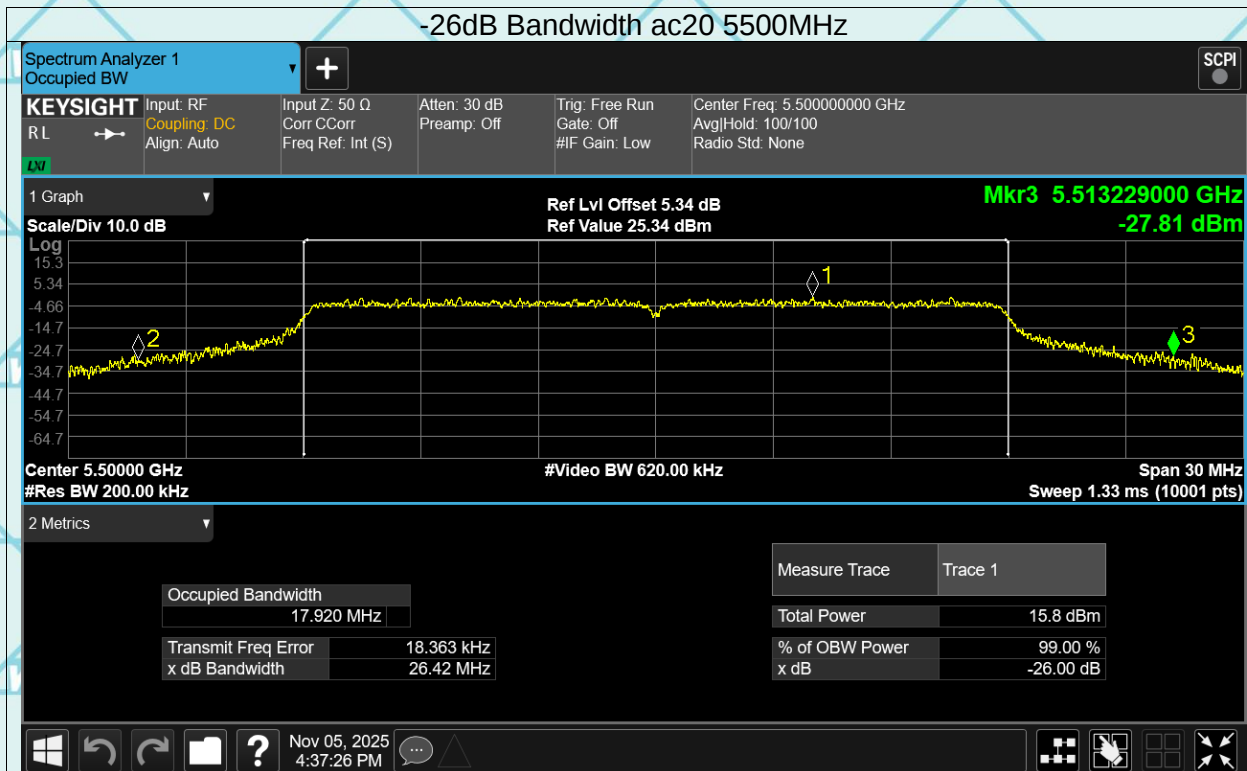


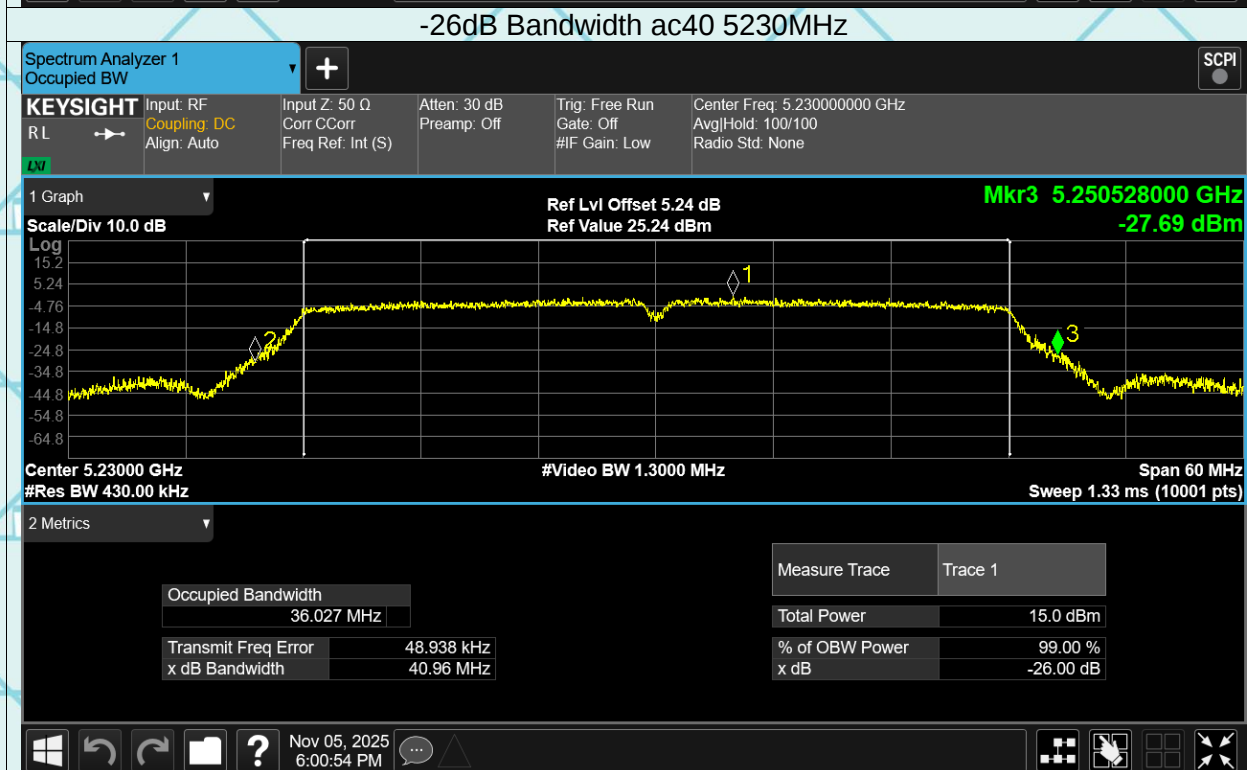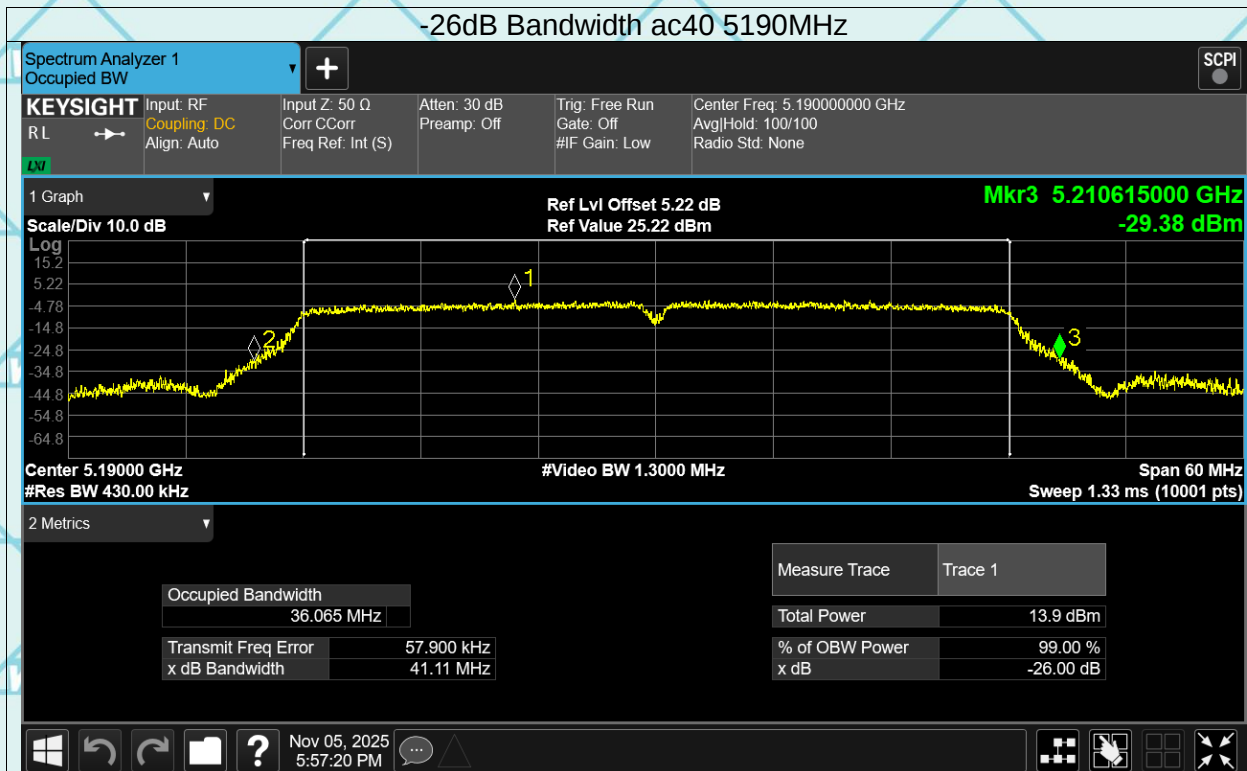

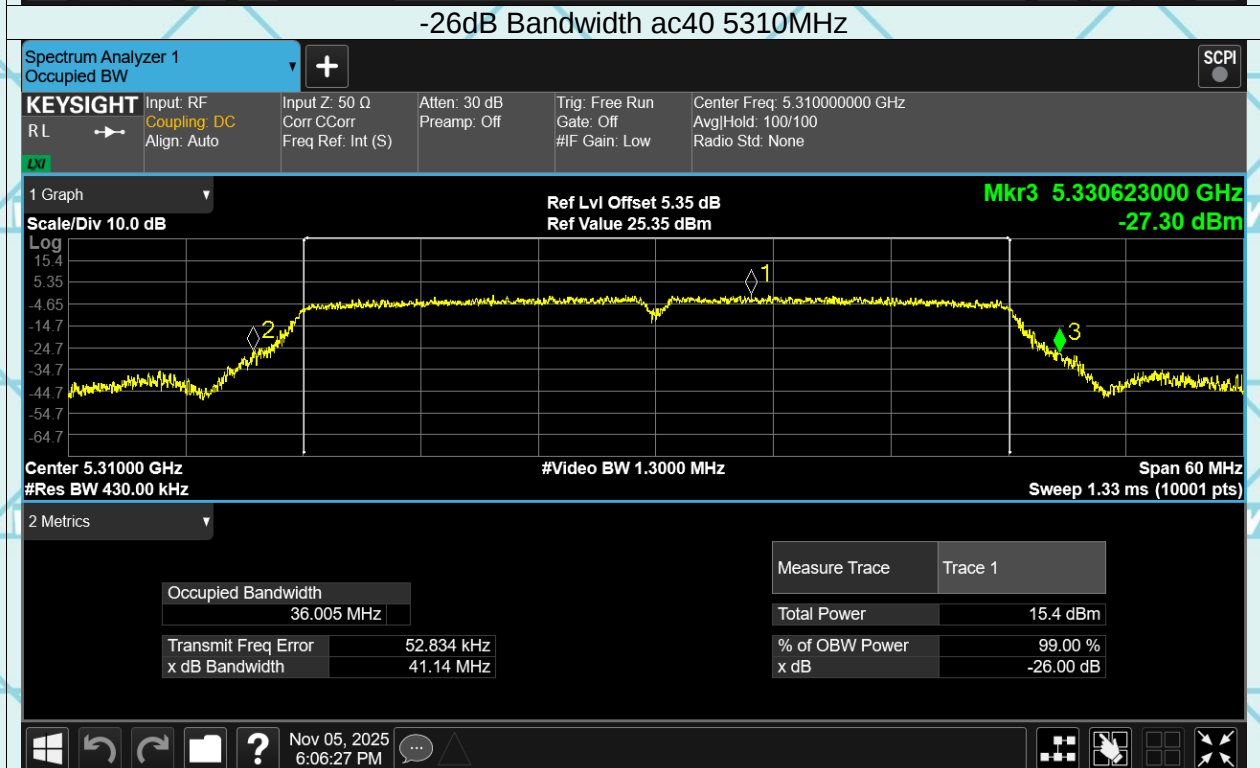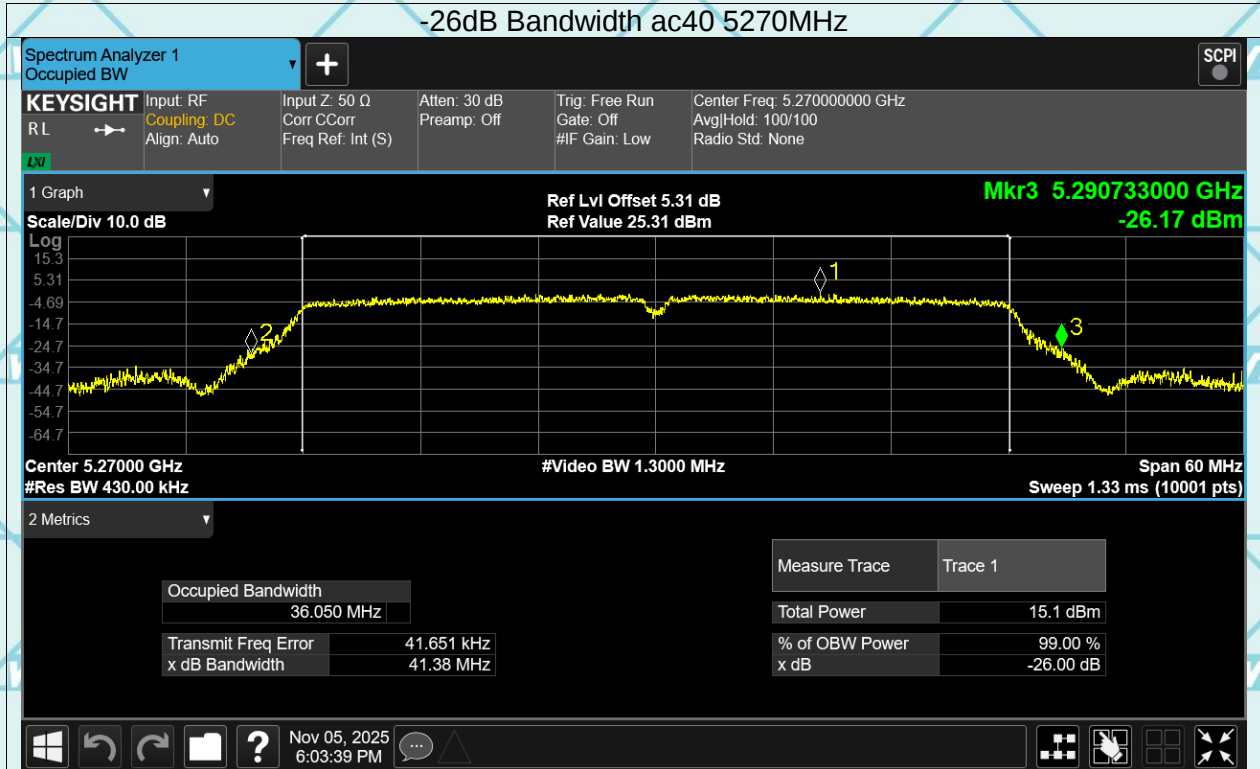


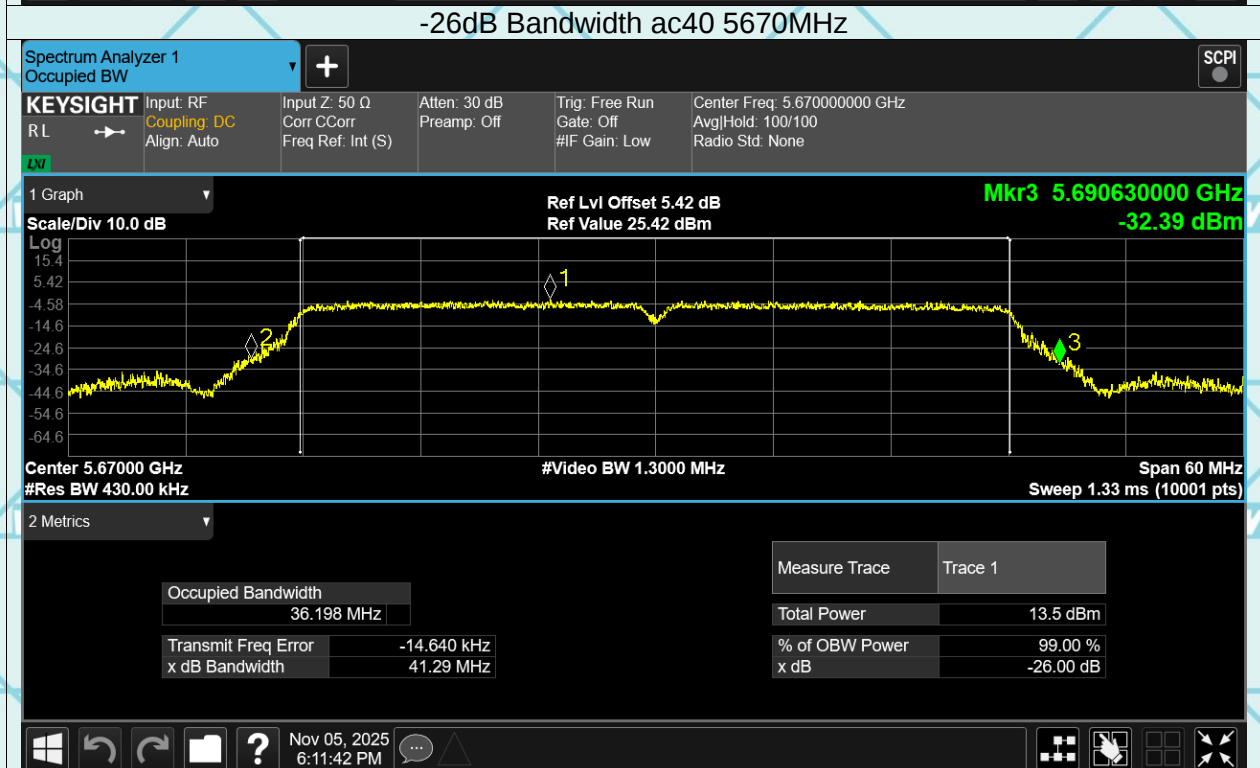
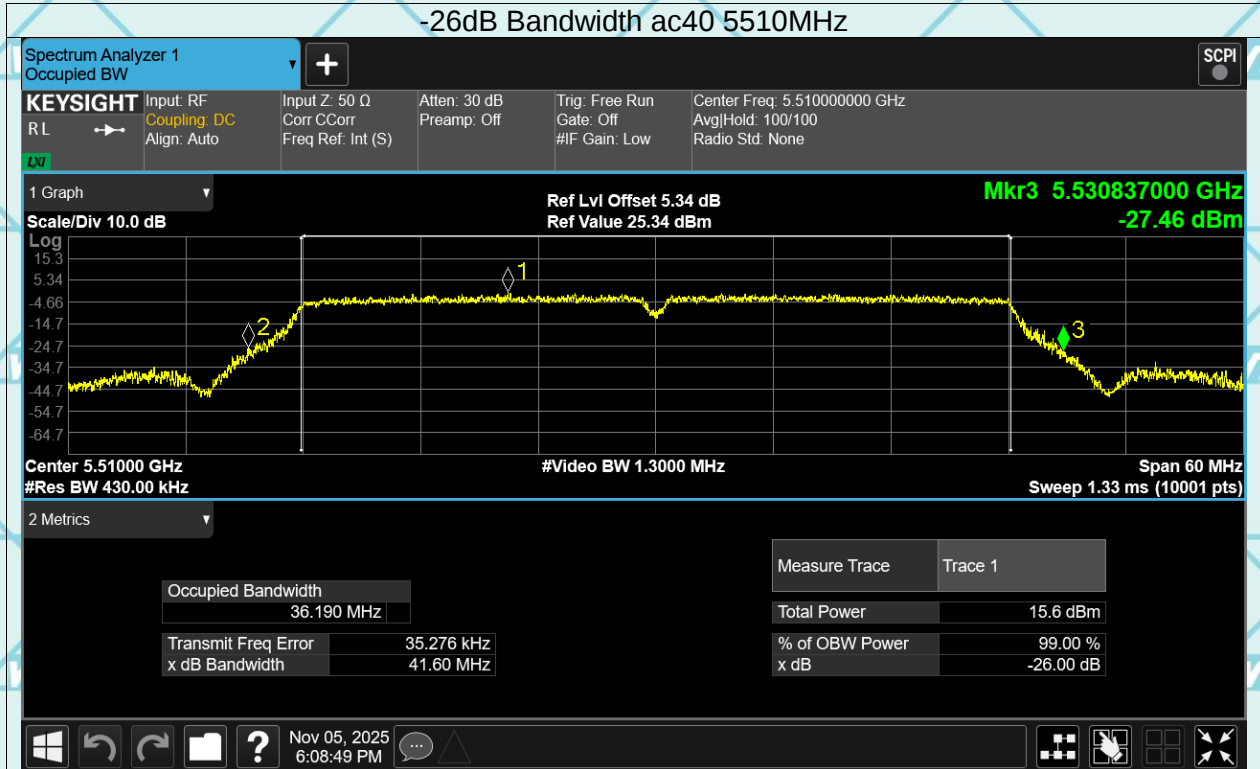




-26dB Bandwidth ac80 5210MHz


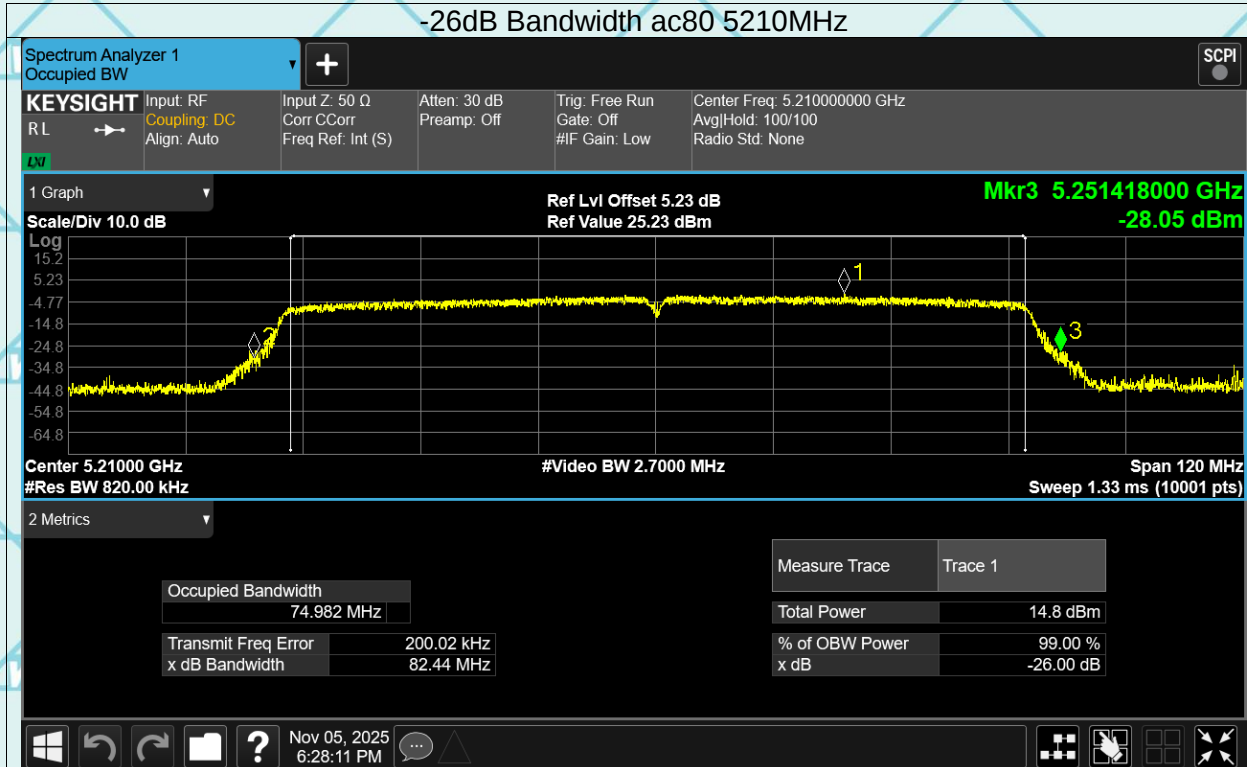




-26dB Bandwidth ac80 5290MHz


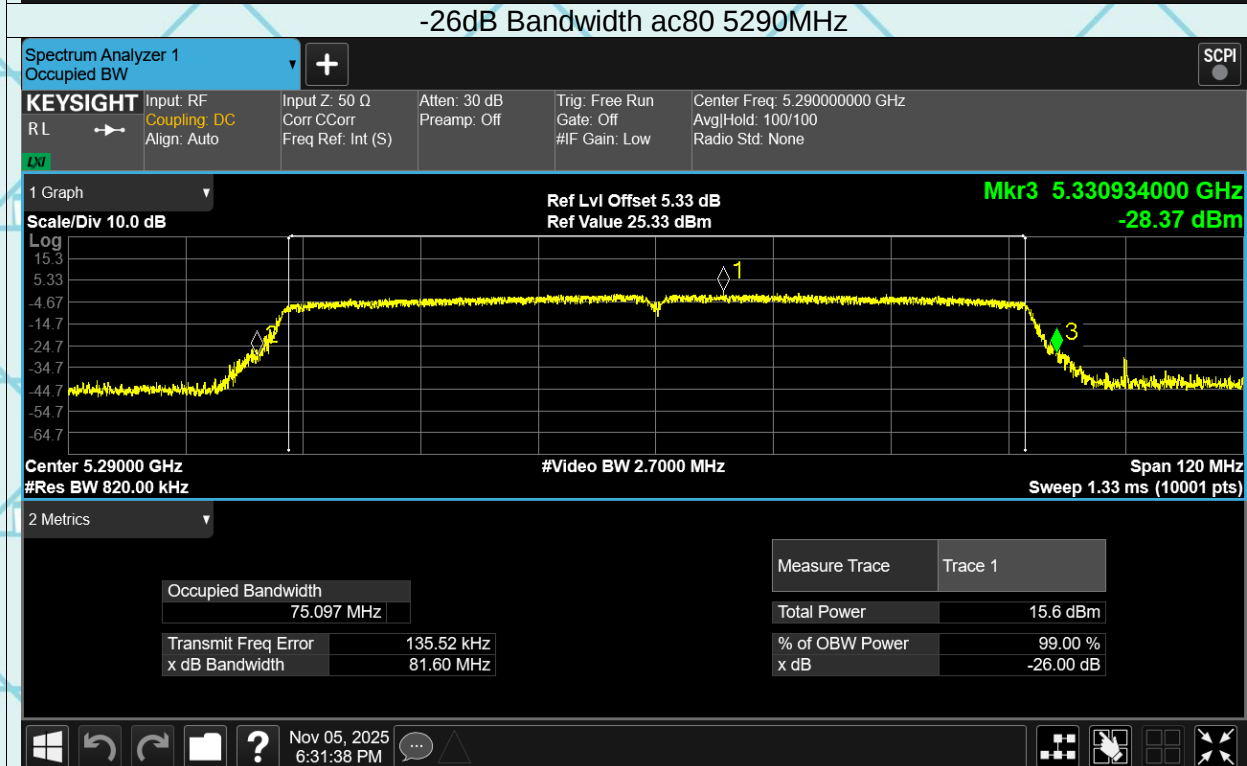


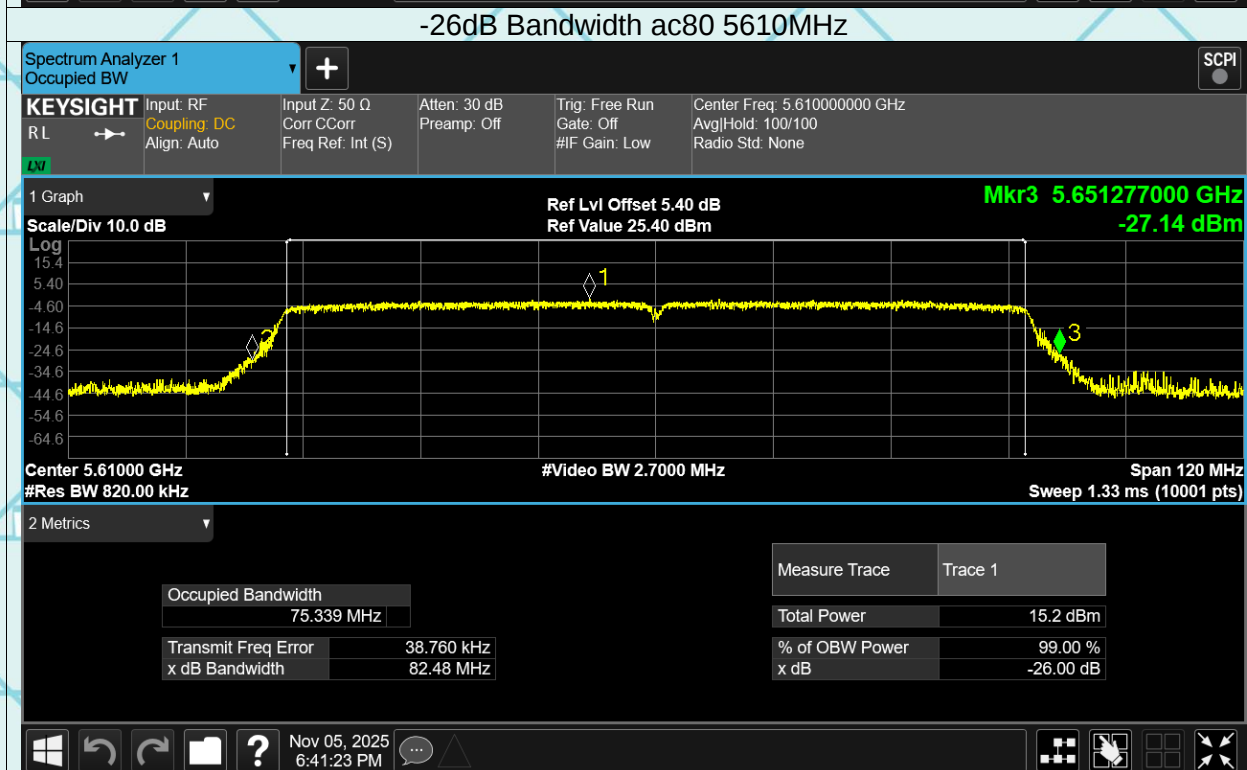
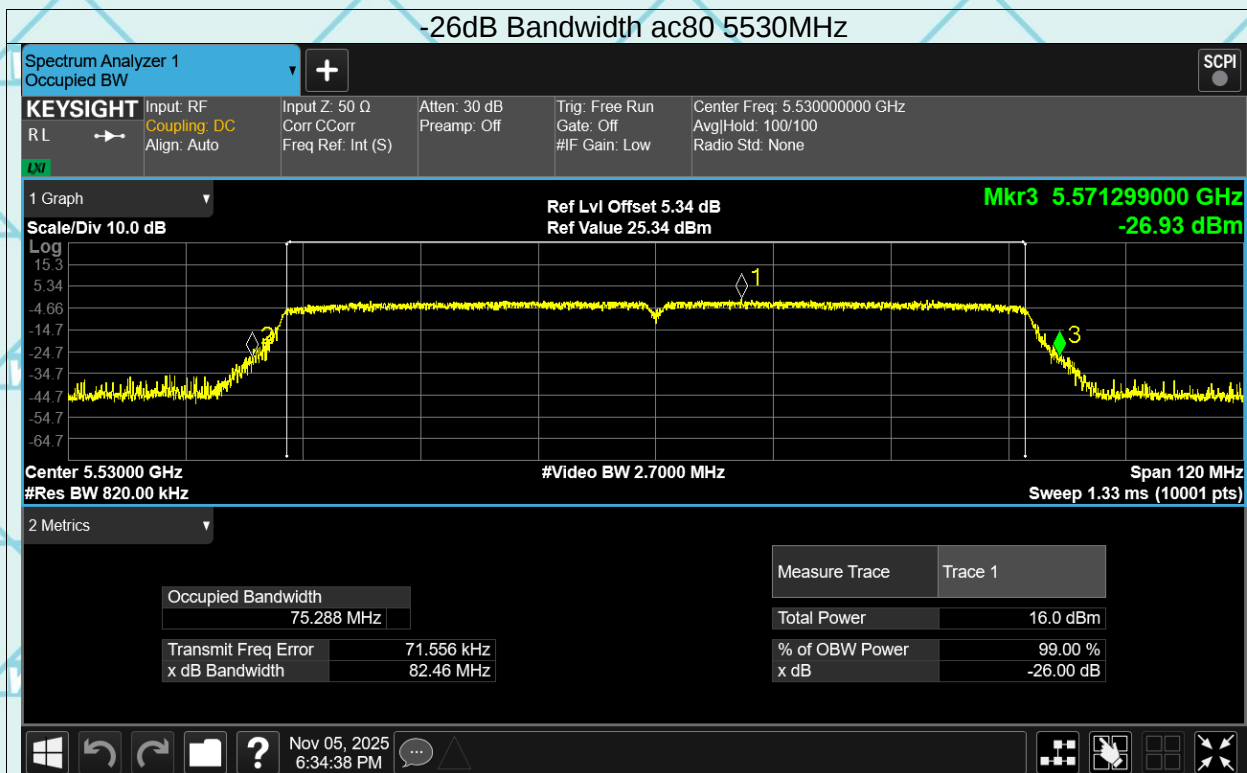


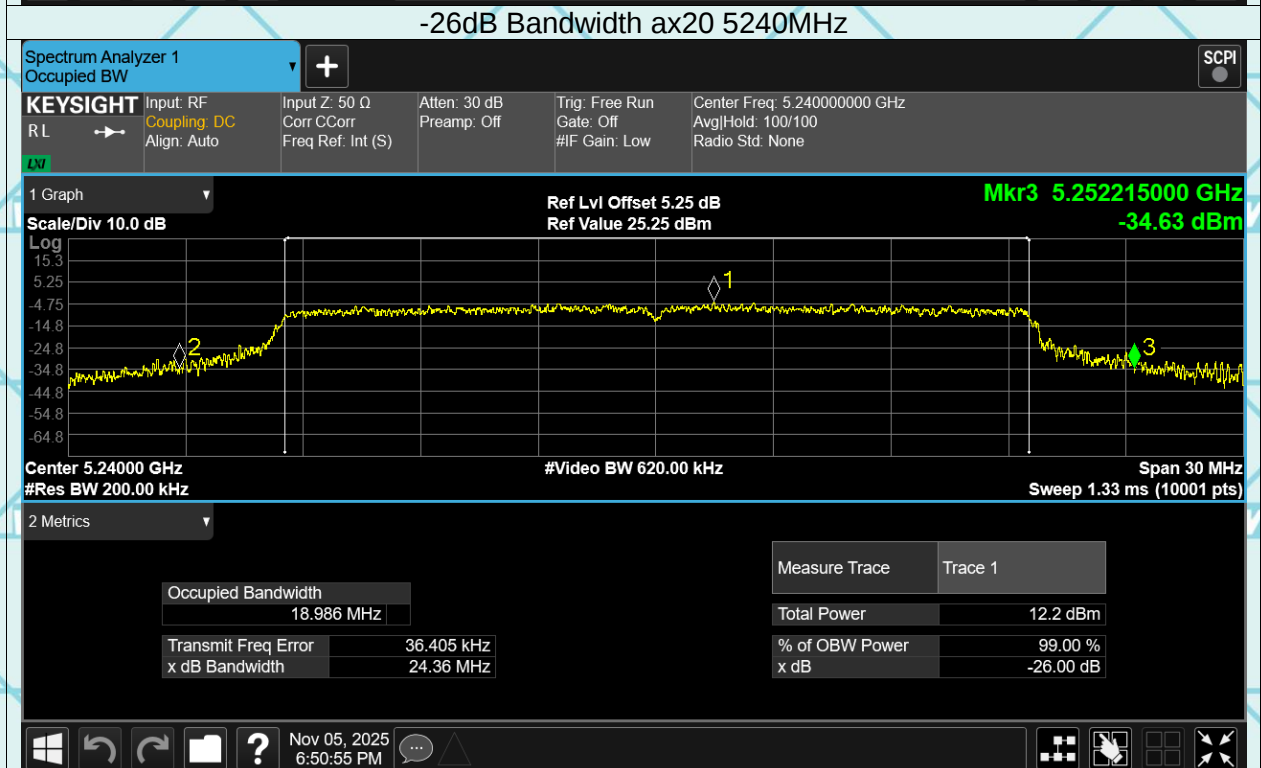
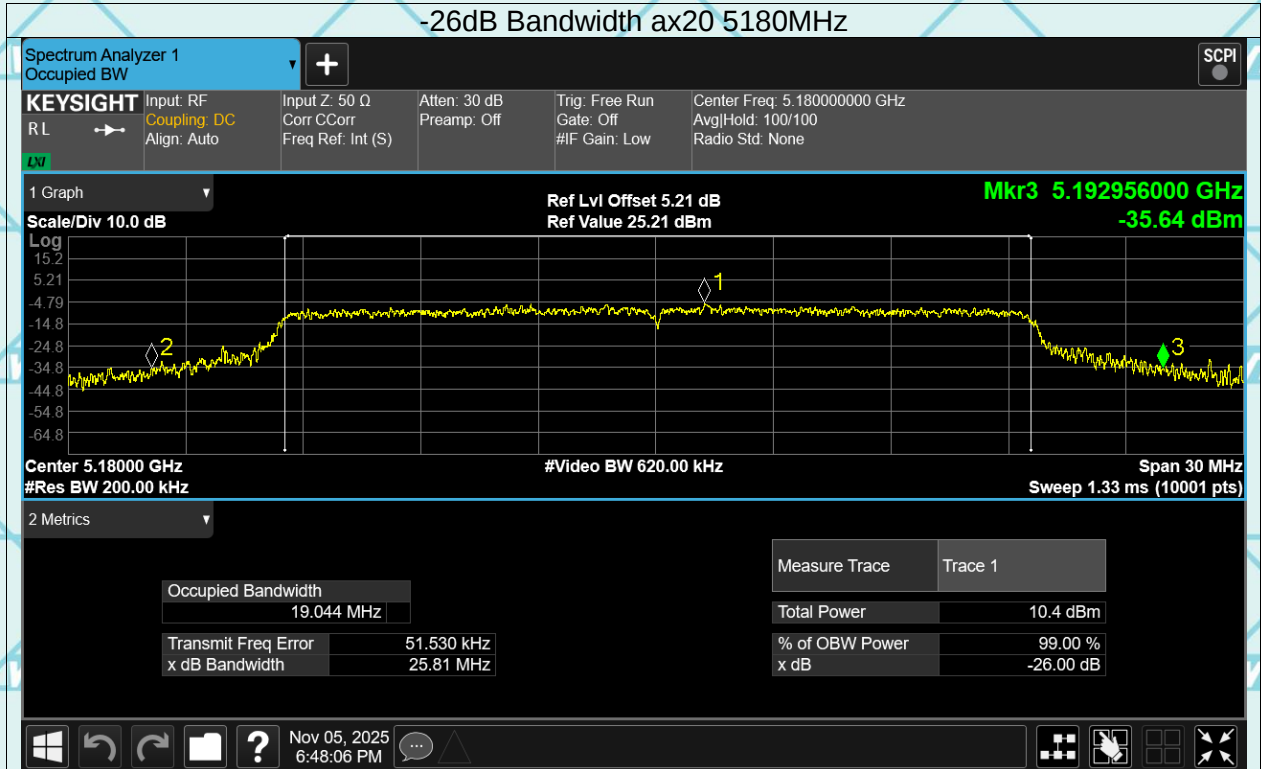


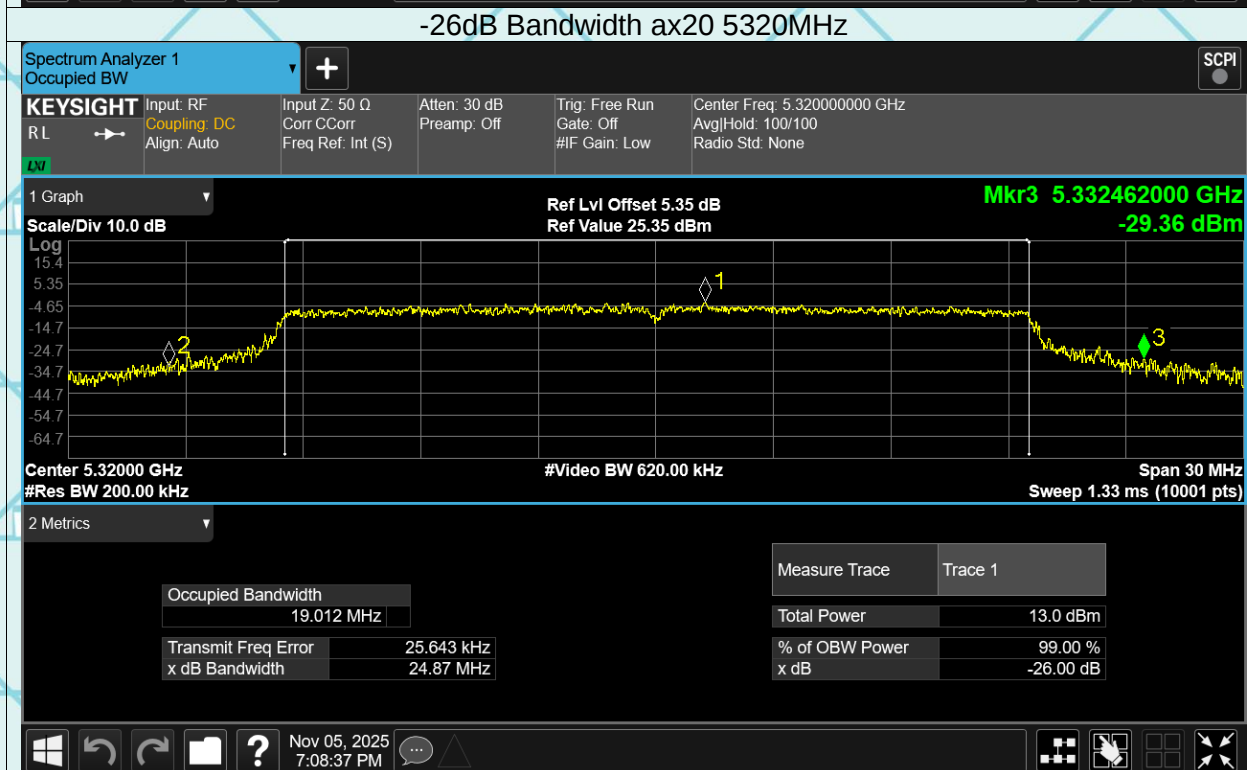
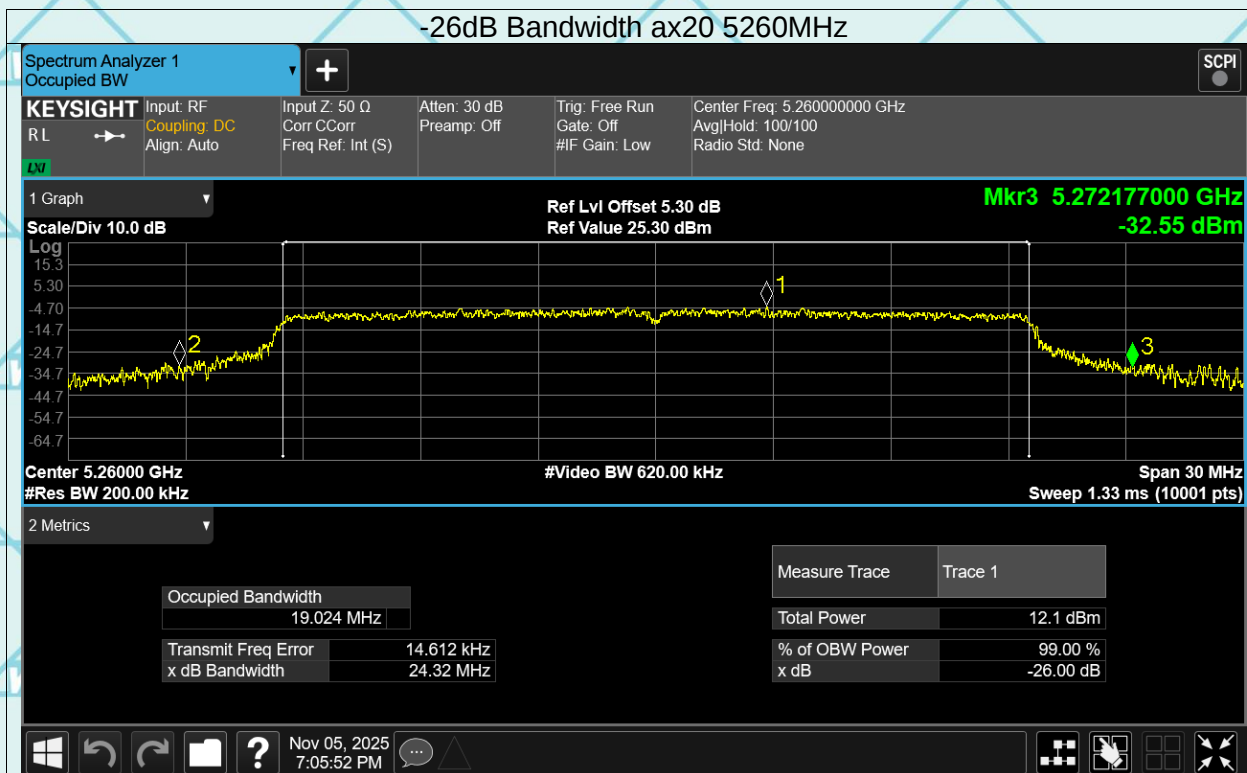


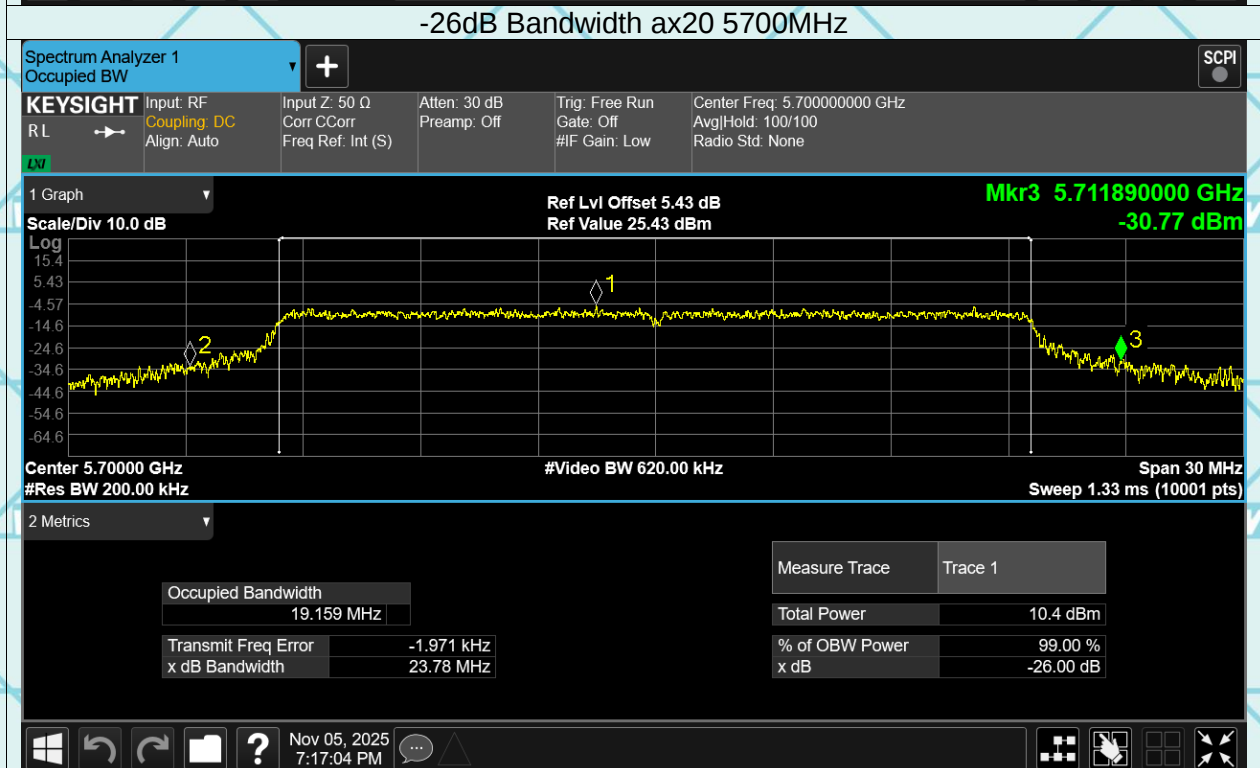
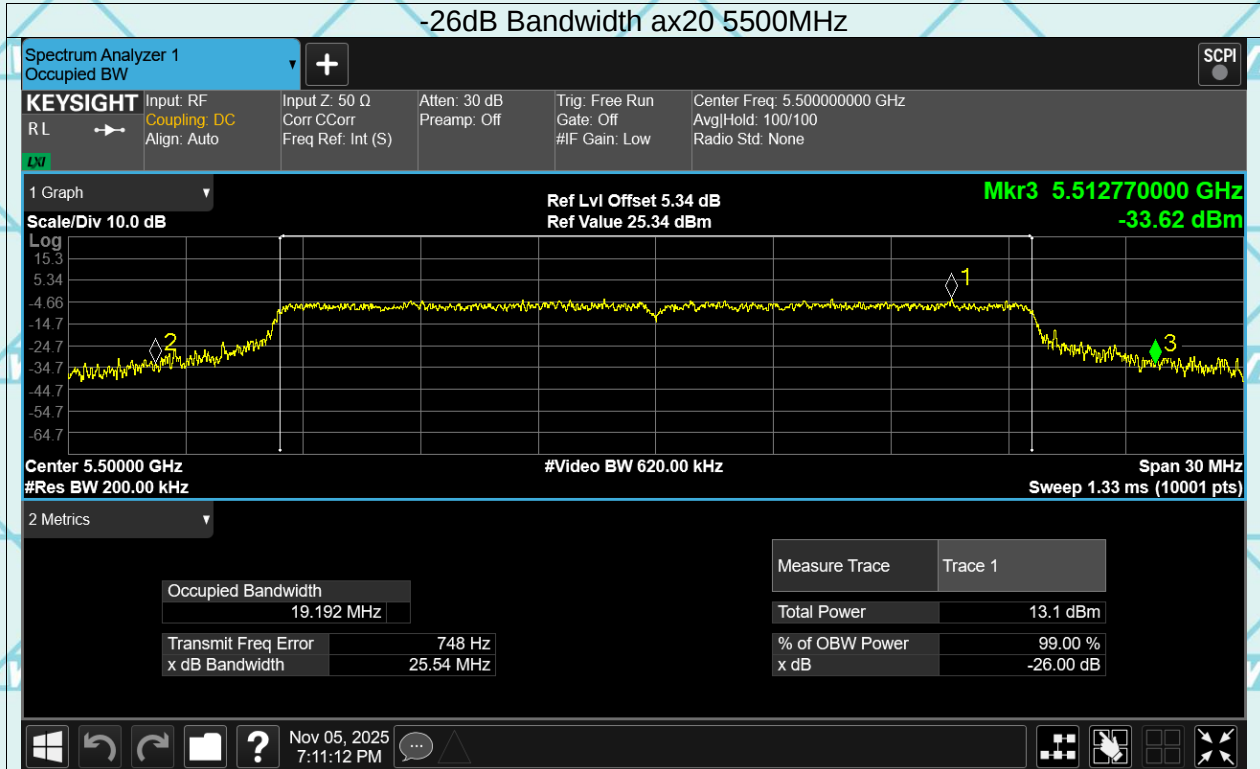


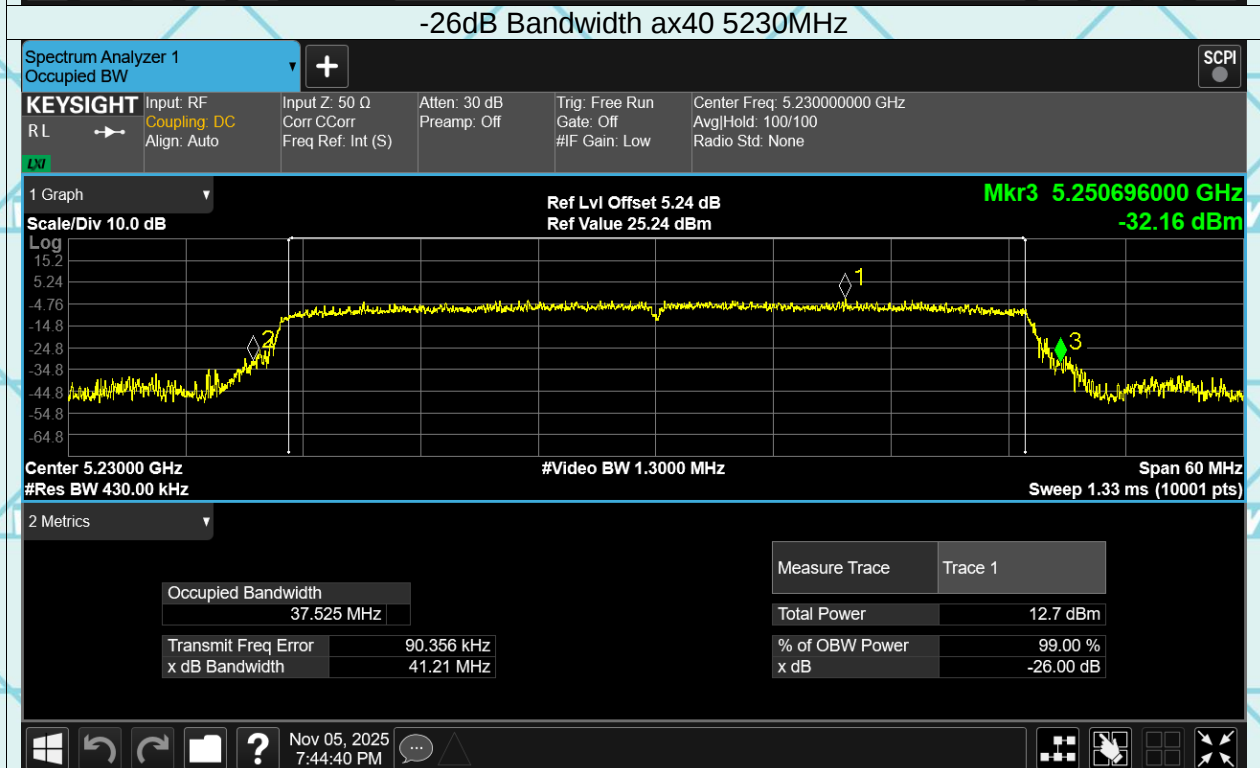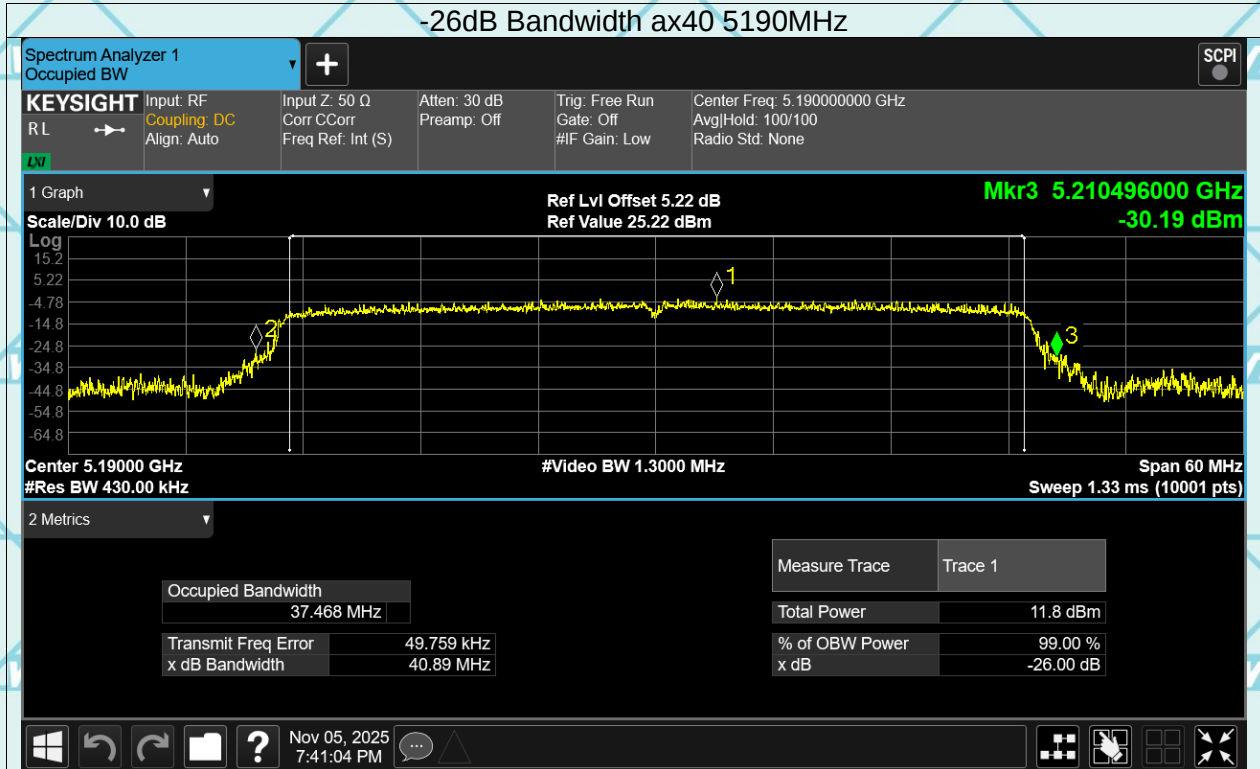

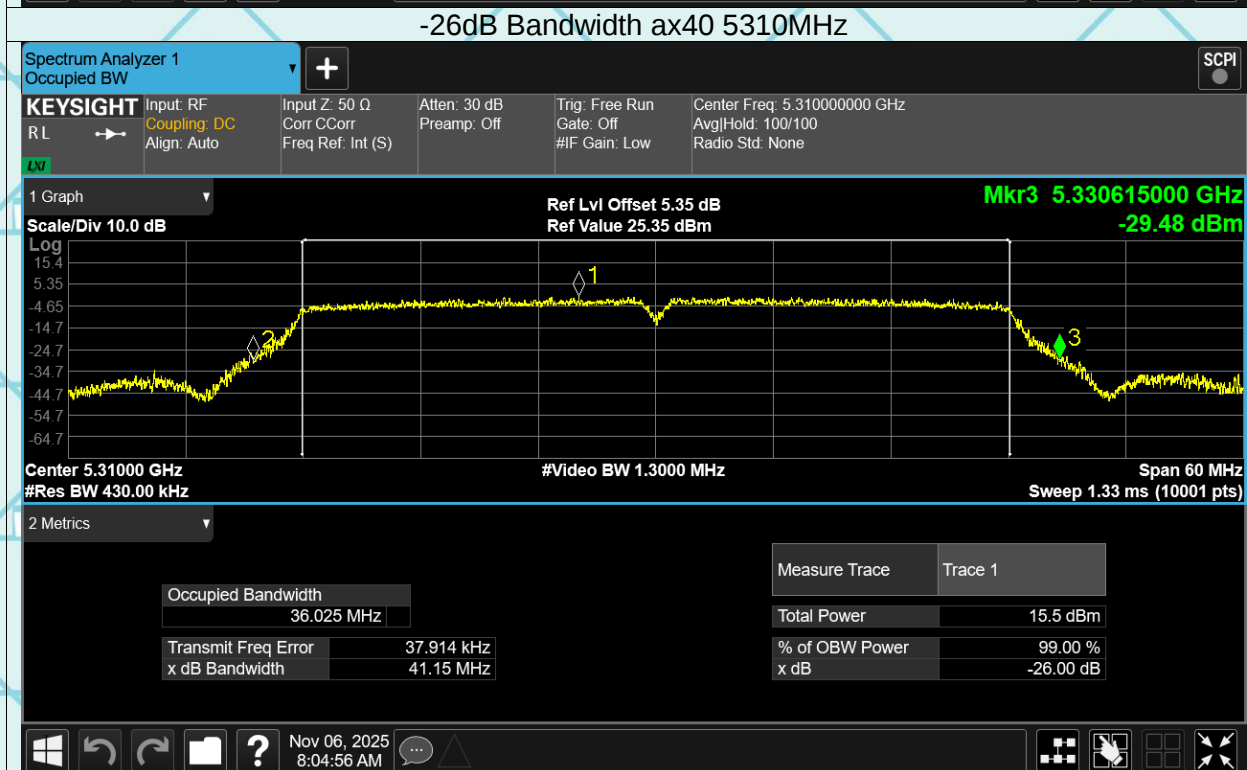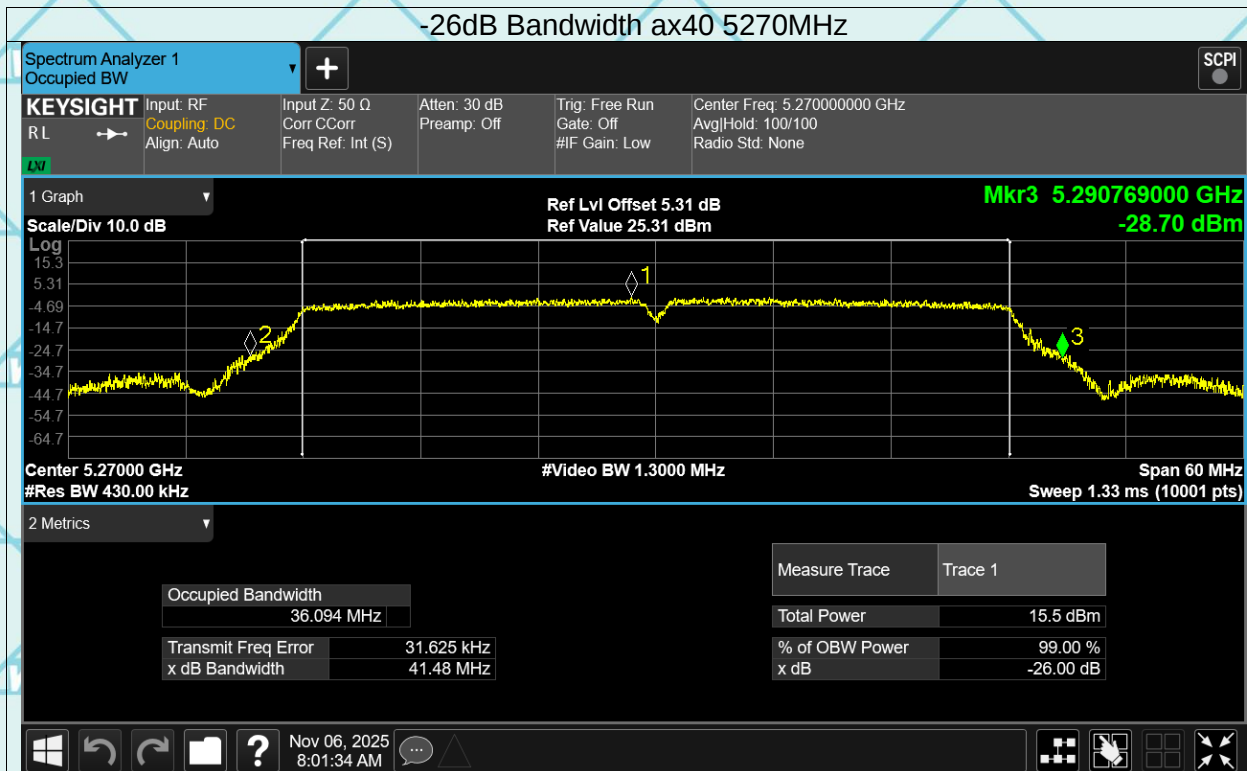

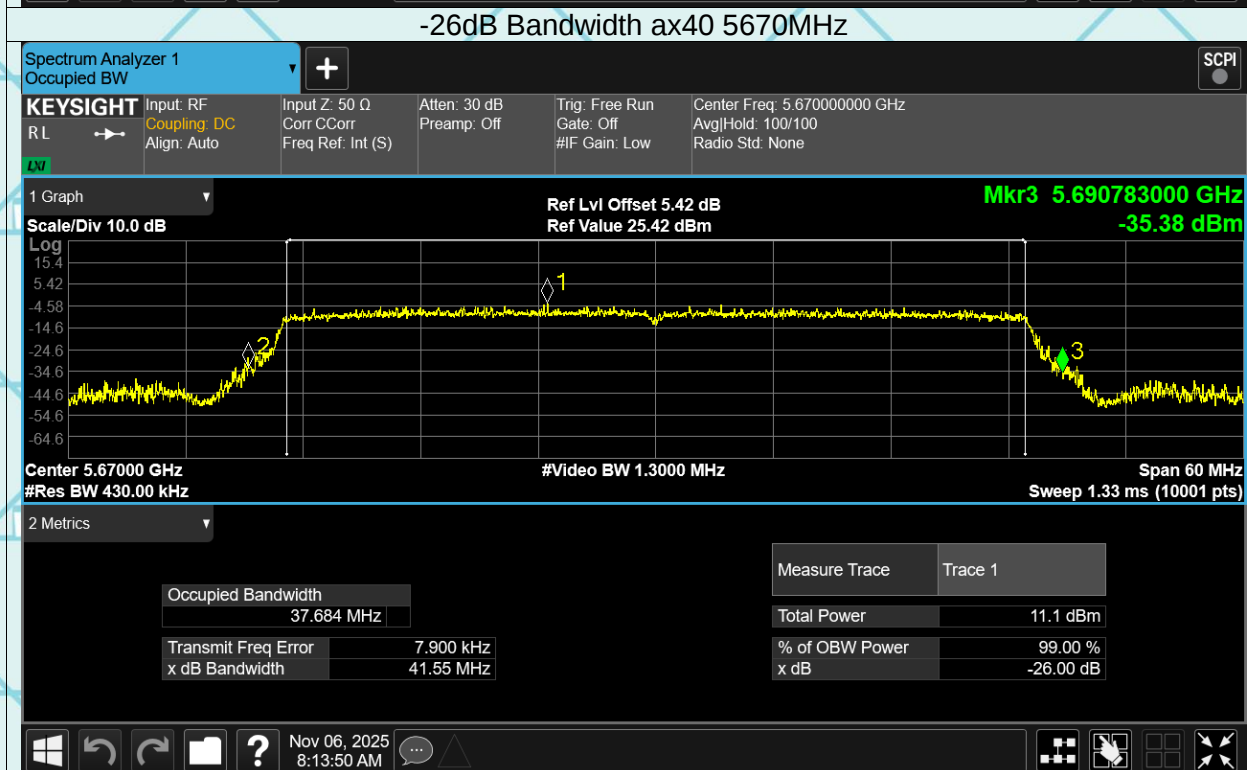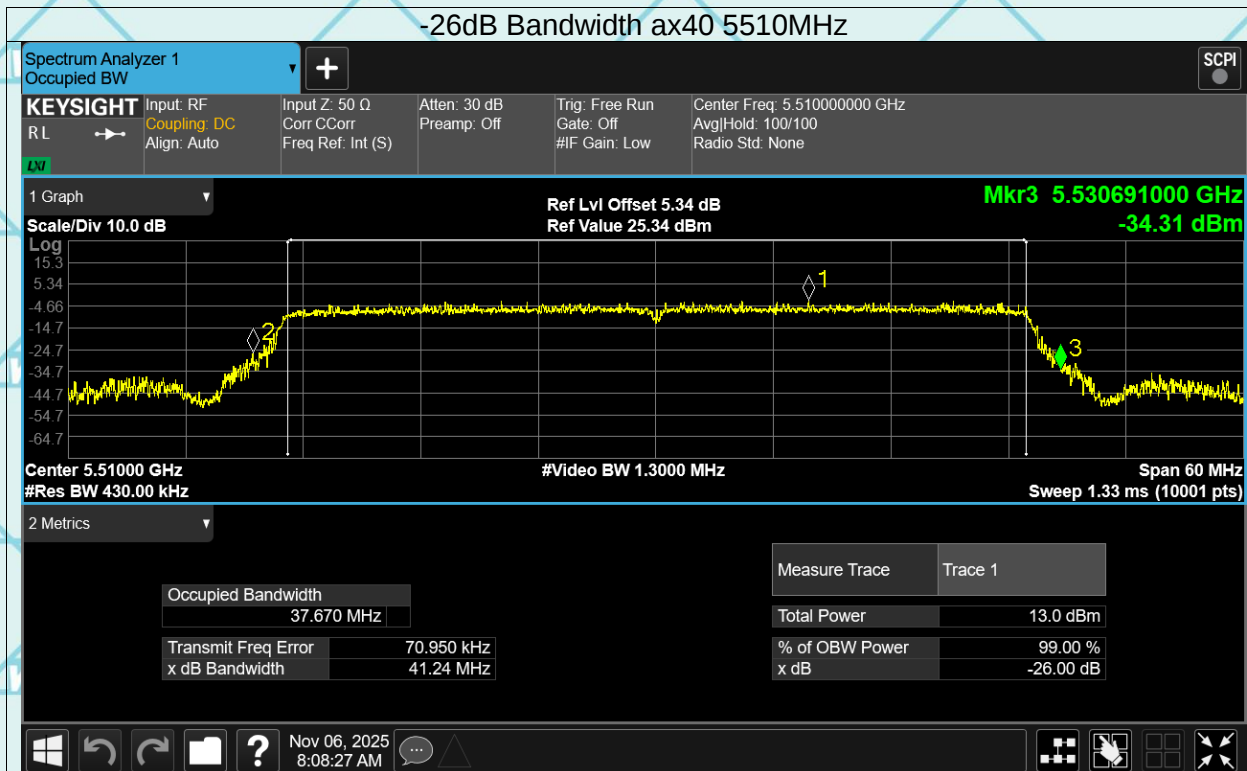


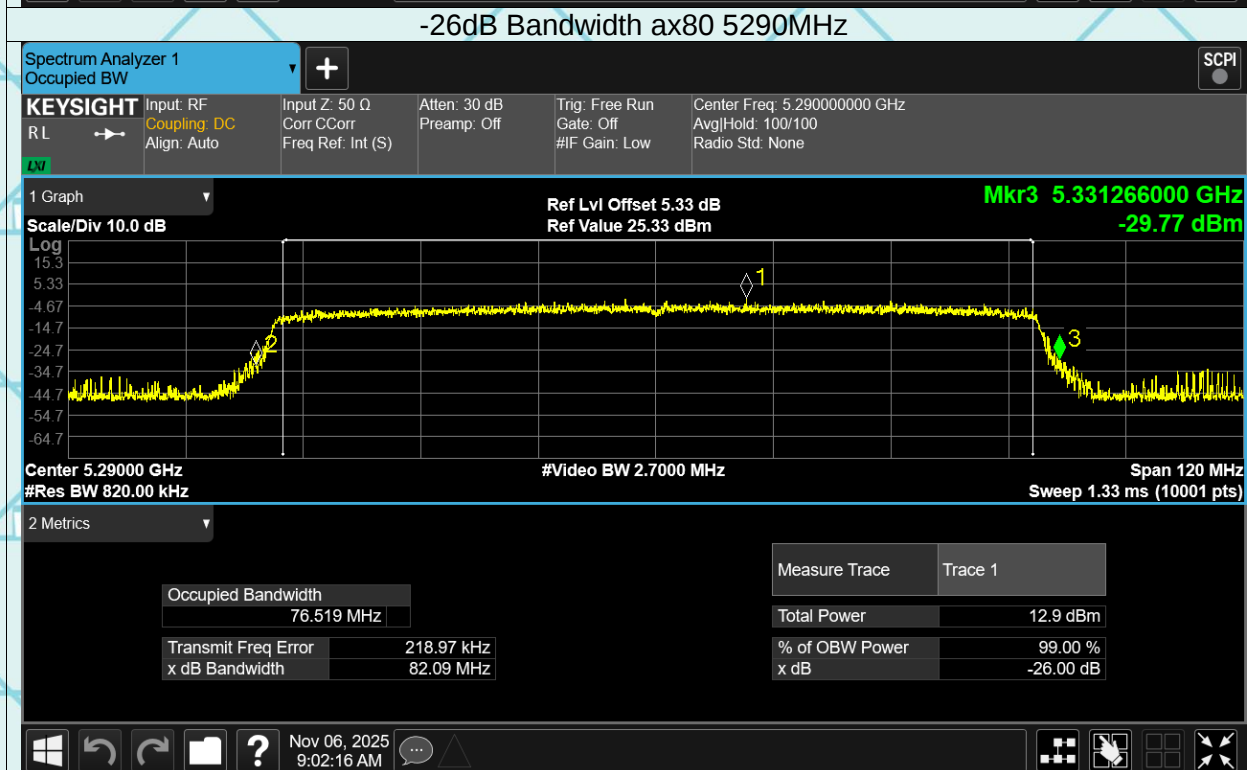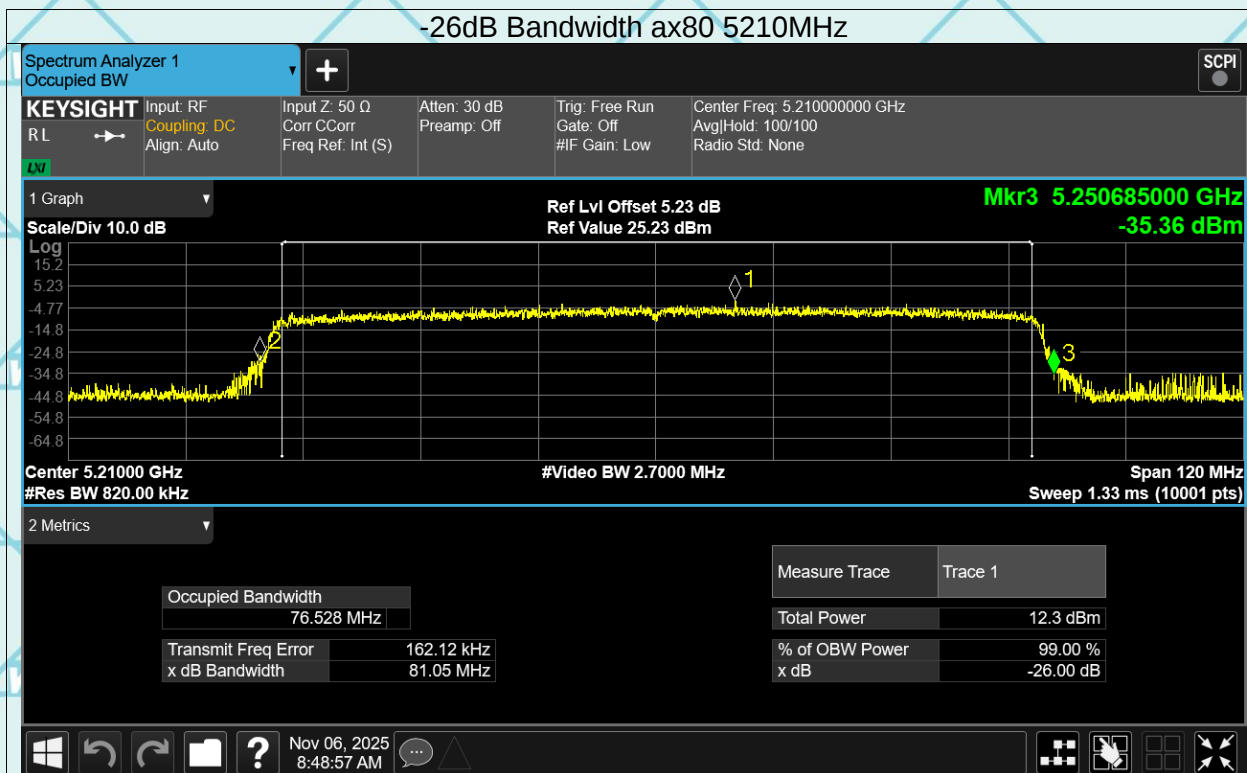

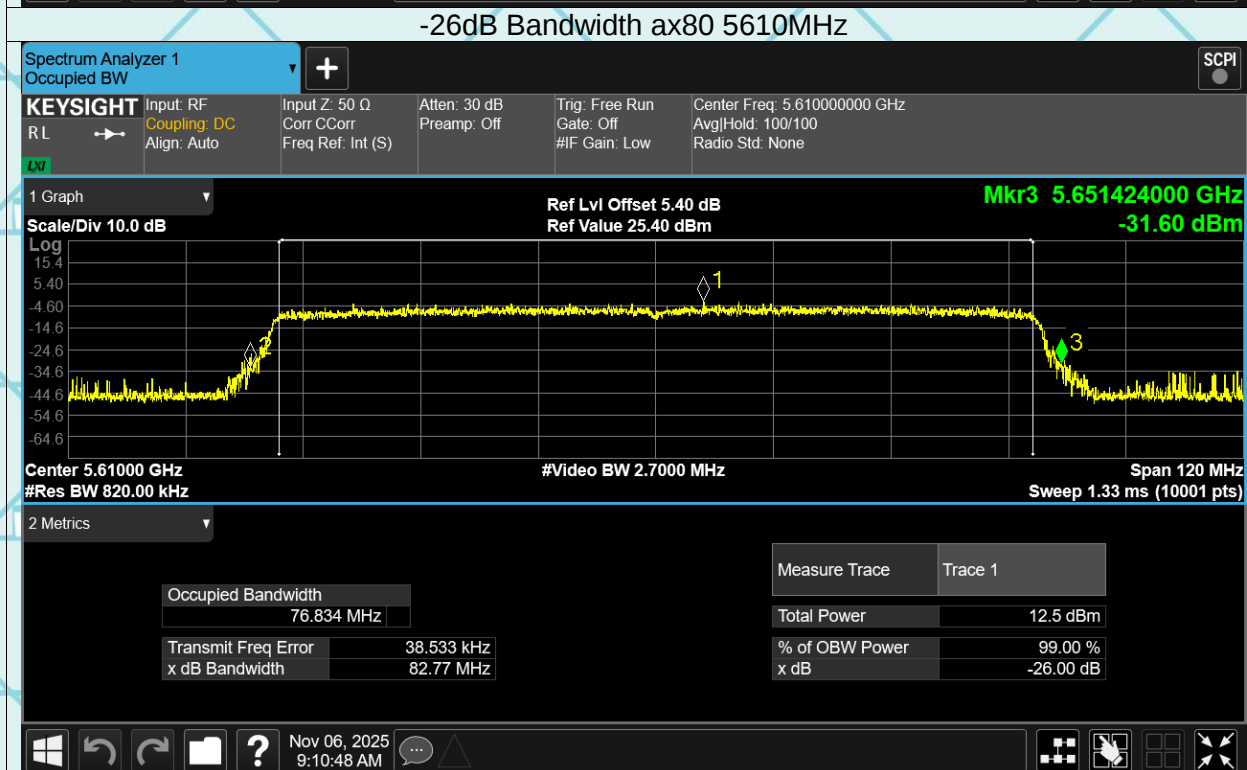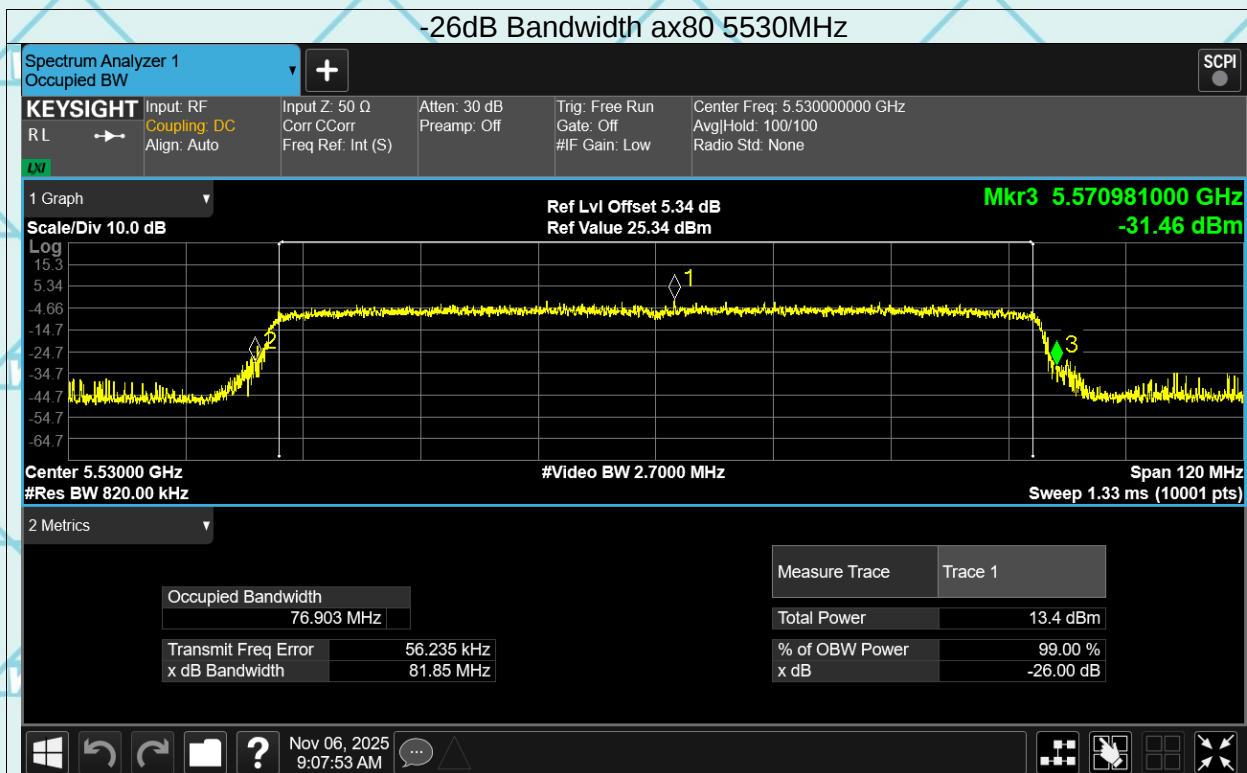




Test Graphs



-6dB Bandwidth a 5745MHz


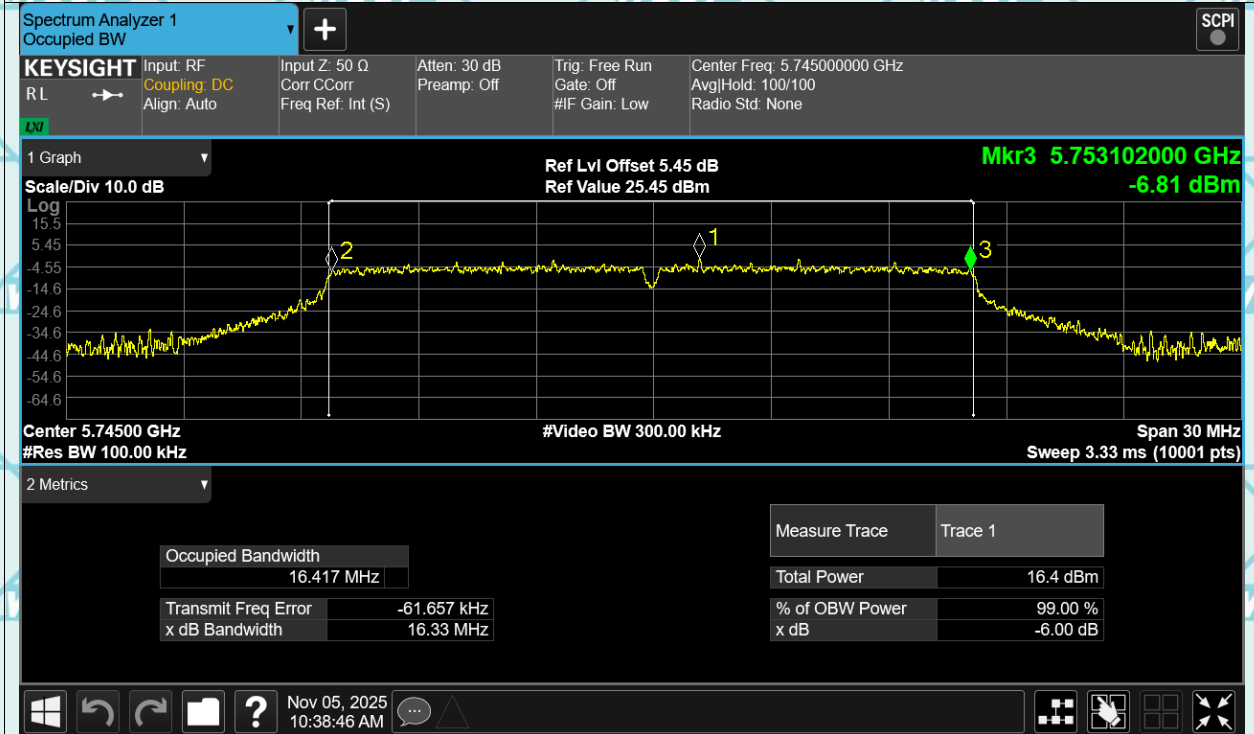




-6dB Bandwidth a 5825MHz


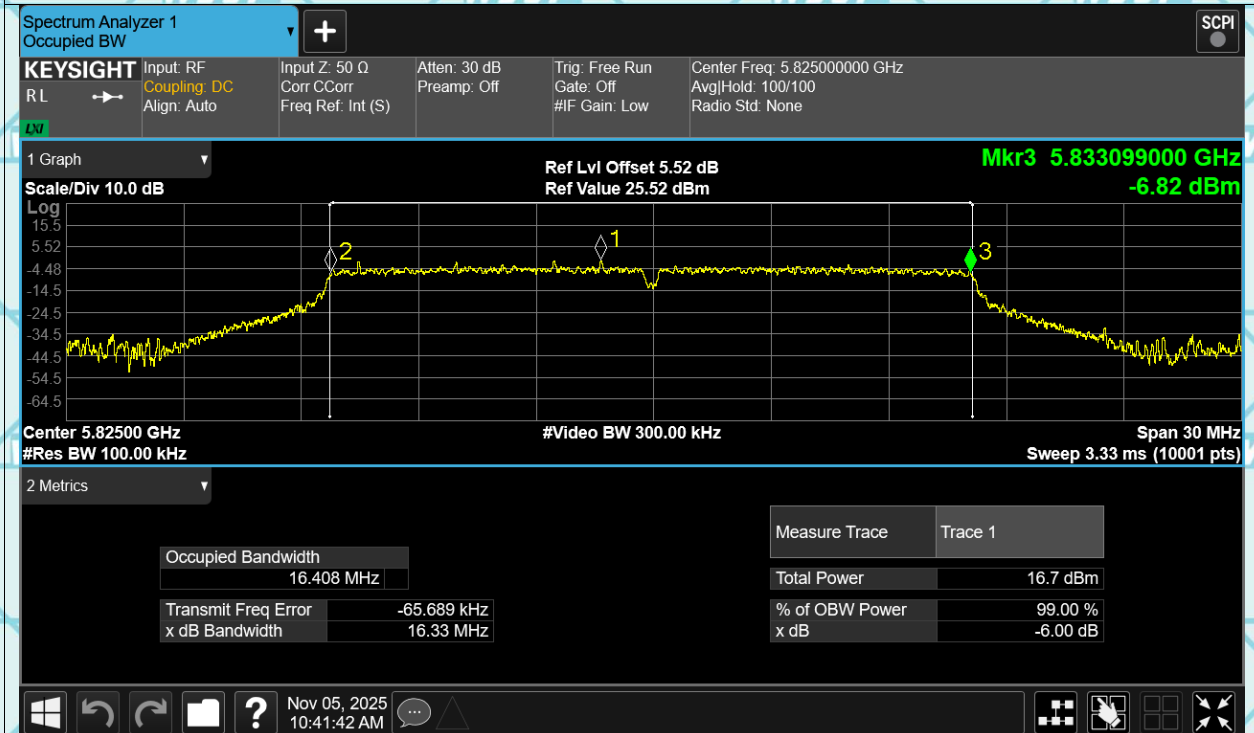


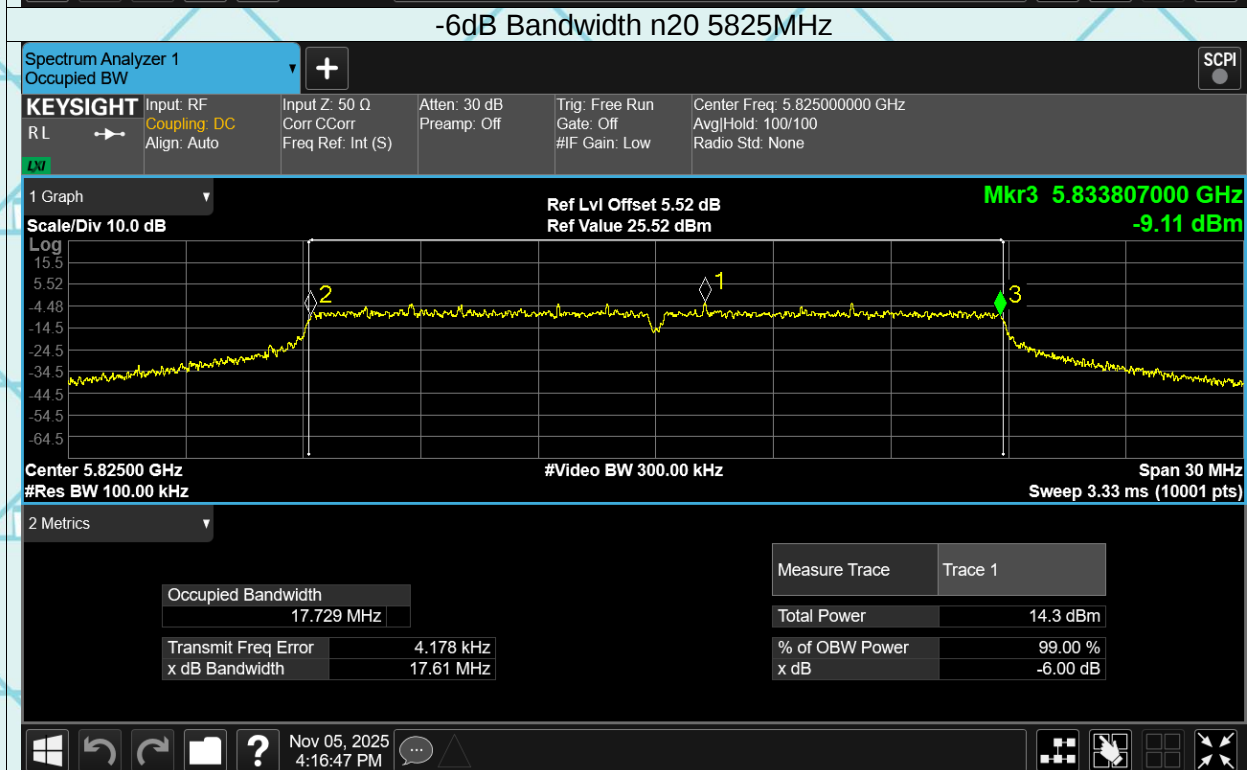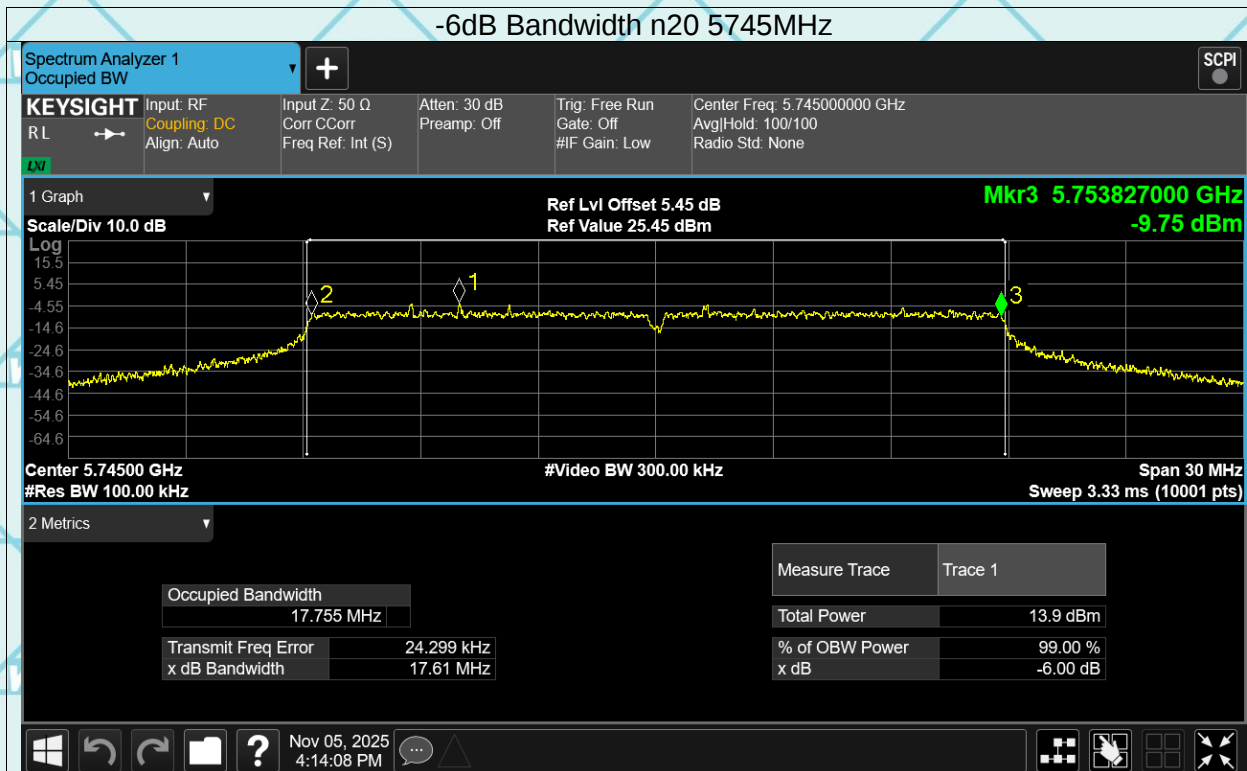

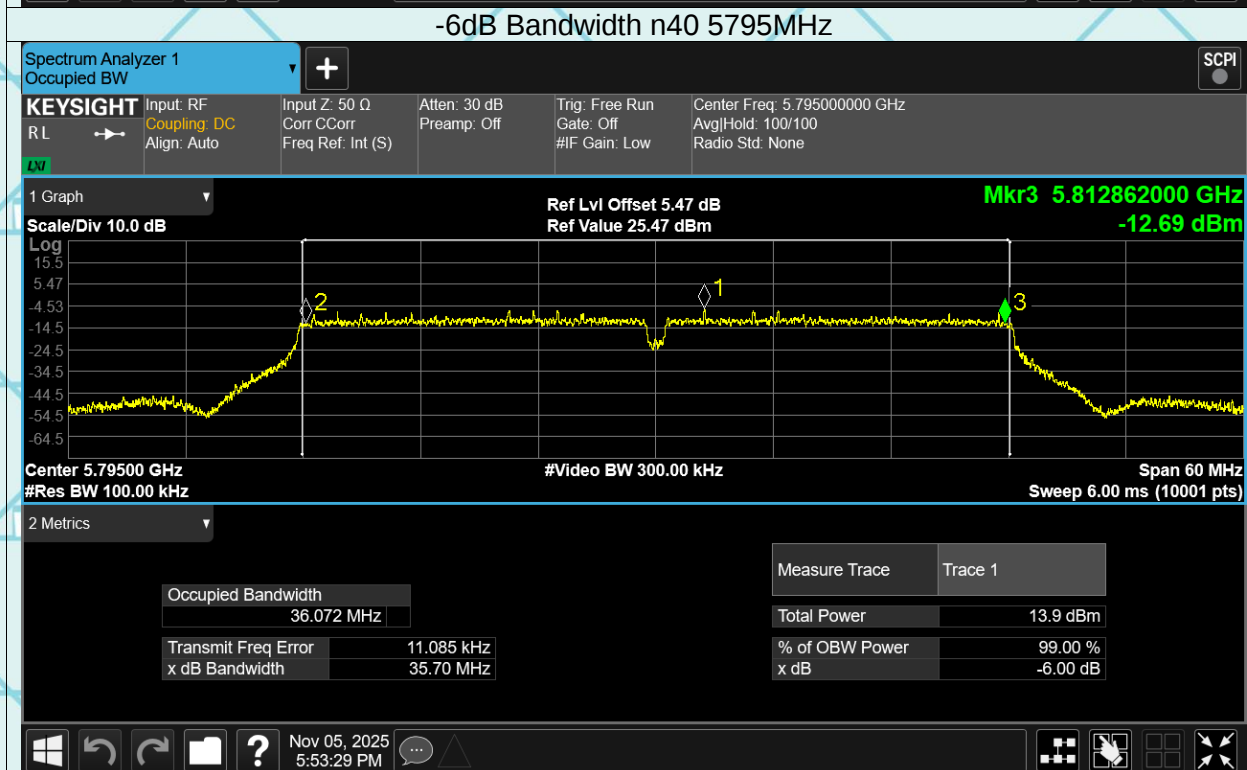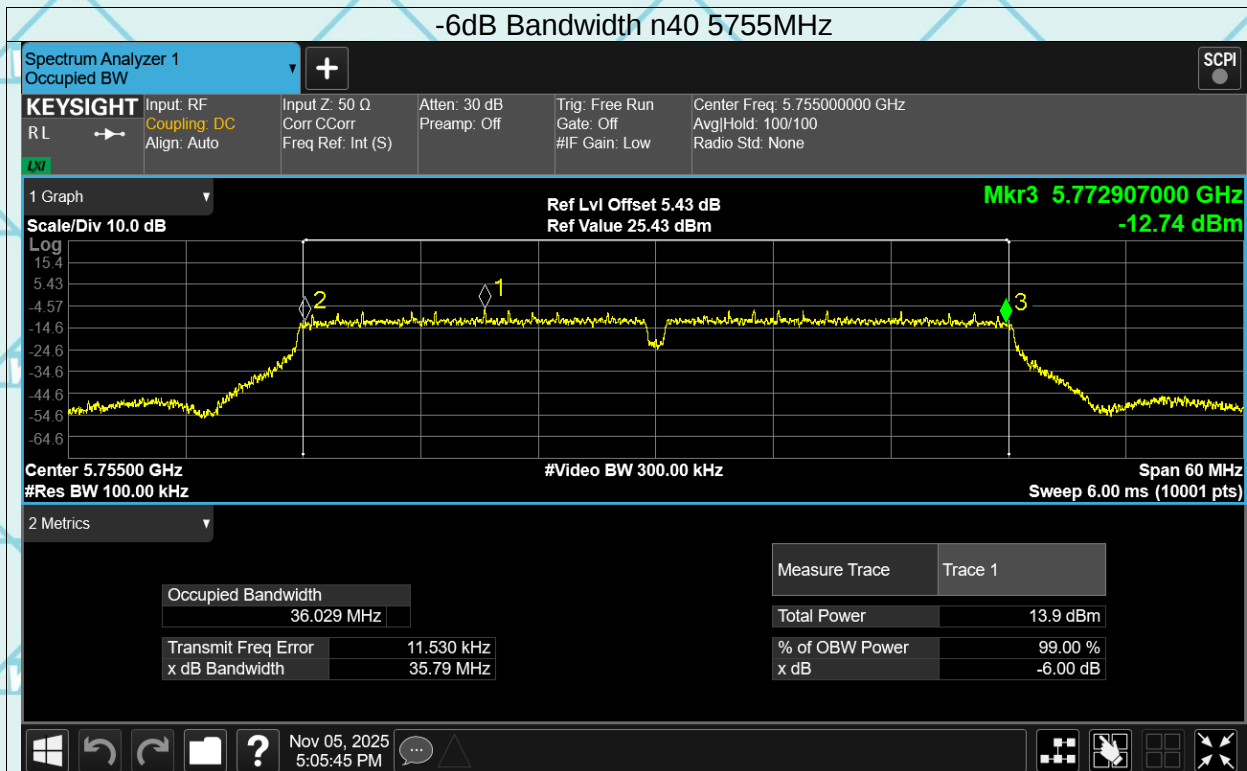


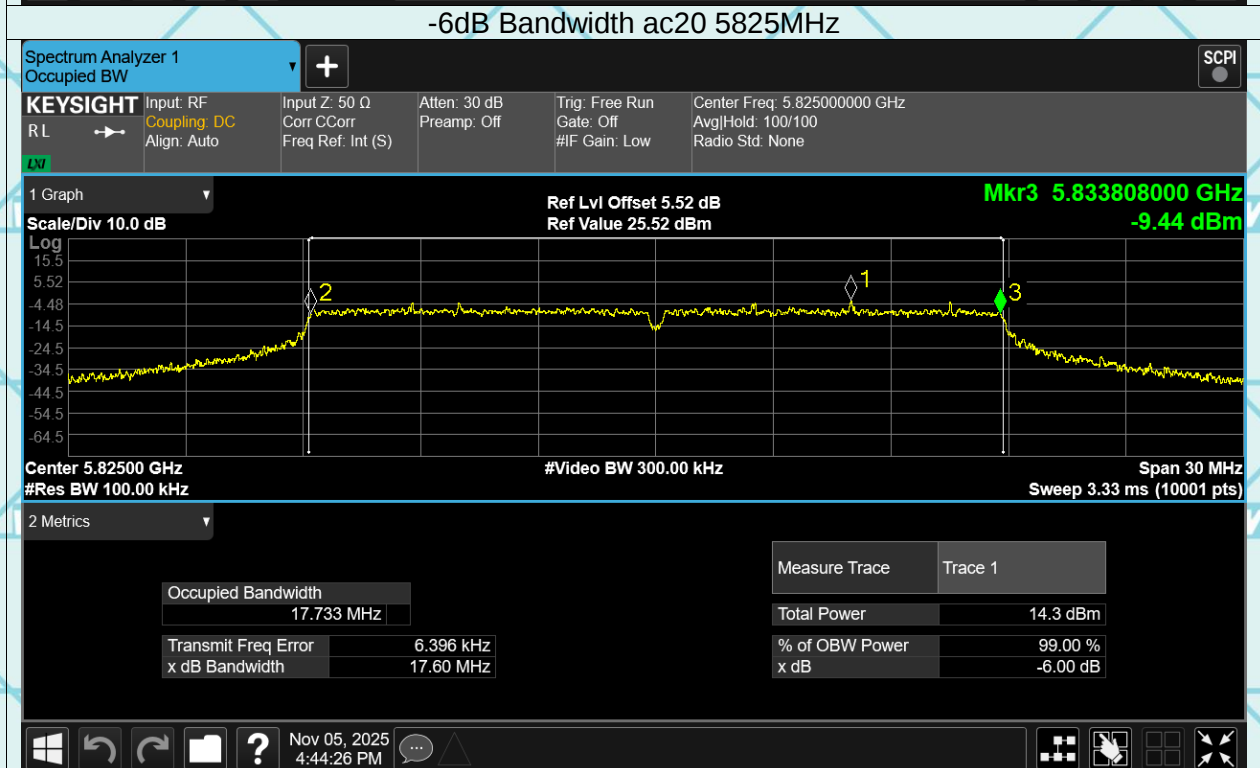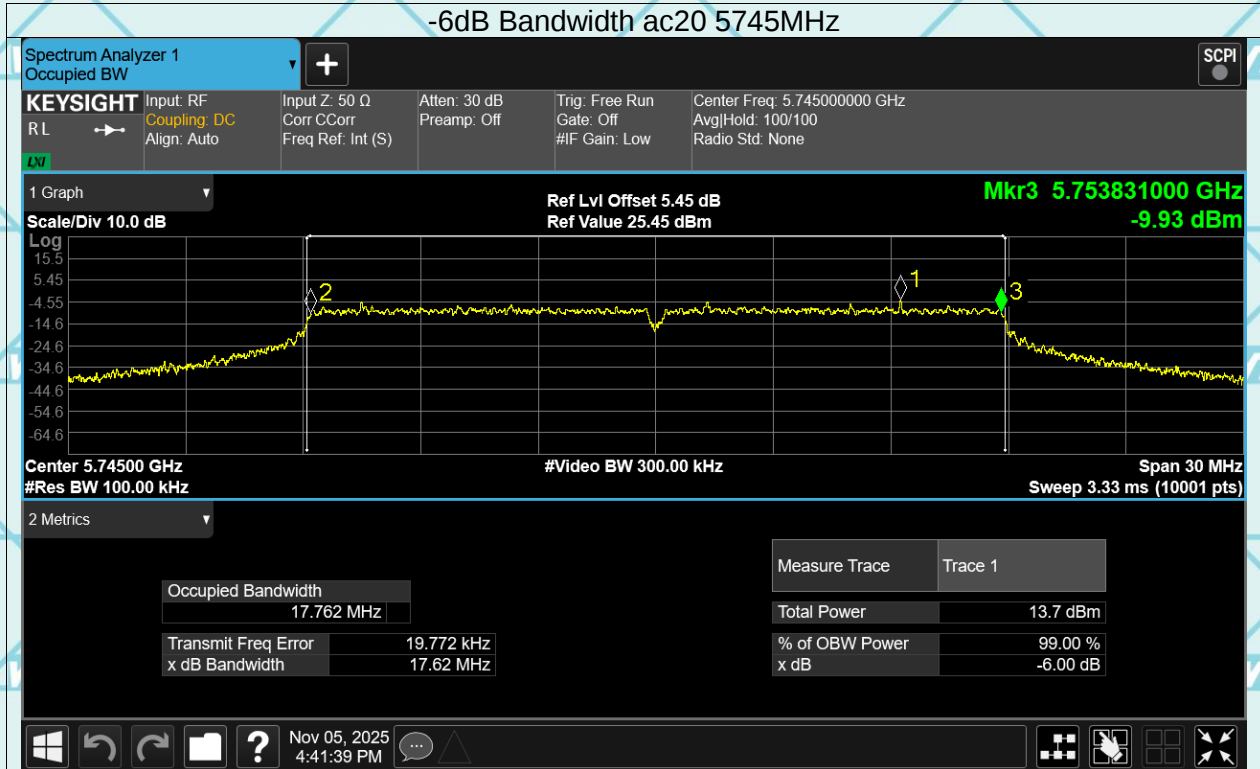

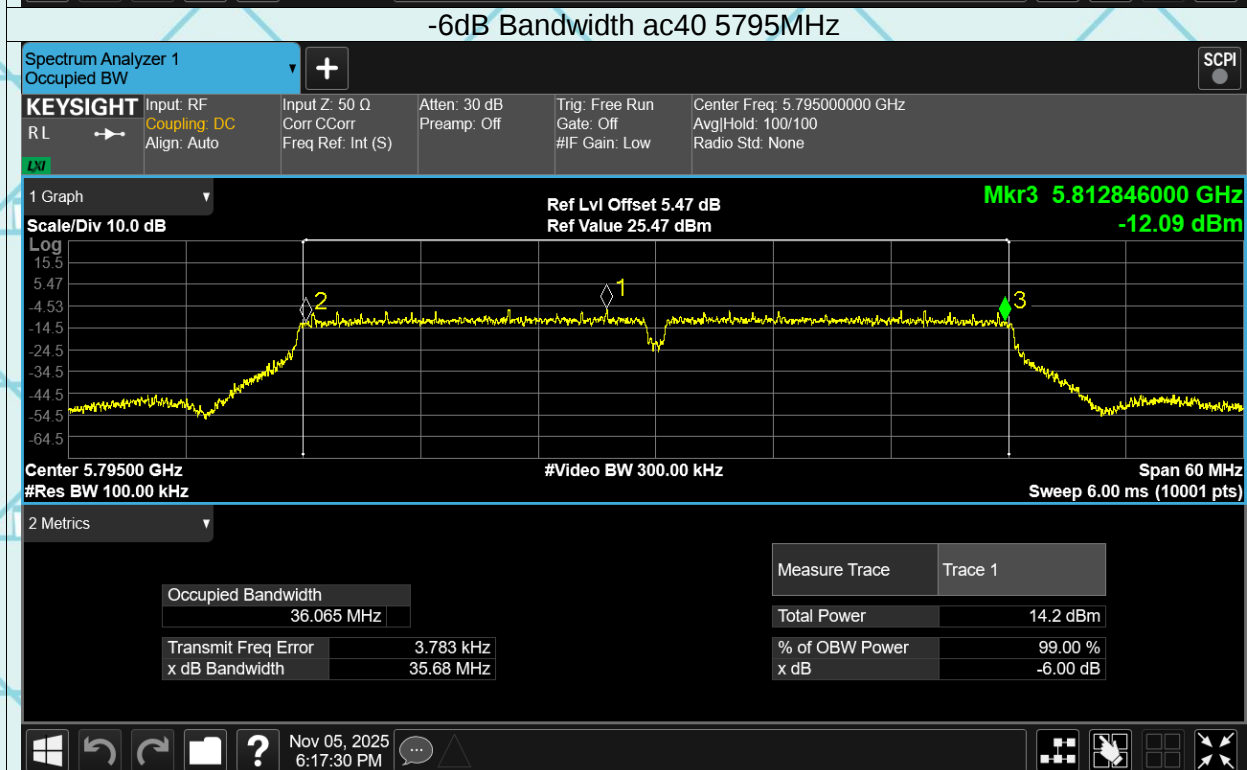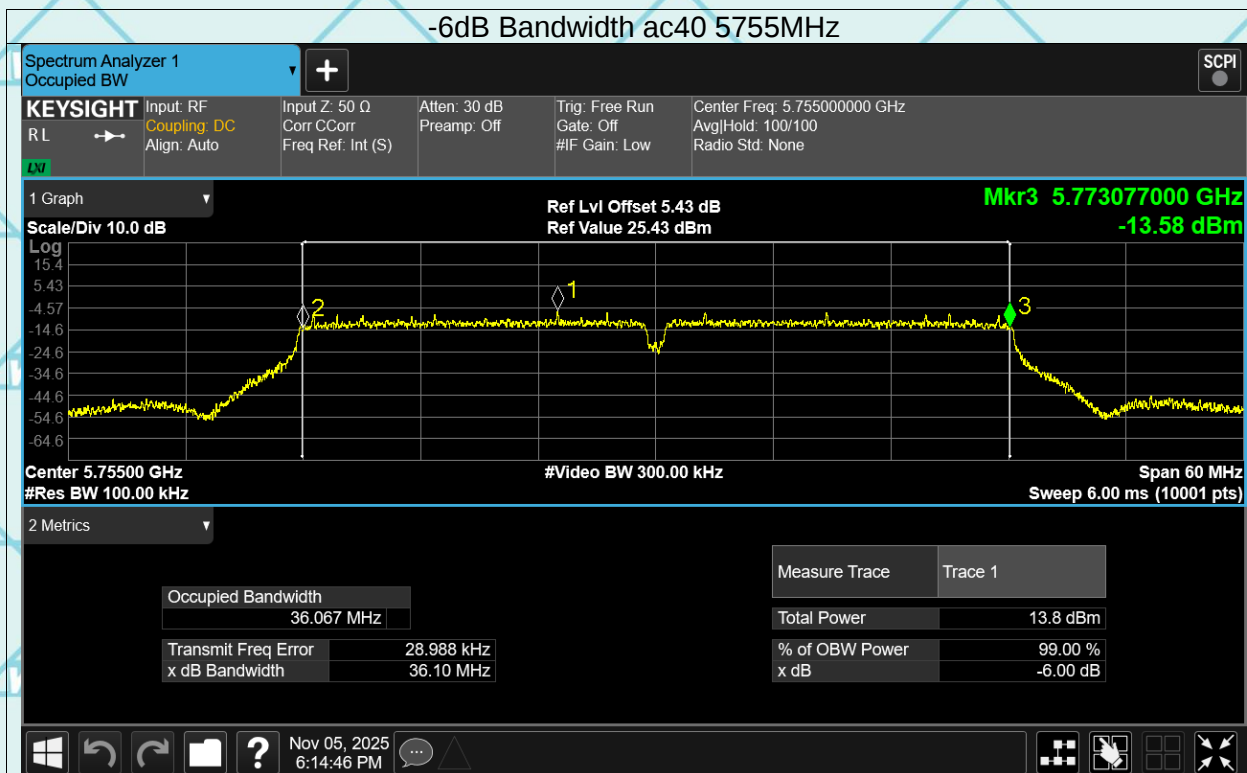


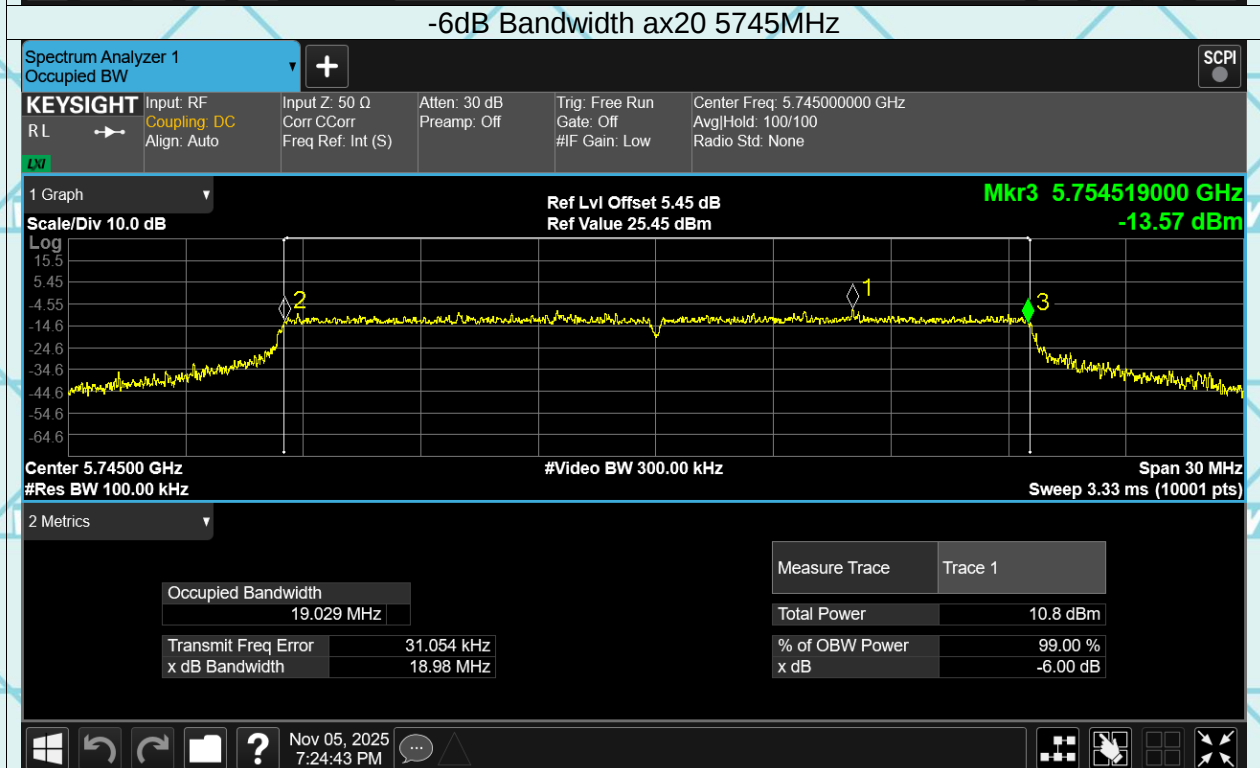
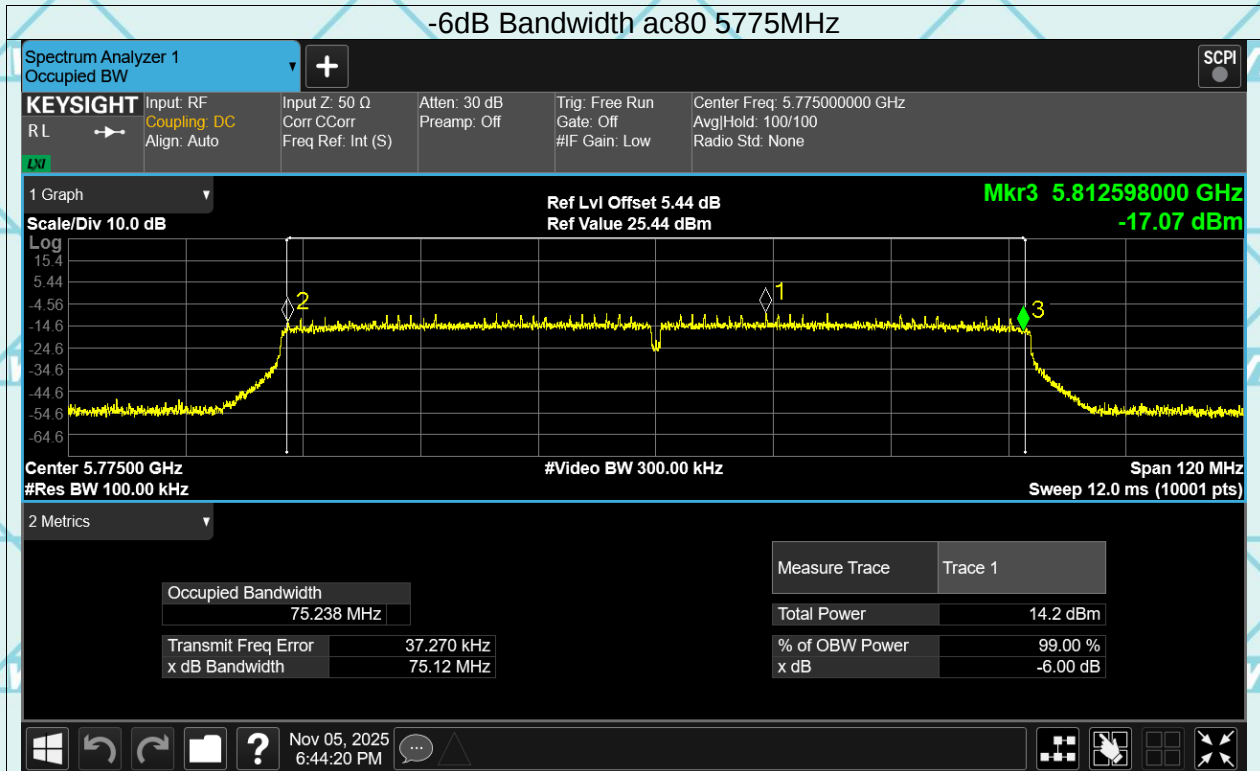


-6dB Bandwidth ax20 5825MHz

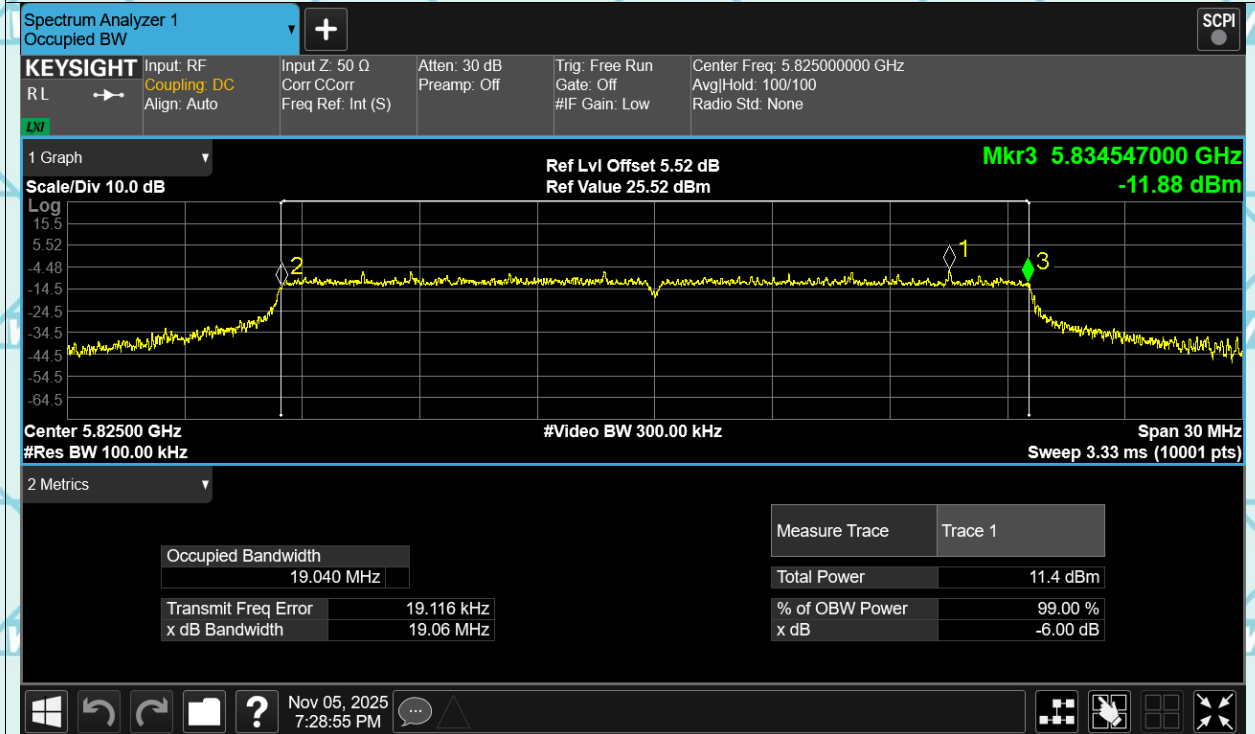

-6dB Bandwidth ax40 5755MHz

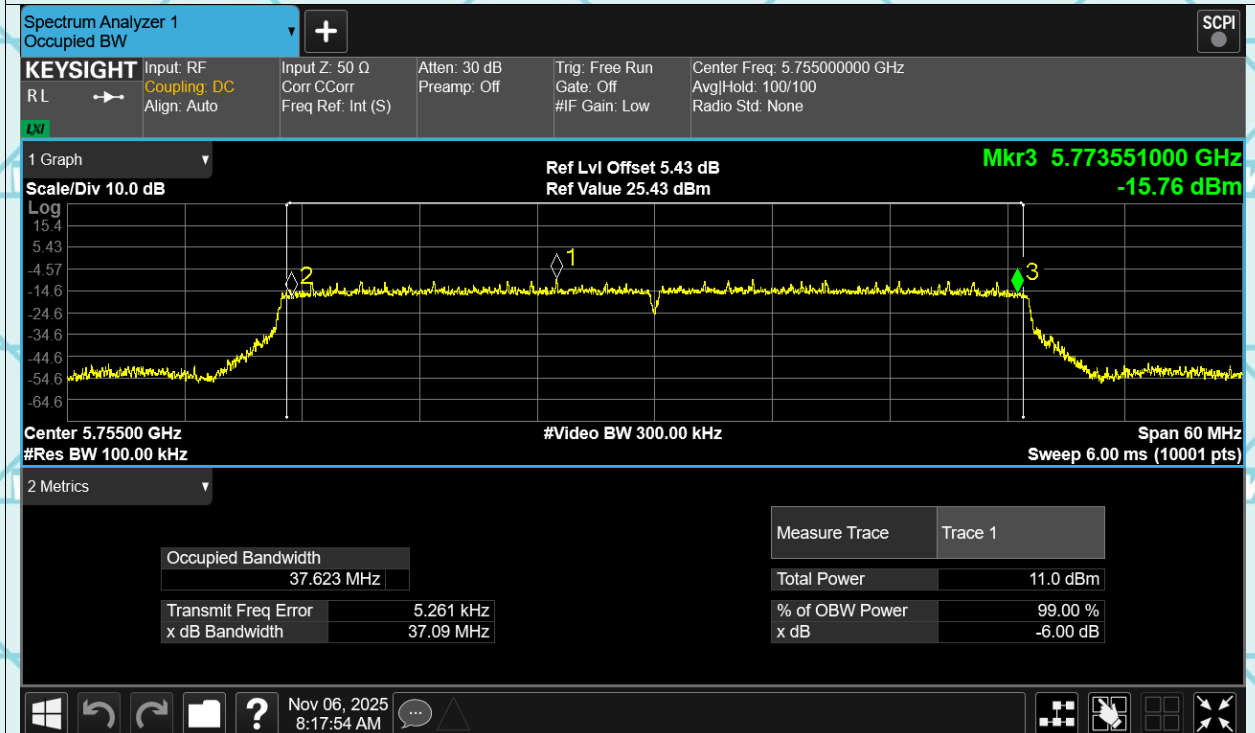

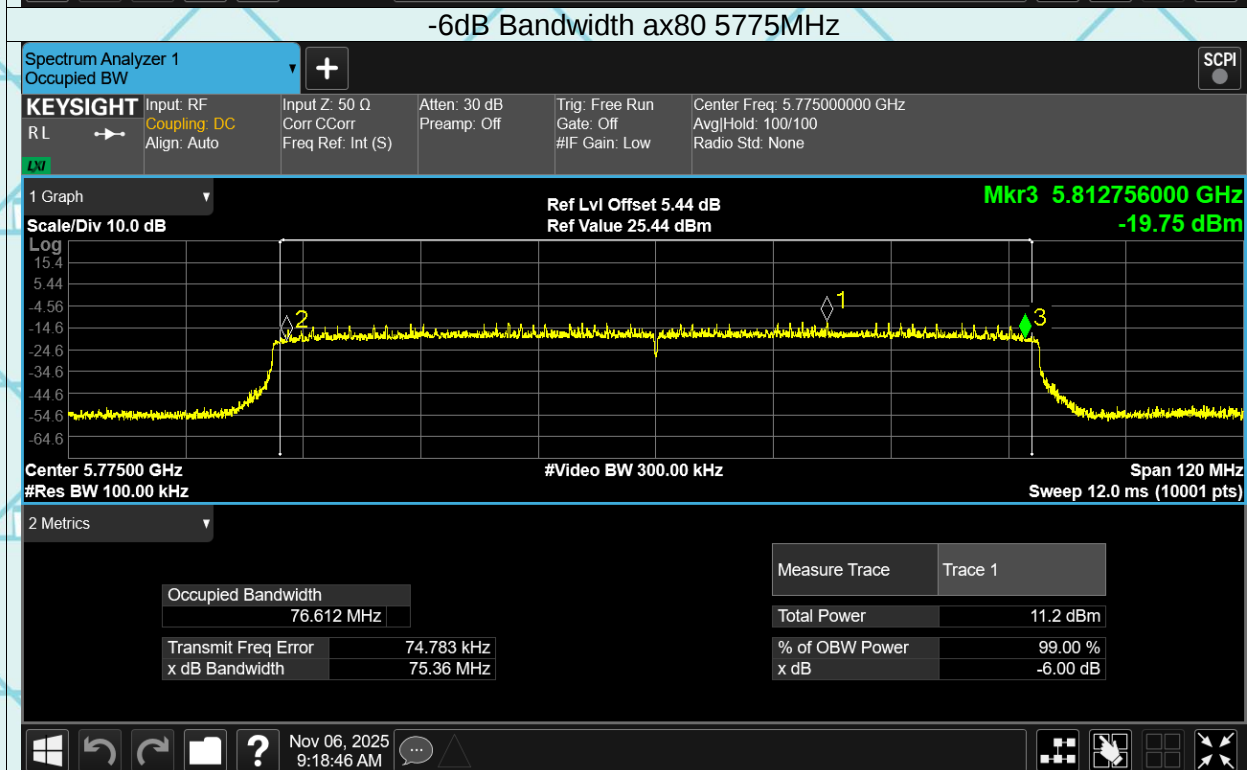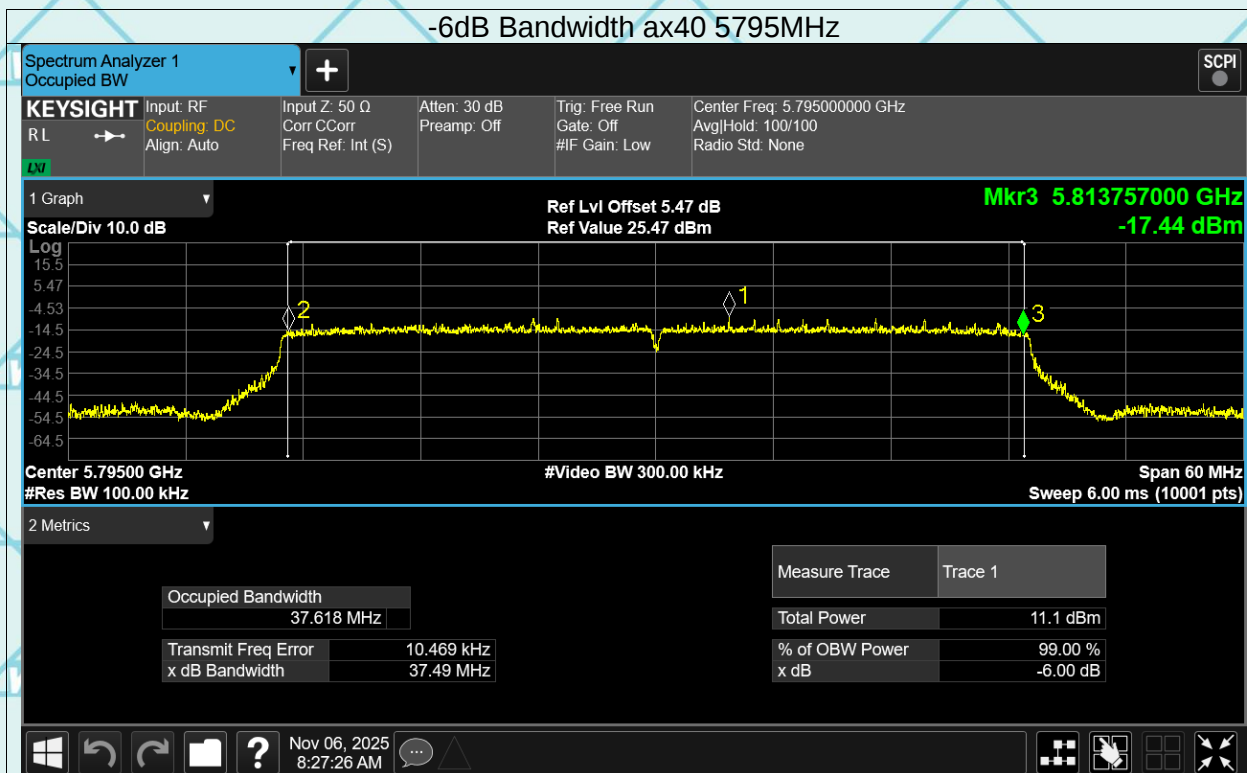

7.5 MAXIMUM CONDUCTED (AVERAGE) OUTPUT POWER

Product	: Tablet	Test Mode	: See Section 3.4
Test Item	: Average Power	Temperature	: 25 °C
Test Voltage	: DC 3.8V	Humidity	: 56%RH
Test Result	: PASS		

Total Power(dBm)= Conducted Power+ Duty Factor

Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
a	5180	14.25	0.22	14.47	24	Pass
a	5240	16.04	0.22	16.26	24	Pass
a	5260	15.69	0.41	16.1	24	Pass
a	5320	16.51	0.22	16.73	24	Pass
a	5500	16.81	0.26	17.07	24	Pass
a	5700	10	0.89	10.89	24	Pass
a	5745	11.22	0.21	11.43	30	Pass
a	5825	11.43	0.39	11.82	30	Pass
n20	5180	14.5	0.2	14.7	24	Pass
n20	5240	16.21	0.5	16.71	24	Pass
n20	5260	9.26	0.39	9.65	24	Pass
n20	5320	9.73	0.25	9.98	24	Pass
n20	5500	9.88	0.48	10.36	24	Pass
n20	5700	6.97	0.8	7.77	24	Pass
n20	5745	8.63	0.36	8.99	30	Pass
n20	5825	9.16	0.5	9.66	30	Pass
n40	5190	7.39	0.35	7.74	24	Pass
n40	5230	8.66	0.63	9.29	24	Pass
n40	5270	8.04	0.7	8.74	24	Pass
n40	5310	9.1	0.97	10.07	24	Pass
n40	5510	8.42	1.77	10.19	24	Pass
n40	5670	7.03	1.57	8.6	24	Pass
n40	5755	7.41	0.97	8.38	30	Pass
n40	5795	8.52	0.68	9.2	30	Pass
ac20	5180	7.74	0.18	7.92	24	Pass
ac20	5240	9.43	0.32	9.75	24	Pass
ac20	5260	8.84	0.28	9.12	24	Pass
ac20	5320	9.87	0.32	10.19	24	Pass
ac20	5500	9.55	0.16	9.71	24	Pass
ac20	5700	7.04	0.85	7.89	24	Pass
ac20	5745	8.52	0.16	8.68	30	Pass
ac20	5825	9.02	0.3	9.32	30	Pass
ac40	5190	7.51	9.03	16.54	24	Pass
ac40	5230	8.48	0.51	8.99	24	Pass
ac40	5270	8.88	0.31	9.19	24	Pass
ac40	5310	8.04	0.8	8.84	24	Pass
ac40	5510	9.54	0.31	9.85	24	Pass
ac40	5670	6.52	1.6	8.12	24	Pass
ac40	5755	7.7	1.51	9.21	30	Pass
ac40	5795	8.53	0.5	9.03	30	Pass
ac80	5210	6.4	0	6.4	24	Pass
ac80	5290	7.58	1.8	9.38	24	Pass
ac80	5530	8.37	1.75	10.12	24	Pass
ac80	5610	6.93	0	6.93	24	Pass
ac80	5775	7.66	2.54	10.2	30	Pass
ax20	5180	4.28	0.36	4.64	24	Pass
ax20	5240	5.55	0.41	5.96	24	Pass
ax20	5260	5.53	0.39	5.92	24	Pass
ax20	5320	6.31	0.47	6.78	24	Pass
ax20	5500	6.23	0.59	6.82	24	Pass
ax20	5700	4.27	0.28	4.55	24	Pass
ax20	5745	5.23	0.31	5.54	30	Pass
ax20	5825	5.4	0.63	6.03	30	Pass
ax40	5190	4.32	9.03	13.35	24	Pass
ax40	5230	9.06	0.78	9.84	24	Pass
ax40	5270	8.97	0.94	9.91	24	Pass
ax40	5310	9.27	0.84	10.11	24	Pass

Report No.: WSCT-ANAB-R&E251000083A-Wi-Fi2

Issued Date: 11 November 2025

Revised: None

ax40	5510	5.37	1.12	6.49	24	Pass
ax40	5670	3.83	1.01	4.84	24	Pass
ax40	5755	5.34	0.65	5.99	30	Pass
ax40	5795	5.51	0.52	6.03	30	Pass
ax80	5210	3.83	7.53	11.36	24	Pass
ax80	5290	4.6	6.51	11.11	24	Pass
ax80	5530	4.86	1.43	6.29	24	Pass
ax80	5610	3.76	0.78	4.54	24	Pass
ax80	5775	4.45	1.7	6.15	30	Pass

