


Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2412MHz
Remark:	/	Test_Date	2026/5/21


Test Graph

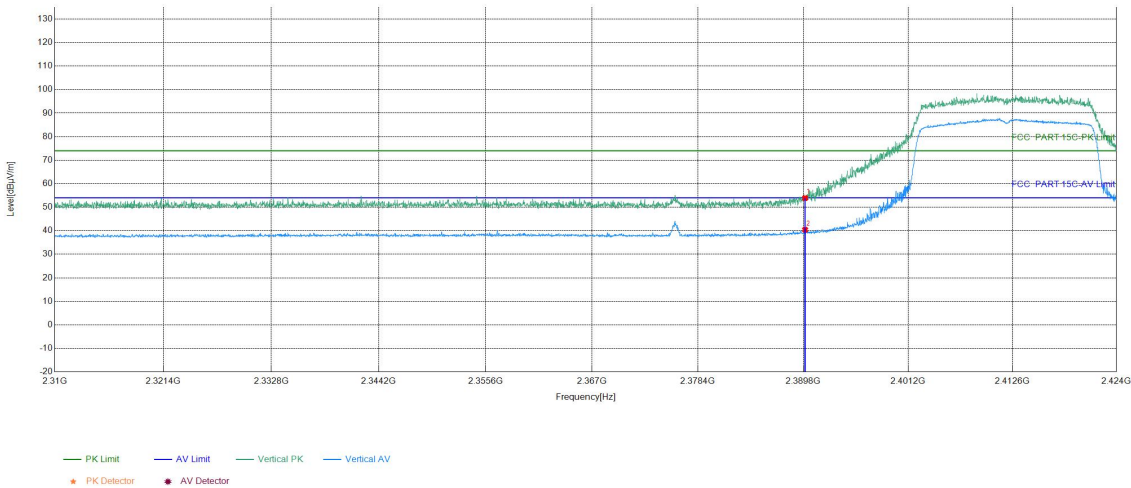

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	37.93	53.89	74.00	20.11	PASS	Vertical	PK
2	2390	15.96	24.46	40.42	54.00	13.58	PASS	Vertical	AV

Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2462MHz
Remark:	/	Test_Date	2026/5/21


Test Graph

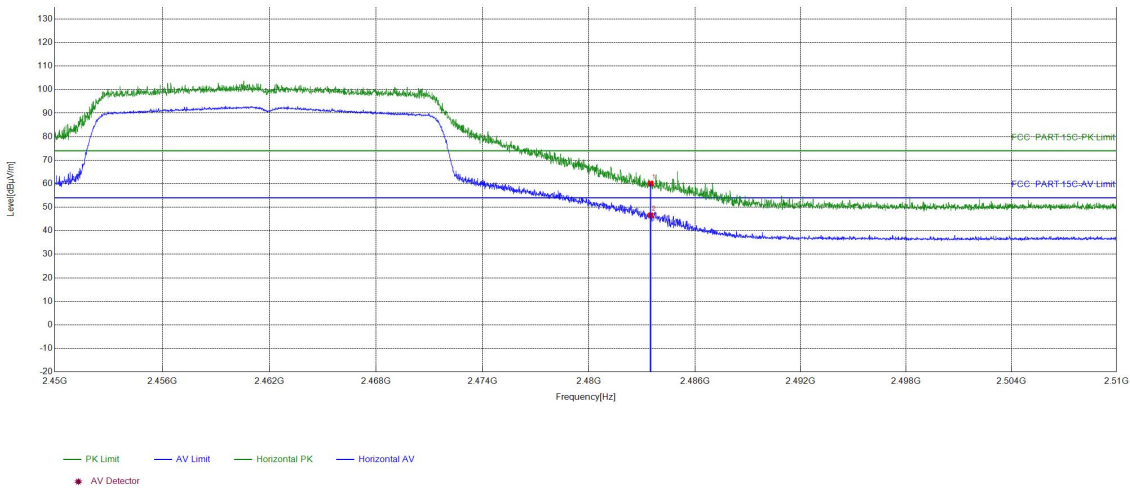

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	43.82	60.11	74.00	13.89	PASS	Horizont	PK
2	2483.5	16.29	30.29	46.58	54.00	7.42	PASS	Horizont	AV

Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2462MHz
Remark:	/	Test_Date	2026/5/21


Test Graph

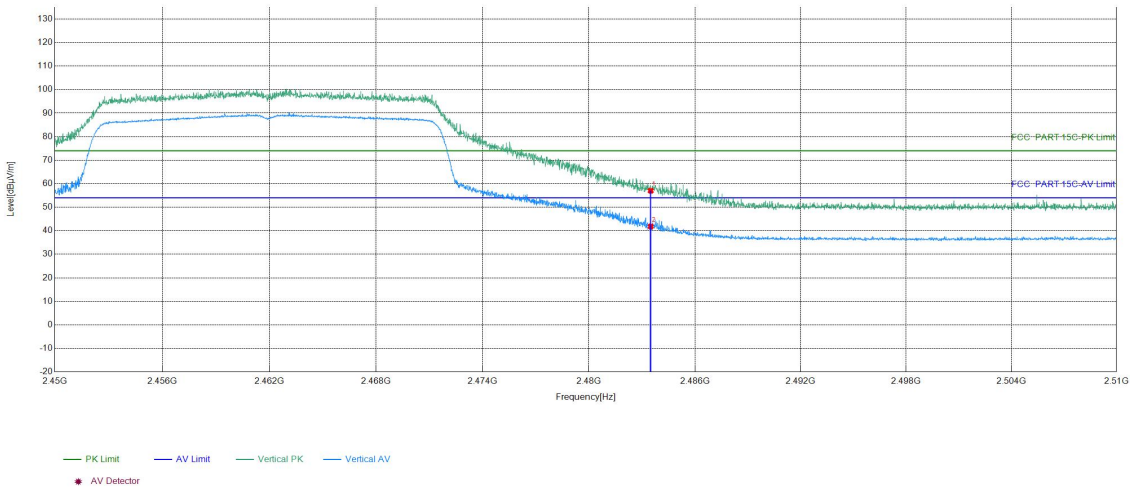

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	40.73	57.02	74.00	16.98	PASS	Vertical	PK
2	2483.5	16.29	25.52	41.81	54.00	12.19	PASS	Vertical	AV

Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2422MHz
Remark:	/	Test_Date	2026/5/21


Test Graph

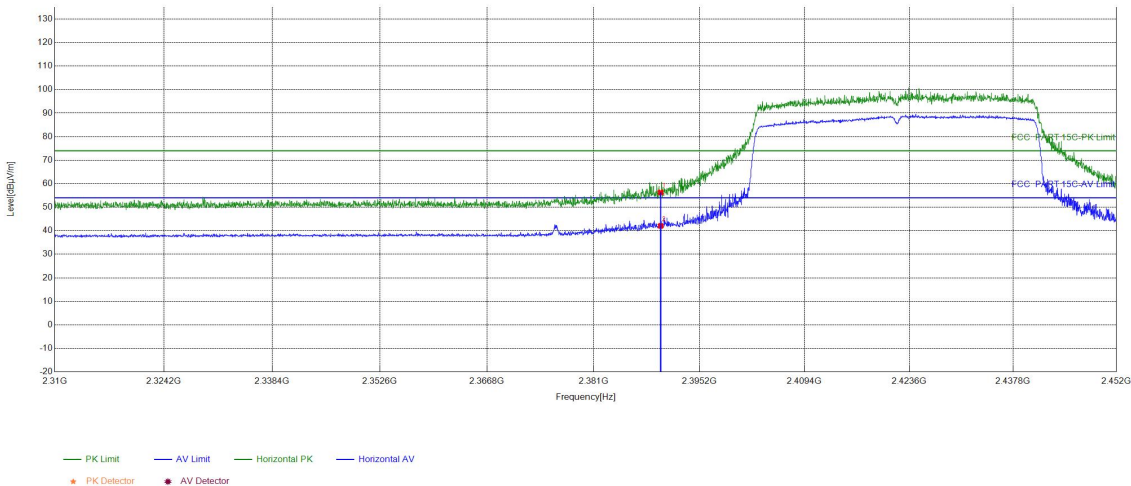

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	40.33	56.29	74.00	17.71	PASS	Horizont	PK
2	2390	15.96	26.10	42.06	54.00	11.94	PASS	Horizont	AV

Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2422MHz
Remark:	/	Test_Date	2026/5/21


Test Graph

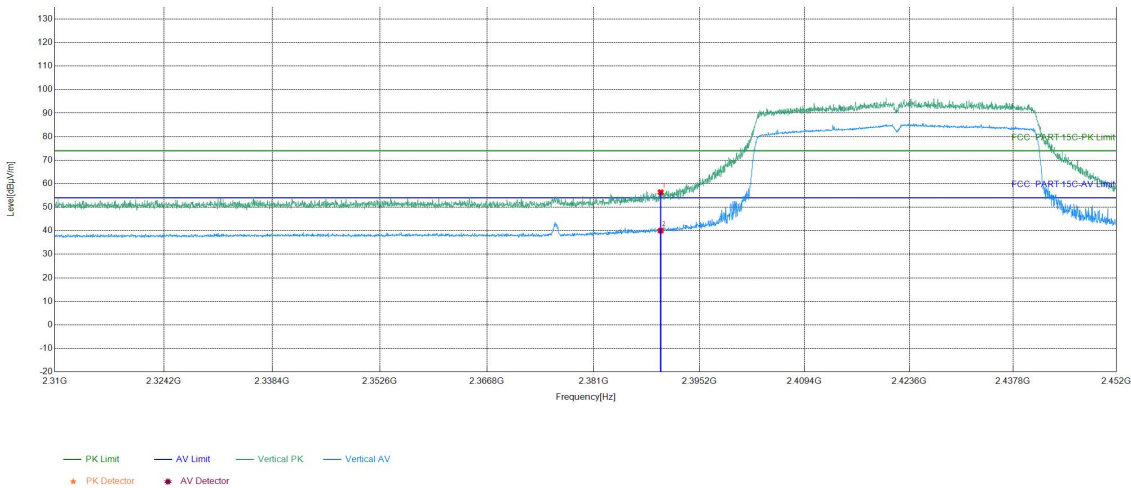

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	40.40	56.36	74.00	17.64	PASS	Vertical	PK
2	2390	15.96	24.10	40.06	54.00	13.94	PASS	Vertical	AV

Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2452MHz
Remark:	/	Test_Date	2026/5/21


Test Graph

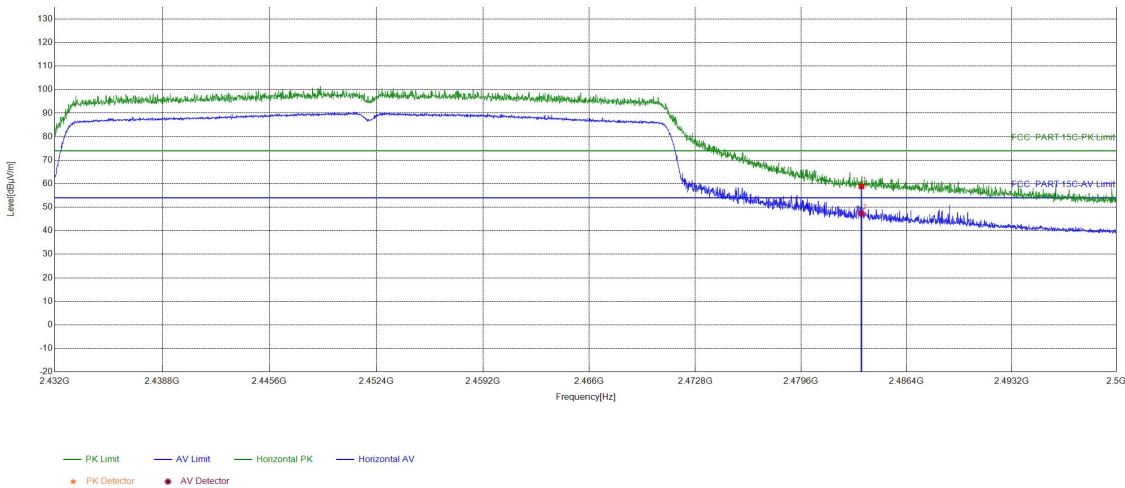

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	42.59	58.88	74.00	15.12	PASS	Horizont	PK
2	2483.5	16.29	31.03	47.32	54.00	6.68	PASS	Horizont	AV

Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2452MHz
Remark:	/	Test_Date	2026/5/21

Test Graph

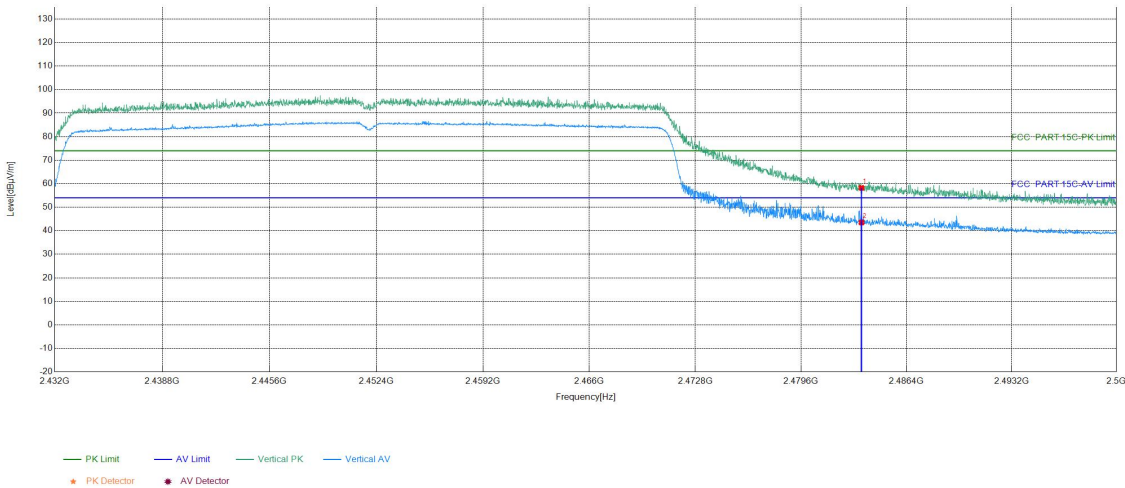

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	41.93	58.22	74.00	15.78	PASS	Vertical	PK
2	2483.5	16.29	27.24	43.53	54.00	10.47	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

6 Appendix A

Refer to Appendix: 2.4G Wi-Fi of EED32S80599903

7 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S80599901.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***