


Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2452MHz
-----------	---------------------------------	----------------	---------


Test Graph

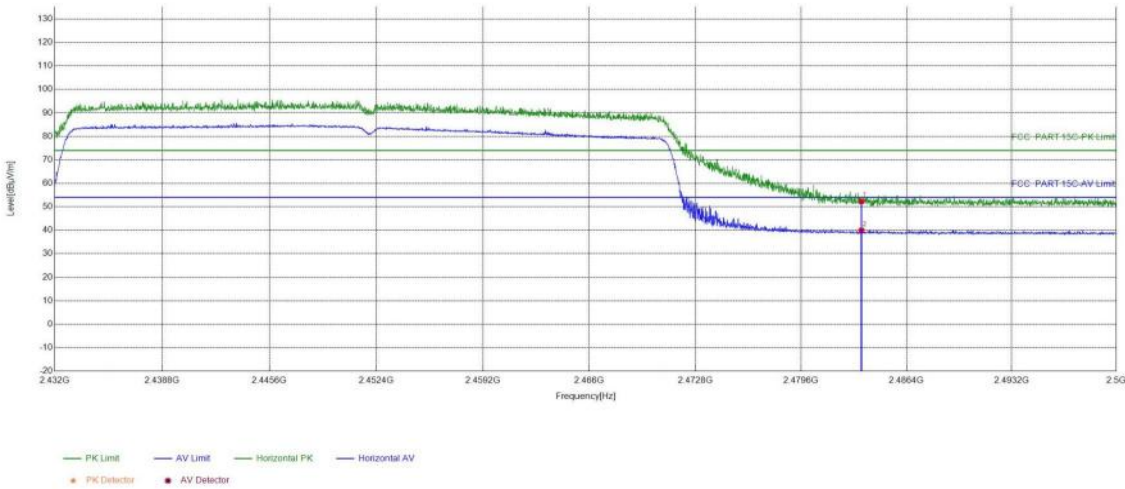

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	36.06	52.35	74.00	21.65	PASS	Horizontal	PK
2	2483.5	16.29	23.56	39.85	74.00	34.15	PASS	Horizontal	AV

Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2452MHz
-----------	---------------------------------	----------------	---------

Test Graph

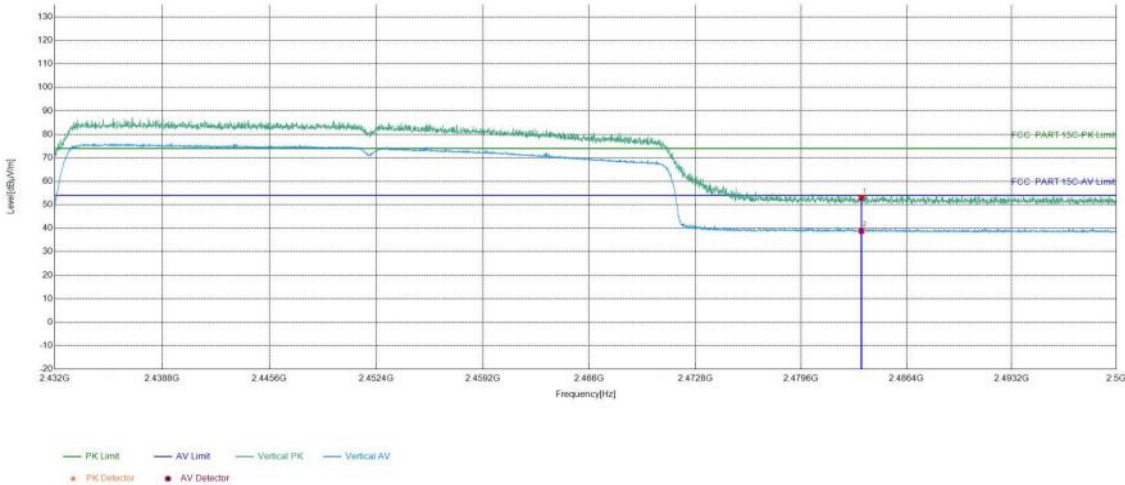

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	36.76	53.05	74.00	20.95	PASS	Vertical	PK
2	2483.5	16.29	22.55	38.84	74.00	35.16	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

6 Appendix A

Refer to Appendix: 2.4G Wi-Fi of EED32R82566302

7 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32R82566301.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***