

TEST REPORT

FCC ID: 2AW9M-KB1001A**Product: Tablet****Model No.: KB1001****KB1001L, KB1001S, KB1002, KB1002L, KB1003, KB1003L, KB1004, KB1004L, KB1005, KB1005L, KB1006, KB1006L, KB1007, KB1007L, KB1008, KB1008L, KB1009, KB1016, KB1028, KB1012, KB10, KB10L, KB11, KB11L****Trade Mark: NA****Report No.: WSCT-ANAB-R&E250900072A-15B****Issued Date: 20 October 2025****Issued for****SHENZHEN EFERCRO ELECTRONIC TECHNOLOGY CO., LTD.****Room 901, Block E, Building 1, Section 1, Chuangzhi Yuncheng,
Liuxian Avenue, Xili Community, Xili Street, Nanshan District, Shenzhen****Issued By:****World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.
Building A-B, Baoli'an Industrial Park, No. 58 and 60, Tangtou Avenue, Shiyan
Street, Bao'an District, Shenzhen City, Guangdong Province, China****TEL: +86-755-26996192****FAX: +86-755-86376605**

Note: This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. This document may be altered or revised by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification	3
2. GENERAL DESCRIPTION OF EUT	4
3. Test Result Summary	5
4. TEST METHODOLOGY	6
4.1. CONFIGURATION OF SYSTEM UNDER TEST	7
4.2. DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)	8
5. MEASUREMENT INSTRUMENTS	9
6. Facilities and Accreditations	10
6.1. FACILITIES	10
6.2. ACCREDITATIONS	10
6.3. MEASUREMENT UNCERTAINTY	11
7. EMC EMISSION TEST	12
7.1. CONDUCTED EMISSION MEASUREMENT	12
7.2. TEST RESULTS	14
7.3. RADIATED EMISSION MEASUREMENT	16
8. Test Setup Photographs	23

Report No.: WSCT-ANAB-R&E250900072A-15B Issued: 20 October 2025

1. Test Certification

Product:	Tablet
Model No.:	KB1001,KB1001L,KB1001S,KB1002,KB1002L,KB1003,KB1003L,KB1004,KB1004L,KB1005,KB1005L,KB1006,KB1006L,KB1007,KB1007L,KB1008,KB1008L,KB1009,KB1016,KB1028,KB1012,KB10,KB10L,KB11,KB11L
Trade Mark:	NA
Applicant:	SHENZHEN EFERCRO ELECTRONIC TECHNOLOGY CO., LTD. ROOM 901, BLOCK E, BUILDING 1, SECTION 1, CHUANGZHI YUNCHEN G, LIUXIAN AVENUE,XILI COMMUNITY, XILI STREET, NANSHAN DISTRICT, SHENZHEN
Manufacturer:	SHENZHEN EFERCRO ELECTRONIC TECHNOLOGY CO., LTD. ROOM 901, BLOCK E, BUILDING 1, SECTION 1, CHUANGZHI YUNCHEN G, LIUXIAN AVENUE,XILI COMMUNITY, XILI STREET, NANSHAN DISTRICT, SHENZHEN
Date of Test:	28 August 2025 to 20 October 2025
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart B

The above equipment has been tested by World Standardization Certification & Testing Group(Shenzhen) Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:


(Jiang Guanliang)

Checked By:


(Chen Xu)

Approved By:


(Qin Shuiquan)

Date:

20 October 2025



2. GENERAL DESCRIPTION OF EUT

Product Name:	Tablet
Model:	KB1001,KB1001L,KB1001S,KB1002,KB1002L,KB1003,KB1003L,KB1004,KB1004L,KB1005,KB1005L,KB1006,KB1006L,KB1007,KB1007L,KB1008,KB1008L,KB1009,KB1016,KB1028,KB1012,KB10,KB10L,KB11,KB11L
Trade Mark:	NA
Operating Voltage:	Adapter1: G50-US-0502000 Input: 100-240V~,0.35A Max 50/60HZ Output:5.0V---2.0A 10.0W Adapter2: PS10UA050K2000UU Input: 100-240V~, 50/60HZ 0.35A Max Output:5.0V---2.0A 10.0W Rechargeable Li-ion Polymer Battery:2894130 Nominal Voltage: 3.8V Rated Capacity: 5000mAh Limited Charge Voltage: 4.35V
Remark:	N/A.

Note: 1. N/A stands for no applicable.

2 : Among the series models

KB1001,KB1001L,KB1001S,KB1002,KB1002L,KB1003,KB1003L,KB1004,KB1004L,KB1005,KB1005L,KB1006,KB1006L,KB1007,KB1007L,KB1008,KB1008L,KB1009,KB1016,KB1028,KB1012,KB10,KB10L,KB11,KB11L, theKB1001 serves as the primary test model. All test data has been derived from the KB1001, as these models differ only in their model names.

3. Both adapters were tested. Among them, adapter 1 performed the worst and only showed the worst results.

3. Test Result Summary

Requirement	CFR 47 Section	Result
CONDUCTED EMISSION	§15.107	PASS
RADIATED EMISSION	§15.109	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.


4. TEST METHODOLOGY

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Video Recording
Model 2	Video Playing
Mode 3	TF Card Playing

4.1. CONFIGURATION OF SYSTEM UNDER TEST

Mode 1&2&3&4

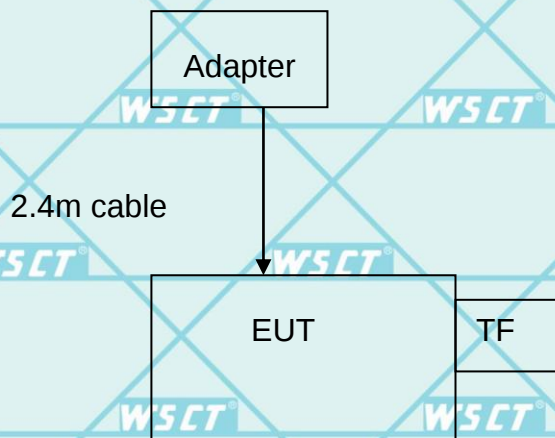

(EUT: Tablet)

I/O Port of EUT			
I/O Port Type	Q'TY	Cable	Tested with
Power	1	2.4m cable, unshielded	1

4.2. DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	TF	Kingston	DTX/64GB	/	/
2	Adapter	/	E065-1R200325VU	/	/
3	USB Disk	Kingston	/	/	/

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

5. MEASUREMENT INSTRUMENTS

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibrated	Calibrated until
Test software	--	EZ-EMC	CON-03A	--	--
ESCI Test Receiver	R&S	ESCI	100005	11/05/2024	11/04/2025
LISN	AFJ	LS16	16010222119	11/05/2024	11/04/2025
LISN(EUT)	Mestec	AN3016	04/10040	11/05/2024	11/04/2025
pre-amplifier	CDSI	PAP-1G18-38	--	11/05/2024	11/04/2025
System Controller	CT	SC100	-	11/05/2024	11/04/2025
Bi-log Antenna	Chase	CBL6111C	2576	11/05/2024	11/04/2025
Spectrum analyzer	R&S	FSU26	200409	11/05/2024	11/04/2025
Horn Antenna	SCHWARZBECK	9120D	1141	11/05/2024	11/04/2025
Bi-log Antenna	SCHWARZBECK	VULB9168	01488	7/29/2025	7/28/2026
Pre Amplifier	H.P.	HP8447E	2945A02715	11/05/2024	11/04/2025
9*6*6 Anechoic	--	--	--	11/05/2024	11/04/2025

6. Facilities and Accreditations

6.1. Facilities

All measurement facilities used to collect the measurement data are located at **Building A-B, Baoli'an Industrial Park, No.58 and 60, Tangtou Avenue, Shiyan Street, Bao'an District, Shenzhen City, Guangdong Province, China** of the World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 32. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:2017.

USA	ANAB - Certificate Number: AT-3951
China	CNAS (Registration Number: L3732)
Canada	ISED (CAB identifier: CN0178)

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.wsct-cert.com>

6.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission Test	$\pm 3.2\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1GHz)	$\pm 3.3\text{dB}$
5	All emissions, radiated(>1GHz)	$\pm 4.7\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2.0\%$

7. EMC EMISSION TEST

7.1. CONDUCTED EMISSION MEASUREMENT

7.1.1. POWER LINE CONDUCTED EMISSION LIMITS

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

Report No.: WSCT-ANAB-R&E250900072A-15B Issued: 20 October 2025

TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.


TEST SETUP

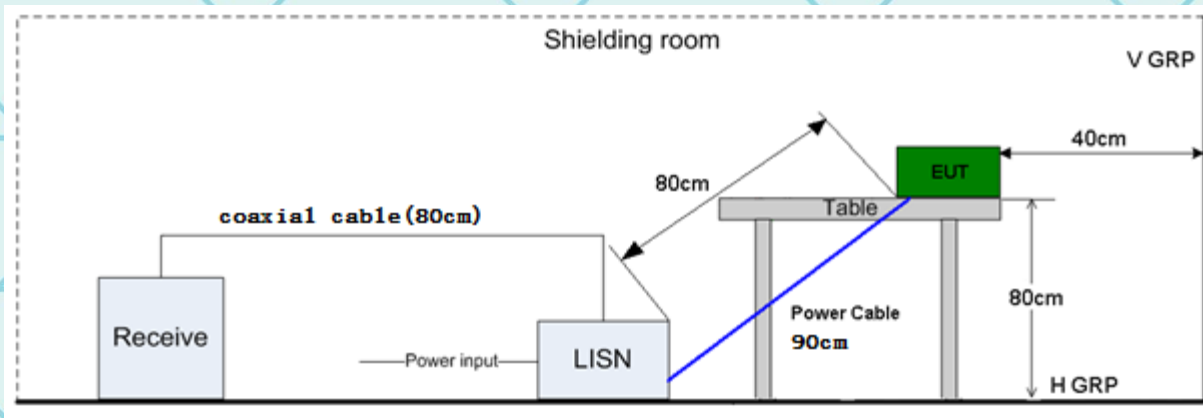

7.2. Test Results

Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 3(the worst case)


Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

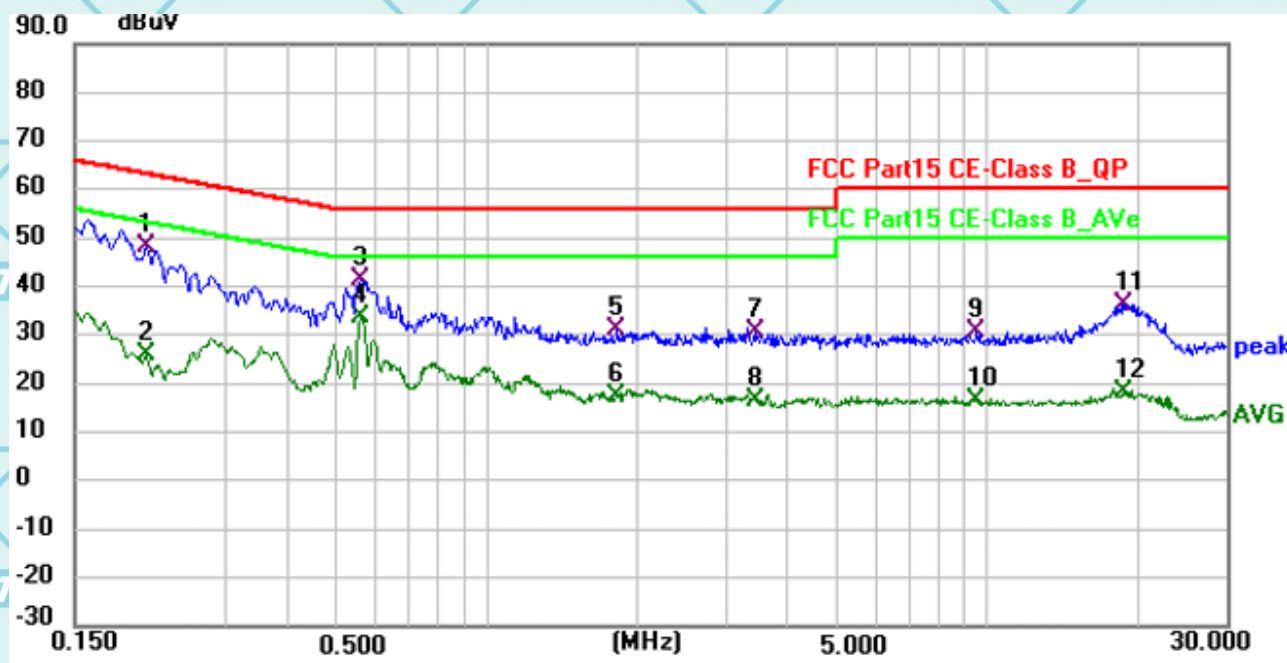

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2084	27.74	20.68	48.42	63.27	-14.85	QP
2	0.2084	5.36	20.68	26.04	53.27	-27.23	AVG
3	0.5594	20.65	20.52	41.17	56.00	-14.83	QP
4 *	0.5594	13.32	20.52	33.84	46.00	-12.16	AVG
5	1.8285	10.57	20.62	31.19	56.00	-24.81	QP
6	1.8285	-3.44	20.62	17.18	46.00	-28.82	AVG
7	3.4710	10.26	20.59	30.85	56.00	-25.15	QP
8	3.4710	-3.95	20.59	16.64	46.00	-29.36	AVG
9	9.5190	10.00	20.46	30.46	60.00	-29.54	QP
10	9.5190	-4.13	20.46	16.33	50.00	-33.67	AVG
11	18.6314	16.18	20.24	36.42	60.00	-23.58	QP
12	18.6314	-2.00	20.24	18.24	50.00	-31.76	AVG

Report No.: WSCT-ANAB-R&E250900072A-15B Issued: 20 October 2025

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

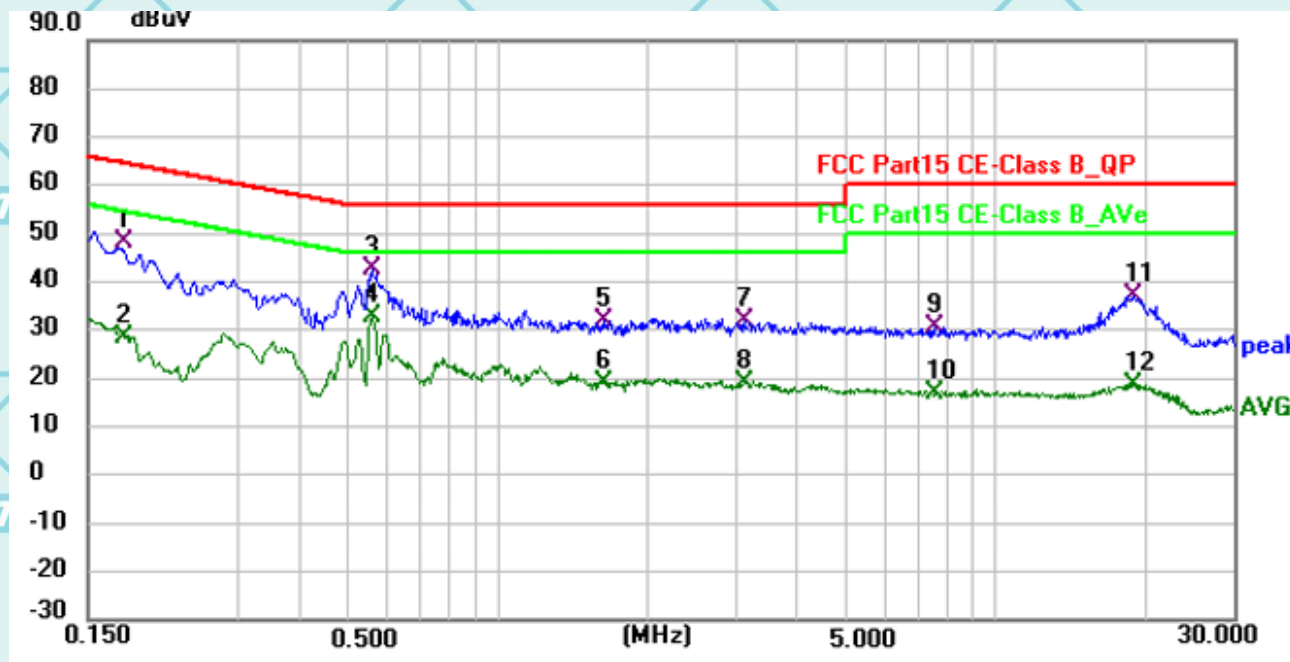

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.1770	27.51	20.71	48.22	64.63	-16.41	QP
2	0.1770	7.90	20.71	28.61	54.63	-26.02	AVG
3	0.5595	22.06	20.52	42.58	56.00	-13.42	QP
4 *	0.5595	12.48	20.52	33.00	46.00	-13.00	AVG
5	1.6395	11.27	20.63	31.90	56.00	-24.10	QP
6	1.6395	-1.58	20.63	19.05	46.00	-26.95	AVG
7	3.1290	11.50	20.59	32.09	56.00	-23.91	QP
8	3.1290	-1.44	20.59	19.15	46.00	-26.85	AVG
9	7.5525	10.12	20.50	30.62	60.00	-29.38	QP
10	7.5525	-3.60	20.50	16.90	50.00	-33.10	AVG
11	18.9014	16.89	20.24	37.13	60.00	-22.87	QP
12	18.9014	-1.41	20.24	18.83	50.00	-31.17	AVG

Note1:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = LISN Factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

7.3. RADIATED EMISSION MEASUREMENT

7.3.1. Radiated Emission Limits

The field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 1Hz for Average


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

TEST SETUP

(A) Radiated Emission Test-Up Frequency 30MHz~1GHz

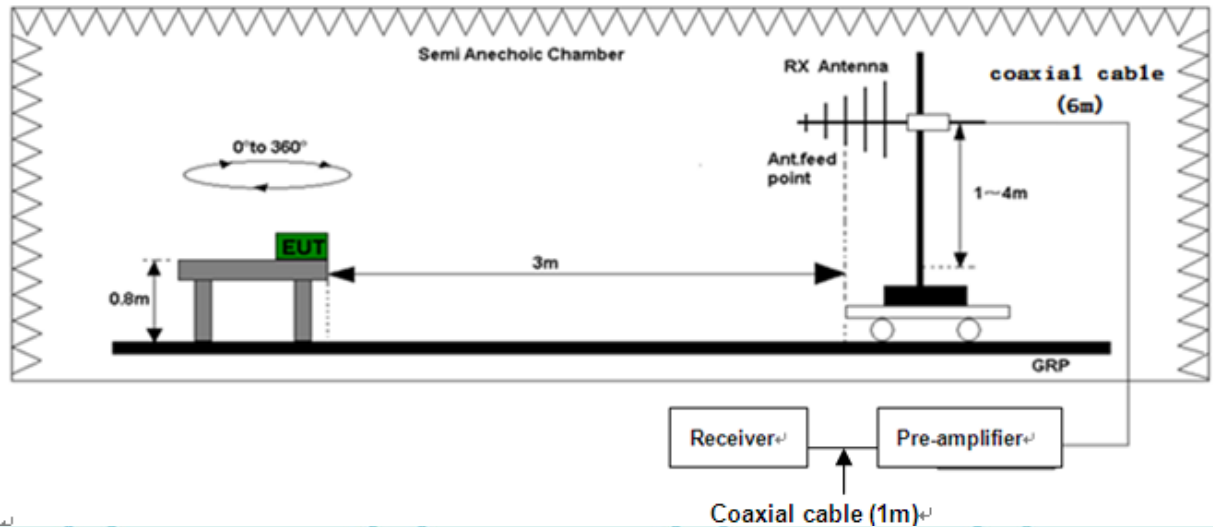

(B) Radiated Emission Test-Up Frequency Above 1GHz

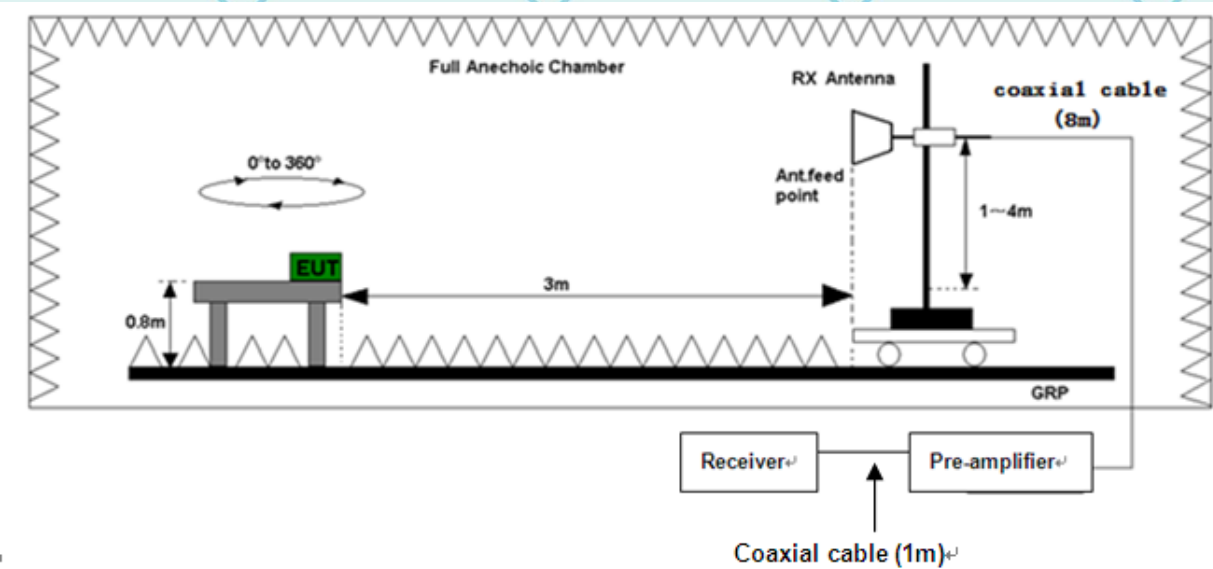

Report No.: WSCT-ANAB-R&E250900072A-15B Issued: 20 October 2025

7.3.2. Test Results

Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 3(the worst case)

Please refer to following diagram for individual

Below 1GHz


Horizontal:



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	50.3699	34.89	-7.51	27.38	40.00	-12.62	QP
2		145.4299	35.92	-6.92	29.00	43.50	-14.50	QP
3		204.5999	38.54	-10.74	27.80	43.50	-15.70	QP
4		399.5699	36.57	-3.58	32.99	46.00	-13.01	QP
5		750.7100	27.90	3.87	31.77	46.00	-14.23	QP
6		989.3300	26.37	7.96	34.33	54.00	-19.67	QP

Report No.: WSCT-ANAB-R&E250900072A-15B Issued: 20 October 2025

Vertical:

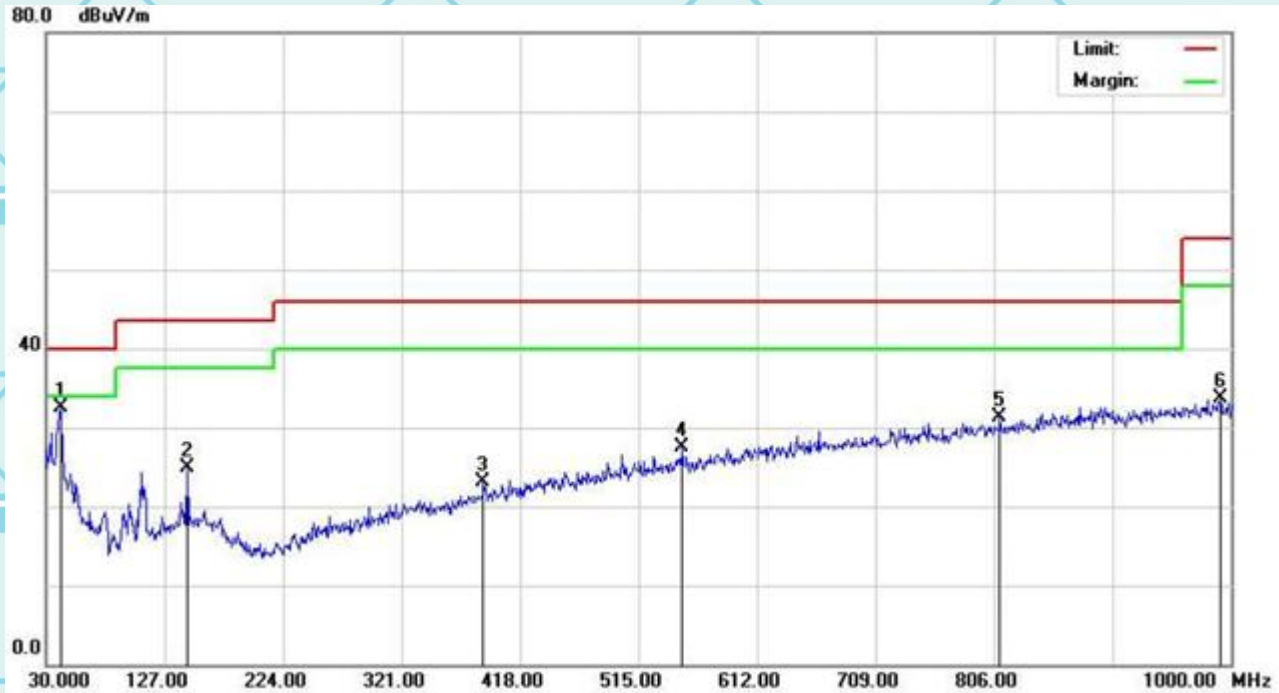

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	41.6400	52.93	-20.52	32.41	40.00	-7.59	QP
2		145.4299	44.86	-19.96	24.90	43.50	-18.60	QP
3		387.9300	41.90	-18.83	23.07	46.00	-22.93	QP
4		550.8900	45.49	-17.99	27.50	46.00	-18.50	QP
5		810.8500	47.97	-16.59	31.38	46.00	-14.62	QP
6		991.2700	49.01	-15.33	33.68	54.00	-20.32	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)


Report No.: WSCT-ANAB-R&E250900072A-15B Issued: 20 October 2025

TEST RESULTS

Above 1GHz(1~6GHz) :(Mode 3—worst case)

Note: The spurious above 6G is noise only, do not show on the report.


Horizontal:

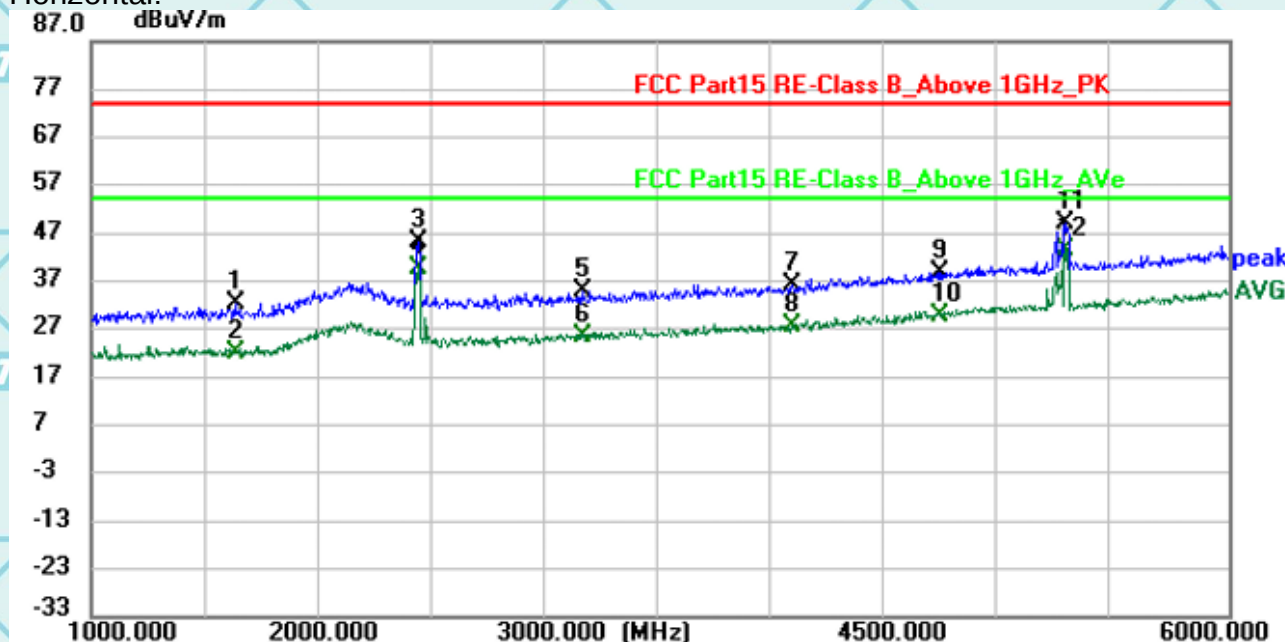

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1638.750	39.78	-7.35	32.43	74.00	-41.57	peak
2	1638.750	29.47	-7.35	22.12	54.00	-31.88	AVG
3	2443.125	49.00	-3.89	45.11	74.00	-28.89	peak
4	2443.125	43.50	-3.89	39.61	54.00	-14.39	AVG
5	3163.750	36.83	-1.91	34.92	74.00	-39.08	peak
6	3163.750	27.36	-1.91	25.45	54.00	-28.55	AVG
7	4085.625	34.88	1.33	36.21	74.00	-37.79	peak
8	4085.625	26.11	1.33	27.44	54.00	-26.56	AVG
9	4737.500	34.78	4.05	38.83	74.00	-35.17	peak
10	4737.500	25.79	4.05	29.84	54.00	-24.16	AVG
11	5284.375	42.84	6.18	49.02	74.00	-24.98	peak
12 *	5284.375	37.31	6.18	43.49	54.00	-10.51	AVG

Report No.: WSCT-ANAB-R&E250900072A-15B Issued: 20 October 2025

Vertical:

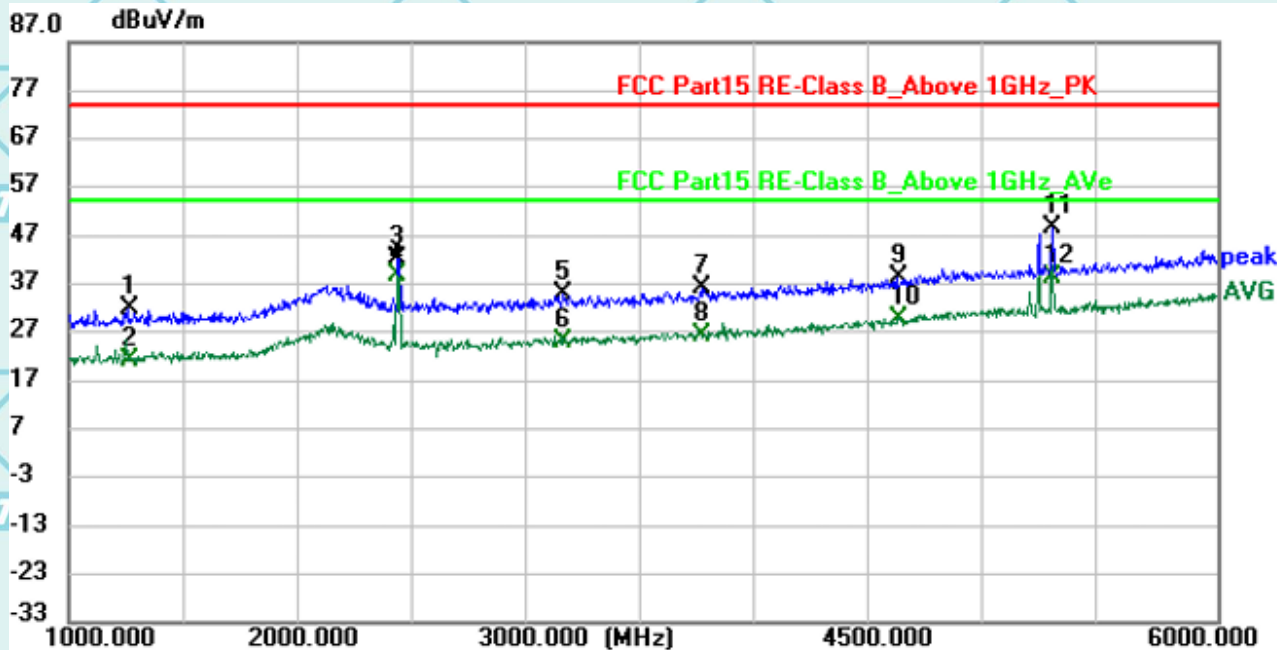

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1260.625	40.11	-8.07	32.04	74.00	-41.96	peak
2	1260.625	29.38	-8.07	21.31	54.00	-32.69	AVG
3	2439.375	46.10	-3.91	42.19	74.00	-31.81	peak
4 *	2439.375	42.55	-3.91	38.64	54.00	-15.36	AVG
5	3159.375	36.72	-1.91	34.81	74.00	-39.19	peak
6	3159.375	26.77	-1.91	24.86	54.00	-29.14	AVG
7	3758.750	36.20	-0.04	36.16	74.00	-37.84	peak
8	3758.750	26.30	-0.04	26.26	54.00	-27.74	AVG
9	4610.625	34.91	3.49	38.40	74.00	-35.60	peak
10	4610.625	26.38	3.49	29.87	54.00	-24.13	AVG
11	5285.000	42.27	6.18	48.45	74.00	-25.55	peak
12	5285.000	32.08	6.18	38.26	54.00	-15.74	AVG

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Freq. = Emission frequency in MHz

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

8. Test Setup Photographs

Please refer to Annex "Set Up Photos-15B" for test setup photos

*******END OF REPORT*******