




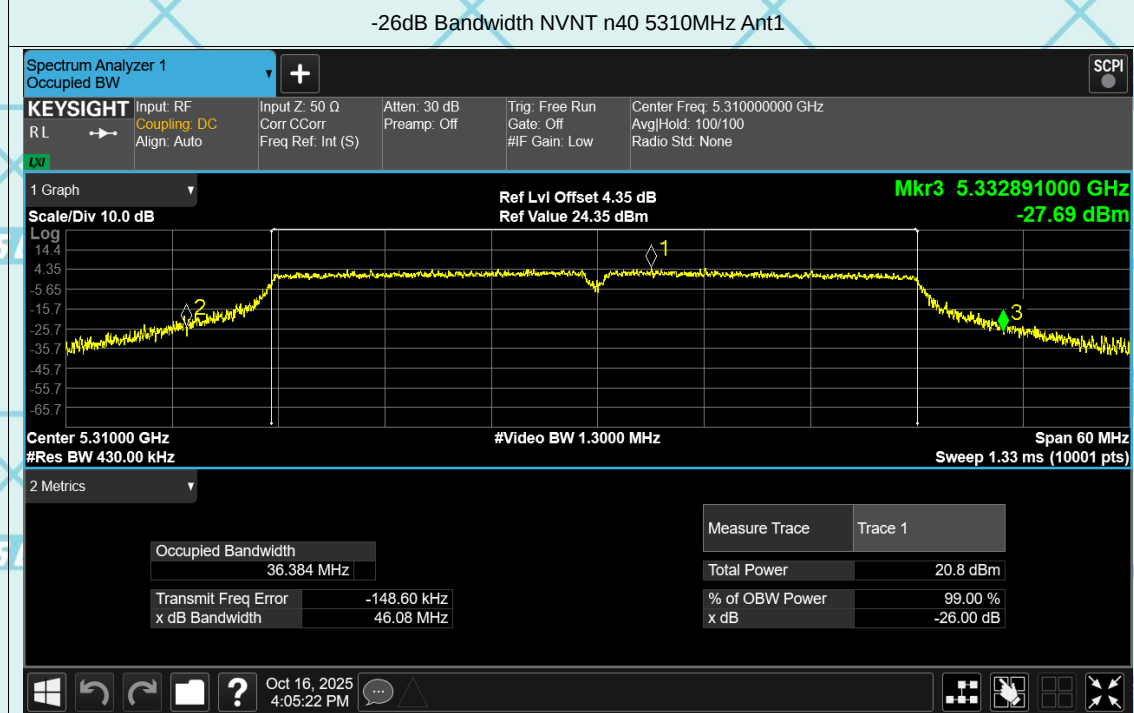
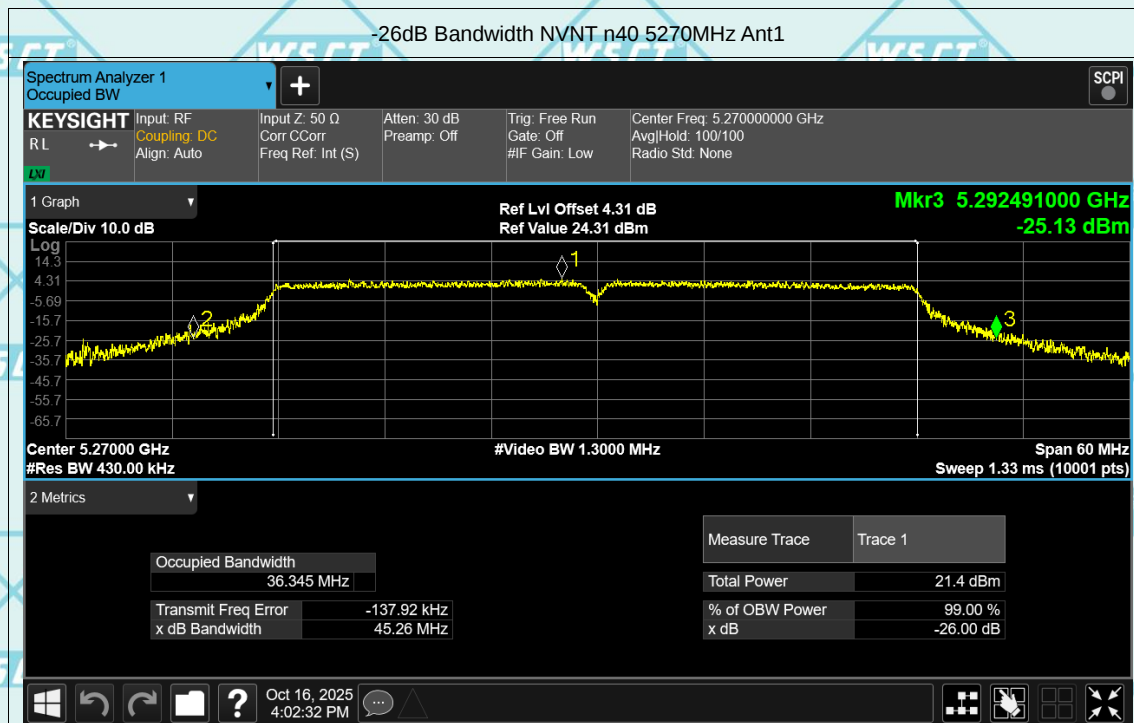
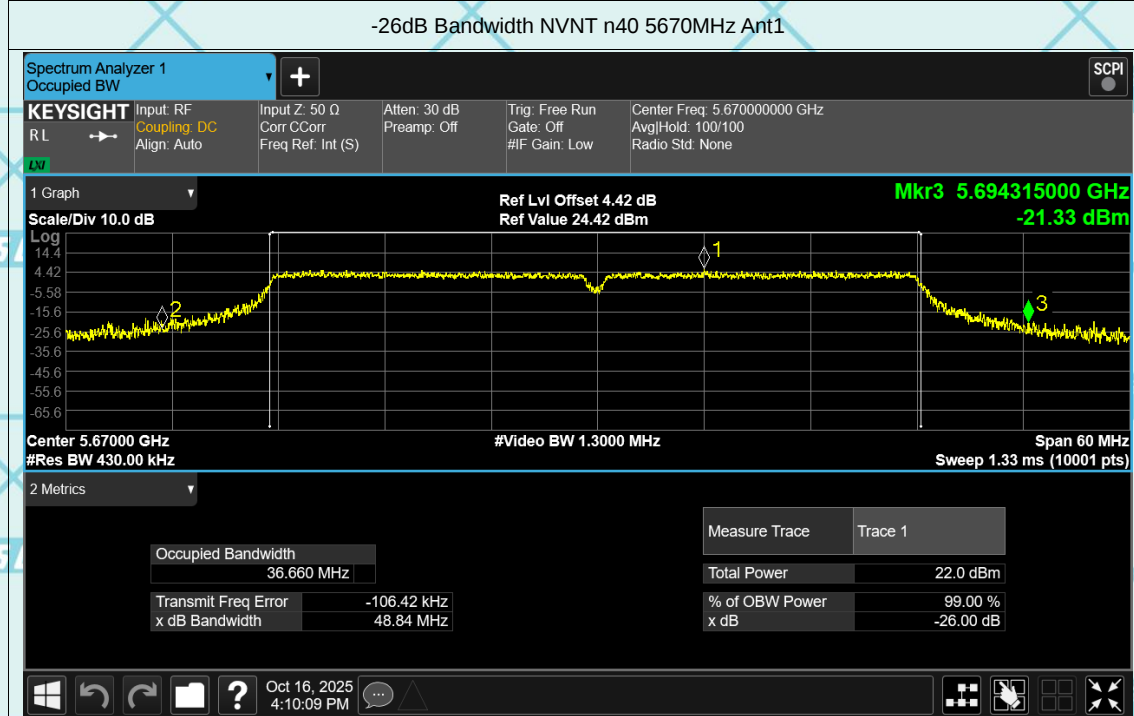
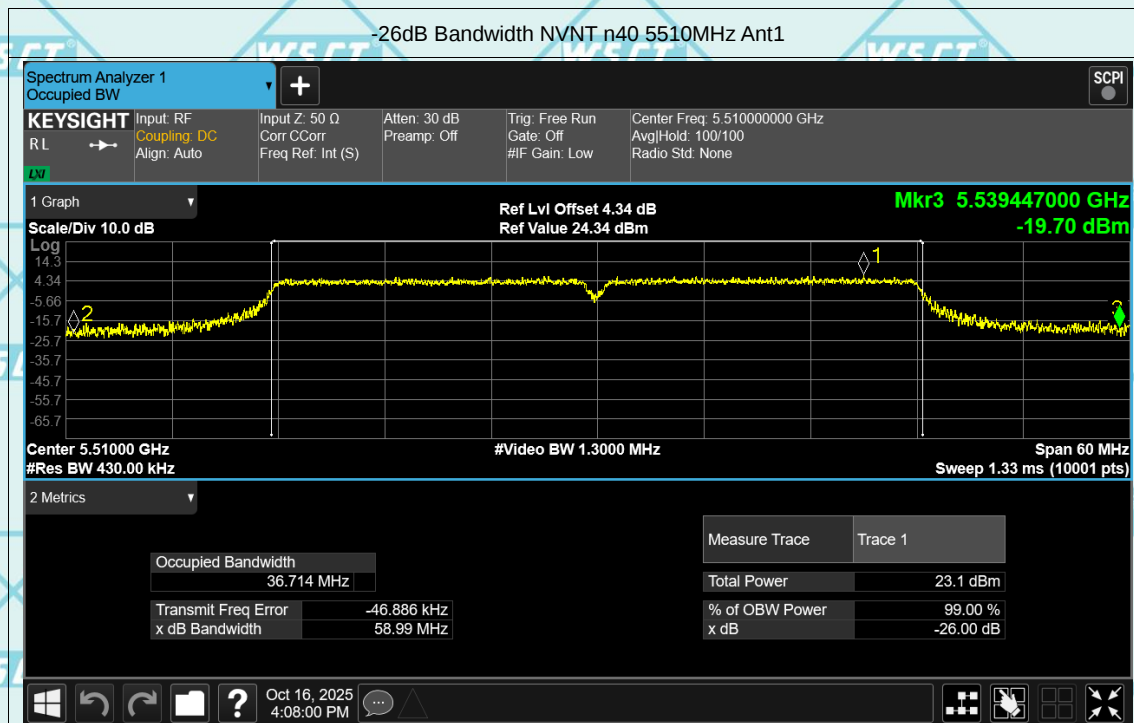
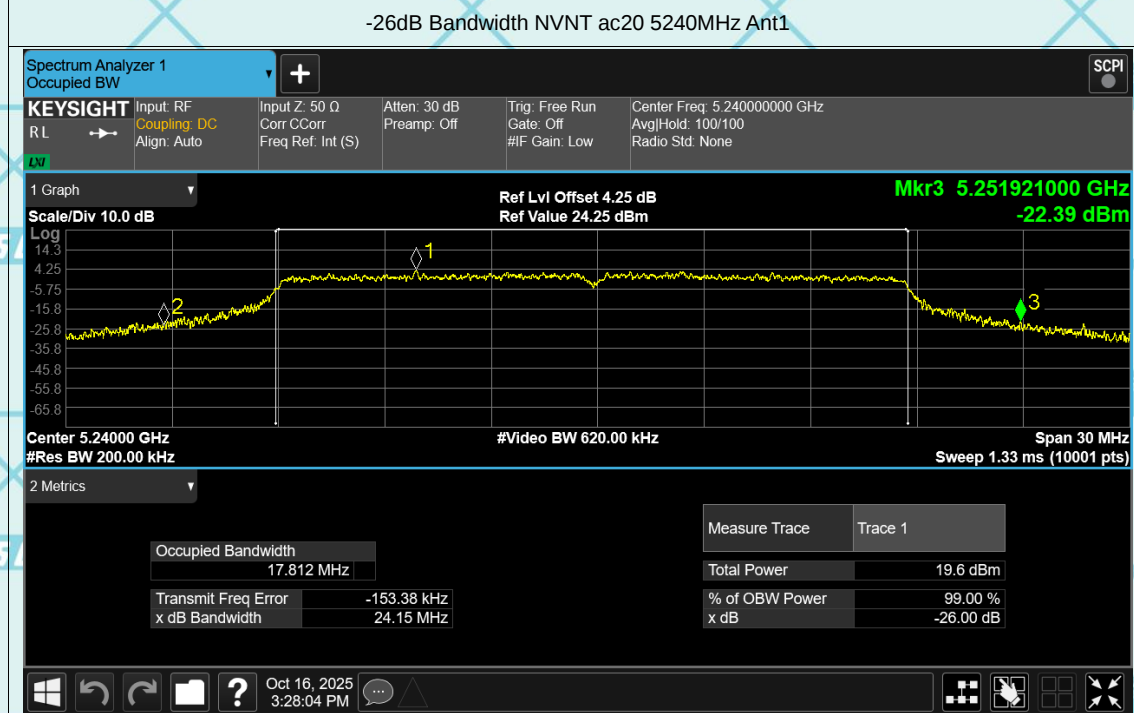



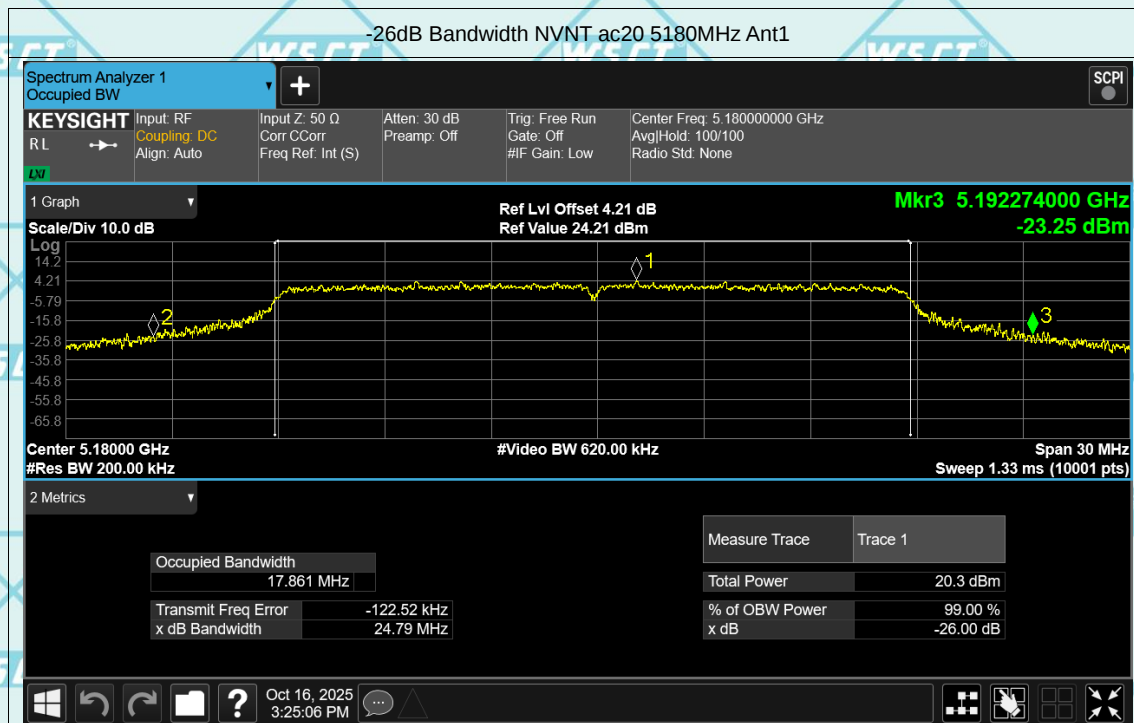



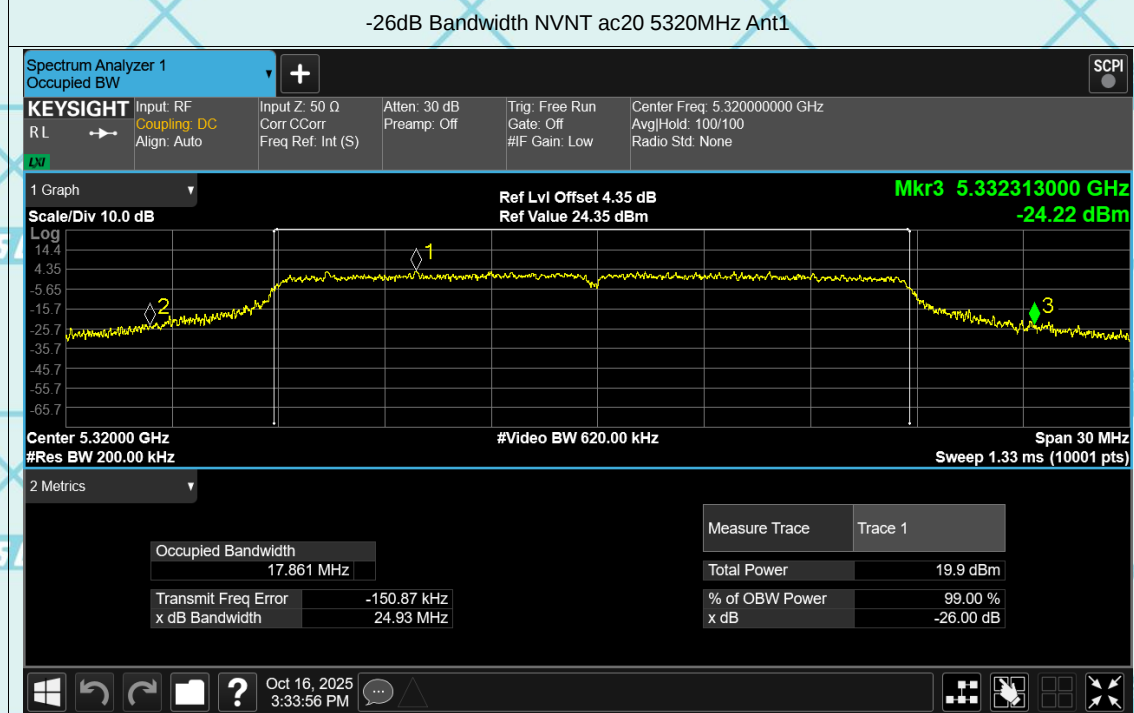



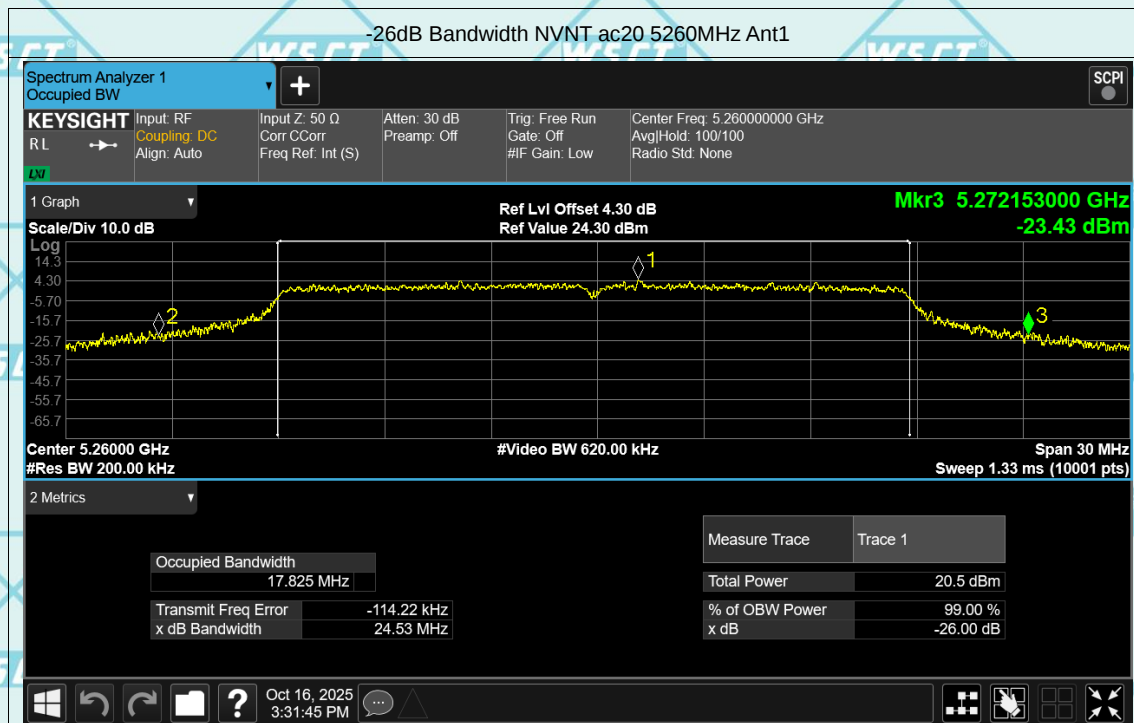



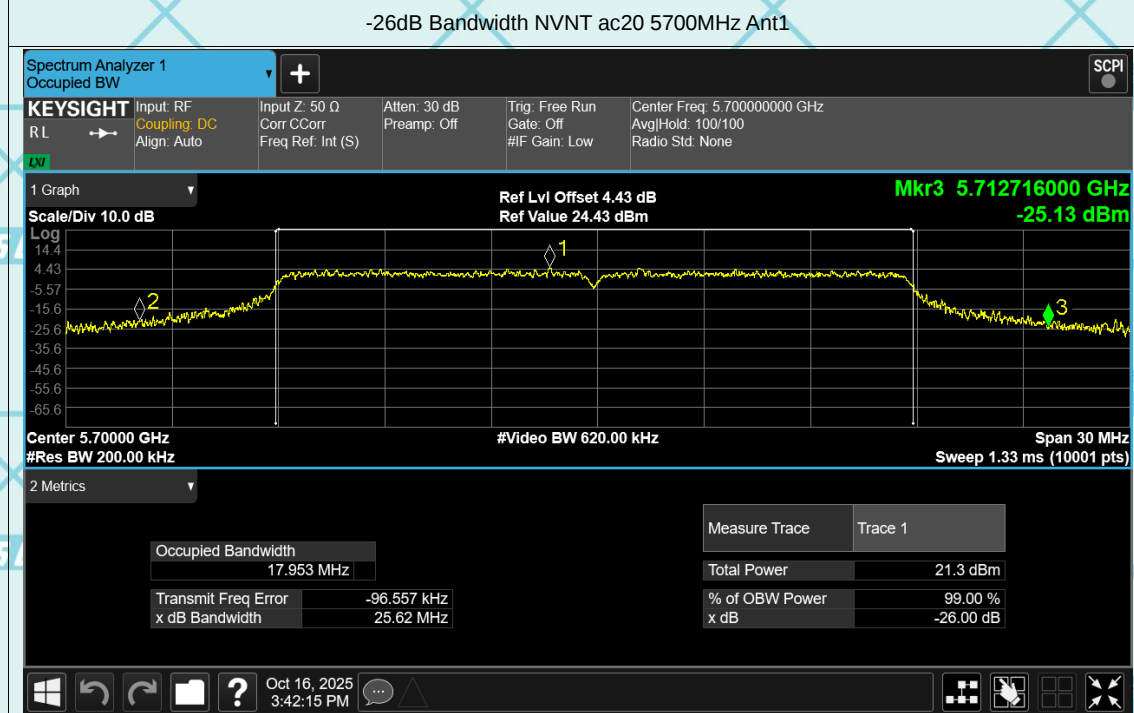



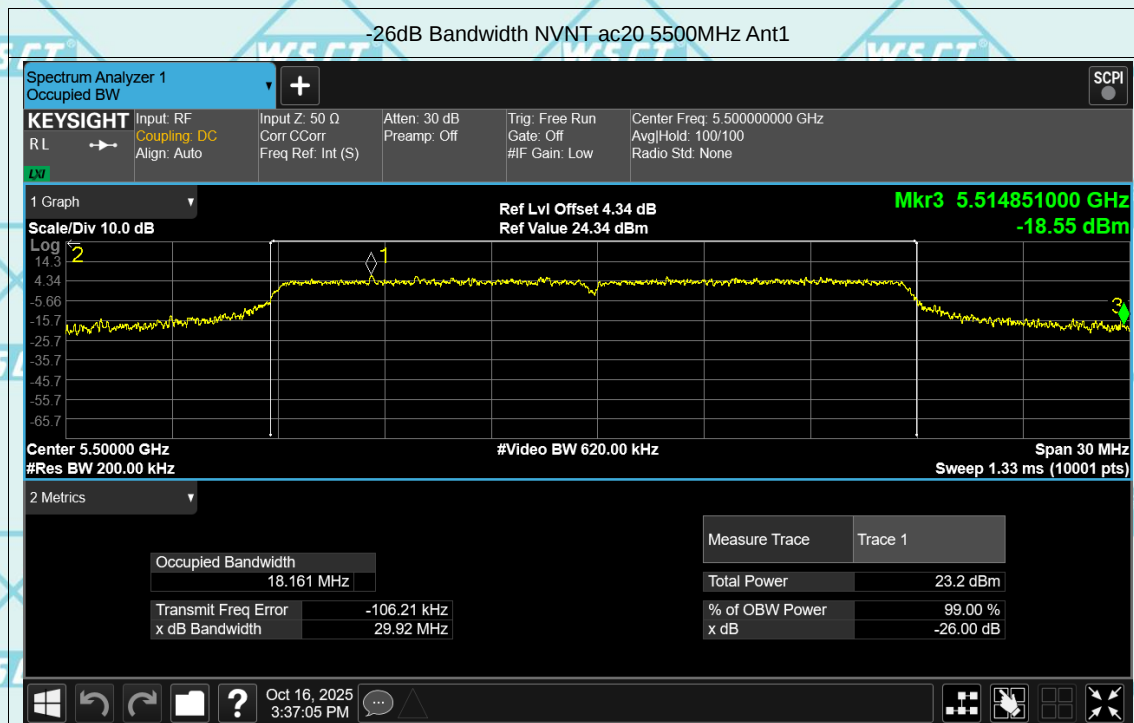


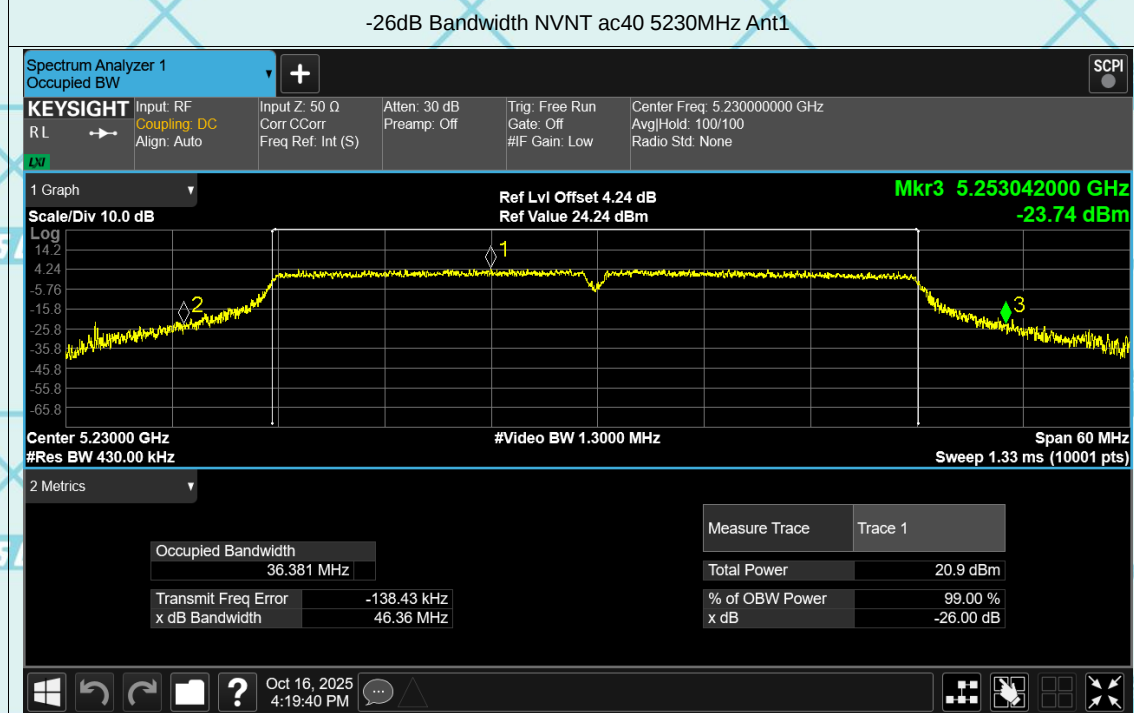
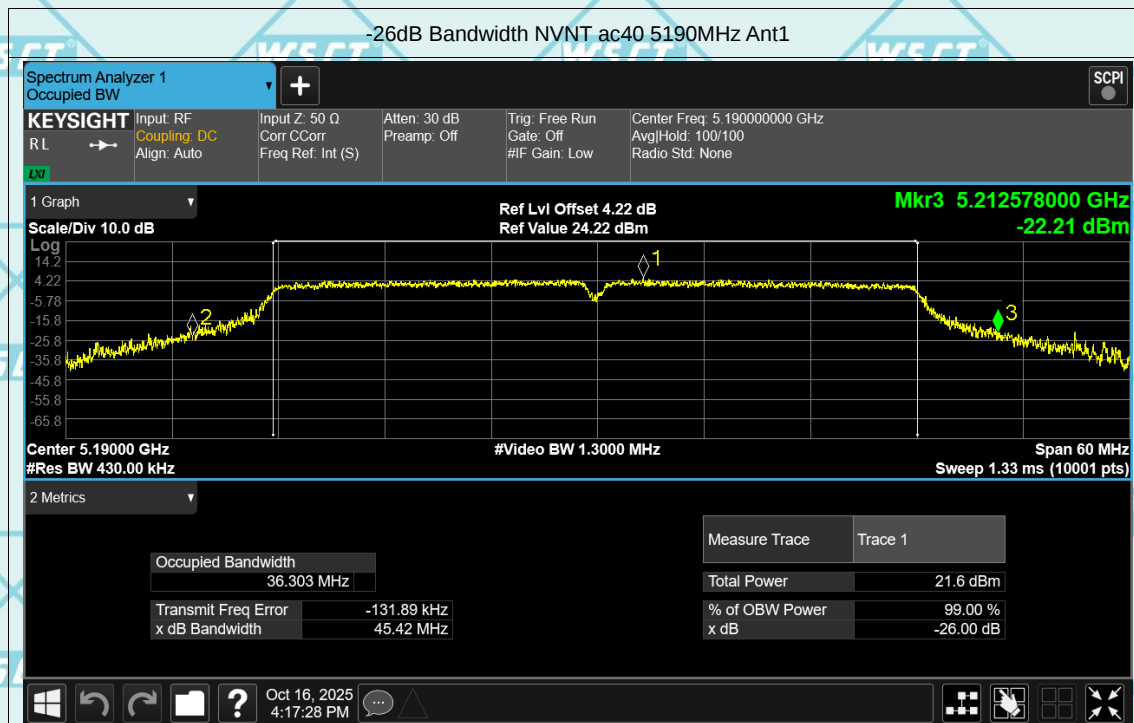


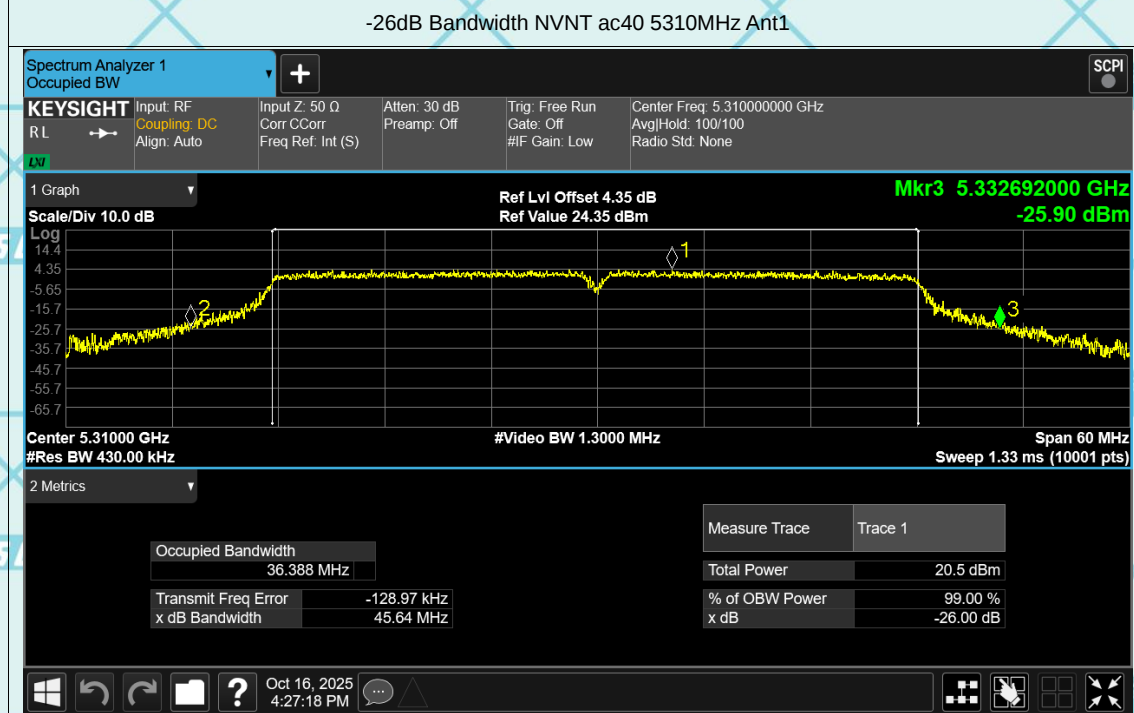
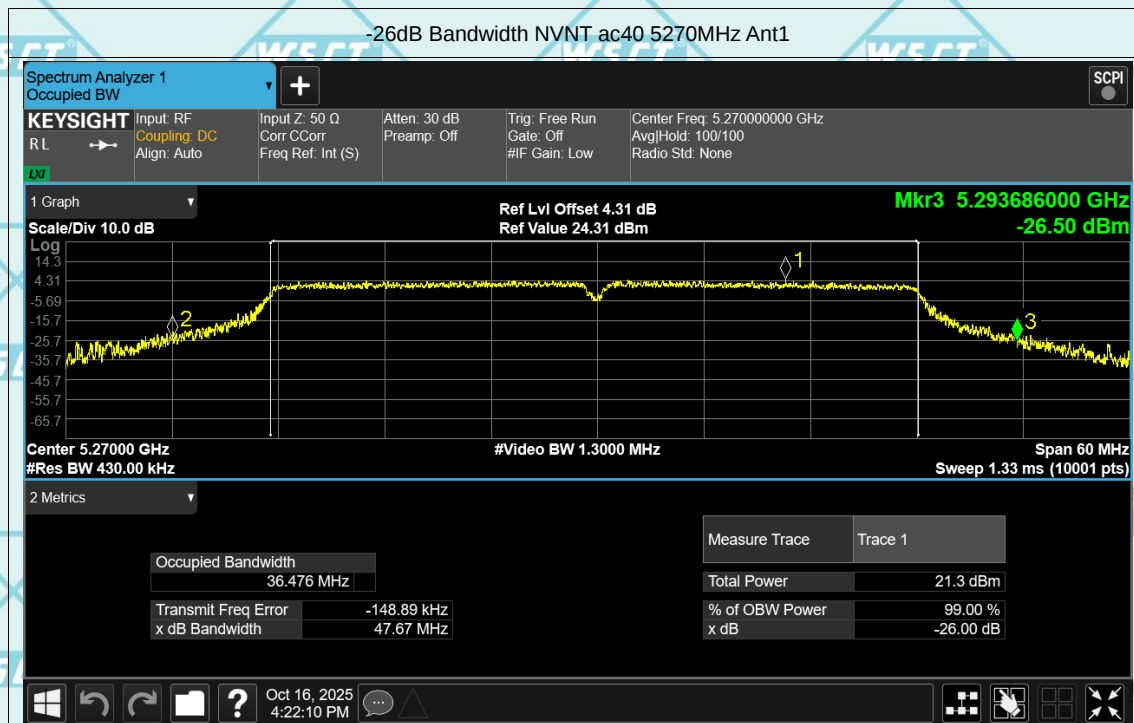


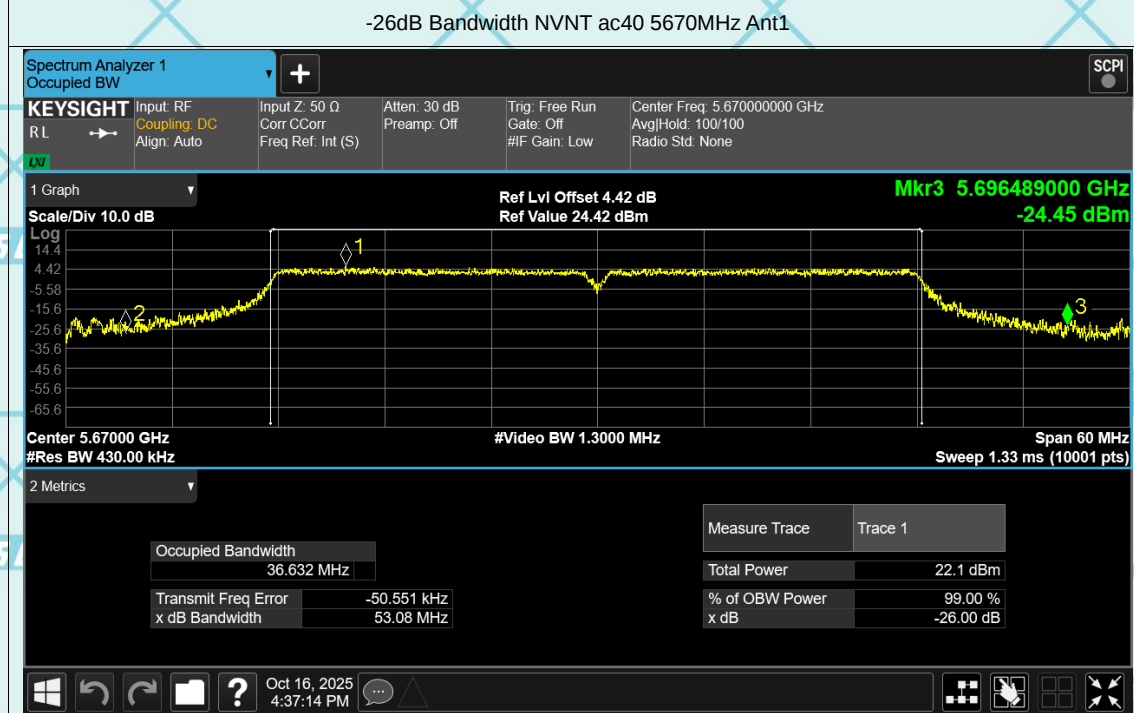
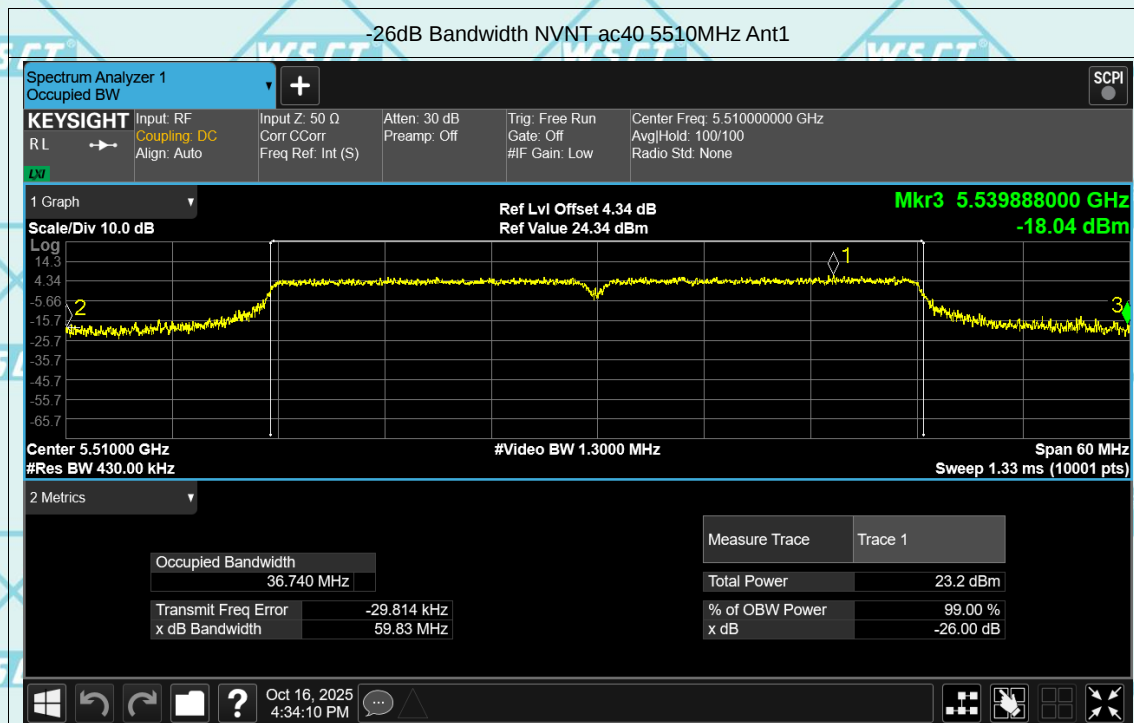


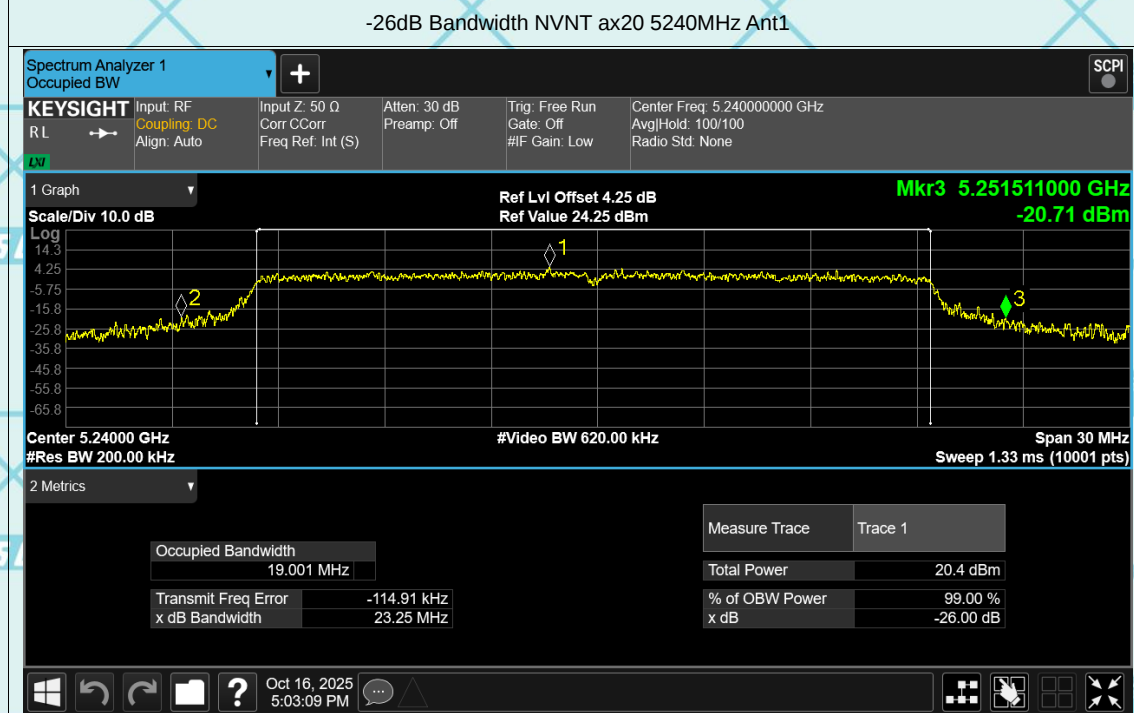
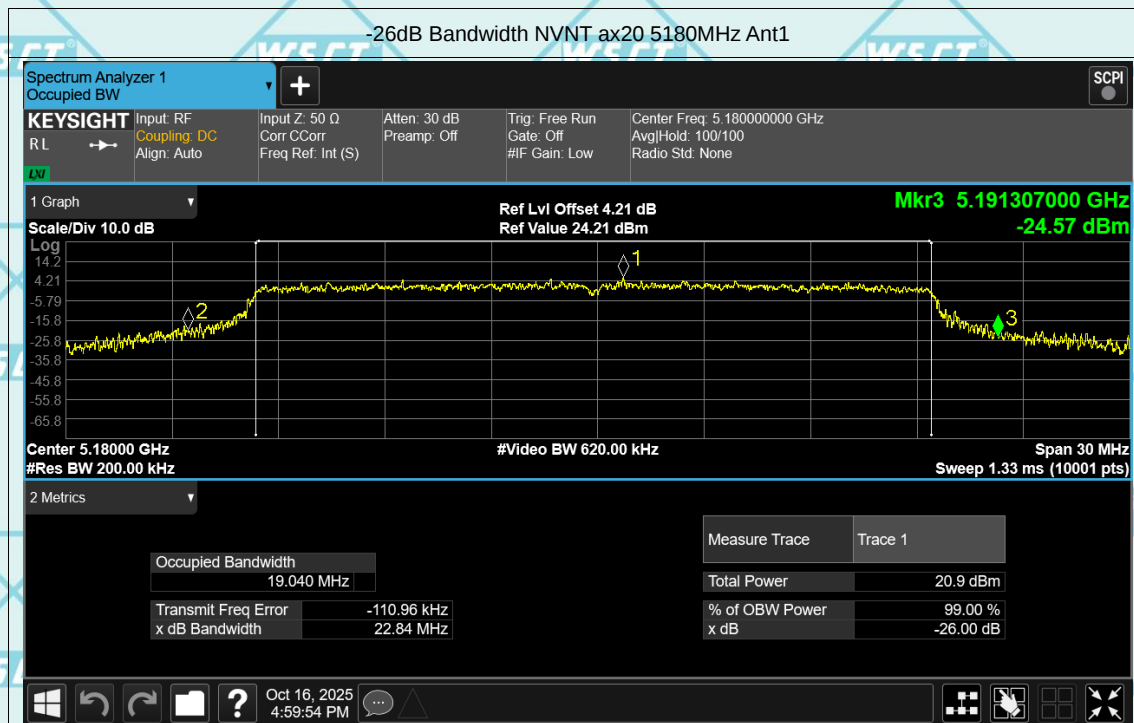


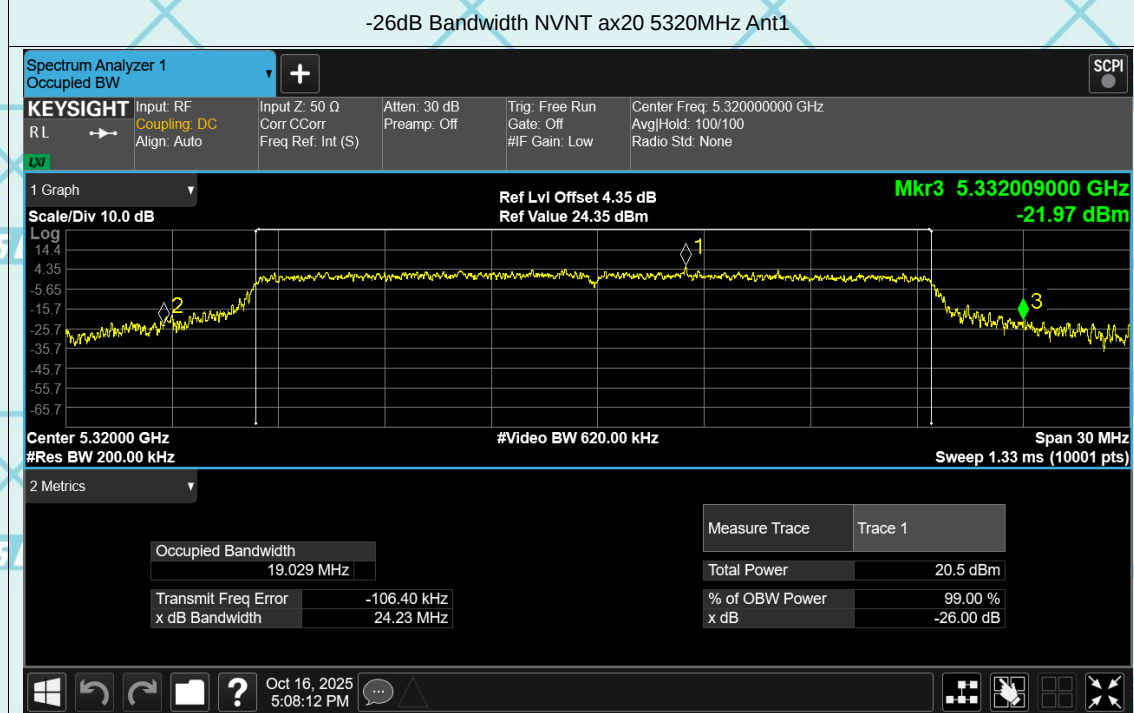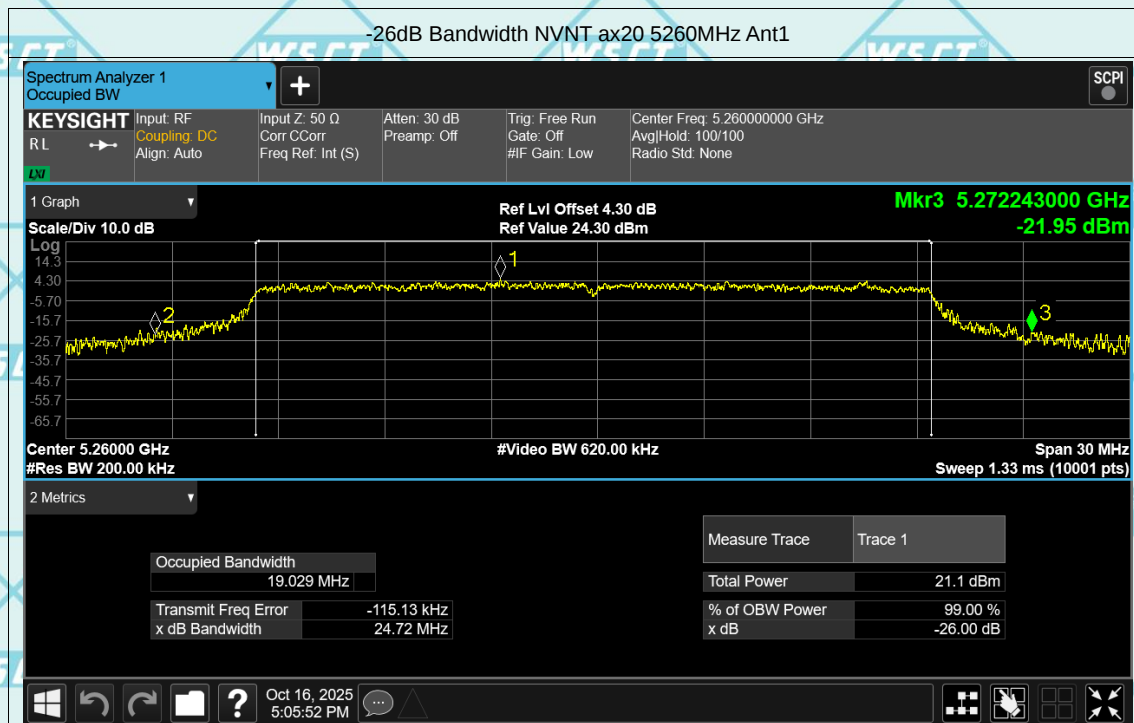

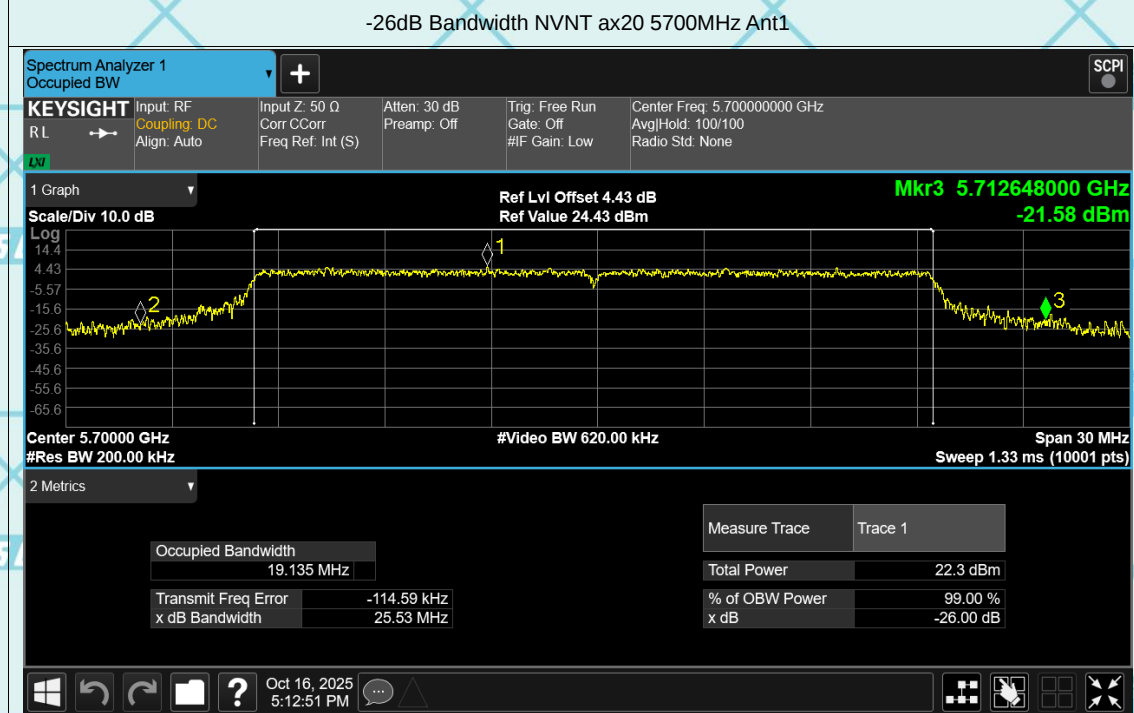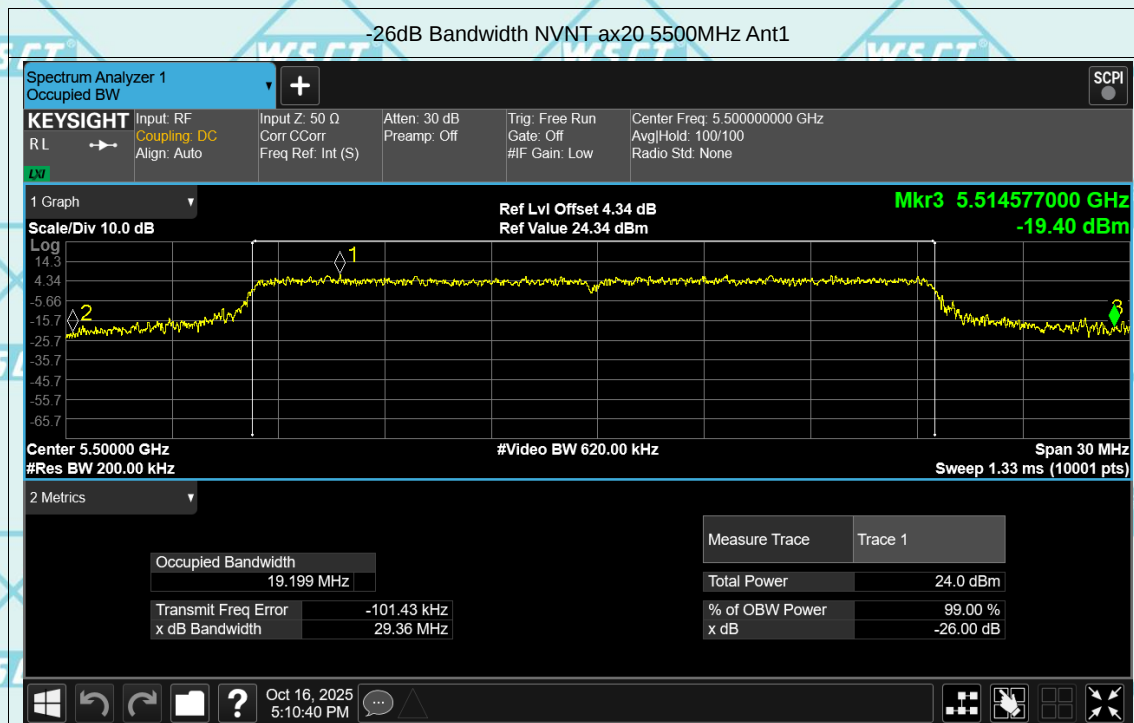

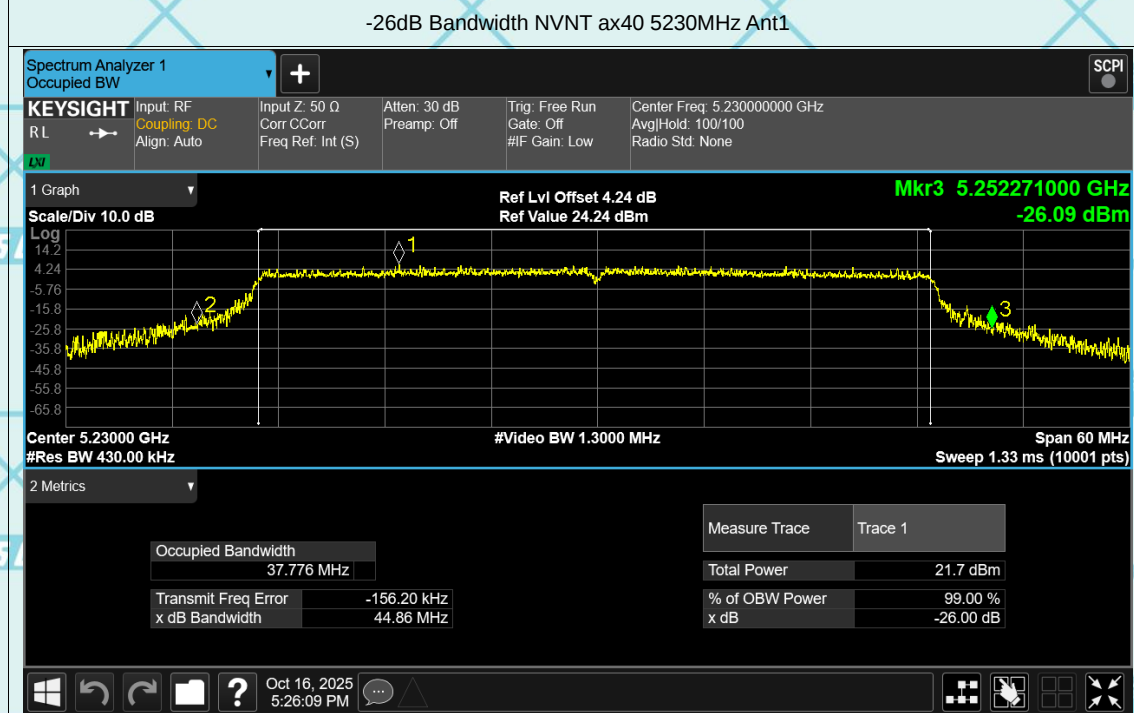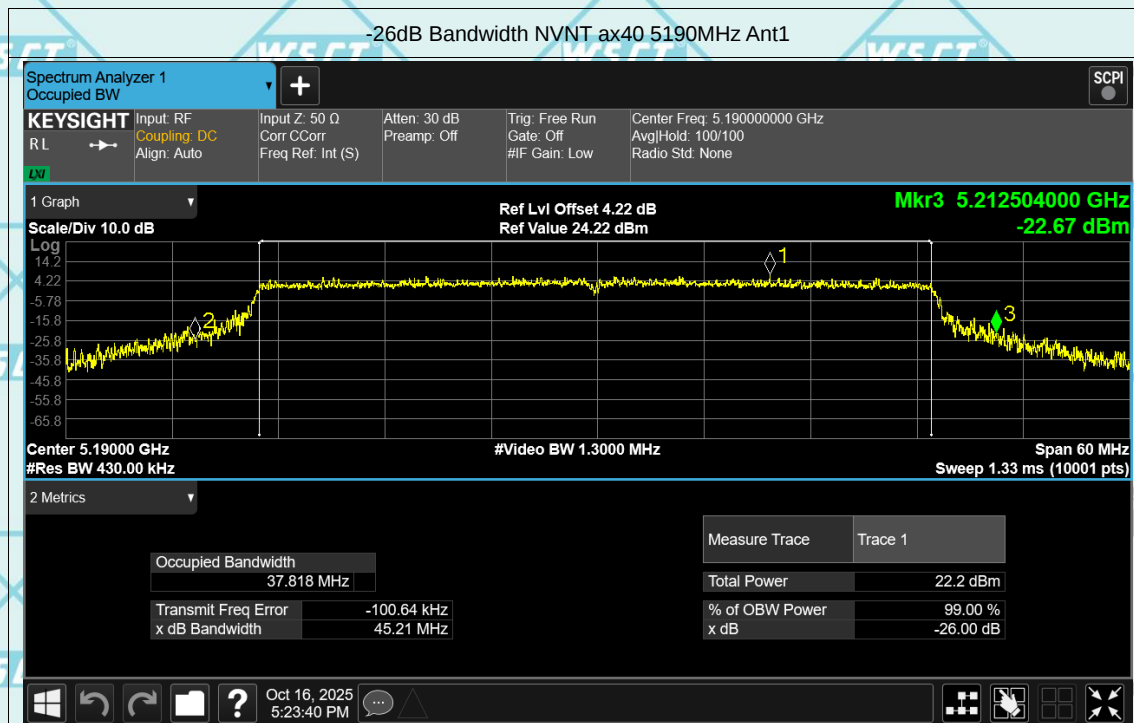


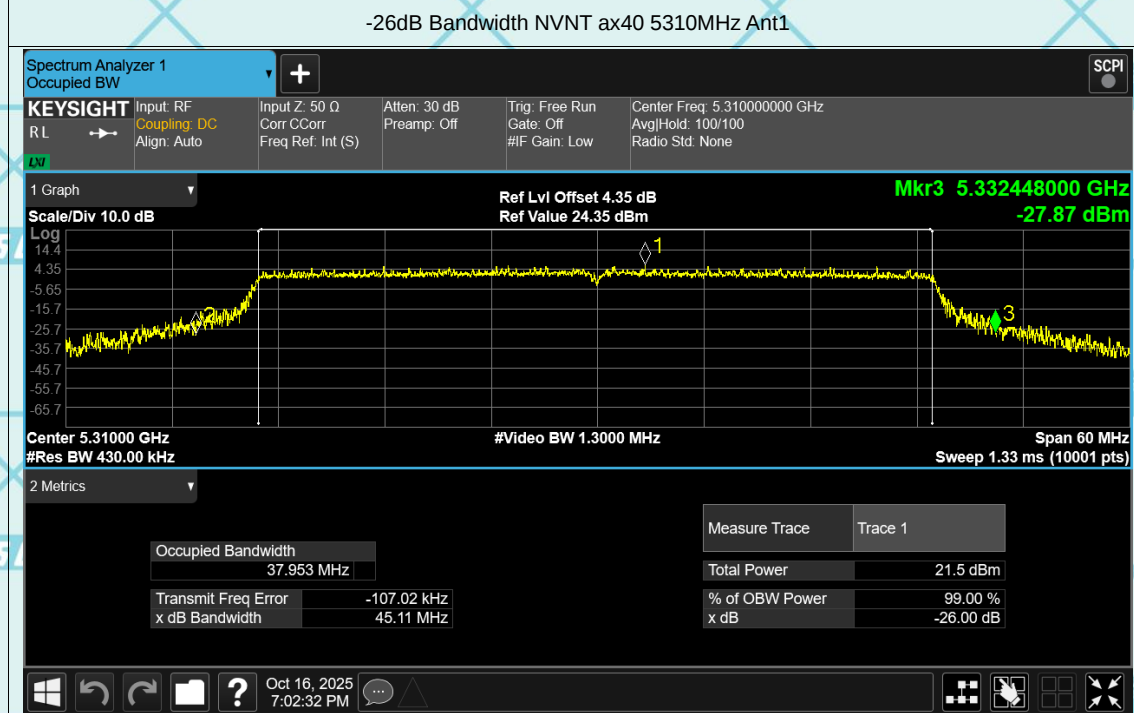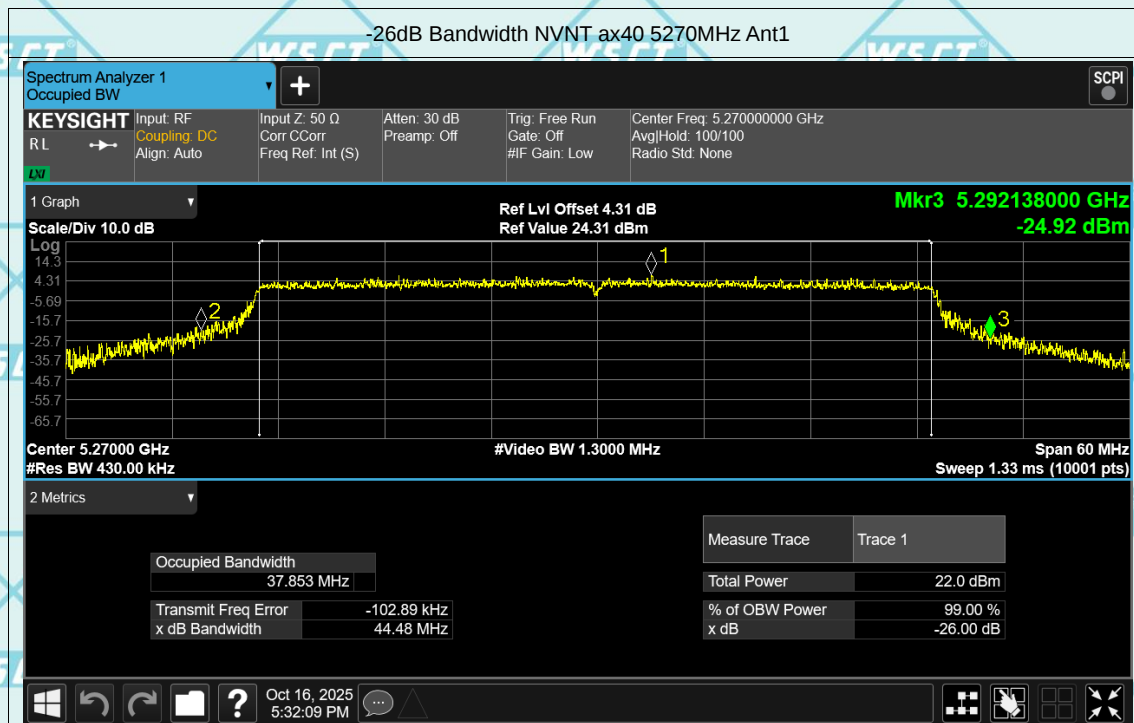

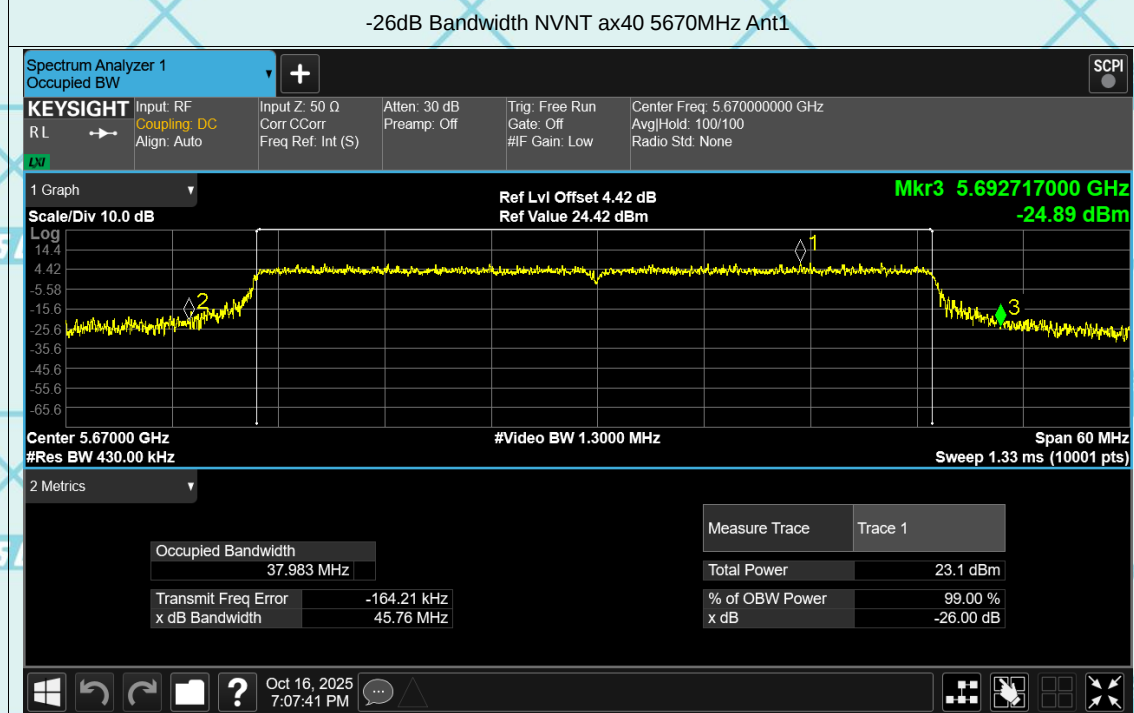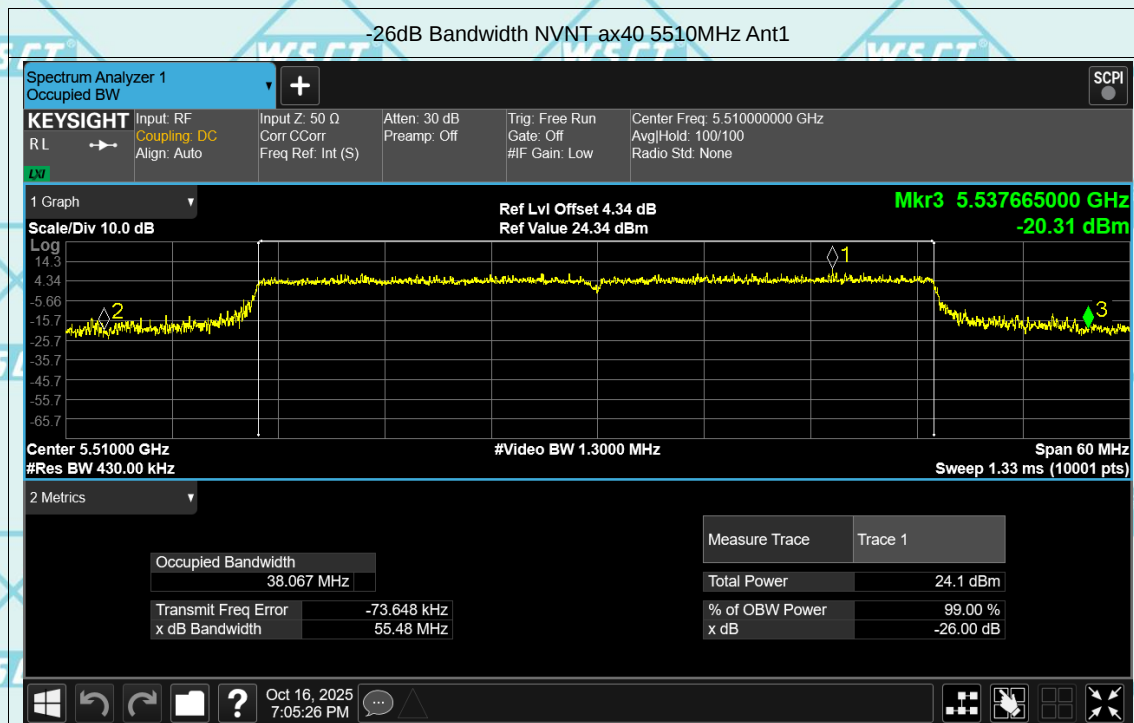




Test Graphs



-6dB Bandwidth NVNT a 5745MHz Ant1


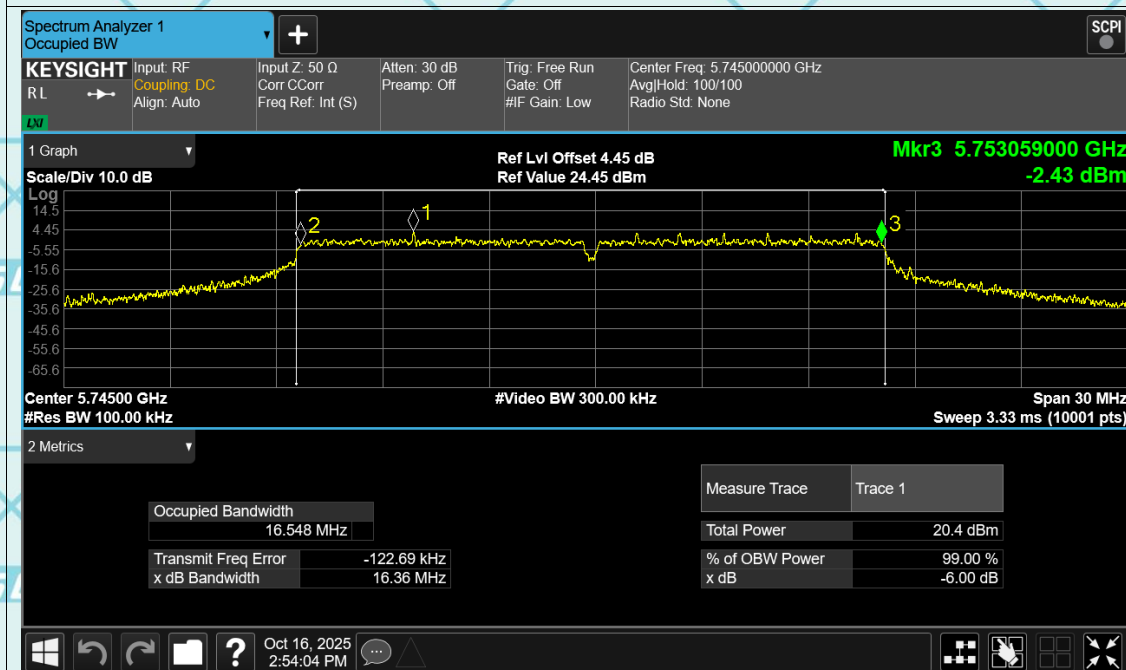




-6dB Bandwidth NVNT a 5825MHz Ant1


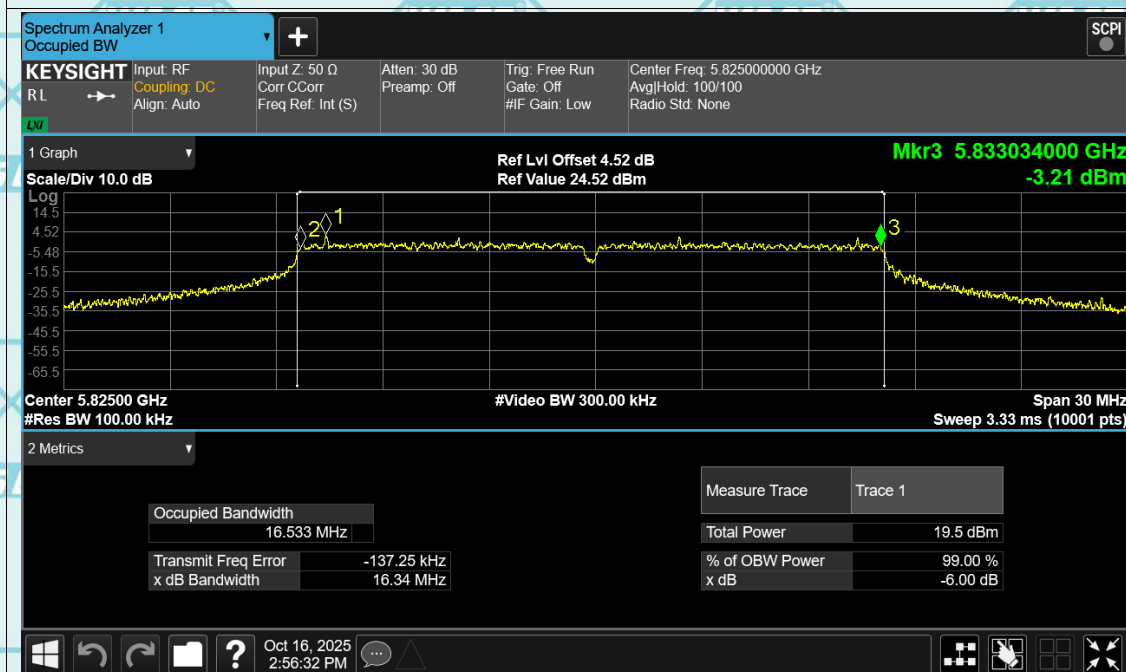


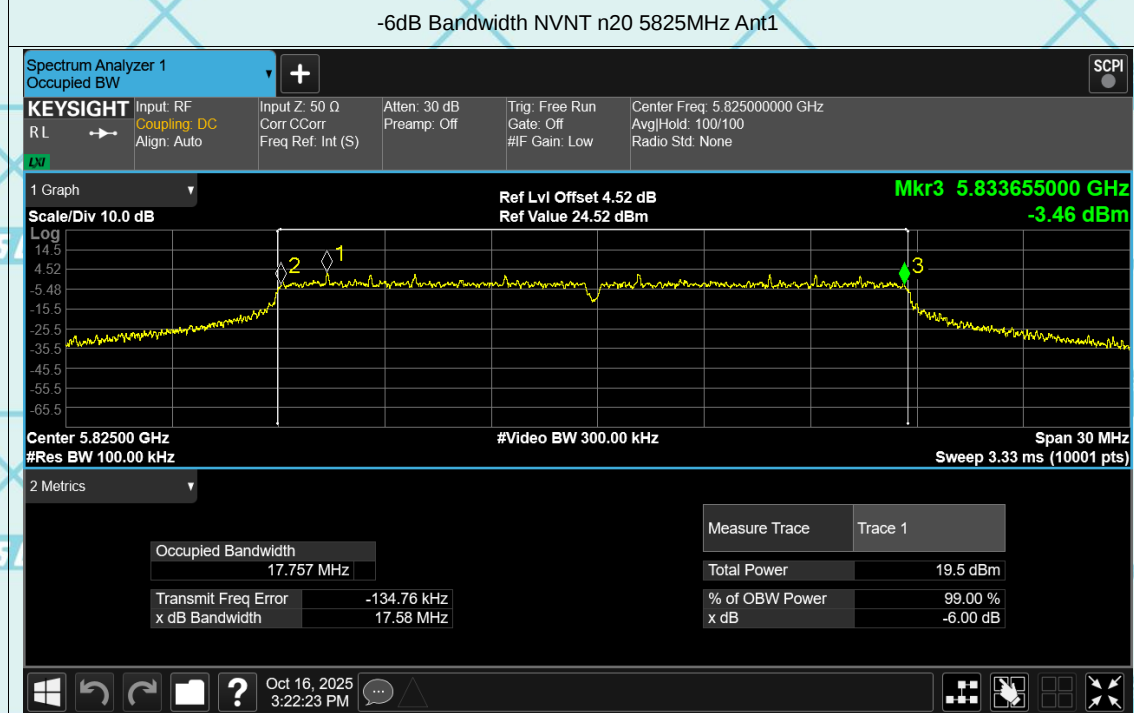
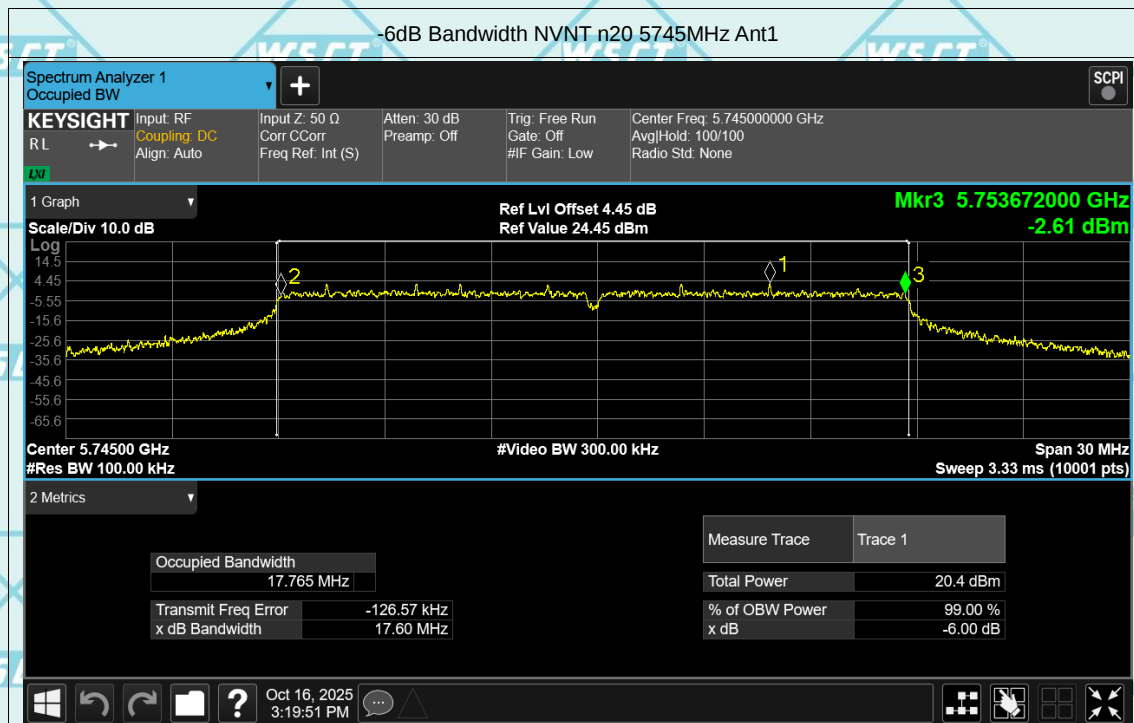


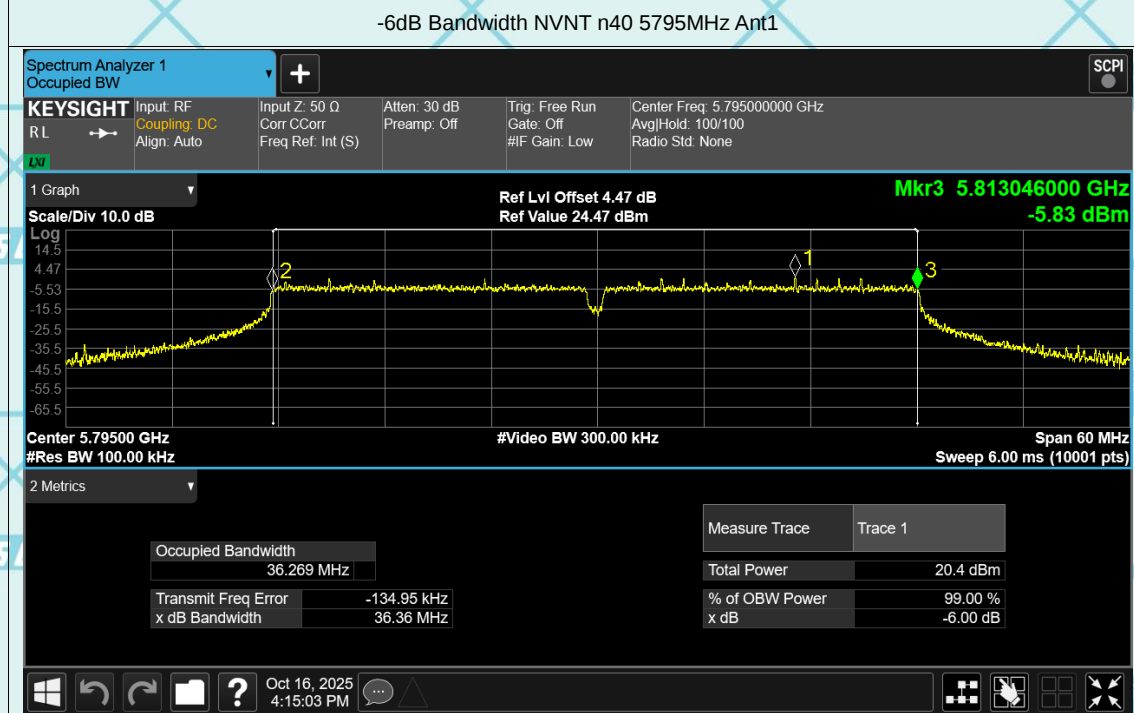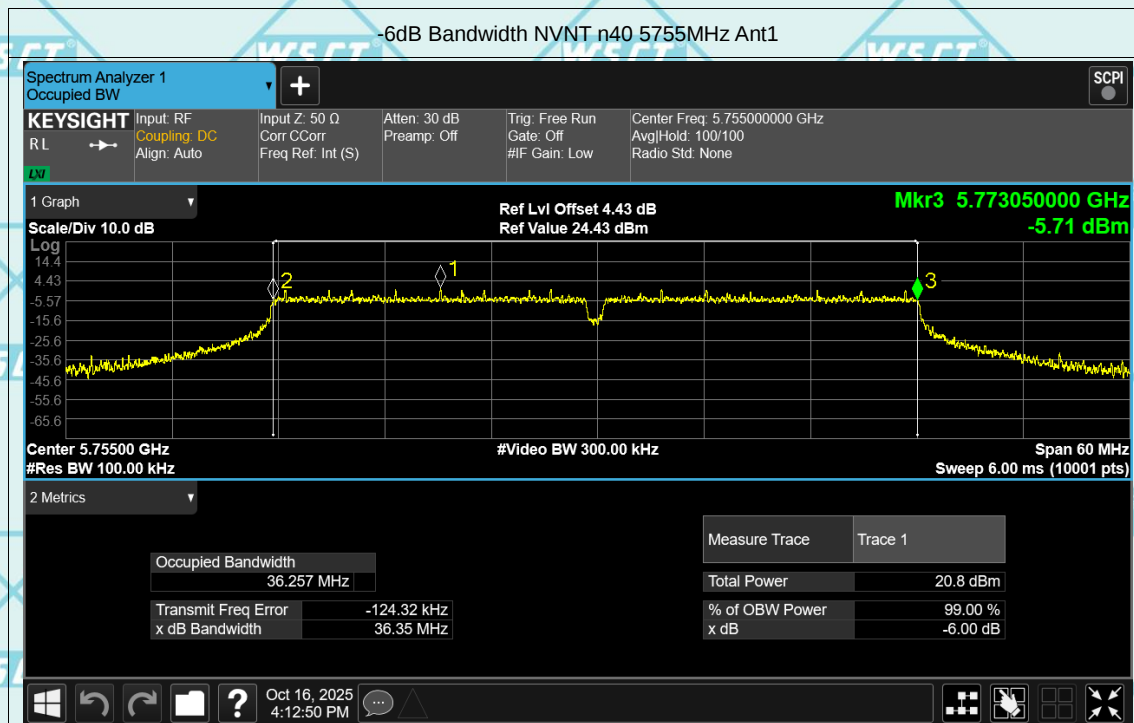

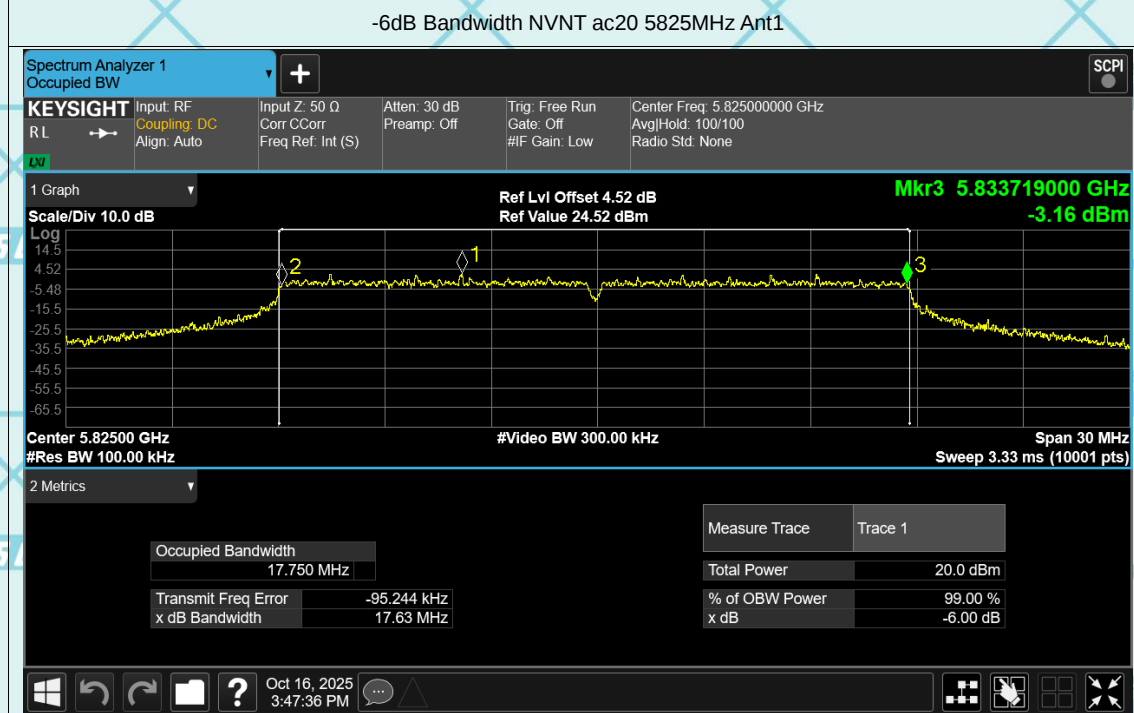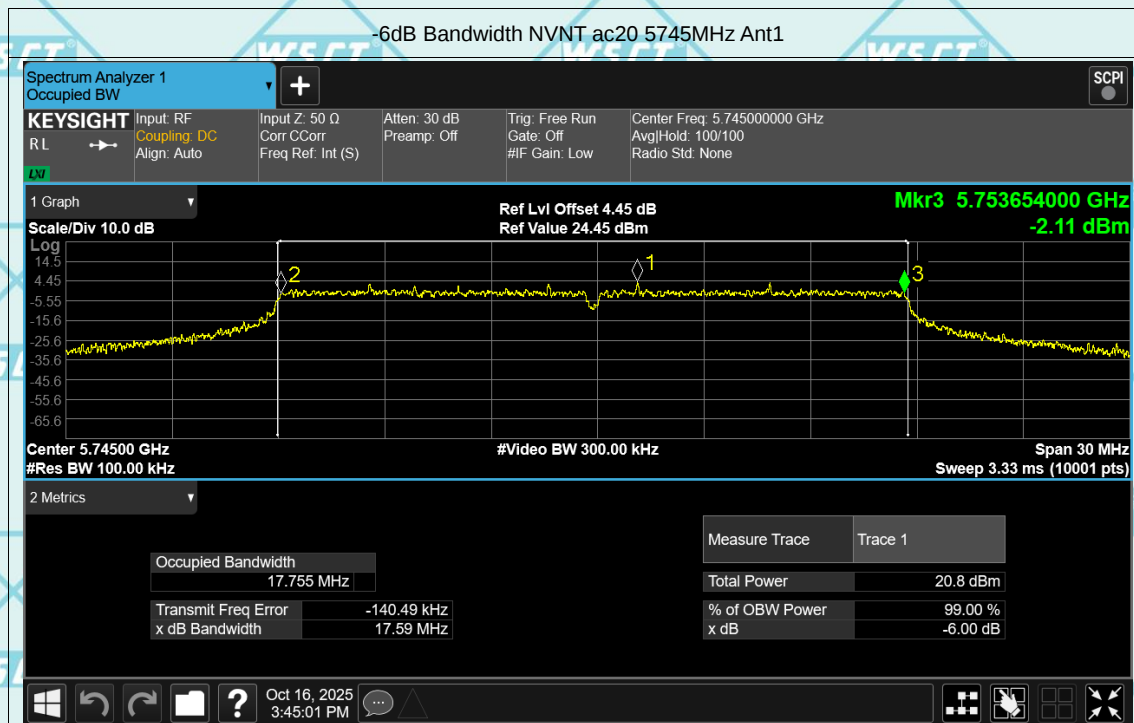

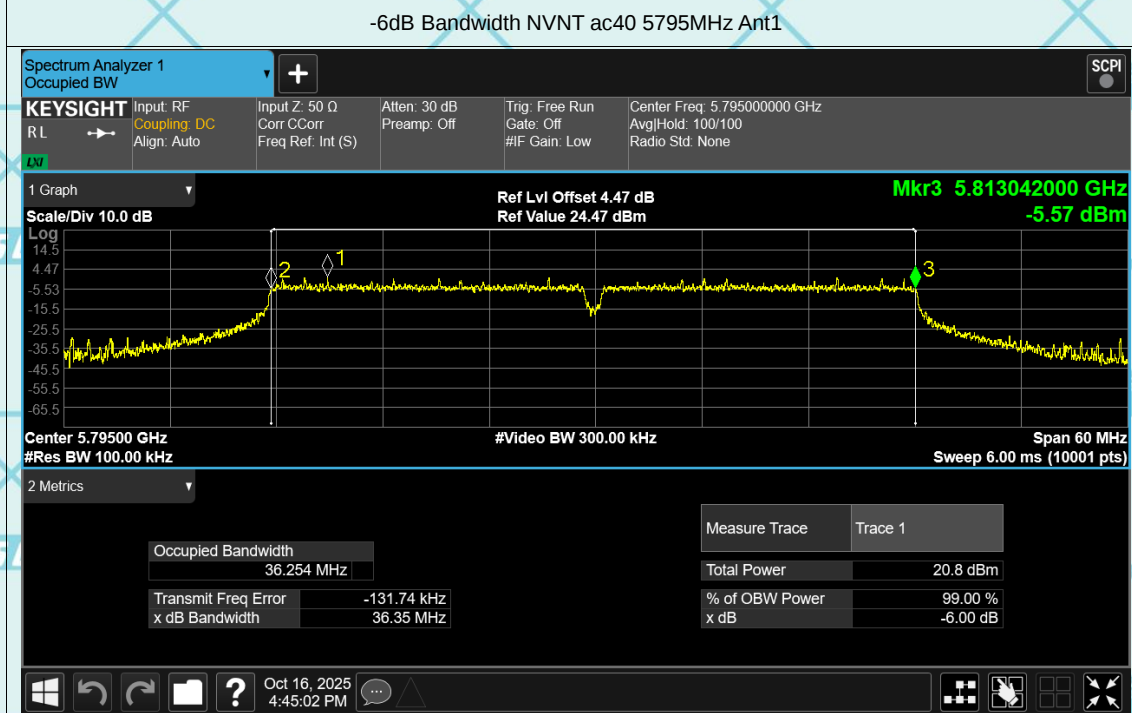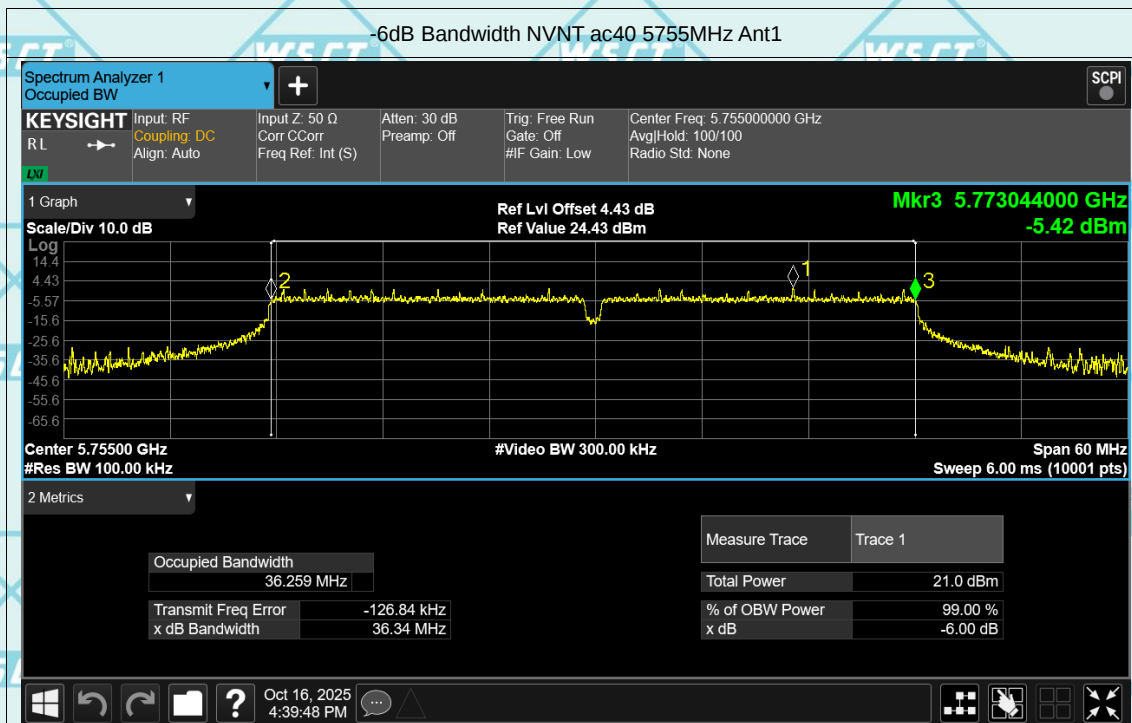

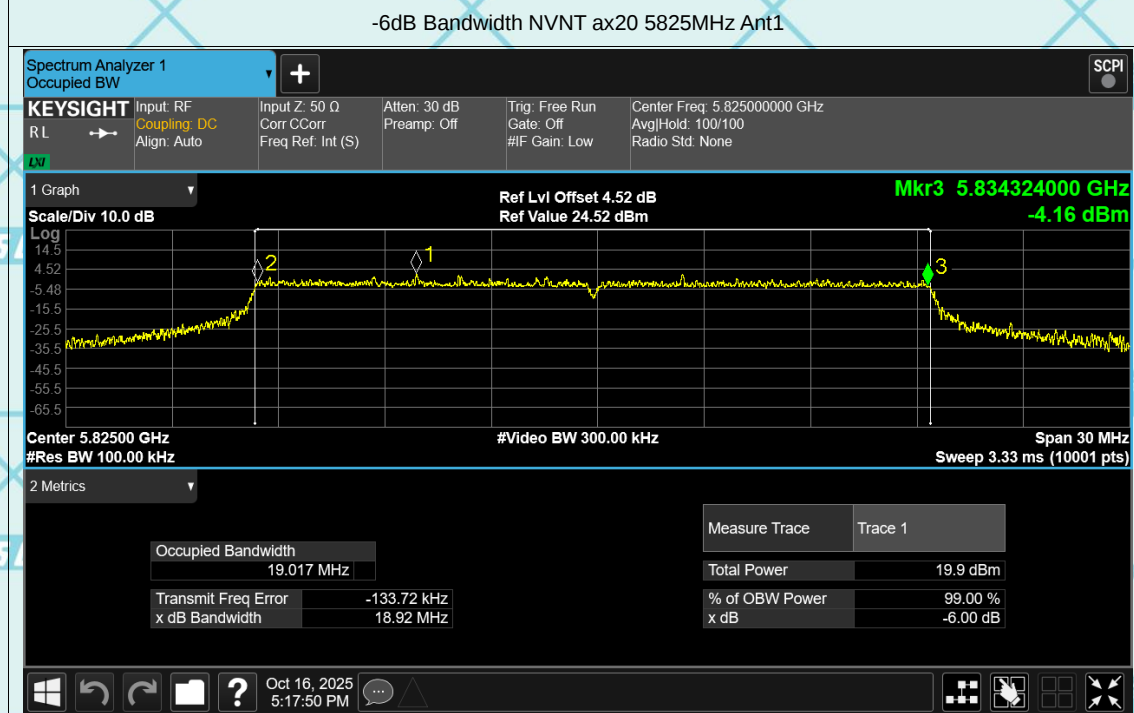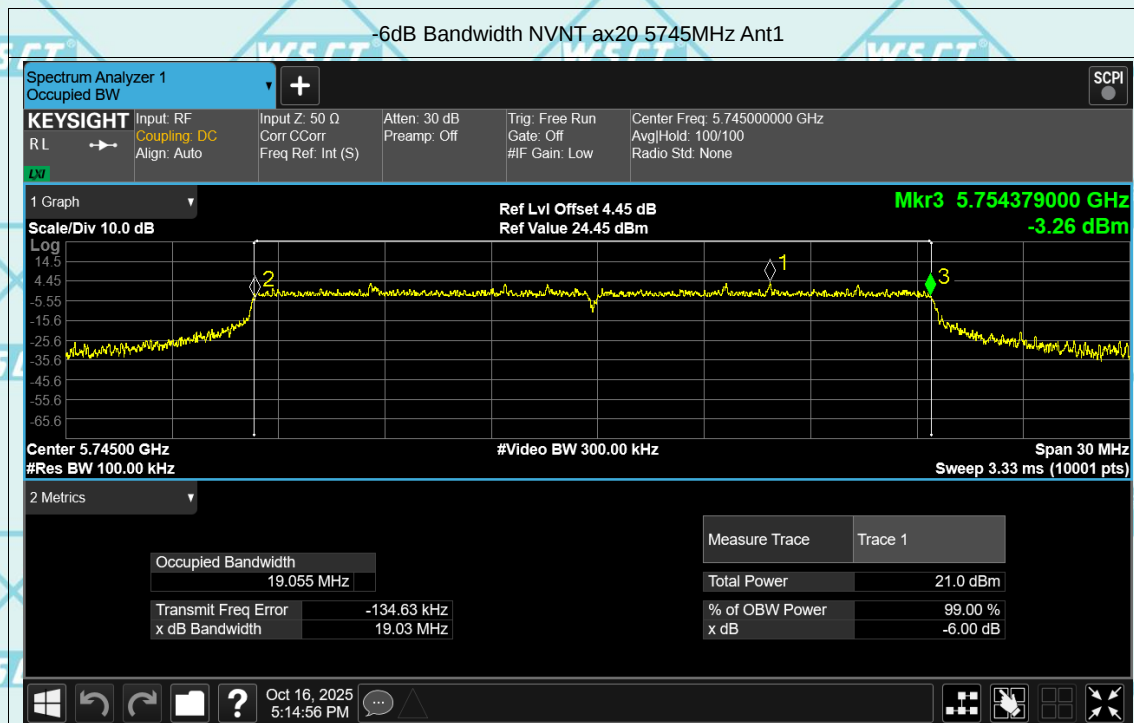

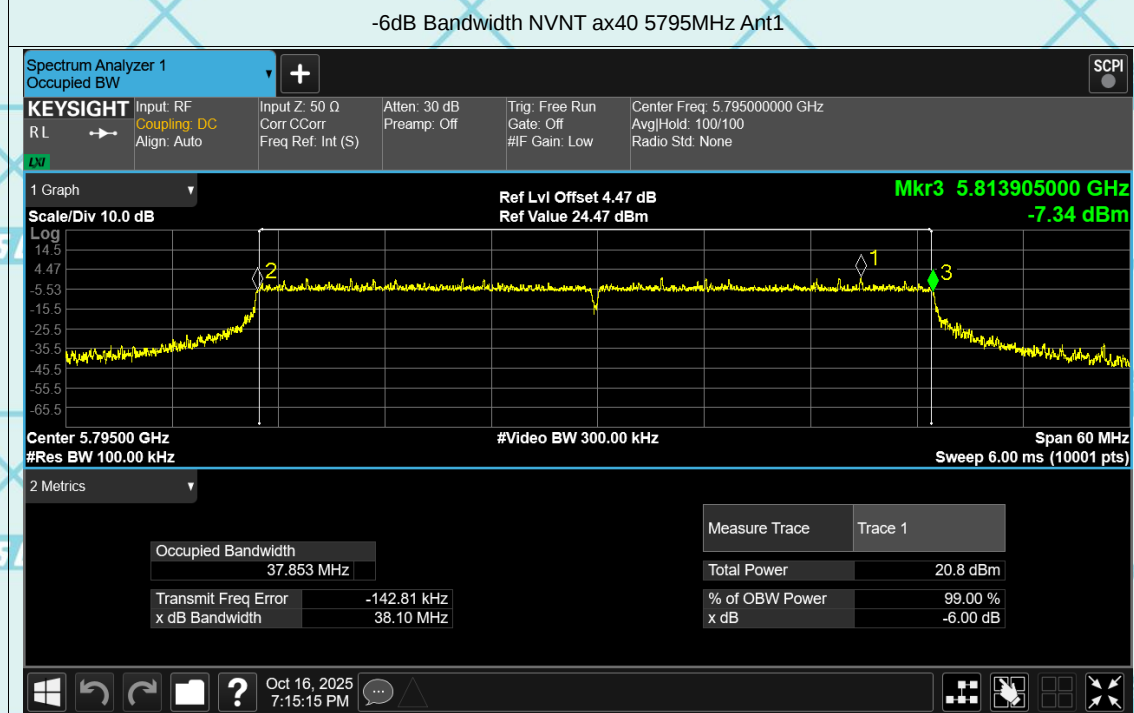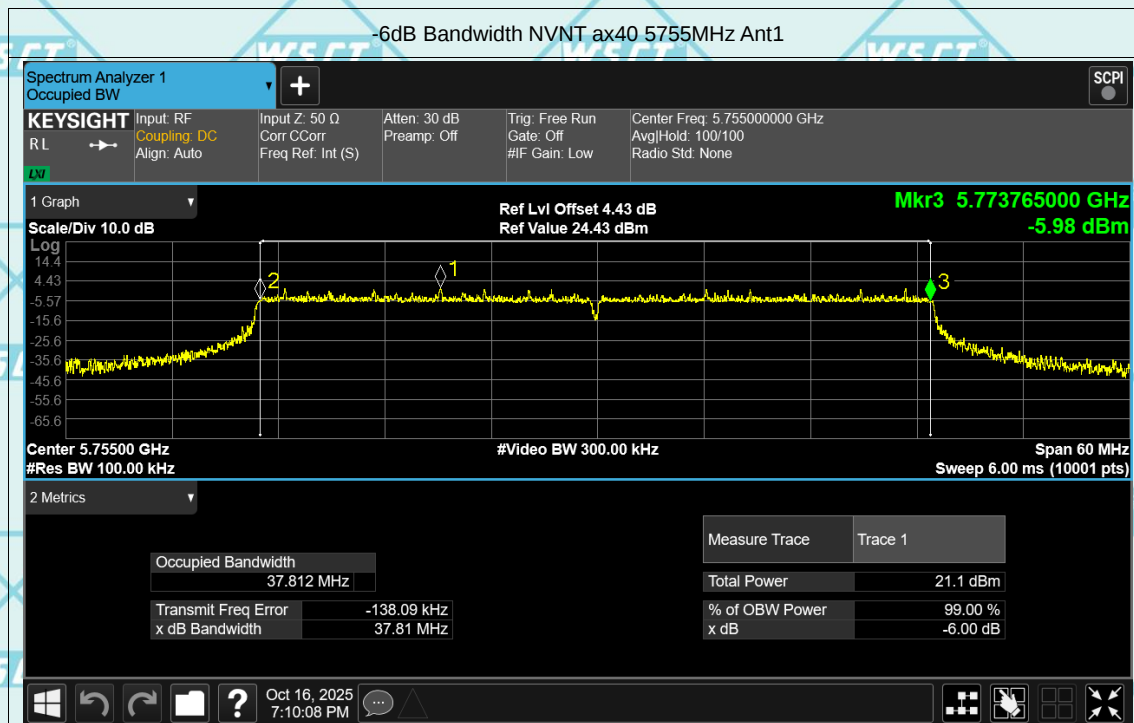

7.5 MAXIMUM CONDUCTED (AVERAGE) OUTPUT POWER


Product	: Projector	Test Mode	: See Section 3.4
Test Item	: Average Power	Temperature	: 25 °C
Test Voltage	: DC 11.55V	Humidity	: 56%RH
Test Result	: PASS		

Total Power(dBm)= Conducted Power+ Duty Factor

Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
a	5180	14.25	0.37	14.62	24	Pass
a	5240	14.46	0.25	14.71	24	Pass
a	5260	15.23	0.36	15.59	24	Pass
a	5320	14.49	0.42	14.91	24	Pass
a	5500	17.65	0.35	18	24	Pass
a	5700	16.07	0.34	16.41	24	Pass
a	5745	15.27	0.32	15.59	30	Pass
a	5825	14.23	0.39	14.62	30	Pass
n20	5180	14.15	0.3	14.45	24	Pass
n20	5240	14.2	0.27	14.47	24	Pass
n20	5260	15.12	0.36	15.48	24	Pass
n20	5320	14.3	0.28	14.58	24	Pass
n20	5500	17.58	0.3	17.88	24	Pass
n20	5700	16.04	0.25	16.29	24	Pass
n20	5745	14.86	0.26	15.12	30	Pass
n20	5825	14.19	0.48	14.67	30	Pass
n40	5190	14.45	3.15	17.6	24	Pass
n40	5230	14.26	0.55	14.81	24	Pass
n40	5270	14.81	0.97	15.78	24	Pass
n40	5310	14.41	0.77	15.18	24	Pass
n40	5510	17.02	0.91	17.93	24	Pass
n40	5670	15.62	0.97	16.59	24	Pass
n40	5755	15.38	0.68	16.06	30	Pass
n40	5795	15.14	0.68	15.82	30	Pass
ac20	5180	15.14	0.27	15.41	24	Pass
ac20	5240	14.45	0.18	14.63	24	Pass
ac20	5260	14.98	0.44	15.42	24	Pass
ac20	5320	14.37	0.24	14.61	24	Pass
ac20	5500	17.68	0.24	17.92	24	Pass
ac20	5700	16.03	0.25	16.28	24	Pass
ac20	5745	15.61	0.36	15.97	30	Pass
ac20	5825	14.66	0.4	15.06	30	Pass
ac40	5190	14.85	0.75	15.6	24	Pass
ac40	5230	14.58	0.61	15.19	24	Pass
ac40	5270	14.72	0.31	15.03	24	Pass
ac40	5310	14.32	0.66	14.98	24	Pass
ac40	5510	17.09	0.77	17.86	24	Pass
ac40	5670	15.95	0.59	16.54	24	Pass
ac40	5755	15.46	0.87	16.33	30	Pass
ac40	5795	15.41	0.31	15.72	30	Pass
ax20	5180	15.11	0.83	15.94	24	Pass
ax20	5240	14.31	0.56	14.87	24	Pass
ax20	5260	14.93	0.2	15.13	24	Pass
ax20	5320	14.08	0.61	14.69	24	Pass
ax20	5500	17.53	0.51	18.04	24	Pass
ax20	5700	16.09	0.56	16.65	24	Pass
ax20	5745	15.46	0.5	15.96	30	Pass
ax20	5825	14.63	0.63	15.26	30	Pass
ax40	5190	14.9	0.56	15.46	24	Pass
ax40	5230	14.43	1.04	15.47	24	Pass
ax40	5270	14.74	0.82	15.56	24	Pass
ax40	5310	14.12	0.65	14.77	24	Pass
ax40	5510	16.9	0.8	17.7	24	Pass
ax40	5670	15.67	0.84	16.51	24	Pass
ax40	5755	15.47	0.96	16.43	30	Pass
ax40	5795	15.16	0.78	15.94	30	Pass

Test Graphs

Power NVNT a 5180MHz Ant1

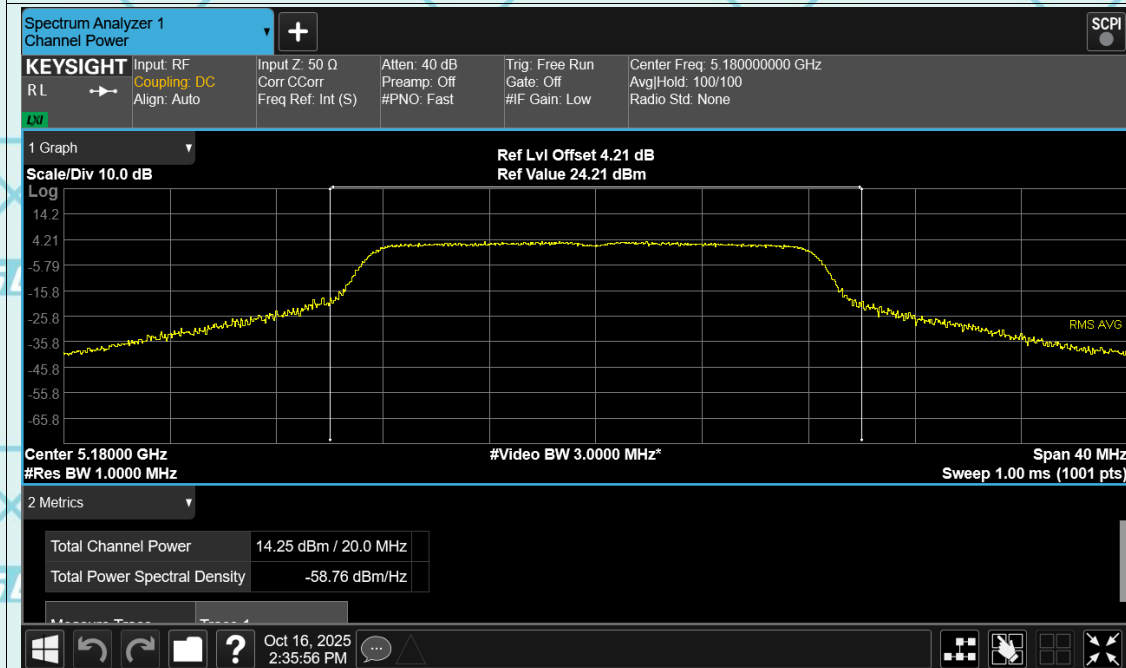

Power NVNT a 5240MHz Ant1

