



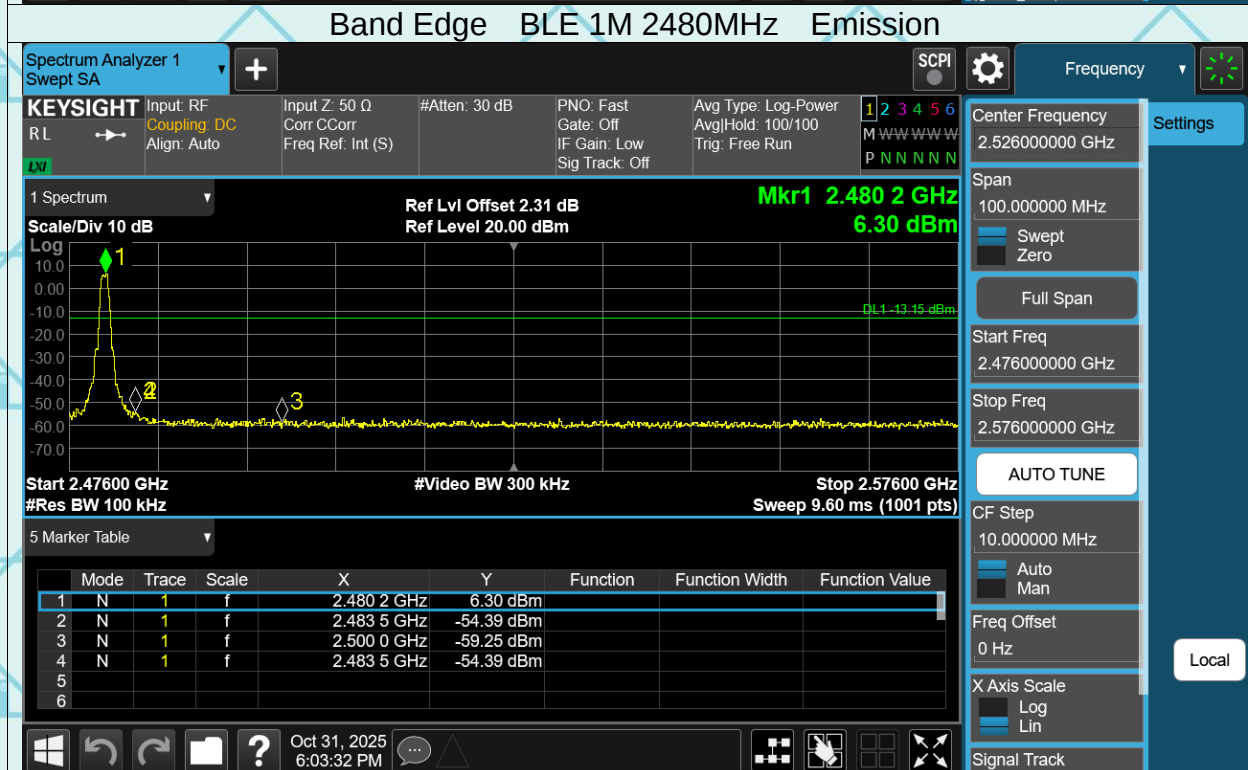
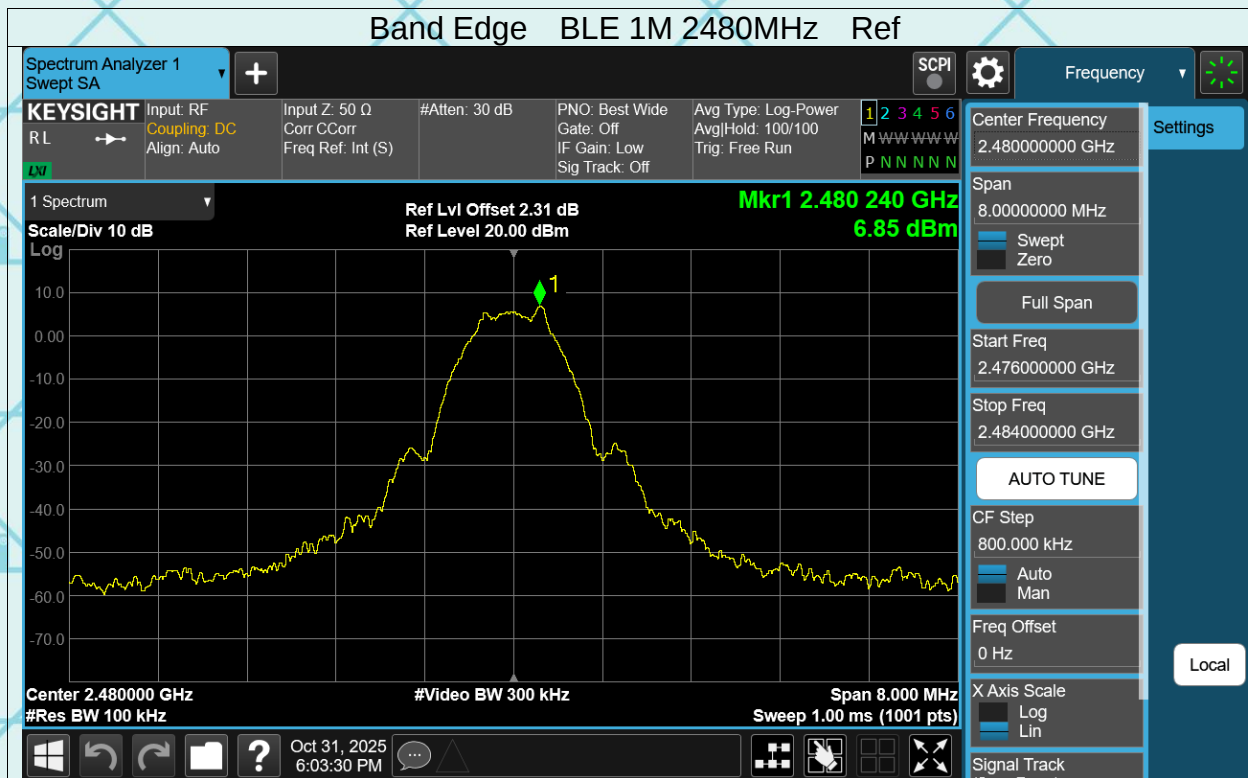
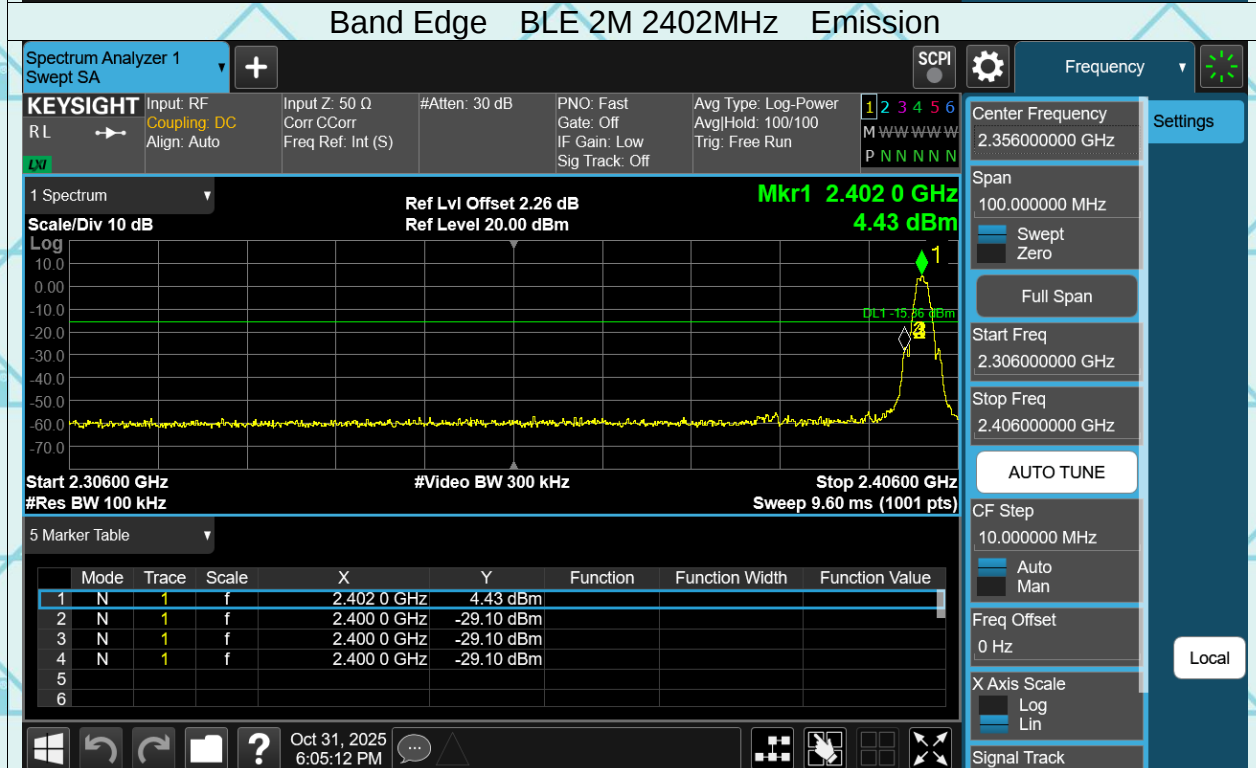
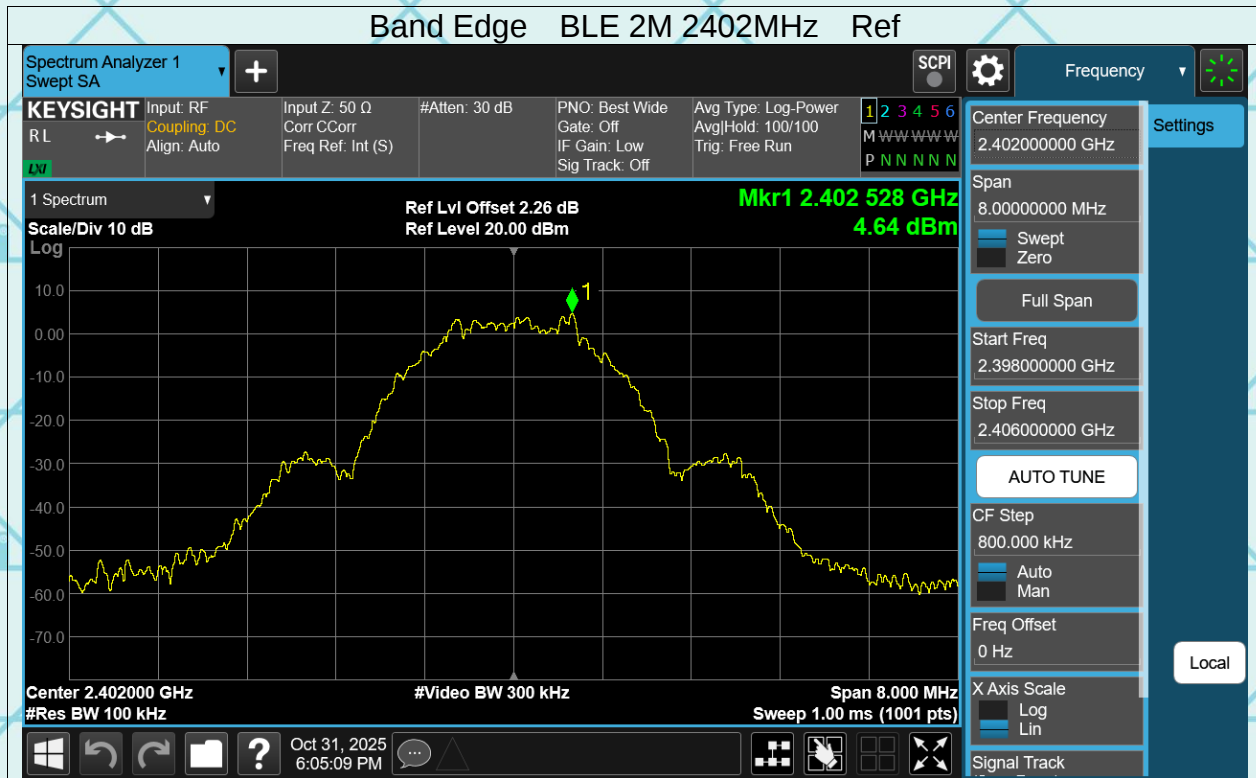



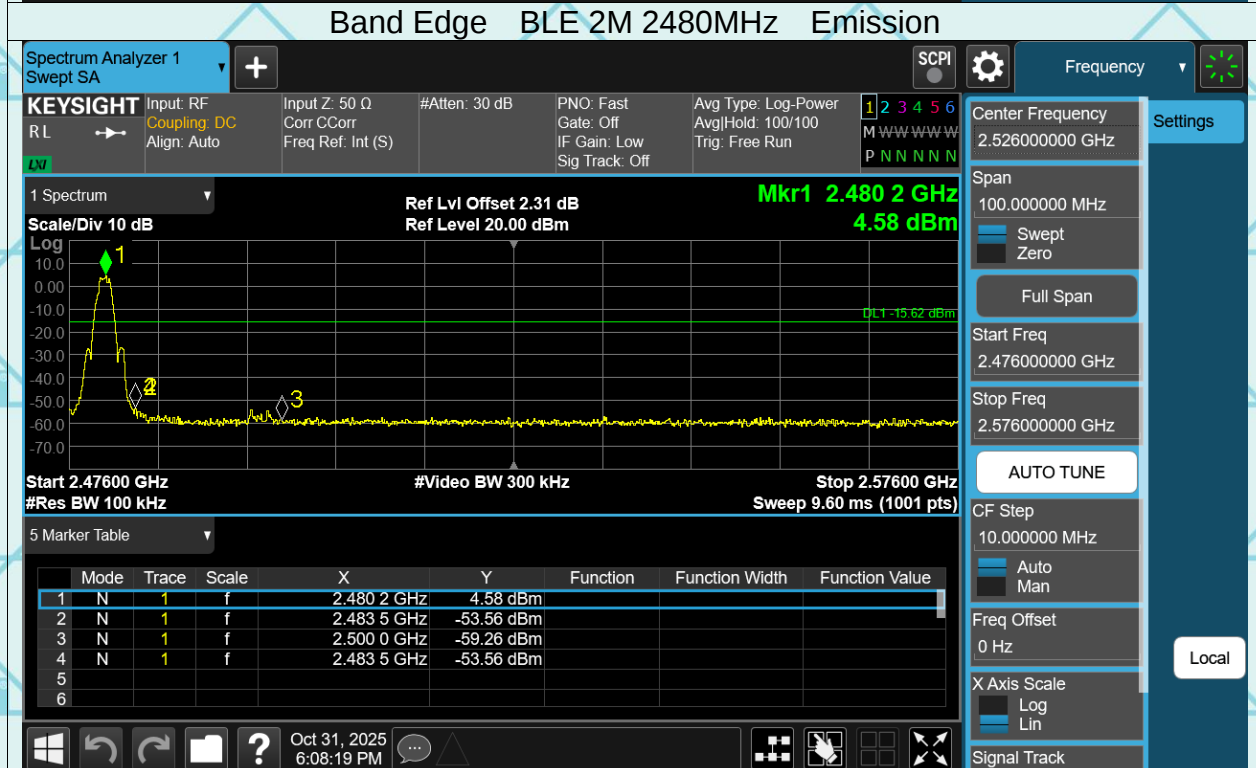



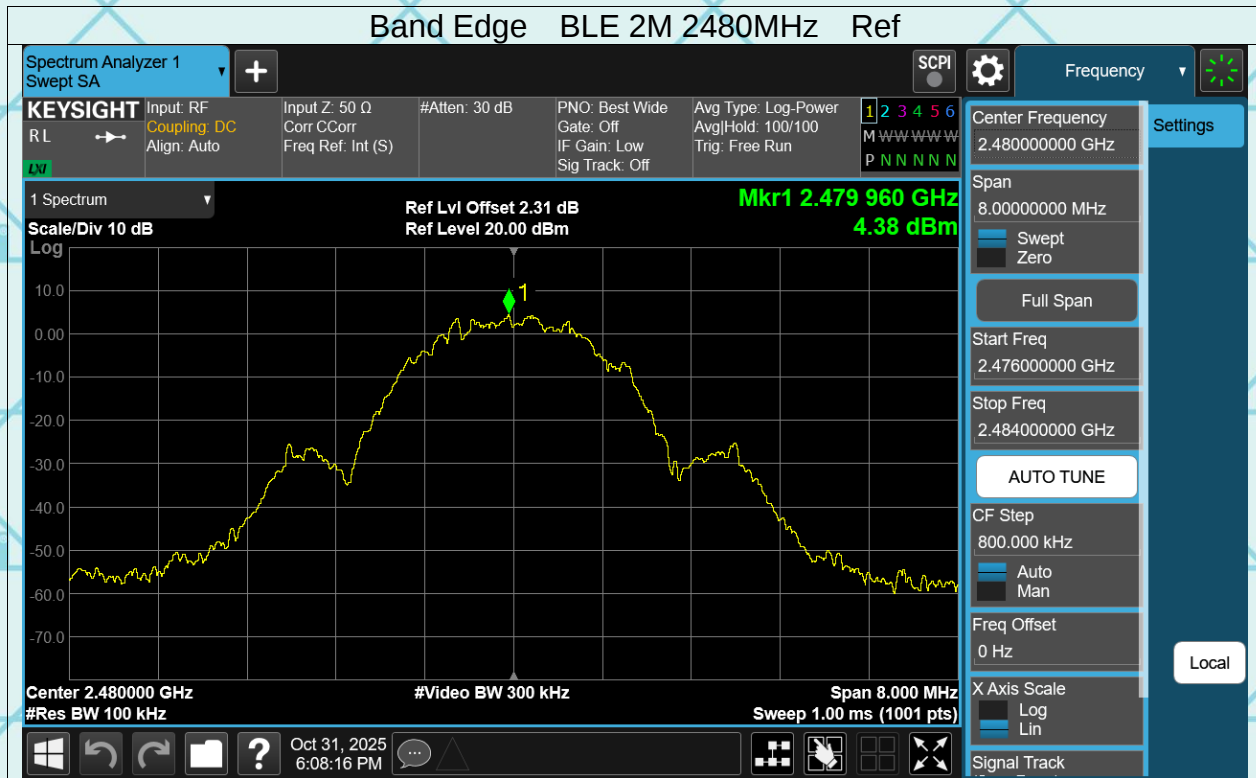


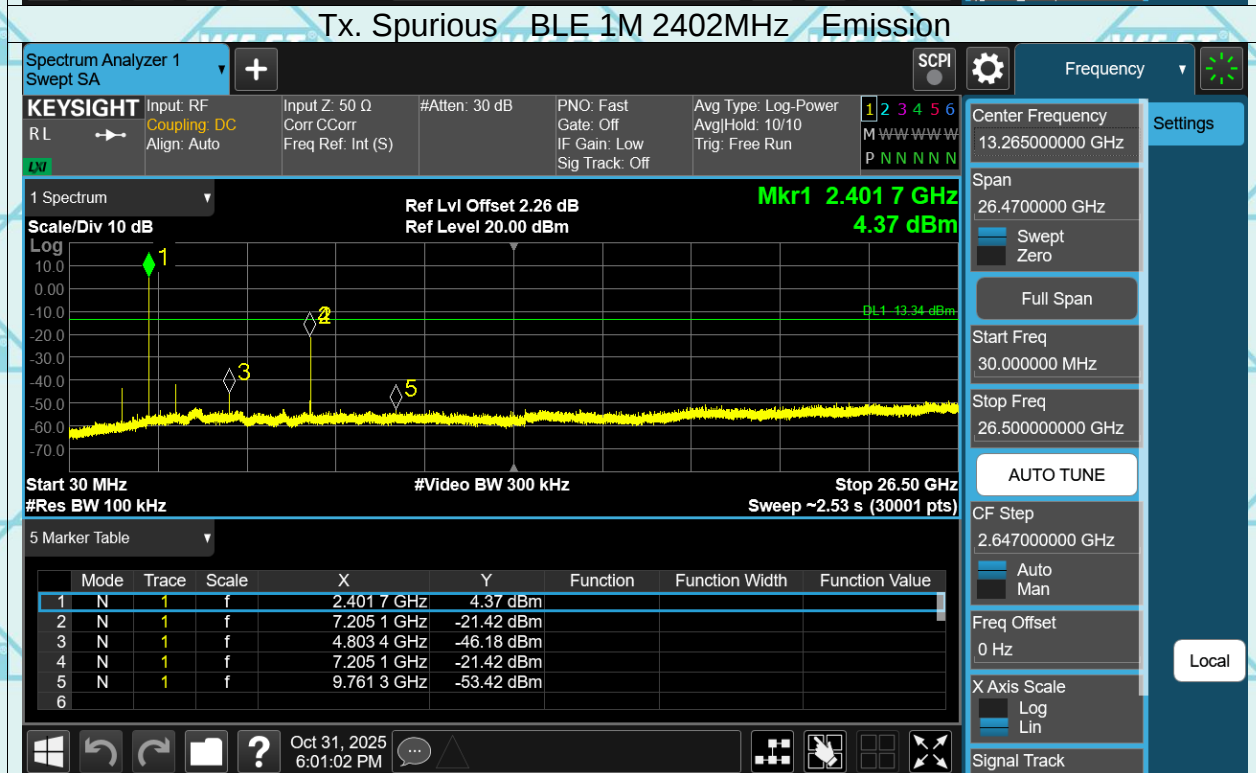



Report No.: WSCT-ANAB-R&E251000082A-LE Issued: 14 November 2025
Conducted RF Spurious Emission

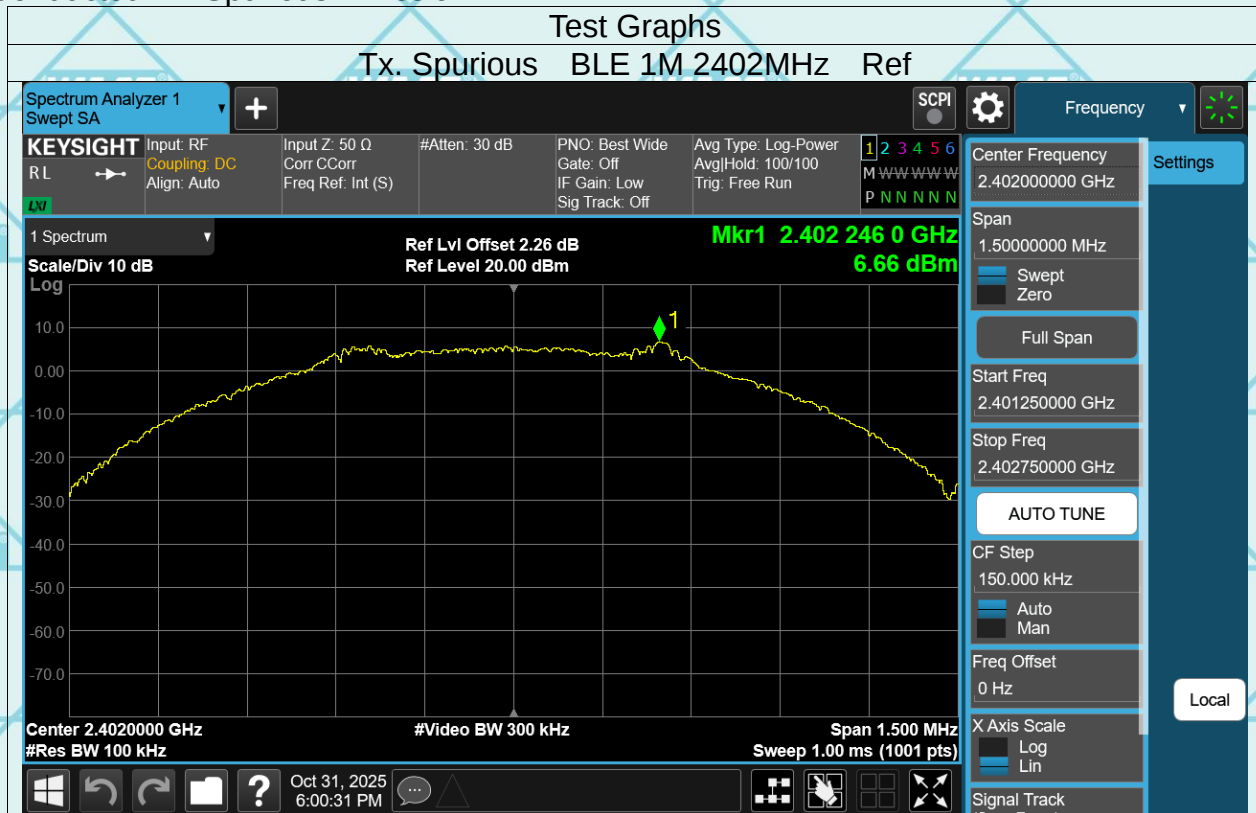


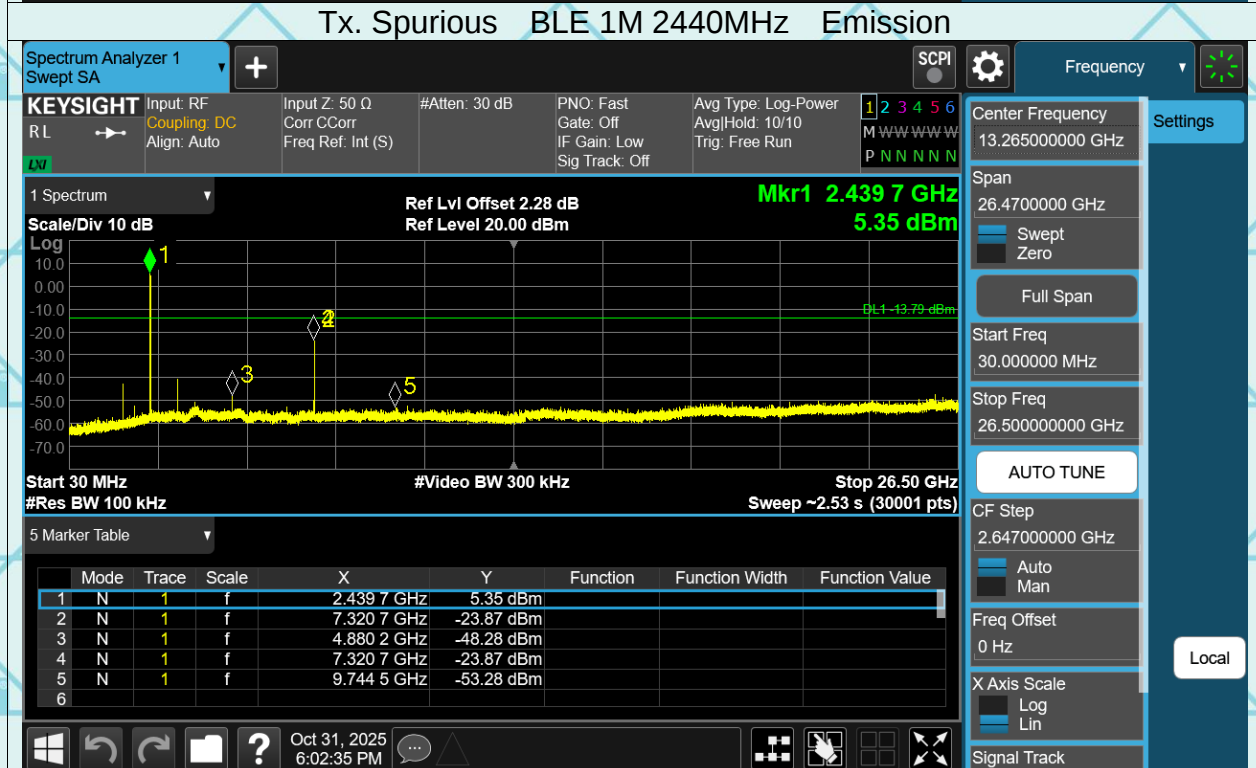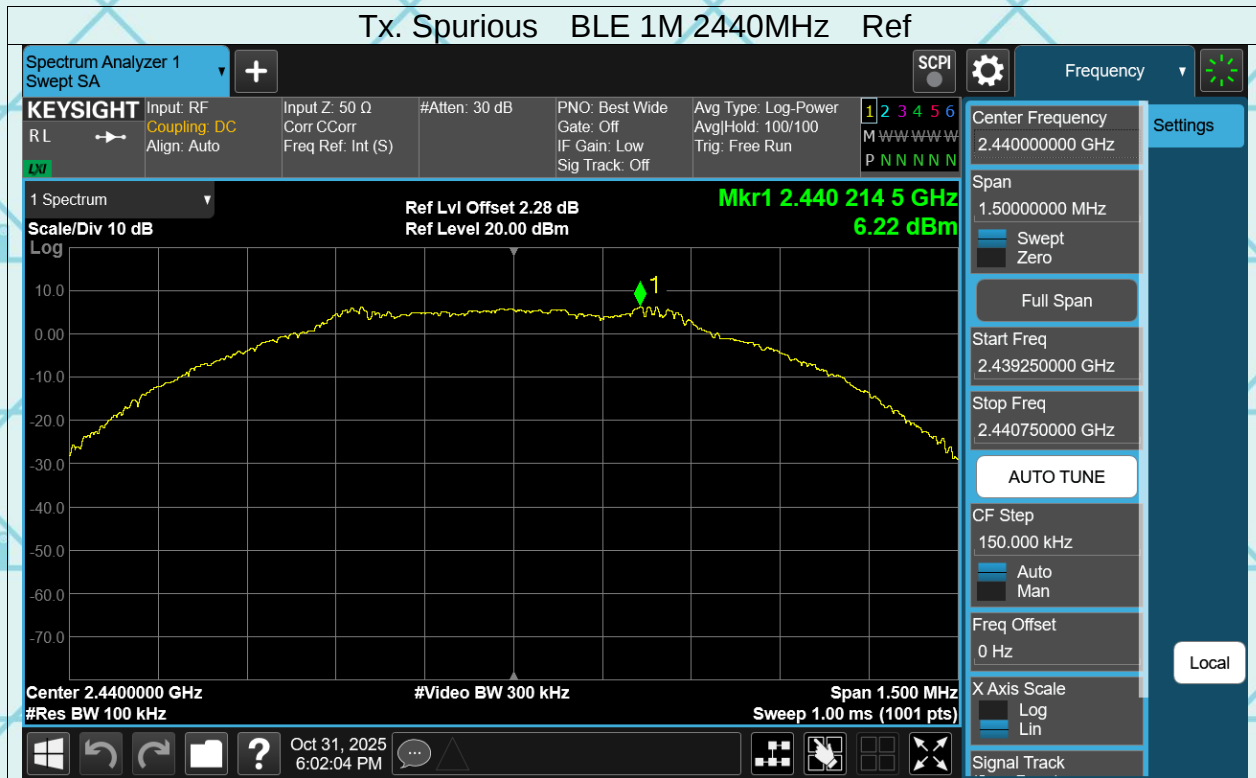

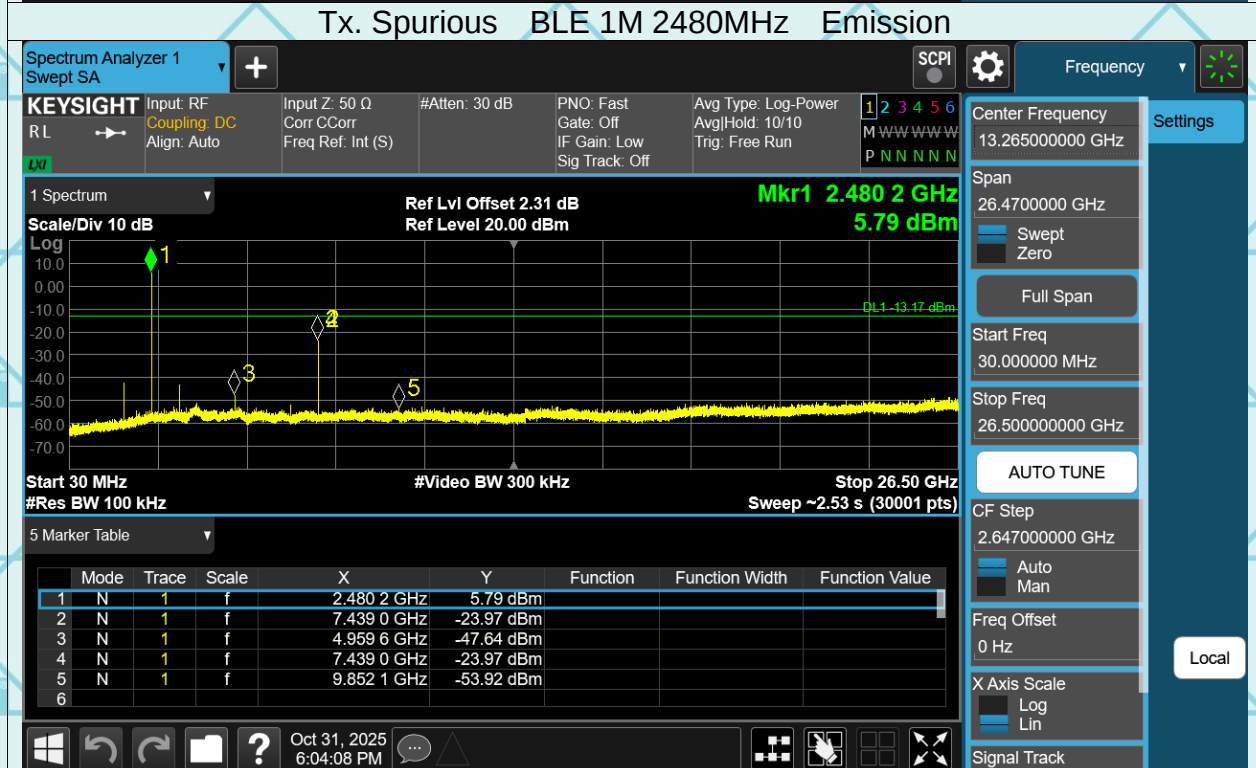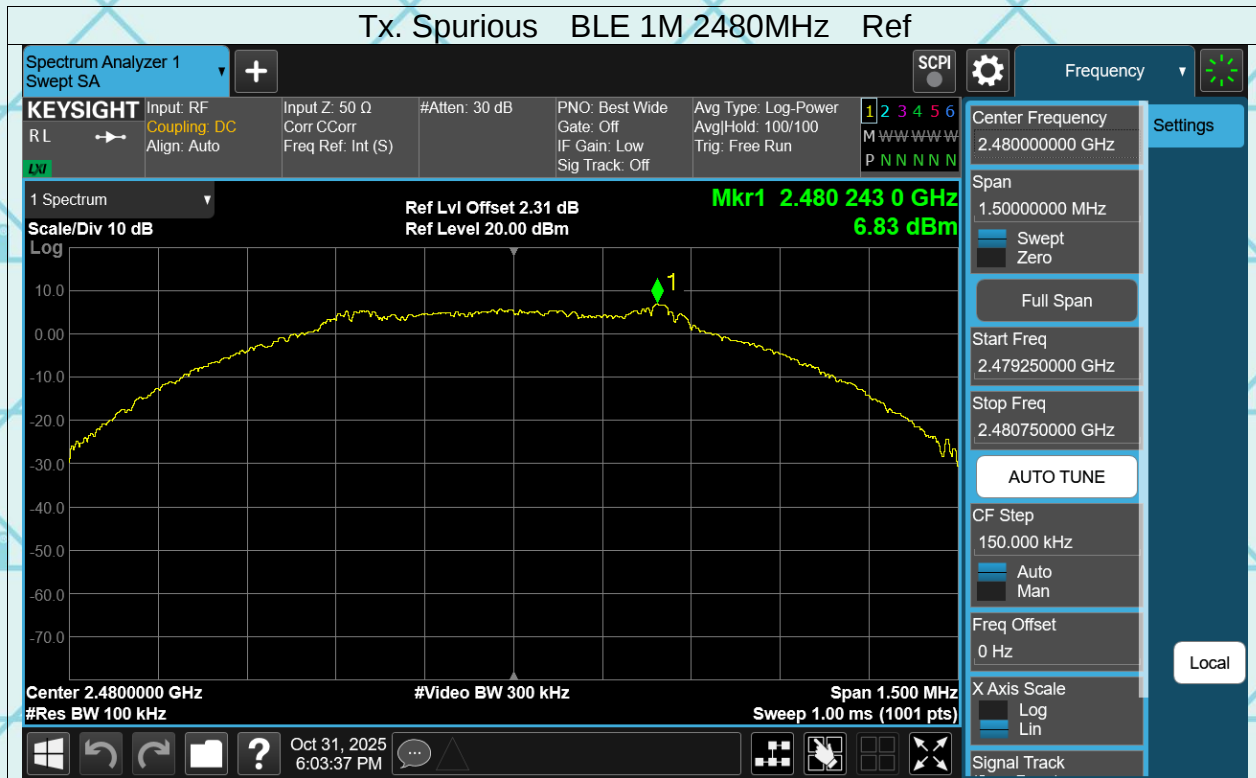

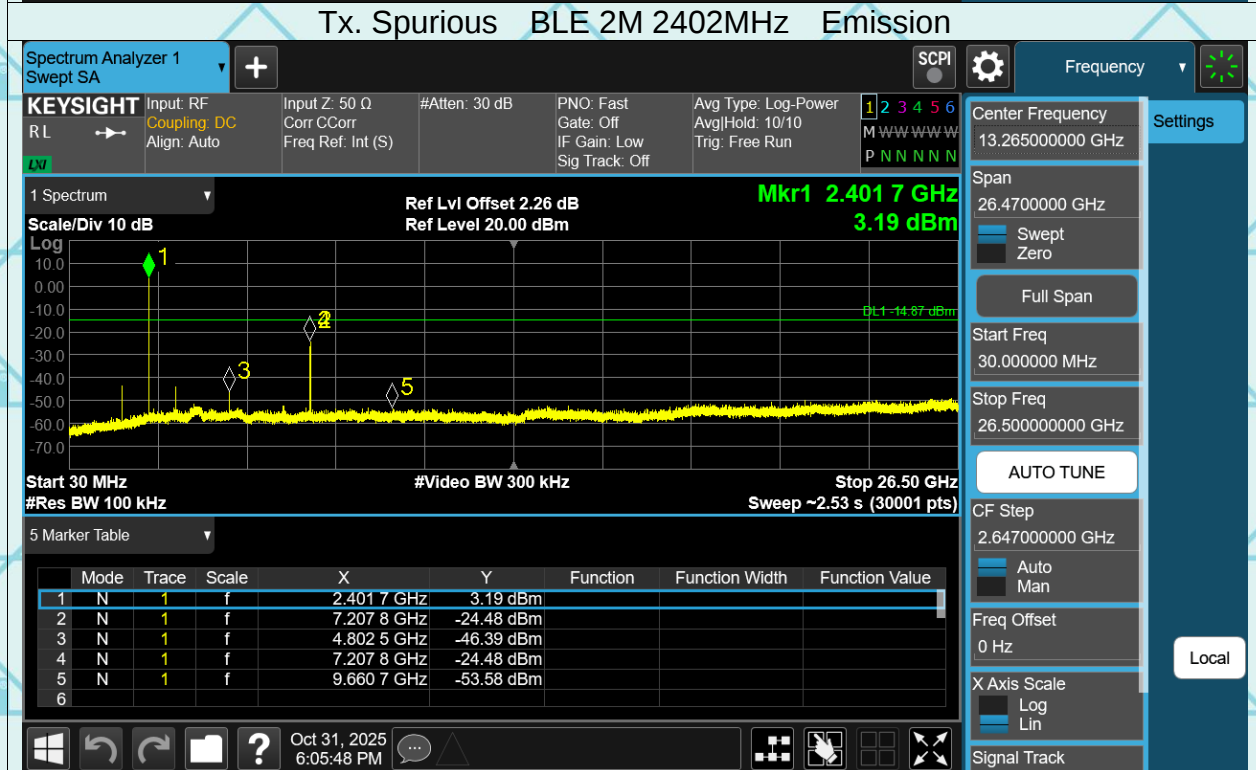


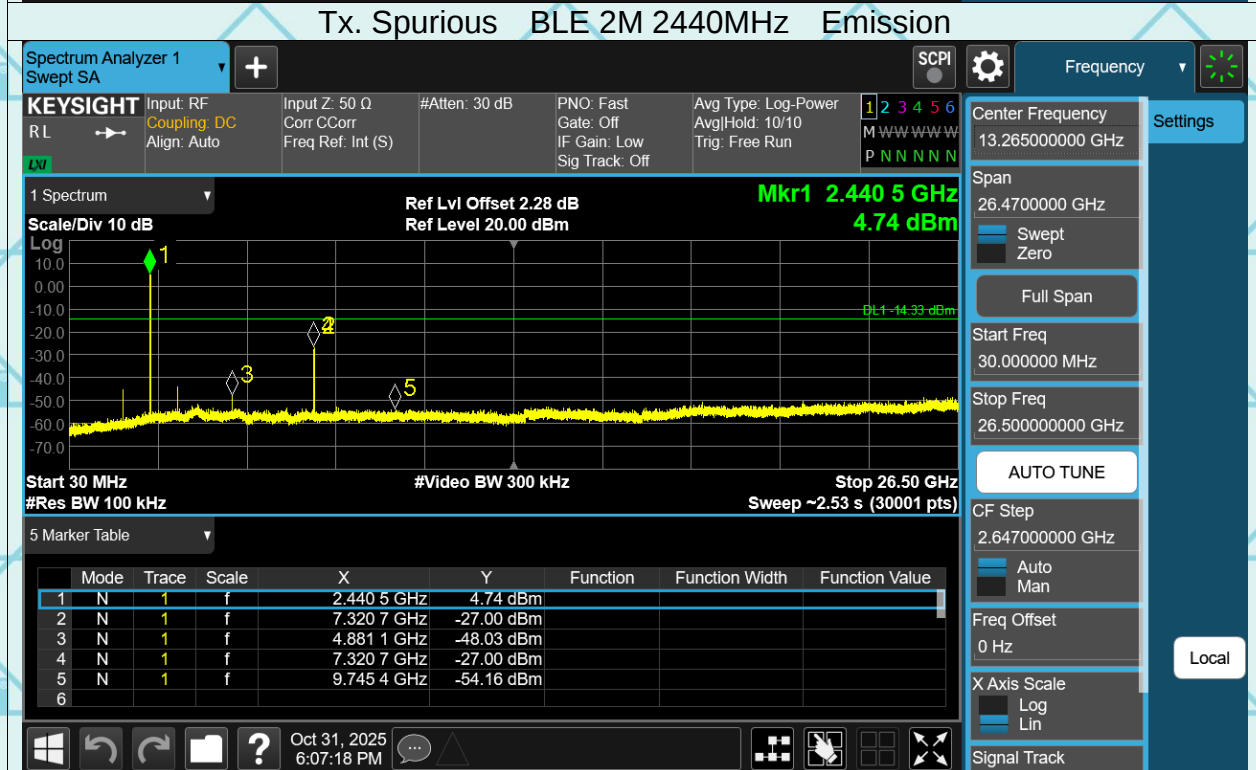


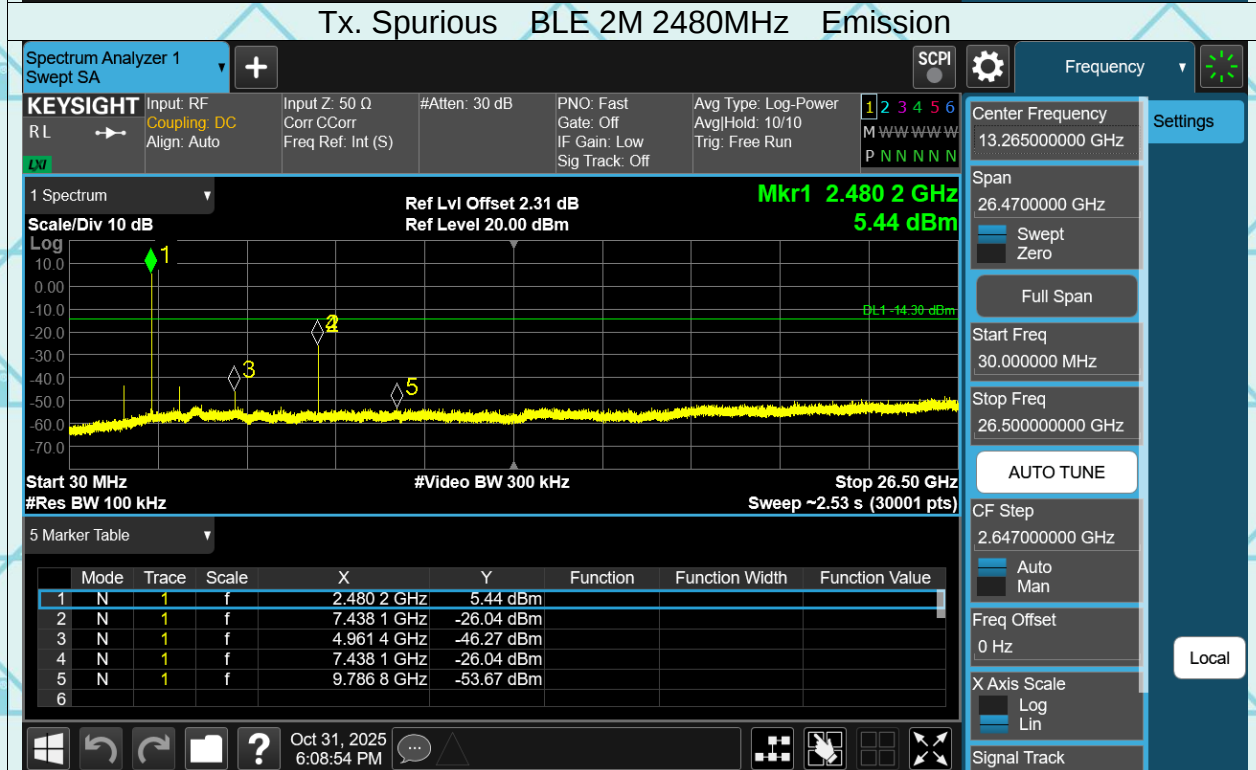


6.7. Radiated Spurious Emission Measurement

6.7.1. Test Specification

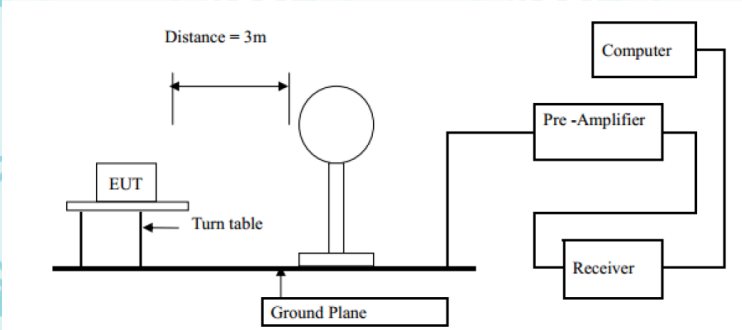Test Requirement:	FCC Part15 C Section 15.209					
Test Method:	ANSI C63.10:2020					
Frequency Range:	9 kHz to 25 GHz					
Measurement Distance:	3 m					
Antenna Polarization:	Horizontal & Vertical					
Operation mode:	Refer to item 4.1					
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark	
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	
	Above 1GHz	Peak	1MHz	3MHz	Peak Value	
Peak		1MHz	10Hz	Average Value		
Limit:	Frequency		Field Strength (microvolts/meter)		Measurement Distance (meters)	
	0.009-0.490		2400/F(KHz)		300	
	0.490-1.705		24000/F(KHz)		30	
	1.705-30		30		30	
	30-88		100		3	
	88-216		150		3	
	216-960		200		3	
	Above 960		500		3	
	Frequency		Field Strength (microvolts/meter)		Measurement Distance (meters)	Detector
	Above 1GHz		500		3	Average
		5000		3	Peak	
Test setup:	For radiated emissions below 30MHz					
						
	30MHz to 1GHz					

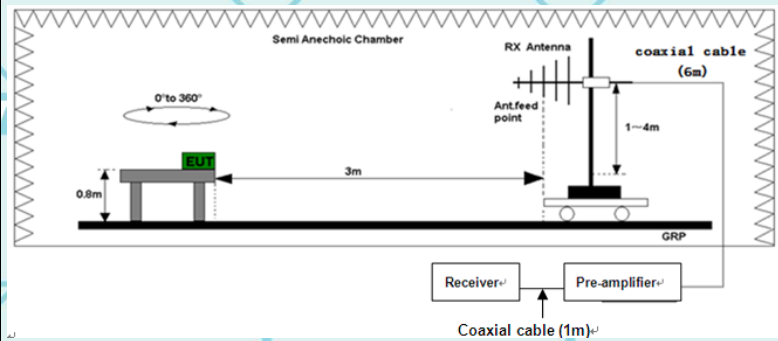

Above 1GHz

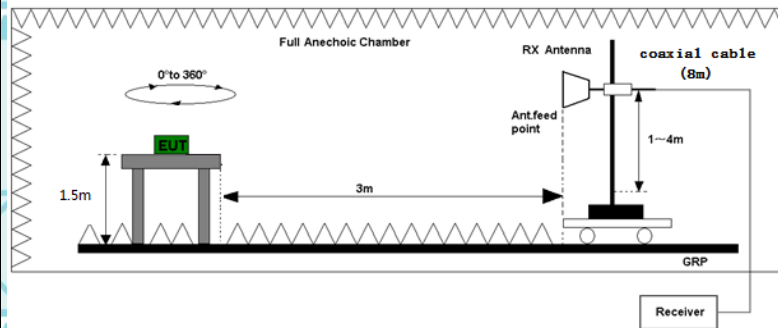

Test Procedure:

- For the radiated emission test below 1GHz:
The EUT was placed on a turntable with 0.1 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
For the radiated emission test above 1GHz:
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- Corrected Reading: Antenna Factor + Cable Loss +

	Read Level - Preamp Factor = Level 3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported. 4. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold; (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Test mode:	Refer to section 4.1 for details
Test results:	PASS

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, According the ANSI C63.10-2020, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


Note 4: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

Report No.: WSCT-ANAB-R&E251000082A-LE Issued: 14 November 2025

6.7.2. Test Data


Please refer to following diagram for individual
Below 1GHz

Horizontal:

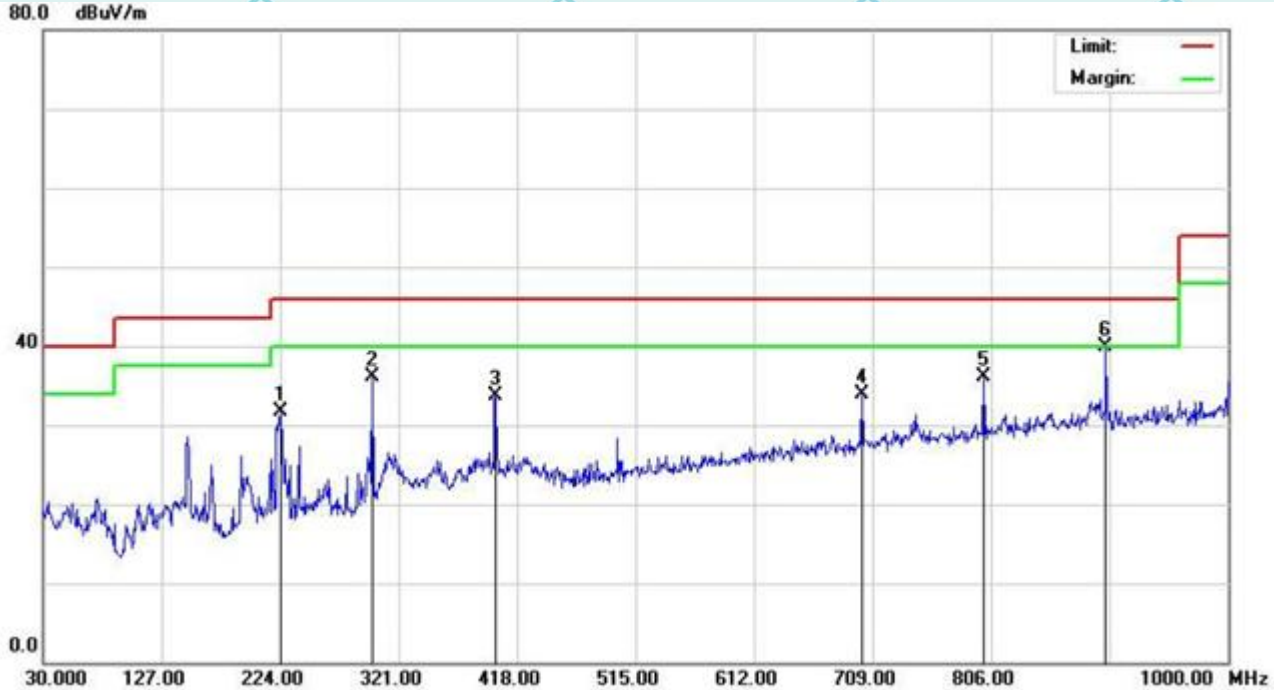

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		224.9700	41.81	-10.07	31.74	46.00	-14.26	QP
2		299.6600	42.77	-6.59	36.18	46.00	-9.82	QP
3		400.5400	37.18	-3.54	33.64	46.00	-12.36	QP
4		700.2700	30.61	3.22	33.83	46.00	-12.17	QP
5		800.1800	31.14	4.93	36.07	46.00	-9.93	QP
6	*	900.0900	33.29	6.63	39.92	46.00	-6.08	QP

Report No.: WSCT-ANAB-R&E251000082A-LE Issued: 14 November 2025
Vertical:

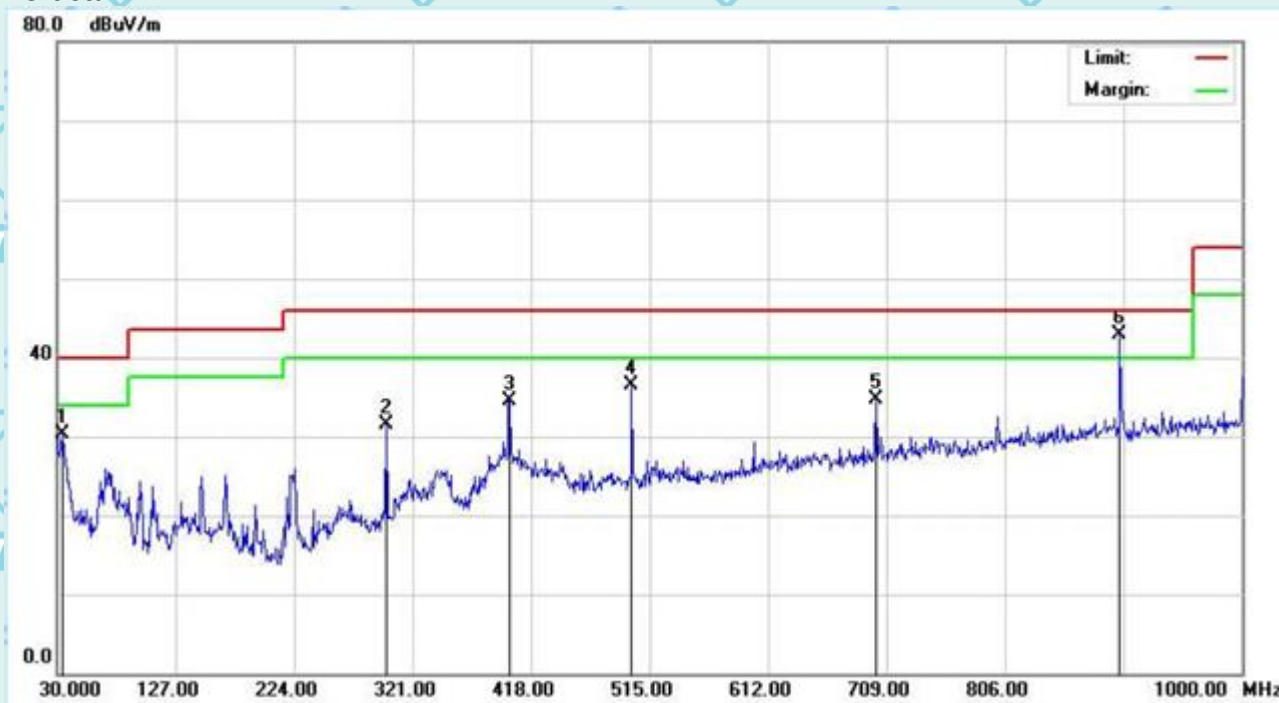

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		34.8500	50.87	-20.52	30.35	40.00	-9.65	QP
2		299.6600	50.78	-19.27	31.51	46.00	-14.49	QP
3		400.5400	53.29	-18.76	34.53	46.00	-11.47	QP
4		500.4500	54.70	-18.26	36.44	46.00	-9.56	QP
5		700.2700	51.85	-17.19	34.66	46.00	-11.34	QP
6	*	900.0900	58.96	-15.97	42.99	46.00	-3.01	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) - Limits (dBuV)

Report No.: WSCT-ANAB-R&E251000082A-LE Issued: 14 November 2025

Above 1GHz


Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

Note 3 BLE 1M and 2M both tested the report and only recorded the worst-case scenario 1M:

Low channel: 2402MHz

Horizontal:

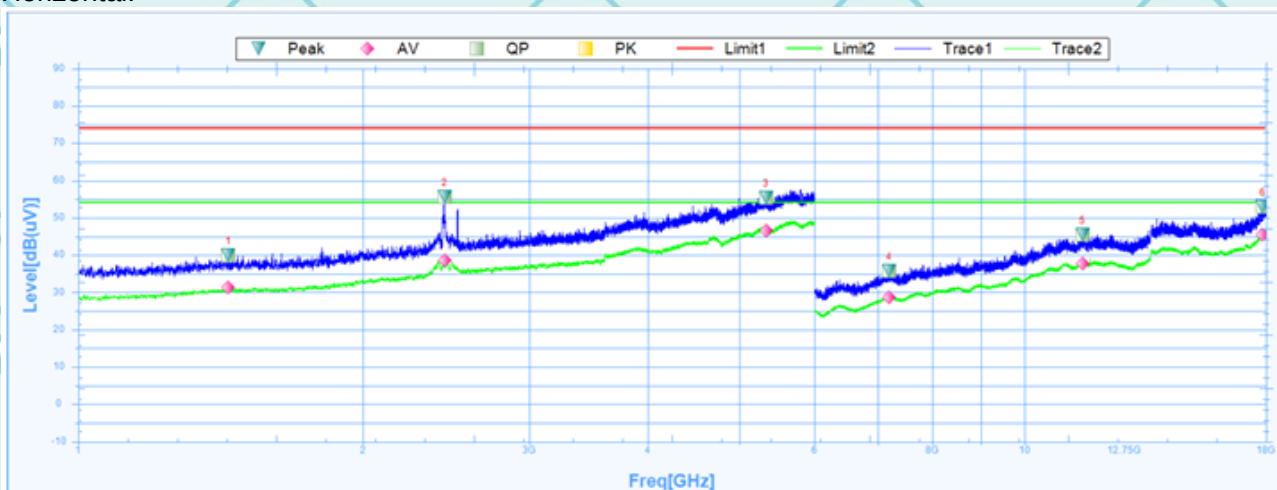


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1441.2500	39.92	25.06	14.86	74	-34.08	22.2	Horizontal	PK	Pass
1	1441.2500	31.4	25.06	6.34	54	-22.6	22.2	Horizontal	AV	Pass
2	2439.3750	55.52	27.39	28.13	74	-18.48	335.3	Horizontal	PK	Pass
2	2439.3750	38.61	27.39	11.22	54	-15.39	335.3	Horizontal	AV	Pass
3	5334.3750	55.39	31.87	23.52	74	-18.61	193	Horizontal	PK	Pass
3	5334.3750	46.59	31.87	14.72	54	-7.41	193	Horizontal	AV	Pass
4	7195.5000	35.8	7.01	28.79	74	-38.2	262.6	Horizontal	PK	Pass
4	7195.5000	28.77	7.01	21.76	54	-25.23	262.6	Horizontal	AV	Pass
5	11517.0000	45.41	16.17	29.24	74	-28.59	89.4	Horizontal	PK	Pass
5	11517.0000	37.63	16.17	21.46	54	-16.37	89.4	Horizontal	AV	Pass
6	17856.0000	52.89	22.98	29.91	74	-21.11	175.4	Horizontal	PK	Pass
6	17856.0000	45.53	22.98	22.55	54	-8.47	175.4	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E251000082A-LE Issued: 14 November 2025

Vertical:

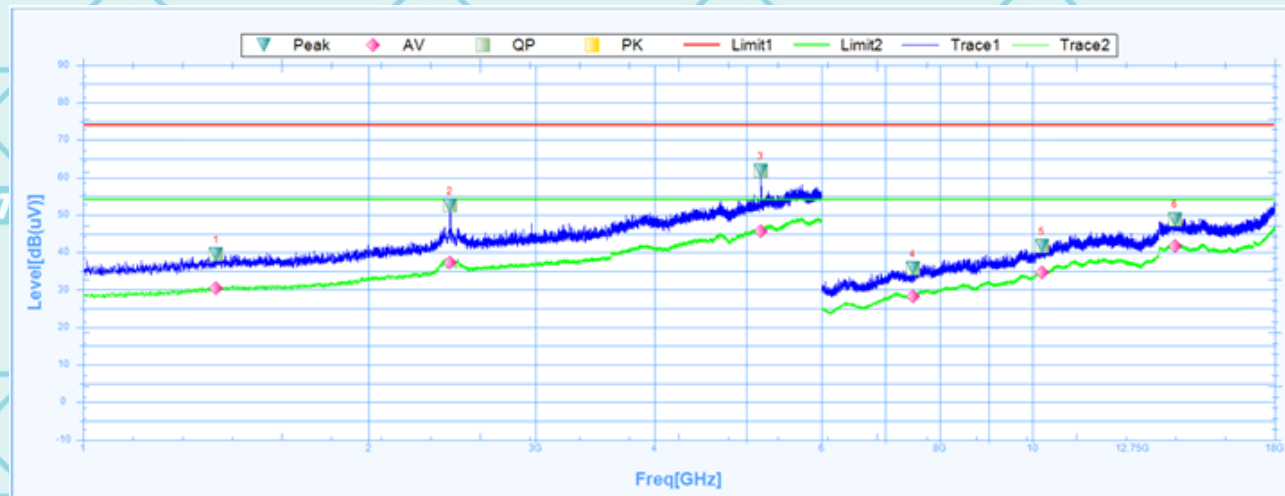


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1381.2500	39.48	25.03	14.45	74	-34.52	293.4	Vertical	PK	Pass
1	1381.2500	30.35	25.03	5.32	54	-23.65	293.4	Vertical	AV	Pass
2	2435.6250	52.49	27.38	25.11	74	-21.51	206.2	Vertical	PK	Pass
2	2435.6250	37.39	27.38	10.01	54	-16.61	206.2	Vertical	AV	Pass
3	5176.2500	61.73	31.74	29.99	74	-12.27	360.1	Vertical	PK	Pass
3	5176.2500	45.73	31.74	13.99	54	-8.27	360.1	Vertical	AV	Pass
4	7483.5000	35.77	7.47	28.3	74	-38.23	97.8	Vertical	PK	Pass
4	7483.5000	28.18	7.47	20.71	54	-25.82	97.8	Vertical	AV	Pass
5	10233.0000	41.68	13.09	28.59	74	-32.32	199.4	Vertical	PK	Pass
5	10233.0000	34.73	13.09	21.64	54	-19.27	199.4	Vertical	AV	Pass
6	14130.0000	48.87	19	29.87	74	-25.13	260.3	Vertical	PK	Pass
6	14130.0000	41.6	19	22.6	54	-12.4	260.3	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E251000082A-LE Issued: 14 November 2025

Middle channel: 2440MHz

Horizontal:

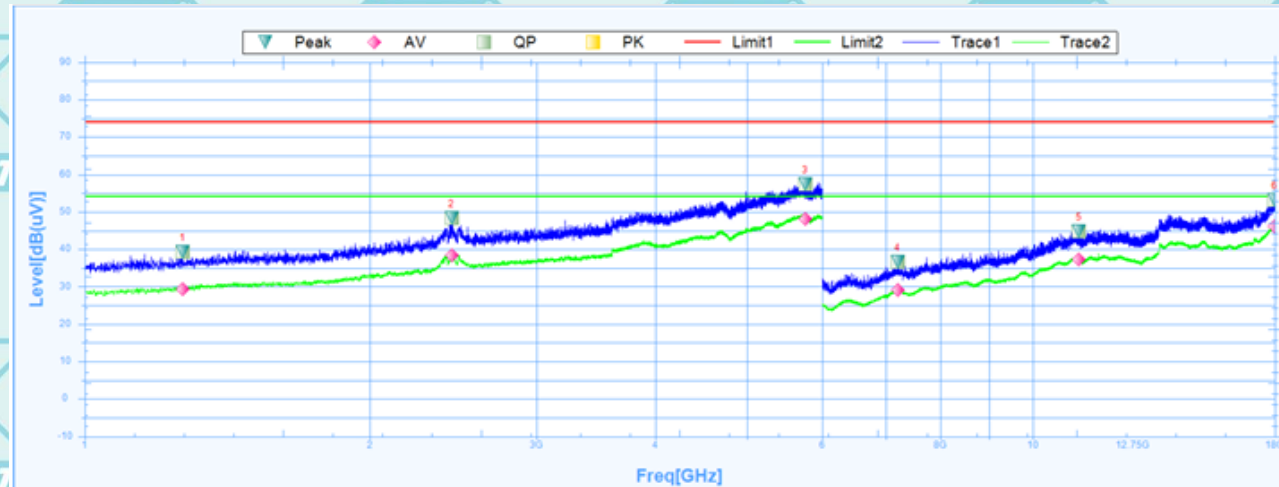


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1268.1250	39.3	24.64	14.66	74	-34.7	0.4	Horizontal	PK	Pass
1	1268.1250	29.31	24.64	4.67	54	-24.69	0.4	Horizontal	AV	Pass
2	2438.1250	48.34	27.39	20.95	74	-25.66	216.9	Horizontal	PK	Pass
2	2438.1250	38.48	27.39	11.09	54	-15.52	216.9	Horizontal	AV	Pass
3	5756.8750	57.3	32.41	24.89	74	-16.7	360.1	Horizontal	PK	Pass
3	5756.8750	48.01	32.41	15.6	54	-5.99	360.1	Horizontal	AV	Pass
4	7201.5000	36.61	7	29.61	74	-37.39	127.6	Horizontal	PK	Pass
4	7201.5000	29.09	7	22.09	54	-24.91	127.6	Horizontal	AV	Pass
5	11190.0000	44.81	15.75	29.06	74	-29.19	345.1	Horizontal	PK	Pass
5	11190.0000	37.18	15.75	21.43	54	-16.82	345.1	Horizontal	AV	Pass
6	17989.5000	53.12	23.86	29.26	74	-20.88	152.7	Horizontal	PK	Pass
6	17989.5000	46.23	23.86	22.37	54	-7.77	152.7	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E251000082A-LE Issued: 14 November 2025

Vertical:

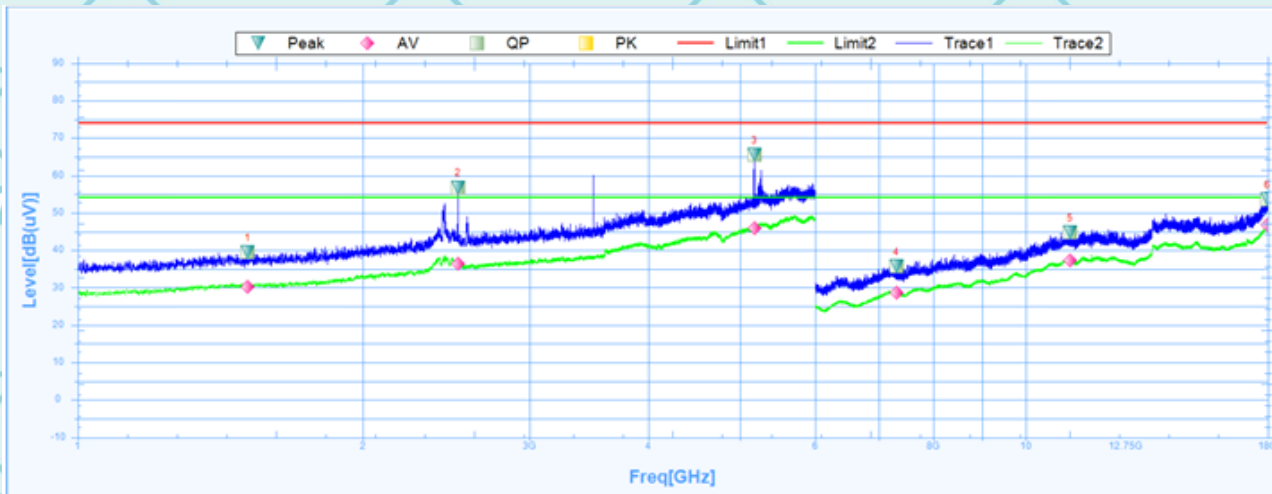


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1511.2500	39.48	24.99	14.49	74	-34.52	360.1	Vertical	PK	Pass
1	1511.2500	30.12	24.99	5.13	54	-23.88	360.1	Vertical	AV	Pass
2	2518.7500	56.82	27.62	29.2	74	-17.18	360.1	Vertical	PK	Pass
2	2518.7500	36.3	27.62	8.68	54	-17.7	360.1	Vertical	AV	Pass
3	5178.1250	65.53	31.74	33.79	74	-8.47	0.4	Vertical	PK	Pass
3	5178.1250	45.83	31.74	14.09	54	-8.17	0.4	Vertical	AV	Pass
4	7303.5000	35.75	6.87	28.88	74	-38.25	358.6	Vertical	PK	Pass
4	7303.5000	28.62	6.87	21.75	54	-25.38	358.6	Vertical	AV	Pass
5	11140.5000	44.75	15.82	28.93	74	-29.25	336.7	Vertical	PK	Pass
5	11140.5000	37.19	15.82	21.37	54	-16.81	336.7	Vertical	AV	Pass
6	17985.0000	53.71	23.82	29.89	74	-20.29	-0.1	Vertical	PK	Pass
6	17985.0000	46.71	23.82	22.89	54	-7.29	-0.1	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E251000082A-LE Issued: 14 November 2025

High channel: 2480MHz

Horizontal:

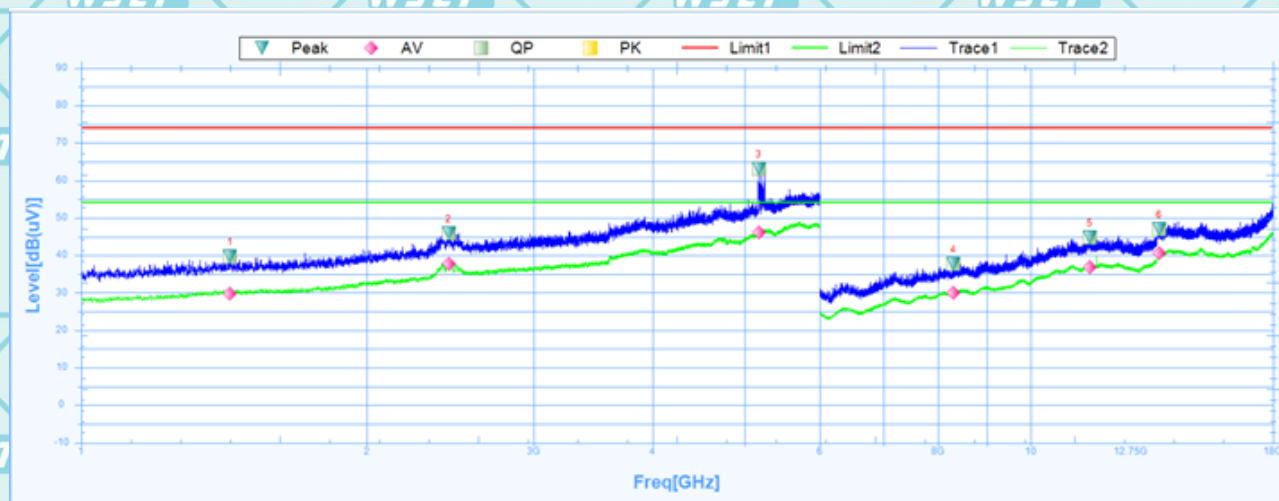


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1435.0000	39.7	25.06	14.64	74	-34.3	261.4	Horizontal	PK	Pass
1	1435.0000	29.74	25.06	4.68	54	-24.26	261.4	Horizontal	AV	Pass
2	2438.7500	45.89	27.39	18.5	74	-28.11	261.4	Horizontal	PK	Pass
2	2438.7500	37.71	27.39	10.32	54	-16.29	261.4	Horizontal	AV	Pass
3	5173.1250	63.07	31.74	31.33	74	-10.93	91.8	Horizontal	PK	Pass
3	5173.1250	46.05	31.74	14.31	54	-7.95	91.8	Horizontal	AV	Pass
4	8295.0000	37.72	8.93	28.79	74	-36.28	7.6	Horizontal	PK	Pass
4	8295.0000	29.91	8.93	20.98	54	-24.09	7.6	Horizontal	AV	Pass
5	11550.0000	44.71	16.22	28.49	74	-29.29	360	Horizontal	PK	Pass
5	11550.0000	36.8	16.22	20.58	54	-17.2	360	Horizontal	AV	Pass
6	13663.5000	47.06	18.16	28.9	74	-26.94	304.1	Horizontal	PK	Pass
6	13663.5000	40.57	18.16	22.41	54	-13.43	304.1	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E251000082A-LE Issued: 14 November 2025

Vertical:

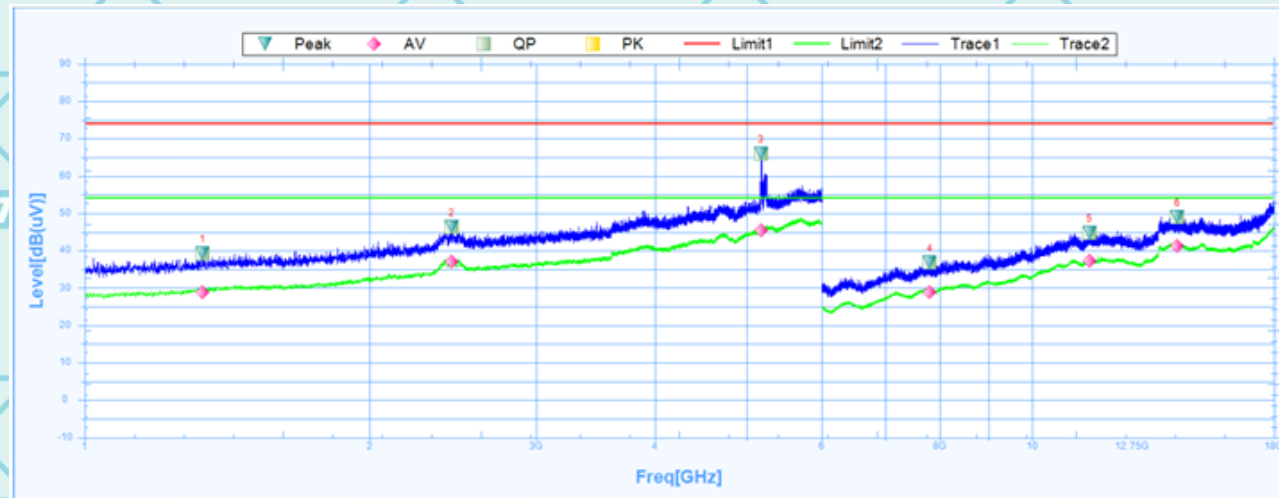

Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1332.5000	39.25	24.86	14.39	74	-34.75	275.8	Vertical	PK	Pass
1	1332.5000	28.97	24.86	4.11	54	-25.03	275.8	Vertical	AV	Pass
2	2441.2500	46.34	27.4	18.94	74	-27.66	66.6	Vertical	PK	Pass
2	2441.2500	37.06	27.4	9.66	54	-16.94	66.6	Vertical	AV	Pass
3	5177.5000	65.97	31.74	34.23	74	-8.03	115.6	Vertical	PK	Pass
3	5177.5000	45.48	31.74	13.74	54	-8.52	115.6	Vertical	AV	Pass
4	7801.5000	36.93	7.98	28.95	74	-37.07	343.5	Vertical	PK	Pass
4	7801.5000	28.87	7.98	20.89	54	-25.13	343.5	Vertical	AV	Pass
5	11499.0000	44.8	16.12	28.68	74	-29.2	98.9	Vertical	PK	Pass
5	11499.0000	37.3	16.12	21.18	54	-16.7	98.9	Vertical	AV	Pass
6	14238.0000	48.99	18.88	30.11	74	-25.01	359.5	Vertical	PK	Pass
6	14238.0000	41.19	18.88	22.31	54	-12.81	359.5	Vertical	AV	Pass

Note:

1. All emissions not reported were more than 20dB below the specified limit or in the noise floor.
2. Emission Level= Reading Level + Probe Factor +Cable Loss.
3. Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. EUT has been tested in unfolded states, and the report only reflects data in the unfolded state (worst-case scenario)

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Level (dBμV) – Limits (dBμV)

6.7.3. Restricted Bands Requirements

Test result for GFSK Mode (the worst case)

Frequency	Reading	Correct Factor	Emission Level	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel							
2390	63.15	-8.76	54.39	74	19.61	H	PK
2390	54.37	-8.76	45.61	54	8.39	H	AV
2390	59.03	-8.73	50.30	74	23.70	V	PK
2390	54.52	-8.73	45.79	54	8.21	V	AV
High Channel							
2483.5	64.98	-8.76	56.22	74	17.78	H	PK
2483.5	53.88	-8.76	45.12	54	8.88	H	AV
2483.5	63.44	-8.73	54.71	74	19.29	V	PK
2483.5	56.02	-8.73	47.29	54	6.71	V	AV

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Level (dBμV) – Limits (dBμV)

7. Test Setup Photographs

Please refer to Annex "Set Up Photos-15C" for test setup photos

*******END OF REPORT*******