




Dwell NVNT 1-DH1 2480MHz Ant1 One Burst

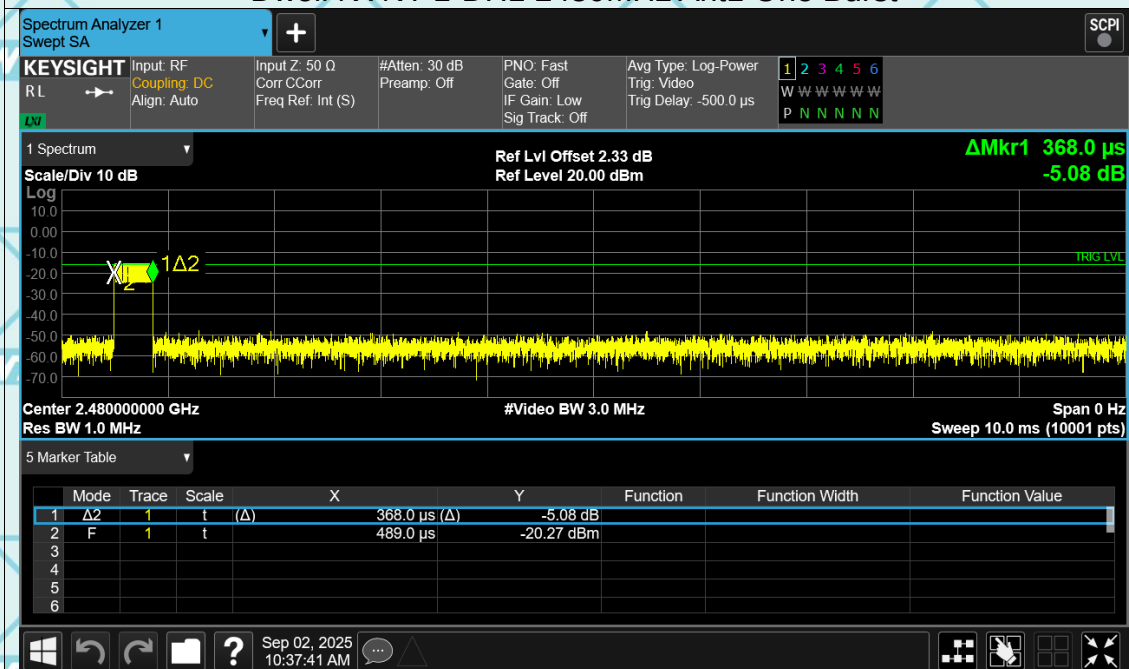


Dwell NVNT 1-DH1 2480MHz Ant1 Accumulated

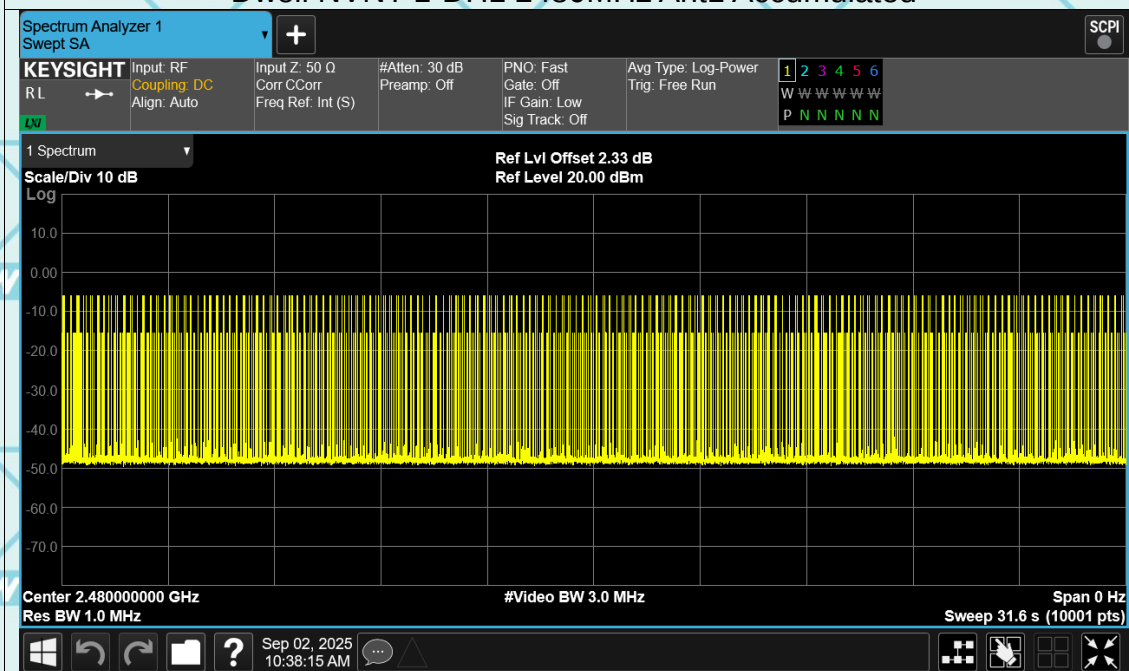


Dwell NVNT 1-DH3 2402MHz Ant1 One Burst

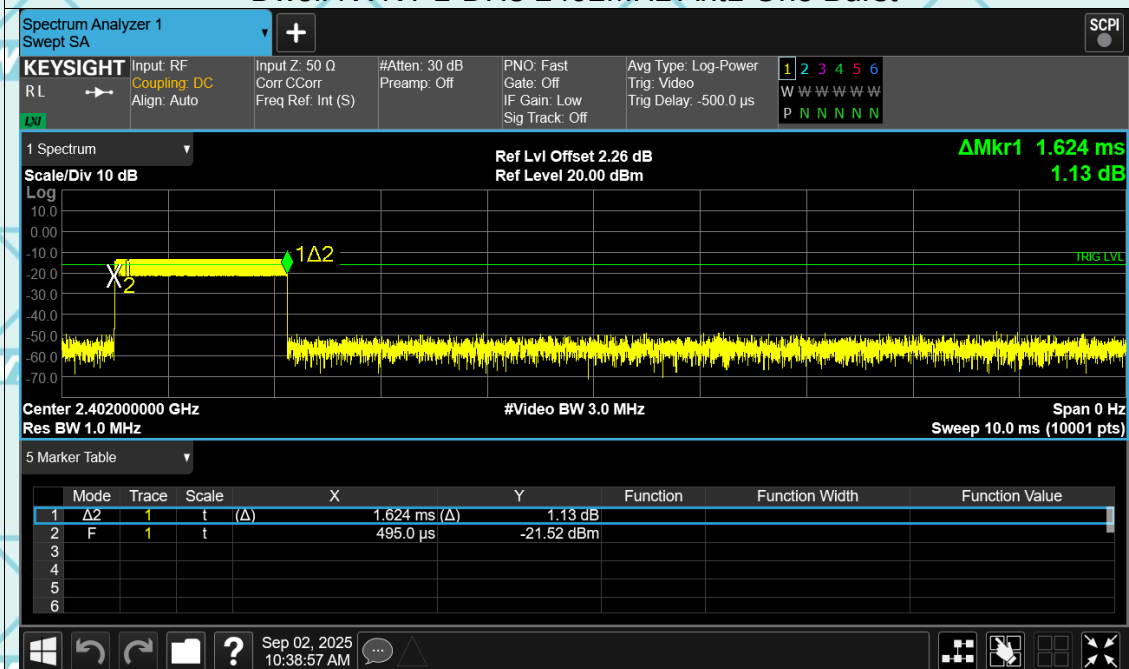


Dwell NVNT 1-DH3 2402MHz Ant1 Accumulated

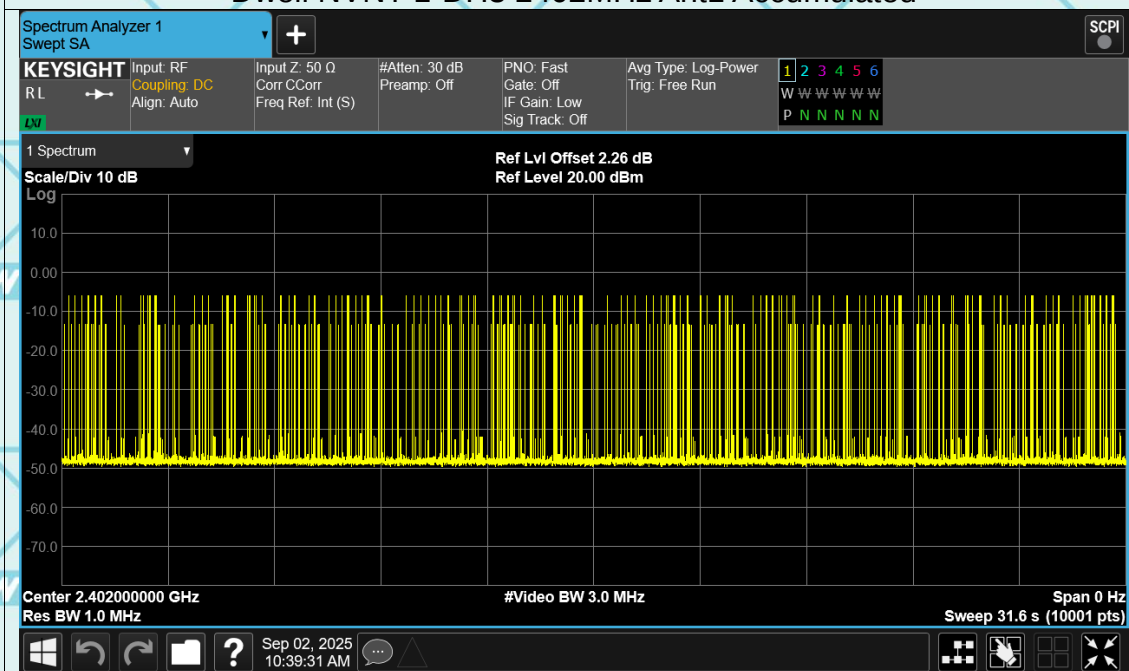


Dwell NVNT 1-DH3 2441MHz Ant1 One Burst

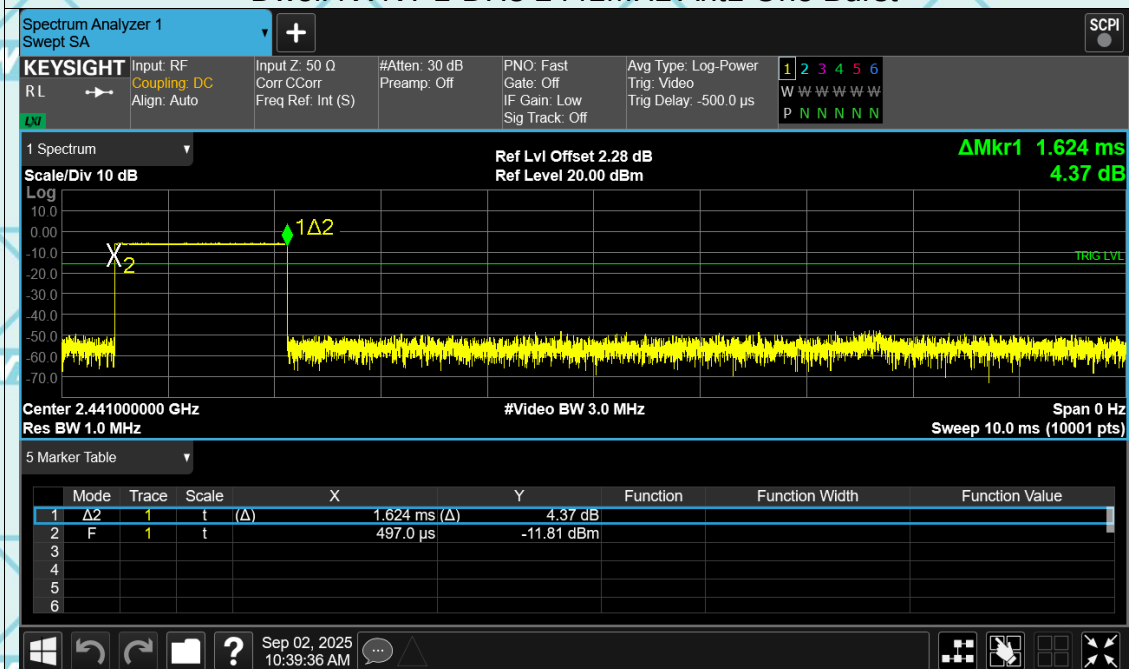


Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

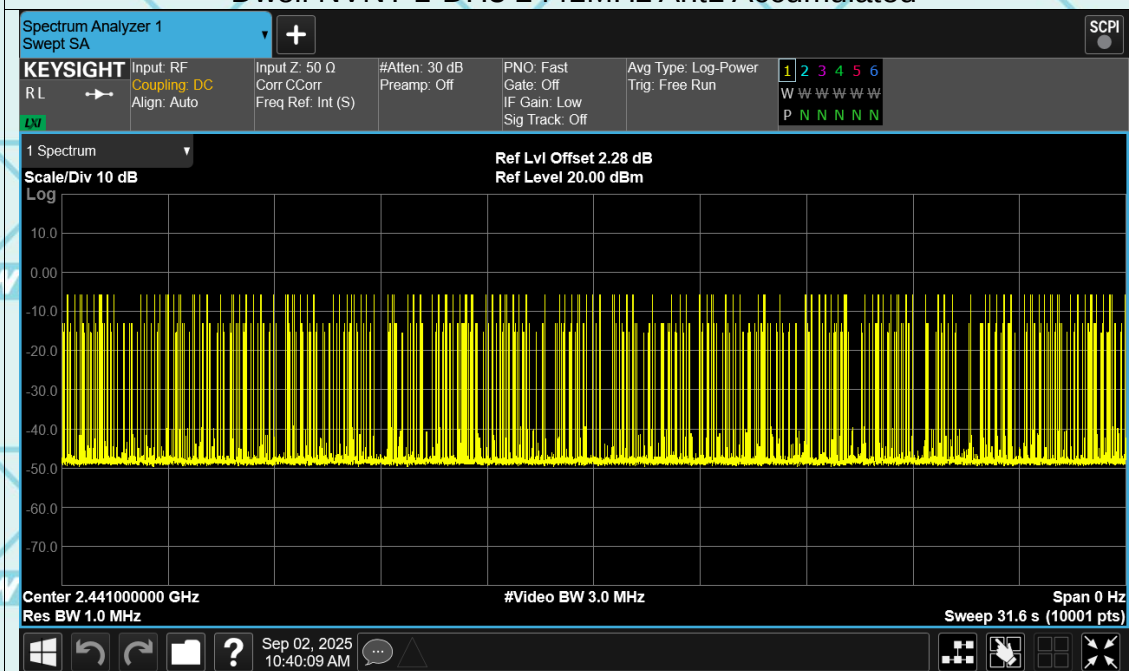


Dwell NVNT 1-DH3 2480MHz Ant1 One Burst

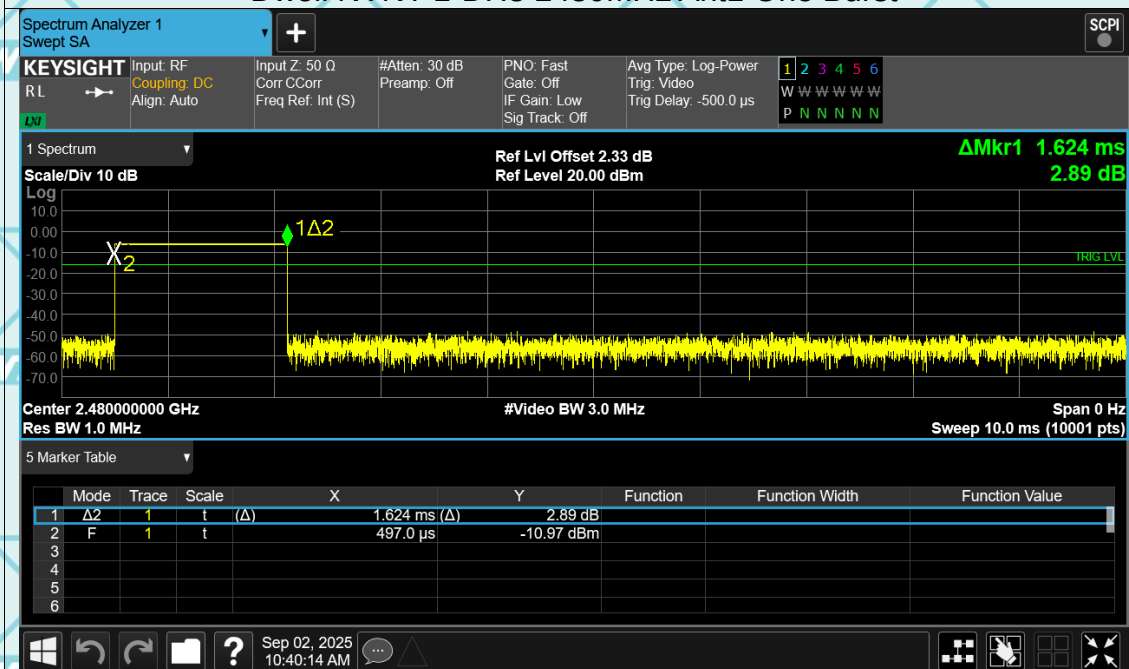


Dwell NVNT 1-DH3 2480MHz Ant1 Accumulated

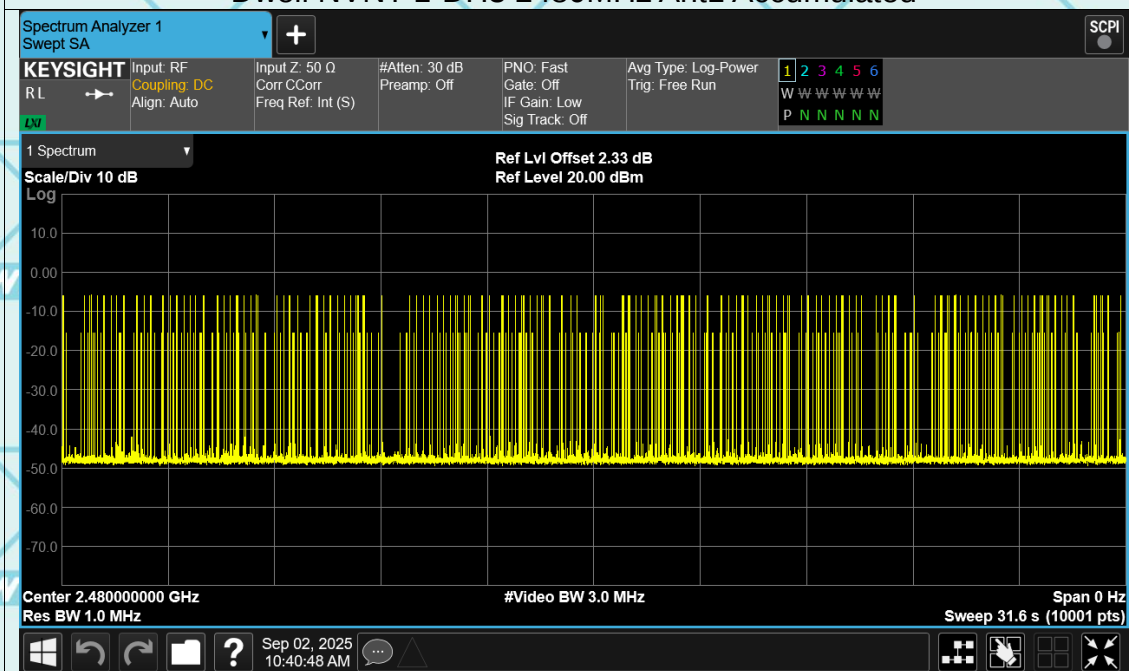


Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

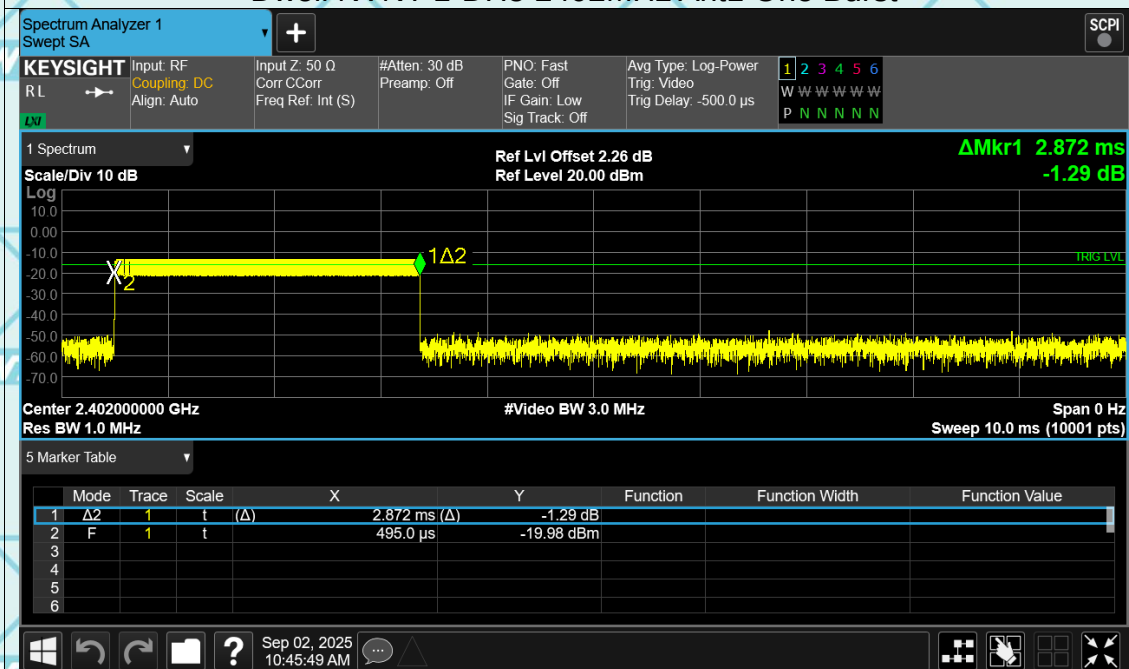

Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated

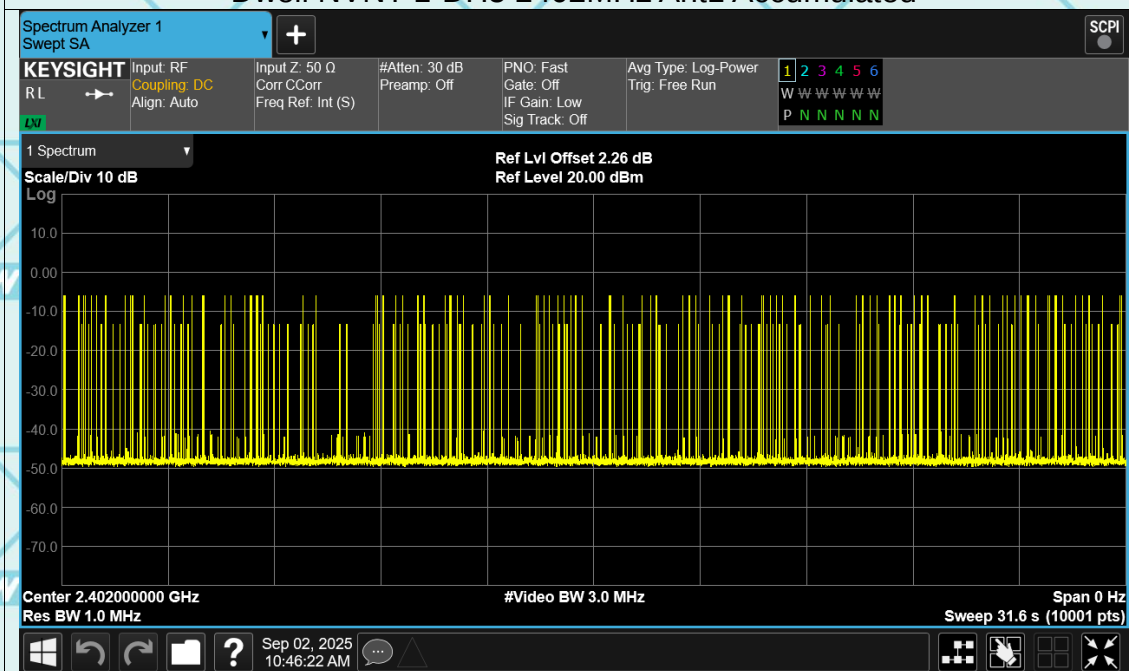


Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

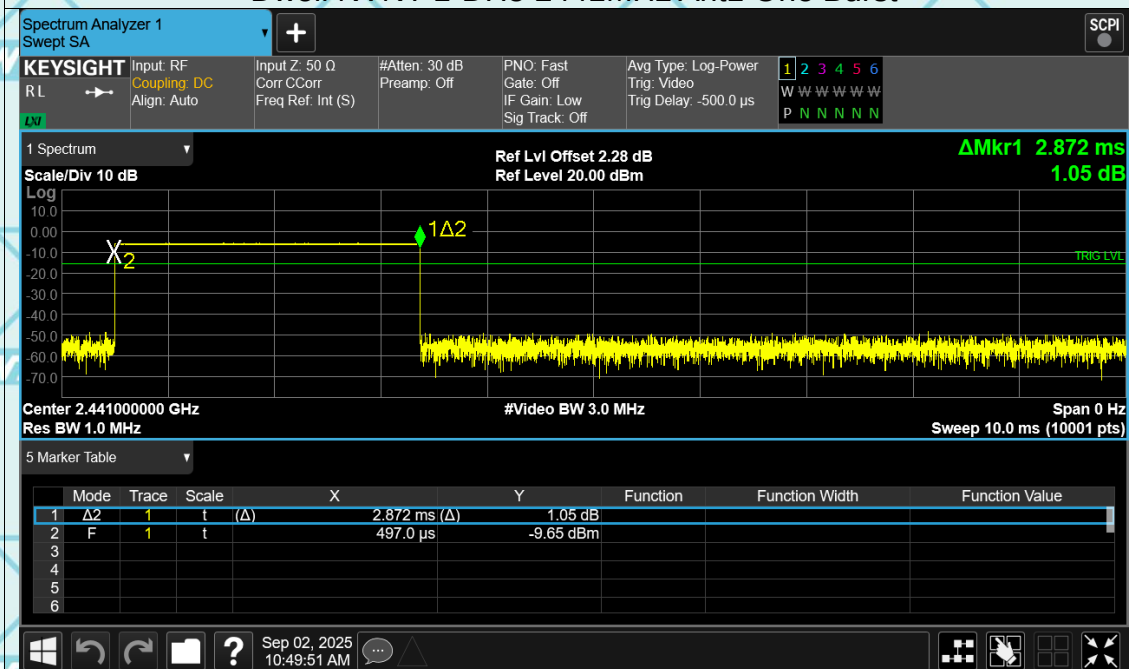


Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated



Dwell NVNT 1-DH5 2480MHz Ant1 One Burst

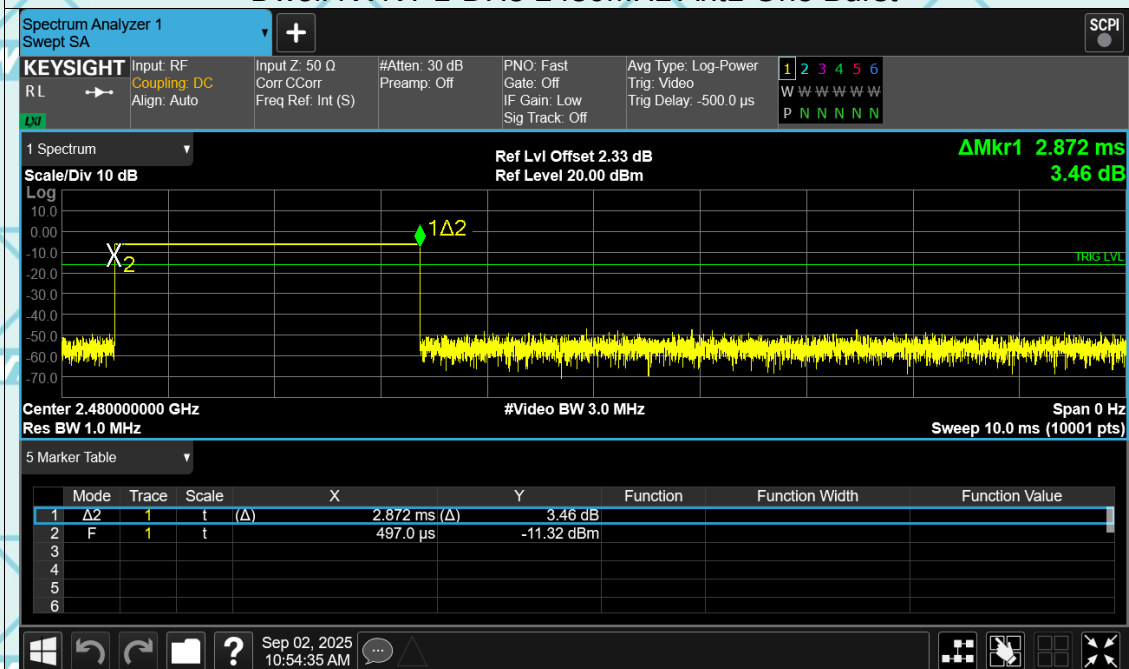

Dwell NVNT 1-DH5 2480MHz Ant1 Accumulated

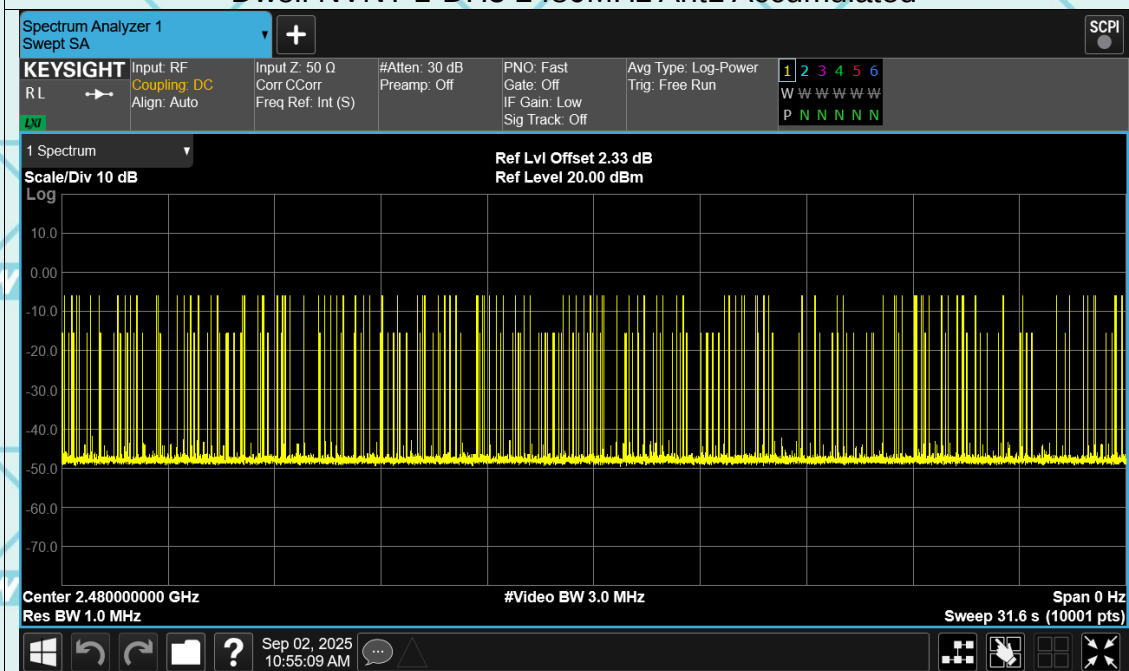

6.8. Pseudorandom Frequency Hopping Sequence

Test Requirement: FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

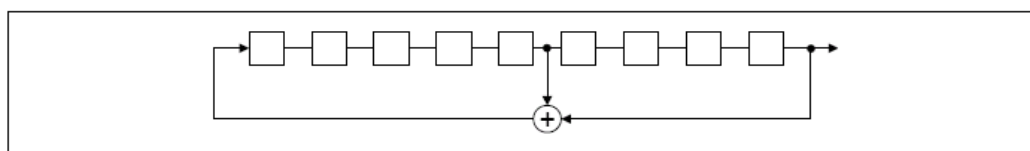

Linear Feedback Shift Register for Generation of the PRBS sequence


An example of Pseudorandom Frequency Hopping Sequence as follow:

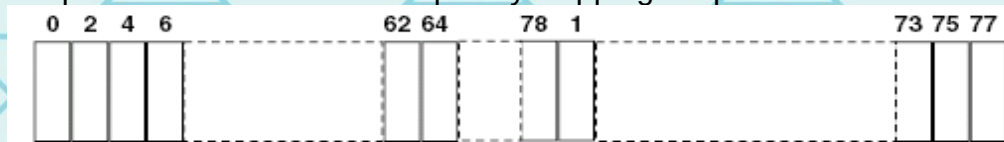

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.


6.9. Conducted Band Edge Measurement

6.9.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2020
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of ANSI C63.10:2020 Measurement Guidelines. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Set RBW = 100 kHz ($\geq 1\%$ span=10MHz), VBW = 300 kHz ($\geq$RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used. 4. Enable hopping function of the EUT and then repeat step 2 and 3. 5. Measure and record the results in the test report.
Test Result:	PASS

6.9.2. Test Data


GFSK Modulation (the worst case)

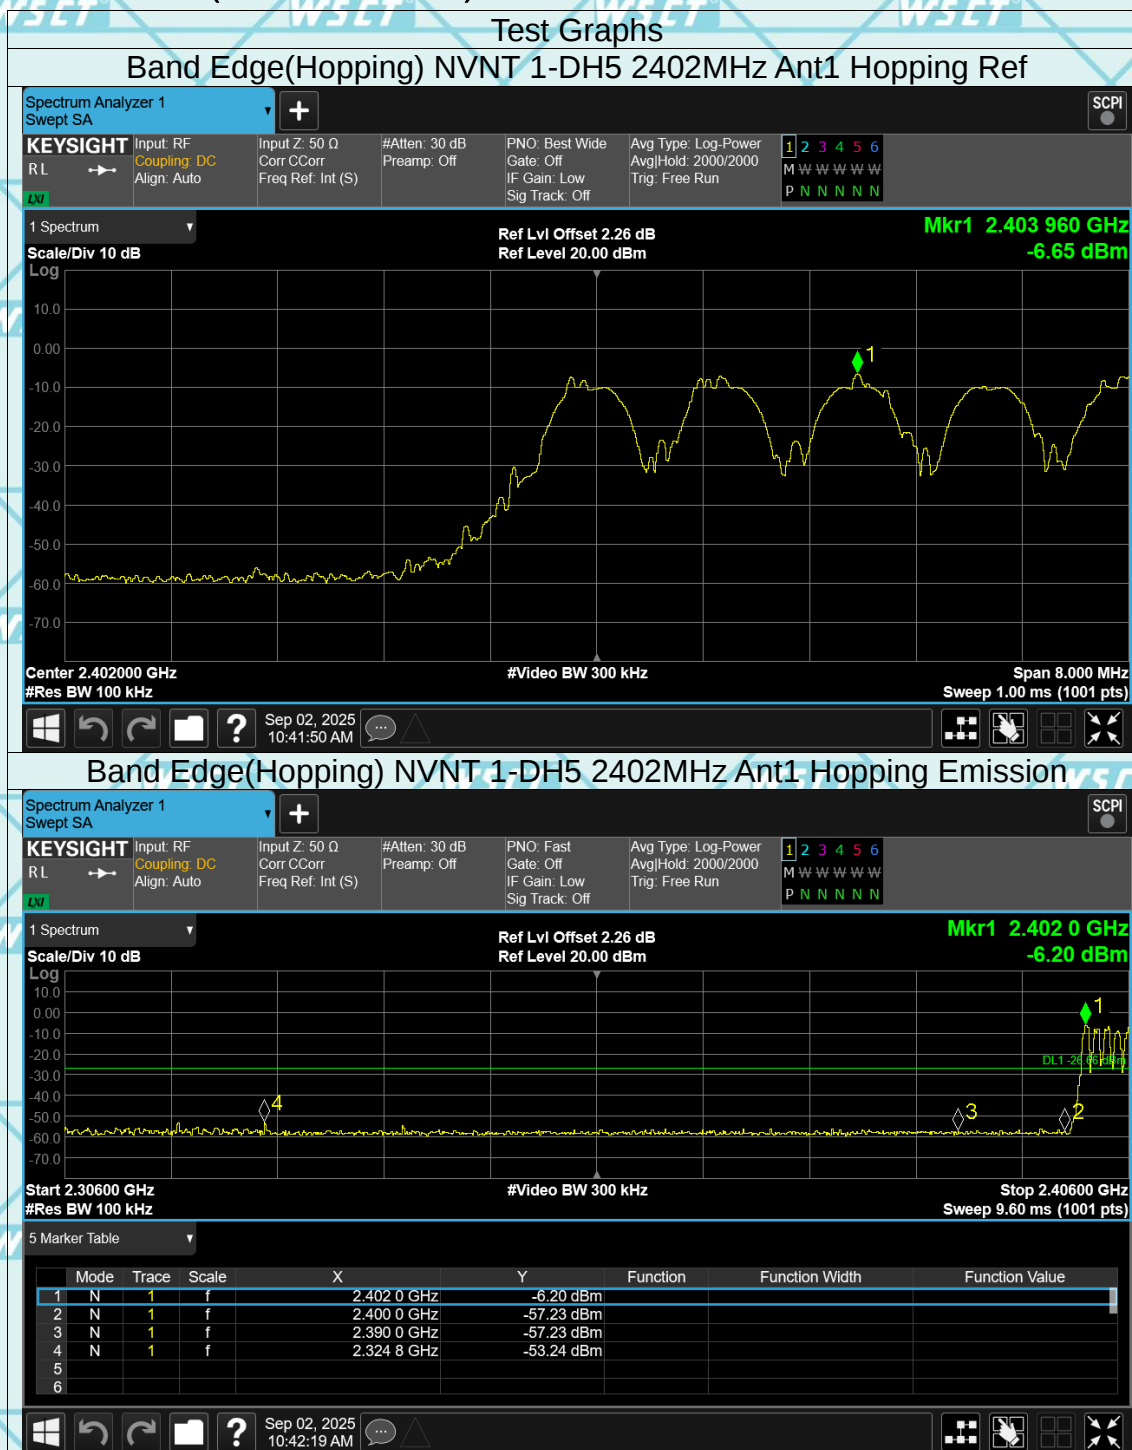

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

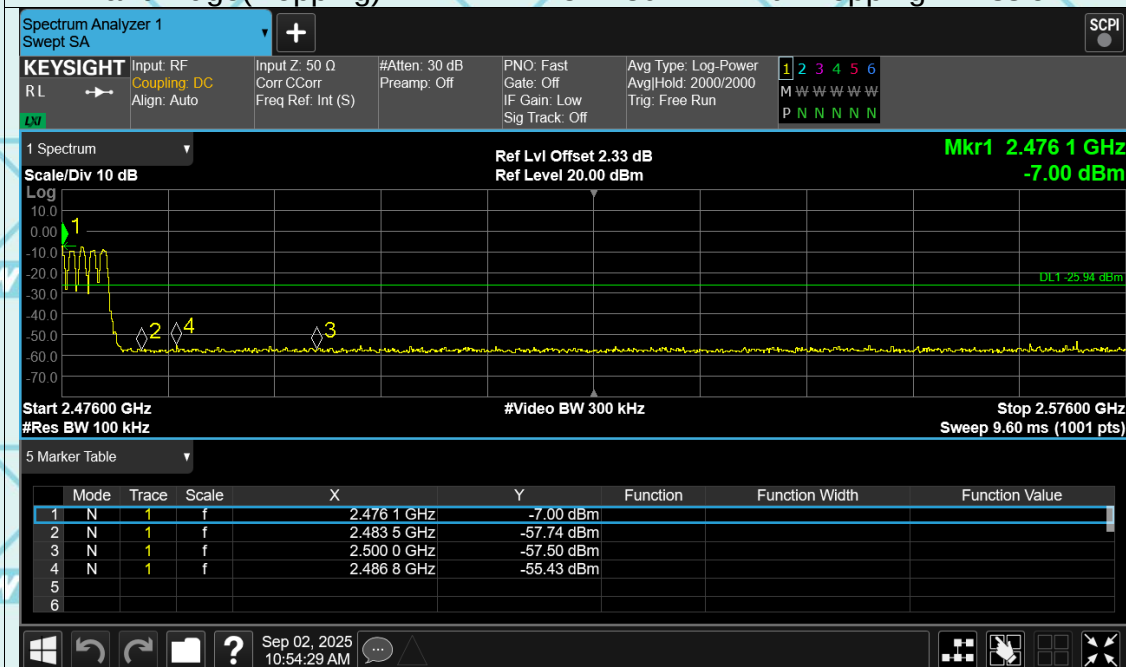


6.10. Conducted Spurious Emission Measurement

6.10.1. Test Specification


Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2020
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the guidelines in Spurious RF Conducted Emissions of ANSI C63.10:2020 Measurement Guidelines 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. 5. Measure and record the results in the test report. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS



Test Graphs



Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

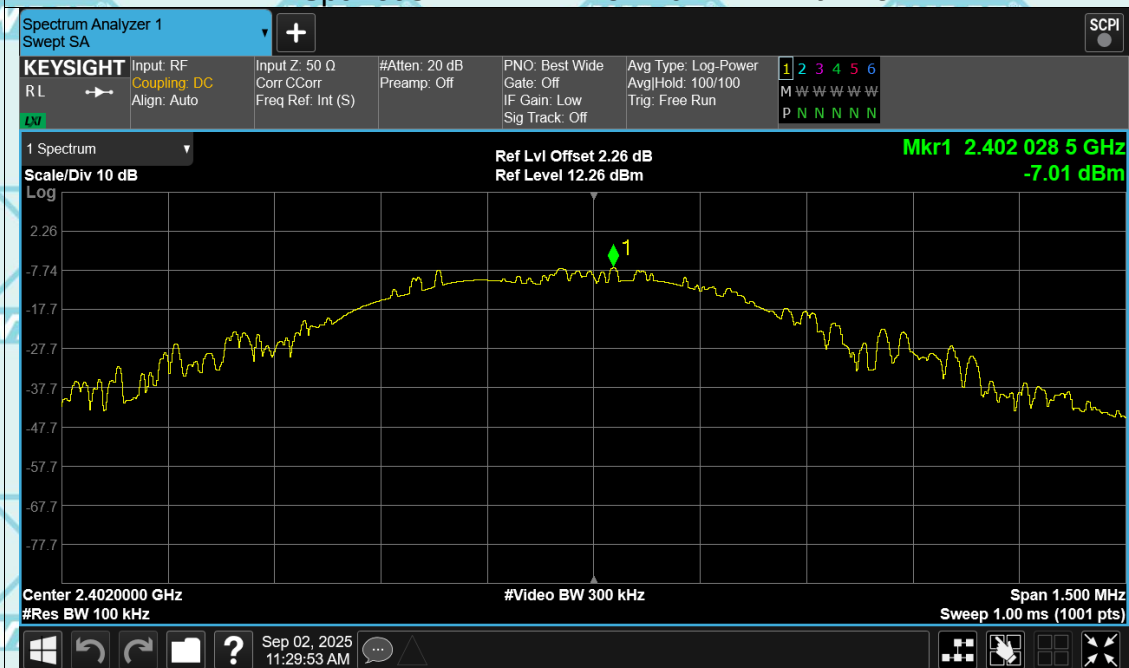


Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

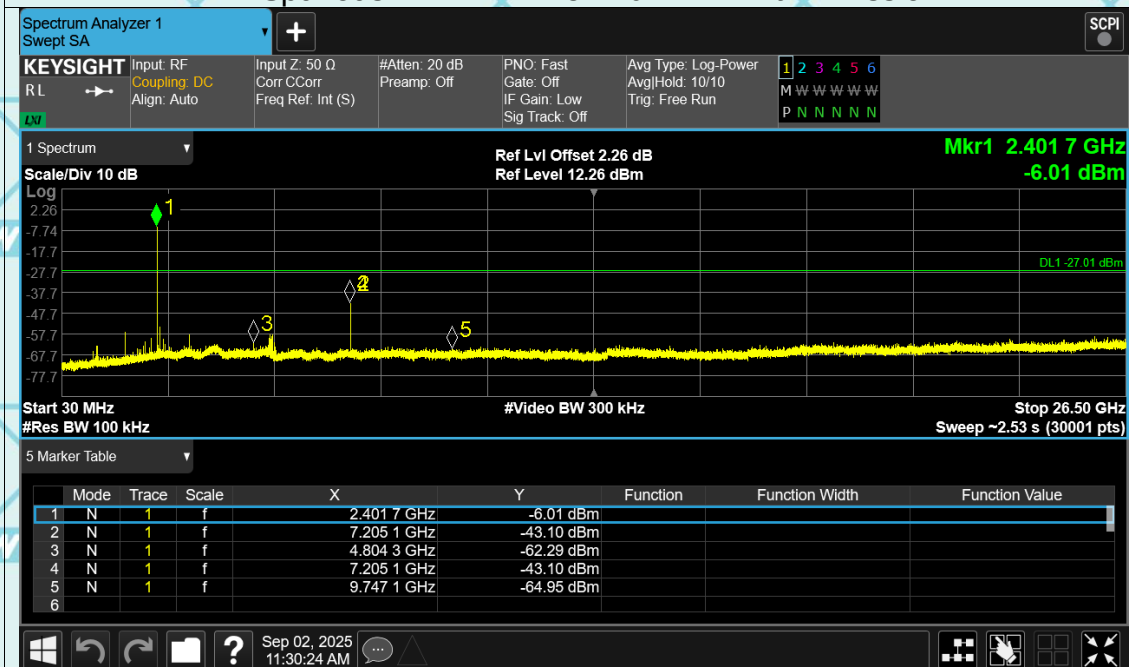

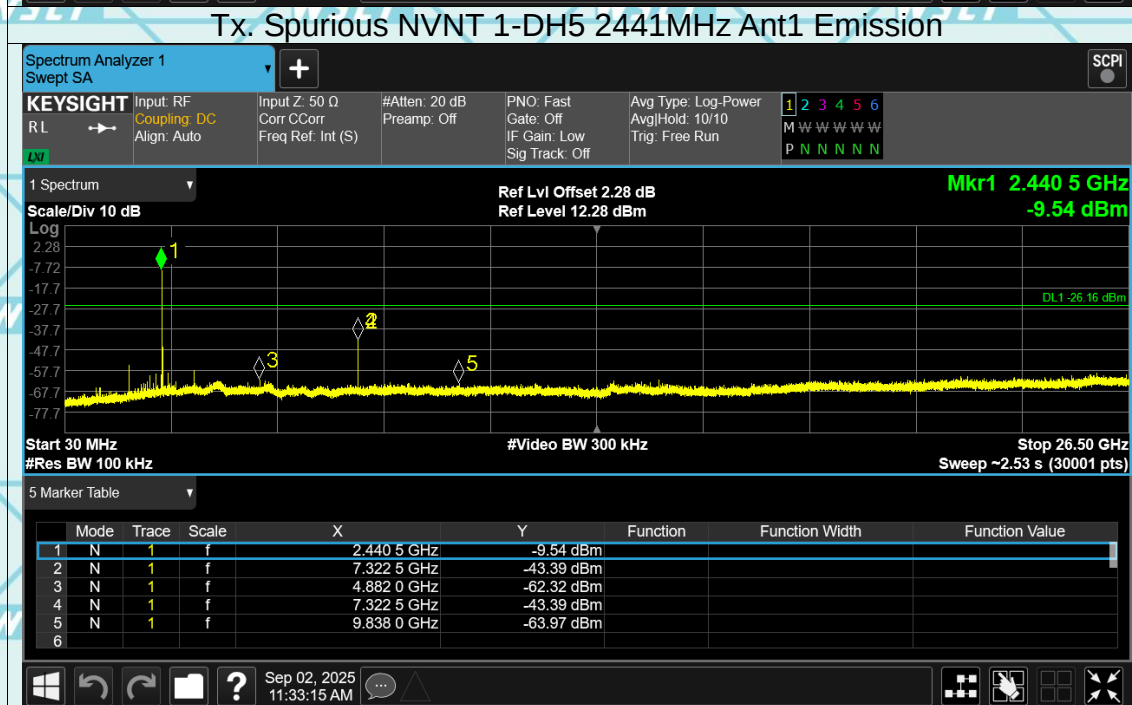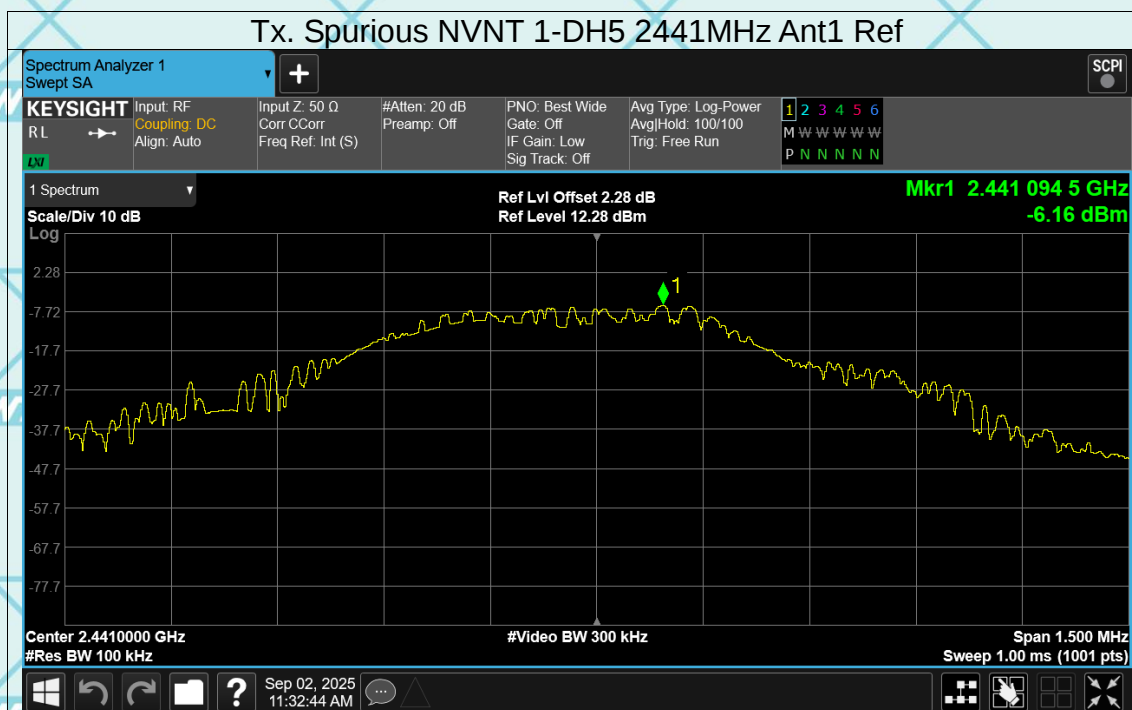


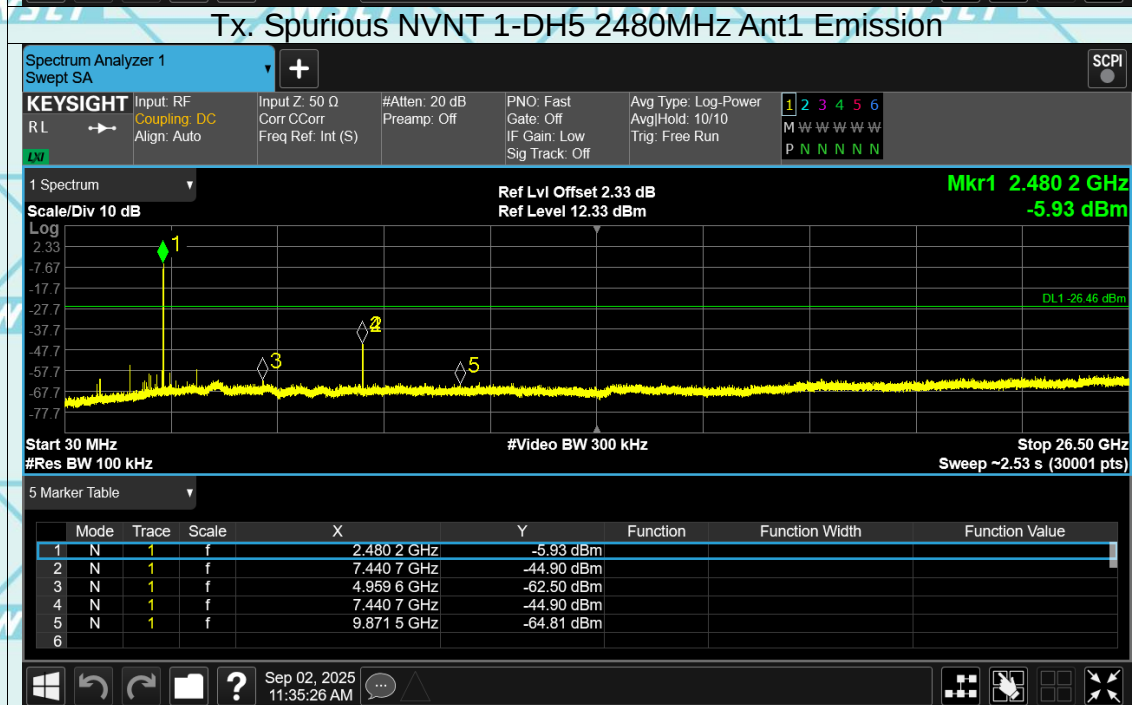
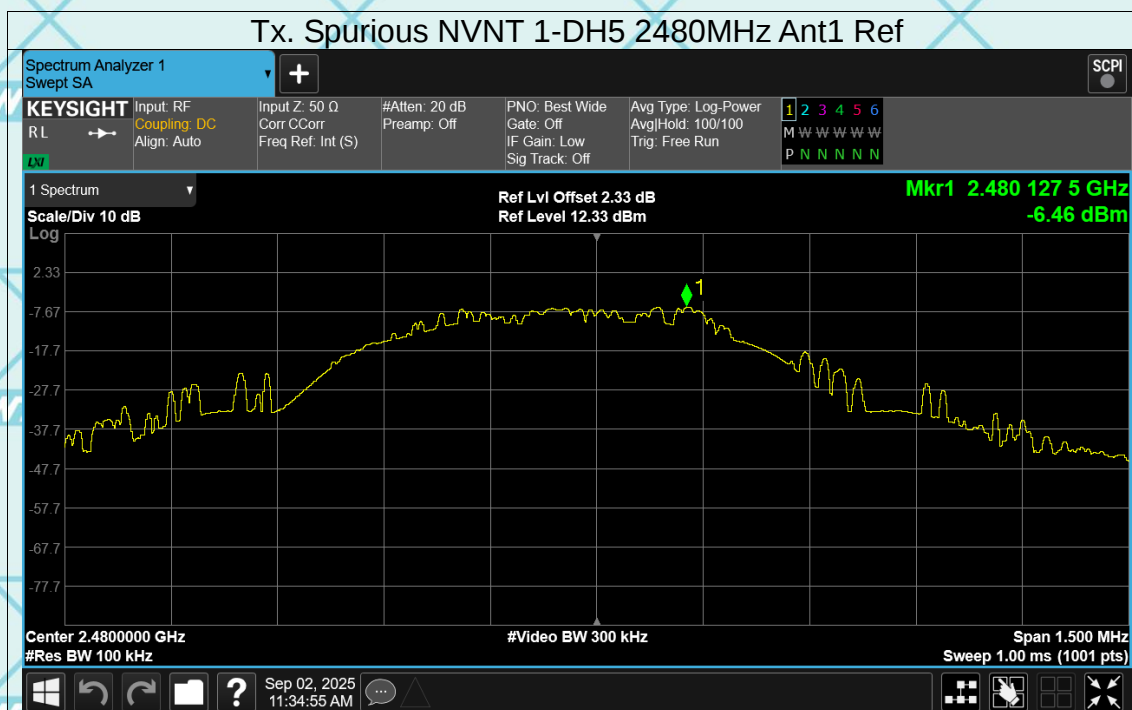




Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

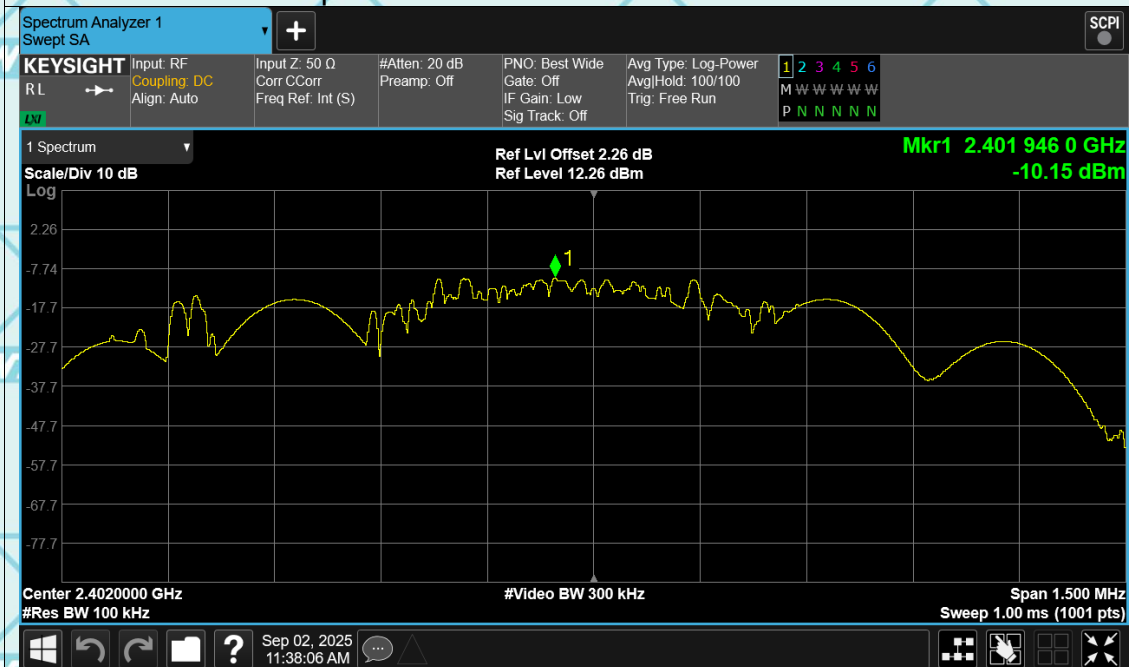


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

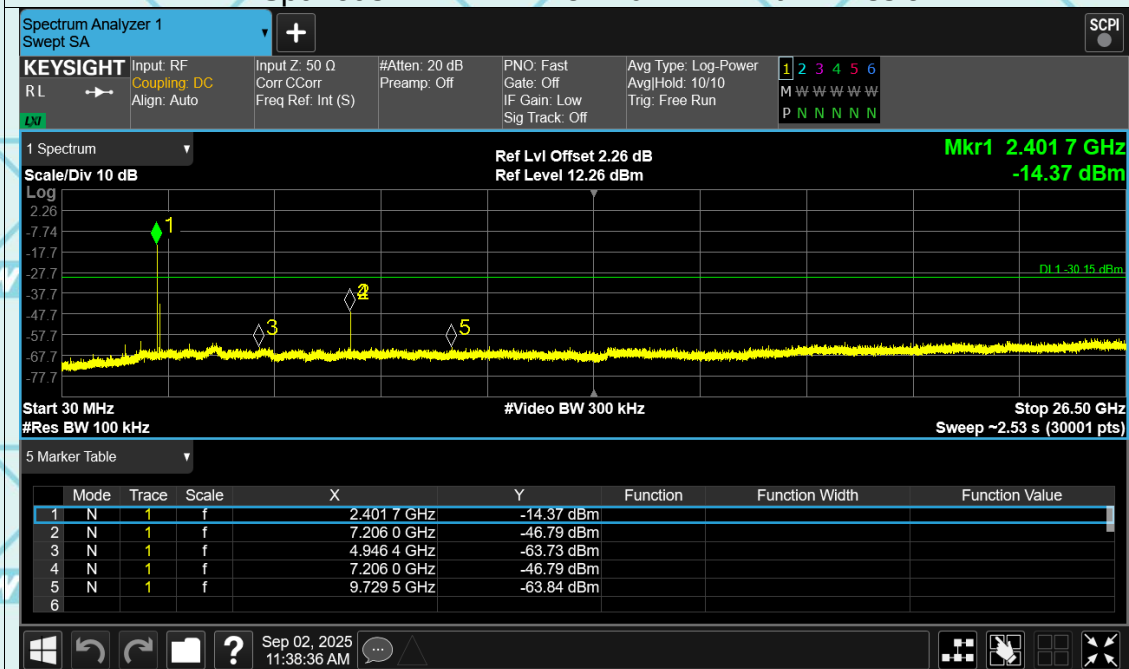

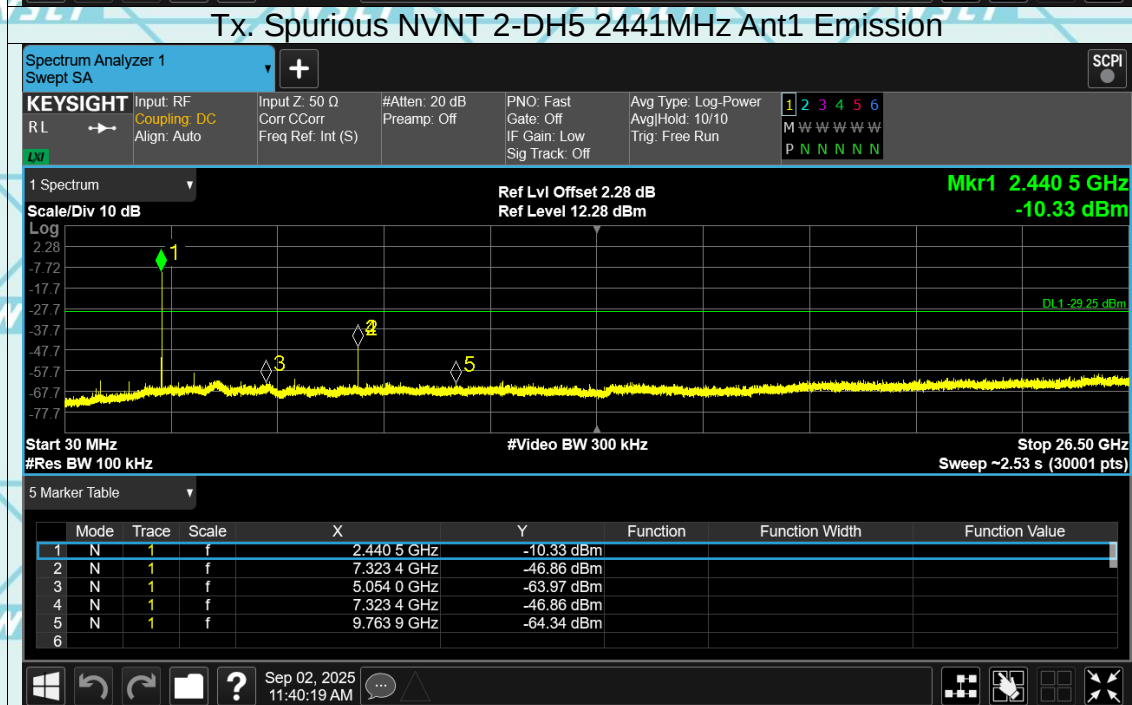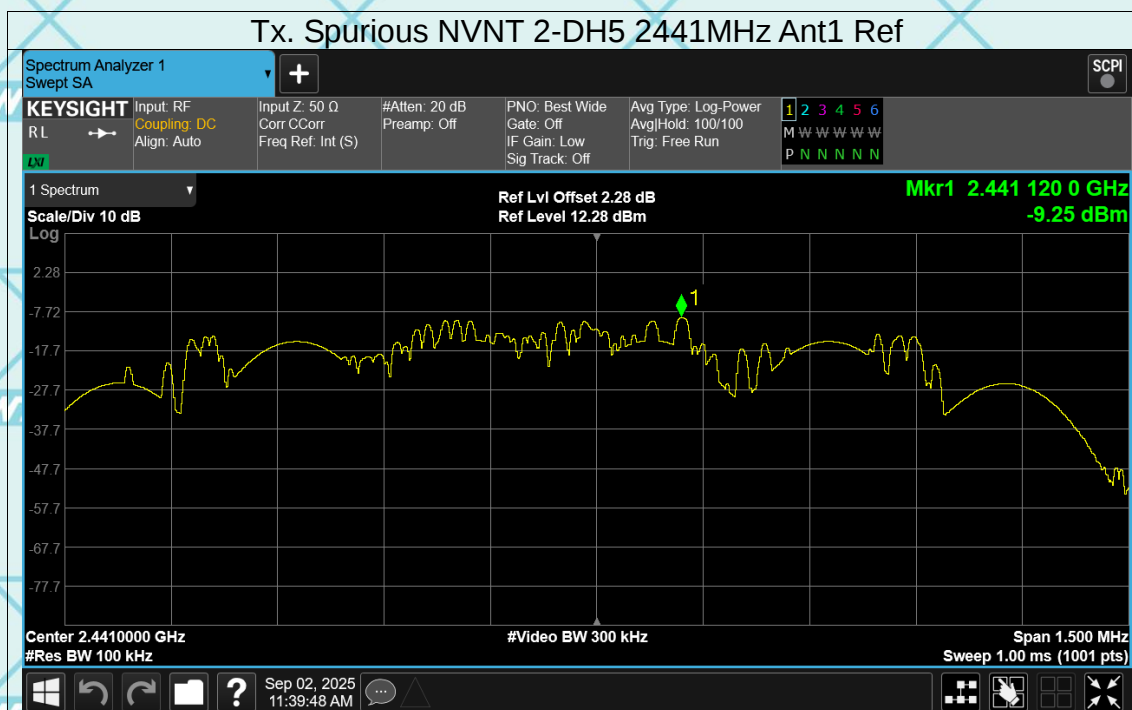


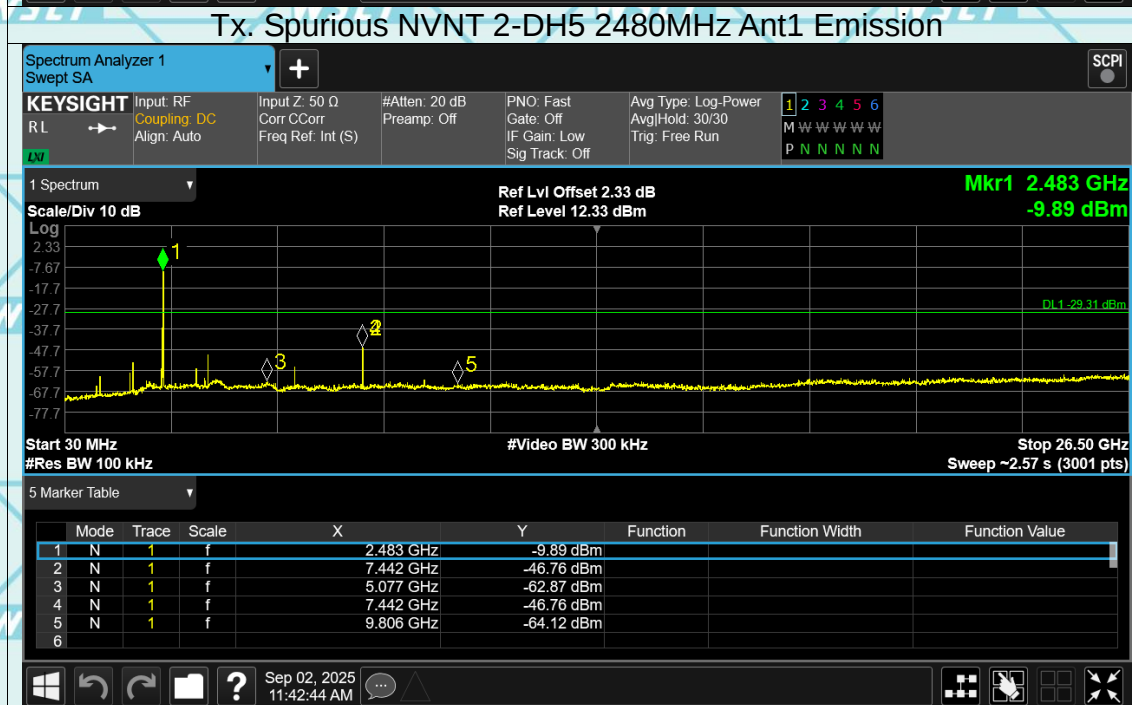
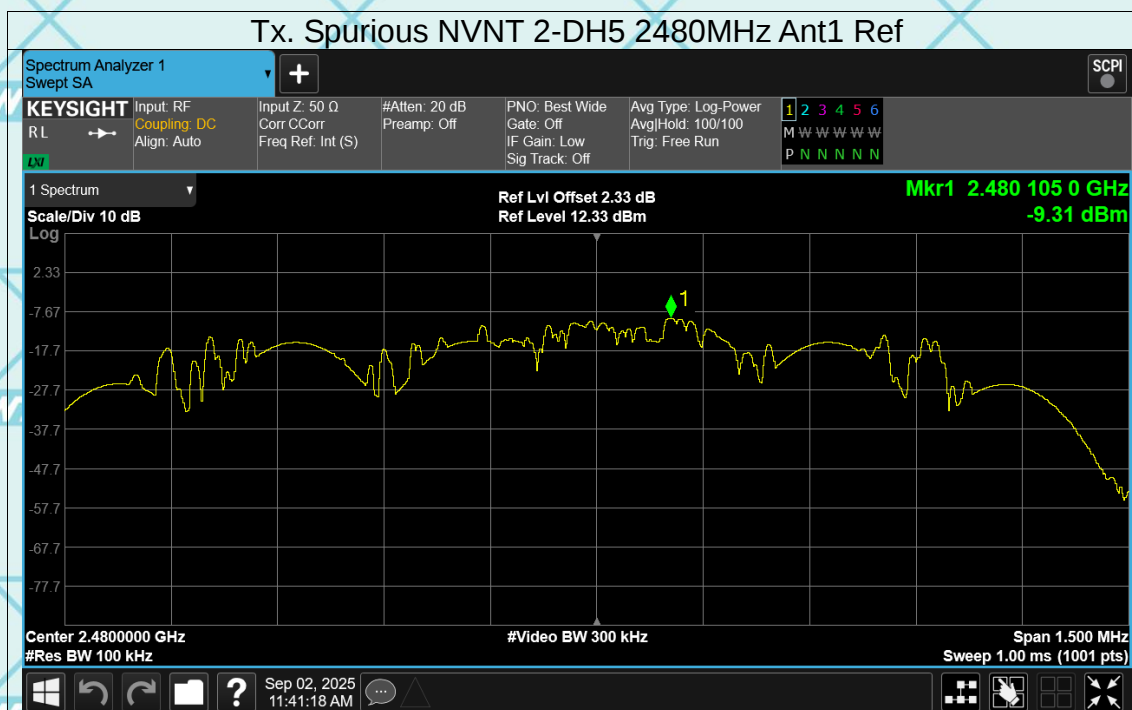




Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

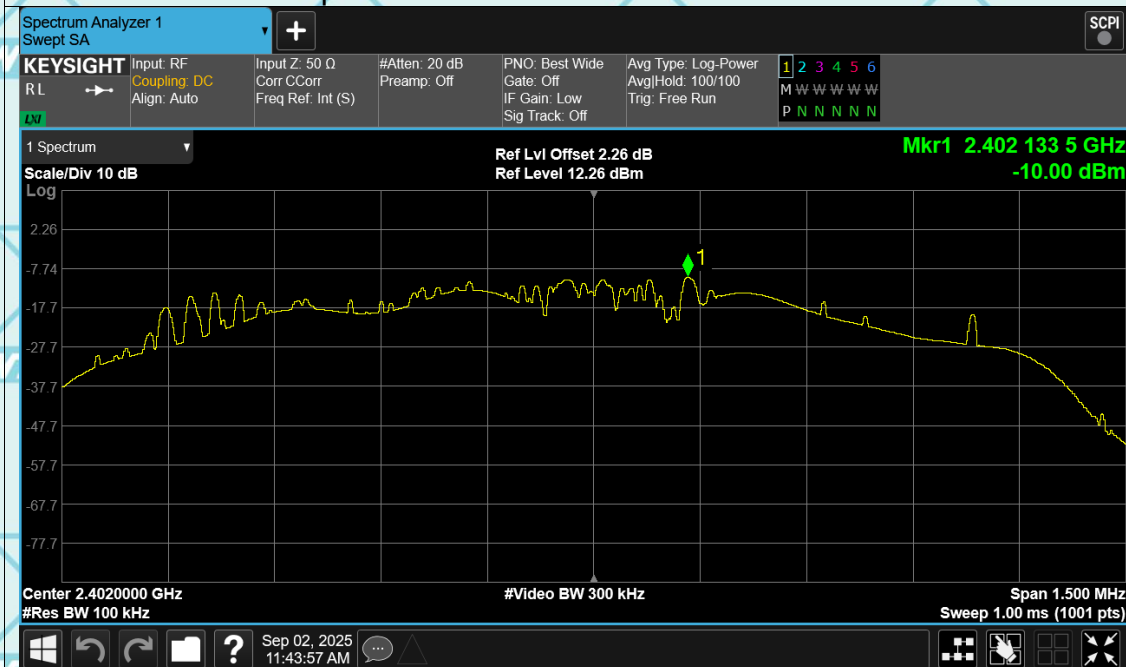


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

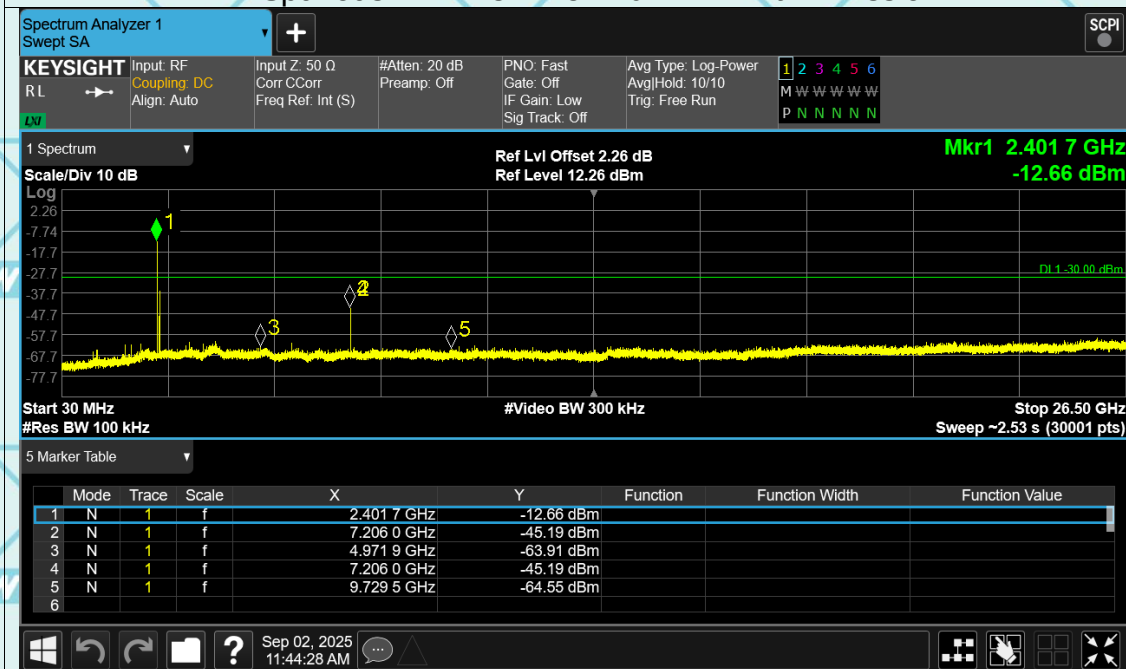


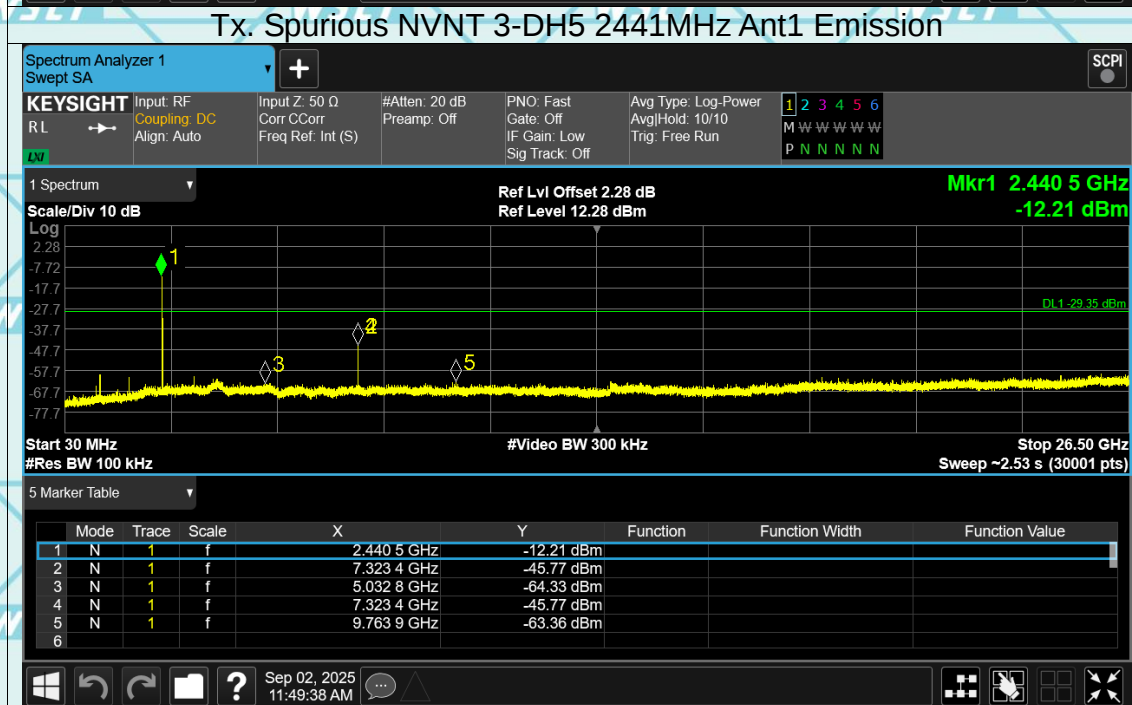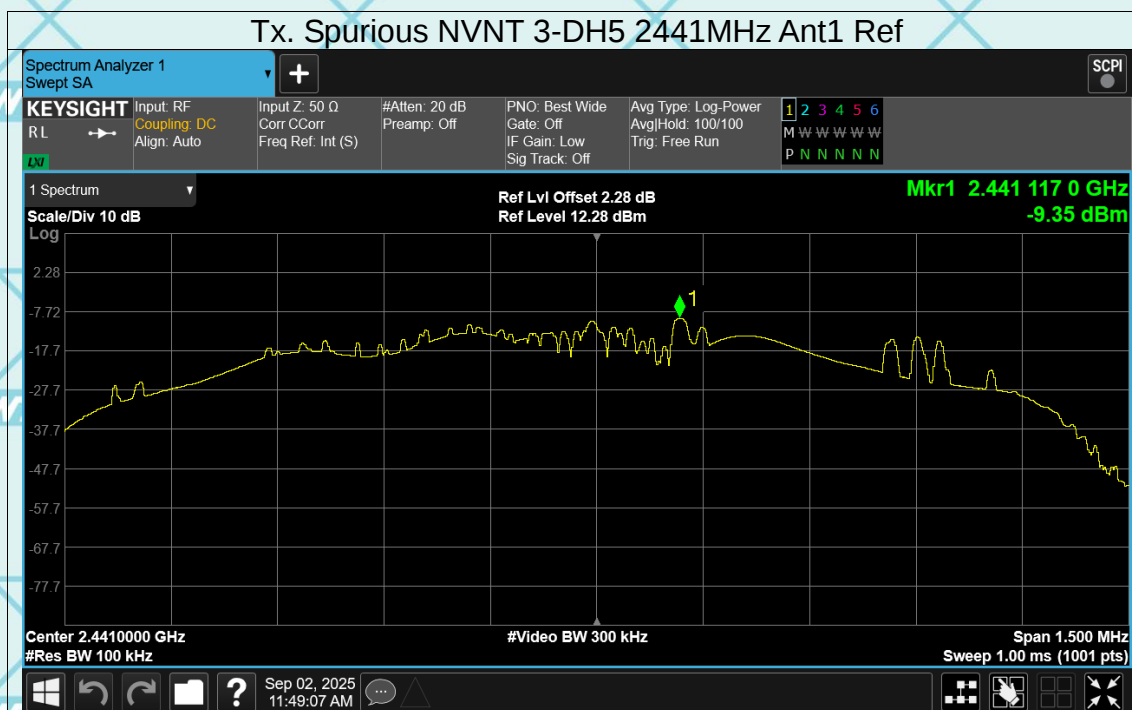

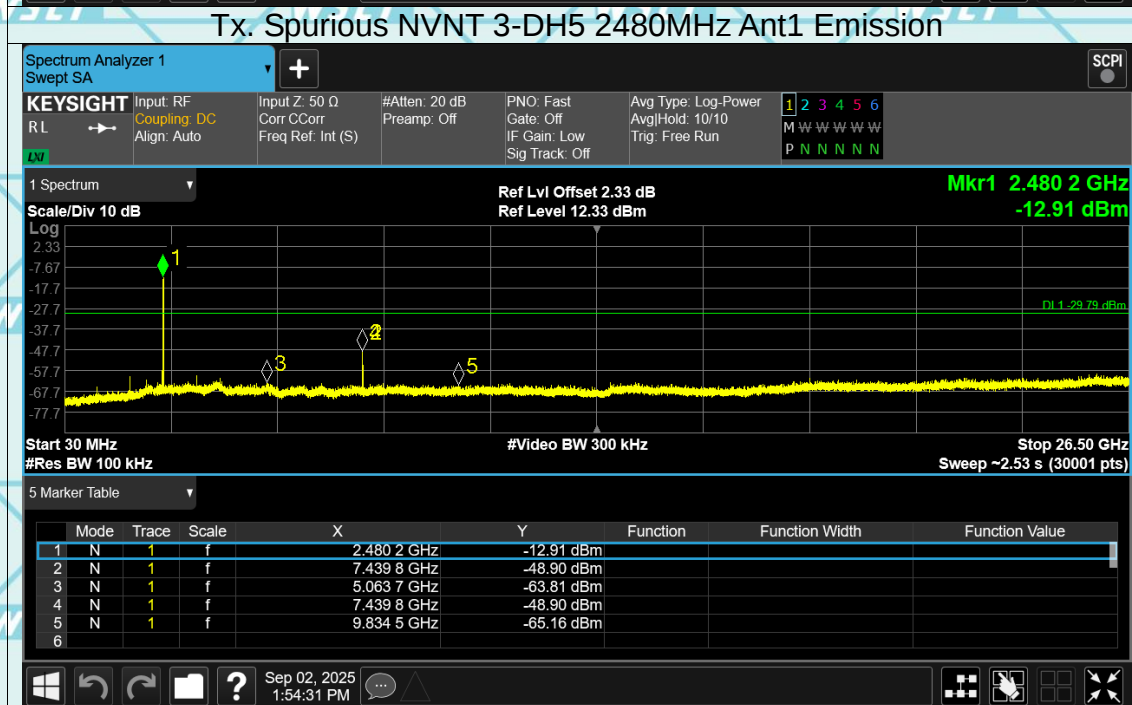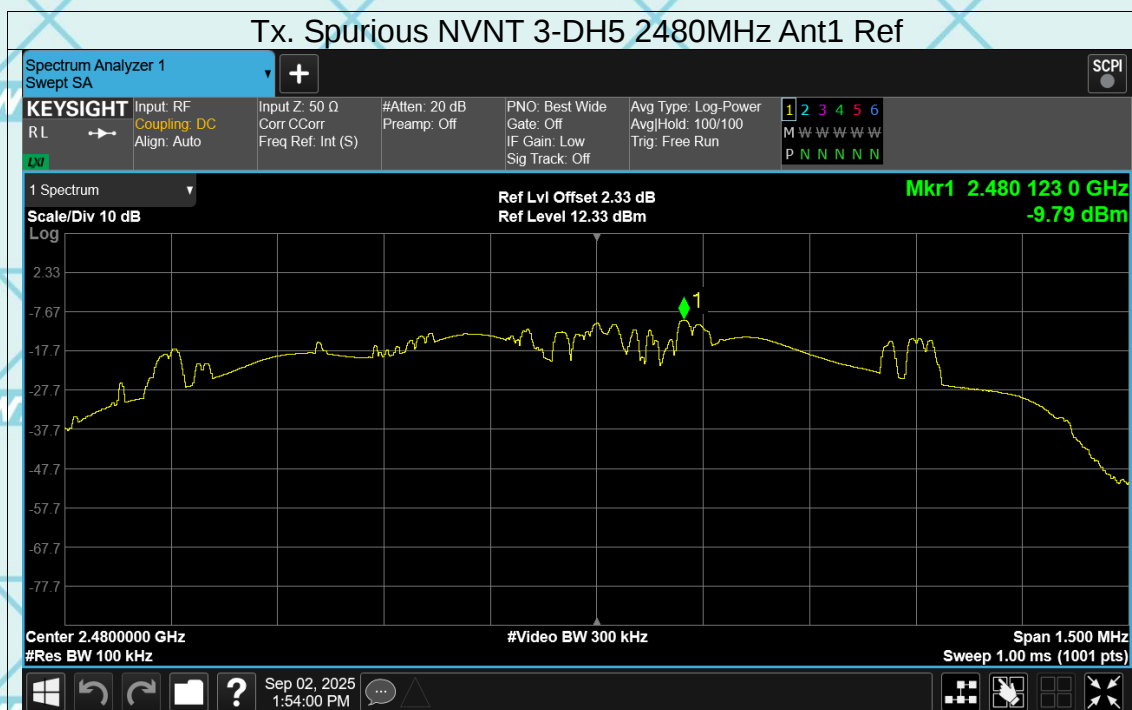

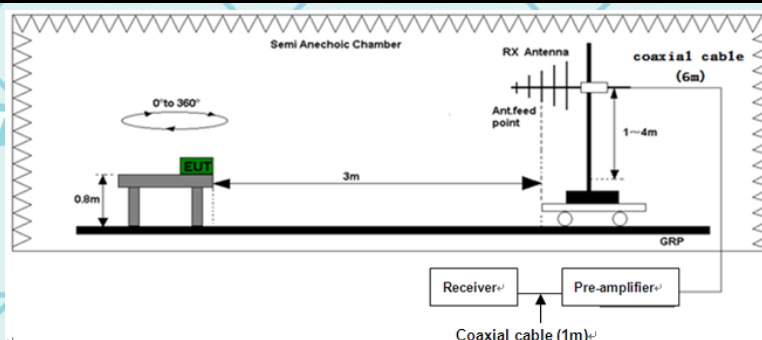

Above 1GHz

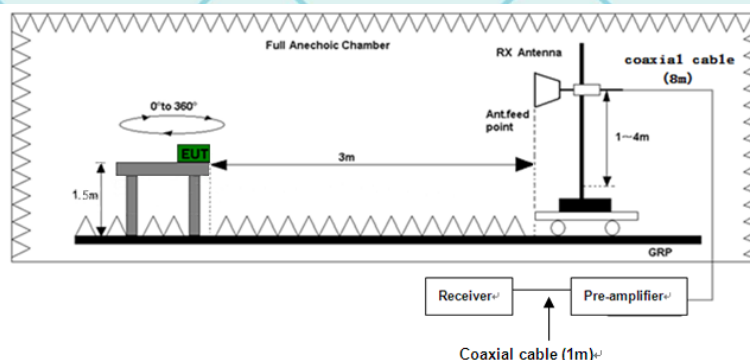**Test Mode:**

Transmitting mode with modulation

Test Procedure:

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10:2020 Measurement Guidelines.
 2. For the radiated emission test below 1GHz:
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
- For the radiated emission test above 1GHz:
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final

	measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$GHz ; VBW$\geq$RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak (3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds On time = $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$ Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc. Average Emission Level = Peak Emission Level + $20 \cdot \log(\text{Duty cycle})$ Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
Test results:	PASS

6.11.2. Test Data(worst case)


Please refer to following diagram for individual

The worst mode is GFSK

Below 1GHz

Horizontal:

80.0 dBuV/m

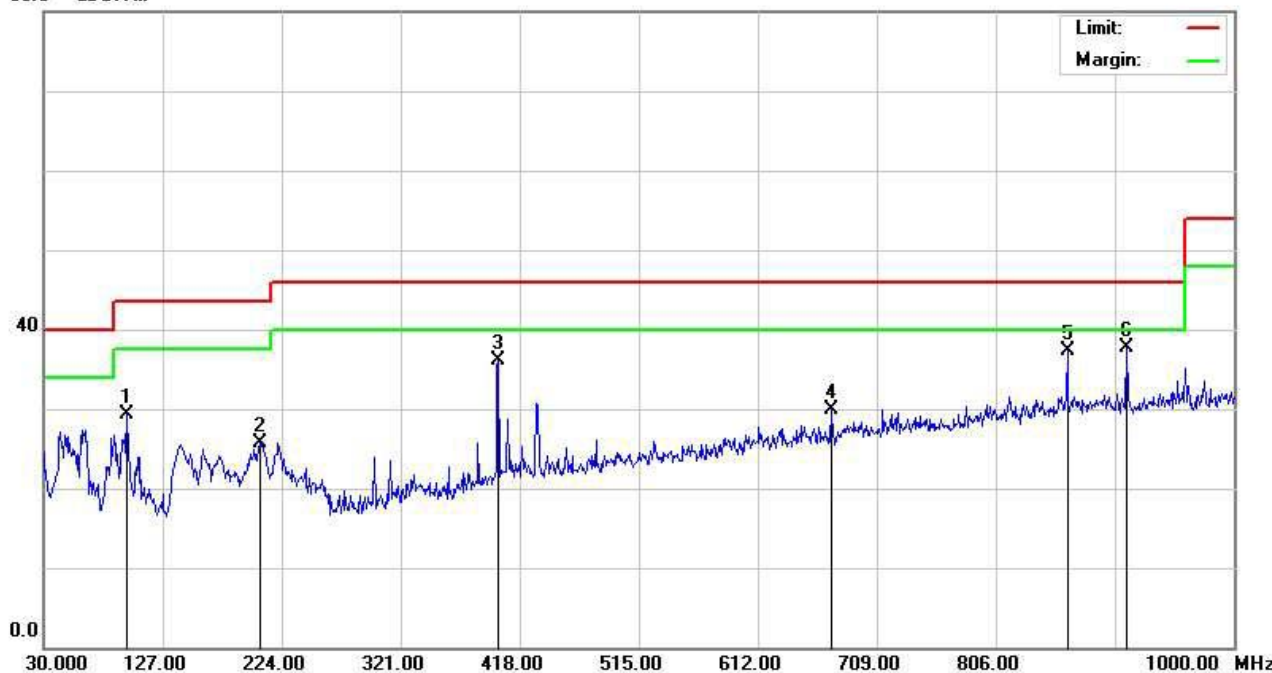

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		97.9000	40.65	-11.42	29.23	43.50	-14.27	QP
2		206.5399	36.48	-10.74	25.74	43.50	-17.76	QP
3		400.5400	39.60	-3.54	36.06	46.00	-9.94	QP
4		672.1400	27.36	2.46	29.82	46.00	-16.18	QP
5		864.2000	31.20	6.15	37.35	46.00	-8.65	QP
6	*	912.7000	31.17	6.63	37.80	46.00	-8.20	QP

Report No.: WSCT-ANAB-R&E250900073A1-BT

Issued Date: 28 July 2026

Revised: None

Vertical:



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	41.6400	57.48	-20.52	36.96	40.00	-3.04	QP
2		160.9500	44.74	-19.88	24.86	43.50	-18.64	QP
3		399.5700	51.38	-18.77	32.61	46.00	-13.39	QP
4		576.1100	46.44	-17.85	28.59	46.00	-17.41	QP
5		789.5100	46.77	-16.72	30.05	46.00	-15.95	QP
6		979.6300	47.61	-15.41	32.20	54.00	-21.80	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

e 150 kHz to 30MHz.

Above 1GHz


Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

GFSK

Low channel: 2402MHz

Horizontal:

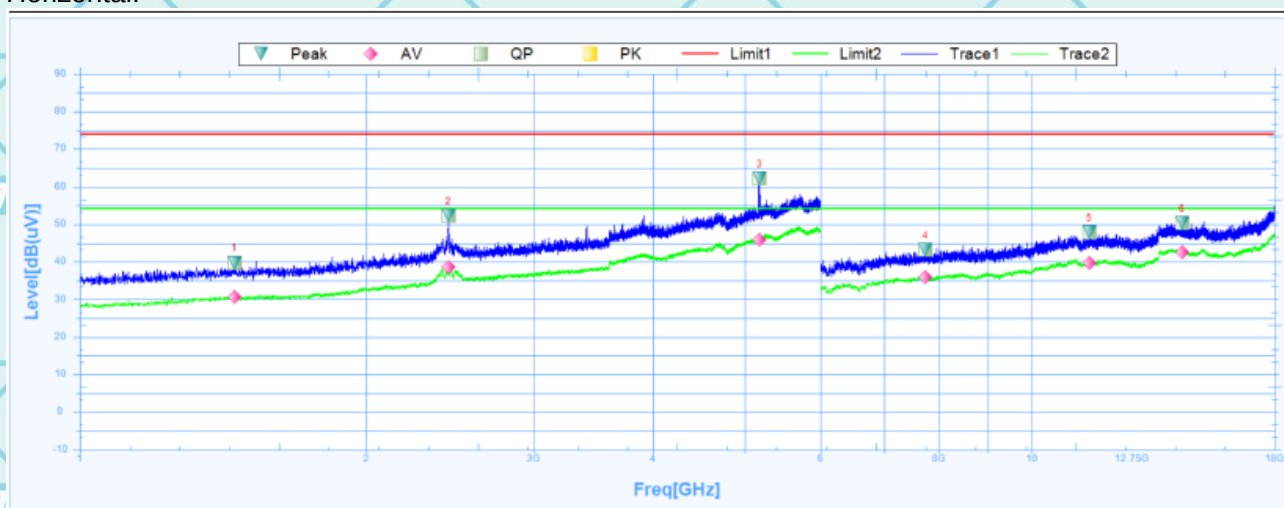

Susputed Data List


NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1453.1250	39.81	25.05	14.76	74	-34.19	0.4	Horizontal	PK	Pass
1	1453.1250	30.65	25.05	5.6	54	-23.35	0.4	Horizontal	AV	Pass
2	2440.0000	52.29	27.4	24.89	74	-21.71	-0.1	Horizontal	PK	Pass
2	2440.0000	38.62	27.4	11.22	54	-15.38	-0.1	Horizontal	AV	Pass
3	5179.3750	62.31	31.74	30.57	74	-11.69	108.5	Horizontal	PK	Pass
3	5179.3750	45.8	31.74	14.06	54	-8.2	108.5	Horizontal	AV	Pass
4	7737.0000	43.29	7.97	35.32	74	-30.71	173.8	Horizontal	PK	Pass
4	7737.0000	35.88	7.97	27.91	54	-18.12	173.8	Horizontal	AV	Pass
5	11497.5000	47.78	16.12	31.66	74	-26.22	360.1	Horizontal	PK	Pass
5	11497.5000	39.62	16.12	23.5	54	-14.38	360.1	Horizontal	AV	Pass
6	14397.0000	50.35	18.72	31.63	74	-23.65	161.9	Horizontal	PK	Pass
6	14397.0000	42.51	18.72	23.79	54	-11.49	161.9	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250900073A1-BT

Issued Date: 28 July 2026

Revised: None

Vertical:

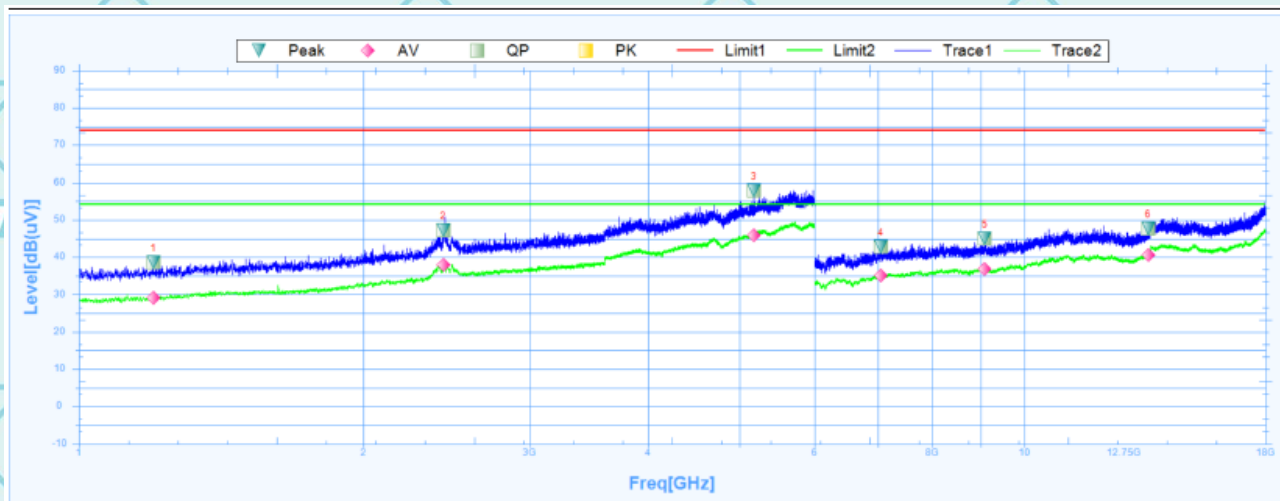

Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1199.3750	38.53	24.4	14.13	74	-35.47	46.4	Vertical	PK	Pass
1	1199.3750	29.07	24.4	4.67	54	-24.93	46.4	Vertical	AV	Pass
2	2428.7500	47.15	27.36	19.79	74	-26.85	177.9	Vertical	PK	Pass
2	2428.7500	37.9	27.36	10.54	54	-16.1	177.9	Vertical	AV	Pass
3	5180.6250	57.9	31.74	26.16	74	-16.1	182.7	Vertical	PK	Pass
3	5180.6250	45.98	31.74	14.24	54	-8.02	182.7	Vertical	AV	Pass
4	7051.5000	42.8	6.52	36.28	74	-31.2	197.6	Vertical	PK	Pass
4	7051.5000	35.16	6.52	28.64	54	-18.84	197.6	Vertical	AV	Pass
5	9087.0000	45.1	9.91	35.19	74	-28.9	305.2	Vertical	PK	Pass
5	9087.0000	36.79	9.91	26.88	54	-17.21	305.2	Vertical	AV	Pass
6	13519.5000	47.66	17.74	29.92	74	-26.34	7	Vertical	PK	Pass
6	13519.5000	40.67	17.74	22.93	54	-13.33	7	Vertical	AV	Pass


Report No.: WSCT-ANAB-R&E250900073A1-BT

Issued Date: 28 July 2026

Revised: None

Middle channel: 2441MHz

Horizontal:

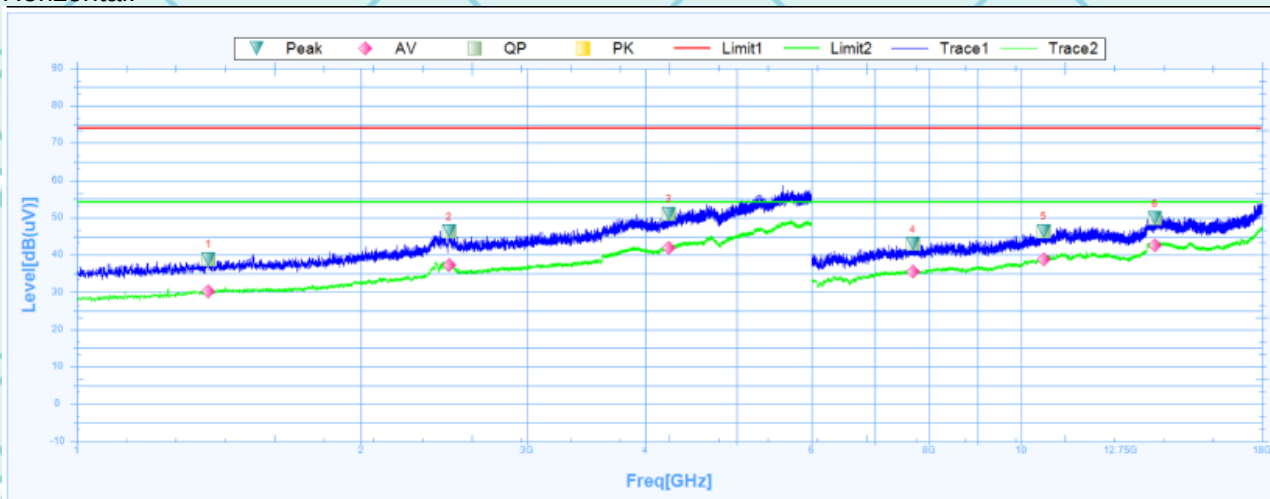

Suspected Data List


NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1378.1250	38.93	25.02	13.91	74	-35.07	247.2	Horizontal	PK	Pass
1	1378.1250	30.12	25.02	5.1	54	-23.88	247.2	Horizontal	AV	Pass
2	2479.3750	46.43	27.53	18.9	74	-27.57	103.7	Horizontal	PK	Pass
2	2479.3750	37.33	27.53	9.8	54	-16.67	103.7	Horizontal	AV	Pass
3	4238.7500	51.09	30.13	20.96	74	-22.91	5.5	Horizontal	PK	Pass
3	4238.7500	41.94	30.13	11.81	54	-12.06	5.5	Horizontal	AV	Pass
4	7681.5000	42.92	7.96	34.96	74	-31.08	359.9	Horizontal	PK	Pass
4	7681.5000	35.51	7.96	27.55	54	-18.49	359.9	Horizontal	AV	Pass
5	10569.0000	46.44	14.2	32.24	74	-27.56	359.9	Horizontal	PK	Pass
5	10569.0000	38.8	14.2	24.6	54	-15.2	359.9	Horizontal	AV	Pass
6	13864.5000	49.89	18.73	31.16	74	-24.11	257.4	Horizontal	PK	Pass
6	13864.5000	42.51	18.73	23.78	54	-11.49	257.4	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250900073A1-BT

Issued Date: 28 July 2026

Revised: None

Vertical:

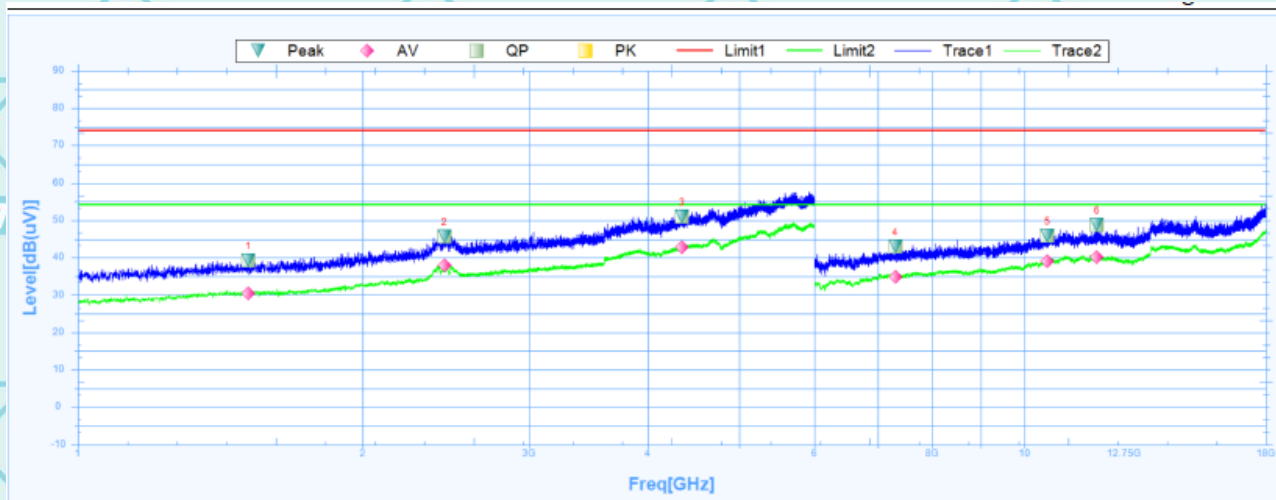

Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1515.0000	39.3	24.98	14.32	74	-34.7	96.7	Vertical	PK	Pass
1	1515.0000	30.53	24.98	5.55	54	-23.47	96.7	Vertical	AV	Pass
2	2440.0000	45.66	27.4	18.26	74	-28.34	359.6	Vertical	PK	Pass
2	2440.0000	37.93	27.4	10.53	54	-16.07	359.6	Vertical	AV	Pass
3	4351.8750	50.94	30.33	20.61	74	-23.06	247.3	Vertical	PK	Pass
3	4351.8750	42.76	30.33	12.43	54	-11.24	247.3	Vertical	AV	Pass
4	7306.5000	43.04	6.86	36.18	74	-30.96	360.1	Vertical	PK	Pass
4	7306.5000	34.95	6.86	28.09	54	-19.05	360.1	Vertical	AV	Pass
5	10582.5000	45.85	14.26	31.59	74	-28.15	360.1	Vertical	PK	Pass
5	10582.5000	39.14	14.26	24.88	54	-14.86	360.1	Vertical	AV	Pass
6	11937.0000	48.75	16.64	32.11	74	-25.25	0.6	Vertical	PK	Pass
6	11937.0000	40.17	16.64	23.53	54	-13.83	0.6	Vertical	AV	Pass


Report No.: WSCT-ANAB-R&E250900073A1-BT

Issued Date: 28 July 2026

Revised: None

High channel: 2480MHz

Horizontal:

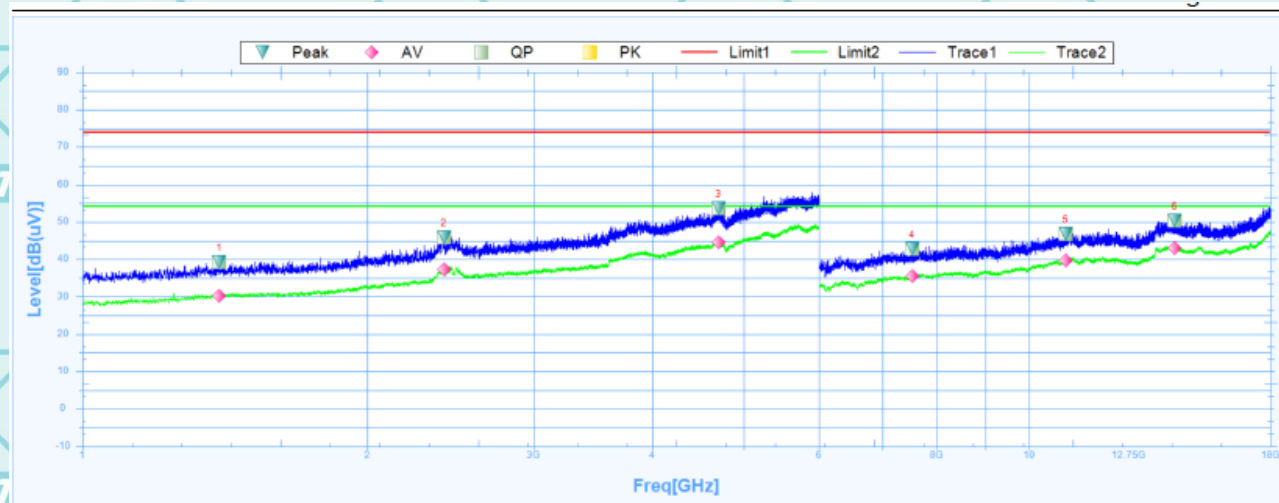

Suspected Data List


NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1395.0000	39.18	25.08	14.1	74	-34.82	65.4	Horizontal	PK	Pass
1	1395.0000	30.19	25.08	5.11	54	-23.81	65.4	Horizontal	AV	Pass
2	2410.6250	45.95	27.3	18.65	74	-28.05	43.8	Horizontal	PK	Pass
2	2410.6250	37.39	27.3	10.09	54	-16.61	43.8	Horizontal	AV	Pass
3	4701.2500	53.53	31	22.53	74	-20.47	251.8	Horizontal	PK	Pass
3	4701.2500	44.54	31	13.54	54	-9.46	251.8	Horizontal	AV	Pass
4	7527.0000	42.75	7.63	35.12	74	-31.25	313.8	Horizontal	PK	Pass
4	7527.0000	35.46	7.63	27.83	54	-18.54	313.8	Horizontal	AV	Pass
5	10932.0000	46.87	15.23	31.64	74	-27.13	22.2	Horizontal	PK	Pass
5	10932.0000	39.79	15.23	24.56	54	-14.21	22.2	Horizontal	AV	Pass
6	14257.5000	50.3	18.87	31.43	74	-23.7	6.2	Horizontal	PK	Pass
6	14257.5000	43	18.87	24.13	54	-11	6.2	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250900073A1-BT

Issued Date: 28 July 2026

Revised: None

Vertical:

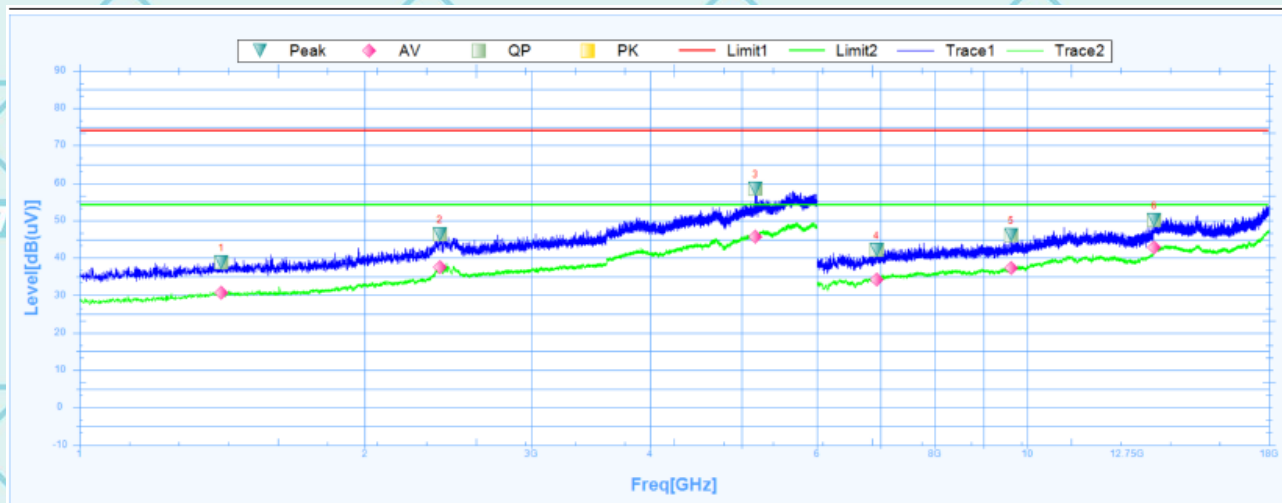

Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1411.2500	38.89	25.09	13.8	74	-35.11	203	Vertical	PK	Pass
1	1411.2500	30.58	25.09	5.49	54	-23.42	203	Vertical	AV	Pass
2	2400.6250	46.3	27.26	19.04	74	-27.7	215	Vertical	PK	Pass
2	2400.6250	37.5	27.26	10.24	54	-16.5	215	Vertical	AV	Pass
3	5171.2500	58.55	31.74	26.81	74	-15.45	93	Vertical	PK	Pass
3	5171.2500	45.73	31.74	13.99	54	-8.27	93	Vertical	AV	Pass
4	6934.5000	42.1	6.14	35.96	74	-31.9	269.8	Vertical	PK	Pass
4	6934.5000	34.14	6.14	28	54	-19.86	269.8	Vertical	AV	Pass
5	9622.5000	46.05	11.43	34.62	74	-27.95	46.3	Vertical	PK	Pass
5	9622.5000	37.24	11.43	25.81	54	-16.76	46.3	Vertical	AV	Pass
6	13621.5000	50.08	18.04	32.04	74	-23.92	359.3	Vertical	PK	Pass
6	13621.5000	42.71	18.04	24.67	54	-11.29	359.3	Vertical	AV	Pass

Note:

1. The emission levels of other frequencies are very lower than the limit and not show in test report.
2. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
3. Data of measurement shown "----" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
4. Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.


6.11.3. Restricted Bands Requirements

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result GFSK model was report as below

GFSK

Low channel


Horizontal:

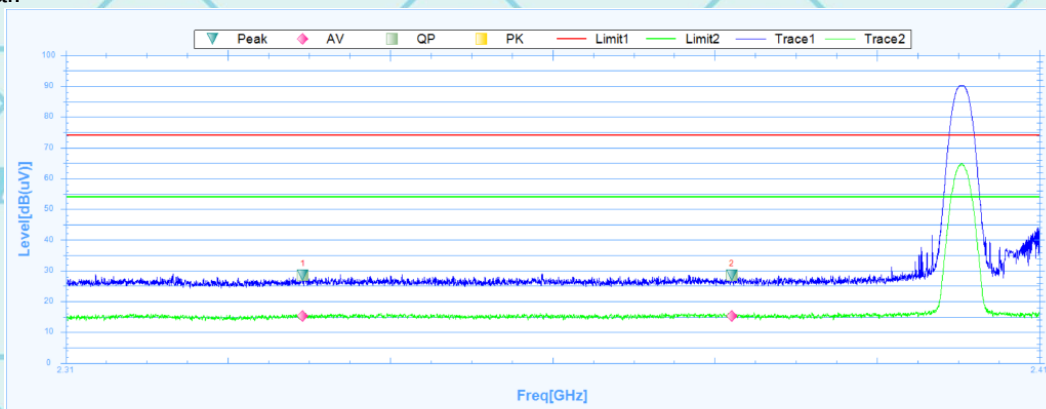

Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2334.3625	28.41	0.56	27.85	74	-45.59	360.1	Horizontal	PK	Pass
1	2334.3625	15.29	0.56	14.73	54	-38.71	360.1	Horizontal	AV	Pass
2	2378.4125	28.49	0.77	27.72	74	-45.51	251.6	Horizontal	PK	Pass
2	2378.4125	15.17	0.77	14.4	54	-38.83	251.6	Horizontal	AV	Pass

Vertical:

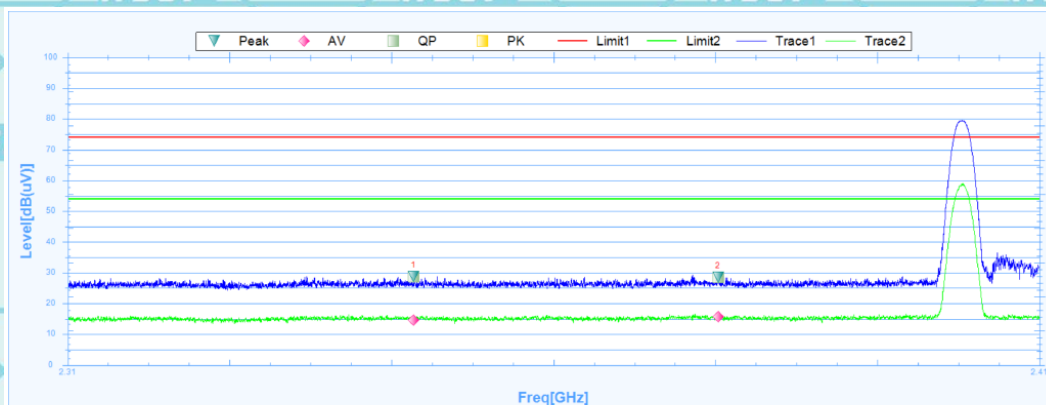

Susputed Data List


NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2345.5875	28.7	0.6	28.1	74	-45.3	-0.1	Vertical	PK	Pass
1	2345.5875	14.53	0.6	13.93	54	-39.47	-0.1	Vertical	AV	Pass
2	2376.9250	28.45	0.76	27.69	74	-45.55	311.7	Vertical	PK	Pass
2	2376.9250	15.63	0.76	14.87	54	-38.37	311.7	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E250900073A1-BT

Issued Date: 28 July 2026


Revised: None

High channel
Horizontal:

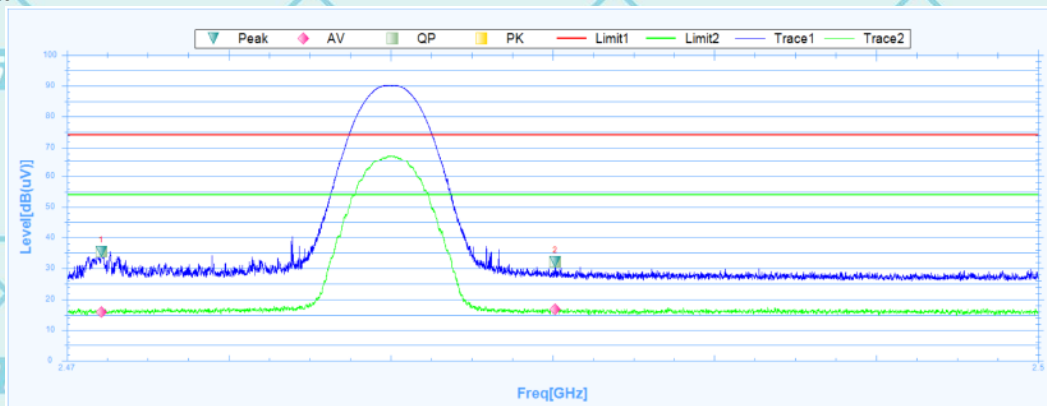

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2471.0538	35.34	1.31	34.03	74	-38.66	210.8	Horizontal	PK	Pass
1	2471.0538	16.01	1.31	14.7	54	-37.99	210.8	Horizontal	AV	Pass
2	2485.0862	32.03	1.4	30.63	74	-41.97	6.1	Horizontal	PK	Pass
2	2485.0862	16.86	1.4	15.46	54	-37.14	6.1	Horizontal	AV	Pass

Vertical:

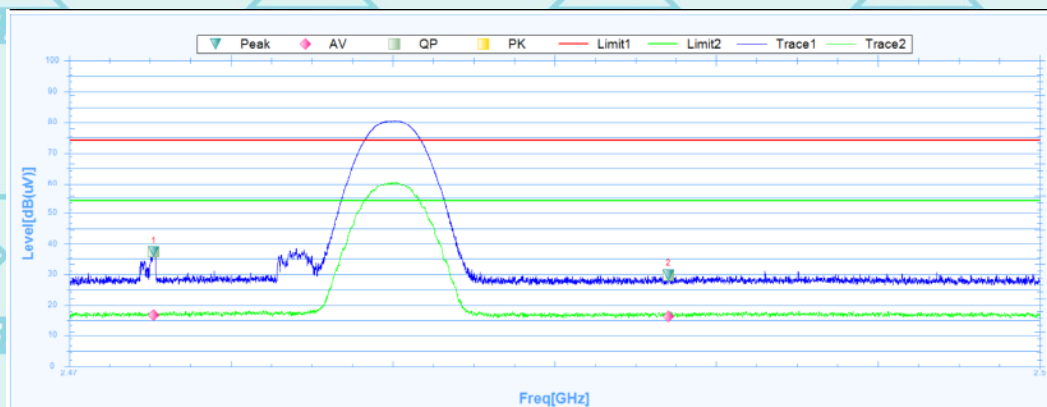

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2472.6062	37.33	1.32	36.01	74	-36.67	323.7	Vertical	PK	Pass
1	2472.6062	16.52	1.32	15.2	54	-37.48	323.7	Vertical	AV	Pass
2	2488.5288	29.71	1.42	28.29	74	-44.29	212.5	Vertical	PK	Pass
2	2488.5288	16.18	1.42	14.76	54	-37.82	212.5	Vertical	AV	Pass

Note: Freq. = Emission frequency in MHz
 Reading level (dB(uV)) = Receiver reading
 Corr. Factor (dB) = Attenuation factor + Cable loss
 Level (dB(uV)) = Reading level (dB(uV)) + Corr. Factor (dB)
 Limit (dB(uV)) = Limit stated in standard
 Margin (dB) = Level (dB(uV)) - Limits (dB(uV))

7 Test Setup Photographs

Please refer to Annex "Set Up Photos-15C " for test setup photos

*******END OF REPORT*******