

## TEST REPORT

**Product** : Tablet  
**Trade mark** : N/A  
**Model/Type reference** : X7, X7L, X6, X6L, X6PRO,  
X6PROL, X8, X8L, X9, X9L,  
X9PRO, X9PROL  
**Serial Number** : N/A  
**Report Number** : EED32S80471103  
**FCC ID** : 2AW9M-X7  
**Date of Issue** : Apr. 23, 2026  
**Test Standards** : 47 CFR Part 15 Subpart C  
**Test result** : PASS


Prepared for:

**Shenzhen Efercro Electronic Technology Co., Ltd.**  
**Room 901, Block E, Building 1, Section 1, Chuangzhi Yuncheng,**  
**Liuxian Avenue, Xili Community, Xili Street, Nanshan District, Shenzhen**

Prepared by:

**Centre Testing International Group Co., Ltd.**  
**Hongwei Industrial Park, Zone 70, Bao'an District,**  
**Shenzhen, Guangdong, China**  
**TEL: +86-755-3368 3668**  
**FAX: +86-755-3368 3385**

Compiled by:



Win Wei

Reviewed by:



Keven Tan

Approved by:



Aaron Ma

Date:

Apr. 23, 2026



Check No.: 7833110326

## 1 Content

|                                                            |           |
|------------------------------------------------------------|-----------|
| <b>1 CONTENT</b>                                           | <b>2</b>  |
| <b>2 TEST SUMMARY</b>                                      | <b>3</b>  |
| <b>3 GENERAL INFORMATION</b>                               | <b>4</b>  |
| 3.1 CLIENT INFORMATION                                     | 4         |
| 3.2 GENERAL DESCRIPTION OF EUT                             | 4         |
| 3.3 TEST CONFIGURATION                                     | 6         |
| 3.4 TEST ENVIRONMENT                                       | 7         |
| 3.5 DESCRIPTION OF SUPPORT UNITS                           | 7         |
| 3.6 TEST LOCATION                                          | 7         |
| 3.7 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)   | 8         |
| <b>4 EQUIPMENT LIST</b>                                    | <b>9</b>  |
| <b>5 TEST RESULTS AND MEASUREMENT DATA</b>                 | <b>13</b> |
| 5.1 ANTENNA REQUIREMENT                                    | 13        |
| 5.2 AC POWER LINE CONDUCTED EMISSIONS                      | 14        |
| 5.3 MAXIMUM CONDUCTED OUTPUT POWER                         | 18        |
| 5.4 DTS BANDWIDTH                                          | 19        |
| 5.5 MAXIMUM POWER SPECTRAL DENSITY                         | 20        |
| 5.6 BAND EDGE MEASUREMENTS AND CONDUCTED SPURIOUS EMISSION | 21        |
| 5.7 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS          | 22        |
| <b>6 APPENDIX A</b>                                        | <b>87</b> |
| <b>7 PHOTOGRAPHS</b>                                       | <b>88</b> |

## 2 Test Summary

| Test Item                                     | Test Requirement                                   | Result |
|-----------------------------------------------|----------------------------------------------------|--------|
| Antenna Requirement                           | 47 CFR Part 15 Subpart C Section 15.203/15.247 (c) | PASS   |
| AC Power Line Conducted Emission              | 47 CFR Part 15 Subpart C Section 15.207            | PASS   |
| DTS Bandwidth                                 | 47 CFR Part 15 Subpart C Section 15.247 (a)(2)     | PASS   |
| Maximum Conducted Output Power                | 47 CFR Part 15 Subpart C Section 15.247 (b)(3)     | PASS   |
| Maximum Power Spectral Density                | 47 CFR Part 15 Subpart C Section 15.247 (e)        | PASS   |
| Band edge measurements                        | 47 CFR Part 15 Subpart C Section 15.247(d)         | PASS   |
| Conducted Spurious Emissions                  | 47 CFR Part 15 Subpart C Section 15.247(d)         | PASS   |
| Radiated Spurious Emission & Restricted bands | 47 CFR Part 15 Subpart C Section 15.205/15.209     | PASS   |

### 3 General Information

#### 3.1 Client Information

|                          |                                                                                                                                       |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Applicant:               | Shenzhen Efercro Electronic Technology Co., Ltd.                                                                                      |
| Address of Applicant:    | Room 901, Block E, Building 1, Section 1, Chuangzhi Yuncheng, Liuxian Avenue, Xili Community, Xili Street, Nanshan District, Shenzhen |
| Manufacturer:            | Shenzhen Efercro Electronic Technology Co., Ltd.                                                                                      |
| Address of Manufacturer: | Room 901, Block E, Building 1, Section 1, Chuangzhi Yuncheng, Liuxian Avenue, Xili Community, Xili Street, Nanshan District, Shenzhen |

#### 3.2 General Description of EUT

|                       |                                                                                                                                                                                                                                                    |                                                                   |  |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|--|
| Product Name:         | Tablet                                                                                                                                                                                                                                             |                                                                   |  |
| Model No.:            | X7, X7L, X6, X6L, X6PRO, X6PROL,X8, X8L, X9, X9L, X9PRO, X9PROL                                                                                                                                                                                    |                                                                   |  |
| Test Model No.:       | X7                                                                                                                                                                                                                                                 |                                                                   |  |
| Model difference:     | They have the same electrical circuit design, layout, components used and internal wiring, only the model names and color are different for marketing requirements.                                                                                |                                                                   |  |
| Trade mark:           | N/A                                                                                                                                                                                                                                                |                                                                   |  |
| Product Type:         | <input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location                                                                                                                                 |                                                                   |  |
| Operation Frequency:  | IEEE 802.11b/g/n(HT20)/ax(HE20): 2412MHz to 2462MHz<br>IEEE 802.11n(HT40)/ax(HE40): 2422MHz to 2452MHz                                                                                                                                             |                                                                   |  |
| Modulation Type:      | IEEE for 802.11b:DSSS(CCK,DQPSK,DBPSK)<br>IEEE for 802.11g:OFDM(64QAM, 16QAM, QPSK, BPSK)<br>IEEE for 802.11n(HT20 and HT40): OFDM (64QAM, 16QAM,QPSK,BPSK)<br>IEEE for 802.11ax(HE20 and HE40): OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK) |                                                                   |  |
| Number of Channel:    | IEEE 802.11b/g, IEEE 802.11n HT20/ax HE20: 11 Channels<br>IEEE 802.11n HT40/ax HE40: 7 Channels                                                                                                                                                    |                                                                   |  |
| Channel Separation:   | 5MHz                                                                                                                                                                                                                                               |                                                                   |  |
| Function              | <input checked="" type="checkbox"/> SISO <input type="checkbox"/> 2x2 MIMO <input type="checkbox"/> 3x3 MIMO <input type="checkbox"/> 4x4MIMO                                                                                                      |                                                                   |  |
| Antenna Type:         | FPC antenna                                                                                                                                                                                                                                        |                                                                   |  |
| Antenna Gain:         | 1.99dBi                                                                                                                                                                                                                                            |                                                                   |  |
| Power Supply:         | Adapter:                                                                                                                                                                                                                                           | Input: AC 100V-240V 50-60Hz 0.4A Max<br>Output: DC 5.0V 2A(10.0W) |  |
|                       | Battery:                                                                                                                                                                                                                                           | DC3.8V                                                            |  |
|                       | USB Port:                                                                                                                                                                                                                                          | DC 5V                                                             |  |
| Test Voltage:         | DC 5V                                                                                                                                                                                                                                              |                                                                   |  |
| Sample Received Date: | Mar. 11, 2026                                                                                                                                                                                                                                      |                                                                   |  |
| Sample tested Date:   | Mar. 11, 2026 to Apr. 08, 2026                                                                                                                                                                                                                     |                                                                   |  |

| Operation Frequency each of channel (802.11b/g/n HT20/ax HE20) |           |         |           |         |           |         |           |
|----------------------------------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                                                        | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1                                                              | 2412MHz   | 4       | 2427MHz   | 7       | 2442MHz   | 10      | 2457MHz   |
| 2                                                              | 2417MHz   | 5       | 2432MHz   | 8       | 2447MHz   | 11      | 2462MHz   |
| 3                                                              | 2422MHz   | 6       | 2437MHz   | 9       | 2452MHz   |         |           |
| Operation Frequency each of channel (802.11n HT40/ax HE40)     |           |         |           |         |           |         |           |
| Channel                                                        | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 3                                                              | 2422MHz   | 6       | 2437MHz   | 9       | 2452MHz   |         |           |
| 4                                                              | 2427MHz   | 7       | 2442MHz   |         |           |         |           |
| 5                                                              | 2432MHz   | 8       | 2447MHz   |         |           |         |           |

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

**802.11b/g/n (HT20)/ax (HE20)**

| Channel             | Frequency |
|---------------------|-----------|
| The lowest channel  | 2412MHz   |
| The middle channel  | 2437MHz   |
| The highest channel | 2462MHz   |

**802.11n (HT40)/ax (HE40)**

| Channel             | Frequency |
|---------------------|-----------|
| The lowest channel  | 2422MHz   |
| The middle channel  | 2437MHz   |
| The highest channel | 2452MHz   |

### 3.3 Test Configuration

| EUT Test Software Settings:                                                                                                                                                                                                              |           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| Test Software:                                                                                                                                                                                                                           | ADB       |
| EUT Power Grade:                                                                                                                                                                                                                         | Default   |
| Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.                                                                                                              |           |
| Test Mode:                                                                                                                                                                                                                               |           |
| We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:                             |           |
| Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.                                                                                                                                     |           |
| Mode                                                                                                                                                                                                                                     | Data rate |
| 802.11b                                                                                                                                                                                                                                  | 1Mbps     |
| 802.11g                                                                                                                                                                                                                                  | 6Mbps     |
| 802.11n(HT20)                                                                                                                                                                                                                            | MCS0      |
| 802.11n(HT40)                                                                                                                                                                                                                            | MCS0      |
| 802.11ax(HE20)                                                                                                                                                                                                                           | MCS0      |
| 802.11ax(HE40)                                                                                                                                                                                                                           | MCS0      |
| According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, MCS0 for 802.11n(HT20), MCS0 for 802.11n(HT40), MCS0 for 802.11ax(HE20), MCS0 for 802.11ax(HE40). |           |

### 3.4 Test Environment

| Operating Environment:       |            |
|------------------------------|------------|
| Radiated Spurious Emissions: |            |
| Temperature:                 | 22~25.0 °C |
| Humidity:                    | 50~55 % RH |
| Atmospheric Pressure:        | 1010mbar   |
| Conducted Emissions:         |            |
| Temperature:                 | 22~25.0 °C |
| Humidity:                    | 50~55 % RH |
| Atmospheric Pressure:        | 1010mbar   |
| RF Conducted:                |            |
| Temperature:                 | 22~25.0 °C |
| Humidity:                    | 50~55 % RH |
| Atmospheric Pressure:        | 1010mbar   |

### 3.5 Description of Support Units

The EUT has been tested independently.

### 3.6 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd  
Hongwei Industrial Park, Zone 70, Bao'an District, Shenzhen, Guangdong, China  
Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385  
No tests were sub-contracted.  
FCC Designation No.: CN1164, Test Firm Registration No.: 260439

### 3.7 Measurement Uncertainty (95% confidence levels, k=2)

| No. | Item                            | Measurement Uncertainty |
|-----|---------------------------------|-------------------------|
| 1   | Radio Frequency                 | $7.9 \times 10^{-8}$    |
| 2   | RF power, conducted             | 0.46dB (30MHz-1GHz)     |
|     |                                 | 0.55dB (1GHz-40GHz)     |
| 3   | Radiated Spurious emission test | 3.3dB (9kHz-30MHz)      |
|     |                                 | 4.3dB (30MHz-1GHz)      |
|     |                                 | 4.5dB (1GHz-18GHz)      |
|     |                                 | 3.4dB (18GHz-40GHz)     |
| 4   | Conduction emission             | 3.5dB (9kHz to 150kHz)  |
|     |                                 | 3.1dB (150kHz to 30MHz) |
| 5   | Temperature test                | 0.64°C                  |
| 6   | Humidity test                   | 3.8%                    |
| 7   | DC power voltages               | 0.026%                  |

## 4 Equipment List

| RF test system                    |                     |           |               |                           |                               |
|-----------------------------------|---------------------|-----------|---------------|---------------------------|-------------------------------|
| Equipment                         | Manufacturer        | Model No. | Serial Number | Cal. Date<br>(mm-dd-yyyy) | Cal. Due date<br>(mm-dd-yyyy) |
| Spectrum Analyzer                 | Keysight            | N9010A    | MY54510339    | 11-25-2025                | 11-24-2026                    |
| Spectrum Analyzer                 | R&S                 | FSW43     | 102978        | 08-11-2025                | 08-10-2026                    |
| Signal Generator                  | Keysight            | N5182B    | MY53051549    | 11-13-2025                | 11-12-2026                    |
| Signal Generator                  | Agilent             | N5181A    | MY46240094    | 11-25-2025                | 11-24-2026                    |
| DC Power                          | Keysight            | E3642A    | MY56376072    | 11-13-2025                | 11-12-2026                    |
| Communication test set            | R&S                 | CMW500    | 169004        | 03-03-2025<br>02-06-2026  | 03-02-2026<br>02-05-2027      |
| RF control unit(power unit)       | JS Tonscend         | JS0806-2  | 24I80620925   | 07-21-2025                | 07-20-2026                    |
| Wi-Fi 7GHz Band Extender          | JS Tonscend         | TS-WF7U2  | 2206200002    | 05-12-2025                | 05-11-2026                    |
| high-low temperature test chamber | Dong Guang Qin Zhuo | LK-80GA   | QZ20150611879 | 11-13-2025                | 11-12-2026                    |
| Temperature/ Humidity Indicator   | biaozhi             | HM10      | 1804186       | 05-26-2025                | 05-25-2026                    |
| BT&WI-FI Automatic test software  | JS Tonscend         | JS1120-3  | V3.6.21       | ---                       | ---                           |
| Digital multimeter                | FLUKE               | 17B MAX   | 59545050WS    | 10-15-2025                | 10-14-2026                    |

| Conducted disturbance Test      |              |           |                  |                          |                          |
|---------------------------------|--------------|-----------|------------------|--------------------------|--------------------------|
| Equipment                       | Manufacturer | Model No. | Serial Number    | Cal. date                | Cal. Due date            |
|                                 |              |           |                  | (mm-dd-yyyy)             | (mm-dd-yyyy)             |
| Receiver                        | R&S          | ESCI      | 100435           | 04-08-2025<br>04-06-2026 | 04-07-2026<br>04-05-2027 |
| Temperature/ Humidity Indicator | Defu         | TH128     | /                | 03-31-2025<br>03-24-2026 | 03-30-2026<br>03-23-2027 |
| LISN                            | R&S          | ENV216    | 100098           | 09-13-2025               | 09-12-2026               |
| Barometer                       | changchun    | DYM3      | 1188             | ---                      | ---                      |
| Test software                   | Fara         | EZ-EMC    | EMC-CON<br>3A1.1 | ---                      | ---                      |
| Capacitive voltage probe        | Schwarzbeck  | CVP 9222C | 00124            | 06-07-2025               | 06-06-2026               |
| ISN                             | TESEQ        | ISN T800  | 30297            | 11-24-2025               | 11-23-2026               |

| 3M Semi-anechoic Chamber (2)- Radiated disturbance Test |              |             |               |                          |                          |
|---------------------------------------------------------|--------------|-------------|---------------|--------------------------|--------------------------|
| Equipment                                               | Manufacturer | Model No.   | Serial Number | Cal. date                | Cal. Due date            |
|                                                         |              |             |               | (mm-dd-yyyy)             | (mm-dd-yyyy)             |
| 3M Chamber & Accessory Equipment                        | TDK          | SAC-3       | ---           | 01/13/2024               | 01/12/2027               |
| Receiver                                                | R&S          | ESC17       | 100938-003    | 09/03/2025               | 09/02/2026               |
| TRILOG Broadband Antenna                                | schwarzbeck  | VULB 9163   | 9163-618      | 05/14/2025               | 05/13/2026               |
| Loop Antenna                                            | Schwarzbeck  | FMZB 1519B  | 1519B-076     | 04/07/2025<br>03-29-2026 | 04/06/2026<br>03-28-2027 |
| Microwave Preamplifier                                  | Tonscend     | EMC051845SE | 980380        | 11/25/2025               | 11/24/2026               |
| Horn Antenna                                            | A.H.SYSTEMS  | SAS-574     | 374           | 07/02/2023               | 07/01/2026               |
| Horn Antenna                                            | ETS-LINGREN  | BBHA 9120D  | 9120D-1869    | 04/07/2025<br>03-31-2026 | 04/06/2026<br>03-30-2027 |
| Preamplifier                                            | Agilent      | 11909A      | 12-1          | 03/03/2025<br>02/06/2026 | 03/02/2026<br>02/07/2027 |
| Preamplifier                                            | CD           | PAP-1840-60 | 6041.6042     | 05/26/2025               | 05/25/2026               |
| Test software                                           | Fara         | EZ-EMC      | EMEC-3A1-Pre  | ---                      | ---                      |
| Cable line                                              | Fulai(7M)    | SF106       | 5219/6A       | 01/13/2024               | 01/12/2027               |
| Cable line                                              | Fulai(6M)    | SF106       | 5220/6A       | 01/13/2024               | 01/12/2027               |
| Cable line                                              | Fulai(3M)    | SF106       | 5216/6A       | 01/13/2024               | 01/12/2027               |
| Cable line                                              | Fulai(3M)    | SF106       | 5217/6A       | 01/13/2024               | 01/12/2027               |


| 3M full-anechoic Chamber       |              |                   |               |                           |                               |
|--------------------------------|--------------|-------------------|---------------|---------------------------|-------------------------------|
| Equipment                      | Manufacturer | Model No.         | Serial Number | Cal. Date<br>(mm-dd-yyyy) | Cal. Due date<br>(mm-dd-yyyy) |
| Fully Anechoic Chamber         | TDK          | FAC-3             | ---           | 01-29-2024                | 01-28-2027                    |
| Receiver                       | Keysight     | N9038A            | MY57290136    | 12-22-2025                | 12-21-2026                    |
| Spectrum Analyzer              | Keysight     | N9020B            | MY57111112    | 12-21-2025                | 12-20-2026                    |
| Spectrum Analyzer              | Keysight     | N9030B            | MY57140871    | 12-21-2025                | 12-20-2026                    |
| TRILOG Broadband Antenna       | Schwarzbeck  | VULB 9163         | 9163-1148     | 04-12-2025<br>03-29-2026  | 04-11-2026<br>03-28-2027      |
| Horn Antenna                   | Schwarzbeck  | BBHA 9170         | 9170-832      | 04-12-2025<br>03-29-2026  | 04-11-2026<br>03-28-2027      |
| Horn Antenna                   | ETS-LINDGREN | 3117              | 57407         | 06-29-2025                | 06-28-2026                    |
| Preamplifier                   | EMCI         | EMC001330         | 980563        | 03-03-2025<br>02-06-2026  | 03-02-2026<br>02-05-2027      |
| Preamplifier                   | EMCI         | EMC051845SE       | 980380        | 11-25-2025                | 11-24-2026                    |
| Preamplifier                   | Tonscend     | TAP-011858        | AP21B806112   | 07-07-2025                | 07-06-2026                    |
| Communication test set         | R&S          | CMW500            | 104466        | 11-25-2025                | 11-24-2026                    |
| Temperature/Humidity Indicator | biaozhi      | GM1360            | EE1186631     | 03-31-2025<br>03-24-2026  | 03-30-2026<br>03-23-2027      |
| RSE Automatic test software    | JS Tonscend  | JS36-RSE          | V5.0.0.1      | ---                       | ---                           |
| Cable line                     | Times        | SFT205-NMSM-2.50M | 394812-0001   | 01-29-2024                | 01-28-2027                    |
| Cable line                     | Times        | SFT205-NMSM-2.50M | 394812-0002   | 01-29-2024                | 01-28-2027                    |
| Cable line                     | Times        | SFT205-NMSM-2.50M | 394812-0003   | 01-29-2024                | 01-28-2027                    |
| Cable line                     | Times        | SFT205-NMSM-2.50M | 393495-0001   | 01-29-2024                | 01-28-2027                    |
| Cable line                     | Times        | EMC104-NMNM-1000  | SN160710      | 01-29-2024                | 01-28-2027                    |
| Cable line                     | Times        | SFT205-NMSM-3.00M | 394813-0001   | 01-29-2024                | 01-28-2027                    |
| Cable line                     | Times        | SFT205-NMNM-1.50M | 381964-0001   | 01-29-2024                | 01-28-2027                    |
| Cable line                     | Times        | SFT205-NMSM-7.00M | 394815-0001   | 01-29-2024                | 01-28-2027                    |
| Cable line                     | Times        | HF160-KMKM-3.00M  | 393493-0001   | 01-29-2024                | 01-28-2027                    |

## 5 Test results and Measurement Data

### 5.1 Antenna Requirement

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>Standard requirement:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 47 CFR Part 15C Section 15.203 /247(c) |
| <p>15.203 requirement:<br/>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement:<br/>The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> |                                        |
| <b>EUT Antenna:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Please see Internal photos             |
| The antenna is FPC antenna. The best case gain of the antenna is 1.99dBi.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                        |


## 5.2 AC Power Line Conducted Emissions
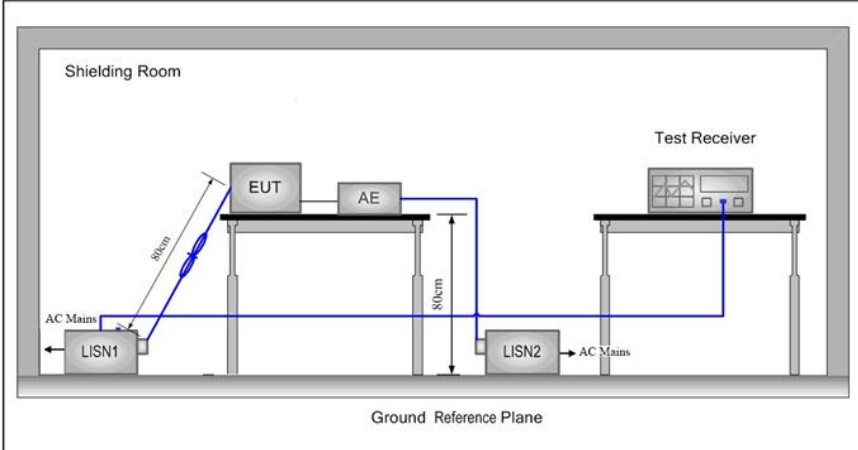
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |              |           |
|--------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------|
| Test Requirement:                                | 47 CFR Part 15C Section 15.207                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |              |           |
| Test Method:                                     | ANSI C63.10-2020                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |              |           |
| Test Frequency Range:                            | 150kHz to 30MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |              |           |
| Receiver setup:                                  | RBW=9 kHz, VBW=30 kHz, Sweep time=auto                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |              |           |
| Limit:                                           | Frequency range (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Limit (dBuV) |           |
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Quasi-peak   | Average   |
|                                                  | 0.15-0.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 66 to 56*    | 56 to 46* |
|                                                  | 0.5-5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 56           | 46        |
|                                                  | 5-30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 60           | 50        |
| * Decreases with the logarithm of the frequency. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |              |           |
| Test Setup:                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |              |           |
| Test Procedure:                                  | <ol style="list-style-type: none"> <li>1) The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10-2020 on conducted measurement.</li> </ol> |              |           |
| Test Mode:                                       | All modes were tested, only the worse case lowest channel of 1Mbps for 802.11b was recorded in the report.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |              |           |

Test Results: Pass

## Measurement Data

Live line:

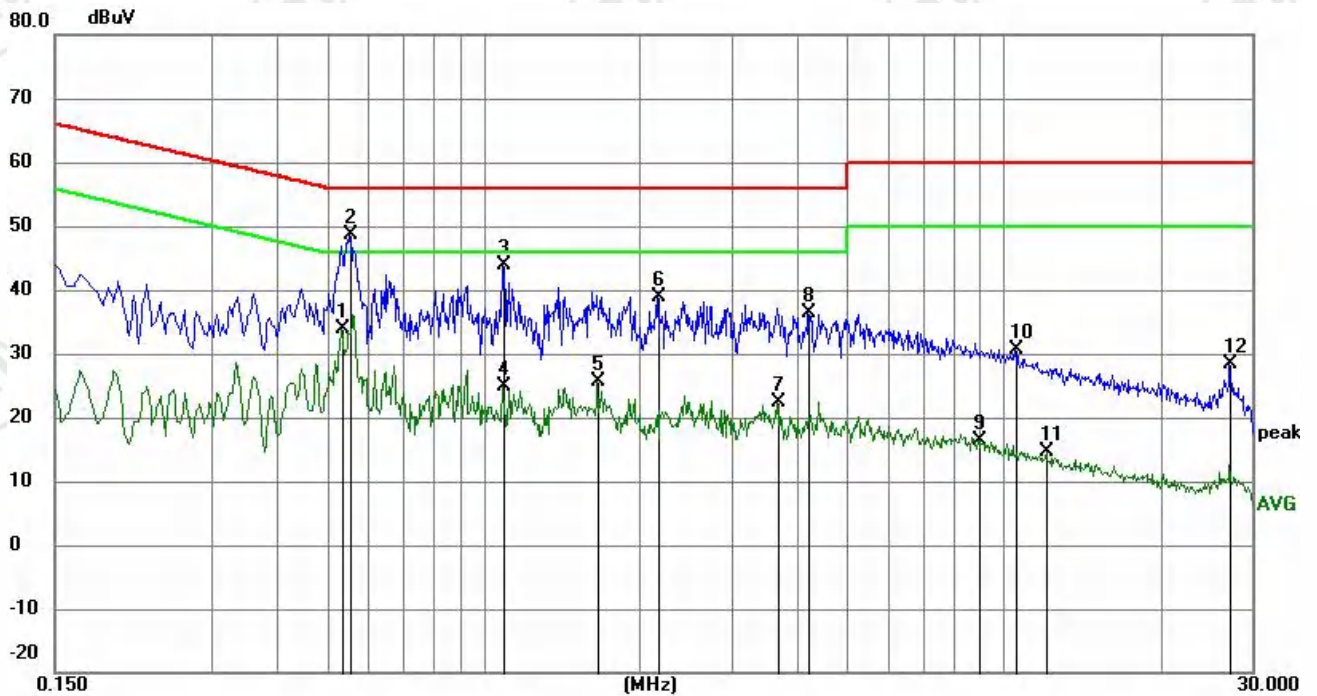

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.5325       | 23.71                    | 10.09                   | 33.80                    | 46.00         | -12.20       | AVG      |         |
| 2   | *   | 0.5550       | 38.52                    | 10.09                   | 48.61                    | 56.00         | -7.39        | QP       |         |
| 3   |     | 1.0905       | 33.69                    | 10.18                   | 43.87                    | 56.00         | -12.13       | QP       |         |
| 4   |     | 1.0905       | 14.70                    | 10.18                   | 24.88                    | 46.00         | -21.12       | AVG      |         |
| 5   |     | 1.6575       | 15.34                    | 10.17                   | 25.51                    | 46.00         | -20.49       | AVG      |         |
| 6   |     | 2.1614       | 28.77                    | 10.16                   | 38.93                    | 56.00         | -17.07       | QP       |         |
| 7   |     | 3.6735       | 12.38                    | 10.11                   | 22.49                    | 46.00         | -23.51       | AVG      |         |
| 8   |     | 4.2090       | 26.33                    | 10.09                   | 36.42                    | 56.00         | -19.58       | QP       |         |
| 9   |     | 9.0105       | 6.40                     | 9.98                    | 16.38                    | 50.00         | -33.62       | AVG      |         |
| 10  |     | 10.5225      | 20.80                    | 9.94                    | 30.74                    | 60.00         | -29.26       | QP       |         |
| 11  |     | 12.0705      | 4.74                     | 9.91                    | 14.65                    | 50.00         | -35.35       | AVG      |         |
| 12  |     | 27.1455      | 18.65                    | 9.81                    | 28.46                    | 60.00         | -31.54       | QP       |         |

Remark:


1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. Margin=Measurement-Limit.

4. Measurement=Reading Level+Correct Factor.

5. In the test results, an asterisk (\*) indicates Maximum Data, a cross (X) indicates over Limit.

6. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:  
80.0 dBuV

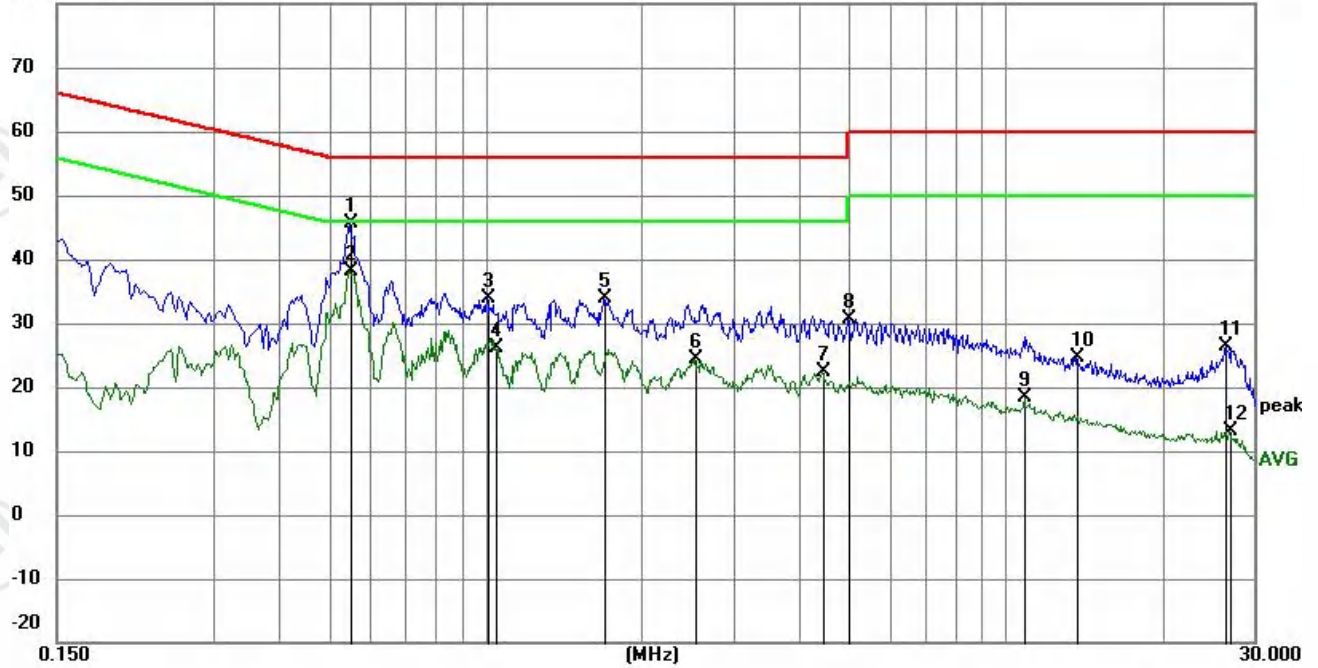


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.5505       | 35.47                    | 10.09                   | 45.56                    | 56.00         | -10.44       | QP       |         |
| 2   | *   | 0.5505       | 28.11                    | 10.09                   | 38.20                    | 46.00         | -7.80        | AVG      |         |
| 3   |     | 1.0095       | 23.64                    | 10.18                   | 33.82                    | 56.00         | -22.18       | QP       |         |
| 4   |     | 1.0455       | 16.04                    | 10.18                   | 26.22                    | 46.00         | -19.78       | AVG      |         |
| 5   |     | 1.6980       | 23.59                    | 10.17                   | 33.76                    | 56.00         | -22.24       | QP       |         |
| 6   |     | 2.5395       | 14.15                    | 10.15                   | 24.30                    | 46.00         | -21.70       | AVG      |         |
| 7   |     | 4.4475       | 12.25                    | 10.08                   | 22.33                    | 46.00         | -23.67       | AVG      |         |
| 8   |     | 5.0010       | 20.68                    | 10.06                   | 30.74                    | 60.00         | -29.26       | QP       |         |
| 9   |     | 10.8825      | 8.47                     | 9.93                    | 18.40                    | 50.00         | -31.60       | AVG      |         |
| 10  |     | 13.6230      | 14.72                    | 9.88                    | 24.60                    | 60.00         | -35.40       | QP       |         |
| 11  |     | 26.5200      | 16.56                    | 9.81                    | 26.37                    | 60.00         | -33.63       | QP       |         |
| 12  |     | 26.9385      | 3.40                     | 9.81                    | 13.21                    | 50.00         | -36.79       | AVG      |         |


Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. Margin = Measurement - Limit.
4. Measurement = Reading Level + Correct Factor.
5. In the test results, an asterisk (\*) indicates Maximum Data, a cross (X) indicates over Limit.
6. If the Peak value under Average limit, the Average value is not recorded in the report.


5.3 Maximum Conducted Output Power
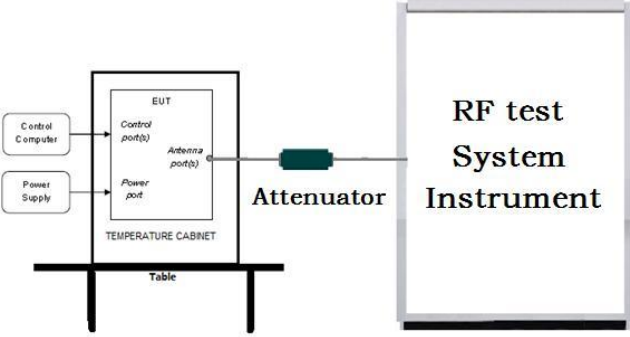
|                   |                                                                                                                                                                                                                                                                                         |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (b)(3)                                                                                                                                                                                                                                                   |
| Test Method:      | ANSI C63.10-2020                                                                                                                                                                                                                                                                        |
| Test Setup:       |                                                                                                                                                                                                       |
| Test Procedure:   | 1. PKPM1 Peak power meter measurement<br>The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector. |
| Limit:            | 30dBm                                                                                                                                                                                                                                                                                   |
| Test Mode:        | Refer to clause 3.3                                                                                                                                                                                                                                                                     |
| Test Results:     | Refer to Appendix A                                                                                                                                                                                                                                                                     |


## 5.4 DTS Bandwidth
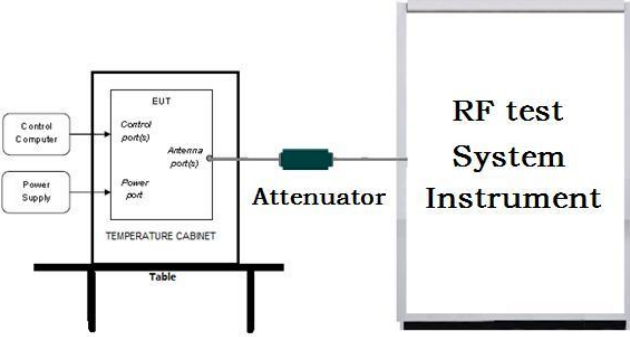
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (a)(2)                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Test Method:      | ANSI C63.10-2020                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Test Setup:       |  <p>Remark: Offset=Cable loss+ attenuation factor.</p>                                                                                                                                                                                                                                                                                                                                                                   |
| Test Procedure:   | <p>a) Set RBW = 100 kHz.</p> <p>b) Set the VBW <math>\geq [3 \times \text{RBW}]</math>.</p> <p>c) Detector = peak.</p> <p>d) Trace mode = max hold.</p> <p>e) Sweep = auto couple.</p> <p>f) Allow the trace to stabilize.</p> <p>g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.</p> |
| Limit:            | $\geq 500 \text{ kHz}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Test Mode:        | Refer to clause 3.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Test Results:     | Refer to Appendix A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

## 5.5 Maximum Power Spectral Density
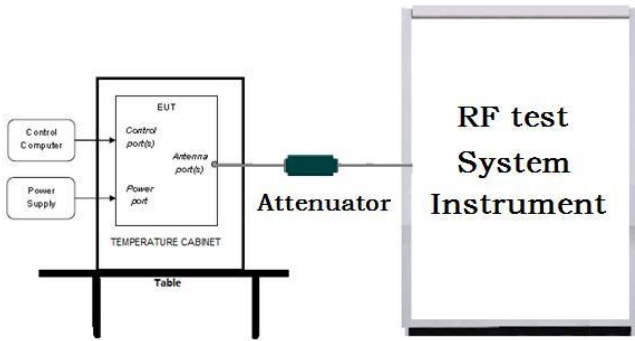
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (e)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Test Method:      | ANSI C63.10-2020                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Test Setup:       |  <p>Remark: Offset=Cable loss+ attenuation factor.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Test Procedure:   | <p>a) Set analyzer center frequency to DTS channel center frequency.</p> <p>b) Set the span to 1.5 times the DTS bandwidth.</p> <p>c) Set the RBW to <math>3 \text{ kHz} &lt; \text{RBW} &lt; 100 \text{ kHz}</math>.</p> <p>d) Set the VBW <math>&gt; [3 \times \text{RBW}]</math>.</p> <p>e) Detector = power averaging (rms) or sample detector (when rms not available).</p> <p>f) Ensure that the number of measurement points in the sweep <math>\geq [2 \times \text{span} / \text{RBW}]</math>.</p> <p>g) Sweep time = auto couple.</p> <p>h) Employ trace averaging (rms) mode over a minimum of 100 traces..</p> <p>i) Use the peak marker function to determine the maximum amplitude level.</p> <p>j) If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this might require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).</p> |
| Limit:            | $\leq 8.00 \text{ dBm}/3 \text{ kHz}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Test Mode:        | Refer to clause 3.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Test Results:     | Refer to Appendix A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## 5.6 Band Edge Measurements and Conducted Spurious Emission
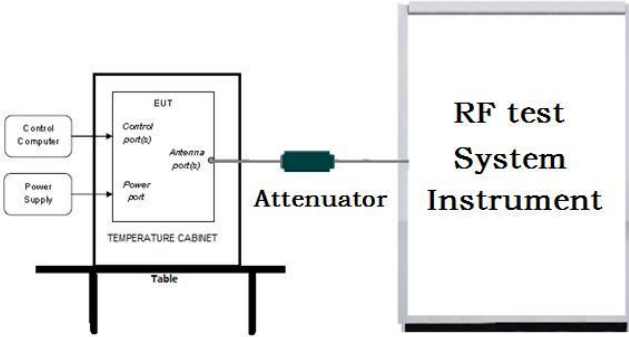
|                   |                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                      |
| Test Method:      | ANSI C63.10-2020                                                                                                                                                                                                                                                                                                                                                                        |
| Test Setup:       |  <p>Remark: Offset=Cable loss+ attenuation factor.</p>                                                                                                                                                                                                                                                |
| Test Procedure:   | <ul style="list-style-type: none"> <li>a) Set RBW = 100KHz.</li> <li>b) Set VBW = 300KHz.</li> <li>c) Sweep time = auto couple.</li> <li>d) Detector = peak.</li> <li>e) Trace mode = max hold.</li> <li>f) Allow trace to fully stabilize.</li> <li>g) Use peak marker function to determine the peak amplitude level.</li> </ul>                                                      |
| Limit:            | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test Mode:        | Refer to clause 3.3                                                                                                                                                                                                                                                                                                                                                                     |
| Test Results:     | Refer to Appendix A                                                                                                                                                                                                                                                                                                                                                                     |

## 5.7 Radiated Spurious Emission & Restricted bands

|                                                                                                                                                                                                                                                                             |                                                  |                                     |                   |            |                             |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|-------------------------------------|-------------------|------------|-----------------------------|
| Test Requirement:                                                                                                                                                                                                                                                           | 47 CFR Part 15C Section 15.209 and 15.205        |                                     |                   |            |                             |
| Test Method:                                                                                                                                                                                                                                                                | ANSI C63.10-2020                                 |                                     |                   |            |                             |
| Test Site:                                                                                                                                                                                                                                                                  | Measurement Distance: 3m (Semi-Anechoic Chamber) |                                     |                   |            |                             |
| Receiver Setup:                                                                                                                                                                                                                                                             | Frequency                                        | Detector                            | RBW               | VBW        | Remark                      |
|                                                                                                                                                                                                                                                                             | 0.009MHz-0.090MHz                                | Peak                                | 10kHz             | 30kHz      | Peak                        |
|                                                                                                                                                                                                                                                                             | 0.009MHz-0.090MHz                                | Average                             | 10kHz             | 30kHz      | Average                     |
|                                                                                                                                                                                                                                                                             | 0.090MHz-0.110MHz                                | Quasi-peak                          | 10kHz             | 30kHz      | Quasi-peak                  |
|                                                                                                                                                                                                                                                                             | 0.110MHz-0.490MHz                                | Peak                                | 10kHz             | 30kHz      | Peak                        |
|                                                                                                                                                                                                                                                                             | 0.110MHz-0.490MHz                                | Average                             | 10kHz             | 30kHz      | Average                     |
|                                                                                                                                                                                                                                                                             | 0.490MHz -30MHz                                  | Quasi-peak                          | 10kHz             | 30kHz      | Quasi-peak                  |
|                                                                                                                                                                                                                                                                             | 30MHz-1GHz                                       | Quasi-peak                          | 100 kHz           | 300kHz     | Quasi-peak                  |
|                                                                                                                                                                                                                                                                             | Above 1GHz                                       | Peak                                | 1MHz              | 3MHz       | Peak                        |
|                                                                                                                                                                                                                                                                             |                                                  | Peak                                | 1MHz              | 10kHz      | Average                     |
| Limit:                                                                                                                                                                                                                                                                      | Frequency                                        | Field strength<br>(microvolt/meter) | Limit<br>(dBuV/m) | Remark     | Measurement<br>distance (m) |
|                                                                                                                                                                                                                                                                             | 0.009MHz-0.490MHz                                | 2400/F(kHz)                         | -                 | -          | 300                         |
|                                                                                                                                                                                                                                                                             | 0.490MHz-1.705MHz                                | 24000/F(kHz)                        | -                 | -          | 30                          |
|                                                                                                                                                                                                                                                                             | 1.705MHz-30MHz                                   | 30                                  | -                 | -          | 30                          |
|                                                                                                                                                                                                                                                                             | 30MHz-88MHz                                      | 100                                 | 40.0              | Quasi-peak | 3                           |
|                                                                                                                                                                                                                                                                             | 88MHz-216MHz                                     | 150                                 | 43.5              | Quasi-peak | 3                           |
|                                                                                                                                                                                                                                                                             | 216MHz-960MHz                                    | 200                                 | 46.0              | Quasi-peak | 3                           |
|                                                                                                                                                                                                                                                                             | 960MHz-1GHz                                      | 500                                 | 54.0              | Quasi-peak | 3                           |
|                                                                                                                                                                                                                                                                             | Above 1GHz                                       | 500                                 | 54.0              | Average    | 3                           |
| Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device. |                                                  |                                     |                   |            |                             |

## Test Setup:

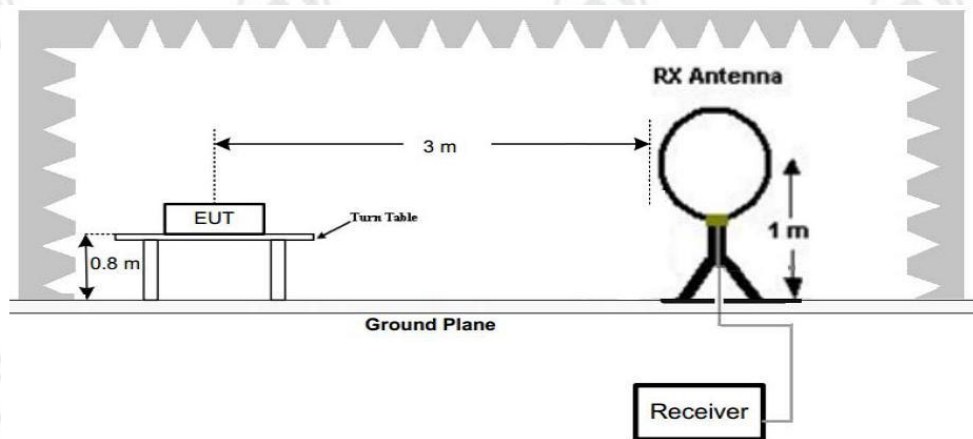


Figure 1. Below 30MHz

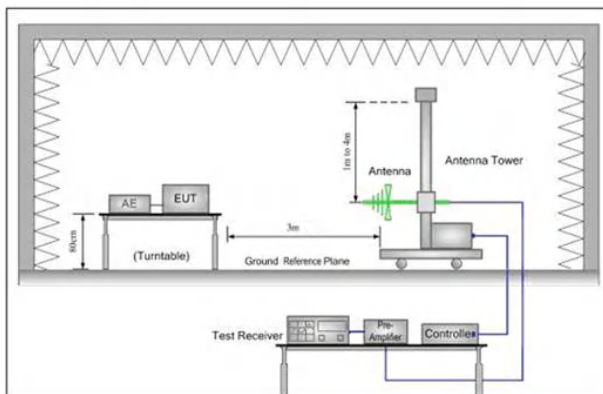


Figure 2. 30MHz to 1GHz

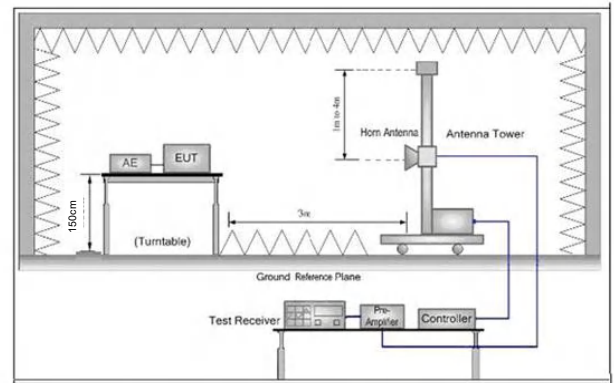


Figure 3. Above 1 GHz

## Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
  - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
  - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both

|               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|               | <p>horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz)</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p> |
| Test Mode:    | Refer to clause 3.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Test Results: | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |


## Radiated Spurious Emission below 1GHz:

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes, only the worst case lowest channel of 1Mbps for 802.11b was recorded in the report.

### Test Graph

Horizontal:

72.0 dBuV/m

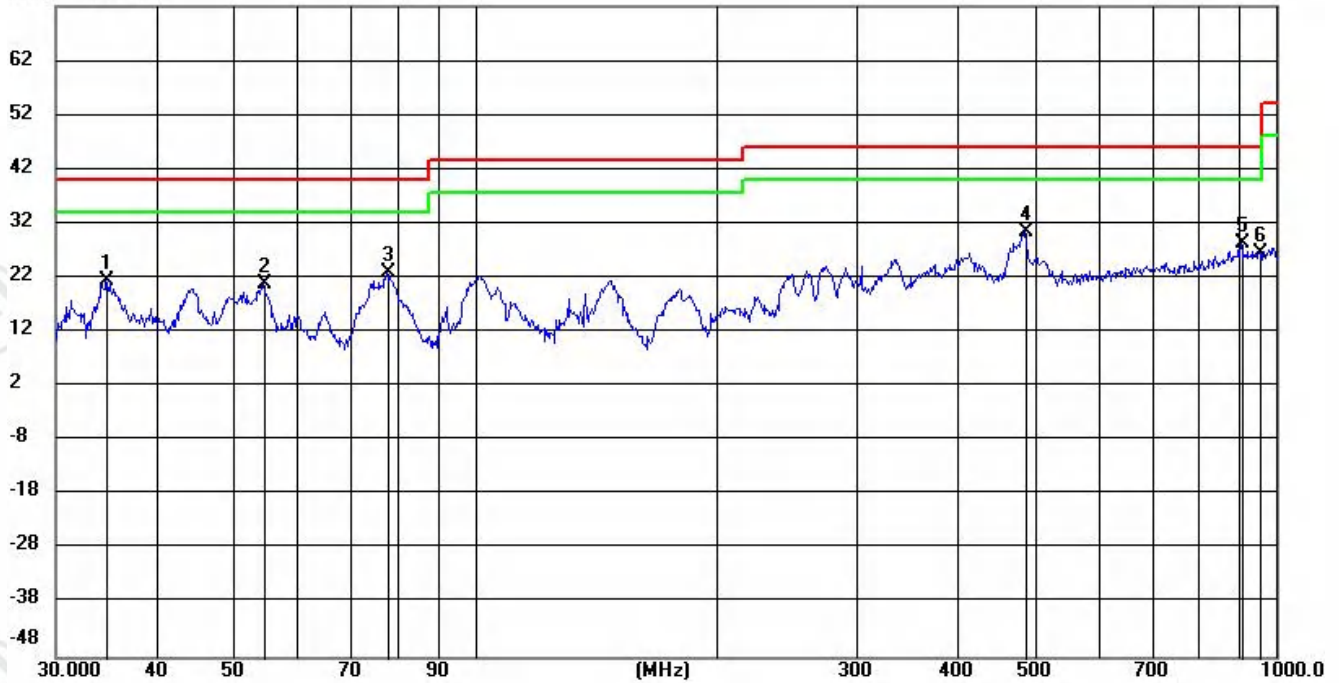

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin | Antenna Height | Table Degree |        |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|--------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector       | cm           | degree |
| 1   |     | 34.7297  | 8.50          | 12.82          | 21.32       | 40.00  | -18.68 | QP             | 100          | 353    |
| 2   |     | 54.5949  | 6.71          | 14.13          | 20.84       | 40.00  | -19.16 | QP             | 100          | 141    |
| 3   |     | 77.8106  | 12.84         | 10.03          | 22.87       | 40.00  | -17.13 | QP             | 100          | 0      |
| 4   | *   | 485.8647 | 9.98          | 20.36          | 30.34       | 46.00  | -15.66 | QP             | 100          | 337    |
| 5   |     | 905.0531 | 1.39          | 27.00          | 28.39       | 46.00  | -17.61 | QP             | 100          | 328    |
| 6   |     | 953.0958 | -0.67         | 27.24          | 26.57       | 46.00  | -19.43 | QP             | 100          | 175    |


Remark:

1. Margin=Measurement(Level)-Limit.

2. Measurement(Level)=Reading Level+Correct Factor.

3. In the test results, an asterisk (\*) indicates Maximum Data, a cross (X) indicates over Limit, an exclamation mark (!) indicates over -6dB margin Limit.

**Vertical:**

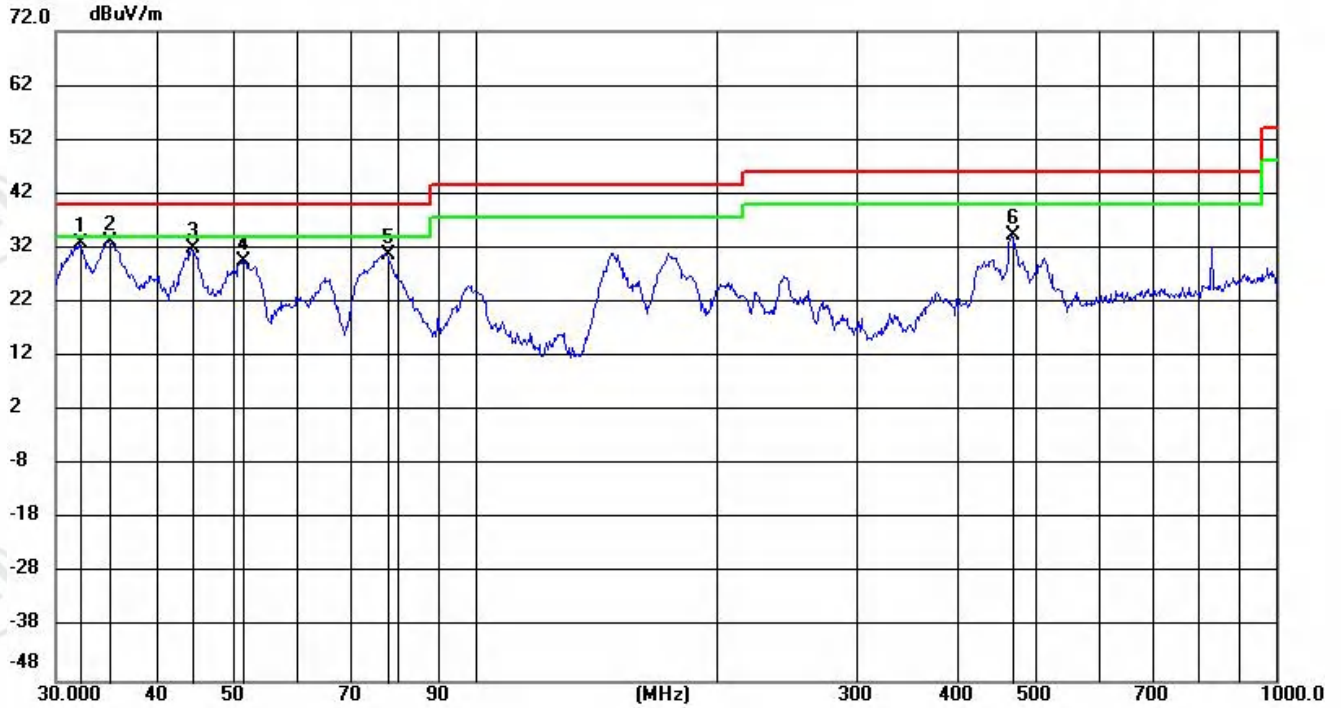

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Antenna<br>Height<br>cm | Table<br>Degree | Comment |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|--------------|----------|-------------------------|-----------------|---------|
| 1   |     | 32.0949      | 20.21                    | 12.63                     | 32.84                      | 40.00           | -7.16        | QP       | 100                     | 58              |         |
| 2   | *   | 34.9313      | 20.36                    | 12.85                     | 33.21                      | 40.00           | -6.79        | QP       | 100                     | 75              |         |
| 3   |     | 44.3840      | 18.00                    | 13.83                     | 31.83                      | 40.00           | -8.17        | QP       | 100                     | 32              |         |
| 4   |     | 51.4627      | 15.01                    | 14.48                     | 29.49                      | 40.00           | -10.51       | QP       | 100                     | 5               |         |
| 5   |     | 77.7835      | 20.80                    | 10.04                     | 30.84                      | 40.00           | -9.16        | QP       | 100                     | 145             |         |
| 6   |     | 468.0549     | 14.13                    | 20.27                     | 34.40                      | 46.00           | -11.60       | QP       | 100                     | 58              |         |


**Remark:**

1.  $\text{Margin} = \text{Measurement}(\text{Level}) - \text{Limit}$ .
2.  $\text{Measurement}(\text{Level}) = \text{Reading Level} + \text{Correct Factor}$ .
3. In the test results, an asterisk (\*) indicates Maximum Data, a cross (X) indicates over Limit, an exclamation mark (!) indicates over -6dB margin Limit.

Radiated Spurious Emission above 1GHz:

|           |                          |                |           |
|-----------|--------------------------|----------------|-----------|
| Test_Mode | 802.11 b<br>Transmitting | Test_Frequency | 2412MHz   |
| Remark:   | /                        | Test_Date      | 2026/3/23 |


Test Graph

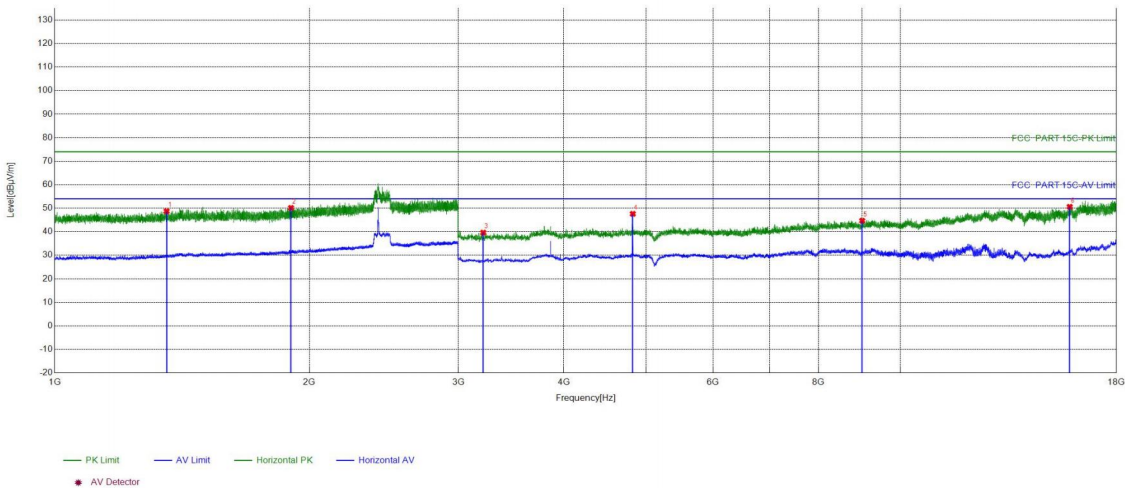

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1355.757    | 12.55       | 36.18          | 48.73          | 74.00          | 25.27       | PASS   | Horizon  | PK     |
| 2              | 1902.3268   | 14.65       | 35.49          | 50.14          | 74.00          | 23.86       | PASS   | Horizon  | PK     |
| 3              | 3211.0141   | -14.38      | 54.00          | 39.62          | 74.00          | 34.38       | PASS   | Horizon  | PK     |
| 4              | 4824.1216   | -8.55       | 56.17          | 47.62          | 74.00          | 26.38       | PASS   | Horizon  | PK     |
| 5              | 9009.4006   | 0.05        | 44.63          | 44.68          | 74.00          | 29.32       | PASS   | Horizon  | PK     |
| 6              | 15848.8566  | 9.76        | 40.85          | 50.61          | 74.00          | 23.39       | PASS   | Horizon  | PK     |

|           |                          |                |           |
|-----------|--------------------------|----------------|-----------|
| Test_Mode | 802.11 b<br>Transmitting | Test_Frequency | 2412MHz   |
| Remark:   | /                        | Test_Date      | 2026/3/23 |


Test Graph

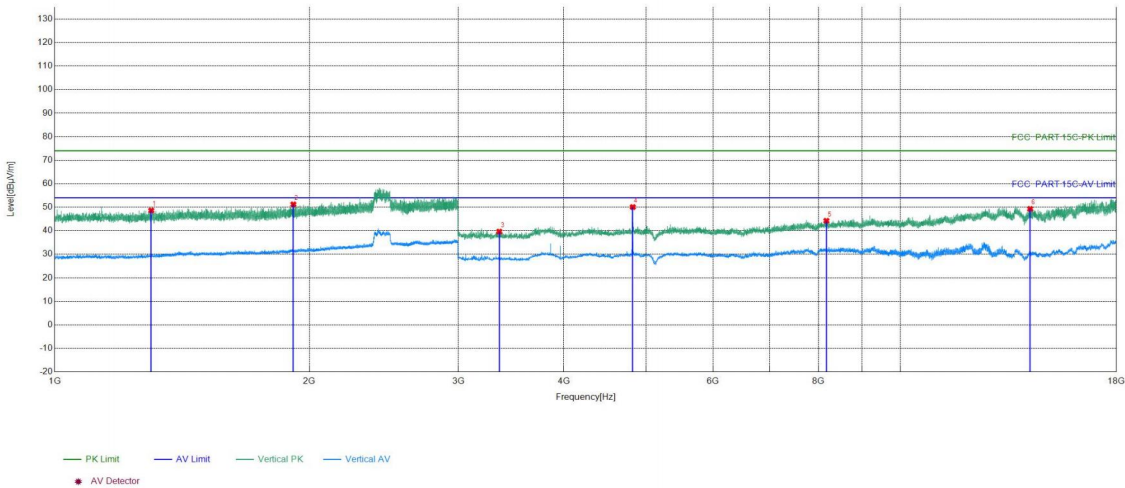

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1300.42     | 12.09       | 36.52          | 48.61          | 74.00          | 25.39       | PASS   | Vertical | PK     |
| 2              | 1914.5943   | 14.78       | 36.43          | 51.21          | 74.00          | 22.79       | PASS   | Vertical | PK     |
| 3              | 3354.0236   | -14.01      | 53.63          | 39.62          | 74.00          | 34.38       | PASS   | Vertical | PK     |
| 4              | 4824.1216   | -8.55       | 58.61          | 50.06          | 74.00          | 23.94       | PASS   | Vertical | PK     |
| 5              | 8172.3448   | -1.28       | 45.50          | 44.22          | 74.00          | 29.78       | PASS   | Vertical | PK     |
| 6              | 14231.7488  | 8.71        | 40.59          | 49.30          | 74.00          | 24.70       | PASS   | Vertical | PK     |

|           |                          |                |           |
|-----------|--------------------------|----------------|-----------|
| Test_Mode | 802.11 b<br>Transmitting | Test_Frequency | 2437MHz   |
| Remark:   | /                        | Test_Date      | 2026/3/23 |


Test Graph

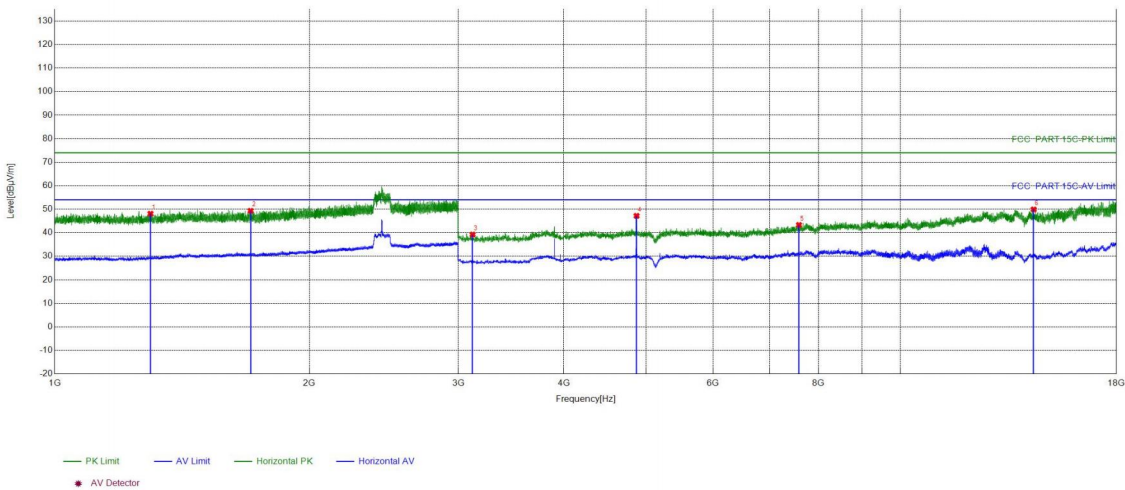

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1297.6198   | 12.07       | 36.02          | 48.09          | 74.00          | 25.91       | PASS   | Horizon  | PK     |
| 2              | 1704.1803   | 14.09       | 35.24          | 49.33          | 74.00          | 24.67       | PASS   | Horizon  | PK     |
| 3              | 3119.0079   | -14.68      | 53.91          | 39.23          | 74.00          | 34.77       | PASS   | Horizon  | PK     |
| 4              | 4874.1249   | -8.39       | 55.57          | 47.18          | 74.00          | 26.82       | PASS   | Horizon  | PK     |
| 5              | 7585.3057   | -2.15       | 45.45          | 43.30          | 74.00          | 30.70       | PASS   | Horizon  | PK     |
| 6              | 14367.7579  | 9.25        | 40.66          | 49.91          | 74.00          | 24.09       | PASS   | Horizon  | PK     |

|           |                          |                |           |
|-----------|--------------------------|----------------|-----------|
| Test_Mode | 802.11 b<br>Transmitting | Test_Frequency | 2437MHz   |
| Remark:   | /                        | Test_Date      | 2026/3/23 |


Test Graph

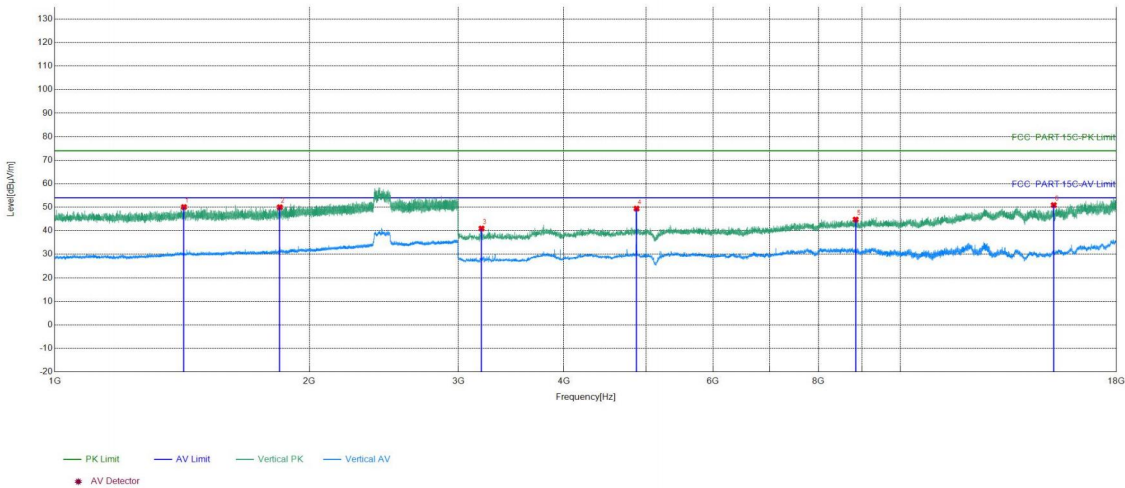

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1421.3614   | 12.85       | 37.23          | 50.08          | 74.00          | 23.92       | PASS   | Vertical | PK     |
| 2              | 1845.2564   | 14.39       | 35.61          | 50.00          | 74.00          | 24.00       | PASS   | Vertical | PK     |
| 3              | 3196.0131   | -14.47      | 55.42          | 40.95          | 74.00          | 33.05       | PASS   | Vertical | PK     |
| 4              | 4874.1249   | -8.39       | 57.81          | 49.42          | 74.00          | 24.58       | PASS   | Vertical | PK     |
| 5              | 8849.39     | 0.17        | 44.60          | 44.77          | 74.00          | 29.23       | PASS   | Vertical | PK     |
| 6              | 15175.8117  | 11.40       | 39.51          | 50.91          | 74.00          | 23.09       | PASS   | Vertical | PK     |

|           |                          |                |           |
|-----------|--------------------------|----------------|-----------|
| Test_Mode | 802.11 b<br>Transmitting | Test_Frequency | 2462MHz   |
| Remark:   | /                        | Test_Date      | 2026/3/23 |


Test Graph

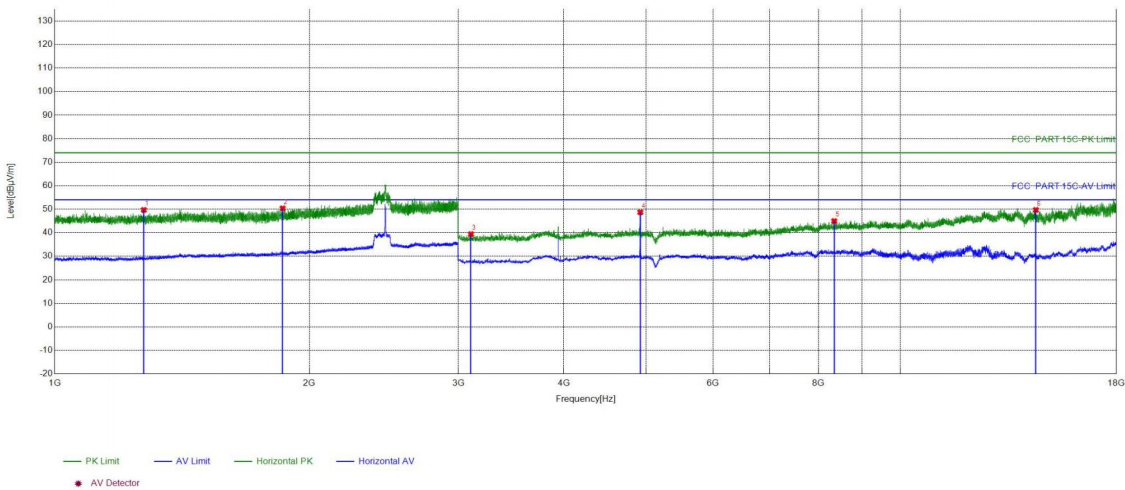

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1274.285    | 11.84       | 37.85          | 49.69          | 74.00          | 24.31       | PASS   | Horizon  | PK     |
| 2              | 1859.6573   | 14.50       | 35.87          | 50.37          | 74.00          | 23.63       | PASS   | Horizon  | PK     |
| 3              | 3105.007    | -14.70      | 54.12          | 39.42          | 74.00          | 34.58       | PASS   | Horizon  | PK     |
| 4              | 4924.1283   | -8.16       | 56.86          | 48.70          | 74.00          | 25.30       | PASS   | Horizon  | PK     |
| 5              | 8348.3566   | -1.10       | 46.08          | 44.98          | 74.00          | 29.02       | PASS   | Horizon  | PK     |
| 6              | 14454.7637  | 9.89        | 39.81          | 49.70          | 74.00          | 24.30       | PASS   | Horizon  | PK     |

|           |                          |                |           |
|-----------|--------------------------|----------------|-----------|
| Test_Mode | 802.11 b<br>Transmitting | Test_Frequency | 2462MHz   |
| Remark:   | /                        | Test_Date      | 2026/3/23 |


Test Graph

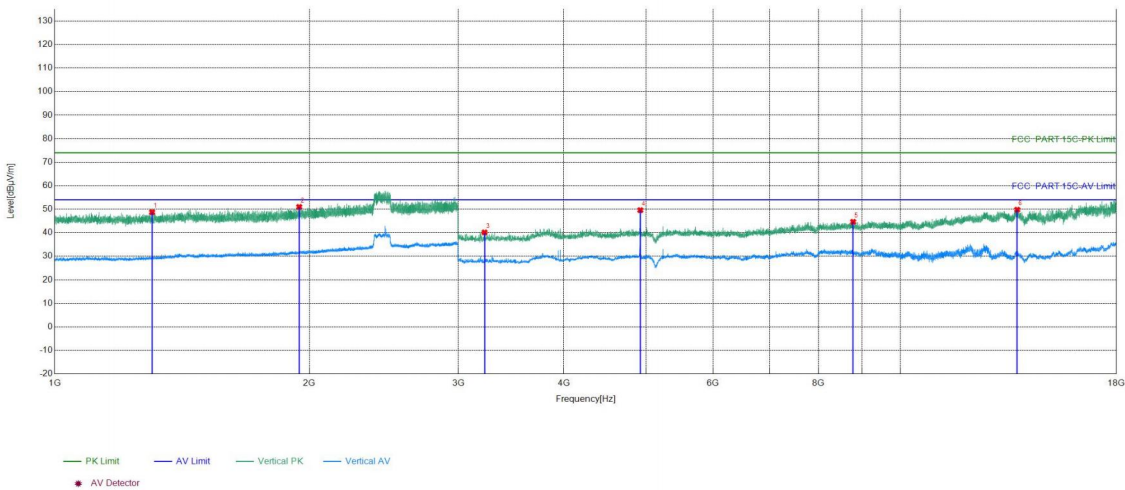

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1303.2202   | 12.12       | 36.62          | 48.74          | 74.00          | 25.26       | PASS   | Vertical | PK     |
| 2              | 1945.3964   | 14.81       | 36.18          | 50.99          | 74.00          | 23.01       | PASS   | Vertical | PK     |
| 3              | 3222.0148   | -14.31      | 54.46          | 40.15          | 74.00          | 33.85       | PASS   | Vertical | PK     |
| 4              | 4924.1283   | -8.16       | 57.76          | 49.60          | 74.00          | 24.40       | PASS   | Vertical | PK     |
| 5              | 8789.386    | -0.11       | 44.75          | 44.64          | 74.00          | 29.36       | PASS   | Vertical | PK     |
| 6              | 13740.716   | 7.18        | 42.63          | 49.81          | 74.00          | 24.19       | PASS   | Vertical | PK     |

|           |                          |                |           |
|-----------|--------------------------|----------------|-----------|
| Test_Mode | 802.11 g<br>Transmitting | Test_Frequency | 2412MHz   |
| Remark:   | /                        | Test_Date      | 2026/3/23 |


Test Graph

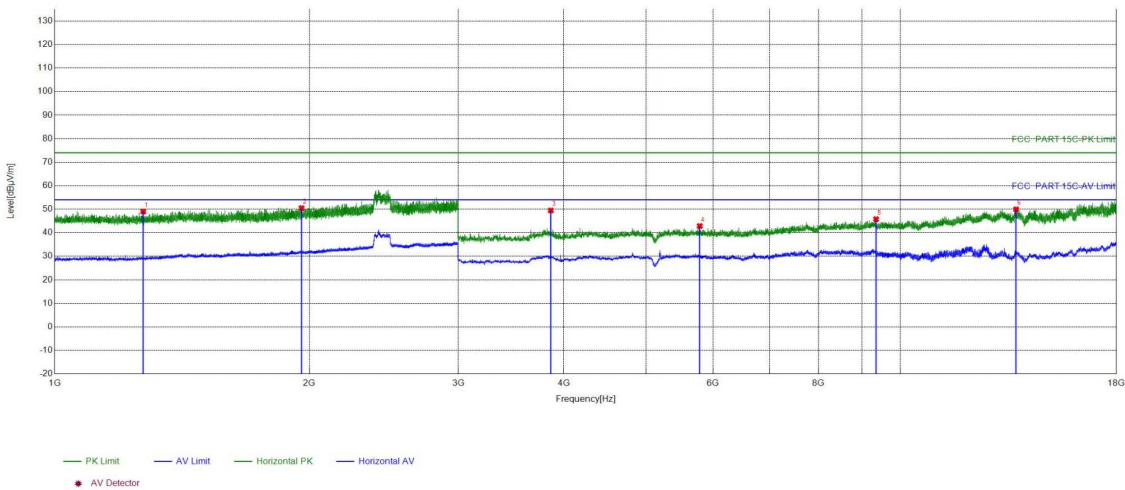

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1272.1515   | 11.88       | 37.14          | 49.02          | 74.00          | 24.98       | PASS   | Horizon  | PK     |
| 2              | 1957.7972   | 14.66       | 35.82          | 50.48          | 74.00          | 23.52       | PASS   | Horizon  | PK     |
| 3              | 3859.0573   | -12.06      | 61.55          | 49.49          | 74.00          | 24.51       | PASS   | Horizon  | PK     |
| 4              | 5789.1859   | -5.81       | 48.66          | 42.85          | 74.00          | 31.15       | PASS   | Horizon  | PK     |
| 5              | 9356.4238   | 1.06        | 44.72          | 45.78          | 74.00          | 28.22       | PASS   | Horizon  | PK     |
| 6              | 13698.7132  | 7.26        | 42.69          | 49.95          | 74.00          | 24.05       | PASS   | Horizon  | PK     |

|           |                          |                |           |
|-----------|--------------------------|----------------|-----------|
| Test_Mode | 802.11 g<br>Transmitting | Test_Frequency | 2412MHz   |
| Remark:   | /                        | Test_Date      | 2026/3/23 |


Test Graph

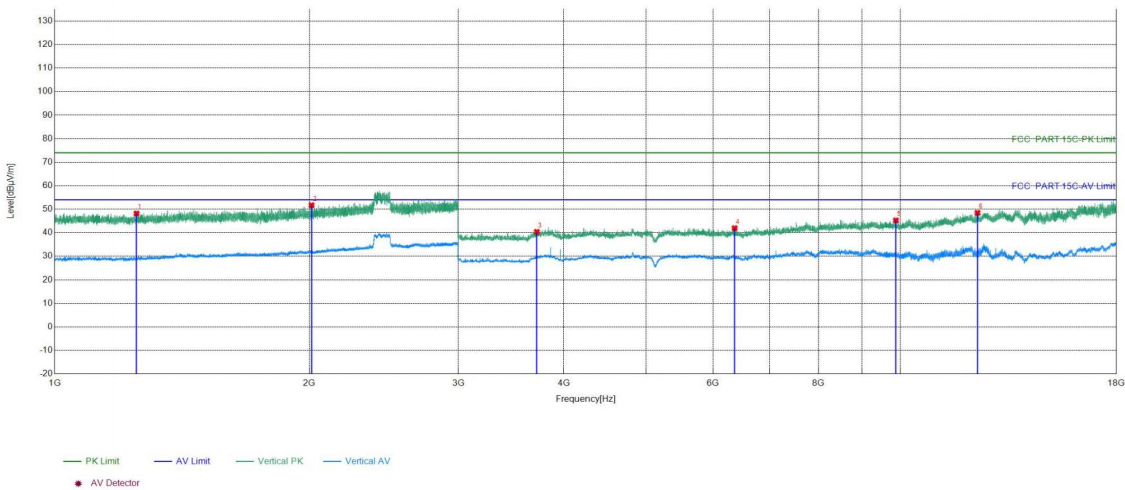

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1249.2166   | 11.63       | 36.56          | 48.19          | 74.00          | 25.81       | PASS   | Vertical | PK     |
| 2              | 2011.5341   | 14.68       | 37.01          | 51.69          | 74.00          | 22.31       | PASS   | Vertical | PK     |
| 3              | 3715.0477   | -12.81      | 53.19          | 40.38          | 74.00          | 33.62       | PASS   | Vertical | PK     |
| 4              | 6365.2243   | -4.36       | 46.30          | 41.94          | 74.00          | 32.06       | PASS   | Vertical | PK     |
| 5              | 9874.4583   | 1.42        | 43.86          | 45.28          | 74.00          | 28.72       | PASS   | Vertical | PK     |
| 6              | 12330.622   | 3.96        | 44.50          | 48.46          | 74.00          | 25.54       | PASS   | Vertical | PK     |

|           |                          |                |           |
|-----------|--------------------------|----------------|-----------|
| Test_Mode | 802.11 g<br>Transmitting | Test_Frequency | 2437MHz   |
| Remark:   | /                        | Test_Date      | 2026/3/23 |


Test Graph

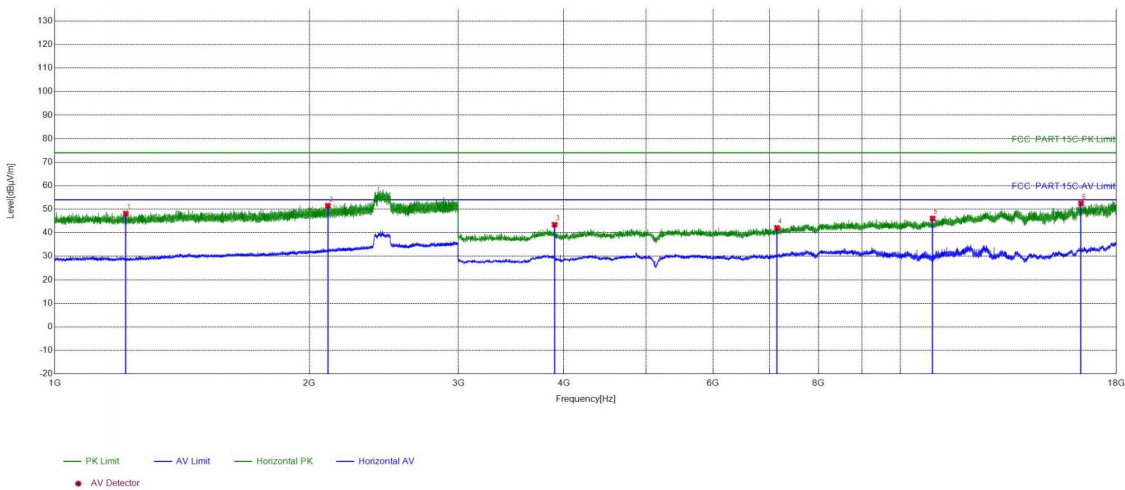

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1213.4809   | 11.59       | 36.57          | 48.16          | 74.00          | 25.84       | PASS   | Horizon  | PK     |
| 2              | 2103.1402   | 15.09       | 36.40          | 51.49          | 74.00          | 22.51       | PASS   | Horizon  | PK     |
| 3              | 3899.0599   | -11.97      | 55.39          | 43.42          | 74.00          | 30.58       | PASS   | Horizon  | PK     |
| 4              | 7144.2763   | -3.16       | 45.21          | 42.05          | 74.00          | 31.95       | PASS   | Horizon  | PK     |
| 5              | 10913.5276  | 2.20        | 43.89          | 46.09          | 74.00          | 27.91       | PASS   | Horizon  | PK     |
| 6              | 16346.8898  | 11.54       | 41.00          | 52.54          | 74.00          | 21.46       | PASS   | Horizon  | PK     |

|           |                          |                |           |
|-----------|--------------------------|----------------|-----------|
| Test_Mode | 802.11 g<br>Transmitting | Test_Frequency | 2437MHz   |
| Remark:   | /                        | Test_Date      | 2026/3/23 |


Test Graph

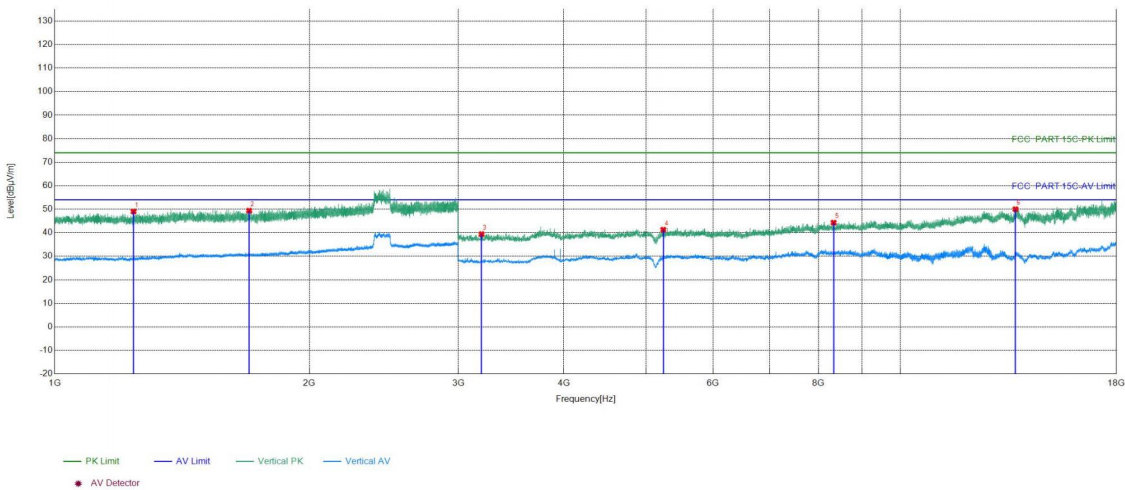

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1239.0826   | 11.57       | 37.46          | 49.03          | 74.00          | 24.97       | PASS   | Vertical | PK     |
| 2              | 1697.5132   | 14.06       | 35.34          | 49.40          | 74.00          | 24.60       | PASS   | Vertical | PK     |
| 3              | 3196.0131   | -14.47      | 53.88          | 39.41          | 74.00          | 34.59       | PASS   | Vertical | PK     |
| 4              | 5242.1495   | -7.50       | 48.80          | 41.30          | 74.00          | 32.70       | PASS   | Vertical | PK     |
| 5              | 8334.3556   | -1.08       | 45.37          | 44.29          | 74.00          | 29.71       | PASS   | Vertical | PK     |
| 6              | 13674.7116  | 7.36        | 42.64          | 50.00          | 74.00          | 24.00       | PASS   | Vertical | PK     |

|           |                          |                |           |
|-----------|--------------------------|----------------|-----------|
| Test_Mode | 802.11 g<br>Transmitting | Test_Frequency | 2462MHz   |
| Remark:   | /                        | Test_Date      | 2026/3/23 |


Test Graph

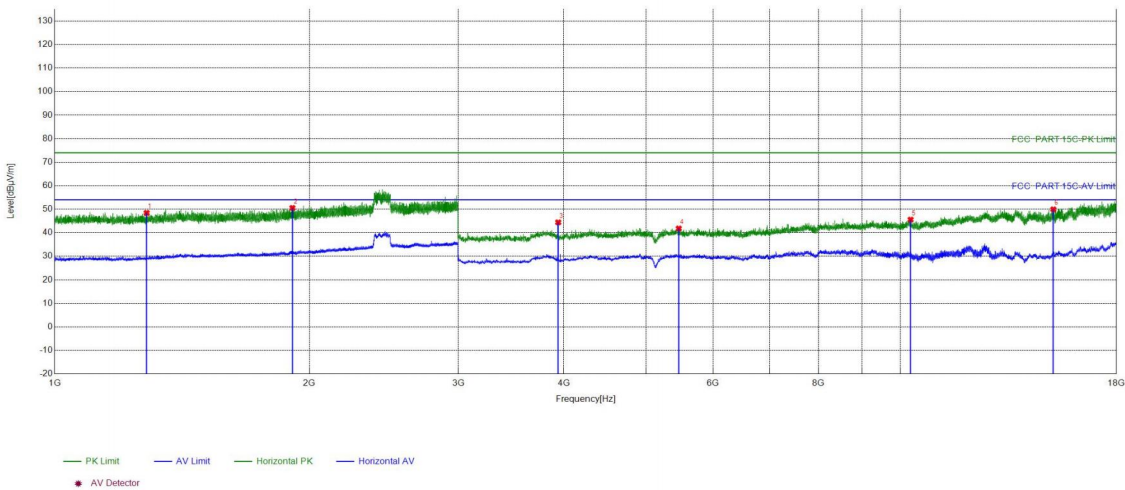

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1284.0189   | 11.85       | 36.60          | 48.45          | 74.00          | 25.55       | PASS   | Horizon  | PK     |
| 2              | 1909.794    | 14.81       | 35.73          | 50.54          | 74.00          | 23.46       | PASS   | Horizon  | PK     |
| 3              | 3938.0625   | -11.94      | 56.37          | 44.43          | 74.00          | 29.57       | PASS   | Horizon  | PK     |
| 4              | 5467.1645   | -6.46       | 48.27          | 41.81          | 74.00          | 32.19       | PASS   | Horizon  | PK     |
| 5              | 10278.4852  | 1.93        | 43.64          | 45.57          | 74.00          | 28.43       | PASS   | Horizon  | PK     |
| 6              | 15158.8106  | 11.21       | 38.75          | 49.96          | 74.00          | 24.04       | PASS   | Horizon  | PK     |

|           |                          |                |           |
|-----------|--------------------------|----------------|-----------|
| Test_Mode | 802.11 g<br>Transmitting | Test_Frequency | 2462MHz   |
| Remark:   | /                        | Test_Date      | 2026/3/23 |


Test Graph

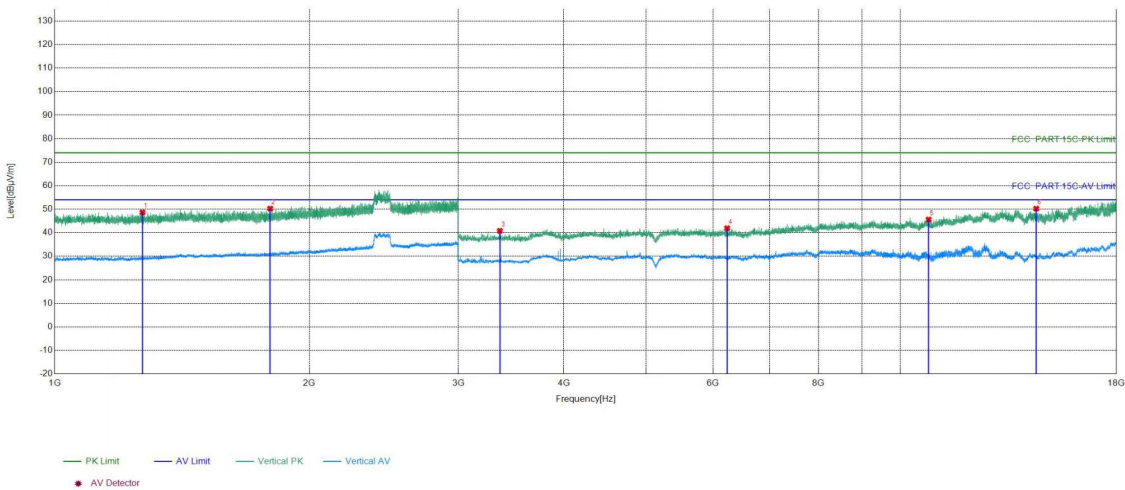

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1269.4846   | 11.91       | 36.73          | 48.64          | 74.00          | 25.36       | PASS   | Vertical | PK     |
| 2              | 1797.5198   | 14.19       | 36.08          | 50.27          | 74.00          | 23.73       | PASS   | Vertical | PK     |
| 3              | 3359.0239   | -14.00      | 54.80          | 40.80          | 74.00          | 33.20       | PASS   | Vertical | PK     |
| 4              | 6237.2158   | -4.74       | 46.64          | 41.90          | 74.00          | 32.10       | PASS   | Vertical | PK     |
| 5              | 10795.5197  | 1.93        | 43.68          | 45.61          | 74.00          | 28.39       | PASS   | Vertical | PK     |
| 6              | 14472.7649  | 9.60        | 40.63          | 50.23          | 74.00          | 23.77       | PASS   | Vertical | PK     |

|           |                                |                |           |
|-----------|--------------------------------|----------------|-----------|
| Test_Mode | 802.11 n(HT20)<br>Transmitting | Test_Frequency | 2412MHz   |
| Remark:   | /                              | Test_Date      | 2026/3/23 |


Test Graph

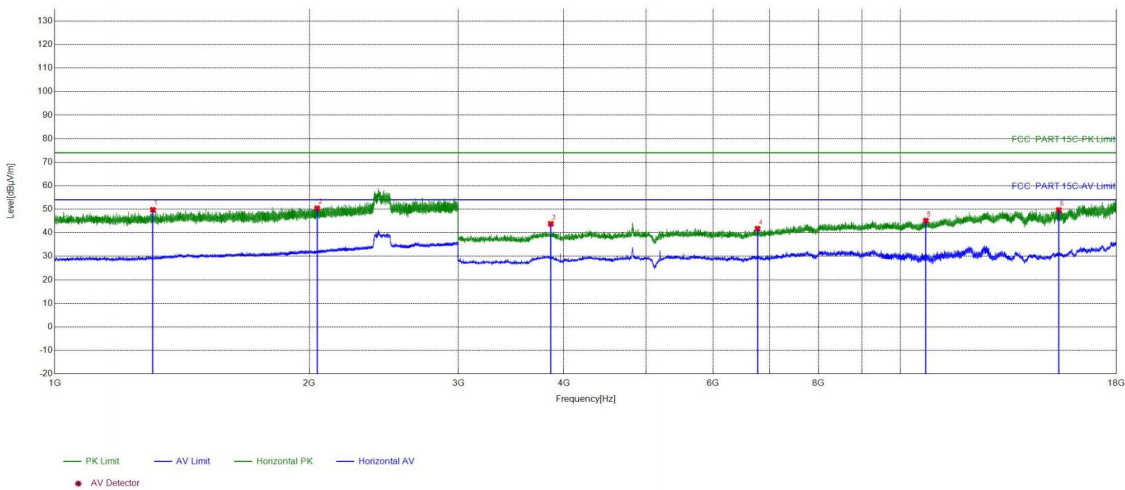

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1306.2871   | 12.14       | 37.62          | 49.76          | 74.00          | 24.24       | PASS   | Horizon  | PK     |
| 2              | 2043.1362   | 14.76       | 35.64          | 50.40          | 74.00          | 23.60       | PASS   | Horizon  | PK     |
| 3              | 3859.0573   | -12.06      | 55.87          | 43.81          | 74.00          | 30.19       | PASS   | Horizon  | PK     |
| 4              | 6775.2517   | -3.46       | 45.21          | 41.75          | 74.00          | 32.25       | PASS   | Horizon  | PK     |
| 5              | 10714.5143  | 2.43        | 42.73          | 45.16          | 74.00          | 28.84       | PASS   | Horizon  | PK     |
| 6              | 15386.8258  | 10.94       | 38.74          | 49.68          | 74.00          | 24.32       | PASS   | Horizon  | PK     |

|           |                                |                |           |
|-----------|--------------------------------|----------------|-----------|
| Test_Mode | 802.11 n(HT20)<br>Transmitting | Test_Frequency | 2412MHz   |
| Remark:   | /                              | Test_Date      | 2026/3/23 |


Test Graph

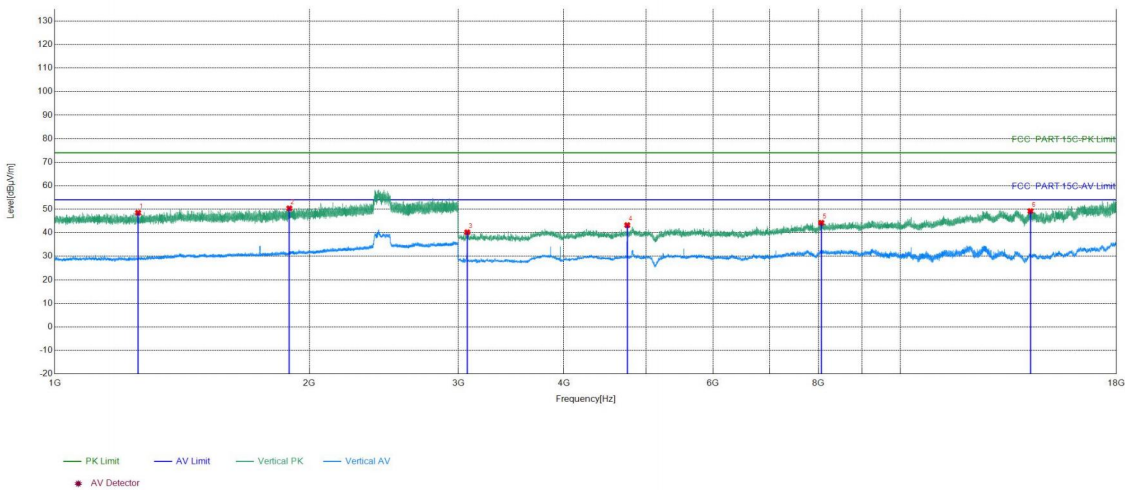

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1254.5503   | 11.75       | 36.74          | 48.49          | 74.00          | 25.51       | PASS   | Vertical | PK     |
| 2              | 1893.6596   | 14.44       | 35.92          | 50.36          | 74.00          | 23.64       | PASS   | Vertical | PK     |
| 3              | 3074.0049   | -14.55      | 54.74          | 40.19          | 74.00          | 33.81       | PASS   | Vertical | PK     |
| 4              | 4752.1168   | -8.64       | 51.86          | 43.22          | 74.00          | 30.78       | PASS   | Vertical | PK     |
| 5              | 8060.3374   | -1.00       | 45.22          | 44.22          | 74.00          | 29.78       | PASS   | Vertical | PK     |
| 6              | 14243.7496  | 8.85        | 40.36          | 49.21          | 74.00          | 24.79       | PASS   | Vertical | PK     |

|           |                                |                |           |
|-----------|--------------------------------|----------------|-----------|
| Test_Mode | 802.11 n(HT20)<br>Transmitting | Test_Frequency | 2437MHz   |
| Remark:   | /                              | Test_Date      | 2026/3/23 |


Test Graph

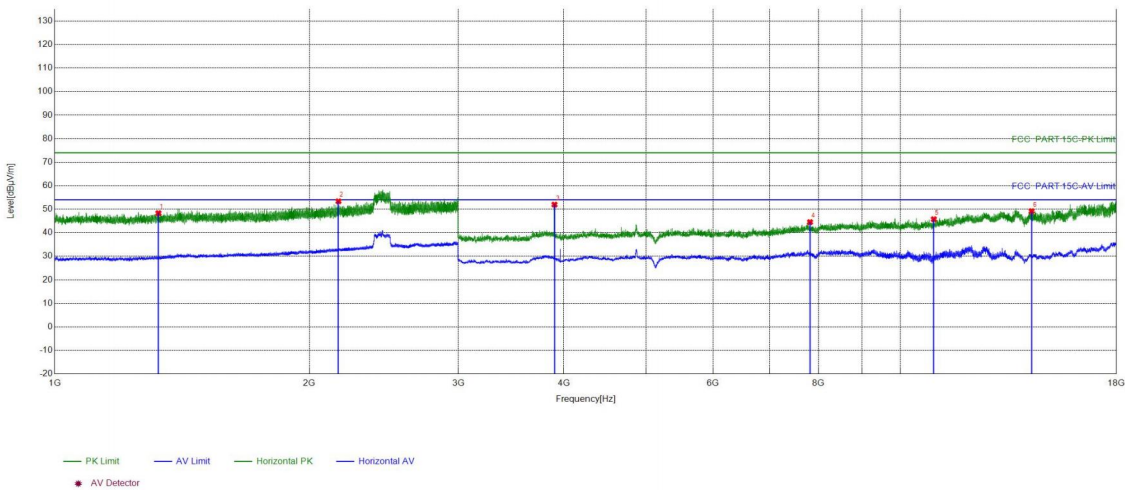

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1326.0217   | 12.27       | 36.07          | 48.34          | 74.00          | 25.66       | PASS   | Horizon  | PK     |
| 2              | 2164.611    | 15.29       | 38.09          | 53.38          | 74.00          | 20.62       | PASS   | Horizon  | PK     |
| 3              | 3898.0599   | -11.97      | 63.93          | 51.96          | 74.00          | 22.04       | PASS   | Horizon  | PK     |
| 4              | 7816.3211   | -1.93       | 46.45          | 44.52          | 74.00          | 29.48       | PASS   | Horizon  | PK     |
| 5              | 10948.5299  | 2.09        | 43.67          | 45.76          | 74.00          | 28.24       | PASS   | Horizon  | PK     |
| 6              | 14288.7526  | 8.63        | 40.55          | 49.18          | 74.00          | 24.82       | PASS   | Horizon  | PK     |

|           |                                |                |           |
|-----------|--------------------------------|----------------|-----------|
| Test_Mode | 802.11 n(HT20)<br>Transmitting | Test_Frequency | 2437MHz   |
| Remark:   | /                              | Test_Date      | 2026/3/23 |


Test Graph

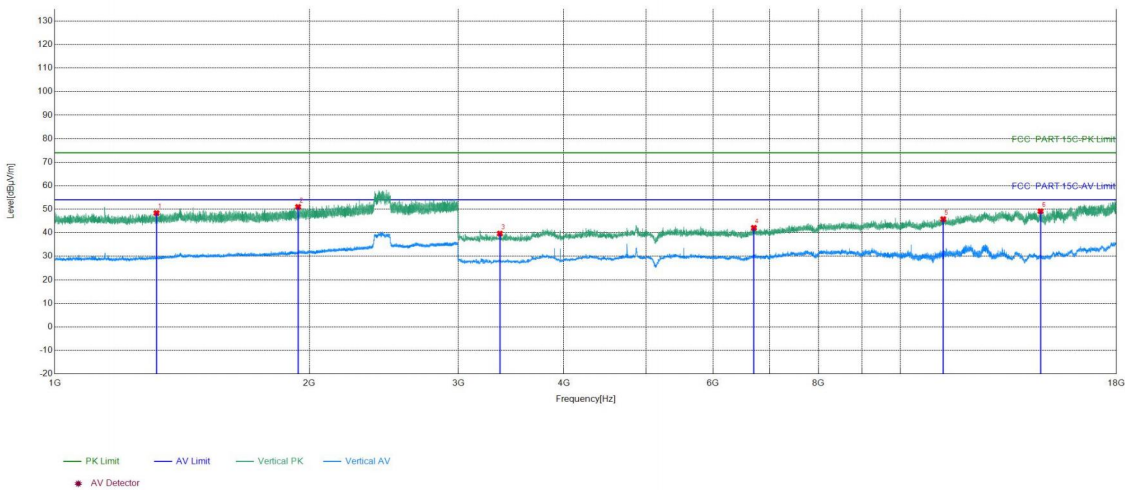

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1319.0879   | 12.28       | 36.09          | 48.37          | 74.00          | 25.63       | PASS   | Vertical | PK     |
| 2              | 1939.396    | 14.78       | 36.22          | 51.00          | 74.00          | 23.00       | PASS   | Vertical | PK     |
| 3              | 3359.0239   | -14.00      | 53.65          | 39.65          | 74.00          | 34.35       | PASS   | Vertical | PK     |
| 4              | 6708.2472   | -3.34       | 45.41          | 42.07          | 74.00          | 31.93       | PASS   | Vertical | PK     |
| 5              | 11232.5488  | 2.33        | 43.44          | 45.77          | 74.00          | 28.23       | PASS   | Vertical | PK     |
| 6              | 14637.7759  | 10.36       | 38.78          | 49.14          | 74.00          | 24.86       | PASS   | Vertical | PK     |

|           |                                |                |           |
|-----------|--------------------------------|----------------|-----------|
| Test_Mode | 802.11 n(HT20)<br>Transmitting | Test_Frequency | 2462MHz   |
| Remark:   | /                              | Test_Date      | 2026/3/23 |


Test Graph

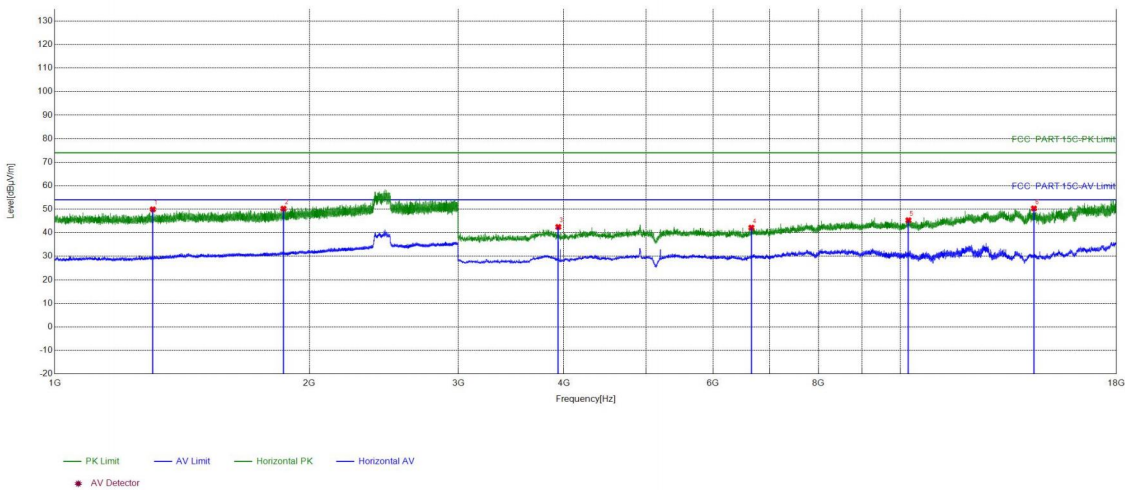

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1306.0204   | 12.14       | 37.81          | 49.95          | 74.00          | 24.05       | PASS   | Horizon  | PK     |
| 2              | 1864.0576   | 14.51       | 35.72          | 50.23          | 74.00          | 23.77       | PASS   | Horizon  | PK     |
| 3              | 3939.0626   | -11.93      | 54.40          | 42.47          | 74.00          | 31.53       | PASS   | Horizon  | PK     |
| 4              | 6663.2442   | -3.80       | 45.97          | 42.17          | 74.00          | 31.83       | PASS   | Horizon  | PK     |
| 5              | 10217.4812  | 1.69        | 43.64          | 45.33          | 74.00          | 28.67       | PASS   | Horizon  | PK     |
| 6              | 14379.7587  | 9.41        | 40.93          | 50.34          | 74.00          | 23.66       | PASS   | Horizon  | PK     |

|           |                                |                |           |
|-----------|--------------------------------|----------------|-----------|
| Test_Mode | 802.11 n(HT20)<br>Transmitting | Test_Frequency | 2462MHz   |
| Remark:   | /                              | Test_Date      | 2026/3/23 |


Test Graph

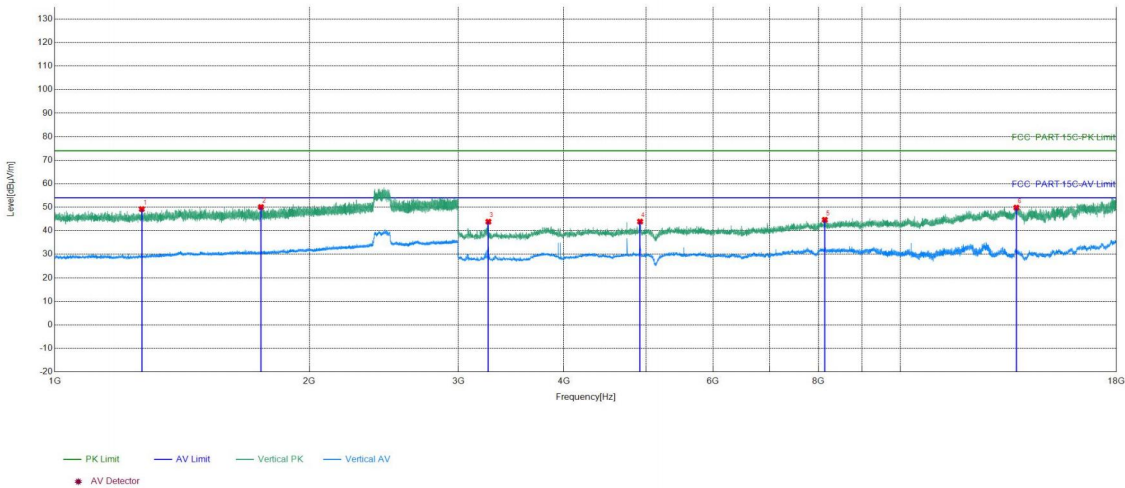

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1267.2178   | 11.91       | 37.29          | 49.20          | 74.00          | 24.80       | PASS   | Vertical | PK     |
| 2              | 1752.8502   | 14.11       | 35.96          | 50.07          | 74.00          | 23.93       | PASS   | Vertical | PK     |
| 3              | 3256.0171   | -14.10      | 57.95          | 43.85          | 74.00          | 30.15       | PASS   | Vertical | PK     |
| 4              | 4921.1281   | -8.18       | 52.08          | 43.90          | 74.00          | 30.10       | PASS   | Vertical | PK     |
| 5              | 8137.3425   | -1.17       | 45.82          | 44.65          | 74.00          | 29.35       | PASS   | Vertical | PK     |
| 6              | 13709.714   | 7.24        | 42.60          | 49.84          | 74.00          | 24.16       | PASS   | Vertical | PK     |

|           |                                |                |           |
|-----------|--------------------------------|----------------|-----------|
| Test_Mode | 802.11 n(HT40)<br>Transmitting | Test_Frequency | 2422MHz   |
| Remark:   | /                              | Test_Date      | 2026/3/23 |


Test Graph

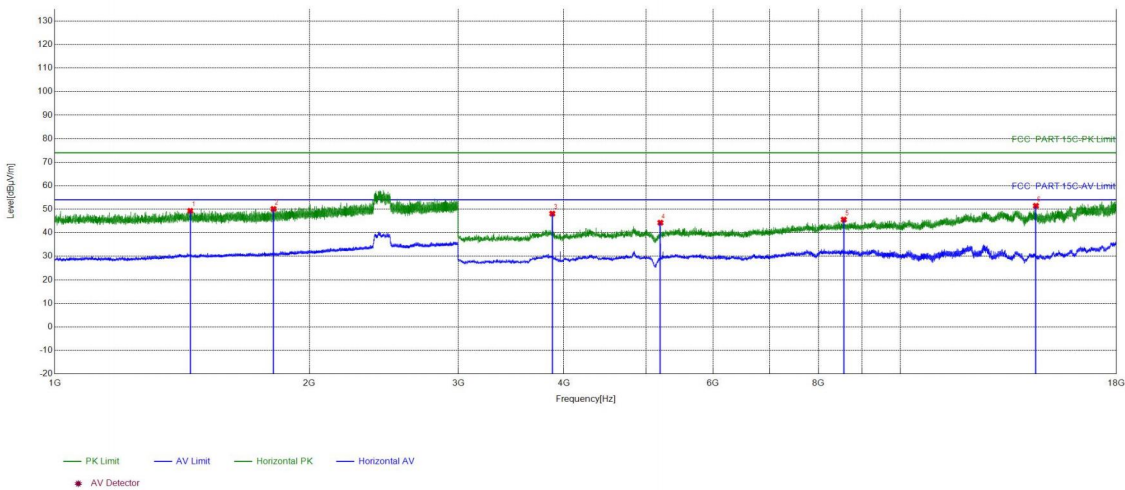

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1446.0297   | 13.12       | 36.20          | 49.32          | 74.00          | 24.68       | PASS   | Horizon  | PK     |
| 2              | 1813.9209   | 14.31       | 35.81          | 50.12          | 74.00          | 23.88       | PASS   | Horizon  | PK     |
| 3              | 3875.0583   | -12.02      | 60.15          | 48.13          | 74.00          | 25.87       | PASS   | Horizon  | PK     |
| 4              | 5201.1467   | -7.75       | 52.02          | 44.27          | 74.00          | 29.73       | PASS   | Horizon  | PK     |
| 5              | 8569.3713   | -0.48       | 46.06          | 45.58          | 74.00          | 28.42       | PASS   | Horizon  | PK     |
| 6              | 14457.7639  | 9.84        | 41.60          | 51.44          | 74.00          | 22.56       | PASS   | Horizon  | PK     |

|           |                                |                |           |
|-----------|--------------------------------|----------------|-----------|
| Test_Mode | 802.11 n(HT40)<br>Transmitting | Test_Frequency | 2422MHz   |
| Remark:   | /                              | Test_Date      | 2026/3/23 |


Test Graph

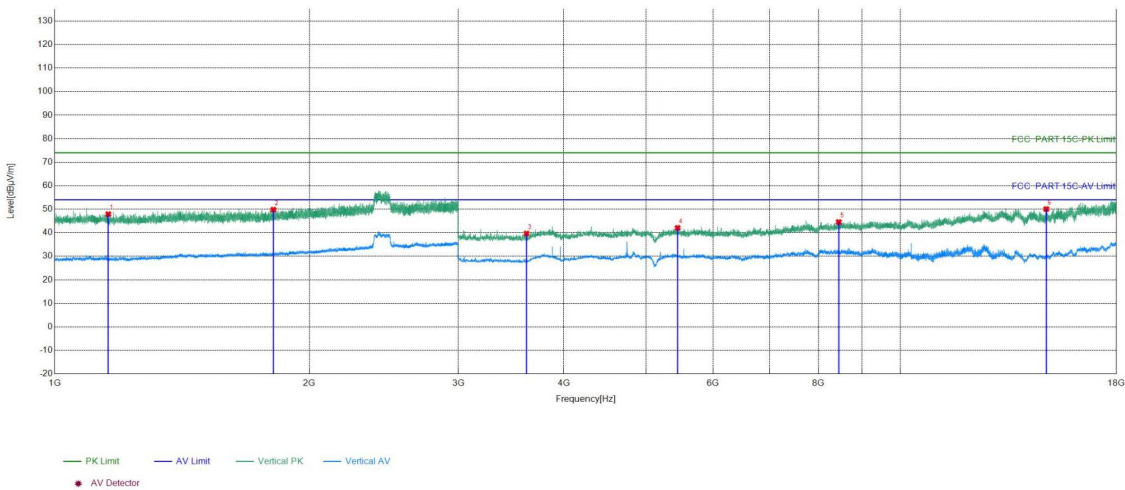

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1156.8105   | 11.49       | 36.41          | 47.90          | 74.00          | 26.10       | PASS   | Vertical | PK     |
| 2              | 1812.9875   | 14.30       | 35.51          | 49.81          | 74.00          | 24.19       | PASS   | Vertical | PK     |
| 3              | 3612.0408   | -13.15      | 52.79          | 39.64          | 74.00          | 34.36       | PASS   | Vertical | PK     |
| 4              | 5450.1633   | -6.43       | 48.47          | 42.04          | 74.00          | 31.96       | PASS   | Vertical | PK     |
| 5              | 8451.3634   | -0.52       | 45.06          | 44.54          | 74.00          | 29.46       | PASS   | Vertical | PK     |
| 6              | 14870.7914  | 9.93        | 40.14          | 50.07          | 74.00          | 23.93       | PASS   | Vertical | PK     |

|           |                                |                |           |
|-----------|--------------------------------|----------------|-----------|
| Test_Mode | 802.11 n(HT40)<br>Transmitting | Test_Frequency | 2422MHz   |
| Remark:   | /                              | Test_Date      | 2026/3/23 |


Test Graph

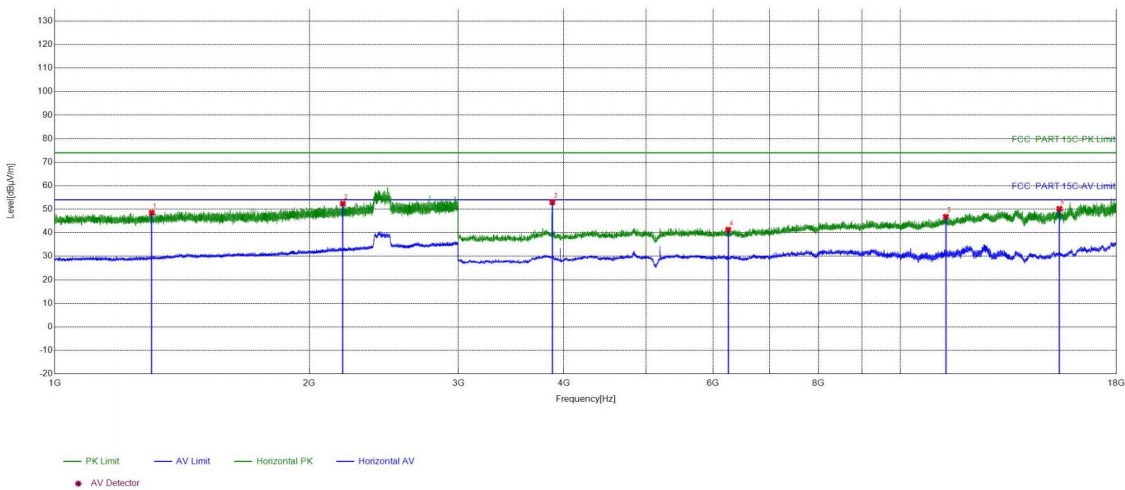

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1302.0201   | 12.11       | 36.40          | 48.51          | 74.00          | 25.49       | PASS   | Horizon  | PK     |
| 2              | 2190.4794   | 15.43       | 36.97          | 52.40          | 74.00          | 21.60       | PASS   | Horizon  | PK     |
| 3              | 3875.0583   | -12.02      | 64.99          | 52.97          | 74.00          | 21.03       | PASS   | Horizon  | PK     |
| 4              | 6255.217    | -4.77       | 46.09          | 41.32          | 74.00          | 32.68       | PASS   | Horizon  | PK     |
| 5              | 11312.5542  | 2.40        | 44.40          | 46.80          | 74.00          | 27.20       | PASS   | Horizon  | PK     |
| 6              | 15413.8276  | 11.31       | 38.90          | 50.21          | 74.00          | 23.79       | PASS   | Horizon  | PK     |

|           |                                |                |           |
|-----------|--------------------------------|----------------|-----------|
| Test_Mode | 802.11 n(HT40)<br>Transmitting | Test_Frequency | 2437MHz   |
| Remark:   | /                              | Test_Date      | 2026/3/23 |


Test Graph

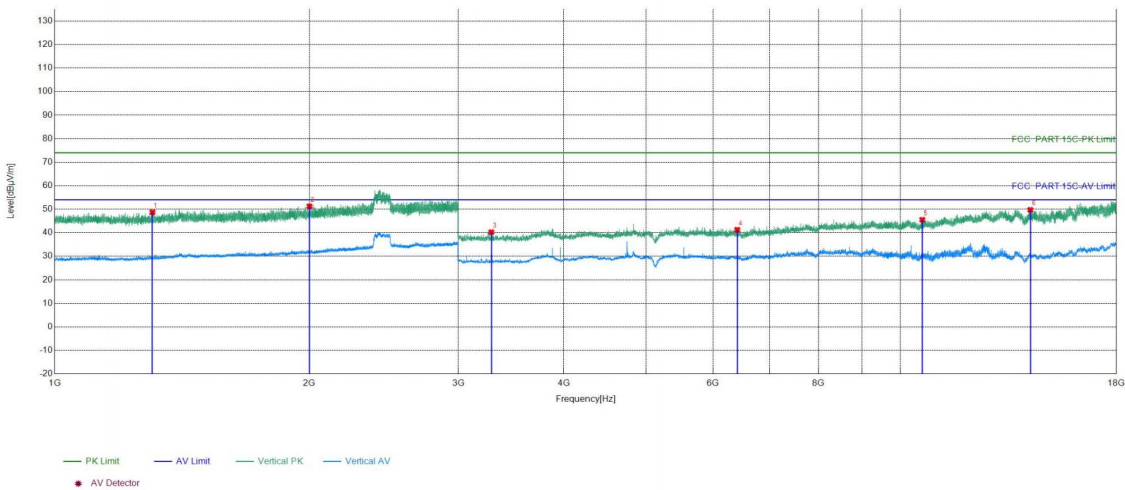

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1304.4203   | 12.12       | 36.61          | 48.73          | 74.00          | 25.27       | PASS   | Vertical | PK     |
| 2              | 2000.4667   | 14.78       | 36.46          | 51.24          | 74.00          | 22.76       | PASS   | Vertical | PK     |
| 3              | 3282.0188   | -14.10      | 54.32          | 40.22          | 74.00          | 33.78       | PASS   | Vertical | PK     |
| 4              | 6411.2274   | -4.34       | 45.62          | 41.28          | 74.00          | 32.72       | PASS   | Vertical | PK     |
| 5              | 10611.5074  | 2.14        | 43.37          | 45.51          | 74.00          | 28.49       | PASS   | Vertical | PK     |
| 6              | 14238.7492  | 8.79        | 40.94          | 49.73          | 74.00          | 24.27       | PASS   | Vertical | PK     |

|           |                                |                |           |
|-----------|--------------------------------|----------------|-----------|
| Test_Mode | 802.11 n(HT40)<br>Transmitting | Test_Frequency | 2437MHz   |
| Remark:   | /                              | Test_Date      | 2026/3/23 |


Test Graph

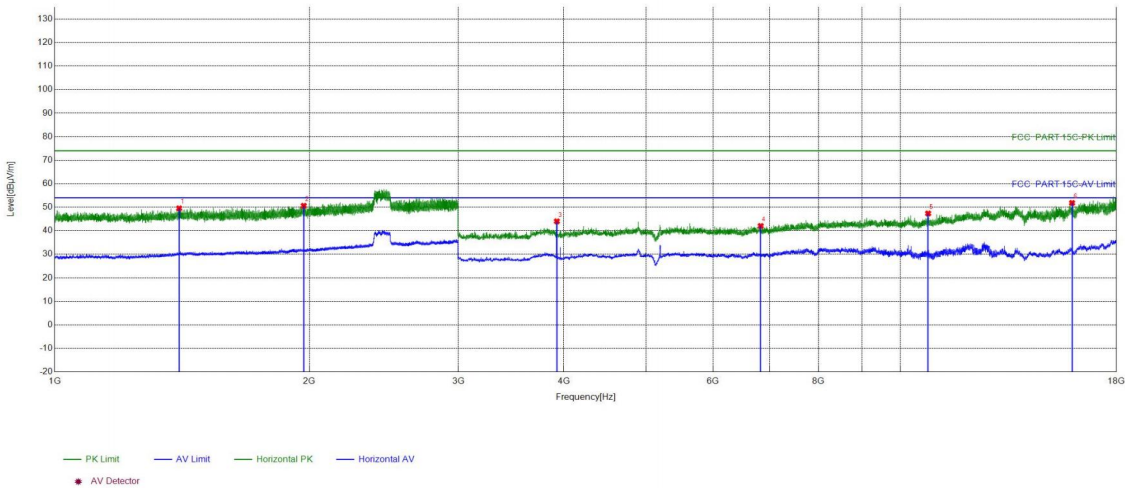

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1402.6935   | 12.82       | 36.72          | 49.54          | 74.00          | 24.46       | PASS   | Horizon  | PK     |
| 2              | 1969.5313   | 14.63       | 35.99          | 50.62          | 74.00          | 23.38       | PASS   | Horizon  | PK     |
| 3              | 3923.0615   | -11.95      | 55.96          | 44.01          | 74.00          | 29.99       | PASS   | Horizon  | PK     |
| 4              | 6834.2556   | -3.66       | 45.68          | 42.02          | 74.00          | 31.98       | PASS   | Horizon  | PK     |
| 5              | 10780.5187  | 2.05        | 45.30          | 47.35          | 74.00          | 26.65       | PASS   | Horizon  | PK     |
| 6              | 15951.8635  | 10.62       | 41.20          | 51.82          | 74.00          | 22.18       | PASS   | Horizon  | PK     |

|           |                                |                |           |
|-----------|--------------------------------|----------------|-----------|
| Test_Mode | 802.11 n(HT40)<br>Transmitting | Test_Frequency | 2437MHz   |
| Remark:   | /                              | Test_Date      | 2026/3/23 |


Test Graph

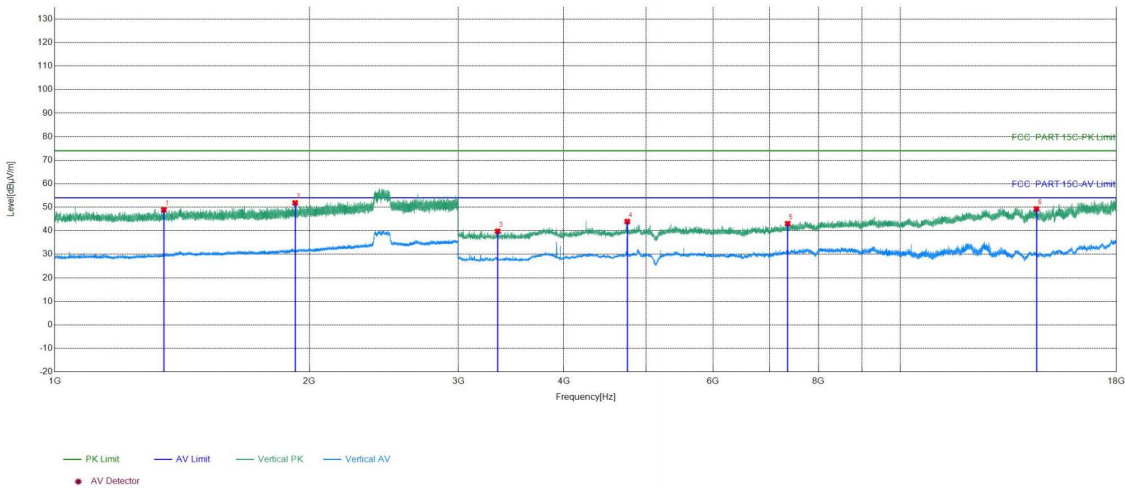

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1345.7564   | 12.46       | 36.44          | 48.90          | 74.00          | 25.10       | PASS   | Vertical | PK     |
| 2              | 1924.1949   | 14.70       | 37.13          | 51.83          | 74.00          | 22.17       | PASS   | Vertical | PK     |
| 3              | 3339.0226   | -14.03      | 53.81          | 39.78          | 74.00          | 34.22       | PASS   | Vertical | PK     |
| 4              | 4752.1168   | -8.64       | 52.55          | 43.91          | 74.00          | 30.09       | PASS   | Vertical | PK     |
| 5              | 7355.2904   | -2.90       | 45.93          | 43.03          | 74.00          | 30.97       | PASS   | Vertical | PK     |
| 6              | 14480.7654  | 9.46        | 39.84          | 49.30          | 74.00          | 24.70       | PASS   | Vertical | PK     |

|           |                                 |                |           |
|-----------|---------------------------------|----------------|-----------|
| Test_Mode | 802.11 ax(HE20)<br>Transmitting | Test_Frequency | 2412MHz   |
| Remark:   | /                               | Test_Date      | 2026/3/23 |


Test Graph

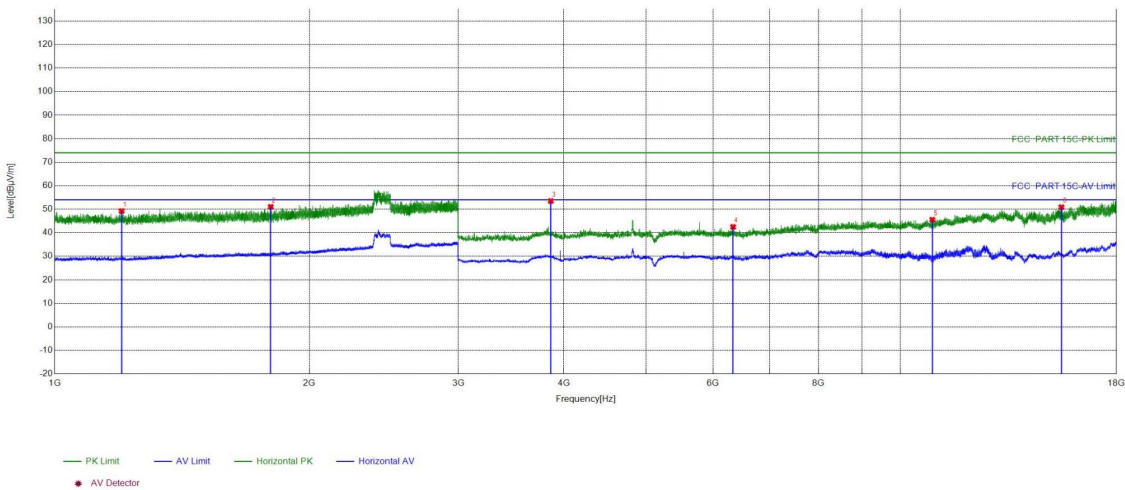

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1199.48     | 11.67       | 37.56          | 49.23          | 74.00          | 24.77       | PASS   | Horizon  | PK     |
| 2              | 1800.32     | 14.20       | 36.83          | 51.03          | 74.00          | 22.97       | PASS   | Horizon  | PK     |
| 3              | 3859.0573   | -12.06      | 65.57          | 53.51          | 74.00          | 20.49       | PASS   | Horizon  | PK     |
| 4              | 6339.2226   | -4.46       | 46.94          | 42.48          | 74.00          | 31.52       | PASS   | Horizon  | PK     |
| 5              | 10904.527   | 2.23        | 43.30          | 45.53          | 74.00          | 28.47       | PASS   | Horizon  | PK     |
| 6              | 15496.8331  | 10.26       | 40.61          | 50.87          | 74.00          | 23.13       | PASS   | Horizon  | PK     |

|           |                                 |                |           |
|-----------|---------------------------------|----------------|-----------|
| Test_Mode | 802.11 ax(HE20)<br>Transmitting | Test_Frequency | 2412MHz   |
| Remark:   | /                               | Test_Date      | 2026/3/23 |


Test Graph

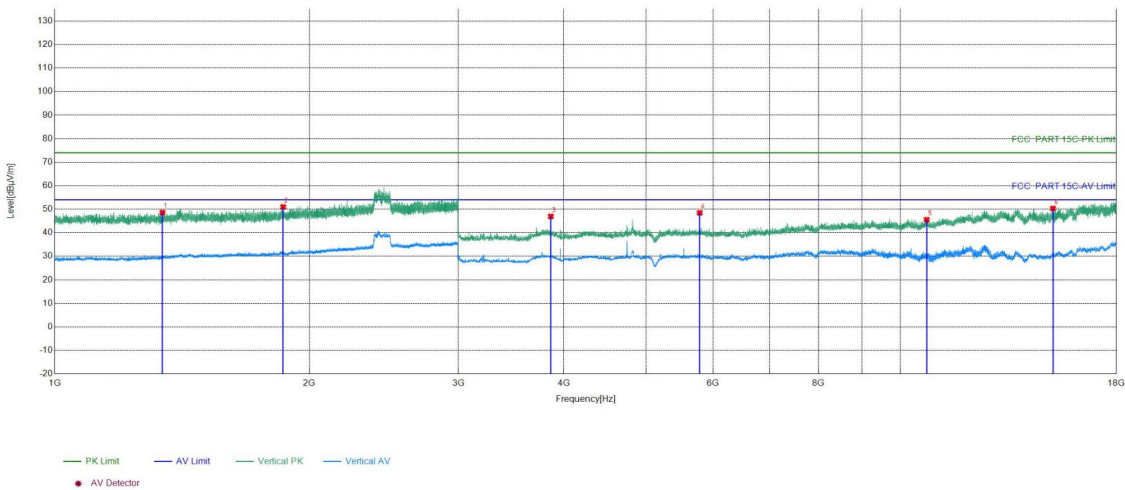

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1340.556    | 12.46       | 36.12          | 48.58          | 74.00          | 25.42       | PASS   | Vertical | PK     |
| 2              | 1862.1908   | 14.50       | 36.50          | 51.00          | 74.00          | 23.00       | PASS   | Vertical | PK     |
| 3              | 3859.0573   | -12.06      | 59.02          | 46.96          | 74.00          | 27.04       | PASS   | Vertical | PK     |
| 4              | 5788.1859   | -5.81       | 54.28          | 48.47          | 74.00          | 25.53       | PASS   | Vertical | PK     |
| 5              | 10737.5158  | 2.36        | 43.18          | 45.54          | 74.00          | 28.46       | PASS   | Vertical | PK     |
| 6              | 15142.8095  | 10.93       | 39.41          | 50.34          | 74.00          | 23.66       | PASS   | Vertical | PK     |

|           |                                 |                |           |
|-----------|---------------------------------|----------------|-----------|
| Test_Mode | 802.11 ax(HE20)<br>Transmitting | Test_Frequency | 2437MHz   |
| Remark:   | /                               | Test_Date      | 2026/3/23 |


Test Graph

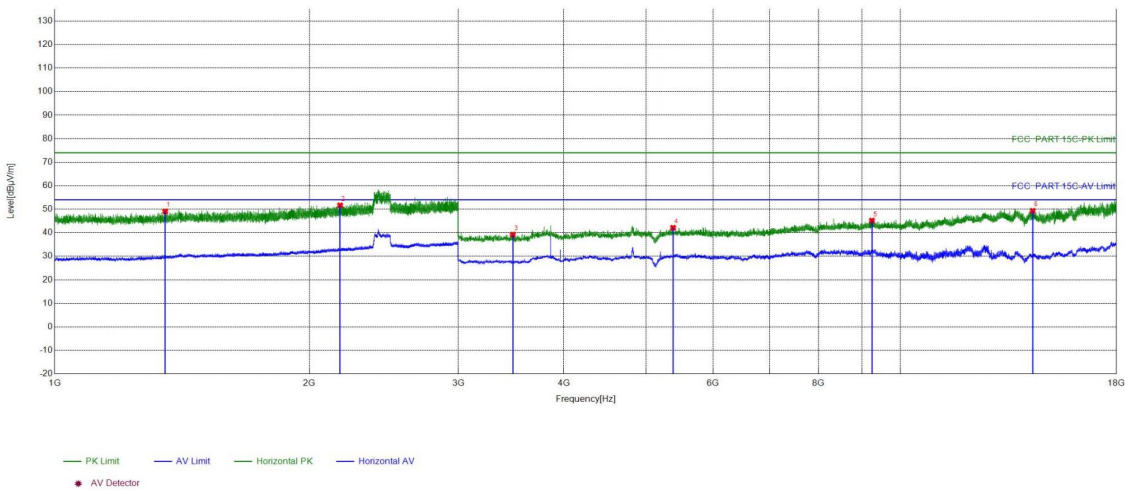

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1350.5567   | 12.47       | 36.59          | 49.06          | 74.00          | 24.94       | PASS   | Horizon  | PK     |
| 2              | 2174.4783   | 15.41       | 36.24          | 51.65          | 74.00          | 22.35       | PASS   | Horizon  | PK     |
| 3              | 3479.0319   | -13.88      | 53.09          | 39.21          | 74.00          | 34.79       | PASS   | Horizon  | PK     |
| 4              | 5383.1589   | -6.79       | 48.89          | 42.10          | 74.00          | 31.90       | PASS   | Horizon  | PK     |
| 5              | 9250.4167   | 0.63        | 44.54          | 45.17          | 74.00          | 28.83       | PASS   | Horizon  | PK     |
| 6              | 14329.7553  | 8.82        | 40.50          | 49.32          | 74.00          | 24.68       | PASS   | Horizon  | PK     |

|           |                                 |                |           |
|-----------|---------------------------------|----------------|-----------|
| Test_Mode | 802.11 ax(HE20)<br>Transmitting | Test_Frequency | 2437MHz   |
| Remark:   | /                               | Test_Date      | 2026/3/23 |


Test Graph

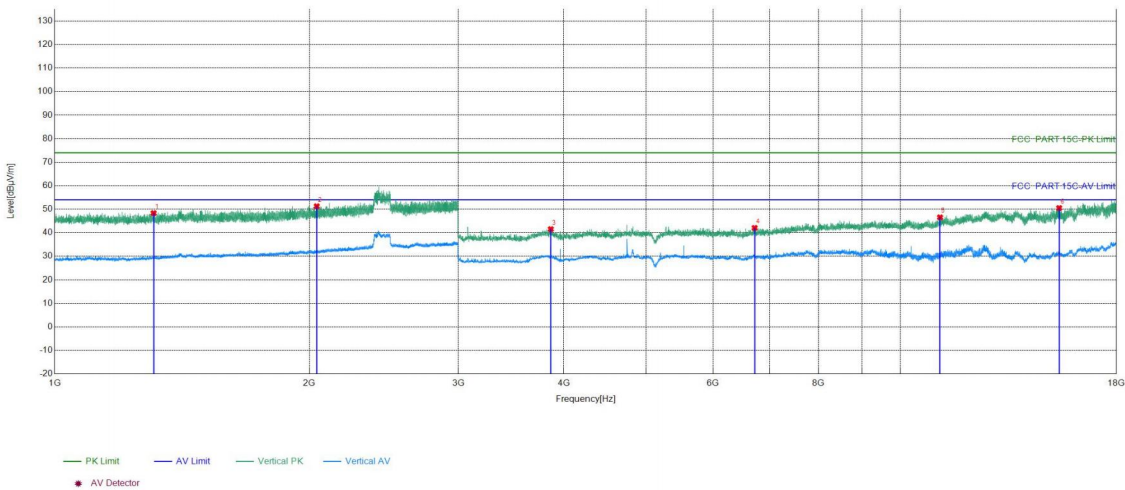

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1308.5539   | 12.16       | 36.18          | 48.34          | 74.00          | 25.66       | PASS   | Vertical | PK     |
| 2              | 2040.336    | 14.74       | 36.53          | 51.27          | 74.00          | 22.73       | PASS   | Vertical | PK     |
| 3              | 3859.0573   | -12.06      | 53.59          | 41.53          | 74.00          | 32.47       | PASS   | Vertical | PK     |
| 4              | 6722.2482   | -3.33       | 45.38          | 42.05          | 74.00          | 31.95       | PASS   | Vertical | PK     |
| 5              | 11136.5424  | 2.06        | 44.48          | 46.54          | 74.00          | 27.46       | PASS   | Vertical | PK     |
| 6              | 15400.8267  | 11.43       | 39.07          | 50.50          | 74.00          | 23.50       | PASS   | Vertical | PK     |

|           |                                 |                |           |
|-----------|---------------------------------|----------------|-----------|
| Test_Mode | 802.11 ax(HE20)<br>Transmitting | Test_Frequency | 2462MHz   |
| Remark:   | /                               | Test_Date      | 2026/3/23 |


Test Graph

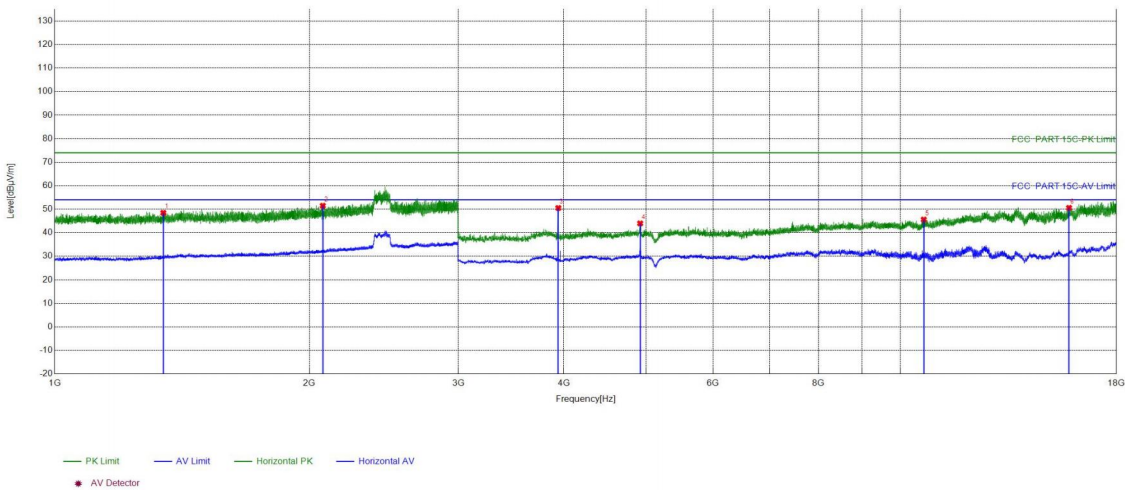

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1343.7562   | 12.46       | 36.01          | 48.47          | 74.00          | 25.53       | PASS   | Horizon  | PK     |
| 2              | 2074.2049   | 14.88       | 36.61          | 51.49          | 74.00          | 22.51       | PASS   | Horizon  | PK     |
| 3              | 3939.0626   | -11.93      | 62.45          | 50.52          | 74.00          | 23.48       | PASS   | Horizon  | PK     |
| 4              | 4922.1281   | -8.17       | 52.15          | 43.98          | 74.00          | 30.02       | PASS   | Horizon  | PK     |
| 5              | 10653.5102  | 2.28        | 43.33          | 45.61          | 74.00          | 28.39       | PASS   | Horizon  | PK     |
| 6              | 15822.8549  | 9.61        | 40.97          | 50.58          | 74.00          | 23.42       | PASS   | Horizon  | PK     |

|           |                                 |                |           |
|-----------|---------------------------------|----------------|-----------|
| Test_Mode | 802.11 ax(HE20)<br>Transmitting | Test_Frequency | 2462MHz   |
| Remark:   | /                               | Test_Date      | 2026/3/23 |


Test Graph

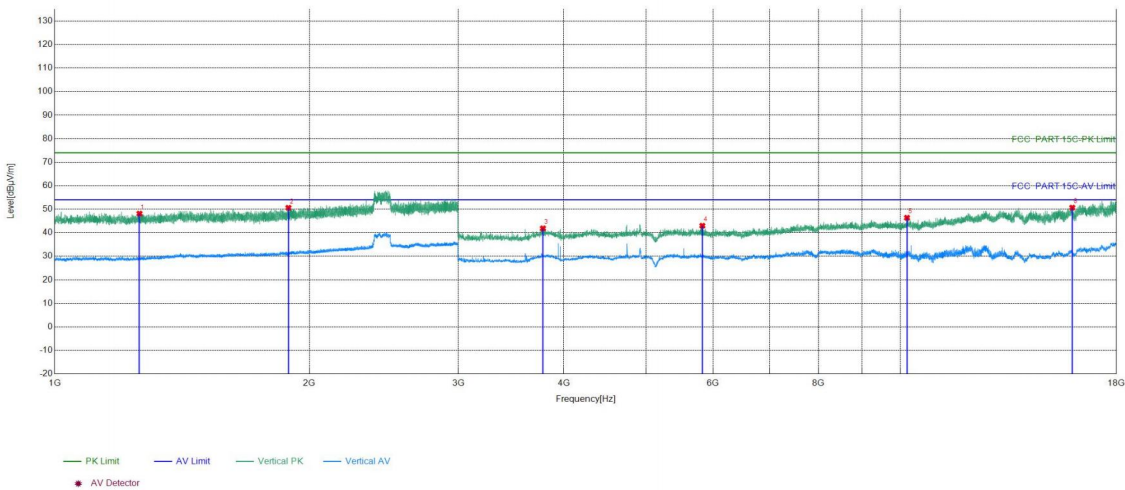

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1259.2173   | 11.89       | 36.23          | 48.12          | 74.00          | 25.88       | PASS   | Vertical | PK     |
| 2              | 1889.1259   | 14.36       | 36.23          | 50.59          | 74.00          | 23.41       | PASS   | Vertical | PK     |
| 3              | 3777.0518   | -12.63      | 54.48          | 41.85          | 74.00          | 32.15       | PASS   | Vertical | PK     |
| 4              | 5830.1887   | -5.57       | 48.54          | 42.97          | 74.00          | 31.03       | PASS   | Vertical | PK     |
| 5              | 10177.4785  | 1.53        | 44.84          | 46.37          | 74.00          | 27.63       | PASS   | Vertical | PK     |
| 6              | 15961.8641  | 10.52       | 40.14          | 50.66          | 74.00          | 23.34       | PASS   | Vertical | PK     |

|           |                                 |                |           |
|-----------|---------------------------------|----------------|-----------|
| Test_Mode | 802.11 ax(HE40)<br>Transmitting | Test_Frequency | 2422MHz   |
| Remark:   | /                               | Test_Date      | 2026/3/23 |


Test Graph

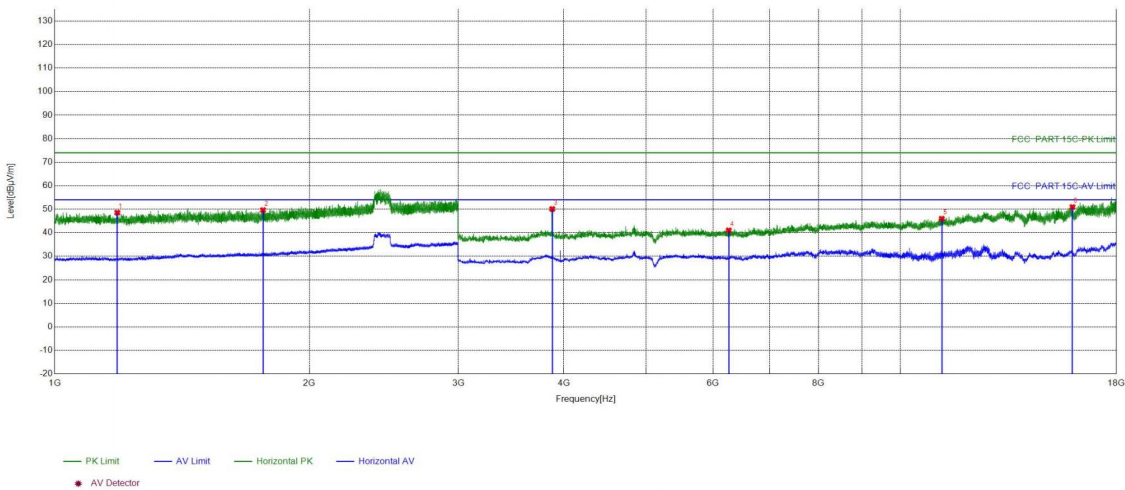

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1185.6124   | 11.49       | 37.04          | 48.53          | 74.00          | 25.47       | PASS   | Horizon  | PK     |
| 2              | 1762.5842   | 14.28       | 35.34          | 49.62          | 74.00          | 24.38       | PASS   | Horizon  | PK     |
| 3              | 3874.0583   | -12.03      | 62.13          | 50.10          | 74.00          | 23.90       | PASS   | Horizon  | PK     |
| 4              | 6264.2176   | -4.79       | 45.80          | 41.01          | 74.00          | 32.99       | PASS   | Horizon  | PK     |
| 5              | 11189.546   | 2.17        | 43.80          | 45.97          | 74.00          | 28.03       | PASS   | Horizon  | PK     |
| 6              | 15970.8647  | 10.43       | 40.50          | 50.93          | 74.00          | 23.07       | PASS   | Horizon  | PK     |

|           |                              |                |           |
|-----------|------------------------------|----------------|-----------|
| Test_Mode | 802.11 ax(HE40) Transmitting | Test_Frequency | 2422MHz   |
| Remark:   | /                            | Test_Date      | 2026/3/23 |


Test Graph

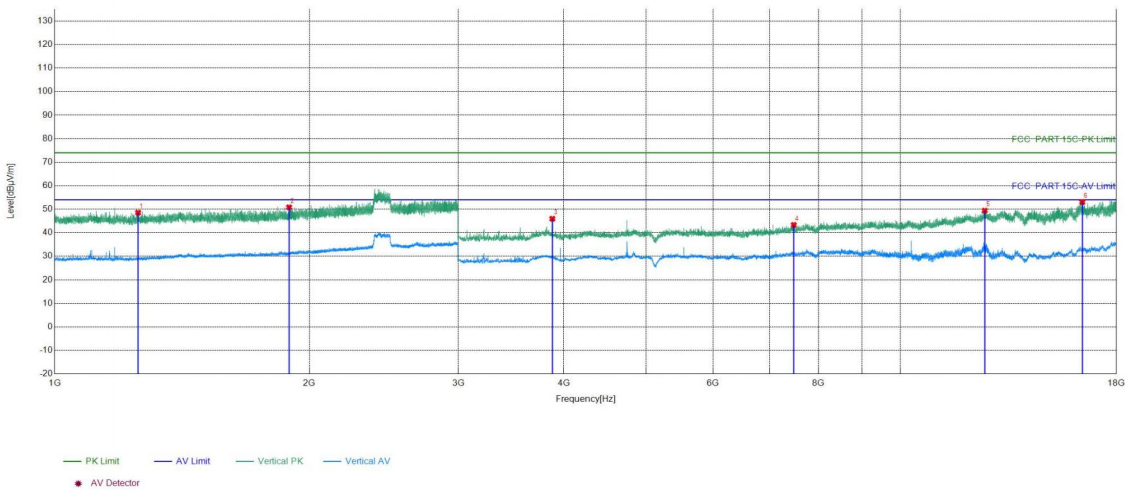

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1254.5503   | 11.75       | 36.79          | 48.54          | 74.00          | 25.46       | PASS   | Vertical | PK     |
| 2              | 1892.4595   | 14.42       | 36.39          | 50.81          | 74.00          | 23.19       | PASS   | Vertical | PK     |
| 3              | 3875.0583   | -12.02      | 57.97          | 45.95          | 74.00          | 28.05       | PASS   | Vertical | PK     |
| 4              | 7478.2986   | -2.32       | 45.64          | 43.32          | 74.00          | 30.68       | PASS   | Vertical | PK     |
| 5              | 12578.6386  | 4.53        | 44.88          | 49.41          | 74.00          | 24.59       | PASS   | Vertical | PK     |
| 6              | 16401.8935  | 10.00       | 43.04          | 53.04          | 74.00          | 20.96       | PASS   | Vertical | PK     |

|           |                              |                |           |
|-----------|------------------------------|----------------|-----------|
| Test_Mode | 802.11 ax(HE40) Transmitting | Test_Frequency | 2437MHz   |
| Remark:   | /                            | Test_Date      | 2026/3/23 |

Test Graph

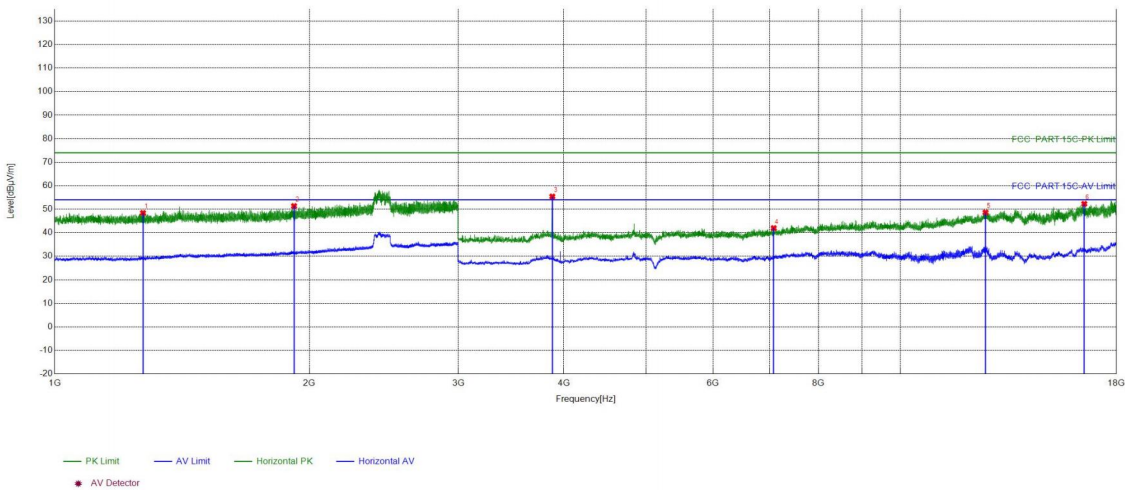

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 1271.3514   | 11.89       | 36.53          | 48.42          | 74.00          | 25.58       | PASS   | Horizon  | PK     |
| 2              | 1918.1945   | 14.76       | 36.59          | 51.35          | 74.00          | 22.65       | PASS   | Horizon  | PK     |
| 3              | 3875.0583   | -12.02      | 67.43          | 55.41          | 74.00          | 18.59       | PASS   | Horizon  | PK     |
| 4              | 7080.272    | -3.25       | 45.23          | 41.98          | 74.00          | 32.02       | PASS   | Horizon  | PK     |
| 5              | 12603.6402  | 4.69        | 43.94          | 48.63          | 74.00          | 25.37       | PASS   | Horizon  | PK     |
| 6              | 16490.8994  | 11.77       | 40.53          | 52.30          | 74.00          | 21.70       | PASS   | Horizon  | PK     |