

Test Laboratory: SGS-SAR Lab

LTE Band 66 20M QPSK 1RB0 Ch132322 Back side 0mm

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used: $f = 1745$ MHz; $\sigma = 1.313$ S/m; $\epsilon_r = 38.951$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.78, 8.78, 8.78); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x18x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 7.26 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.735 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 11.6 W/kg
SAR(1 g) = 4.43 W/kg; SAR(10 g) = 2.03 W/kg
Smallest distance from peaks to all points 3 dB below = 8.2 mm
Ratio of SAR at M2 to SAR at M1 = 36.3%
Maximum value of SAR (measured) = 8.78 W/kg

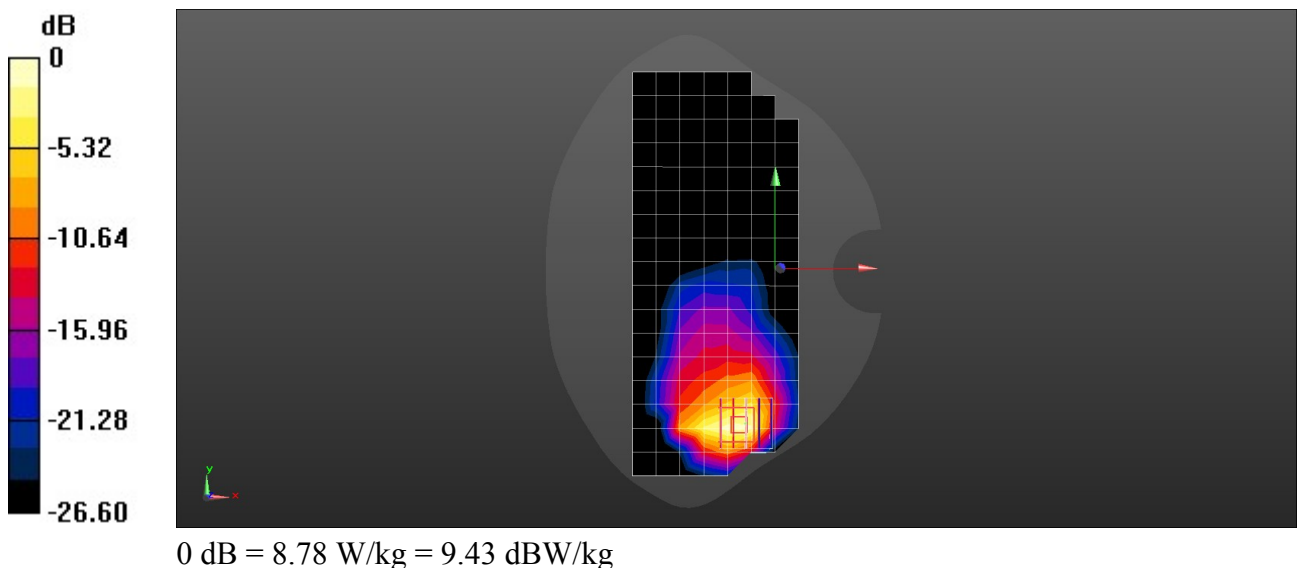

Test Laboratory: SGS-SAR Lab

LTE Band 71 20M QPSK 50RB0 Ch133322 Front side 35mm

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 683 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 683$ MHz; $\sigma = 0.848$ S/m; $\epsilon_r = 42.813$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.54, 10.54, 10.54); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x18x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.0217 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.4350 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.0250 W/kg
SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.012 W/kg
Smallest distance from peaks to all points 3 dB below = 13.2 mm
Ratio of SAR at M2 to SAR at M1 = 67.4%
Maximum value of SAR (measured) = 0.0222 W/kg

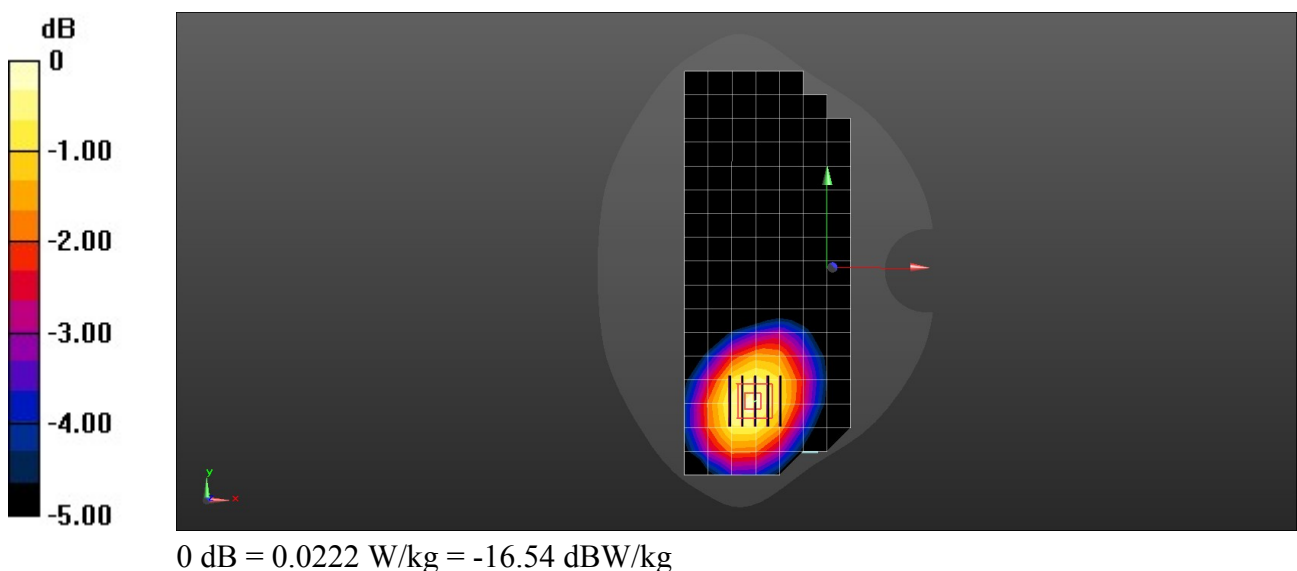

Test Laboratory: SGS-SAR Lab

LTE Band 71 20M QPSK 1RB0 Ch133322 Back side 10mm

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 683 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 683$ MHz; $\sigma = 0.848$ S/m; $\epsilon_r = 42.813$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.54, 10.54, 10.54); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.545 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 21.17 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.676 W/kg
SAR(1 g) = 0.445 W/kg; SAR(10 g) = 0.322 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 64.1%
Maximum value of SAR (measured) = 0.576 W/kg

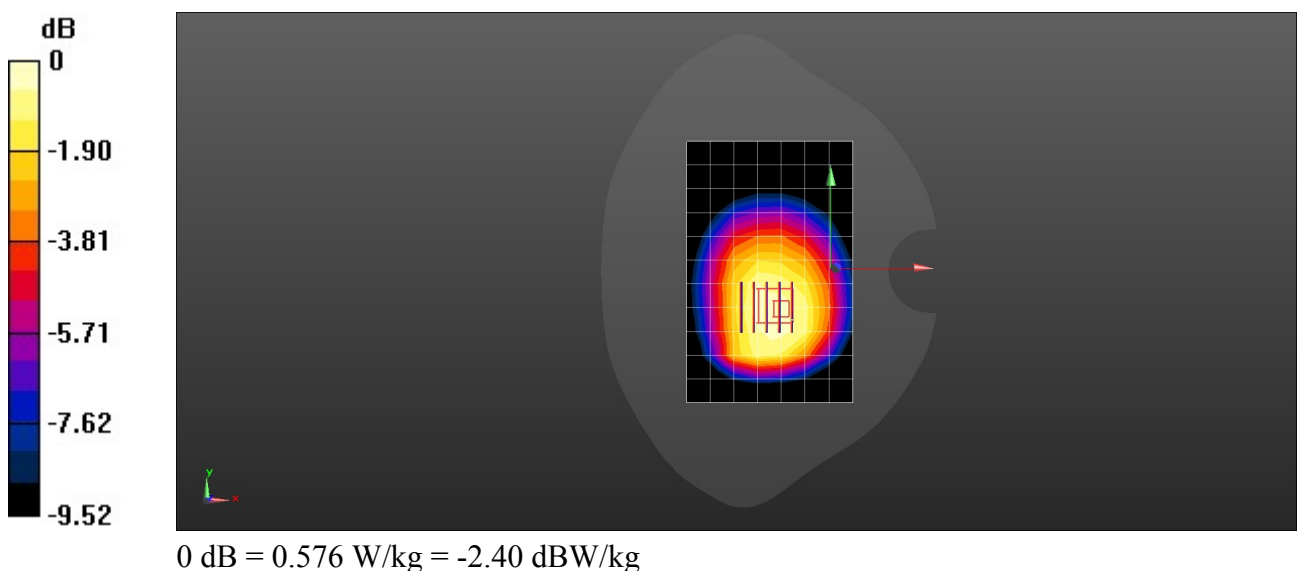

Test Laboratory: SGS-SAR Lab

LTE Band 71 20M QPSK 1RB0 Ch133322 Back side 0mm

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 683 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 683$ MHz; $\sigma = 0.848$ S/m; $\epsilon_r = 42.813$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.54, 10.54, 10.54); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x18x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.86 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.930 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 7.88 W/kg
SAR(1 g) = 2.12 W/kg; SAR(10 g) = 0.876 W/kg
Smallest distance from peaks to all points 3 dB below = 8.8 mm
Ratio of SAR at M2 to SAR at M1 = 36.3%
Maximum value of SAR (measured) = 4.92 W/kg

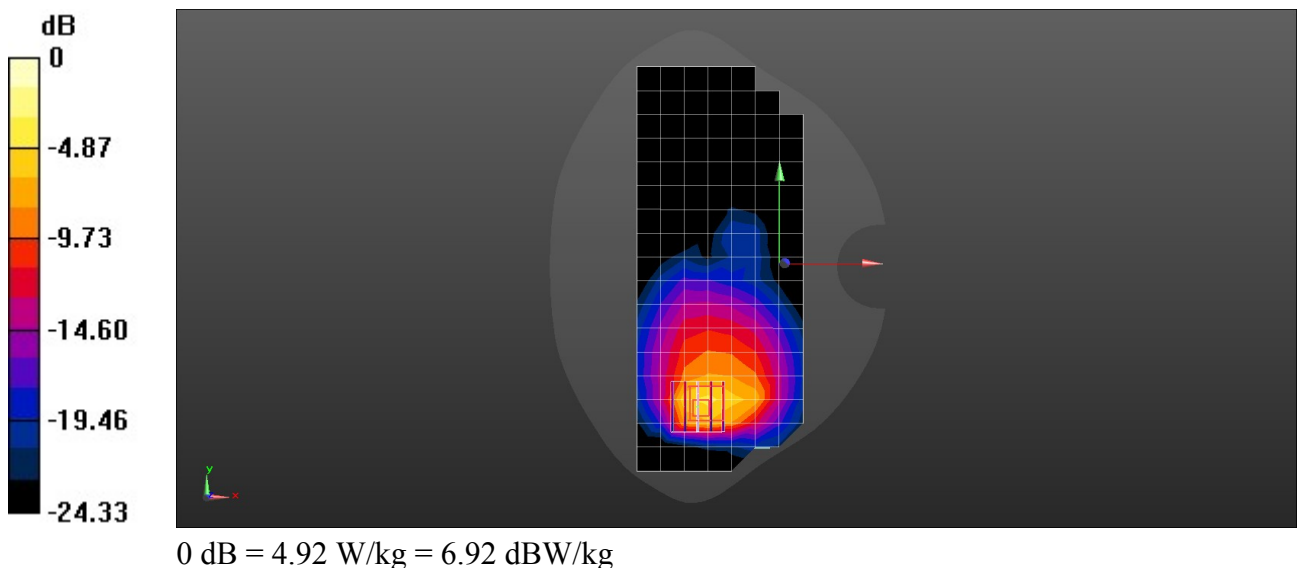

Test Laboratory: SGS-SAR Lab

NR Band n5 20M QPSK 1RB1 Ch167300 Front side 35mm

Communication System: UID 0, NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.615$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.09, 10.09, 10.09); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x18x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.106 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.146 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.120 W/kg
SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.062 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 71.2%
Maximum value of SAR (measured) = 0.107 W/kg

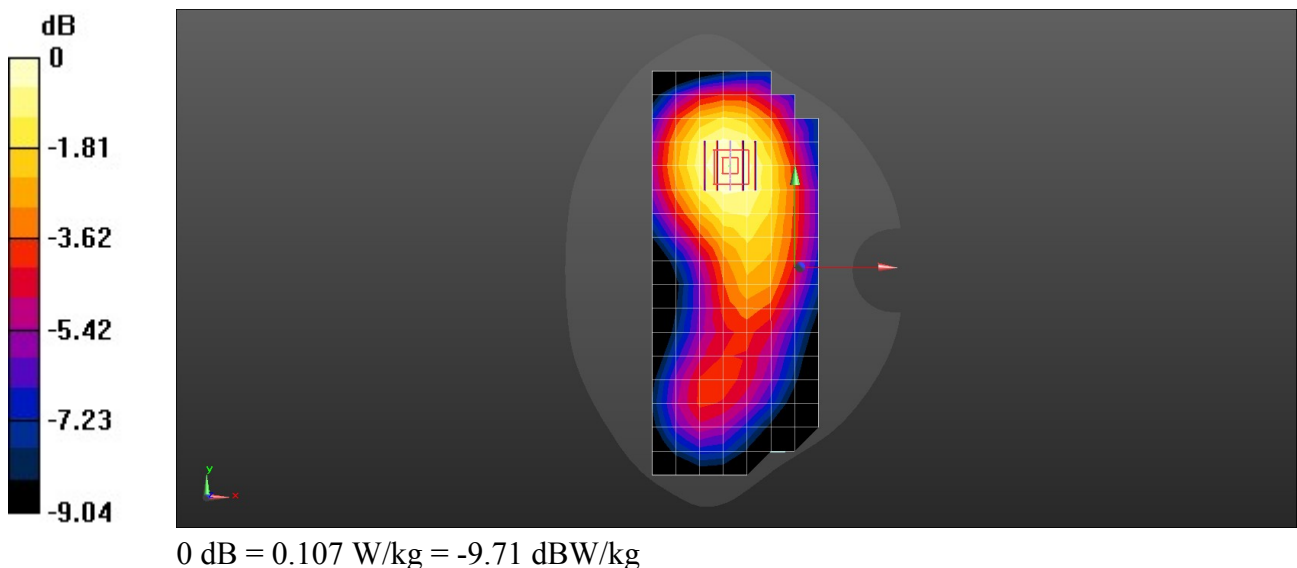

Test Laboratory: SGS-SAR Lab

NR Band n5 20M QPSK 1RB1 Ch167300 Back side 10mm

Communication System: UID 0, NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.615$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.09, 10.09, 10.09); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.05 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 30.36 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 1.18 W/kg
SAR(1 g) = 0.832 W/kg; SAR(10 g) = 0.609 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 71.1%
Maximum value of SAR (measured) = 1.05 W/kg

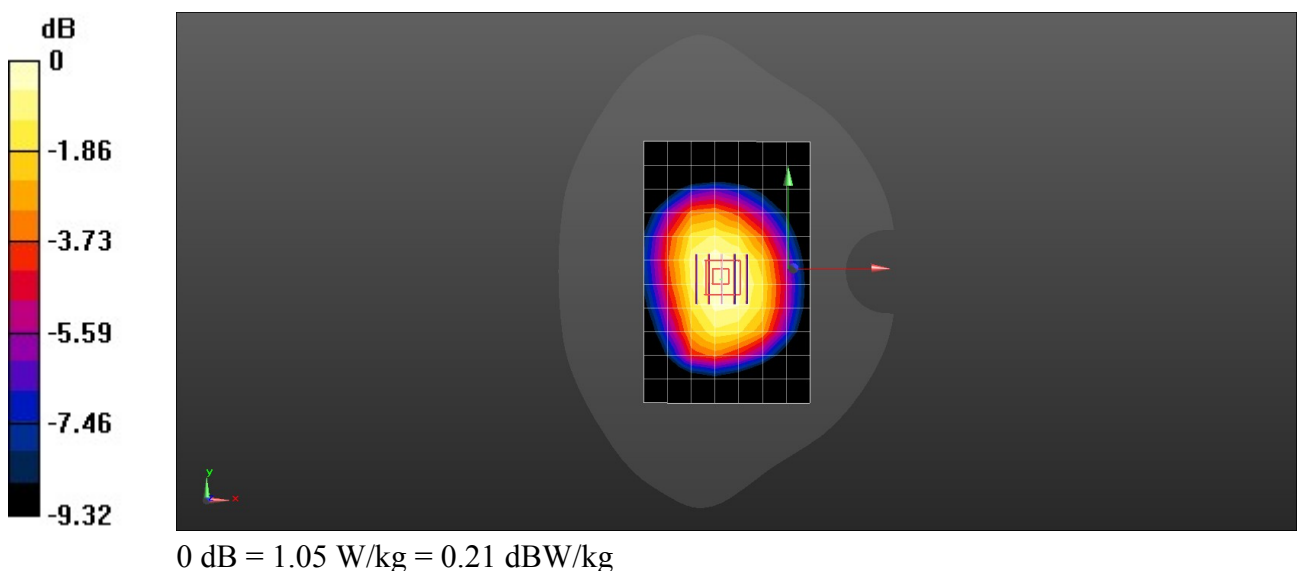

Test Laboratory: SGS-SAR Lab

NR Band n5 20M QPSK 1RB1 Ch167300 Back side 0mm

Communication System: UID 0, NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.615$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.09, 10.09, 10.09); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x18x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.31 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.96 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 10.7 W/kg
SAR(1 g) = 2.82 W/kg; SAR(10 g) = 1.21 W/kg
Smallest distance from peaks to all points 3 dB below = 8.8 mm
Ratio of SAR at M2 to SAR at M1 = 34.9%
Maximum value of SAR (measured) = 6.89 W/kg

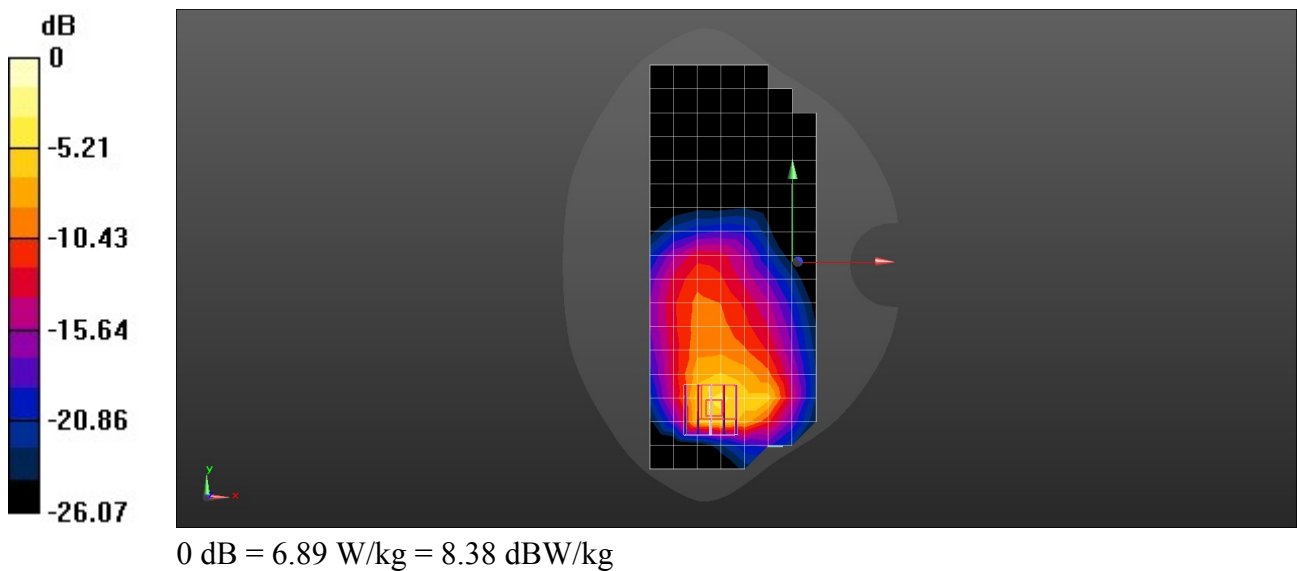

Test Laboratory: SGS-SAR Lab

NR Band n7 20M QPSK 1RB1 Ch507000 Right cheek

Communication System: UID 0, NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 38.193$; $\rho = 1000$ kg/m³


Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.991 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.604 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 1.19 W/kg
SAR(1 g) = 0.684 W/kg; SAR(10 g) = 0.374 W/kg
Smallest distance from peaks to all points 3 dB below = 10.1 mm
Ratio of SAR at M2 to SAR at M1 = 59.6%
Maximum value of SAR (measured) = 0.982 W/kg

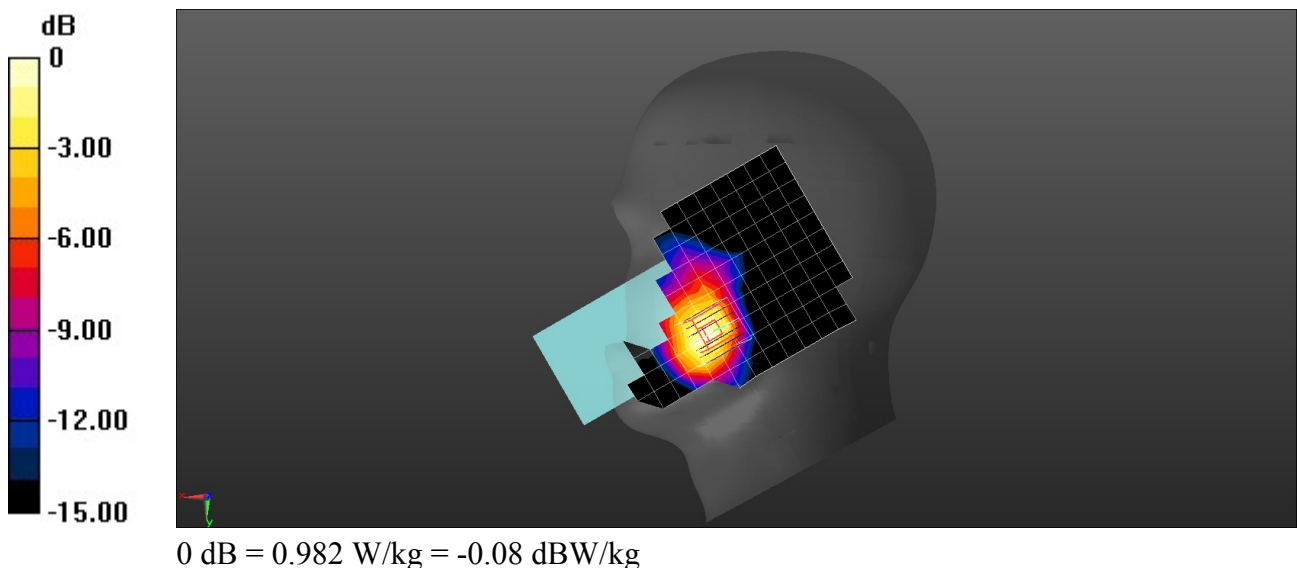

Test Laboratory: SGS-SAR Lab

NR Band n7 20M QPSK 1RB1 Ch507000 Back side 10mm

Communication System: UID 0, NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 38.193$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x15x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.830 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.51 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.619 W/kg; SAR(10 g) = 0.316 W/kg

Smallest distance from peaks to all points 3 dB below = 12.7 mm

Ratio of SAR at M2 to SAR at M1 = 50.4%

Maximum value of SAR (measured) = 0.976 W/kg

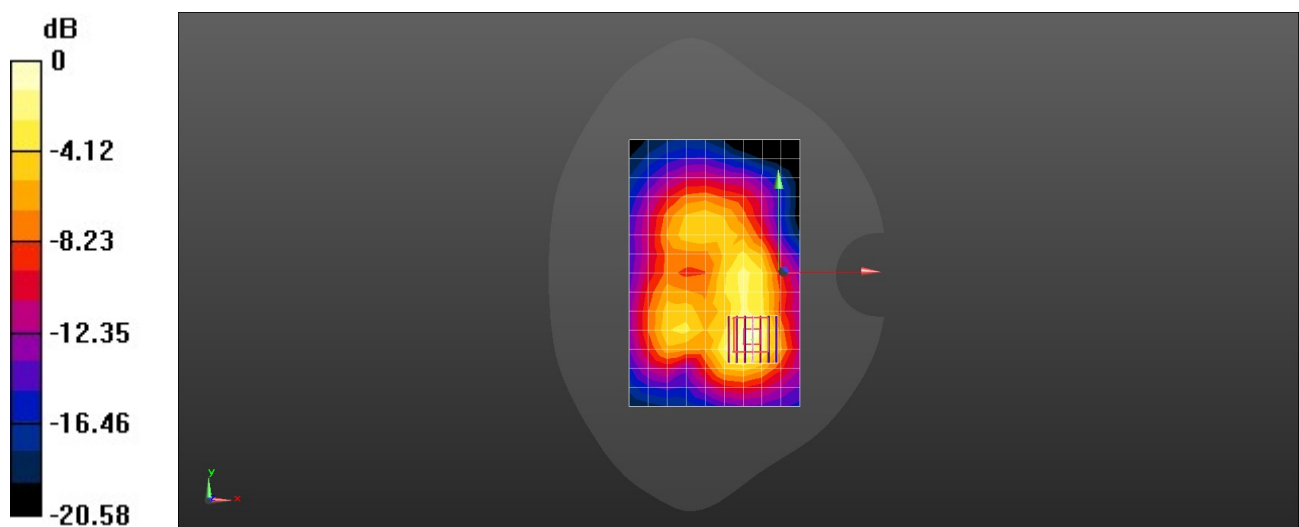

0 dB = 0.976 W/kg = -0.11 dBW/kg

Test Laboratory: SGS-SAR Lab

NR Band n7 20M QPSK 1RB1 Ch507000 Left side 0mm

Communication System: UID 0, NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 38.193$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x22x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 13.6 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.915 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 23.0 W/kg
SAR(1 g) = 5.76 W/kg; SAR(10 g) = 1.97 W/kg
Smallest distance from peaks to all points 3 dB below = 8.2 mm
Ratio of SAR at M2 to SAR at M1 = 33.1%
Maximum value of SAR (measured) = 15.4 W/kg

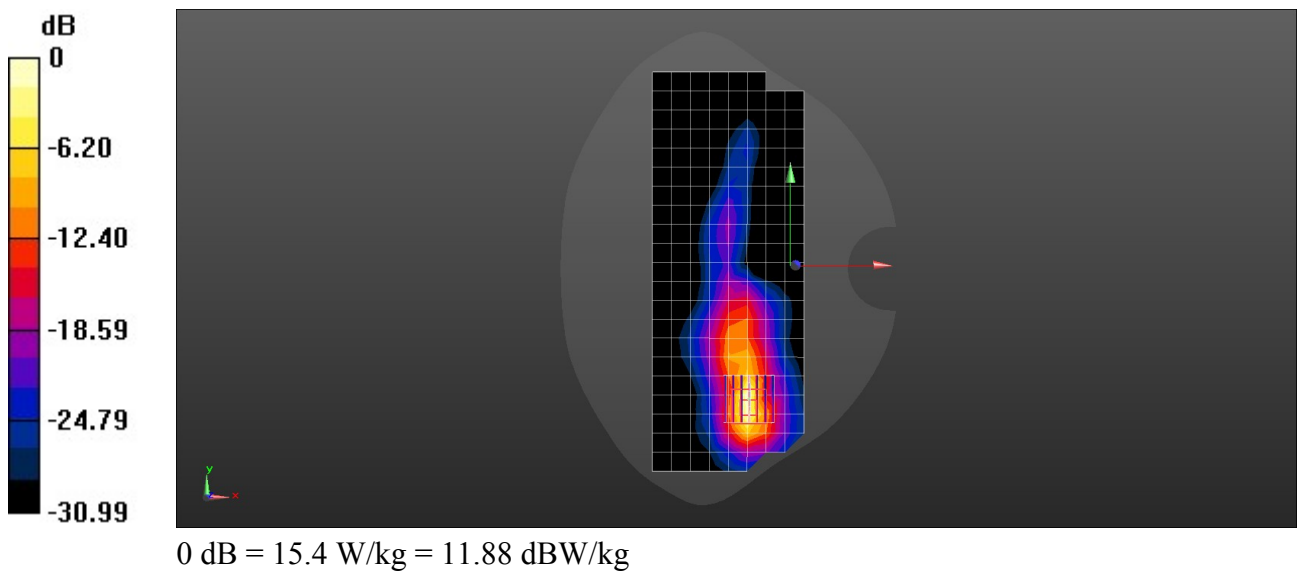

Test Laboratory: SGS-SAR Lab

NR Band n14 10M QPSK 1RB1 Ch158600 Back side 35mm

Communication System: UID 0, NR (0); Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 793$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 42.167$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.54, 10.54, 10.54); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x18x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.125 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.689 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.140 W/kg
SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.073 W/kg
Smallest distance from peaks to all points 3 dB below = 16.2 mm
Ratio of SAR at M2 to SAR at M1 = 70.8%
Maximum value of SAR (measured) = 0.125 W/kg

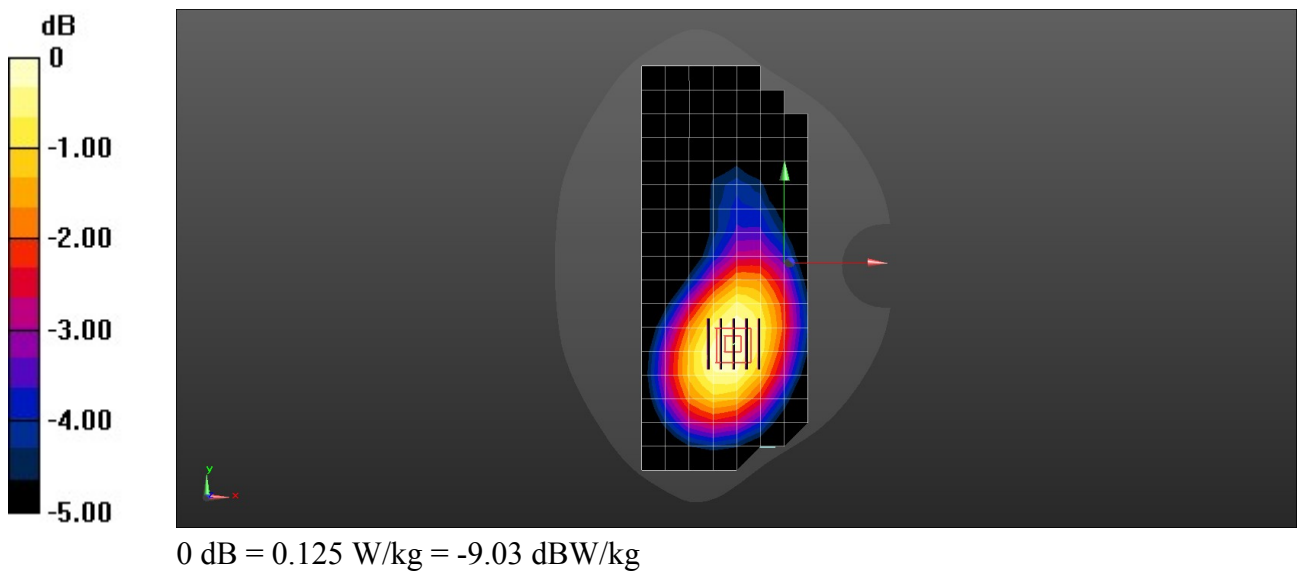

Test Laboratory: SGS-SAR Lab

NR Band n14 10M QPSK 1RB1 Ch158600 Back side 10mm

Communication System: UID 0, NR (0); Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 793$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 42.167$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.54, 10.54, 10.54); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.17 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 31.43 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.35 W/kg
SAR(1 g) = 0.938 W/kg; SAR(10 g) = 0.680 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 69.9%
Maximum value of SAR (measured) = 1.19 W/kg

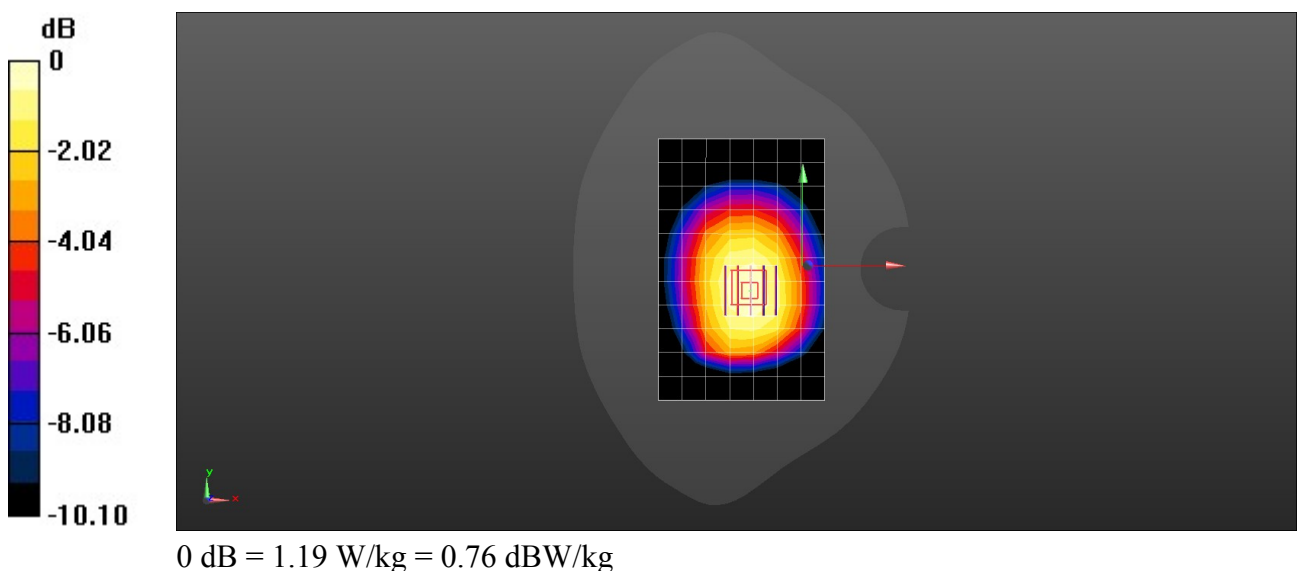

Test Laboratory: SGS-SAR Lab

NR Band n14 10M QPSK 1RB1 Ch158600 Back side 0mm

Communication System: UID 0, NR (0); Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 793$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 42.167$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.54, 10.54, 10.54); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x18x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.07 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.659 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 6.91 W/kg
SAR(1 g) = 2.14 W/kg; SAR(10 g) = 0.963 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 31.1%
Maximum value of SAR (measured) = 4.47 W/kg

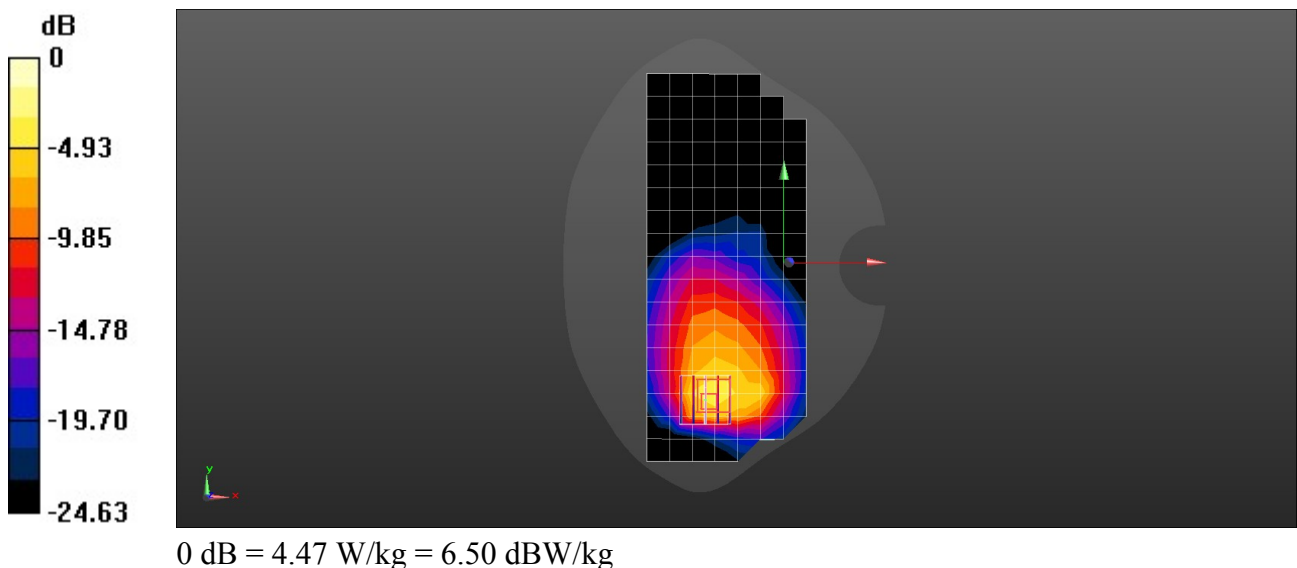

Test Laboratory: SGS-SAR Lab

NR Band n25 30M QPSK 1RB1 Ch376500 Right cheek

Communication System: UID 0, NR (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 39.914$; $\rho = 1000$ kg/m³


Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.43, 8.43, 8.43); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.904 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.905 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 1.54 W/kg
SAR(1 g) = 0.704 W/kg; SAR(10 g) = 0.358 W/kg
Smallest distance from peaks to all points 3 dB below = 10.3 mm
Ratio of SAR at M2 to SAR at M1 = 45.1%
Maximum value of SAR (measured) = 1.24 W/kg

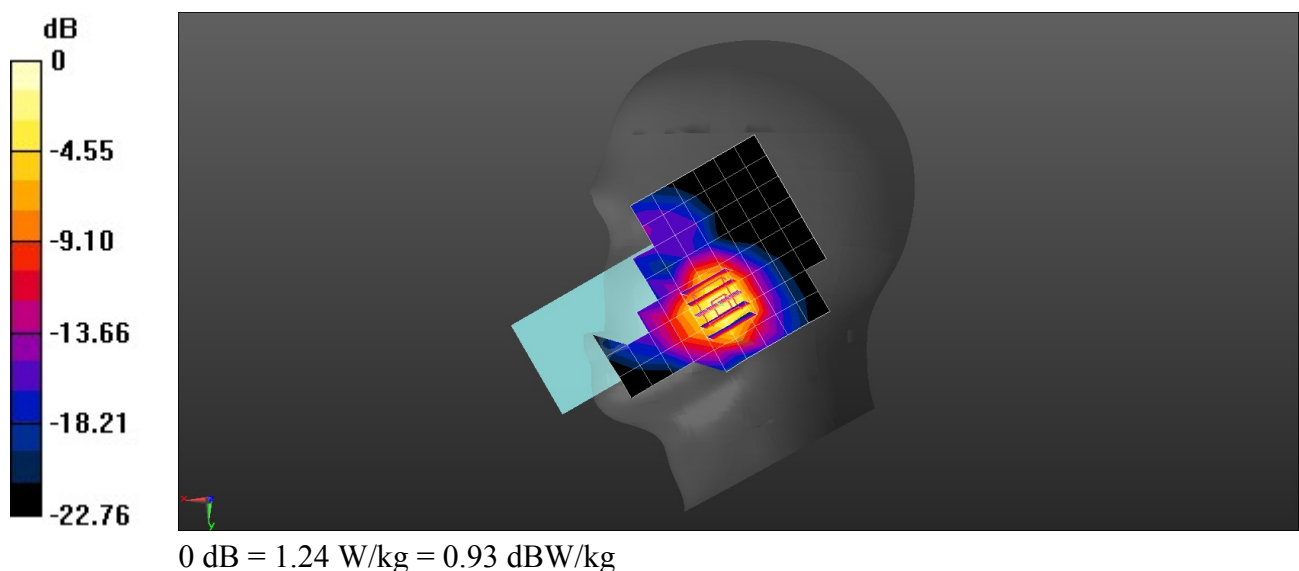

Test Laboratory: SGS-SAR Lab

NR Band n25 30M QPSK 1RB1 Ch376500 Back side 10mm

Communication System: UID 0, NR (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 39.914$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.43, 8.43, 8.43); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.16 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.283 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.48 W/kg
SAR(1 g) = 0.782 W/kg; SAR(10 g) = 0.410 W/kg
Smallest distance from peaks to all points 3 dB below = 11.2 mm
Ratio of SAR at M2 to SAR at M1 = 52.7%
Maximum value of SAR (measured) = 1.22 W/kg

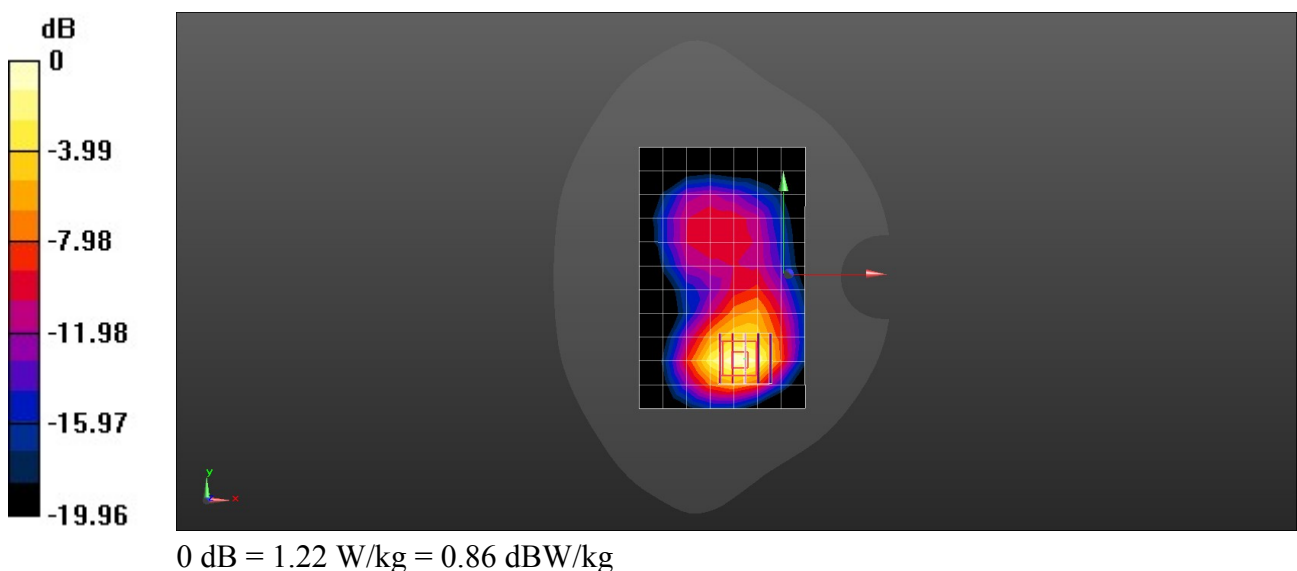

Test Laboratory: SGS-SAR Lab

NR Band n25 30M QPSK 1RB1 Ch376500 Back side 0mm

Communication System: UID 0, NR (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 39.914$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.43, 8.43, 8.43); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x18x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.94 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.235 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 4.32 W/kg
SAR(1 g) = 1.9 W/kg; SAR(10 g) = 0.961 W/kg
Smallest distance from peaks to all points 3 dB below = 8.2 mm
Ratio of SAR at M2 to SAR at M1 = 46.4%
Maximum value of SAR (measured) = 3.23 W/kg

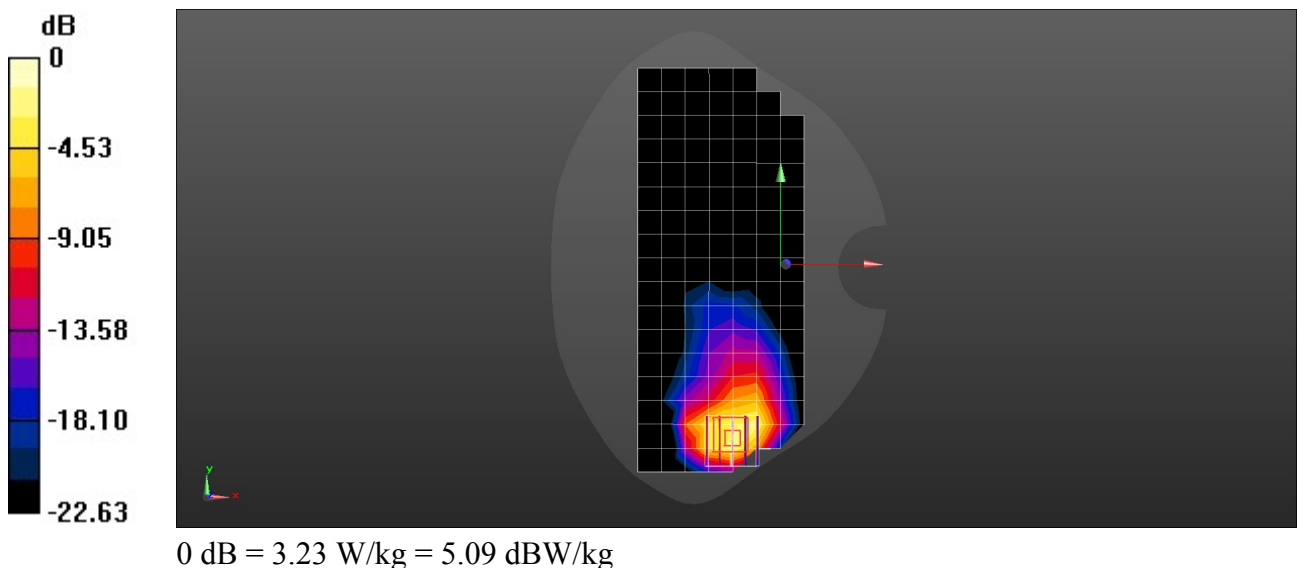

Test Laboratory: SGS-SAR Lab

NR Band n30 10M QPSK 1RB1 Ch462000 Right cheek

Communication System: UID 0, NR (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300; Medium parameters used: $f = 2310$ MHz; $\sigma = 1.638$ S/m; $\epsilon_r = 39.02$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.21, 8.21, 8.21); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.871 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.655 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.542 W/kg; SAR(10 g) = 0.257 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 49.7%

Maximum value of SAR (measured) = 0.873 W/kg

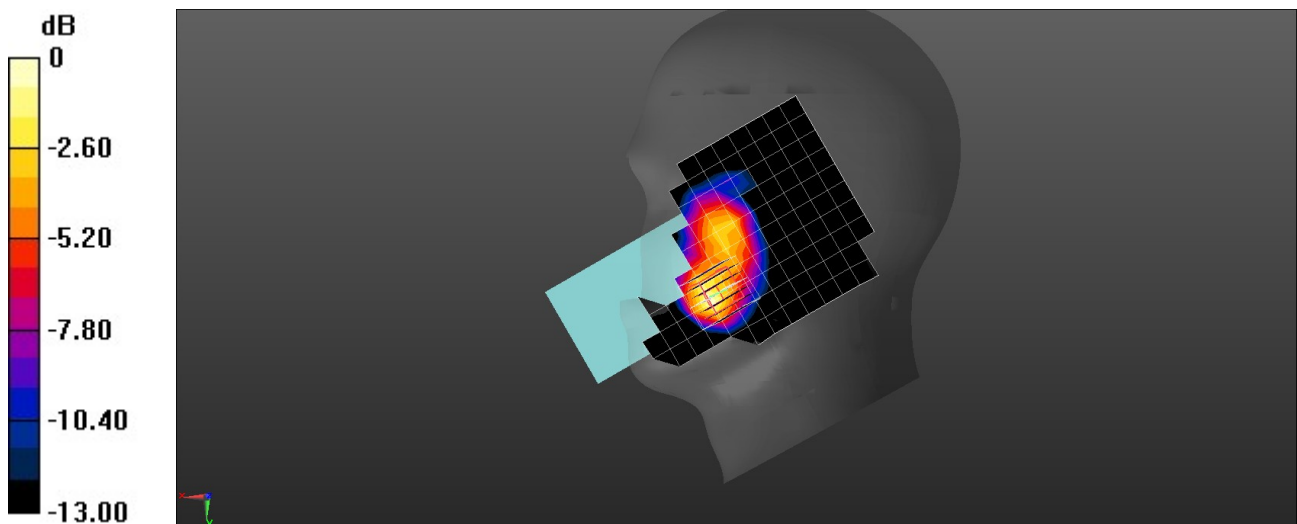

0 dB = 0.873 W/kg = -0.59 dBW/kg

Test Laboratory: SGS-SAR Lab

NR Band n30 10M QPSK 1RB1 Ch462000 Back side 10mm

Communication System: UID 0, NR (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300; Medium parameters used: $f = 2310$ MHz; $\sigma = 1.638$ S/m; $\epsilon_r = 39.02$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.21, 8.21, 8.21); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x15x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.13 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.70 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.753 W/kg; SAR(10 g) = 0.408 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.8%

Maximum value of SAR (measured) = 1.14 W/kg

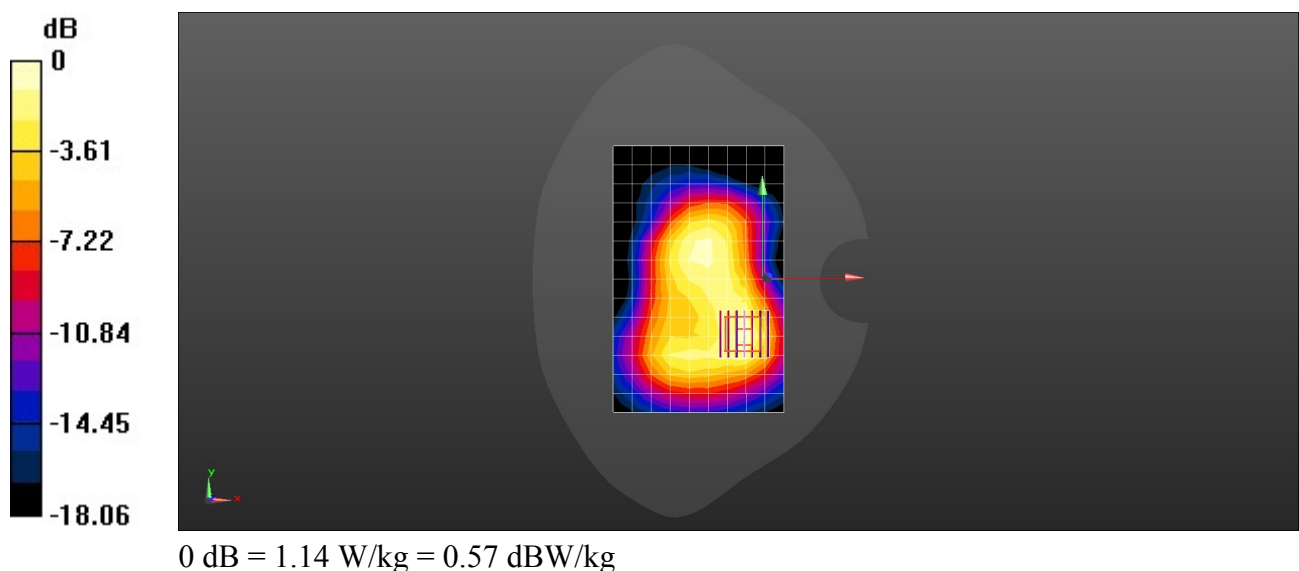

Test Laboratory: SGS-SAR Lab

NR Band n30 10M QPSK 1RB1 Ch462000 Left side 0mm

Communication System: UID 0, NR (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300; Medium parameters used: $f = 2310$ MHz; $\sigma = 1.638$ S/m; $\epsilon_r = 39.02$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.21, 8.21, 8.21); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x22x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 9.18 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.94 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 21.0 W/kg

SAR(1 g) = 6.08 W/kg; SAR(10 g) = 2.13 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 14.8 W/kg

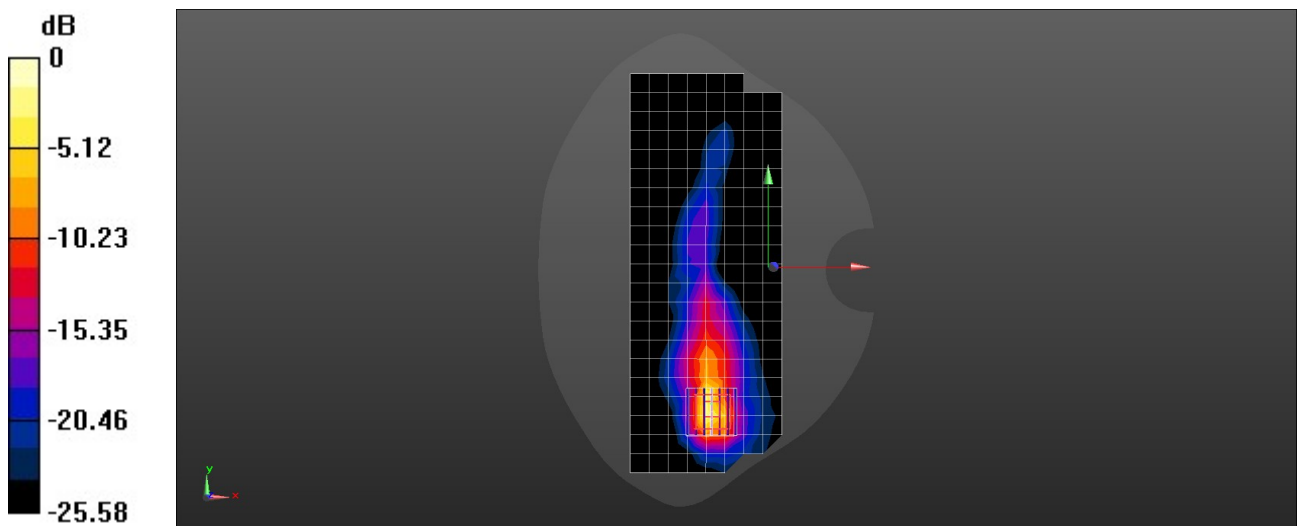

Test Laboratory: SGS-SAR Lab

NR Band n41 100M QPSK 1RB1 Ch518598 Right cheek

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 38.001$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.06 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.612 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.750 W/kg; SAR(10 g) = 0.398 W/kg

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 57.6%

Maximum value of SAR (measured) = 1.11 W/kg

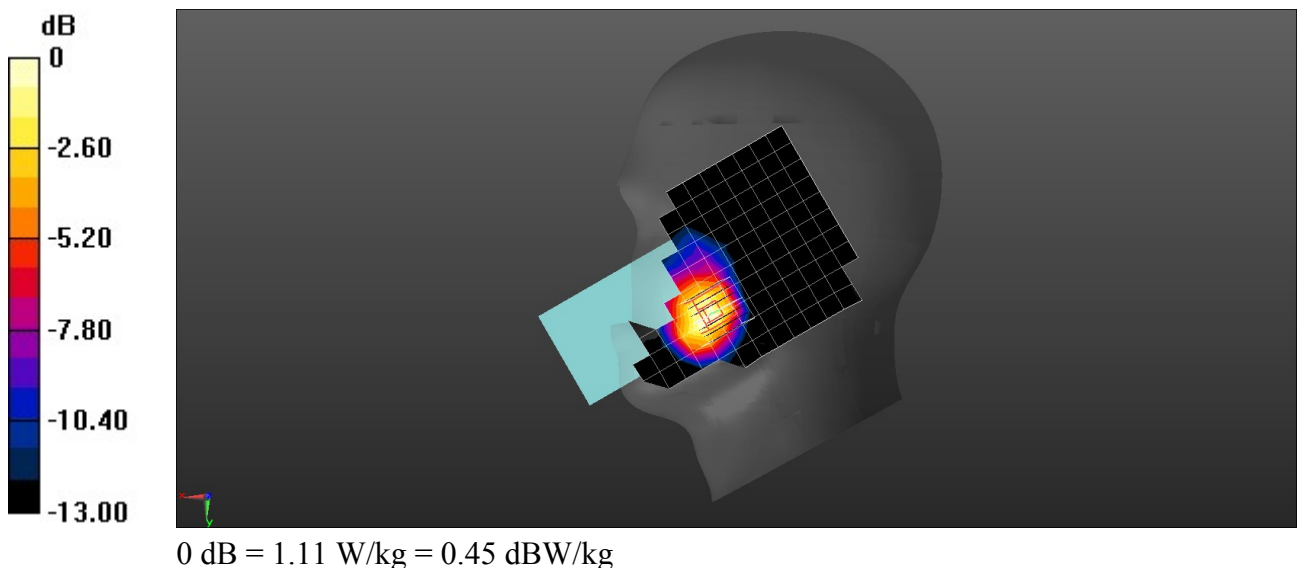

Test Laboratory: SGS-SAR Lab

NR Band n41 100M QPSK 1RB1 Ch518598 Back side 10mm

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 38.001$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x15x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.07 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.44 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.204 W/kg

Smallest distance from peaks to all points 3 dB below = 16.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.6%

Maximum value of SAR (measured) = 1.15 W/kg

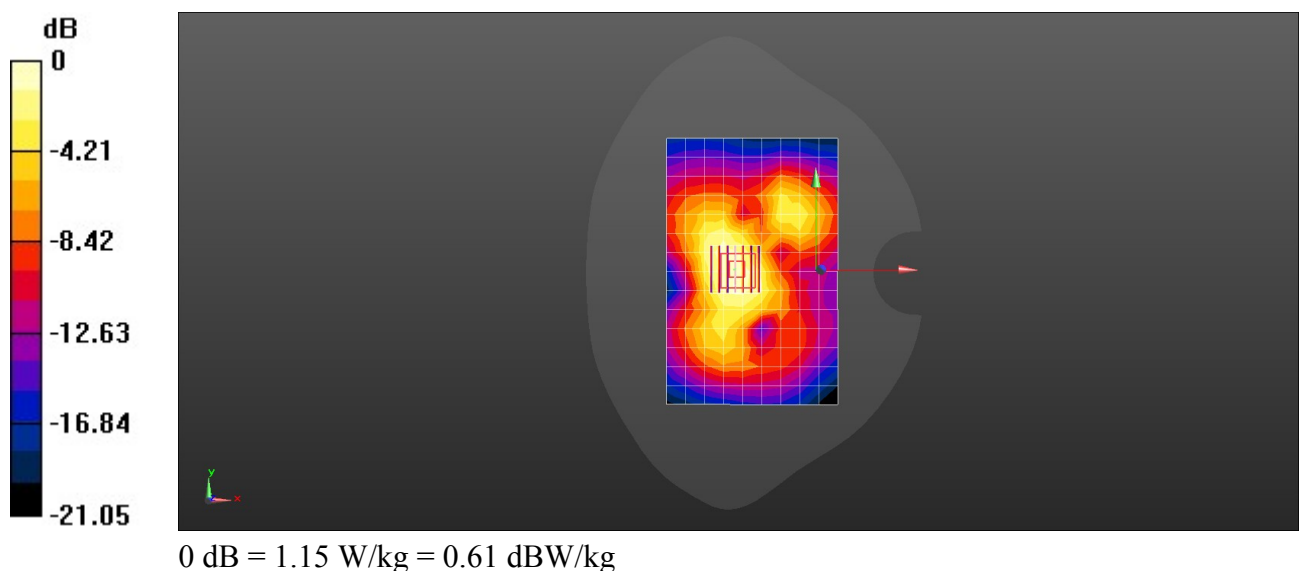

Test Laboratory: SGS-SAR Lab

NR Band n41 100M QPSK 1RB1 Ch518598 Left side 0mm

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 38.001$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x22x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 10.0 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 14.77 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 41.8 W/kg
SAR(1 g) = 7.13 W/kg; SAR(10 g) = 1.82 W/kg
Smallest distance from peaks to all points 3 dB below = 8 mm
Ratio of SAR at M2 to SAR at M1 = 48.1%
Maximum value of SAR (measured) = 27.5 W/kg

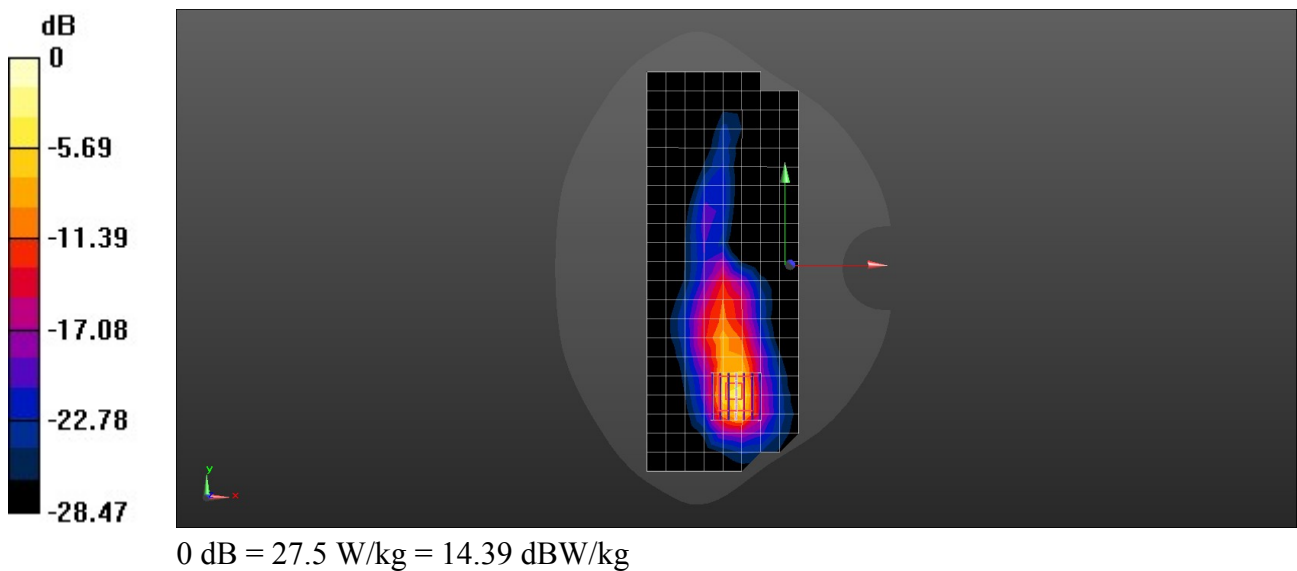

Test Laboratory: SGS-SAR Lab

NR Band n48 40M QPSK 1RB1 Ch641666 Left cheek

Communication System: UID 0, NR (0); Frequency: 3624.99 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3625$ MHz; $\sigma = 3.155$ S/m; $\epsilon_r = 38.201$; $\rho = 1000$ kg/m³


Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(6.95, 6.95, 6.95); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (13x22x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.66 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0.6750 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 2.65 W/kg
SAR(1 g) = 0.881 W/kg; SAR(10 g) = 0.310 W/kg
Smallest distance from peaks to all points 3 dB below = 5.7 mm
Ratio of SAR at M2 to SAR at M1 = 73.9%
Maximum value of SAR (measured) = 1.79 W/kg

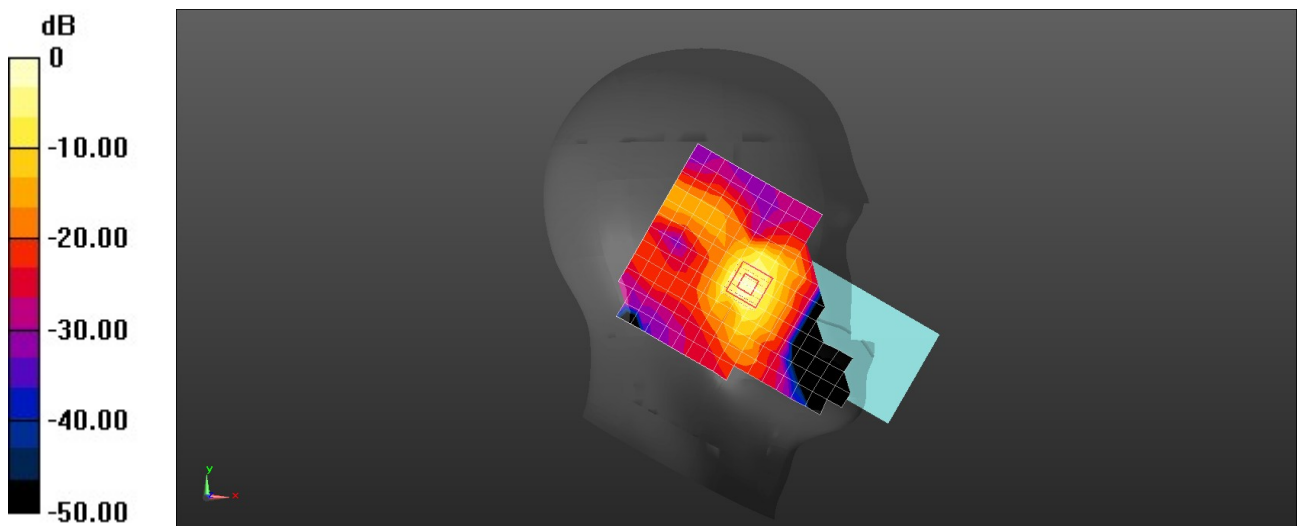

0 dB = 1.79 W/kg = 2.53 dBW/kg

Test Laboratory: SGS-SAR Lab

NR Band n48 40M QPSK 1RB1 Ch641666 Back side 10mm

Communication System: UID 0, NR (0); Frequency: 3624.99 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3625$ MHz; $\sigma = 3.155$ S/m; $\epsilon_r = 38.201$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(6.95, 6.95, 6.95); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (12x18x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.19 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 4.888 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 1.62 W/kg
SAR(1 g) = 0.779 W/kg; SAR(10 g) = 0.354 W/kg
Smallest distance from peaks to all points 3 dB below = 10.7 mm
Ratio of SAR at M2 to SAR at M1 = 77.3%
Maximum value of SAR (measured) = 1.23 W/kg

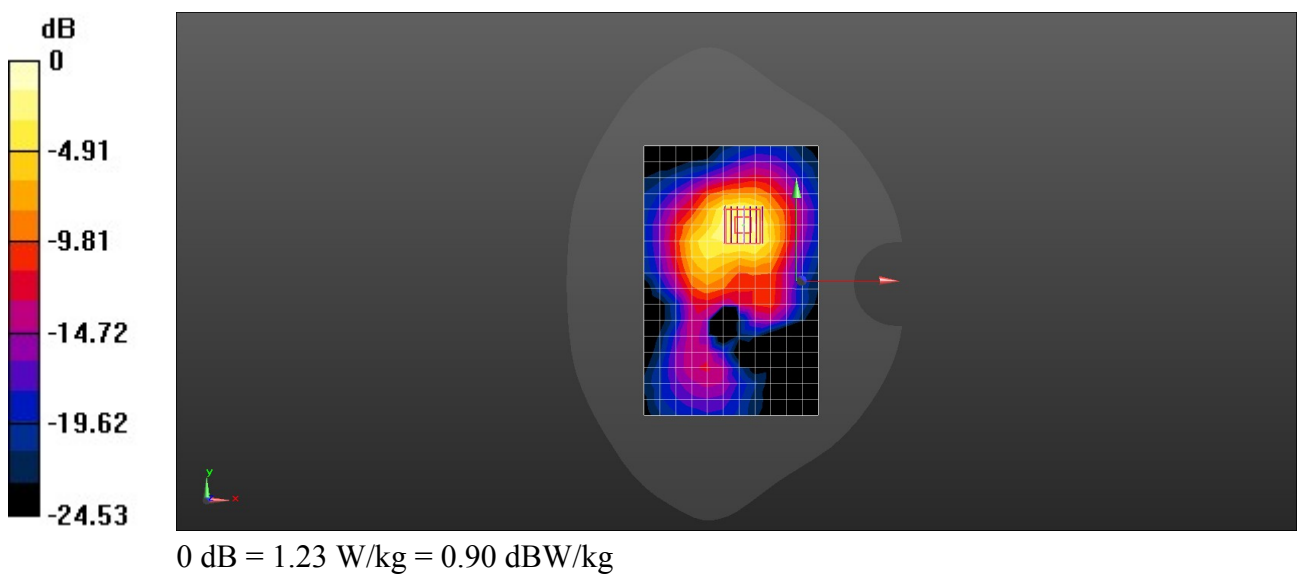

Test Laboratory: SGS-SAR Lab

NR Band n48 40M QPSK 1RB1 Ch641666 Back side 0mm

Communication System: UID 0, NR (0); Frequency: 3624.99 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3625$ MHz; $\sigma = 3.155$ S/m; $\epsilon_r = 38.201$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(6.95, 6.95, 6.95); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (11x27x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 3.65 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 28.04 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 5.46 W/kg

SAR(1 g) = 1.86 W/kg; SAR(10 g) = 0.736 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 77.8%

Maximum value of SAR (measured) = 4.19 W/kg

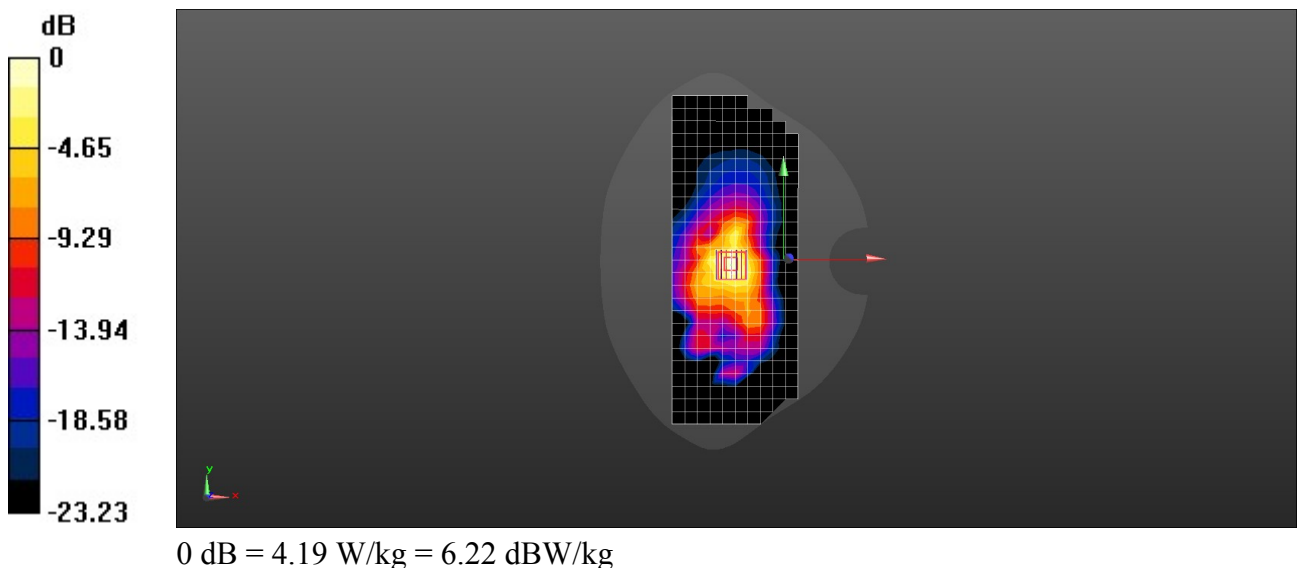

Test Laboratory: SGS-SAR Lab

NR Band n66 30M QPSK 1RB1 Ch349000 Right Cheek

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.313$ S/m; $\epsilon_r = 38.951$; $\rho = 1000$ kg/m³


Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.78, 8.78, 8.78); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.233 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.5910 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.532 W/kg
SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.091 W/kg
Smallest distance from peaks to all points 3 dB below = 8.2 mm
Ratio of SAR at M2 to SAR at M1 = 45.1%
Maximum value of SAR (measured) = 0.384 W/kg

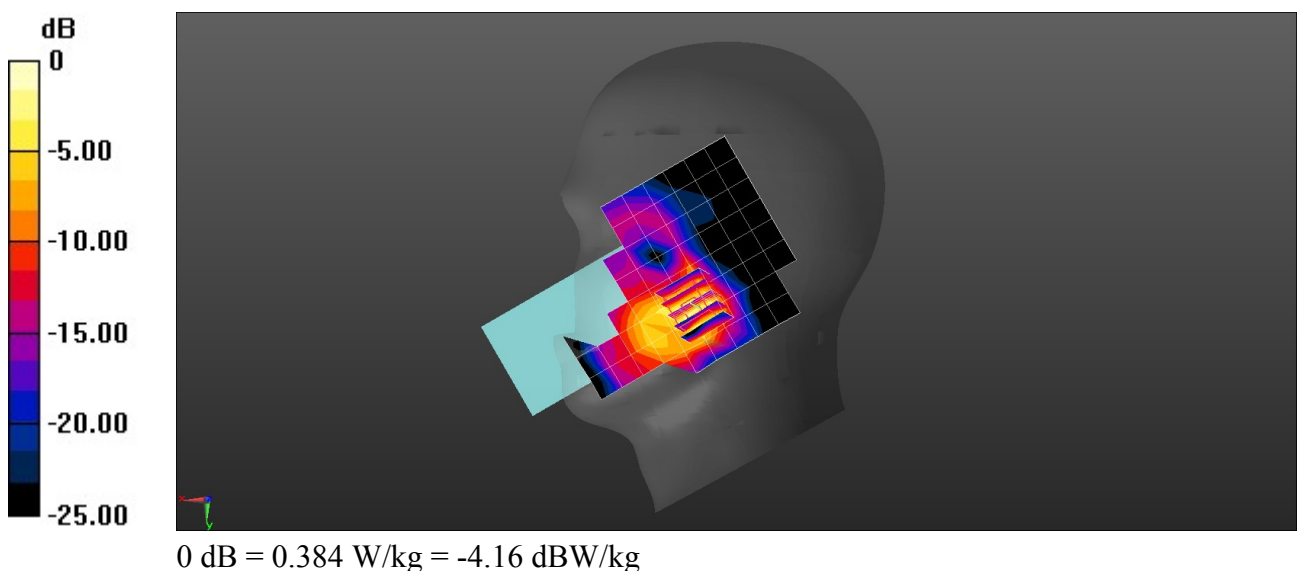

Test Laboratory: SGS-SAR Lab

NR Band n66 30M QPSK 1RB1 Ch349000 Back side 10mm

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.313$ S/m; $\epsilon_r = 38.951$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.78, 8.78, 8.78); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.852 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.615 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 1.19 W/kg
SAR(1 g) = 0.792 W/kg; SAR(10 g) = 0.387 W/kg
Smallest distance from peaks to all points 3 dB below = 11.2 mm
Ratio of SAR at M2 to SAR at M1 = 53.6%
Maximum value of SAR (measured) = 0.980 W/kg

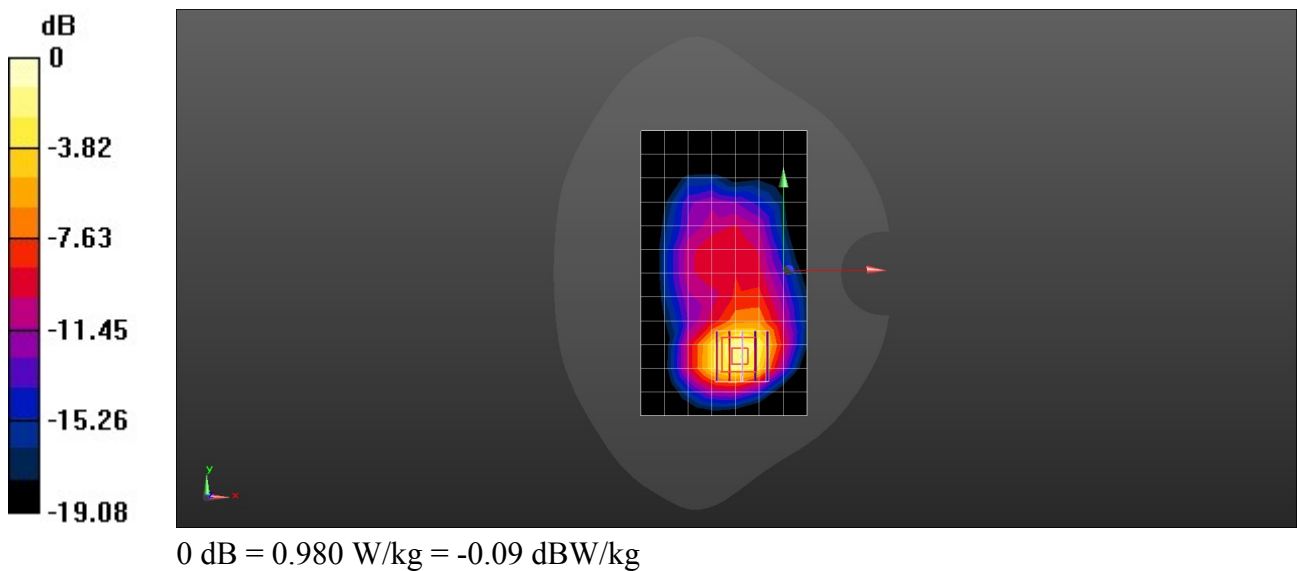

Test Laboratory: SGS-SAR Lab

NR Band n66 30M QPSK 1RB1 Ch349000 Left side 0mm

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.313$ S/m; $\epsilon_r = 38.951$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.78, 8.78, 8.78); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x18x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 5.47 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.16 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 11.2 W/kg
SAR(1 g) = 3.47 W/kg; SAR(10 g) = 1.49 W/kg
Smallest distance from peaks to all points 3 dB below = 8.2 mm
Ratio of SAR at M2 to SAR at M1 = 46.2%
Maximum value of SAR (measured) = 7.82 W/kg

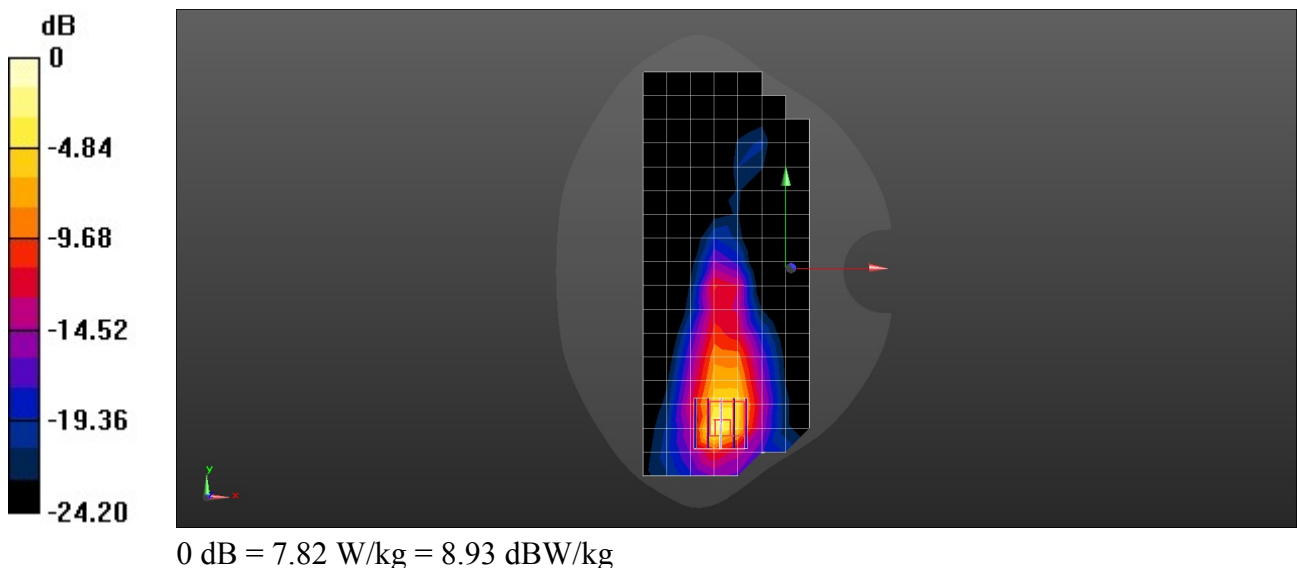

Test Laboratory: SGS-SAR Lab

NR Band n71 20M QPSK 1RB1 Ch136100 Front side 35mm

Communication System: UID 0, NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.847$ S/m; $\epsilon_r = 42.937$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.54, 10.54, 10.54); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x18x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0636 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.014 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.0710 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.035 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 68.9%

Maximum value of SAR (measured) = 0.0625 W/kg

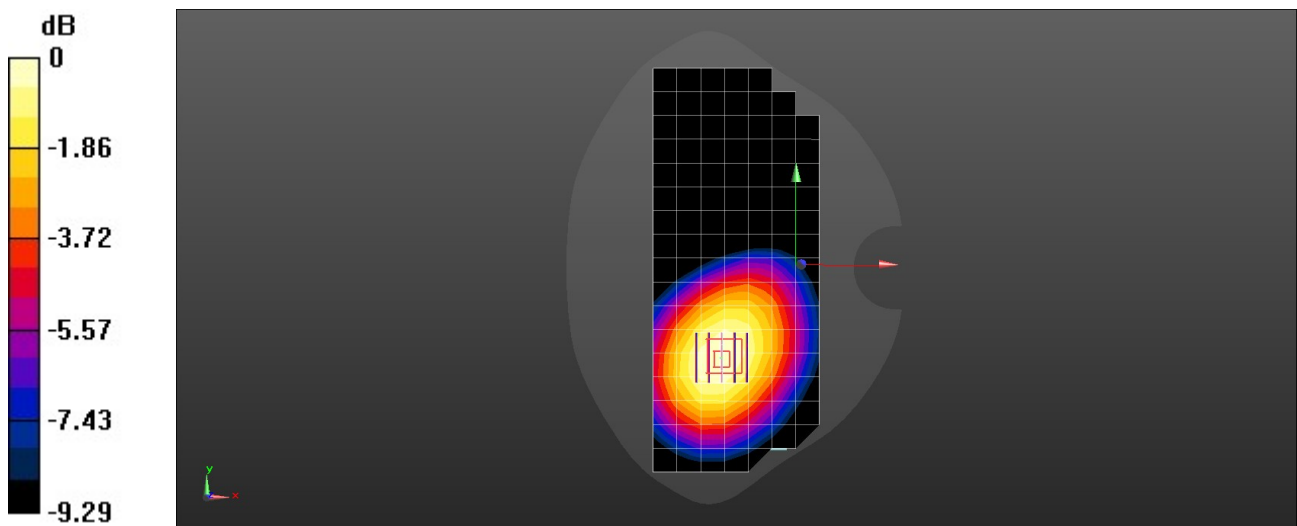

0 dB = 0.0625 W/kg = -12.04 dBW/kg

Test Laboratory: SGS-SAR Lab

NR Band n71 20M QPSK 1RB1 Ch136100 Back side 10mm

Communication System: UID 0, NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.847$ S/m; $\epsilon_r = 42.937$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.54, 10.54, 10.54); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.530 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 18.80 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.626 W/kg
SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.291 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 65.7%
Maximum value of SAR (measured) = 0.543 W/kg

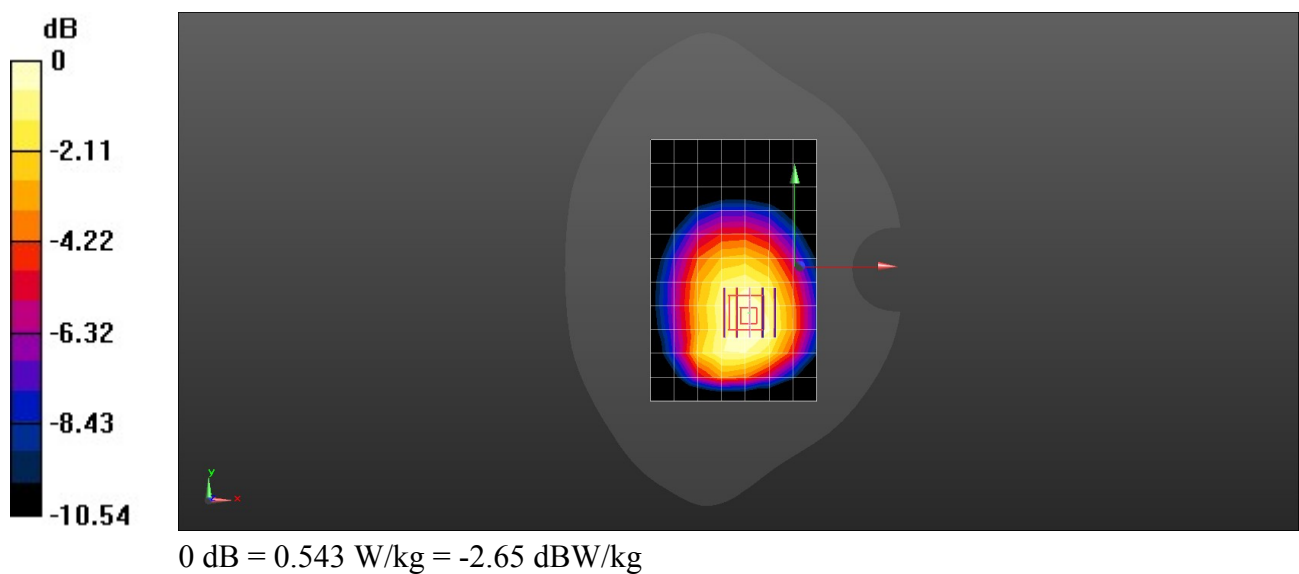

Test Laboratory: SGS-SAR Lab

NR Band n71 20M QPSK 1RB1 Ch136100 Back side 0mm

Communication System: UID 0, NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.847$ S/m; $\epsilon_r = 42.937$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.54, 10.54, 10.54); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x18x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.94 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.948 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 4.22 W/kg
SAR(1 g) = 0.975 W/kg; SAR(10 g) = 0.393 W/kg
Smallest distance from peaks to all points 3 dB below = 8.8 mm
Ratio of SAR at M2 to SAR at M1 = 40.8%
Maximum value of SAR (measured) = 2.59 W/kg

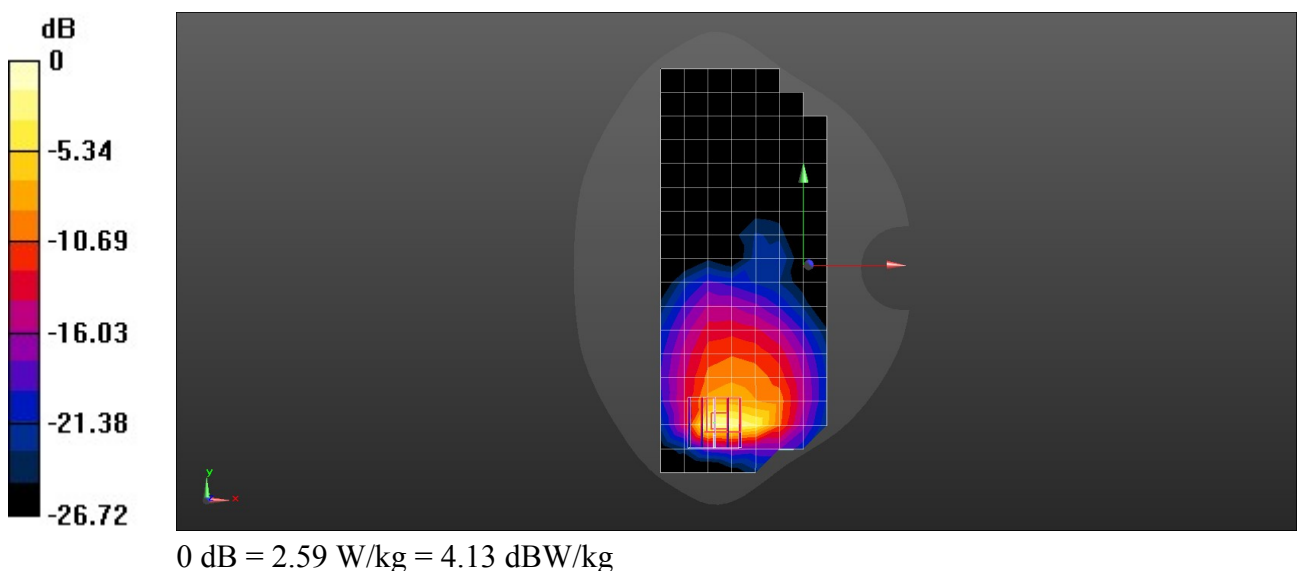

Test Laboratory: SGS-SAR Lab

NR Band n77 100M QPSK 1RB1 Ch650000 Right cheek

Communication System: UID 0, NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.297$ S/m; $\epsilon_r = 37.806$; $\rho = 1000$ kg/m³


Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(6.95, 6.95, 6.95); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (13x22x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.54 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0.5120 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 3.44 W/kg
SAR(1 g) = 0.800 W/kg; SAR(10 g) = 0.268 W/kg
Smallest distance from peaks to all points 3 dB below = 6.7 mm
Ratio of SAR at M2 to SAR at M1 = 71.5%
Maximum value of SAR (measured) = 2.36 W/kg

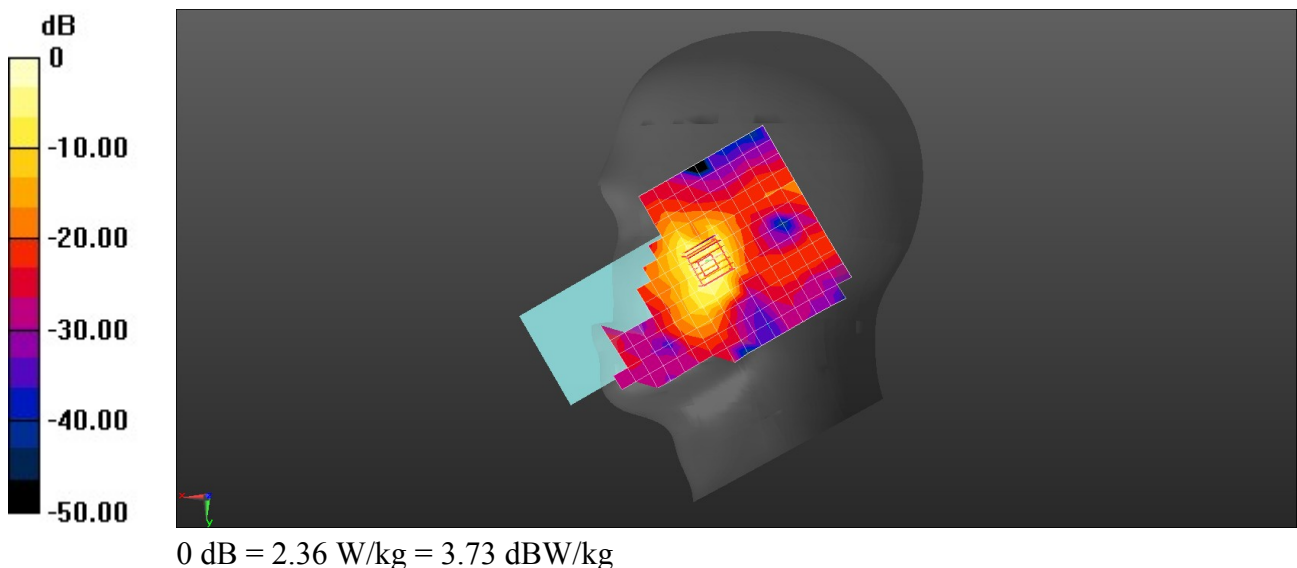

Test Laboratory: SGS-SAR Lab

NR Band n77 100M QPSK 1RB1 Ch650000 Front side 10mm

Communication System: UID 0, NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.297$ S/m; $\epsilon_r = 37.806$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(6.95, 6.95, 6.95); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x27x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 3.10 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.860 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 0.837 W/kg; SAR(10 g) = 0.339 W/kg

Smallest distance from peaks to all points 3 dB below = 13.8 mm

Ratio of SAR at M2 to SAR at M1 = 79.6%

Maximum value of SAR (measured) = 2.82 W/kg

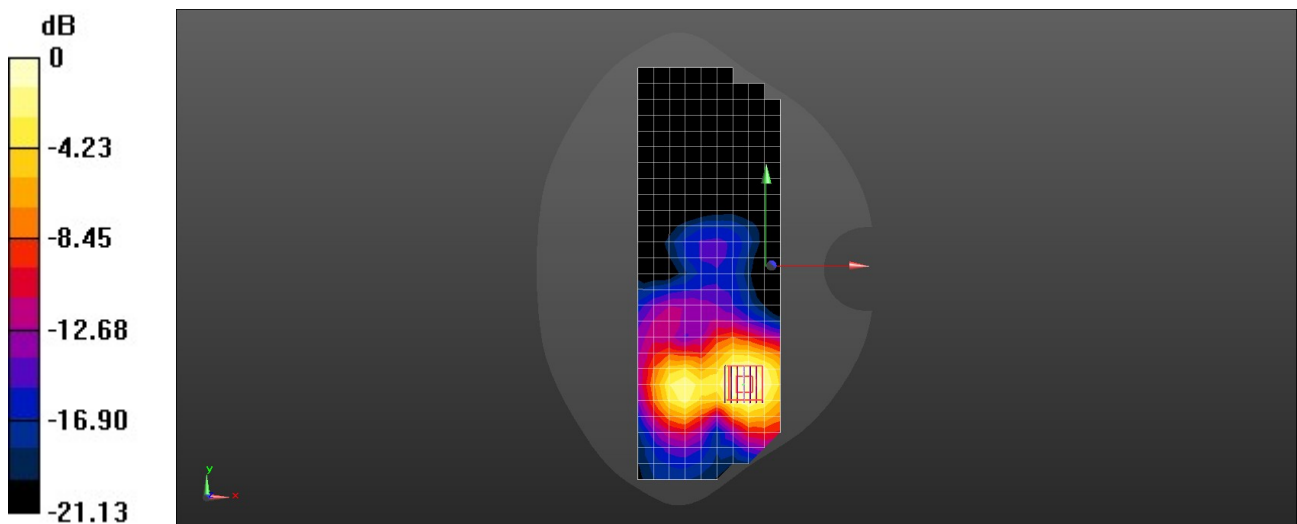

Test Laboratory: SGS-SAR Lab

NR Band n77 100M QPSK 1RB1 Ch650000 Front side 0mm

Communication System: UID 0, NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.297$ S/m; $\epsilon_r = 37.806$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(6.95, 6.95, 6.95); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x27x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 11.7 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 1.174 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 13.8 W/kg
SAR(1 g) = 4.2 W/kg; SAR(10 g) = 1.34 W/kg
Smallest distance from peaks to all points 3 dB below = 8 mm
Ratio of SAR at M2 to SAR at M1 = 78.3%
Maximum value of SAR (measured) = 10.7 W/kg

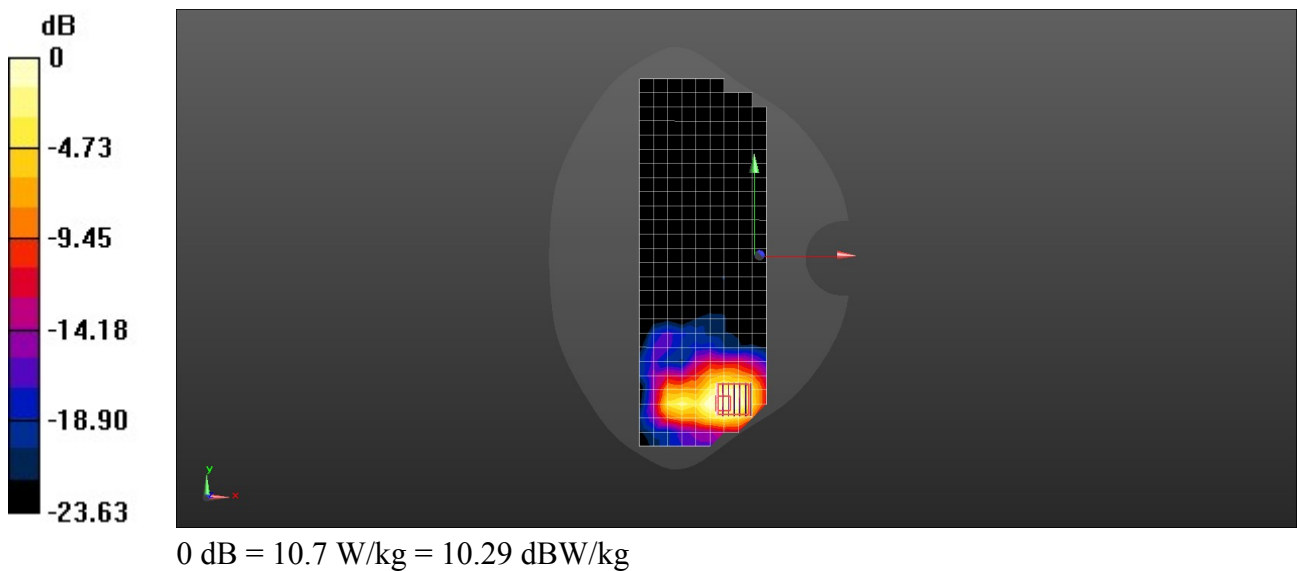

Test Laboratory: SGS-SAR Lab

Wi-Fi 2.4G 802.11b Ch1 Left cheek

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz;Duty Cycle: 1:1.012

Medium: HSL2450;Medium parameters used: $f = 2412$ MHz; $\sigma = 1.742$ S/m; $\epsilon_r = 38.678$; $\rho = 1000$ kg/m³


Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.95, 7.95, 7.95); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.101 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.797 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 0.135 W/kg
SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.036 W/kg
Smallest distance from peaks to all points 3 dB below = 10.3 mm
Ratio of SAR at M2 to SAR at M1 = 54.7%
Maximum value of SAR (measured) = 0.111 W/kg

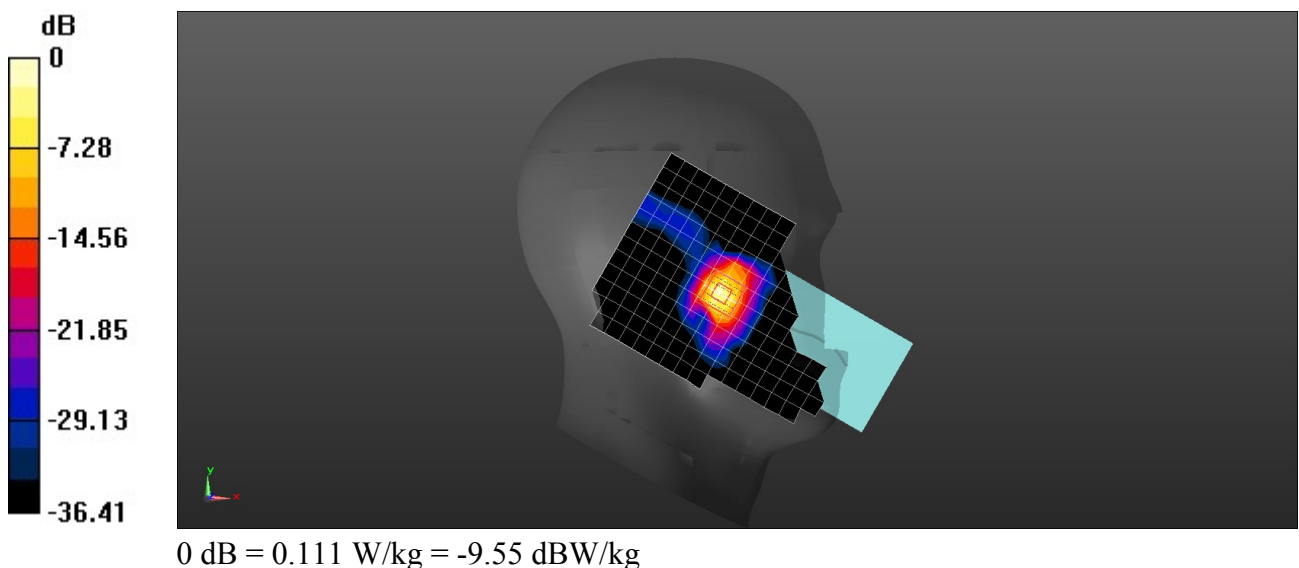

Test Laboratory: SGS-SAR Lab

Wi-Fi 2.4G 802.11b Ch1 Back side 10mm

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz; Duty Cycle: 1:1.012

Medium: HSL2450; Medium parameters used: $f = 2412$ MHz; $\sigma = 1.742$ S/m; $\epsilon_r = 38.678$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.95, 7.95, 7.95); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x15x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.0481 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.064 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.0580 W/kg
SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.014 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 45%
Maximum value of SAR (measured) = 0.0498 W/kg

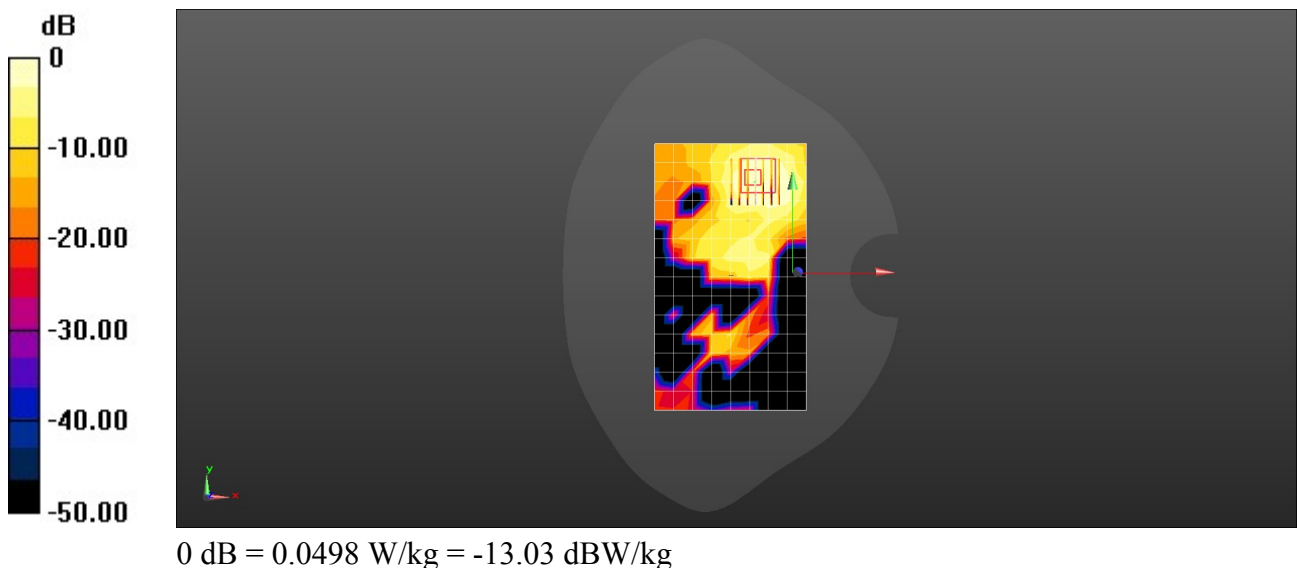

Test Laboratory: SGS-SAR Lab

Wi-Fi 2.4G 802.11b Ch1 Left side 0mm

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz;Duty Cycle: 1:1.012

Medium: HSL2450;Medium parameters used: $f = 2412$ MHz; $\sigma = 1.742$ S/m; $\epsilon_r = 38.678$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.95, 7.95, 7.95); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x22x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.228 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 7.031 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.704 W/kg
SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.057 W/kg
Smallest distance from peaks to all points 3 dB below = 5.1 mm
Ratio of SAR at M2 to SAR at M1 = 50%
Maximum value of SAR (measured) = 0.438 W/kg

