

Test Laboratory: SGS-SAR Lab

LTE Band 71 20M QPSK 1RB0 Ch133322 Back side 10mm

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 683 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 683$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 43.128$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.54, 10.54, 10.54); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.0716 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.475 V/m; Power Drift = 0.17 dB
Peak SAR (extrapolated) = 0.115 W/kg
SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.031 W/kg
Smallest distance from peaks to all points 3 dB below = 12.4 mm
Ratio of SAR at M2 to SAR at M1 = 46.6%
Maximum value of SAR (measured) = 0.0879 W/kg

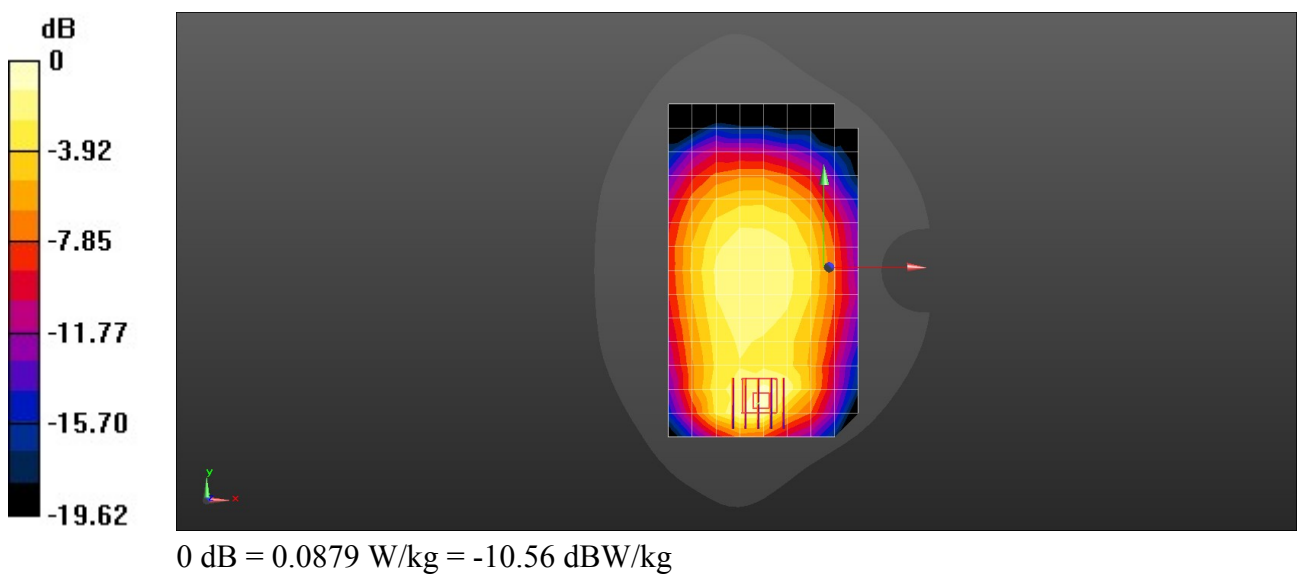

Test Laboratory: SGS-SAR Lab

5G NR n5 20M QPSK 1RB1 Ch167300 Right cheek

Communication System: UID 0, NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 42.075$; $\rho = 1000$ kg/m³


Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.09, 10.09, 10.09); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.134 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.047 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.151 W/kg
SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.088 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 75.9%
Maximum value of SAR (measured) = 0.136 W/kg

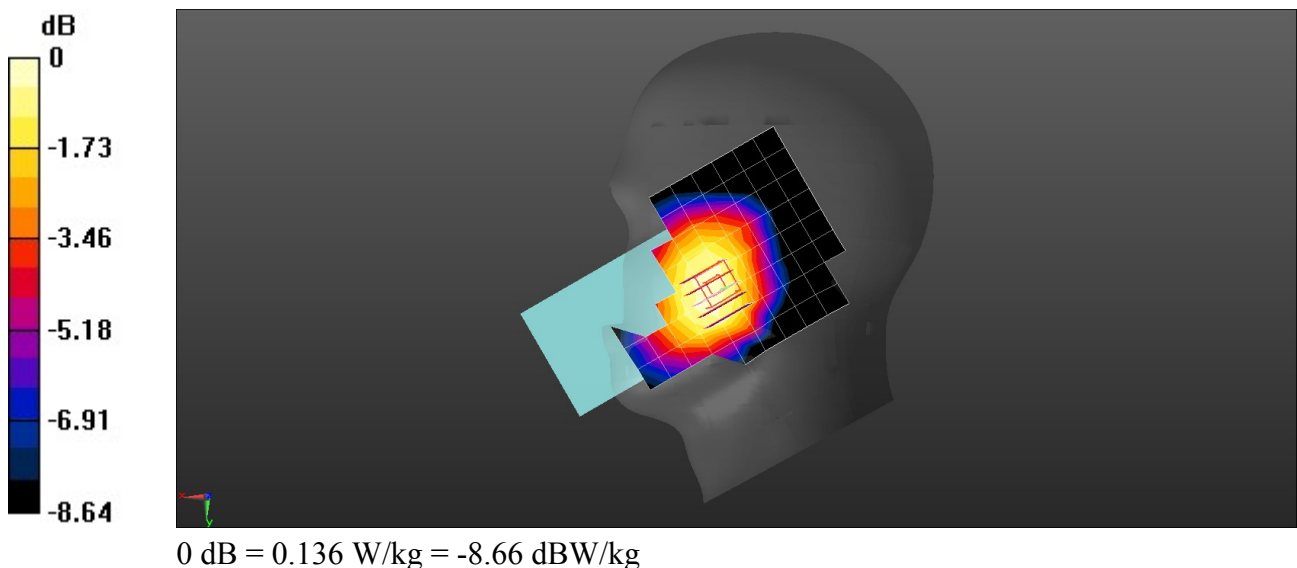

Test Laboratory: SGS-SAR Lab

5G NR n5 20M QPSK 50RB28 Ch167300 Back side 10mm

Communication System: UID 0, NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 42.075$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.09, 10.09, 10.09); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.411 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.96 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 0.601 W/kg
SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.177 W/kg
Smallest distance from peaks to all points 3 dB below = 10.7 mm
Ratio of SAR at M2 to SAR at M1 = 51.7%
Maximum value of SAR (measured) = 0.476 W/kg

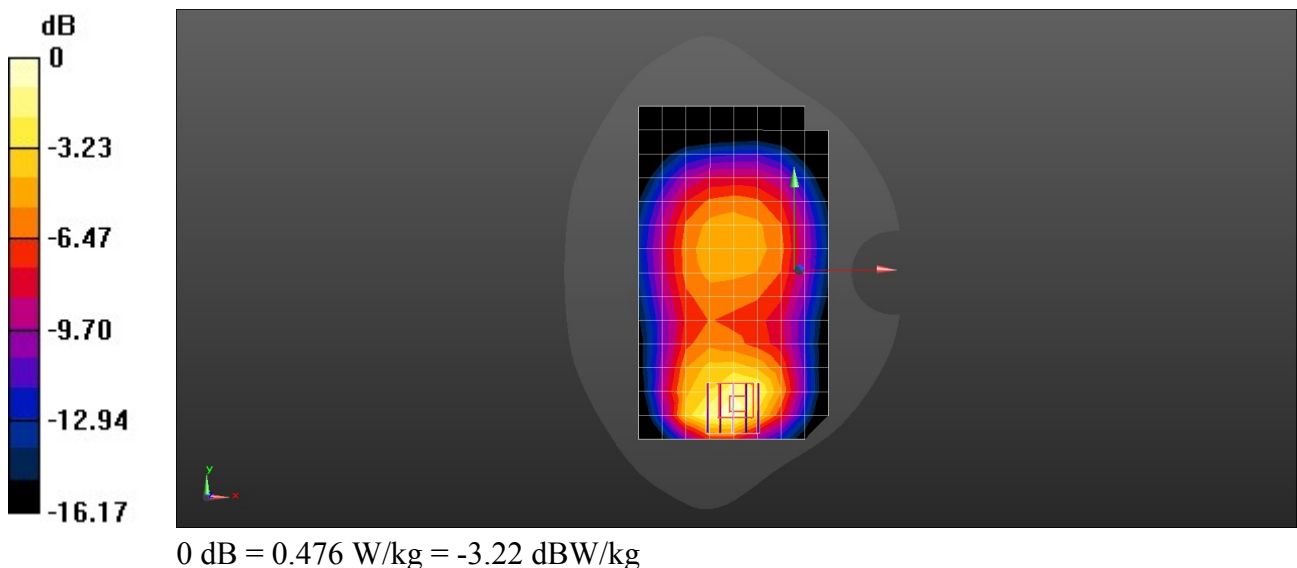

Test Laboratory: SGS-SAR Lab

5G NR n7 20M QPSK 1RB1 Ch507000 Right cheek

Communication System: UID 0, NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.877$ S/m; $\epsilon_r = 38.637$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.08 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.955 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 0.932 W/kg; SAR(10 g) = 0.448 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.4%

Maximum value of SAR (measured) = 1.42 W/kg

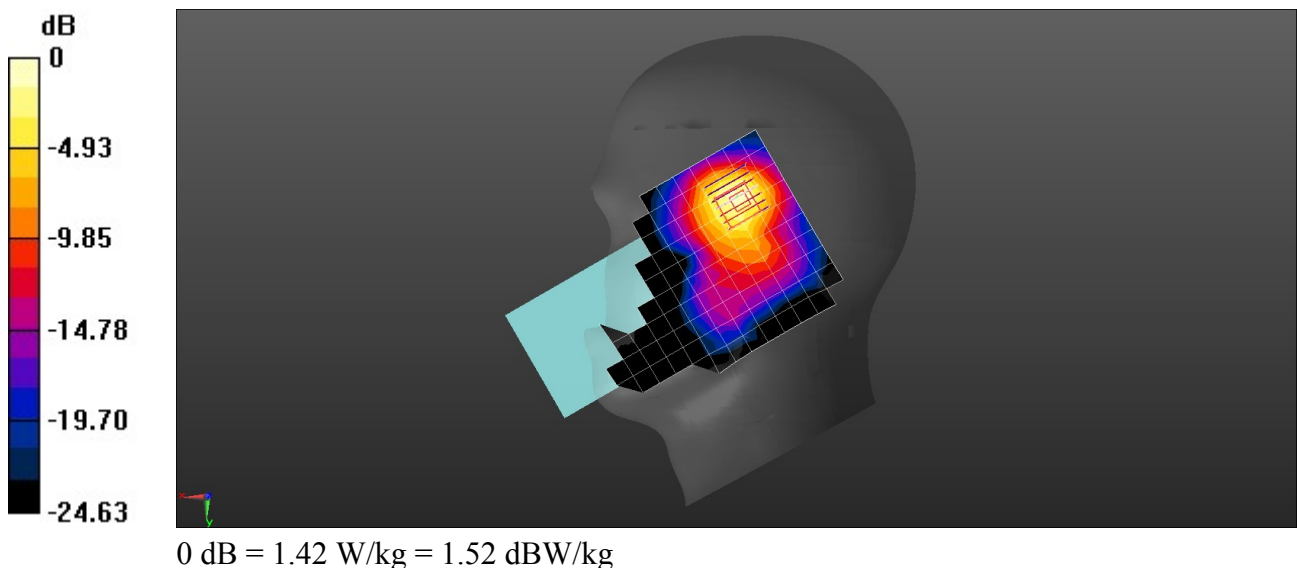

Test Laboratory: SGS-SAR Lab

5G NR n7 20M QPSK 1RB1 Ch507000 Back side 10mm

Communication System: UID 0, NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.877$ S/m; $\epsilon_r = 38.637$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.15 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.725 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.736 W/kg; SAR(10 g) = 0.358 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 47.6%

Maximum value of SAR (measured) = 1.20 W/kg

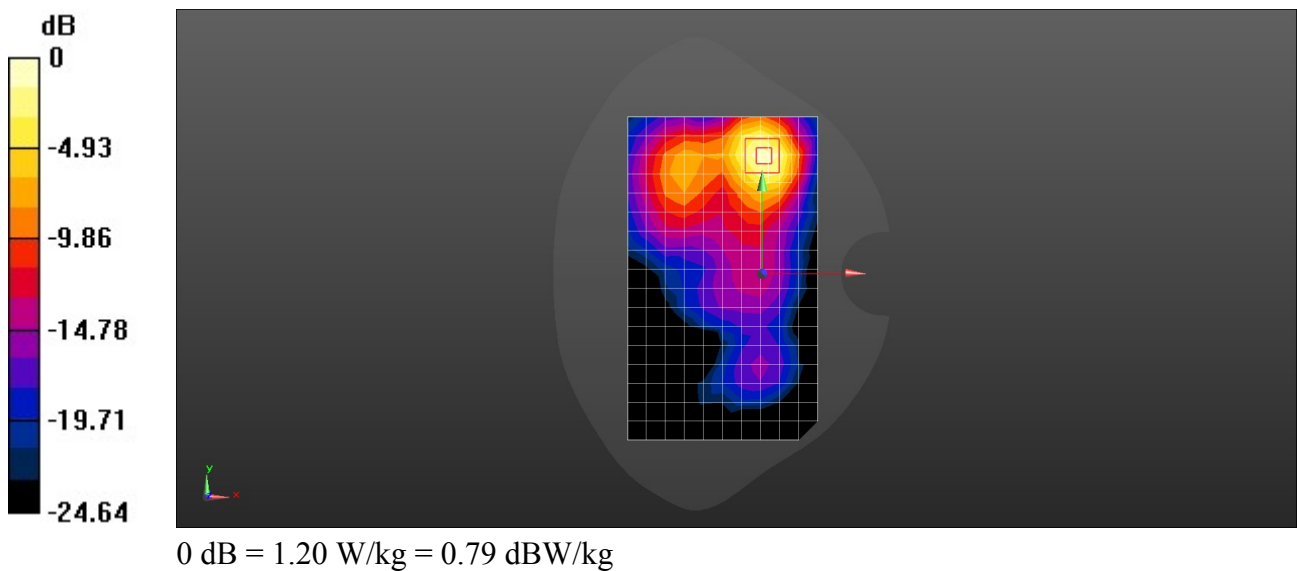

Test Laboratory: SGS-SAR Lab

5G NR n14 10M QPSK 1RB1 Ch158600 Right cheek

Communication System: UID 0, NR (0); Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 793$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 41.853$; $\rho = 1000$ kg/m³


Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.54, 10.54, 10.54); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.0588 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.452 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.0660 W/kg
SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.038 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 76.2%
Maximum value of SAR (measured) = 0.0593 W/kg

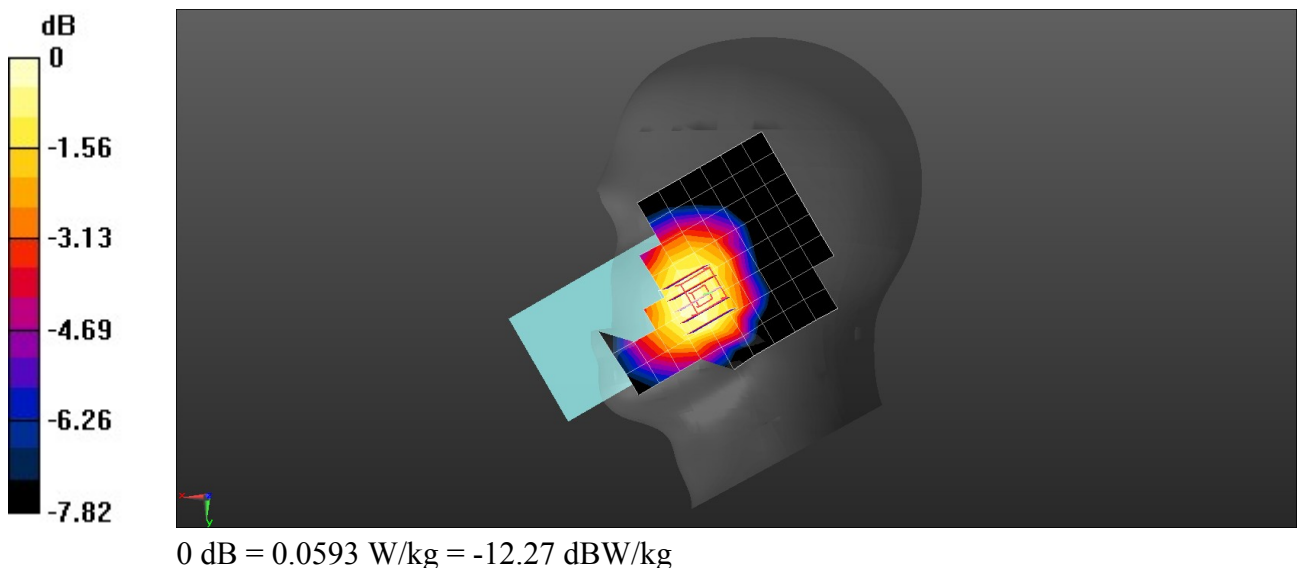

Test Laboratory: SGS-SAR Lab

5G NR n14 10M QPSK 1RB1 Ch158600 Back side 10mm

Communication System: UID 0, NR (0); Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 793$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 41.853$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.54, 10.54, 10.54); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.187 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.052 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.256 W/kg
SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.068 W/kg
Smallest distance from peaks to all points 3 dB below = 11.3 mm
Ratio of SAR at M2 to SAR at M1 = 48%
Maximum value of SAR (measured) = 0.190 W/kg

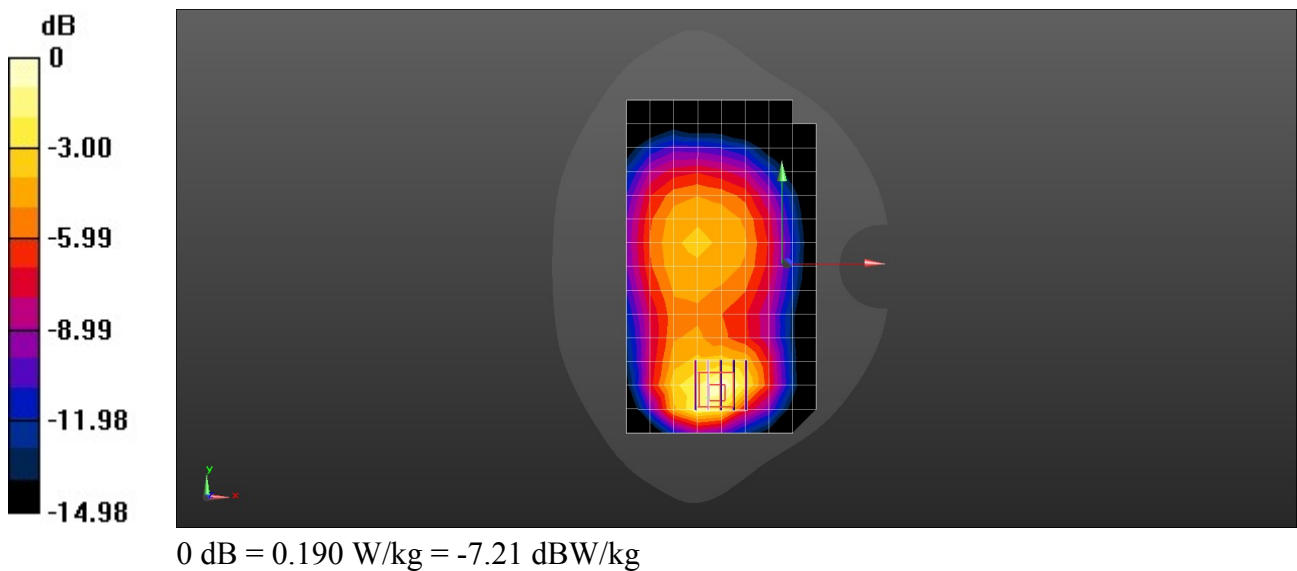

Test Laboratory: SGS-SAR Lab

5G NR n25 20M QPSK 1RB1 Ch376500 Right tilted

Communication System: UID 0, NR (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 40.526$; $\rho = 1000$ kg/m³


Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.43, 8.43, 8.43); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.45 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 24.62 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 2.05 W/kg
SAR(1 g) = 0.914 W/kg; SAR(10 g) = 0.412 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 48%
Maximum value of SAR (measured) = 1.70 W/kg

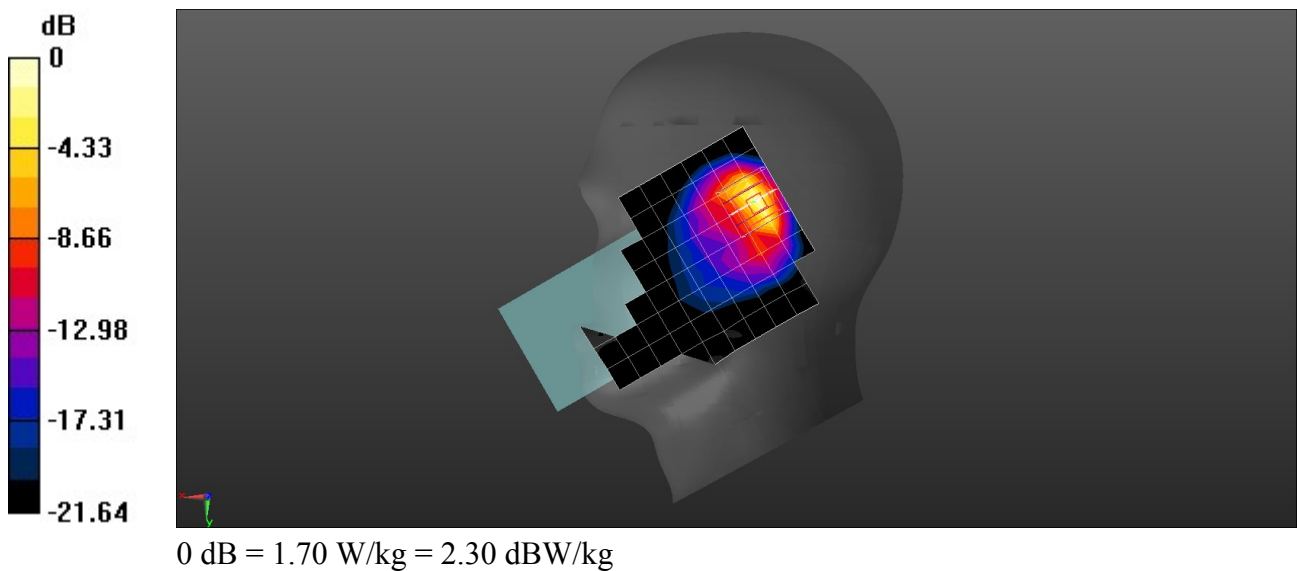

Test Laboratory: SGS-SAR Lab

5G NR n25 20M QPSK 1RB1 Ch376500 Back side 10mm

Communication System: UID 0, NR (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 40.526$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.43, 8.43, 8.43); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.29 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.969 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 1.66 W/kg
SAR(1 g) = 0.894 W/kg; SAR(10 g) = 0.486 W/kg
Smallest distance from peaks to all points 3 dB below = 10.2 mm
Ratio of SAR at M2 to SAR at M1 = 58.1%
Maximum value of SAR (measured) = 1.40 W/kg

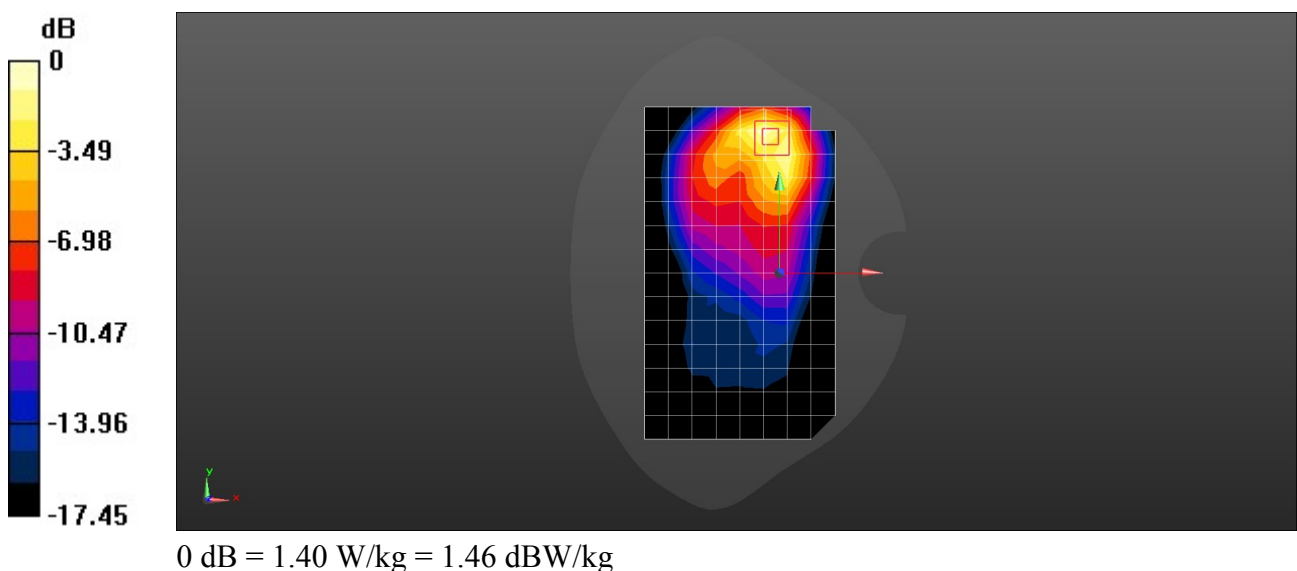

Test Laboratory: SGS-SAR Lab

5G NR n25 20M QPSK 1RB1 Ch376500 Bottom side 10mm

Communication System: UID 0, NR (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 40.526$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.43, 8.43, 8.43); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.30 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.30 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 0.942 W/kg; SAR(10 g) = 0.520 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 58.4%

Maximum value of SAR (measured) = 1.39 W/kg

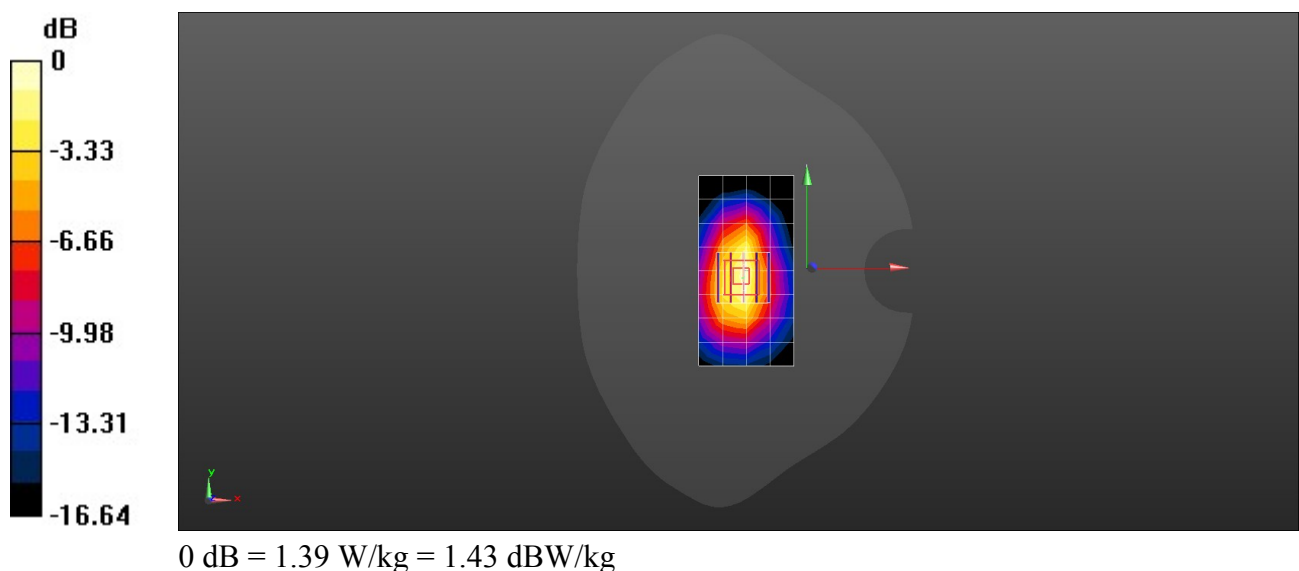

Test Laboratory: SGS-SAR Lab

5G NR n25 20M QPSK 1RB1 Ch376500 Top side 0mm

Communication System: UID 0, NR (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 40.526$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.43, 8.43, 8.43); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.94 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.48 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 16.1 W/kg

SAR(1 g) = 6.54 W/kg; SAR(10 g) = 2.61 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 40.3%

Maximum value of SAR (measured) = 13.1 W/kg

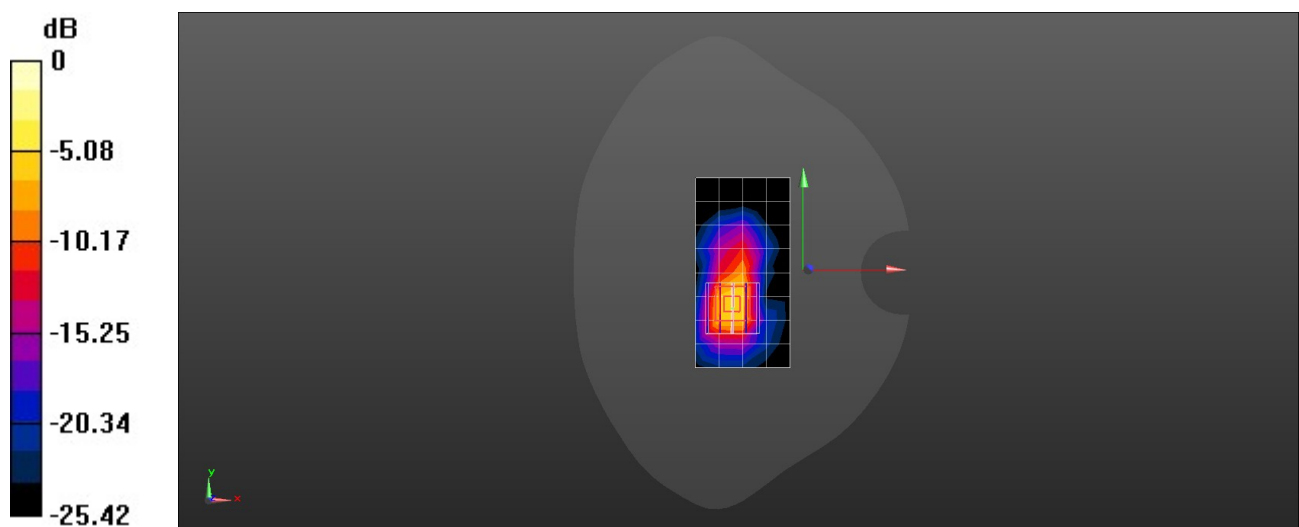

0 dB = 13.1 W/kg = 11.17 dBW/kg

Test Laboratory: SGS-SAR Lab

5G NR n30 10M QPSK 1RB1 Ch462000 Right cheek

Communication System: UID 0, NR (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300; Medium parameters used: $f = 2310$ MHz; $\sigma = 1.624$ S/m; $\epsilon_r = 39.406$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.21, 8.21, 8.21); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 1.32 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.872 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.500 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 1.44 W/kg

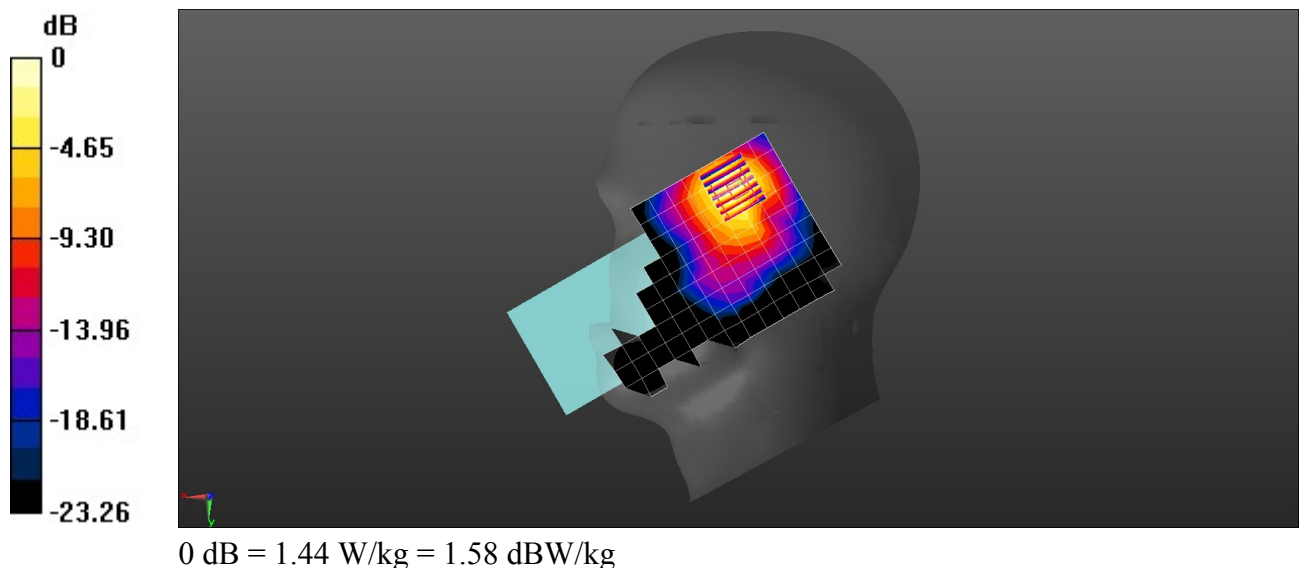

Test Laboratory: SGS-SAR Lab

5G NR n30 10M QPSK 1RB1 Ch462000 Back side 10mm

Communication System: UID 0, NR (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300; Medium parameters used: $f = 2310$ MHz; $\sigma = 1.624$ S/m; $\epsilon_r = 39.406$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.21, 8.21, 8.21); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.42 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.468 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.90 W/kg
SAR(1 g) = 0.914 W/kg; SAR(10 g) = 0.476 W/kg
Smallest distance from peaks to all points 3 dB below = 10 mm
Ratio of SAR at M2 to SAR at M1 = 51.3%
Maximum value of SAR (measured) = 1.55 W/kg

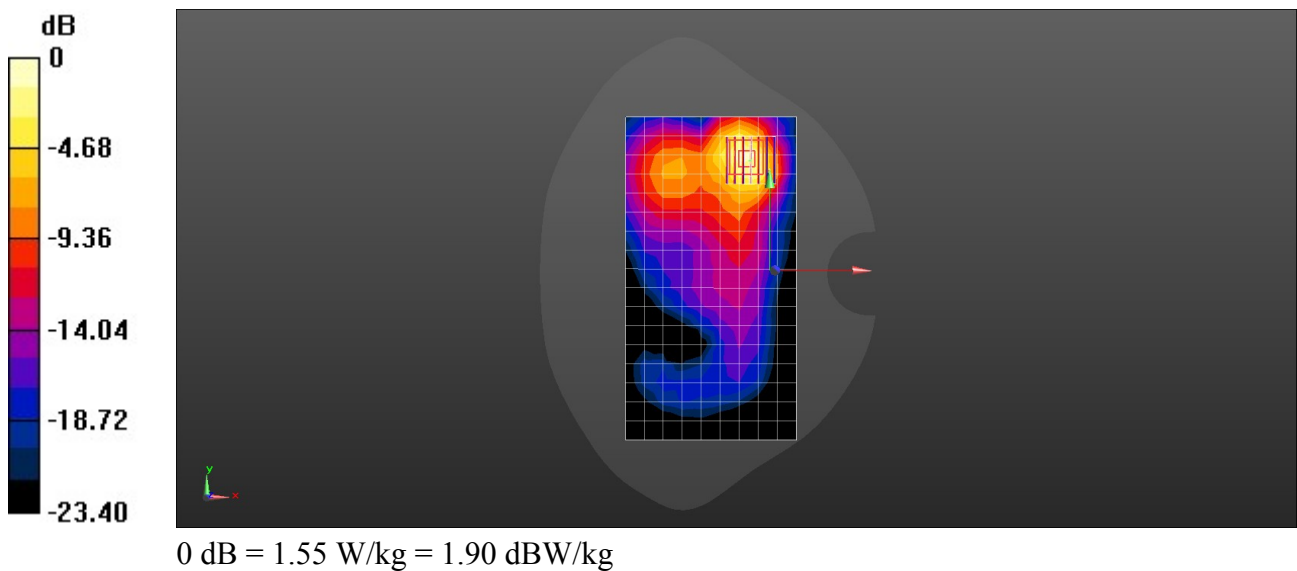

Test Laboratory: SGS-SAR Lab

5G NR n41 100M QPSK 1RB1 Ch518598 Right cheek

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 38.341$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.28 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.612 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 0.910 W/kg; SAR(10 g) = 0.431 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.5%

Maximum value of SAR (measured) = 1.38 W/kg

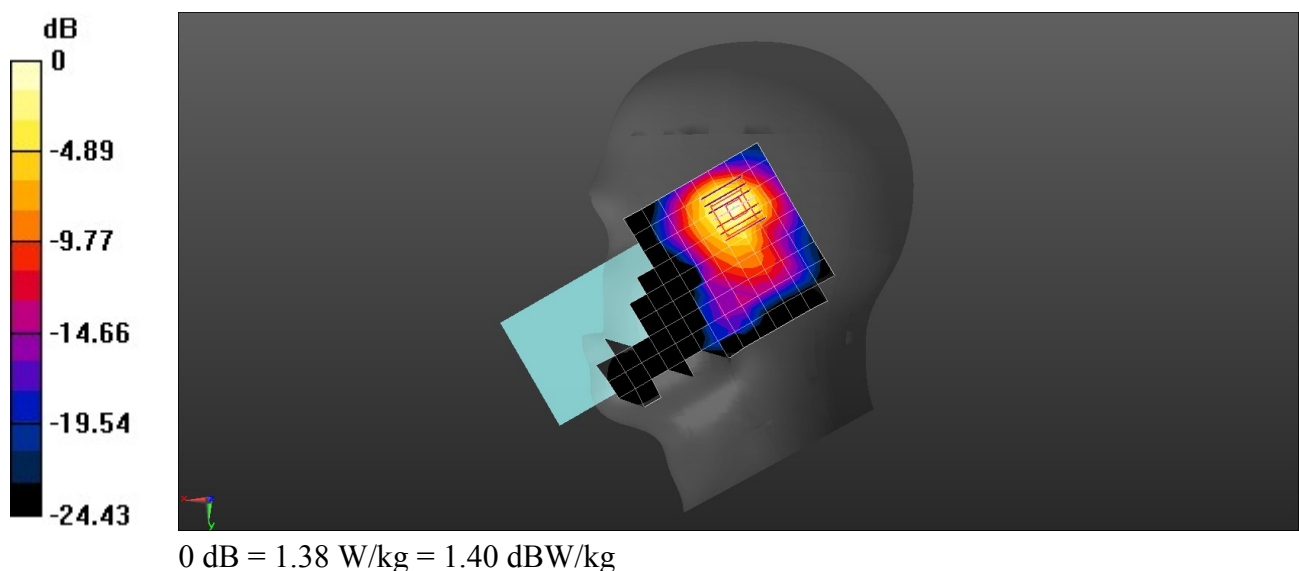

Test Laboratory: SGS-SAR Lab

5G NR n41 100M QPSK 1RB1 Ch518598 Back side 10mm

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 38.341$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x18x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.62 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.452 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 1.87 W/kg
SAR(1 g) = 0.930 W/kg; SAR(10 g) = 0.451 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 51.2%
Maximum value of SAR (measured) = 1.49 W/kg

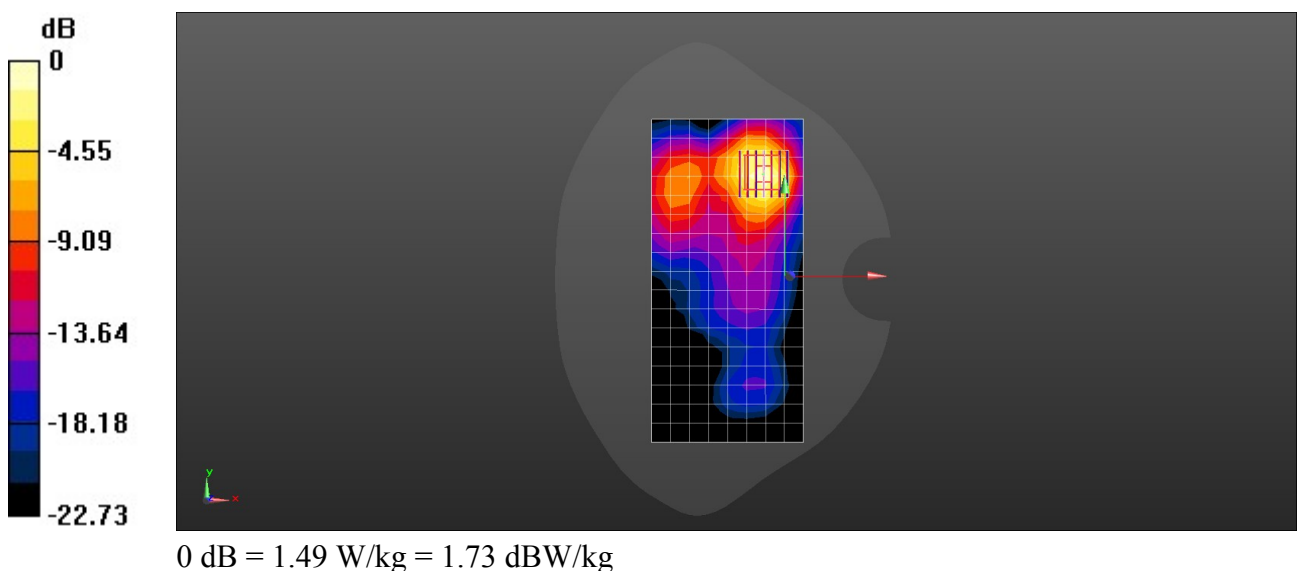

Test Laboratory: SGS-SAR Lab

5G NR n48 40M QPSK 1RB1 Ch641666 Left tilted

Communication System: UID 0, NR (0); Frequency: 3624.99 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3625$ MHz; $\sigma = 2.964$ S/m; $\epsilon_r = 38.856$; $\rho = 1000$ kg/m³


Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(6.95, 6.95, 6.95); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (11x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.44 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 17.73 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 2.62 W/kg
SAR(1 g) = 0.803 W/kg; SAR(10 g) = 0.244 W/kg
Smallest distance from peaks to all points 3 dB below = 4.9 mm
Ratio of SAR at M2 to SAR at M1 = 72.9%
Maximum value of SAR (measured) = 1.83 W/kg

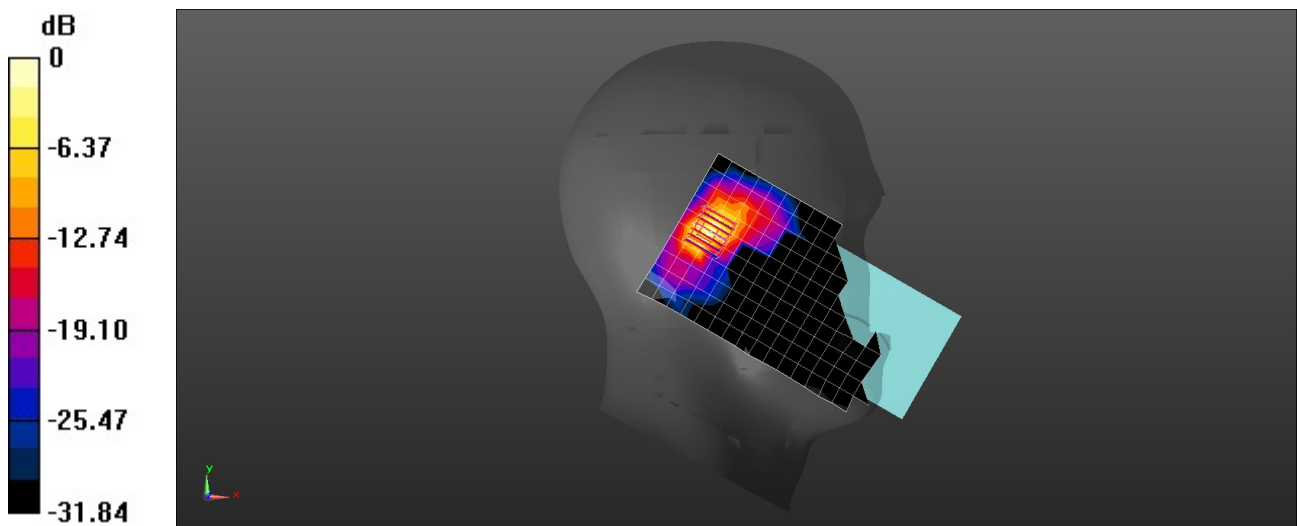

Test Laboratory: SGS-SAR Lab

5G NR n48 40M QPSK 1RB1 Ch641666 Front side 10mm

Communication System: UID 0, NR (0); Frequency: 3624.99 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3625$ MHz; $\sigma = 2.964$ S/m; $\epsilon_r = 38.856$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(6.95, 6.95, 6.95); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (11x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.43 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 1.171 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 1.96 W/kg
SAR(1 g) = 0.778 W/kg; SAR(10 g) = 0.283 W/kg
Smallest distance from peaks to all points 3 dB below = 6.4 mm
Ratio of SAR at M2 to SAR at M1 = 77.4%
Maximum value of SAR (measured) = 1.50 W/kg

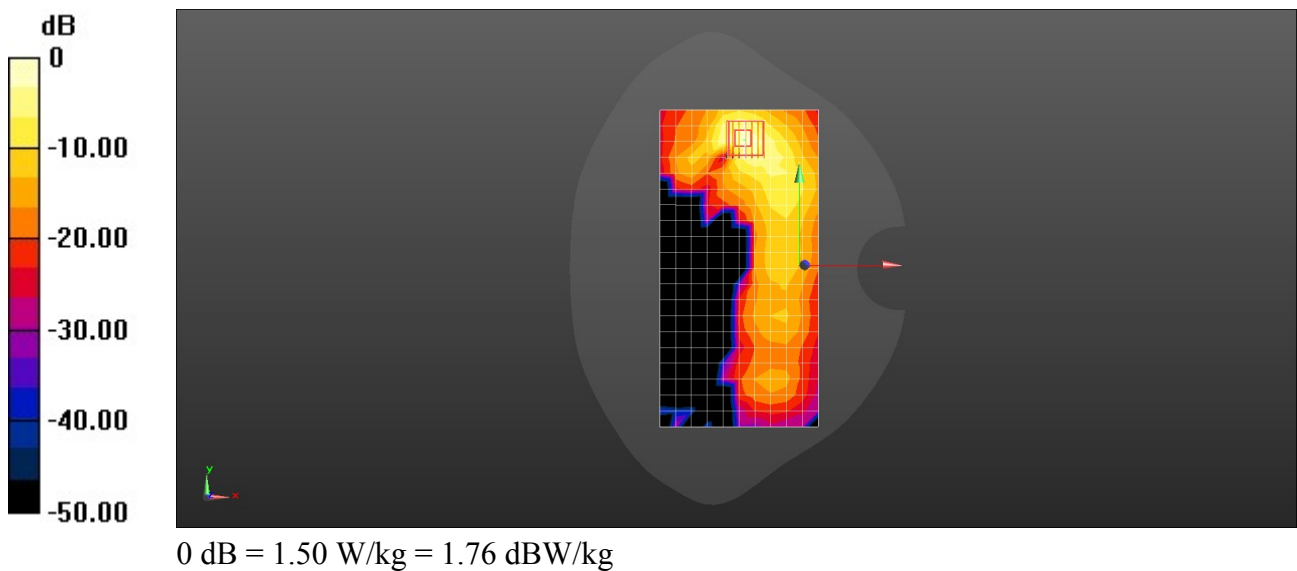

Test Laboratory: SGS-SAR Lab

5G NR n66 30M QPSK 1RB1 Ch349000 Right cheek

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.309$ S/m; $\epsilon_r = 39.059$; $\rho = 1000$ kg/m³


Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.78, 8.78, 8.78); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.15 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 24.05 V/m; Power Drift = 0.17 dB
Peak SAR (extrapolated) = 1.96 W/kg
SAR(1 g) = 0.920 W/kg; SAR(10 g) = 0.470 W/kg
Smallest distance from peaks to all points 3 dB below = 8.2 mm
Ratio of SAR at M2 to SAR at M1 = 48.9%
Maximum value of SAR (measured) = 1.65 W/kg

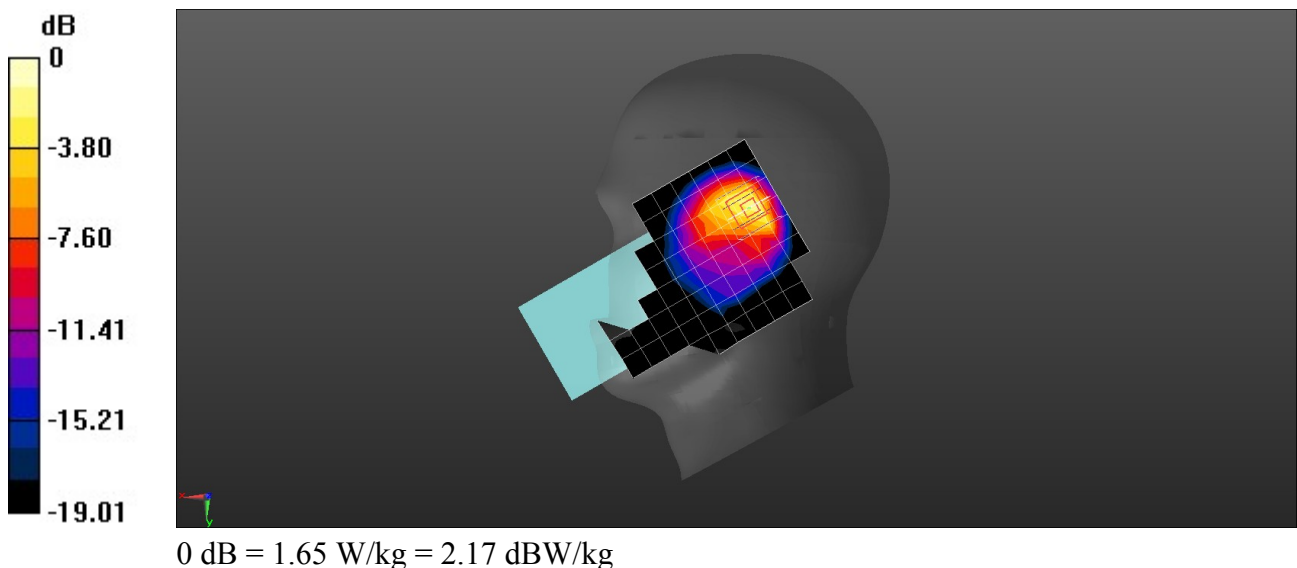

Test Laboratory: SGS-SAR Lab

5G NR n66 30M QPSK 1RB1 Ch349000 Back side 10mm

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.309$ S/m; $\epsilon_r = 39.059$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.78, 8.78, 8.78); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.16 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.782 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 1.44 W/kg
SAR(1 g) = 0.881 W/kg; SAR(10 g) = 0.521 W/kg
Smallest distance from peaks to all points 3 dB below = 12.9 mm
Ratio of SAR at M2 to SAR at M1 = 60.5%
Maximum value of SAR (measured) = 1.22 W/kg

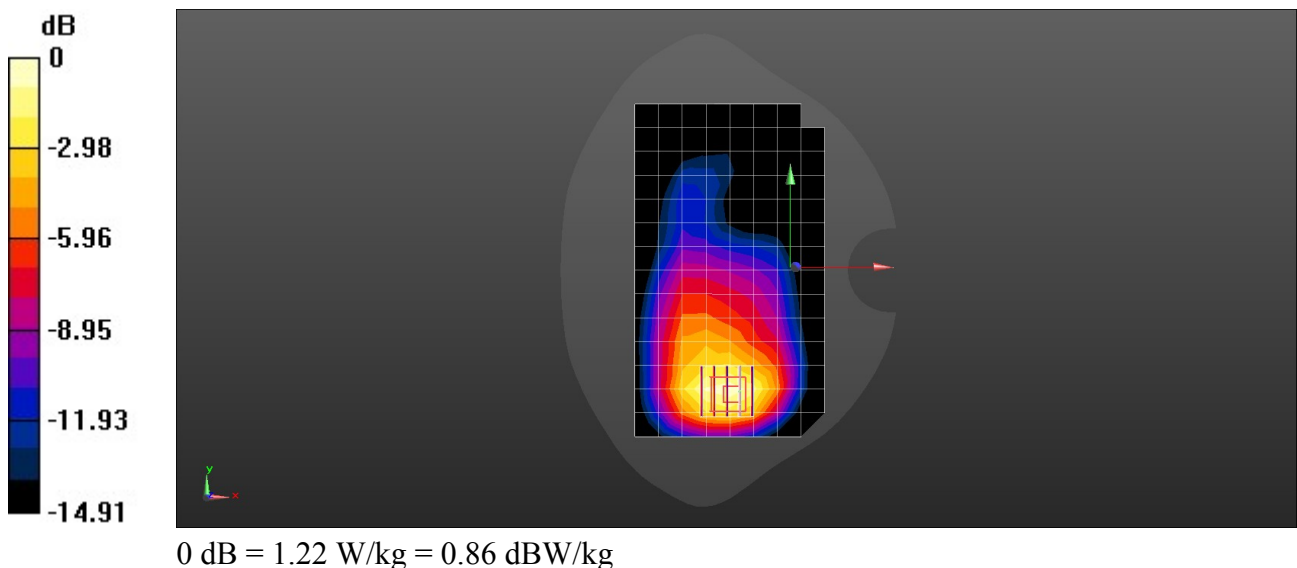

Test Laboratory: SGS-SAR Lab

5G NR n66 30M QPSK 1RB1 Ch349000 Bottom side 10mm

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.309$ S/m; $\epsilon_r = 39.059$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.78, 8.78, 8.78); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.42 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 28.06 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 1.60 W/kg
SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.572 W/kg
Smallest distance from peaks to all points 3 dB below = 11.3 mm
Ratio of SAR at M2 to SAR at M1 = 63.5%
Maximum value of SAR (measured) = 1.41 W/kg

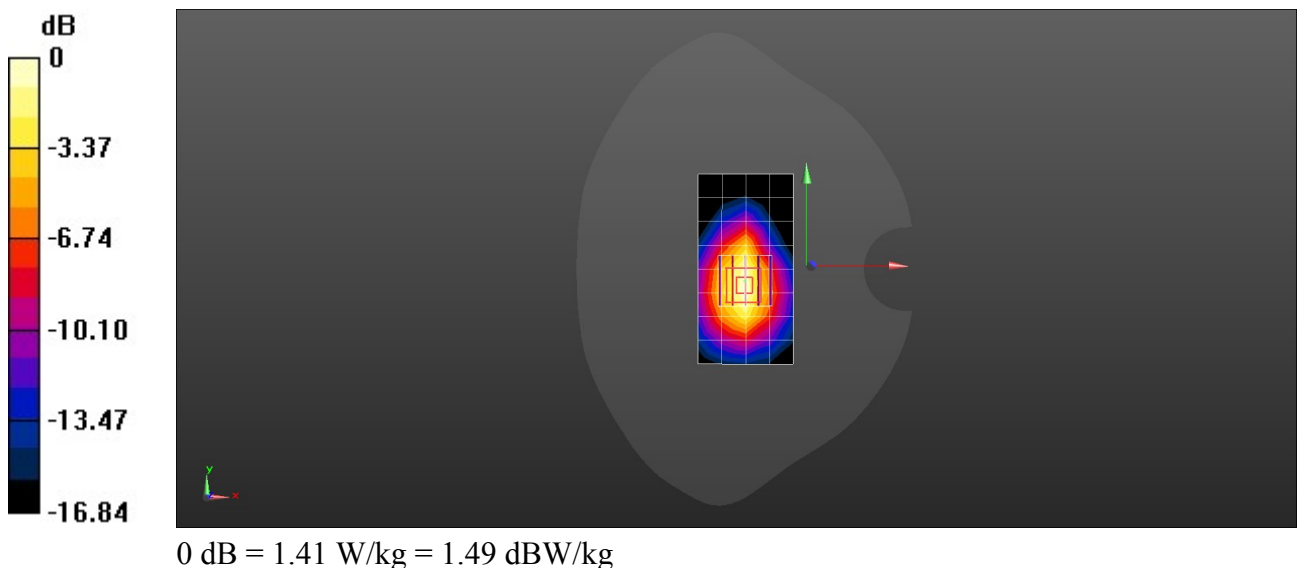

Test Laboratory: SGS-SAR Lab

5G NR n66 30M QPSK 1RB1 Ch349000 Bottom side 0mm

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.309$ S/m; $\epsilon_r = 39.059$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.78, 8.78, 8.78); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 6.94 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 55.49 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 8.17 W/kg
SAR(1 g) = 4.24 W/kg; SAR(10 g) = 2.06 W/kg
Smallest distance from peaks to all points 3 dB below = 8.2 mm
Ratio of SAR at M2 to SAR at M1 = 50.5%
Maximum value of SAR (measured) = 7.12 W/kg

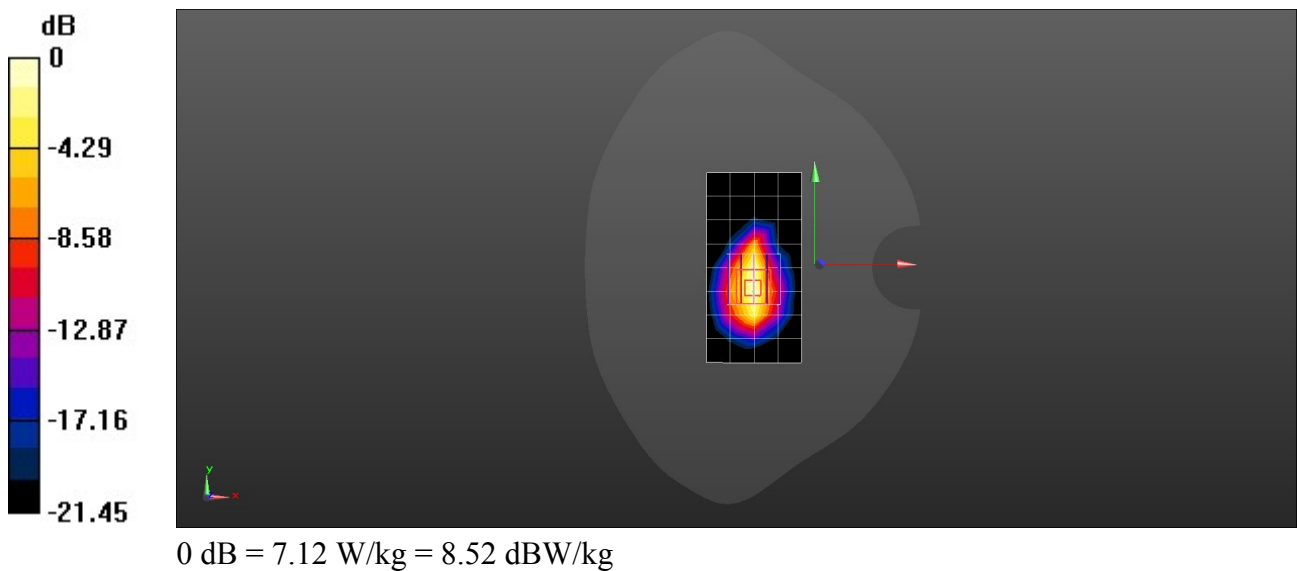

Test Laboratory: SGS-SAR Lab

5G NR n71 20M QPSK 1RB1 Ch136100 Right cheek

Communication System: UID 0, NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.153$; $\rho = 1000$ kg/m³


Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.54, 10.54, 10.54); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.0404 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.425 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.0470 W/kg
SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.026 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 75%
Maximum value of SAR (measured) = 0.0417 W/kg

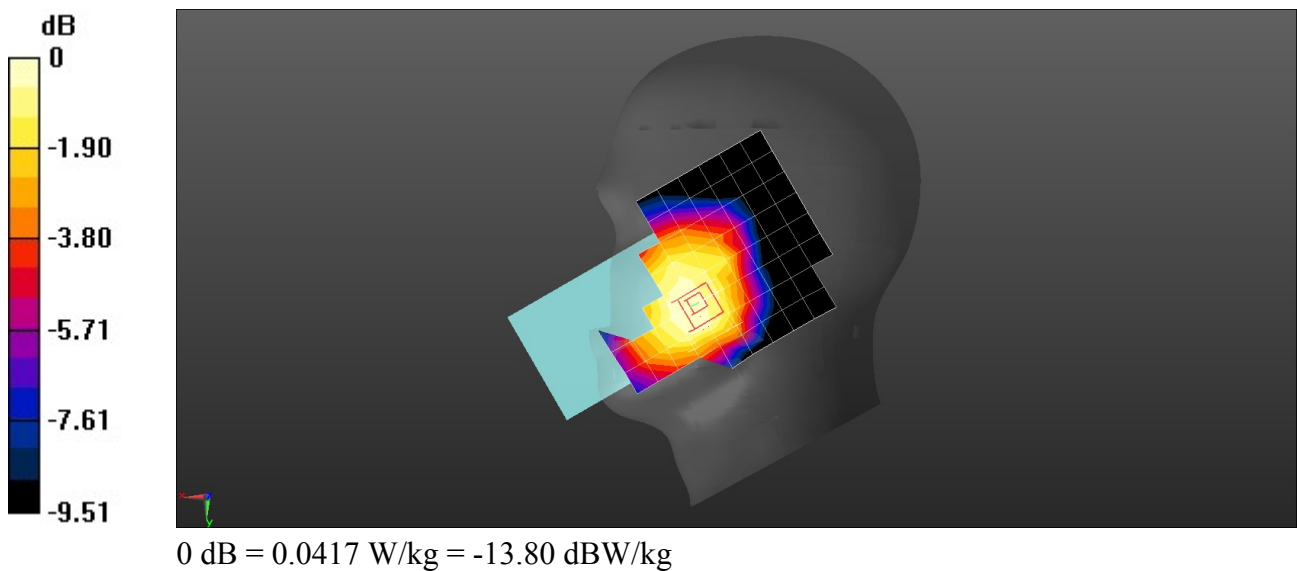

Test Laboratory: SGS-SAR Lab

5G NR n71 20M QPSK 1RB1 Ch136100 Back side 10mm

Communication System: UID 0, NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.153$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.54, 10.54, 10.54); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.126 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.420 V/m; Power Drift = -0.19 dB
Peak SAR (extrapolated) = 0.185 W/kg
SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.047 W/kg
Smallest distance from peaks to all points 3 dB below = 11.5 mm
Ratio of SAR at M2 to SAR at M1 = 45.8%
Maximum value of SAR (measured) = 0.138 W/kg

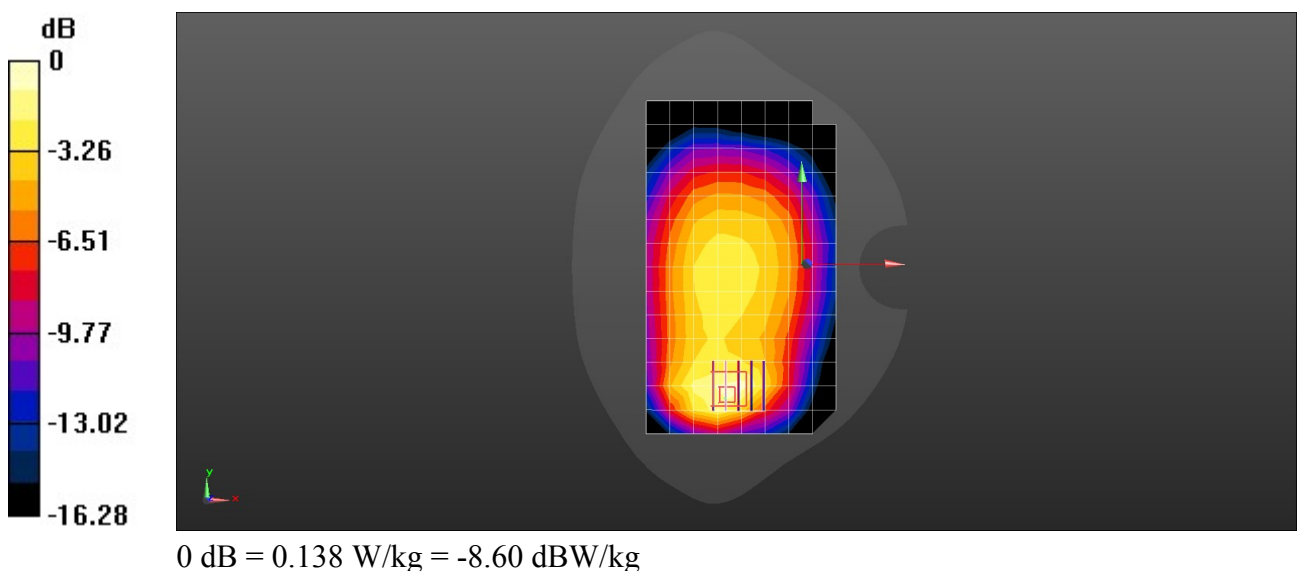

Test Laboratory: SGS-SAR Lab

5G NR n77 100M QPSK 135RB69 Ch633334 Left tilted

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.859$ S/m; $\epsilon_r = 39.01$; $\rho = 1000$ kg/m³


Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.15, 7.15, 7.15); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (11x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.16 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 17.75 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 2.21 W/kg
SAR(1 g) = 0.762 W/kg; SAR(10 g) = 0.239 W/kg
Smallest distance from peaks to all points 3 dB below = 5.1 mm
Ratio of SAR at M2 to SAR at M1 = 75.1%
Maximum value of SAR (measured) = 1.58 W/kg

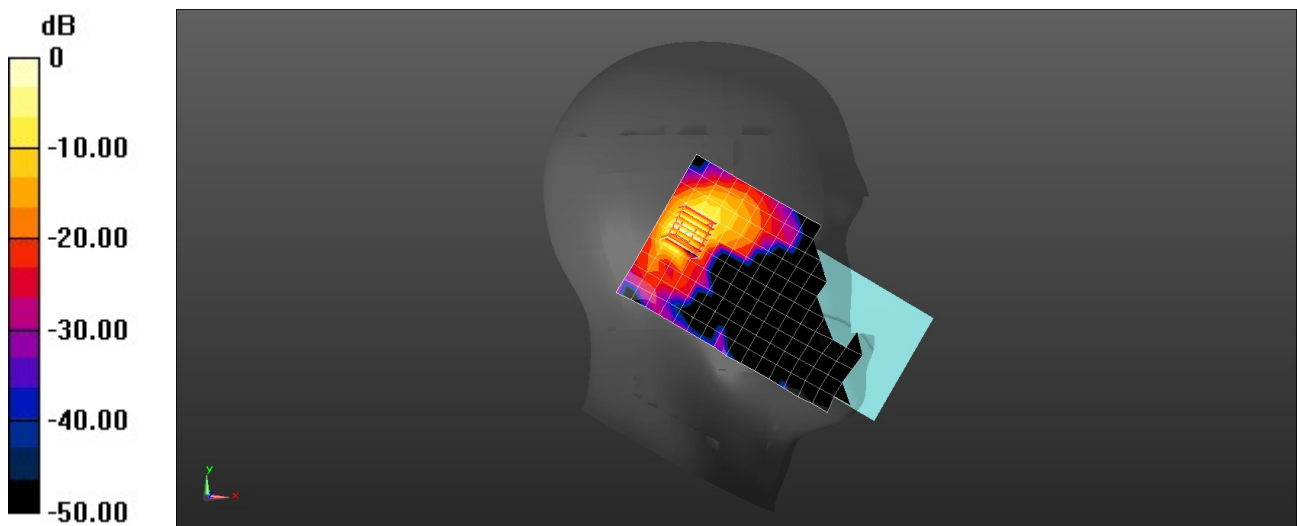

0 dB = 1.58 W/kg = 1.99 dBW/kg

Test Laboratory: SGS-SAR Lab

5G NR n77 100M QPSK 135RB69 Ch633334 Front side 10mm

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.859$ S/m; $\epsilon_r = 39.01$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.15, 7.15, 7.15); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (11x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.31 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 1.351 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 1.69 W/kg
SAR(1 g) = 0.721 W/kg; SAR(10 g) = 0.299 W/kg
Smallest distance from peaks to all points 3 dB below = 7.4 mm
Ratio of SAR at M2 to SAR at M1 = 78.4%
Maximum value of SAR (measured) = 1.30 W/kg

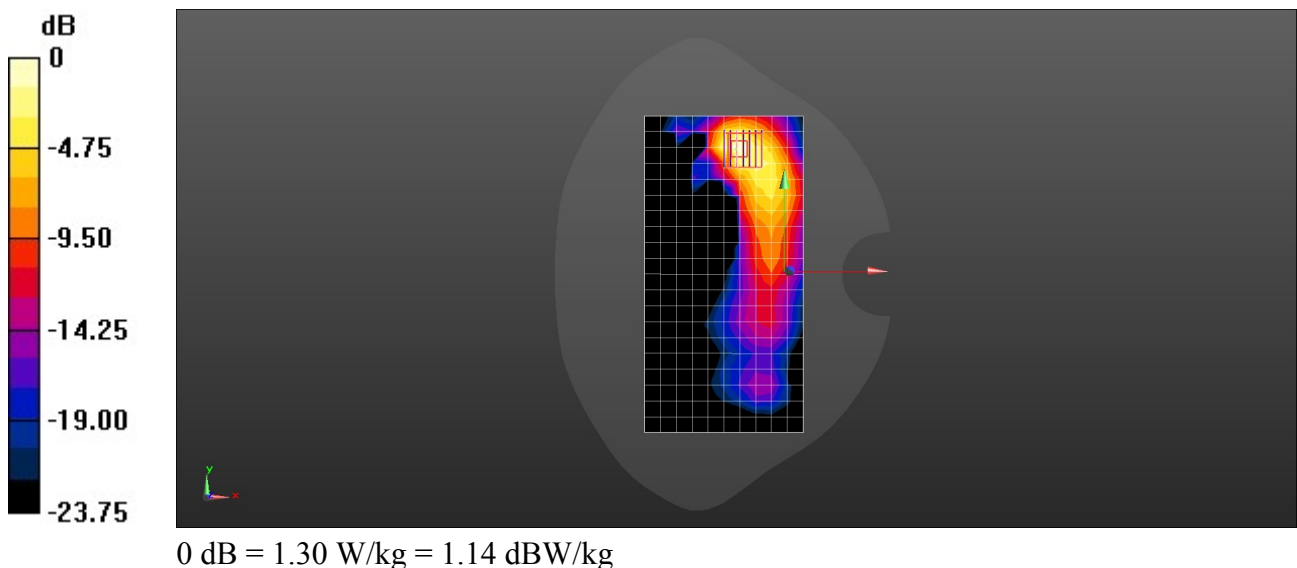

Test Laboratory: SGS-SAR Lab

Wi-Fi 2.4G 802.11b Ch11 Left cheek

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2462 MHz;Duty Cycle: 1:1.011

Medium: HSL2450;Medium parameters used: $f = 2462$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 38.849$; $\rho = 1000$ kg/m³


Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.95, 7.95, 7.95); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.452 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.876 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.555 W/kg
SAR(1 g) = 0.296 W/kg; SAR(10 g) = 0.152 W/kg
Smallest distance from peaks to all points 3 dB below = 10.5 mm
Ratio of SAR at M2 to SAR at M1 = 51.5%
Maximum value of SAR (measured) = 0.460 W/kg

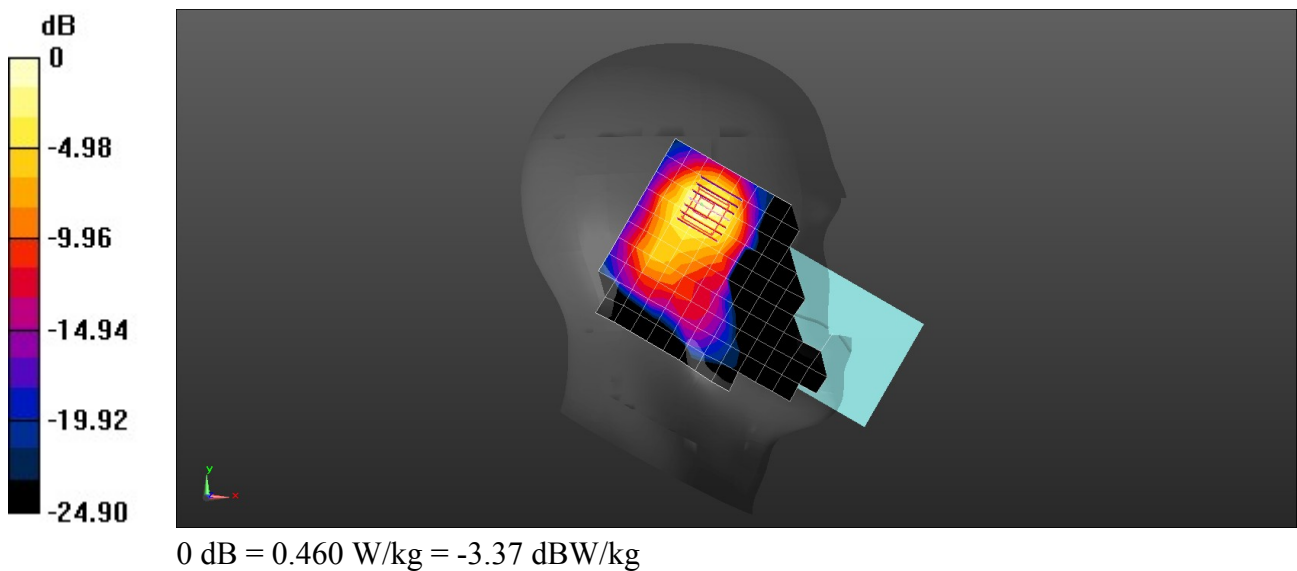

Test Laboratory: SGS-SAR Lab

Wi-Fi 2.4G 802.11b Ch11 Back side 10mm

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2462 MHz;Duty Cycle: 1:1.011

Medium: HSL2450;Medium parameters used: $f = 2462$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 38.849$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.95, 7.95, 7.95); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.258 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.8520 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.220 W/kg

SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.053 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 46.4%

Maximum value of SAR (measured) = 0.176 W/kg

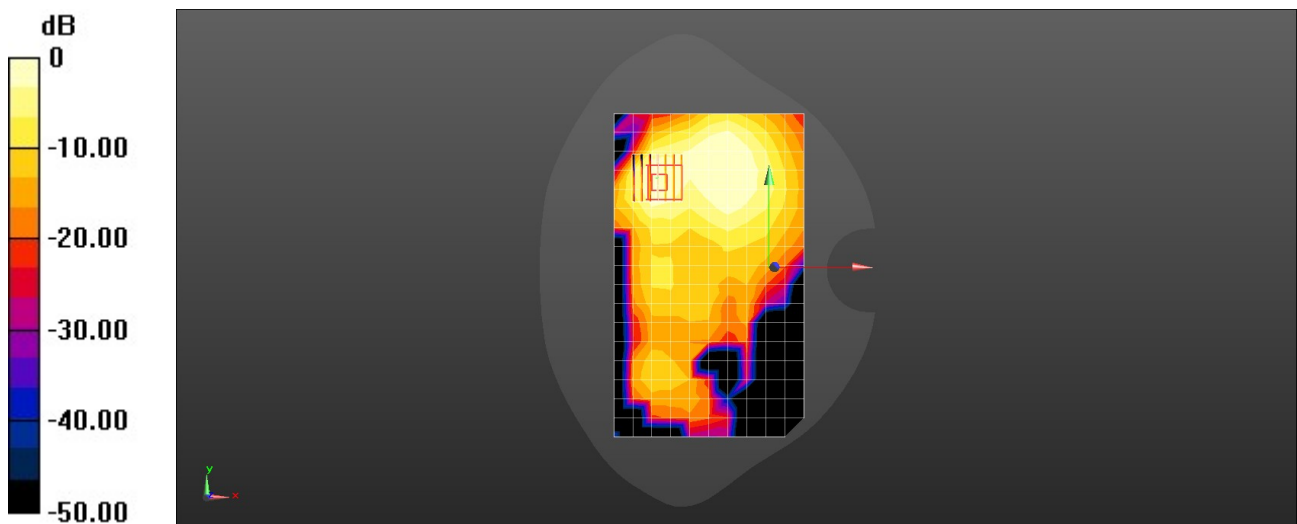

Test Laboratory: SGS-SAR Lab

Wi-Fi 5G 802.11a Ch100 Left cheek

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5500 MHz;Duty Cycle: 1:1.017

Medium: HSL5G;Medium parameters used: $f = 5500$ MHz; $\sigma = 5.022$ S/m; $\epsilon_r = 36.234$; $\rho = 1000$ kg/m³


Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(4.97, 4.97, 4.97); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (13x22x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.780 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 1.302 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.15 W/kg
SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.092 W/kg
Smallest distance from peaks to all points 3 dB below = 6.1 mm
Ratio of SAR at M2 to SAR at M1 = 66.4%
Maximum value of SAR (measured) = 0.759 W/kg

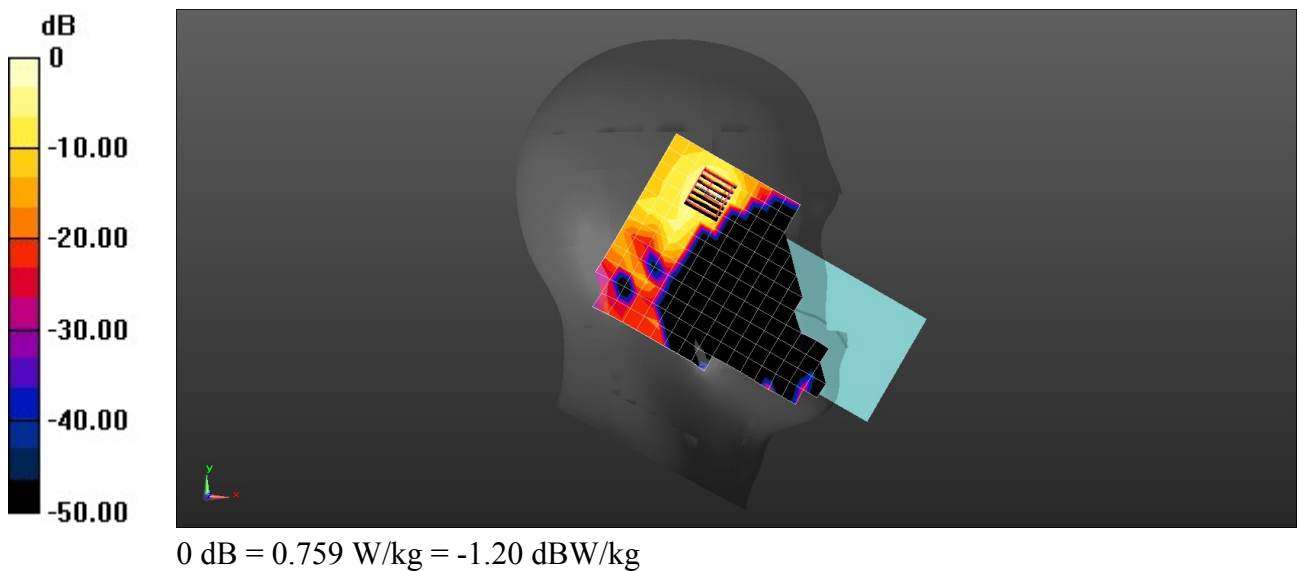

Test Laboratory: SGS-SAR Lab

Wi-Fi 5G 802.11a Ch60 Back side 10mm

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5300 MHz;Duty Cycle: 1:1.017

Medium: HSL5G;Medium parameters used: $f = 5300$ MHz; $\sigma = 4.78$ S/m; $\epsilon_r = 36.464$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(5.57, 5.57, 5.57); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (12x22x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.587 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.968 W/kg
SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.081 W/kg
Smallest distance from peaks to all points 3 dB below = 6.8 mm
Ratio of SAR at M2 to SAR at M1 = 71.2%
Maximum value of SAR (measured) = 0.697 W/kg

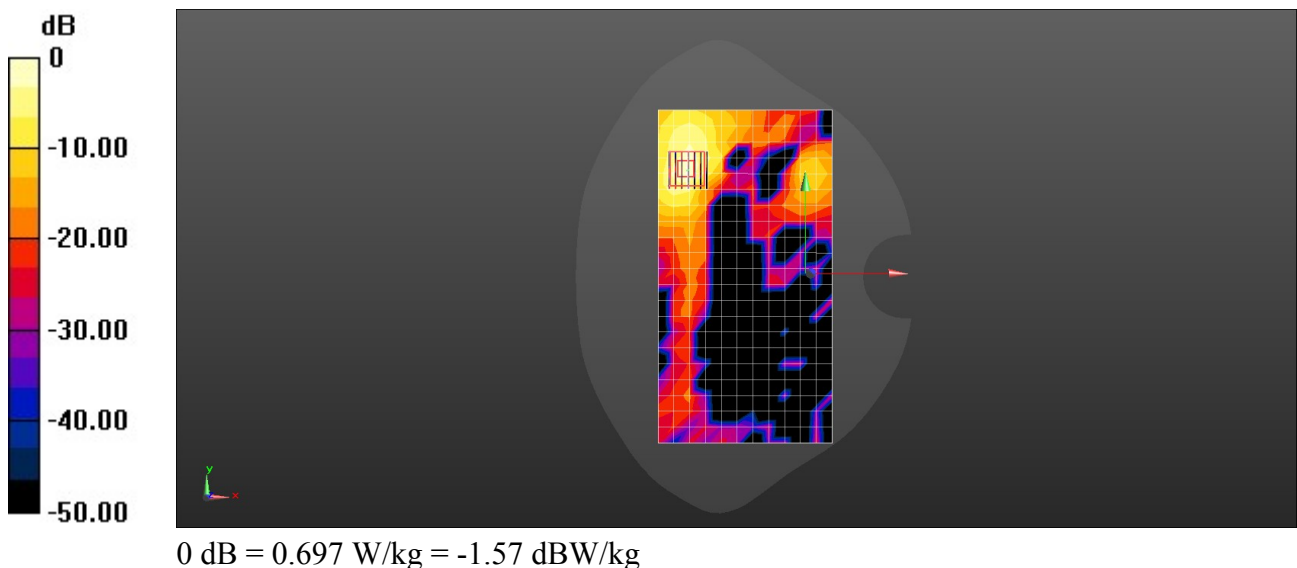

Test Laboratory: SGS-SAR Lab

Wi-Fi 5G 802.11a Ch40 Right side 10mm

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5200 MHz;Duty Cycle: 1:1.017

Medium: HSL5G;Medium parameters used: $f = 5200$ MHz; $\sigma = 4.669$ S/m; $\epsilon_r = 36.622$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(5.57, 5.57, 5.57); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x22x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.699 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.5200 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.121 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 72.8%

Maximum value of SAR (measured) = 0.822 W/kg

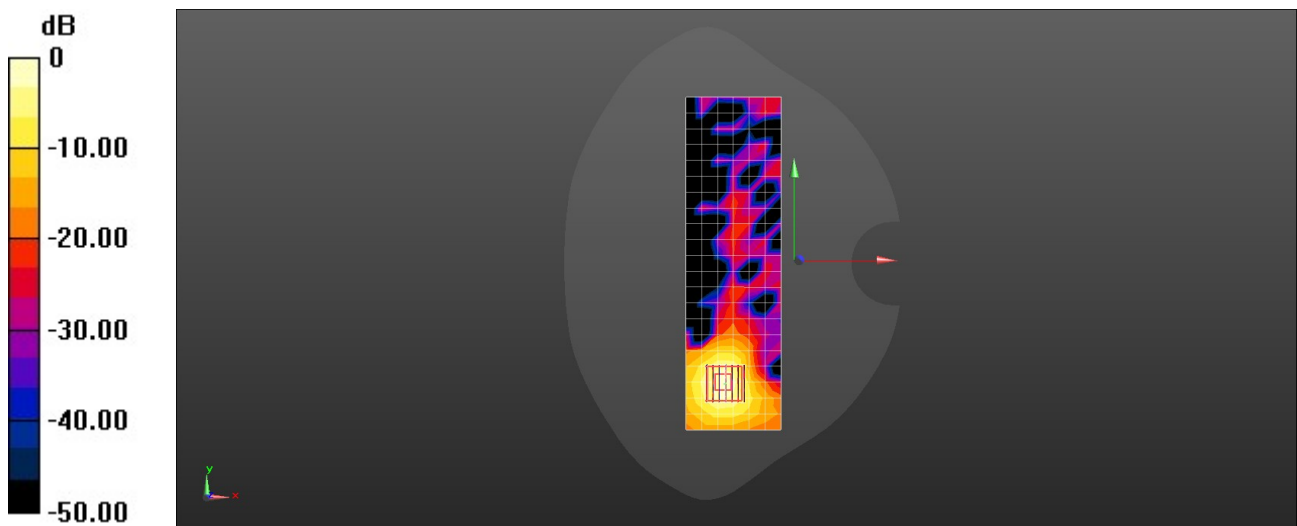

0 dB = 0.822 W/kg = -0.85 dBW/kg

Test Laboratory: SGS-SAR Lab

Wi-Fi 5G 802.11a Ch100 Back side 0mm

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5500 MHz;Duty Cycle: 1:1.017

Medium: HSL5G;Medium parameters used: $f = 5500$ MHz; $\sigma = 5.022$ S/m; $\epsilon_r = 36.234$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(4.97, 4.97, 4.97); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (12x22x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 3.90 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 17.6 W/kg
SAR(1 g) = 3.52 W/kg; SAR(10 g) = 0.753 W/kg
Smallest distance from peaks to all points 3 dB below = 4.2 mm
Ratio of SAR at M2 to SAR at M1 = 64.8%
Maximum value of SAR (measured) = 9.16 W/kg

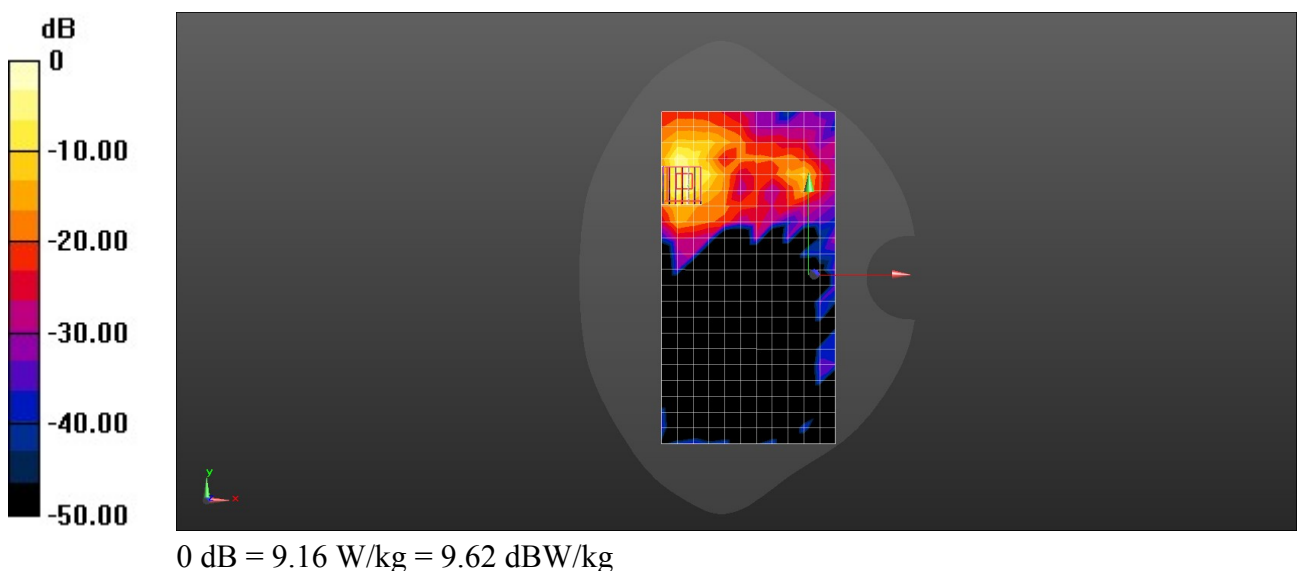

Test Laboratory: SGS-SAR Lab

Bluetooth DH5 Ch78 Left cheek

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.307

Medium: HSL2450; Medium parameters used: $f = 2480$ MHz; $\sigma = 1.819$ S/m; $\epsilon_r = 38.781$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.95, 7.95, 7.95); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.117 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.364 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.149 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.037 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 47.2%

Maximum value of SAR (measured) = 0.121 W/kg

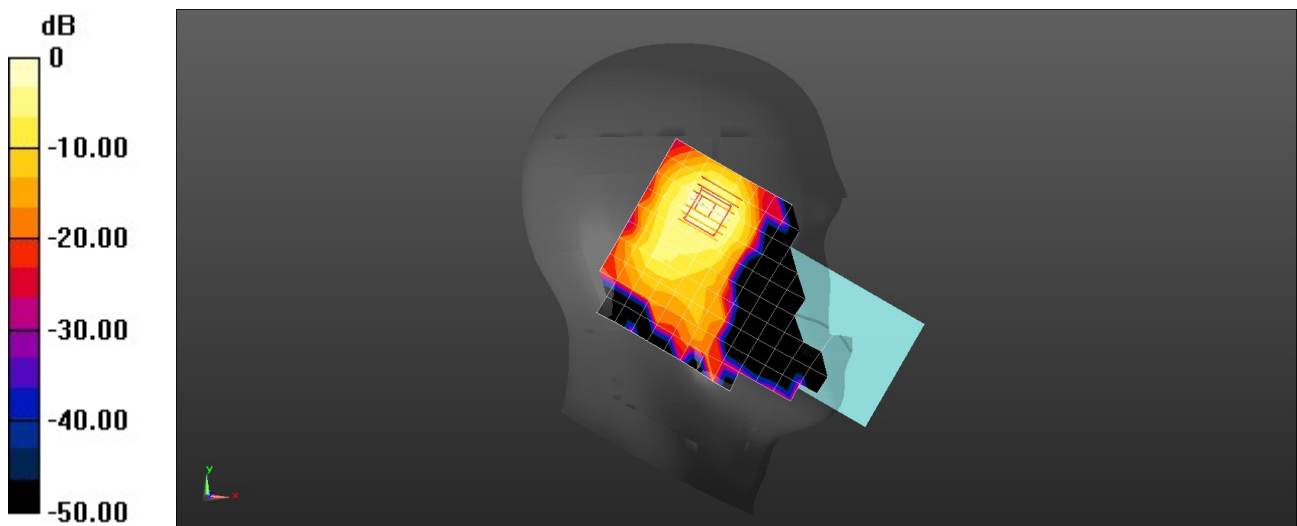

0 dB = 0.121 W/kg = -9.17 dBW/kg

Test Laboratory: SGS-SAR Lab

Bluetooth DH5 Ch78 Back side 10mm

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.307

Medium: HSL2450; Medium parameters used: $f = 2480$ MHz; $\sigma = 1.819$ S/m; $\epsilon_r = 38.781$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.95, 7.95, 7.95); Calibrated: 2026/01/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.0683 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.8530 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.0890 W/kg

SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.019 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 44.4%

Maximum value of SAR (measured) = 0.0698 W/kg

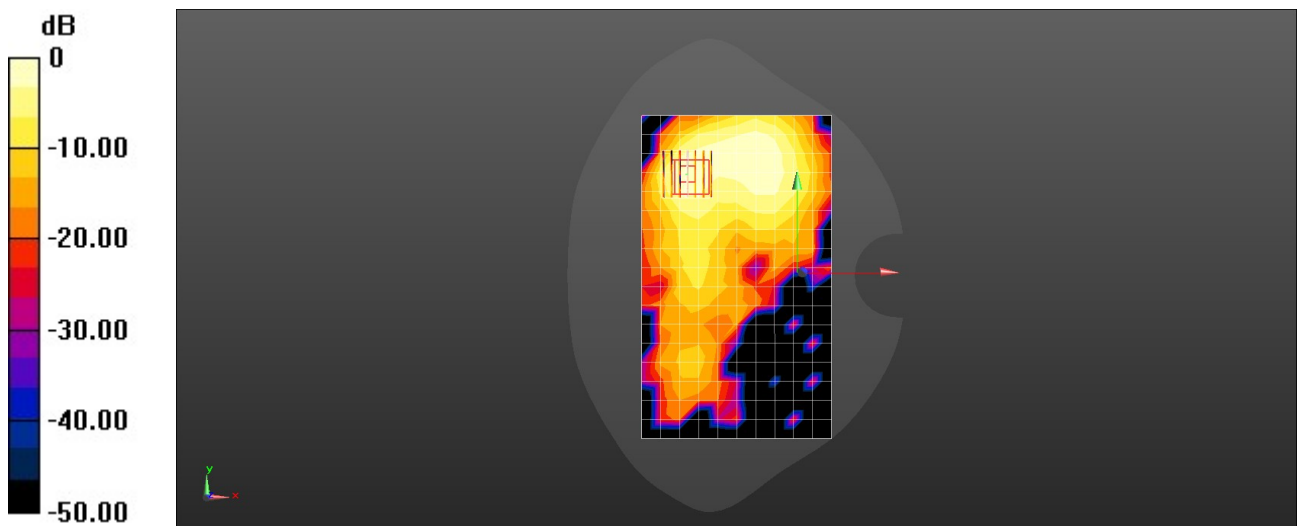

0 dB = 0.0698 W/kg = -11.56 dBW/kg



Report No.: SUCR260500042401
Page: 71 of 71

- End of the Appendix -