

TEST REPORT

Application No.: KSCR2606001323WM
FCC ID: 2AWF6-SH6670
Applicant: START USA, INC.
Address of Applicant: 5600 Tennyson Parkway, Suite 390, Plano, TX 75024, USA
Manufacturer: START USA, INC.
Address of Manufacturer: 5600 Tennyson Parkway, Suite 390, Plano, TX 75024, USA
Equipment Under Test (EUT):
EUT Name: 5G Entry Smartphone
Model No.: SH6670
Trade Mark: START
Standard(s): FCC Part 96.47
FCC KDB 940660 D01 Part 96 CBRS Eqpt v03
WINNF-TS-0122-V1.0.2 CBRS CBSD Test Specification
WINNF-18-IN-00178 CBRS End User Device as UUT Test Guidelines
Date of Receipt: 2026-05-09
Date of Test: 2026-07-02 to 2026-07-20
Date of Issue: 2026-07-21

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Revision Record			
Version	Description	Date	Remark
00	Original	2026-07-21	/

Authorized for issue by:				
Prepared By		Damon Zhou		
		Damon Zhou /Project Engineer		
Approved By		Terry Hou		
		Terry Hou /Reviewer		

2 Test Summary

Item	Standard	Test Case ID	Result
End User Device additional requirement	96.47	/	Pass

The UUT is an End User Device. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC Part 96.47

FCC KDB 940660 D01 Part 96 CBRS Eqpt v03

WINNF-TS-0122-V1.0.2 CBRS CBSD Test Specification

WINNF-18-IN-00178 CBRS End User Device as UUT Test Guidelines

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents	4
4 General Information	5
4.1 Details of E.U.T.	5
4.2 Measurement Uncertainty	5
4.3 Description of Support Units	5
4.4 Test Location	7
4.5 Test Facility	7
4.6 Deviation from Standards	7
4.7 Abnormalities from Standard Conditions	7
5 Equipment List	8
6 Test Method and Environment	9
6.1 End User Device Conformance and Performance	9
6.2 Test Environment	9
6.3 Test Requirement	9
6.4 Test Procedure	10
6.5 Test Setup	11
6.6 Test Result	12
7 Test Setup Photographs	16

4 General Information

4.1 Details of E.U.T.

Power supply:	DC3.87V by li-ion battery(5000mAh) Battery M/N: SA3510 Battery Manufacture:Shenzhen Aerospace Electronic Co.,Ltd. Recharged by AC/DC power adapter Adapter M/N: UF72PD20A Adapter Input: 100-240Vac, 50/60Hz, 0.5A Adapter Output: 5.0Vdc, 3.0A; 9.0Vdc, 2.22A; 12Vdc,1.67A Adapter Manufacture: Guangdong Beicom Electronics Co., Ltd
Sample Type:	End User device
Transmitter Frequency Band:	LTE: Band 48 5G NR: n48
Transmitter Frequency Range:	Band 48/n48:3550~3700MHz
Antenna Type:	IFA Antenna
Hardware Version:	SH6670HV3.0
Software Version:	SH6670SV1.0.0
Antenna Gain:	-1.56dBi(Ant6), -0.52dBi(Ant7) (Provided by the manufacturer)

4.2 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	RF conducted power	$\pm 0.75\text{dB}$
3	Temperature test	$\pm 1^{\circ}\text{C}$
4	Humidity test	$\pm 3\%$
5	Supply voltages	$\pm 1.5\%$
6	Time	$\pm 3\%$

4.3 Description of Support Units

For LTE test:

Description	Manufacturer	Model No.	Serial No.
EPC	Lanner Electronics Inc.	LICA-1513A	LR202002004052
Router	TP-LINK	TL-R860+	1175379002425
Base station	Baicells	pBS31010 (FCC ID: 2AG32PBS31010)	12020002912122B0001

For 5GNR test:

Description	Manufacturer	Model No.	Serial No.
5GC	astir	astir_5GC	A372768X0507398
Router	TP-Link	TL-R860+	1175379002425
Base Band Unit	BTI	sCELL- G52091NAX	L603JESE1I



Remote Radio Unit	BTI	RU4370 (FCC ID: WBK-RU4370)	C0214921000004S
----------------------	-----	--------------------------------	-----------------

4.4 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1.SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).

2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).

3. Sample source: sent by customer.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 2541.01.)**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA).

• **FCC (Designation Number: CN1172)**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory.

• **ISED (CAB Identifier: CN0072)**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 2324E

• **VCCI (Member No:1938)**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

5 Equipment List

Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
Laptop	Lenovo	Y510P	HFL000026	N/A	N/A
Spectrum Analyzer	KEYSIGHT	N9020A	KUS2001M00 1-2	2025/7/9 2026/7/8	2026/7/8 2027/7/7
Shield Room	YanChuang	N/A	KS301115-2	N/A	N/A
Coaxial Cable	Thermax	N/A	13	2025/9/16	2026/9/15
Attenuator	Mini-Circuits	NAT-6-2W	15542-1	N.C.R.	N.C.R.
Temperature & Humidity Recorder	Renke Control	RS-WS-NO1- 6J	KSEM024-5	2025/12/30	2026/12/29

6 Test Method and Environment

6.1 End User Device Conformance and Performance

Test Requirement: FCC Part 96.47

Test Method: WINNF-18-IN-00178 CBRS End User Device as UUT Test Guidelines

6.2 Test Environment

Environmental Conditions: 24.5°C, 64%RH

6.3 Test Requirement

FCC Part 96.47

- a). End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.
- b). An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

6.4 Test Procedure

Following procedure can be done by applying WINNF-TS-0122-V1.0.2 CBRS CBSD Test Specification, use the certified LTE Base station CBSD (FCC ID: 2AG32PBS31010) and 5GNR Base station CBSD (FCC ID: WBK-RU4370) as companion device to show compliance with Part 96.47 requirement for End User Device (EUD):


For LTE:

1. Setup with frequency 3560-3580MHz and power level 14dBm/MHz;
2. Enable CBSD service ;
3. Check EUD Tx Frequency and power;
4. Disable AP service ;
5. Check EUD stops transmission within 10seconds;
6. Setup with 3575-3595MHz & power level 8dBm/MHz;
7. Enable CBSD service;
8. Check EUD Tx Frequency and power;
9. Disable CBSD service;
10. Check EUD stops transmission within 10seconds.

For 5G NR:

1. Setup with frequency 3620-3640MHz and power level 14dBm/MHz;
2. Enable CBSD service ;
3. Check EUD Tx Frequency and power;
4. Disable AP service ;
5. Check EUD stops transmission within 10seconds;
6. Setup with 3650-3670MHz & power level 8dBm/MHz;
7. Enable CBSD service;
8. Check EUD Tx Frequency and power;
9. Disable CBSD service;
10. Check EUD stops transmission within 10seconds.

6.5 Test Setup

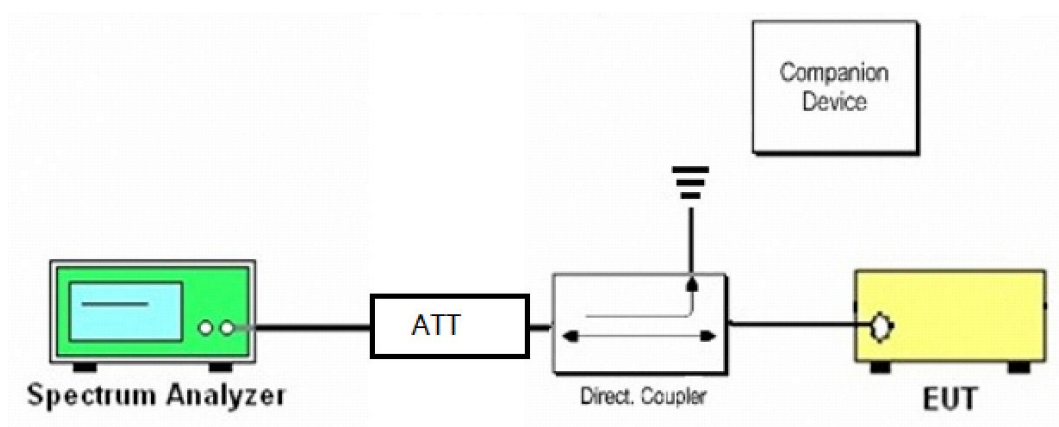

For LTE:

End User Device as UUT, the companion device is certified CBRS (FCC ID: 2AG32PBS31010)

For 5G NR:


End User Device as UUT, the companion device is certified CBRS (FCC ID: WBK-RU4370)

6.6 Test Result

For LTE

[Step 1] Setup with frequency 3600MHz and power level 14dBm/MHz

[Step 3] Check EUD Tx Frequency and power

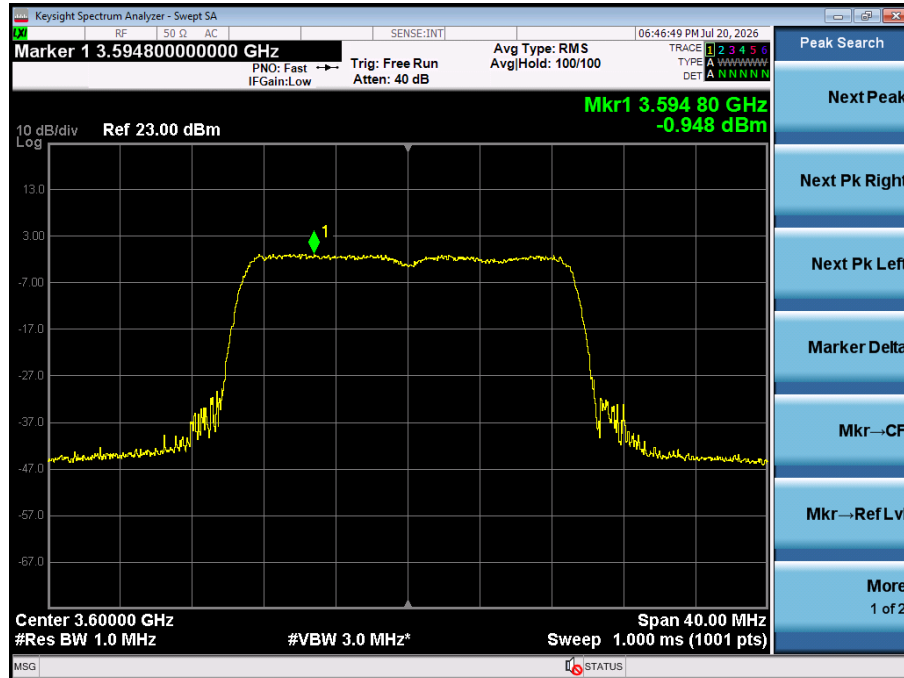


EIRP PSD=-0.948-0.52+5=3.532dBm/MHz, loss of Cable and Splitter is 5.0dB, Antenna gain is -0.52dBi

[Step 5] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.



[Step 6] Setup with frequency 3620MHz and power level 8dBm/MHz

[Step 8] Check EUD Tx Frequency and power

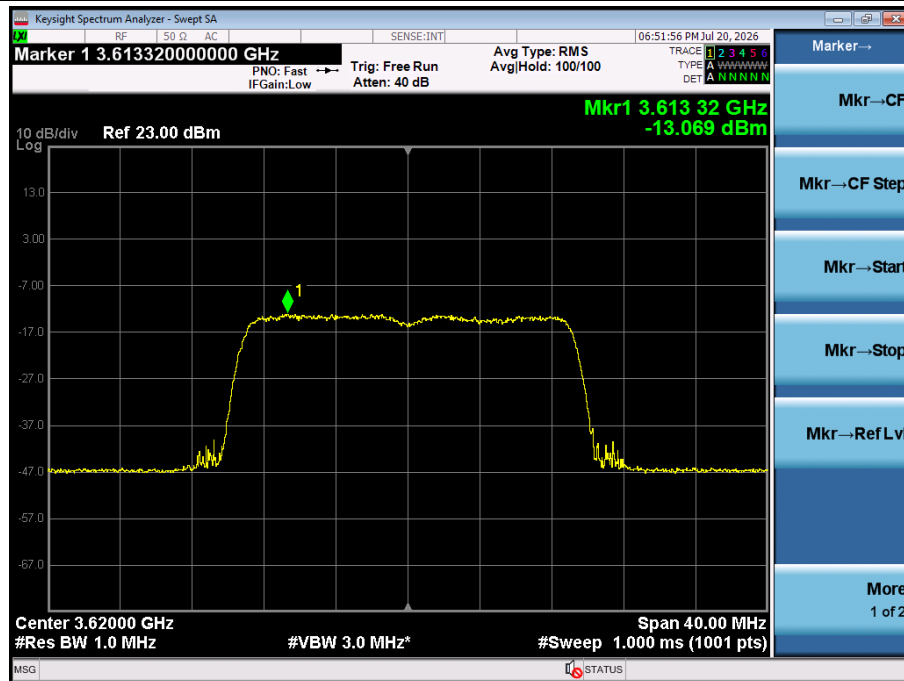

EIRP PSD=-13.069-0.52+5.0=-8.589dBm/MHz, loss of Cable and Splitter is 5.0dB, Antenna gain is -0.52dBi


[Step 10] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.



For 5GNR

[Step 1] Setup with frequency 3600MHz and power level 14dBm/MHz

[Step 3] Check EUD Tx Frequency and power

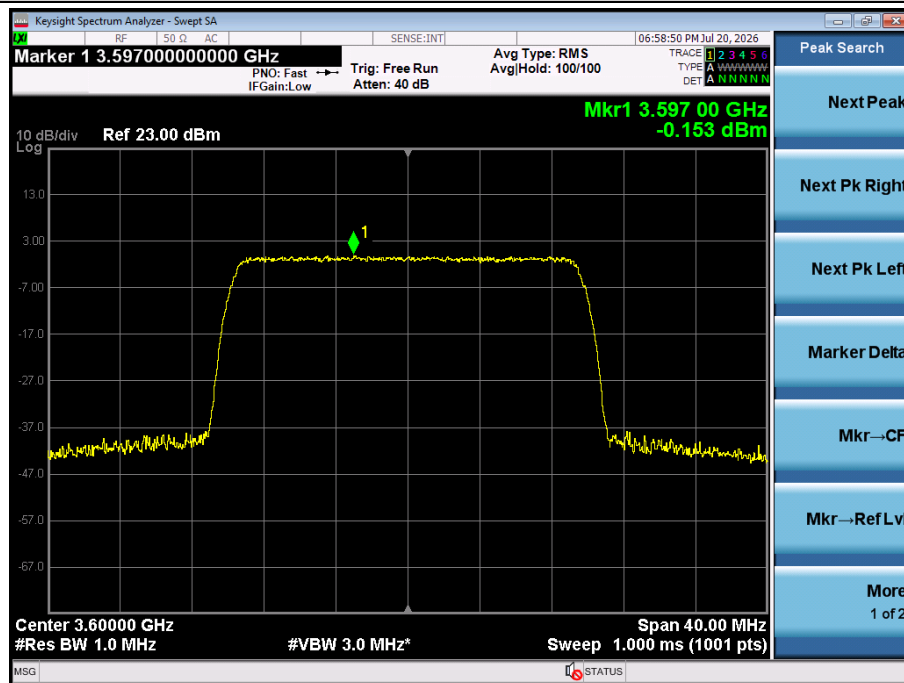


EIRP PSD=-0.153-0.52+5.0=4.327dBm/MHz, loss of Cable and Splitter is 5.0dB, Antenna gain is -0.52dBi,

[Step 5] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.



[Step 6] Setup with frequency 3620MHz and power level 8dBm/MHz

[Step 8] Check EUD Tx Frequency and power

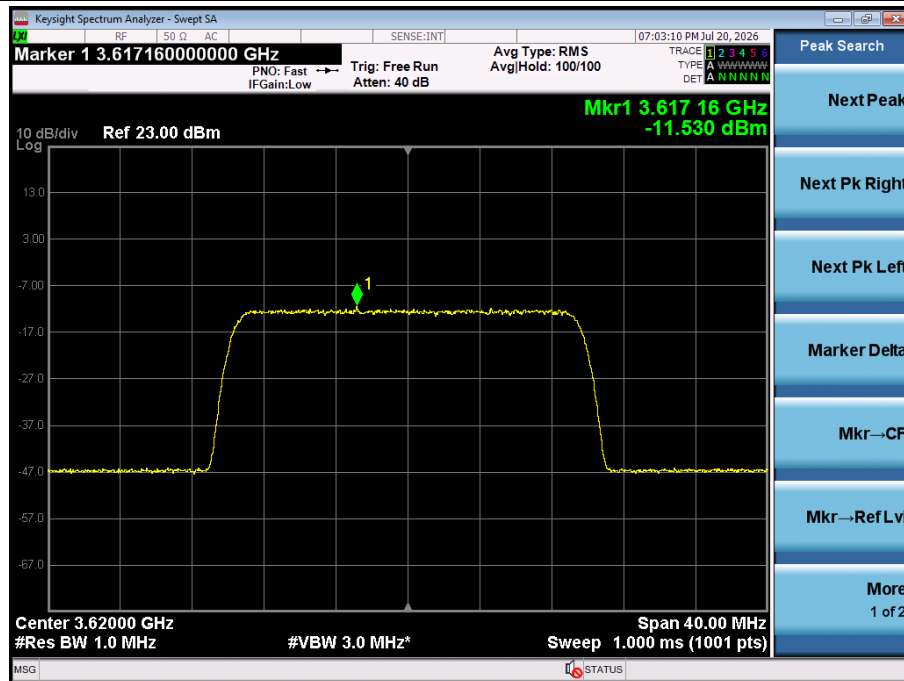

EIRP PSD=-11.530-0.52+5.0=-7.05dBm/MHz, loss of Cable and Splitter is 5.0dB, Antenna gain is -0.52dBi,

[Step 10] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.





Report No.: KSCR260600132301

Page: 16 of 16

7 Test Setup Photographs

Refer to Appendix - Test Setup Photo for SUCR2605000424WM

- End of the Report -