



Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640
Fax: +86-755-26648637
Website: www.cqa-cert.com

Report Template Version: V05
Report Template Revision Date: 2021-11-03



中国认可
国际互认
检测
TESTING
CNAS L5785

Test Report

Report No.: CQASZ20250902196E-01
Applicant: Puro Sound Labs LLC
Address of Applicant: 9950 Scripps Lake Drive Suite 106 , San Diego, CA, 92131
Equipment Under Test (EUT):
EUT Name: Tri-mode gaming headphone
Model No.: PUROGAMER-BT
Test Model No.: PUROGAMER-BT
Brand Name: Puro Sound Labs
FCC ID: 2AWFS-PURO01
Standards: 47 CFR Part 15, Subpart C
KDB558074 D01 15.247 Meas Guidance v05r02
Date of Receipt: 2025-09-10
Date of Test: 2025-09-10 to 2025-10-16
Date of Issue: 2025-11-13
Test Result: **PASS***

*In the configuration tested, the EUT complied with the standards specified above

Tested By:

Lewis Zhou

(Lewis Zhou)

Reviewed By:

Timo Lei

(Timo Lei)

Approved By:

Jack Ai

(Jack Ai)



The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20250902196E-01	Rev.01	Initial report	2025-11-13

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10 (2020)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2020)	PASS
Field Strength of the Fundamental Signal	47 CFR Part 15, Subpart C Section 15.249 (a)	ANSI C63.10 (2020)	PASS
Spurious Emissions	47 CFR Part 15, Subpart C Section 15.249 (a)/15.209	ANSI C63.10 (2020)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.249(a)/15.205	ANSI C63.10 (2020)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.215 (c)	ANSI C63.10 (2020)	PASS

3 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 ADDITIONAL INSTRUCTIONS	7
4.4 TEST ENVIRONMENT AND MODE	8
4.5 DESCRIPTION OF SUPPORT UNITS	8
4.6 STATEMENT OF THE MEASUREMENT UNCERTAINTY	9
4.7 TEST LOCATION	10
4.8 TEST FACILITY	10
4.9 DEVIATION FROM STANDARDS	10
4.10 ABNORMALITIES FROM STANDARD CONDITIONS	10
4.11 OTHER INFORMATION REQUESTED BY THE CUSTOMER	10
4.12 EQUIPMENT LIST	11
5 TEST RESULTS AND MEASUREMENT DATA	12
5.1 ANTENNA REQUIREMENT	12
5.2 CONDUCTED EMISSIONS	13
5.3 RADIATED EMISSION	16
5.4 20dB BANDWIDTH	24
6 PHOTOGRAPHS	27
6.1 RADIATED EMISSION TEST SETUP	27
6.2 CONDUCTED EMISSION TEST SETUP	28
6.3 EUT CONSTRUCTIONAL DETAILS	29

4 General Information

4.1 Client Information

Applicant:	Puro Sound Labs LLC
Address of Applicant:	9950 Scripps Lake Drive Suite 106 , San Diego, CA, 92131
Manufacturer:	Guangzhou Havit Technology Co., Ltd.
Address of Manufacturer:	Room 1307, 13F, Building B and C, Poly World Trade Center Phase II, 1000 Xingangdong Road, Haizhu District, Guangzhou City, Guangdong, China
Factory:	Guangzhou Havit Technology Co., Ltd.
Address of Factory:	Room 1307, 13F, Building B and C, Poly World Trade Center Phase II, 1000 Xingangdong Road, Haizhu District, Guangzhou City, Guangdong, China

4.2 General Description of EUT

EUT Name:	Tri-mode gaming headphone
Model No.:	PUROGAMER-BT
Test Model No.:	PUROGAMER-BT
Trade Mark:	Puro Sound Labs
Software Version:	V29
Hardware Version:	GP076-PRO-RX-V3.1-240403
Frequency Range:	2403Mhz-2477Mhz
Modulation Type:	GFSK
Number of Channels:	74
Sample Type:	☐ Mobile ☒ Portable ☐ Fix Location
Test Software of EUT:	Xii166_RFTEST
Antenna Type:	Chip antenna
Antenna Gain:	2.54dBi
Power Supply:	Power supply by USB 5V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2403MHz	21	2423MHz	41	2444MHz	61	2464MHz
2	2404MHz	22	2424MHz	42	2445MHz	62	2465MHz
3	2405MHz	23	2425MHz	43	2446MHz	63	2466MHz
4	2406MHz	24	2426MHz	44	2447MHz	64	2467MHz
5	2407MHz	25	2427MHz	45	2448MHz	65	2468MHz
6	2408MHz	26	2428MHz	46	2449MHz	66	2469MHz
7	2409MHz	27	2429MHz	47	2450MHz	67	2470MHz
8	2410MHz	28	2430MHz	48	2451MHz	68	2471MHz
9	2411MHz	29	2431MHz	49	2452MHz	69	2472MHz
10	2412MHz	30	2432MHz	50	2453MHz	70	2473MHz
11	2413MHz	31	2433MHz	51	2454MHz	71	2474MHz
12	2414MHz	32	2435MHz	52	2455MHz	72	2475MHz
13	2415MHz	33	2436MHz	53	2456MHz	73	2476MHz
14	2416MHz	34	2437MHz	54	2457MHz	74	2477MHz
15	2417MHz	35	2438MHz	55	2458MHz	75	
16	2418MHz	36	2439MHz	56	2459MHz	76	
17	2419MHz	37	2440MHz	57	2460MHz	77	
18	2420MHz	38	2441MHz	58	2461MHz	78	
19	2421MHz	39	2442MHz	59	2462MHz	79	
20	2422MHz	40	2443MHz	60	2463MHz		


Using test software was control EUT work in continuous transmitter and receiver mode.and select test channel as below:

Channel	Frequency
The Lowest channel(CH1)	2403MHz
The Middle channel(CH37)	2440MHz
The Highest channel(CH74)	2477MHz

4.3 Additional Instructions

EUT Test Software Settings:		
Mode:	☒ Special software is used. ☐ Through engineering command into the engineering mode. engineering command: *##3646633##*	
EUT Power level:	Class0	
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.		
Mode	Channel	Frequency(MHz)
GFSK	CH1	2403
	CH37	2440
	CH74	2477

Run Software:

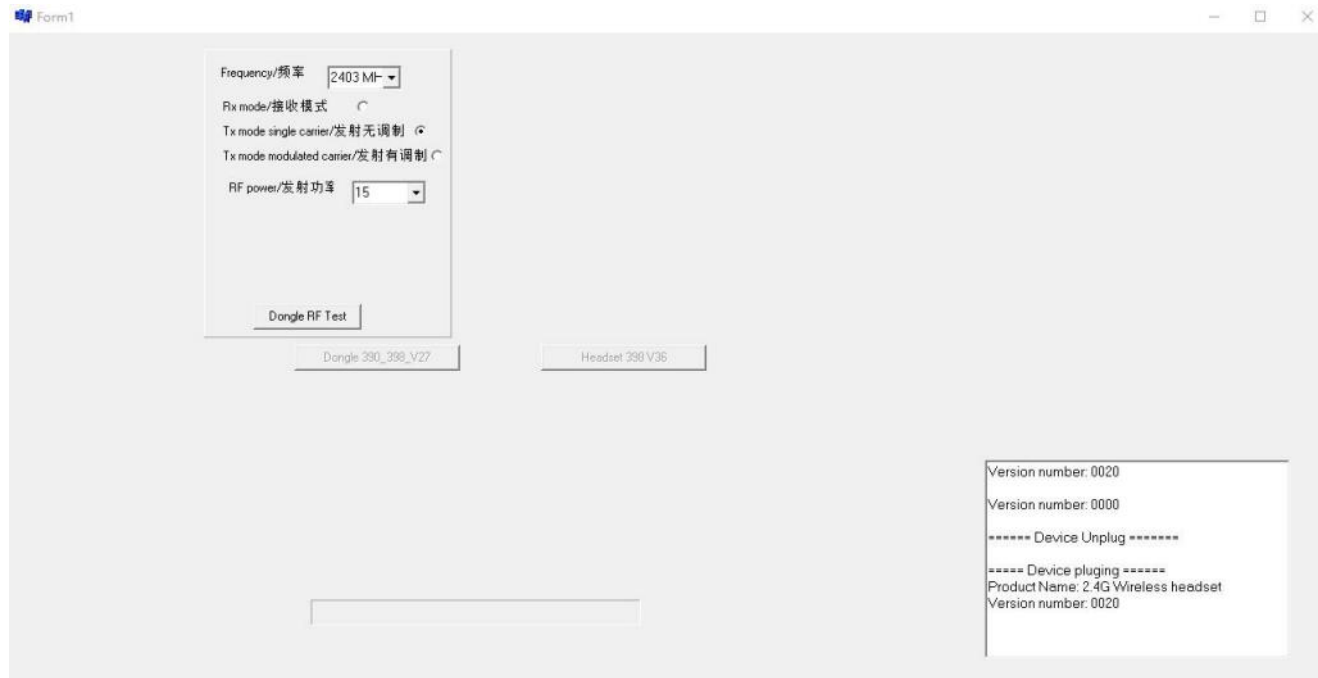

The screenshot shows the EUT Test Software interface. It includes a 'Form1' window with the following settings:

- Frequency/频率: 2403 MHz
- Rx mode/接收模式: (radio button)
- Tx mode single carrier/发射无调制: (radio button)
- Tx mode modulated carrier/发射有调制: (radio button)
- RF power/发射功率: 15
- Buttons: Dongle RF Test, Dongle 390_398_V27, Headset 398 V36
- Log/Status window (bottom right):


```
Version number: 0020
Version number: 0000
----- Device Unplug -----
----- Device plugging -----
Product Name: 2.4G Wireless headset
Version number: 0020
```

4.4 Test Environment and Mode

Operating Environment:	
Radiated Emissions:	
Temperature:	27 °C
Humidity:	59 % RH
Atmospheric Pressure:	1009mbar
Temperature:	26 °C
Humidity:	59 % RH
Atmospheric Pressure:	1009mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009mbar
Test mode:	
Transmitting mode:	Use test software (RF test) to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Macbook	APPLE	/	/	CQA

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.6 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for **CQA** laboratory is reported:

Test	Range	Uncertainty	Notes
Radiated Emission	Below 1GHz	5.12dB	(1)
Radiated Emission	Above 1GHz	4.60dB	(1)
Conducted Disturbance	0.15~30MHz	3.34dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.7 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

4.8 Test Facility

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.9 Deviation from Standards

None.

4.10 Abnormalities from Standard Conditions

None.

4.11 Other Information Requested by the Customer

None.

4.12 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2025/9/1	2026/8/31
Spectrum analyzer	R&S	FSU26	CQA-038	2025/9/1	2026/8/31
Spectrum analyzer	R&S	FSU40	CQA-075	2025/9/1	2026/8/31
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2025/9/1	2026/8/31
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2025/9/1	2026/8/31
Preamplifier	EMCI	EMC184055SE	CQA-089	2025/9/1	2026/8/31
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2023/9/8	2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2023/11/01	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2025/9/1	2026/8/31
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2025/9/1	2026/8/31
Antenna Connector	CQA	RFC-01	CQA-080	2025/9/1	2026/8/31
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2025/9/1	2026/8/31
Power meter	R&S	NRVD	CQA-029	2025/9/1	2026/8/31
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2025/9/1	2026/8/31
EMI Test Receiver	R&S	ESR7	CQA-005	2025/9/1	2026/8/31
LISN	R&S	ENV216	CQA-003	2025/9/1	2026/8/31
Coaxial cable	CQA	N/A	CQA-C009	2025/9/1	2026/8/31
DC power	KEYSIGHT	E3631A	CQA-028	2025/9/1	2026/8/31

Test software:


	Manufacturer	Software brand	Software version
Radiated Emissions test software	Tonscend	JS1120-3	Version:8
Conducted Emissions test software	Audix	e3	Version:9
RF Conducted test software	Audix	e3	V3.5.39

Note:

The temporary antenna connector is soldered on the pcb board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

5 Test results and Measurement Data


5.1 Antenna Requirement

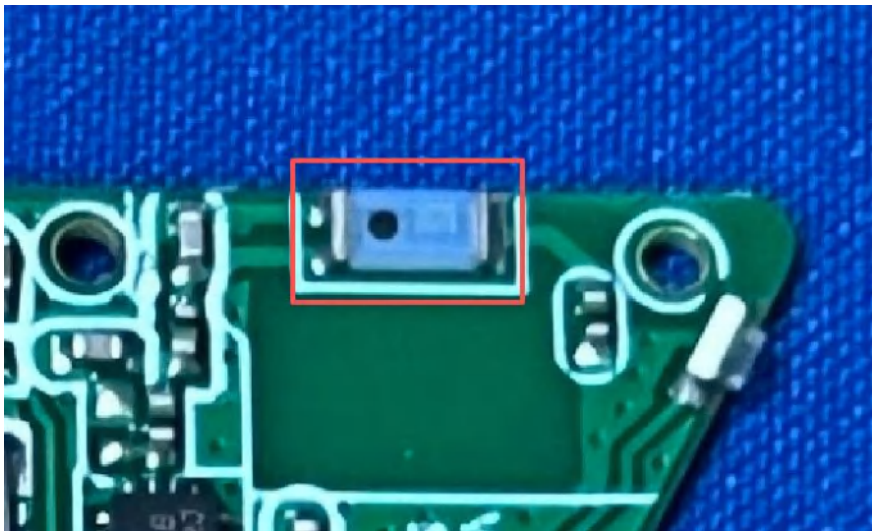Standard requirement:	47 CFR Part 15C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is Chip antenna. The connection/connection type between the antenna to the EUT's antenna port is: permanently attachment. This is either permanently attachment or a unique coupling that satisfies the requirement.	

Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.
Final Test Mode:	Through Pre-scan, find the 2.4G SRD of data type and GFSK modulation at the lowest channel is the worst case. Only the worst case is recorded in the report.
Test Results:	Pass

Measurement Data:

Live line:

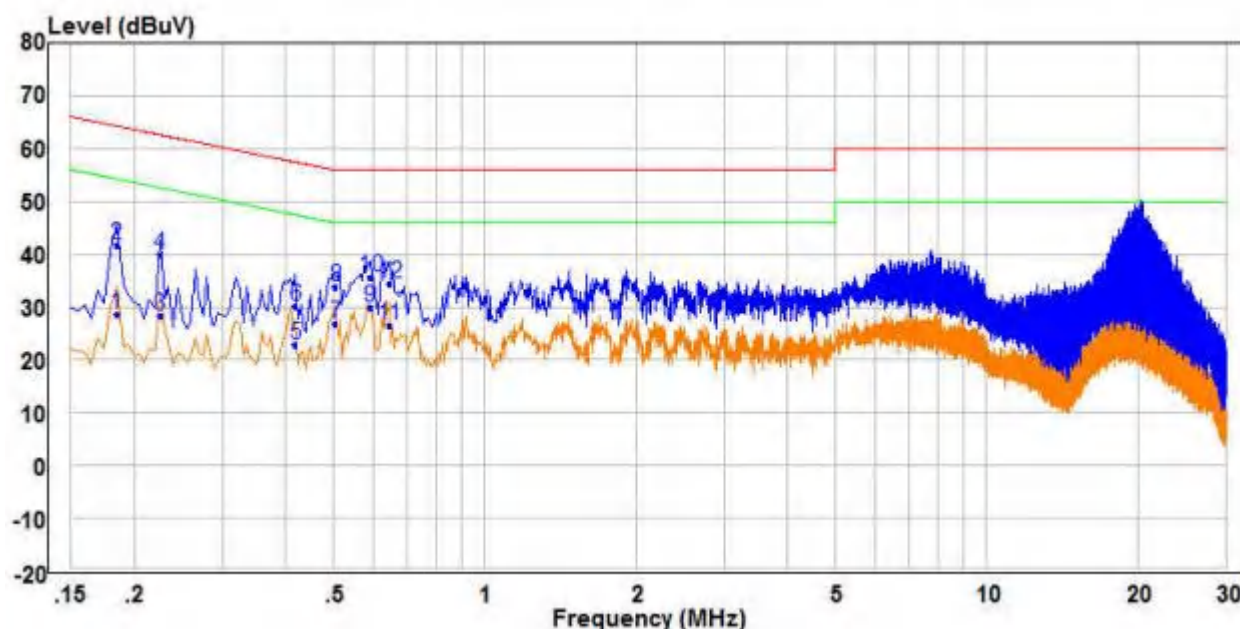


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.185	18.94	9.64	28.58	54.26	-25.68	Average	Line
2	0.185	31.98	9.64	41.62	64.26	-22.64	QP	Line
3	0.225	18.70	9.58	28.28	52.63	-24.35	Average	Line
4	0.225	30.20	9.58	39.78	62.63	-22.85	QP	Line
5	0.420	13.20	9.63	22.83	47.45	-24.62	Average	Line
6	0.420	20.61	9.63	30.24	57.45	-27.21	QP	Line
7	0.505	17.09	9.70	26.79	46.00	-19.21	Average	Line
8	0.505	23.99	9.70	33.69	56.00	-22.31	QP	Line
9 PP	0.590	19.98	9.79	29.77	46.00	-16.23	Average	Line
10 QP	0.590	25.85	9.79	35.64	56.00	-20.36	QP	Line
11	0.645	16.68	9.85	26.53	46.00	-19.47	Average	Line
12	0.645	24.64	9.85	34.49	56.00	-21.51	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

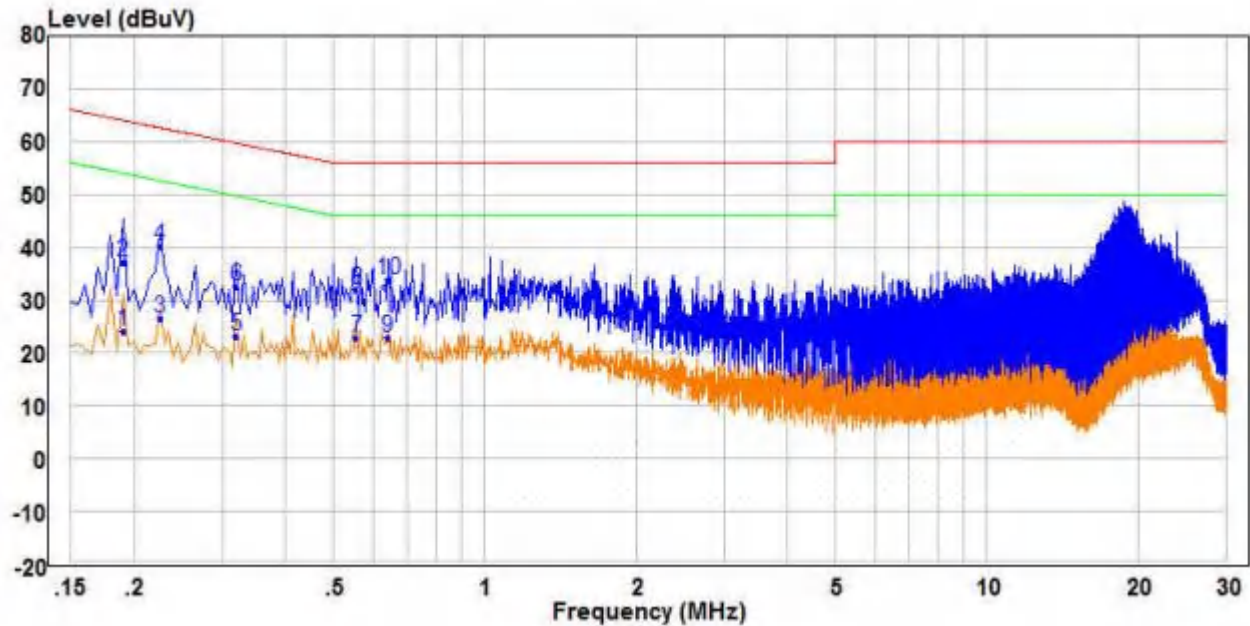

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.190	14.61	9.62	24.23	54.04	-29.81	Average	Neutral
2	0.190	27.46	9.62	37.08	64.04	-26.96	QP	Neutral
3	0.225	16.92	9.57	26.49	52.63	-26.14	Average	Neutral
4	0.225	30.63	9.57	40.20	62.63	-22.43	QP	Neutral
5	0.320	13.59	9.51	23.10	49.71	-26.61	Average	Neutral
6	0.320	22.98	9.51	32.49	59.71	-27.22	QP	Neutral
7	0.555	13.15	9.76	22.91	46.00	-23.09	Average	Neutral
8	0.555	22.25	9.76	32.01	56.00	-23.99	QP	Neutral
9	0.640	12.94	9.84	22.78	46.00	-23.22	Average	Neutral
10	0.640	23.83	9.84	33.67	56.00	-22.33	QP	Neutral
11 AV	18.820	18.35	9.81	28.16	50.00	-21.84	Average	Neutral
12 PP	18.820	32.34	9.81	42.15	60.00	-17.85	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Radiated Emission

Test Requirement:	47 CFR Part 15C Section 15.249 and 15.209 and 15.205				
Test Method:	ANSI C63.10: 2020				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Note: For fundamental frequency, RBW=5MHz, VBW=5MHz, Peak detector is for PK value, RMS detector is for Average value.					
Limit: (Spurious Emissions and band edge)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device. 2) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.0		Average Value	
		114.0		Peak Value	

Test Setup:

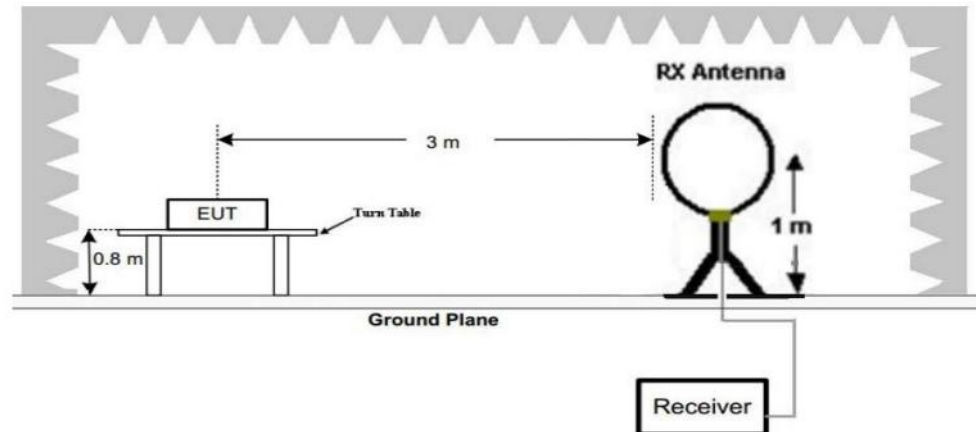


Figure 1. Below 30MHz

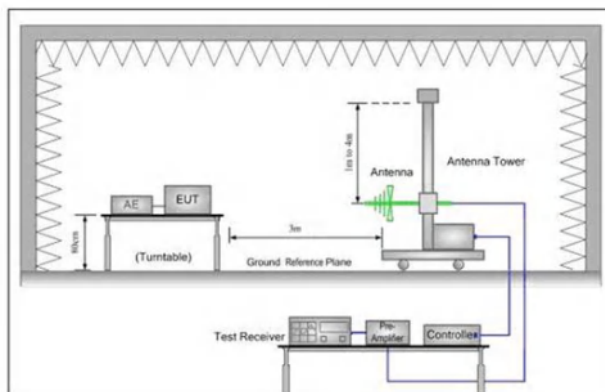


Figure 2. 30MHz to 1GHz

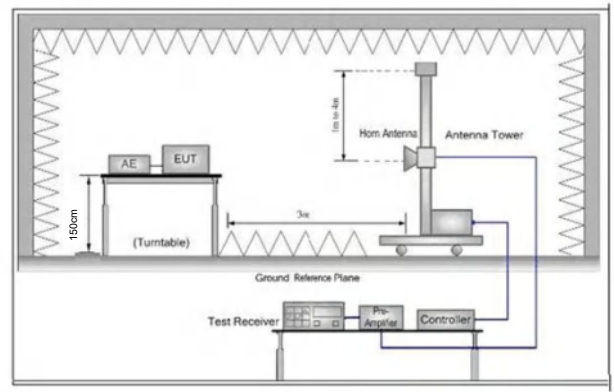


Figure 3. Above 1 GHz


Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table

	was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel,the middle channel,the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.
Final Test Mode:	Through Pre-scan, find the 2.4G SRD of data type and GFSK modulation at the lowest channel is the worst case. Only the worst case is recorded in the report.
Test Results:	Pass


Measurement Data

30MHz~1GHz		
Test mode:	Transmitting	Vertical

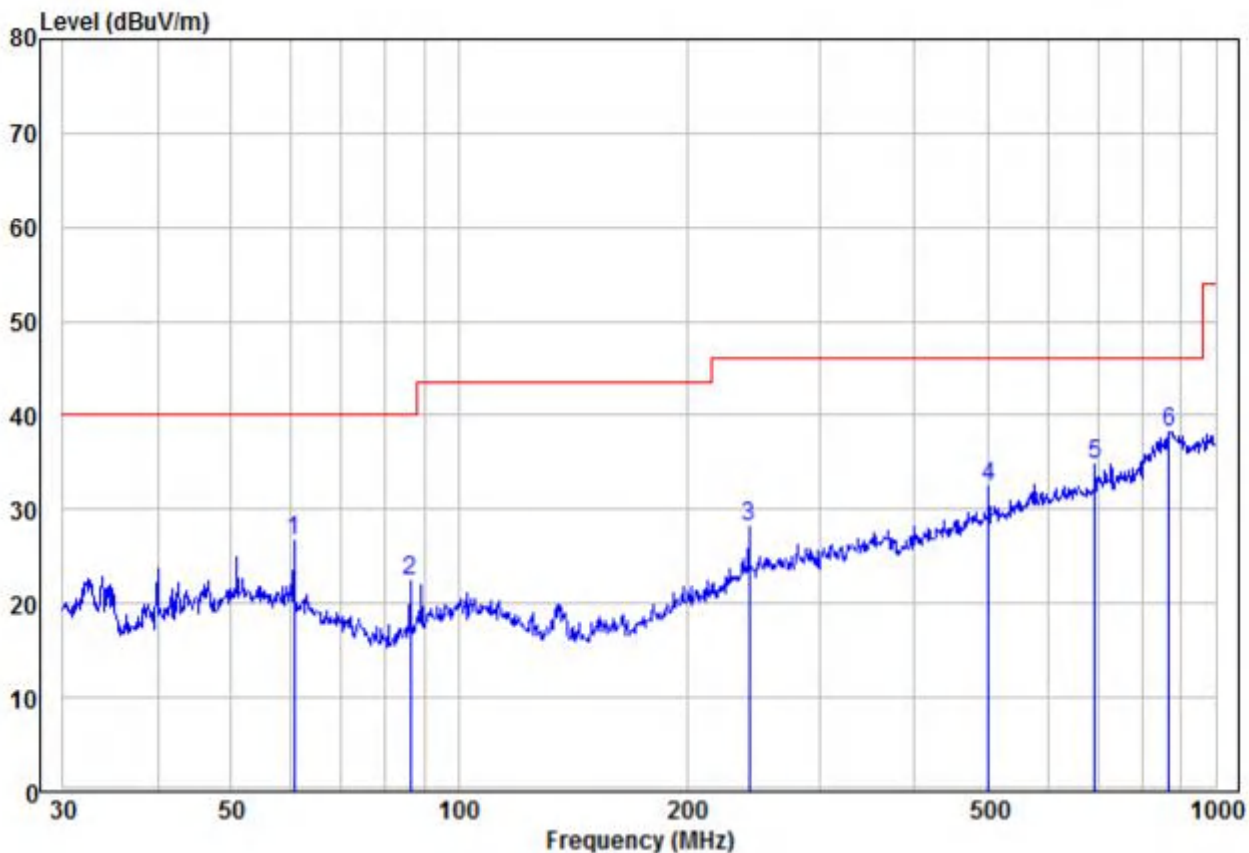

	Read			Limit	Over			APos	TPos
	Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			
1	60.49	14.80	11.96	26.76	40.00	-13.24	Peak	VERTICAL	100 38
2	86.20	13.13	9.28	22.41	40.00	-17.59	Peak	VERTICAL	100 147
3	241.68	12.73	15.35	28.08	46.00	-17.92	Peak	VERTICAL	100 144
4	501.18	11.56	20.94	32.50	46.00	-13.50	Peak	VERTICAL	100 211
5	691.99	11.09	23.69	34.78	46.00	-11.22	Peak	VERTICAL	100 78
6 pp	869.13	9.48	28.78	38.26	46.00	-7.74	Peak	VERTICAL	100 34

Test mode:	Transmitting	Horizontal
------------	--------------	------------

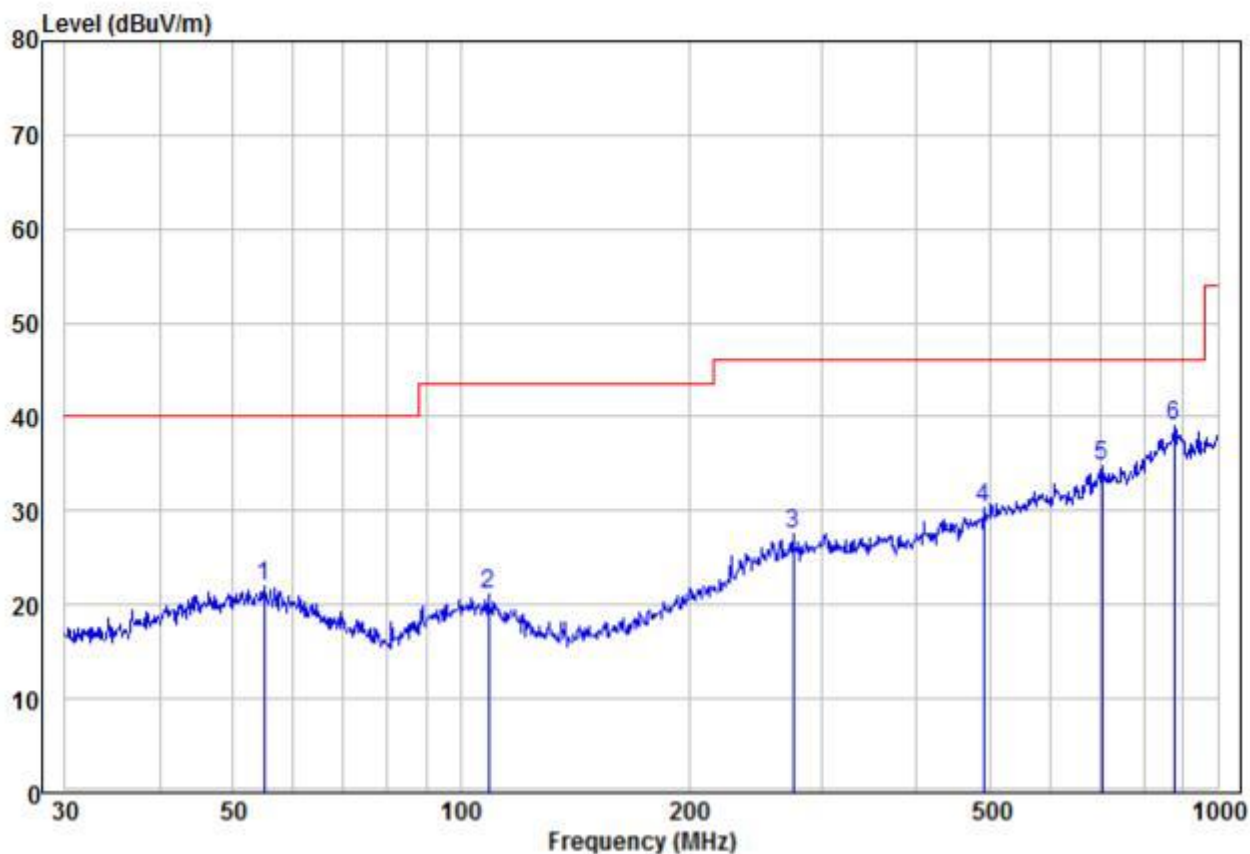

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	APos	TPos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			cm	deg
1	55.03	9.22	12.83	22.05	40.00	-17.95	Peak	HORIZONTAL	100	139
2	108.65	9.33	11.85	21.18	43.50	-22.32	Peak	HORIZONTAL	100	127
3	275.16	11.14	16.30	27.44	46.00	-18.56	Peak	HORIZONTAL	100	268
4	490.74	9.69	20.65	30.34	46.00	-15.66	Peak	HORIZONTAL	100	44
5	704.23	10.94	23.80	34.74	46.00	-11.26	Peak	HORIZONTAL	100	97
6 pp	875.25	10.13	28.88	39.01	46.00	-6.99	Peak	HORIZONTAL	100	24

Above 1GHz									
Test mode:		Transmitting		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant Pol	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2390	60.64	-9.2	51.44	74	-22.56	Peak	H	1.5	60.64
2390	46.47	-9.2	37.27	54	-16.73	AVG	H	1.5	46.47
2400	45.02	-9.39	35.63	74	-38.37	Peak	H	1.5	45.02
2400	45.42	-9.39	36.03	54	-17.97	AVG	H	1.5	45.42
2403	98.66	-9.33	89.33	114	-24.67	peak	H	1.5	98.66
2403	97.07	-9.33	87.74	94	-6.26	AVG	H	1.5	97.07
4806	55.95	-4.28	51.67	74	-22.33	peak	H	1.5	55.95
4806	42.67	-4.28	38.39	54	-15.61	AVG	H	1.5	42.67
7209	50.94	1.13	52.07	74	-21.93	peak	H	1.5	50.94
7209	37.35	1.13	38.48	54	-15.52	AVG	H	1.5	37.35
2390	61.87	-9.2	52.67	74	-21.33	peak	V	1.5	61.87
2390	46.46	-9.2	37.26	54	-16.74	AVG	V	1.5	46.46
2400	59.74	-9.39	50.35	74	-23.65	peak	V	1.5	59.74
2400	44.46	-9.39	35.07	54	-18.93	AVG	V	1.5	44.46
2403	94.74	-9.33	85.41	114	-28.59	peak	V	1.5	94.74
2403	91.88	-9.33	82.55	94	-11.45	AVG	V	1.5	91.88
4806	56.28	-4.28	52.00	74	-22.00	peak	V	1.5	56.28
4806	43.14	-4.28	38.86	54	-15.14	AVG	V	1.5	43.14
7209	51.91	1.13	53.04	74	-20.96	peak	V	1.5	51.91
7209	36.27	1.13	37.40	54	-16.60	AVG	V	1.5	36.27


Test mode:		Transmitting		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant . Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2440	98.50	-9.37	89.13	114	-24.87	peak	H	1.5	98.50
2440	98.19	-9.37	88.82	94	-5.18	AVG	H	1.5	98.19
4880	56.12	-4.14	51.98	74	-22.02	peak	H	1.5	56.12
4880	41.37	-4.14	37.23	54	-16.77	AVG	H	1.5	41.37
7320	52.98	0.56	53.54	74	-20.46	peak	H	1.5	52.98
7320	36.21	0.56	36.77	54	-17.23	AVG	H	1.5	36.21
2440	94.41	-9.36	85.05	114	-28.95	peak	V	1.5	94.41
2440	92.72	-9.36	83.36	94	-10.64	AVG	V	1.5	92.72
4880	56.08	-4.14	51.94	74	-22.06	peak	V	1.5	56.08
4880	41.03	-4.14	36.89	54	-17.11	AVG	V	1.5	41.03
7320	51.44	0.56	52.00	74	-22.00	peak	V	1.5	51.44
7320	35.71	0.56	36.27	54	-17.73	AVG	V	1.5	35.71

Test mode:		Transmitting		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant Pol	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2477	98.17	-9.23	88.94	114	-25.06	peak	H	1.5	98.17
2477	96.79	-9.23	87.56	94	-6.44	AVG	H	1.5	96.79
2483.5	59.92	-9.29	50.63	74	-23.37	Peak	H	1.5	59.92
2483.5	45.02	-9.29	35.73	54	-18.27	AVG	H	1.5	45.02
4954	56.82	-4.03	52.79	74	-21.21	peak	H	1.5	56.82
4954	41.70	-4.03	37.67	54	-16.33	AVG	H	1.5	41.70
7431	50.98	1.68	52.66	74	-21.34	peak	H	1.5	50.98
7431	37.15	1.68	38.83	54	-15.17	AVG	H	1.5	37.15
2477	97.57	-9.23	88.34	114	-25.66	peak	V	1.5	97.57
2477	95.26	-9.23	86.03	94	-7.97	AVG	V	1.5	95.26
2483.5	61.10	-9.29	51.81	74	-22.19	peak	V	1.5	61.10
2483.5	43.77	-9.29	34.48	54	-19.52	AVG	V	1.5	43.77
4954	57.08	-4.03	53.05	74	-20.95	peak	V	1.5	57.08
4954	41.81	-4.03	37.78	54	-16.22	AVG	V	1.5	41.81
7431	51.26	1.68	52.94	74	-21.06	peak	V	1.5	51.26
7431	37.71	1.68	39.39	54	-14.61	AVG	V	1.5	37.71

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz,The disturbance above 10GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .

5.4 20dB Bandwidth

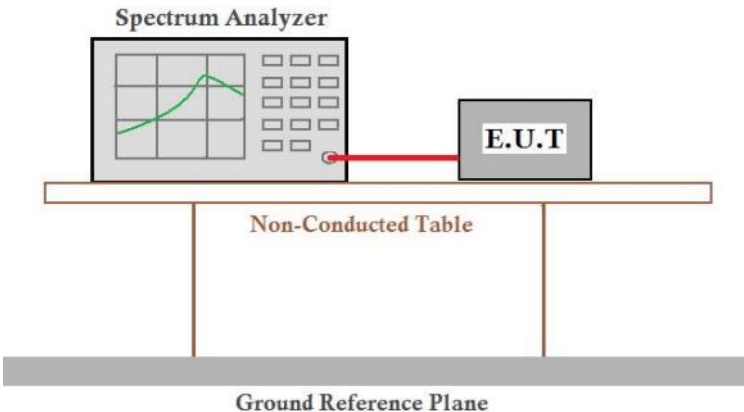
Test Requirement:	47 CFR Part 15C Section 15.215
Test Method:	ANSI C63.10:2020
Test Setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Mode:	Transmitting with OFDM modulation.
Limit:	N/A
Test Results:	Pass

Measurement Data

Test channel	20dB bandwidth (MHz)	Results
Lowest	2.323	Pass
Middle	2.315	Pass
Highest	2.315	Pass


Test plot as follows:

Test channel: Lowest

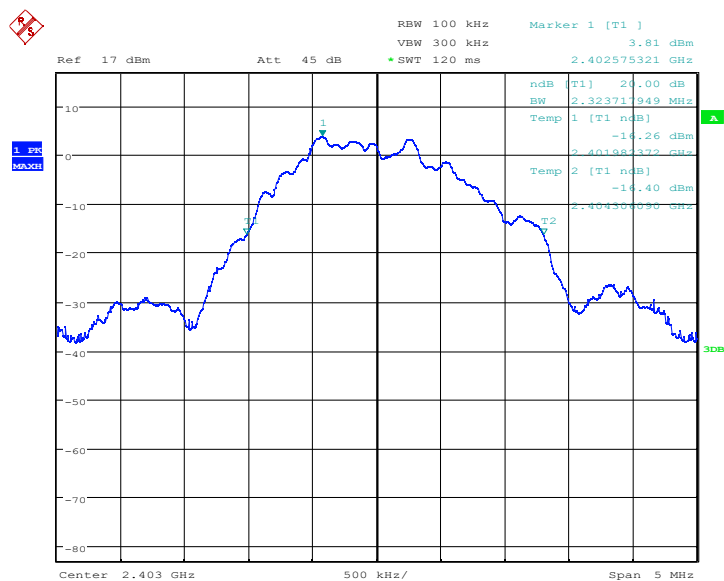


Date: 16.SEP.2025 10:41:19

Test channel: Middle

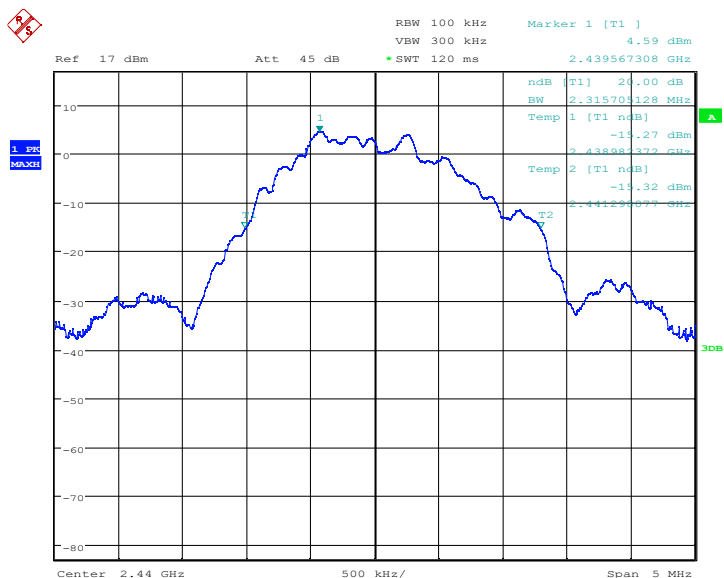

Date: 16.SEP.2025 10:58:04

Test channel: Highest

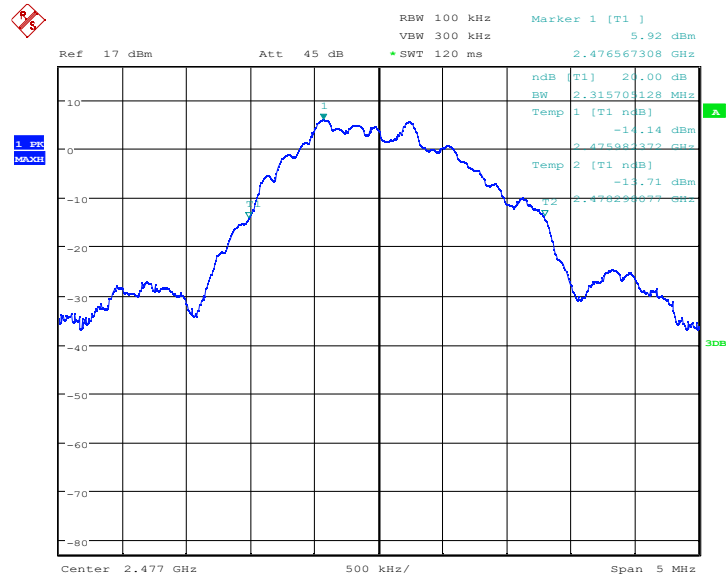


Date: 16.SEP.2025 10:59:00


6 Photographs

6.1 Radiated Emission Test Setup

9kHz~30MHz

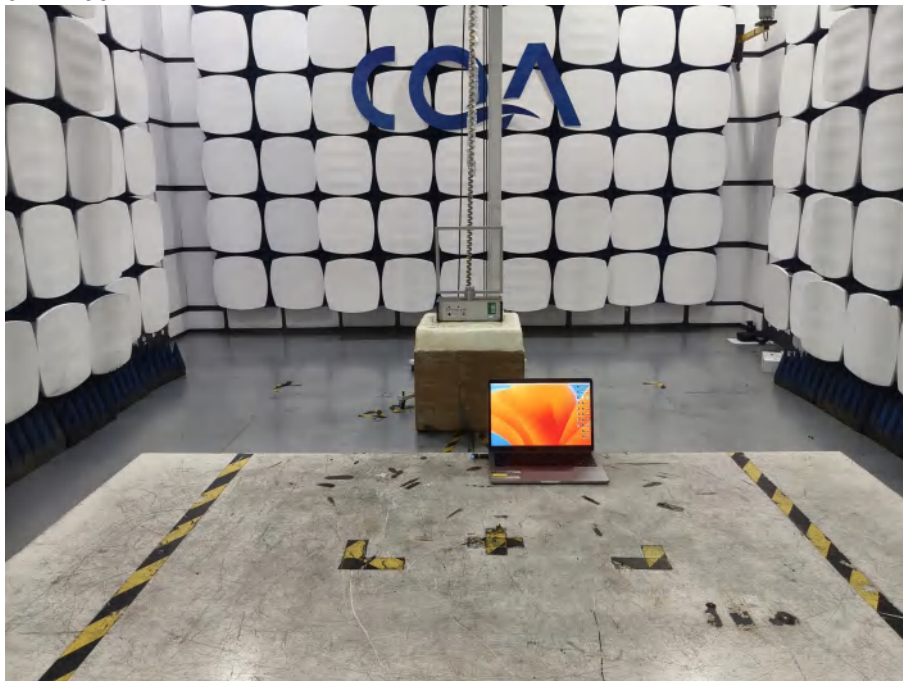

30MHz~1GHz:

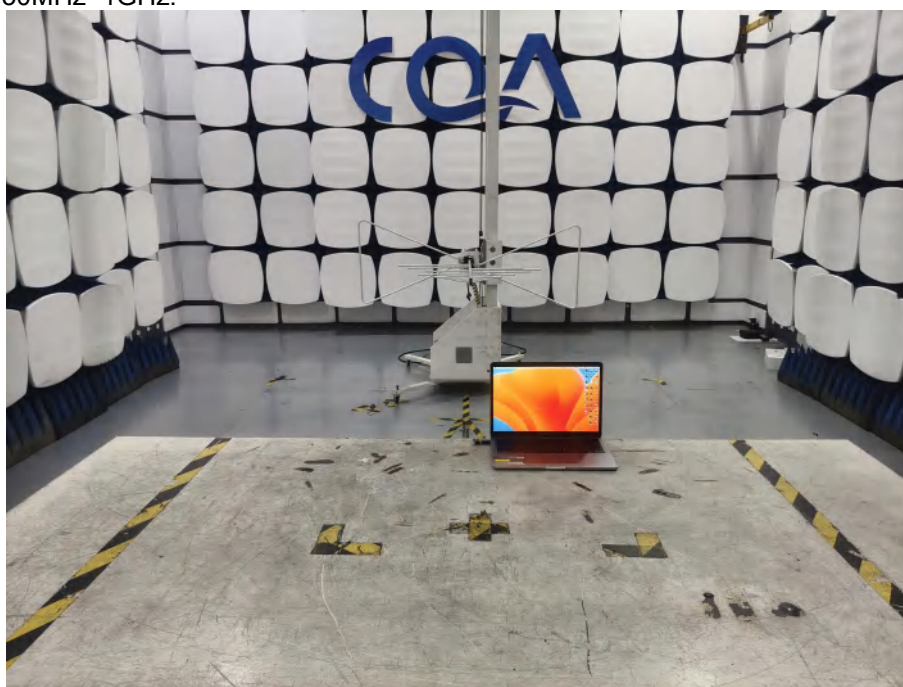

Above 1GHz:







6.2 Conducted Emission Test Setup







6.3 EUT Constructional Details



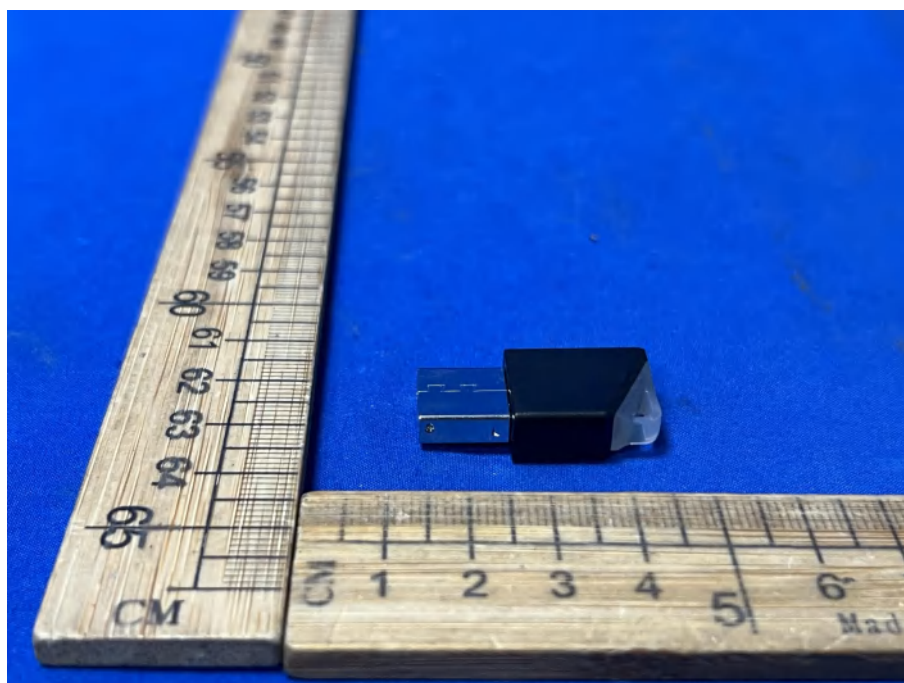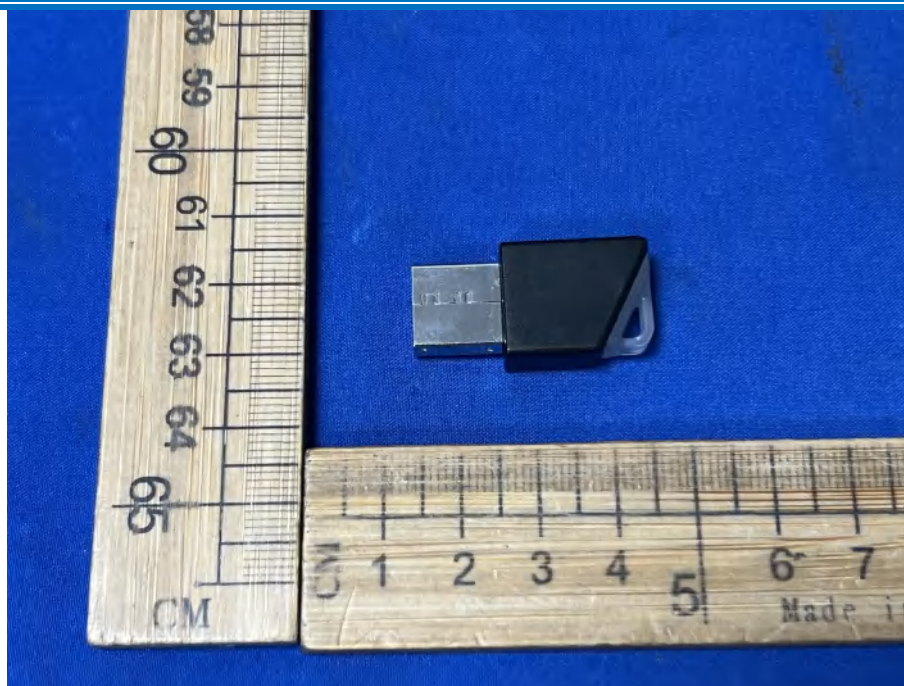

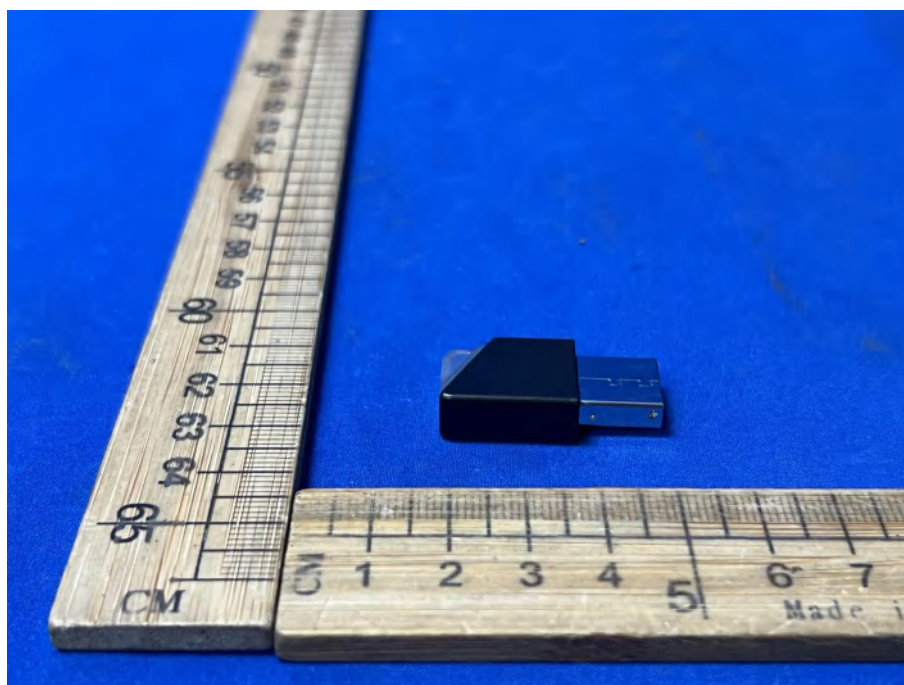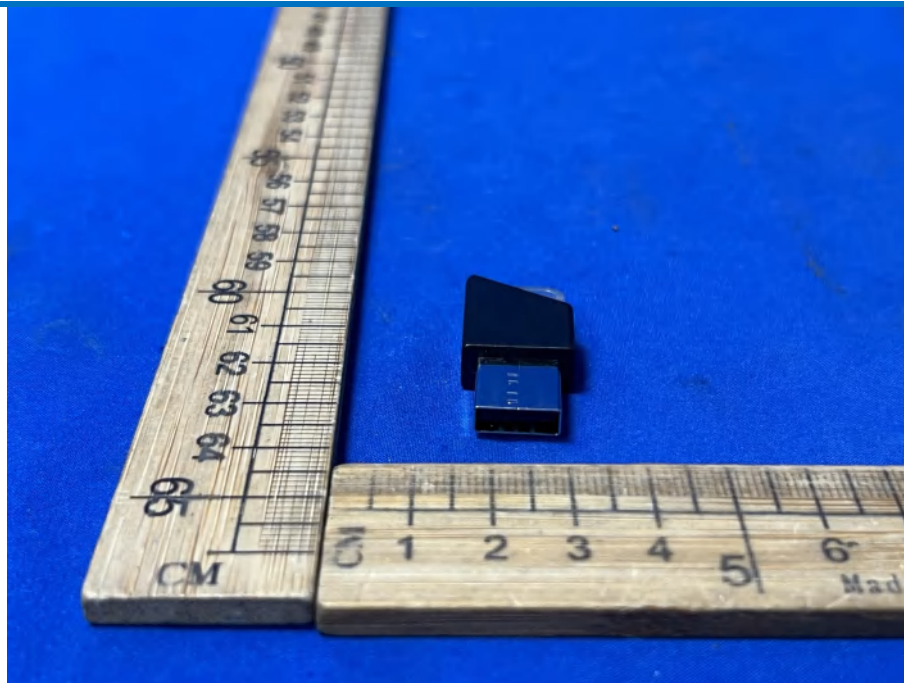

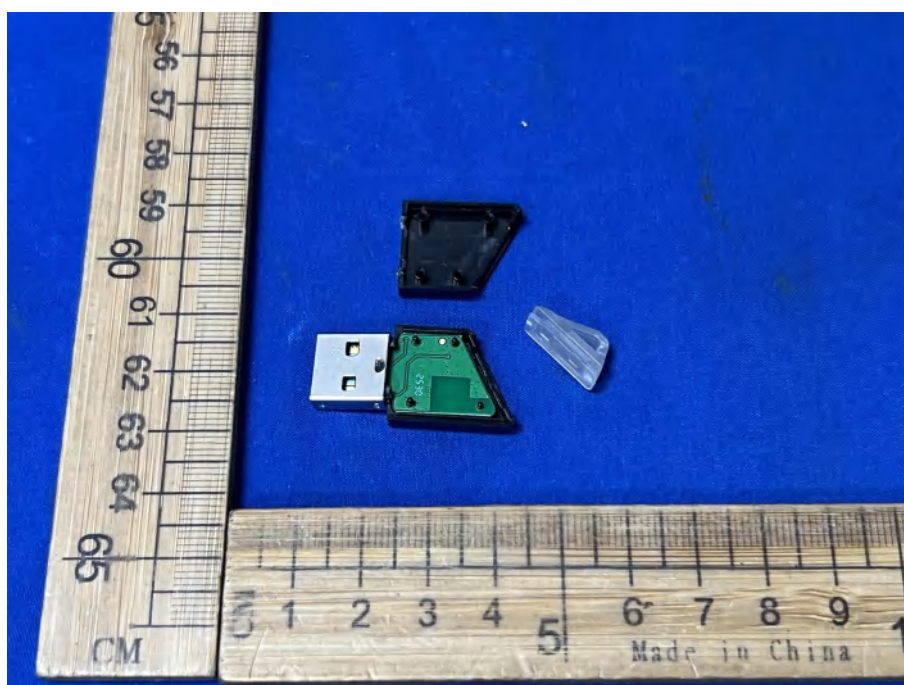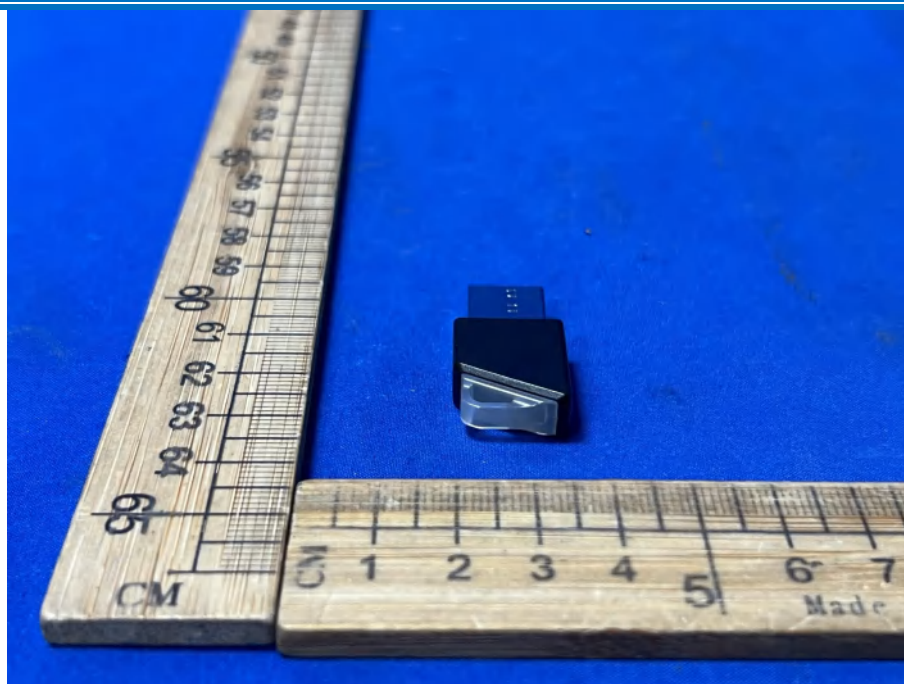

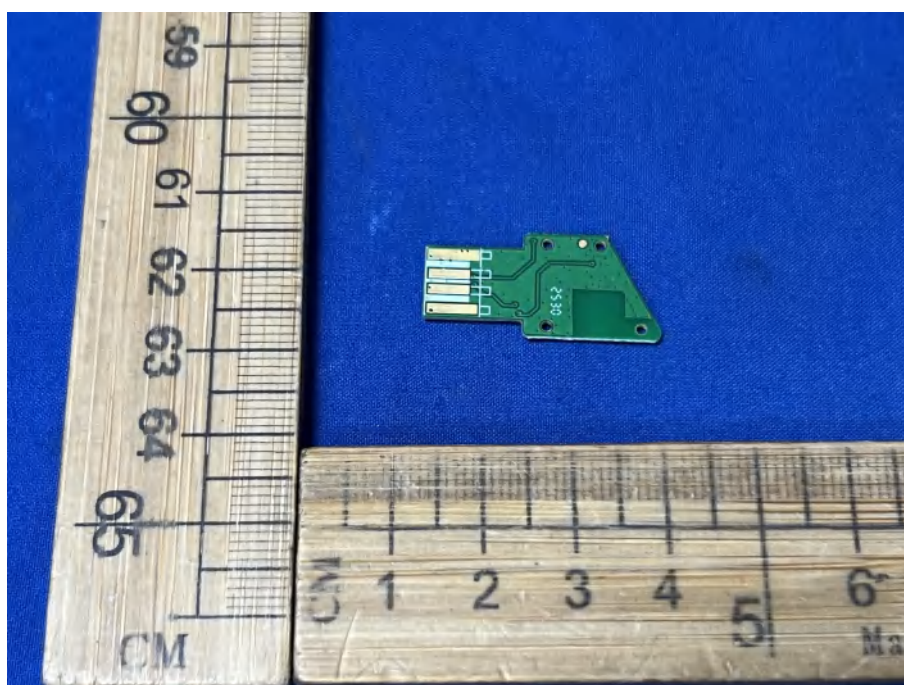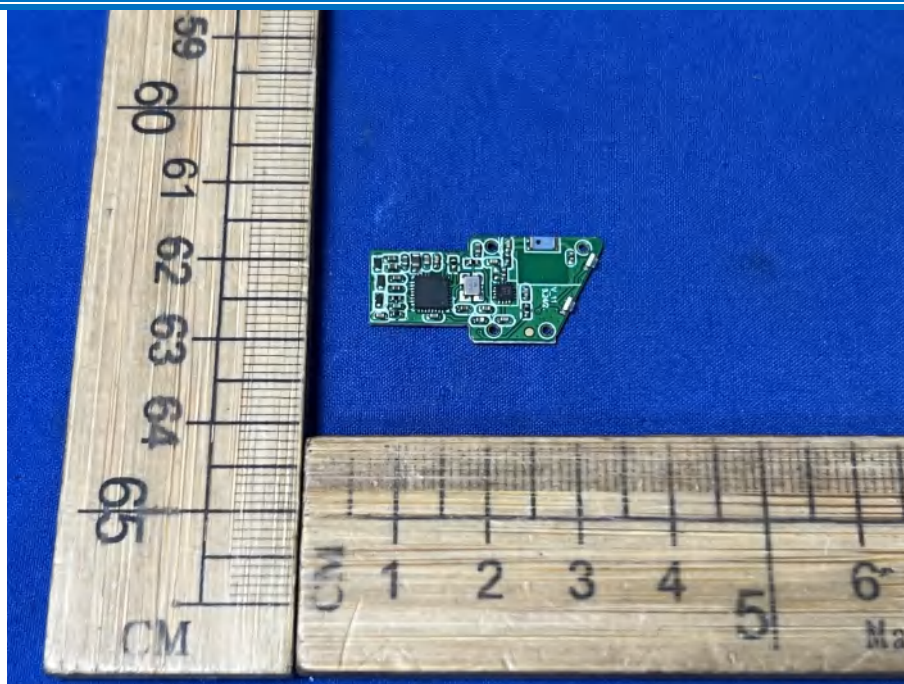

*** END OF REPORT ***